

# ETSI TS 125 225 V3.12.0 (2003-06)

---

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
Physical layer;  
Measurements (TDD)  
(3GPP TS 25.225 version 3.12.0 Release 1999)**

---



---

Reference

RTS/TSGR-0125225v3c0

---

Keywords

UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.  
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup> and **UMTS**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON**<sup>TM</sup> and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

# Contents

Intellectual Property Rights .....	2
Foreword.....	2
Foreword.....	4
1 Scope .....	5
2 References .....	5
3 Abbreviations .....	6
4 Control of UE/UTRAN measurements .....	6
4.1 General measurement concept.....	6
4.2 Measurements for cell selection/reselection.....	7
4.3 Measurements for Handover .....	7
4.4 Measurements for DCA.....	7
4.5 Measurements for timing advance.....	7
5 Measurement abilities for UTRA TDD.....	7
5.1 UE measurement abilities.....	8
5.1.1 P-CCPCH RSCP.....	8
5.1.2 CPICH RSCP.....	9
5.1.3 Timeslot ISCP.....	9
5.1.4 UTRA carrier RSSI.....	9
5.1.5 GSM carrier RSSI.....	9
5.1.6 SIR.....	9
5.1.7 CPICH Ec/No .....	10
5.1.8 Transport channel BLER .....	10
5.1.9 UE transmitted power .....	10
5.1.10 SFN-SFN observed time difference.....	11
5.1.11 SFN-CFN observed time difference .....	12
5.1.12 Observed time difference to GSM cell .....	12
5.1.13 UE GPS Timing of Cell Frames for UE positioning.....	12
5.2 UTRAN measurement abilities .....	13
5.2.1 RSCP .....	13
5.2.2 Timeslot ISCP.....	13
5.2.3 Received total wide band power .....	13
5.2.4 SIR.....	13
5.2.5 Transport channel BER.....	13
5.2.6 Transmitted carrier power.....	14
5.2.7 Transmitted code power.....	14
5.2.8 RX Timing Deviation .....	14
5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning .....	14
<b>Annex A (informative): Monitoring GSM from TDD: Calculation Results .....</b>	<b>15</b>
A.1 Low data rate traffic using 1 uplink and 1 downlink slot.....	15
A.1.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot.....	16
<b>Annex B (informative): Change history .....</b>	<b>18</b>
History .....	19

---

# Foreword

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document contains the description and definition of the measurements done at the UE and network in TDD mode in order to support operation in idle mode and connected mode.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
- [2] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [3] 3GPP TS 25.213: "Spreading and modulation (FDD)".
- [4] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [5] 3GPP TS 25.215: "Physical layer measurements (FDD)".
- [6] 3GPP TS 25.221: "Physical channels and mapping of transport channels onto physical channels (TDD)".
- [7] 3GPP TS 25.222: "Multiplexing and channel coding (TDD)".
- [8] 3GPP TS 25.223: "Spreading and modulation (TDD)".
- [9] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [10] 3GPP TS 25.301: "Radio Interface Protocol Architecture".
- [11] 3GPP TS 25.302: "Services provided by the Physical layer".
- [12] 3GPP TS 25.303: "UE functions and interlayer procedures in connected mode".
- [13] 3GPP TS 25.304: "UE procedures in idle mode".
- [14] 3GPP TS 25.331: "RRC Protocol Specification".
- [15] 3GPP TR 25.922: "Radio Resource Management Strategies".
- [16] 3GPP TR 25.923: "Report on Location Services (LCS)".
- [17] 3G TS 25.102: "UTRA (UE) TDD; Radio transmission and Reception"
- [18] 3G TS 25.105: "UTRA (BS) TDD; Radio transmission and Reception"
- [19] 3G TS 25.123: "Requirements for Support of Radio Resources Management (TDD)"

---

## 3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BCH	Broadcast Channel
BCCH	Broadcast Control Channel (GSM)
BER	Bit Error Rate
BLER	Block Error Rate
CFN	Connection Frame Number
CPICH	Common Pilot Channel (FDD)
CRC	Cyclic Redundancy Check
DCA	Dynamic Channel Allocation
DCH	Dedicated Channel
DPCH	Dedicated Physical Channel
$E_c/N_0$	Received energy per chip divided by the power density in the band
FACH	Forward Access Channel
FCCH	Frequency Correction Channel (GSM)
FDD	Frequency Division Duplex
GSM	Global System for Mobile Communication
GPS	Global Positioning System
ISCP	Interference Signal Code Power
P-CCPCH	Primary Common Control Physical Channel
PCH	Paging Channel
PLMN	Public Land Mobile Network
PRACH	Physical Random Access Channel
PDSCH	Physical Downlink Shared Channel
PUSCH	Physical Uplink Shared Channel
RACH	Random Access Channel
RSCP	Received Signal Code Power
RSSI	Received Signal Strength Indicator
S-CCPCH	Secondary Common Control Physical Channel
SCH	Synchronisation Channel
SCTD	Space Code Transmit Diversity
SF	Spreading Factor
SFN	System Frame Number
SIR	Signal-to-Interference Ratio
TDD	Time Division Duplex
TDMA	Time Division Multiple Access
TrCH	Transport Channel
TTI	Transmission Time Interval
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
USCH	Uplink Shared Channel
UTRA	UMTS Terrestrial Radio Access
UTRAN	UMTS Terrestrial Radio Access Network

---

## 4 Control of UE/UTRAN measurements

In this clause the general measurement control concept of the higher layers is briefly described to provide an understanding on how L1 measurements are initiated and controlled by higher layers.

### 4.1 General measurement concept

L1 provides with the measurement specifications a toolbox of measurement abilities for the UE and the UTRAN. These measurements can be differentiated in different measurement types: intra-frequency, inter-frequency, inter-system, traffic volume, quality and internal measurements (see [14]).

In the L1 measurement specifications the measurements are distinguished between measurements in the UE (the

messages will be described in the RRC Protocol) and measurements in the UTRAN (the messages will be described in the NBAP and the Frame Protocol).

To initiate a specific measurement the UTRAN transmits a 'measurement control message' to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects and quantity, the reporting quantities, criteria (periodical/event-triggered) and mode (acknowledged/unacknowledged), see [14].

When the reporting criteria is fulfilled the UE shall answer with a 'measurement report message' to the UTRAN including the measurement ID and the results.

In idle mode the measurement control message is broadcast in a System Information.

Intra-frequency reporting events, traffic volume reporting events and UE internal measurement reporting events described in [14] define events which trigger the UE to send a report to the UTRAN. This defines a toolbox from which the UTRAN can choose the needed reporting events.

## 4.2 Measurements for cell selection/reselection

Whenever a PLMN has been selected the UE shall start to find a suitable cell to camp on, this is 'cell selection'.

When camped on cell the UE regularly searches for a better cell depending on the cell reselection criteria, this is called 'cell reselection'. The procedures for cell selection and reselection are described in [13] and the measurements carried out by the UE are explained in this specification.

## 4.3 Measurements for Handover

For the handover preparation the UE receives from the UTRAN a list of cells (e.g. TDD, FDD or GSM), which the UE shall monitor (see 'monitored set' in [14]) in its idle timeslots.

At the beginning of the measurement process the UE shall find synchronization to the cell to measure using the synchronization channel. This is described under 'cell search' in [9] if the monitored cell is a TDD cell and in [4] if it is an FDD cell.

For a TDD cell to monitor after this procedure the exact timing of the midamble of the P-CCPCH is known and the measurements can be performed. Depending on the UE implementation and if timing information about the cell to monitor is available, the UE may perform the measurements on the P-CCPCH directly without prior SCH synchronisation.

## 4.4 Measurements for DCA

DCA is used to optimise the resource allocation by means of a channel quality criteria or traffic parameters. The DCA measurements are configured by the UTRAN. The UE reports the measurements to the UTRAN.

For DCA no measurements are performed in idle mode in the serving TDD cell.

When connecting with the initial access the UE immediately starts measuring the ISCP of time slots which are communicated on the BCH. The measurements and the preprocessing are done while the UTRAN assigns an UL channel for the UE for signalling and measurement reporting.

In connected mode the UE performs measurements according to a measurement control message from the UTRAN.

## 4.5 Measurements for timing advance

To update timing advance of a moving UE the UTRAN measures 'Received Timing Deviation', i.e. the time difference of the received UL transmission (PRACH, DPCH, PUSCH) in relation to its timeslot structure that means in relation to the ideal case where an UL transmission would have zero propagation delay. The measurements are reported to higher layers, where timing advance values are calculated and signalled to the UE.

---

# 5 Measurement abilities for UTRA TDD

In this clause the physical layer measurements reported to higher layers. (this may also include UE internal measurements not reported over the air-interface) are defined.



## 5.1 UE measurement abilities

The structure of the table defining a UE measurement quantity is shown below.

Column field	Comment
<b>Definition</b>	Contains the definition of the measurement.
<b>Applicable for</b>	<p>States in which RRC state according to [14] a measurement shall be possible to be performed. For RRC connected mode states information is also given on the possibility to perform the measurement on intra-frequency and/or inter-frequency.</p> <p>The following terms are used in the tables:            Idle = Shall be possible to perform in idle mode;            URA_PCH = Shall be possible to perform in URA_PCH;            CELL_PCH = Shall be possible to perform in CELL_PCH;            CELL_FACH = Shall be possible to perform in CELL_FACH;            CELL_DCH = Shall be possible to perform in CELL_DCH;</p> <p>For all RRC connected mode states i.e. URA_PCH, CELL_PCH, CELL_FACH and CELL_DCH            Intra appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an intra-frequency cell;            Inter appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-frequency cell.            Inter-RAT appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-RAT cell.</p>

NOTE 1: Measurements for TDD which are specified on the Primary CCPCH (P-CCPCH) are carried out on the P-CCPCH or on any other beacon channel, see [6].

NOTE 2: For the beacon channels [6], the received power measurements shall be based on the received power for midamble  $m^{(1)}$  if no Space Code Transmit Diversity (SCTD) is applied to the P-CCPCH and on the sum of the received powers for midambles  $m^{(1)}$  and  $m^{(2)}$  if SCTD is applied to the P-CCPCH.

NOTE 3: The UTRAN has to take into account the UE capabilities when specifying the timeslots to be measured in the measurement control message.

NOTE 4: The line 'applicable for' indicates whether the measurement is applicable for inter-frequency and/or intra-frequency and furthermore for idle and/or connected mode.

NOTE 5: The Interference part of the SIR measurement will be dependent on the receiver implementation, and will normally be different from the Timeslot ISCP measurement.

NOTE 6: The measurement 'Timeslot ISCP' is only a measure of the intercell interference.

NOTE 7: The term "antenna connector of the UE" used in this sub-clause to define the reference point for the UE measurements is defined in [17].

NOTE 8: Performance and reporting requirements for the UE measurements are defined in [19].

### 5.1.1 P-CCPCH RSCP

<b>Definition</b>	Received Signal Code Power, the received power on P-CCPCH of own or neighbour cell. The reference point for the RSCP shall be the antenna connector of the UE.
<b>Applicable for</b>	Idle, URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter, CELL_DCH intra, CELL DCH inter

### 5.1.2 CPICH RSCP

<b>Definition</b>	Received Signal Code Power, the received power on one code measured on the Primary CPICH. The reference point for the RSCP shall be the antenna connector of the UE. (This measurement is used in TDD for monitoring FDD cells while camping on a TDD cell). If Tx diversity is applied on the Primary CPICH the received code power from each antenna shall be separately measured and summed together in [W] to a total received code power on the Primary CPICH.
<b>Applicable for</b>	Idle, URA_PCH inter, CELL_PCH inter, CELL_FACH inter, CELL_DCH inter

### 5.1.3 Timeslot ISCP

<b>Definition</b>	Interference Signal Code Power, the interference on the received signal in a specified timeslot measured on the midamble. The reference point for the ISCP shall be the antenna connector of the UE.
<b>Applicable for</b>	CELL_FACH intra, CELL_DCH intra

### 5.1.4 UTRA carrier RSSI

<b>Definition</b>	The received wide band power, including thermal noise and noise generated in the receiver, within the bandwidth defined by the receiver pulse shaping filter, for TDD within a specified timeslot. The reference point for the measurement shall be the antenna connector of the UE.
<b>Applicable for</b>	CELL_DCH intra, CELL_DCH inter

### 5.1.5 GSM carrier RSSI

<b>Definition</b>	Received Signal Strength Indicator, the wide-band received power within the relevant channel bandwidth Measurement shall be performed on a GSM BCCH carrier. The reference point for the RSSI shall be the antenna connector of the UE.
<b>Applicable for</b>	Idle, URA_PCH inter-RAT, CELL_PCH inter-RAT, CELL_FACH inter-RAT, CELL_DCH inter-RAT

### 5.1.6 SIR

<b>Definition</b>	Signal to Interference Ratio, defined as: $(RSCP/Interference) \times SF$ . Where: RSCP = Received Signal Code Power, the received power on the code of a specified DPCH or PDSCH. Interference = The interference on the received signal in the same timeslot which can't be eliminated by the receiver. SF = The used spreading factor.  The reference point for the SIR shall be the antenna connector of the UE.
<b>Applicable for</b>	CELL_FACH intra, CELL_DCH intra

### 5.1.7 CPICH Ec/No

<b>Definition</b>	The received energy per chip divided by the power density in the band. The CPICH Ec/No is identical to CPICH RSCP/UTRA Carrier RSSI. The measurement shall be performed on the Primary CPICH. The reference point for the CPICH Ec/No shall be the antenna connector of the UE. (This measurement is used in TDD for monitoring FDD cells while camping on a TDD cell) If Tx diversity is applied on the Primary CPICH the received energy per chip (Ec) from each antenna shall be separately measured and summed together in [Ws] to a total received chip energy per chip on the Primary CPICH, before calculating the Ec/No.
<b>Applicable for</b>	Idle, URA_PCH inter, CELL_PCH inter, CELL_FACH inter, CELL_DCH inter

### 5.1.8 Transport channel BLER

<b>Definition</b>	Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC on each transport block.
<b>Applicable for</b>	CELL_DCH intra

### 5.1.9 UE transmitted power

<b>Definition</b>	The total UE transmitted power on one carrier in a specified timeslot. The reference point for the UE transmitted power shall be the antenna connector of the UE.
<b>Applicable for</b>	CELL_FACH intra, CELL_DCH intra

## 5.1.10 SFN-SFN observed time difference

<b>Definition</b>	<p>SFN-SFN observed time difference is the time difference of the reception times of frames from two cells (serving and target) measured in the UE and expressed in chips. It is distinguished by two types. Type 2 applies if the serving and the target cell have the same frame timing.</p> <p>The reference point for the SFN-SFN observed time difference type 1 and 2 shall be the antenna connector of the UE.</p> <p><b>Type 1:</b>  SFN-SFN observed time difference = <math>OFF \times 38400 + T_m</math> in chips, where:  <math>T_m = T_{RxSFNi} - T_{RxSFNk}</math>, given in chip units with the range [0, 1, ..., 38399] chips  <math>T_{RxSFNi}</math> = time of start (defined by the first detected path in time) of the received frame SFN<sub>i</sub> of the serving TDD cell i.  <math>T_{RxSFNk}</math> = time of start (defined by the first detected path in time) of the received frame SFN<sub>k</sub> of the target UTRA cell k received most recently in time before the time instant <math>T_{RxSFNi}</math> in the UE. If this frame SFN<sub>k</sub> of the target UTRA cell is received exactly at <math>T_{RxSFNi}</math> then <math>T_{RxSFNk} = T_{RxSFNi}</math> (which leads to <math>T_m = 0</math>).  <math>OFF = (SFN_i - SFN_k) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames  <math>SFN_i</math> = system frame number for downlink frame from serving TDD cell i in the UE at the time <math>T_{RxSFNi}</math>.  <math>SFN_k</math> = system frame number for downlink frame from target UTRA cell k received in the UE at the time <math>T_{RxSFNk}</math>. (for FDD: the P-CCPCH frame)</p> <p>The reference point for the SFN-SFN observed time difference type 1 shall be the antenna connector of the UE.</p> <p><b>Type 2:</b>  SFN-SFN observed time difference = <math>T_{RxTSk} - T_{RxTSi}</math>, in chips, where  <math>T_{RxTSi}</math> : time of start (defined by the first detected path in time) of a timeslot received from the serving TDD cell i.  <math>T_{RxTSk}</math> : time of start (defined by the first detected path in time) of a timeslot received from the target UTRA cell k that is closest in time to the start of the timeslot of the serving TDD cell i.</p> <p>The reference point for the SFN-SFN observed time difference type 2 shall be the antenna connector of the UE.</p>
<b>Applicable for</b>	<p><b>Type 1:</b> CELL_FACH intra  <b>Type 2:</b>  Idle,  URA_PCH intra, URA_PCH inter,  CELL_PCH intra, CELL_PCH inter,  CELL_FACH intra, CELL_FACH inter,  CELL_DCH intra, CELL_DCH inter</p>

### 5.1.11 SFN-CFN observed time difference

<b>Definition</b>	<p>The SFN-CFN observed time difference is defined as:</p> <p><math>T_m</math> for an FDD neighbour cell (i.e. the value is reported in chips),  <math>OFF</math> for a TDD neighbour cell (i.e the value is reported in frames),          where:</p> <p><math>T_m = T_{UE\text{Tx}} - T_{Rx\text{SFN}}</math>, given in chip units with the range [0, 1, ..., 38399] chips.</p> <p><math>T_{UE\text{Tx}} =</math> the time at the beginning of the frame with the connection frame number <math>CFN_{\text{Tx}}</math> considering the transmission from the UE in the serving TDD cell.</p> <p><math>T_{Rx\text{SFN}} =</math> the time (defined by the first detected path in time) at the beginning of the frame with the system frame number SFN (for FDD neighbour cells: P-CCPCH frame is considered) received at the UE from a neighbour cell. <math>T_{Rx\text{SFN}}</math> is the time instant most recent in time before the time instant <math>T_{UE\text{Tx}}</math></p> <p><math>OFF = (SFN - CFN_{\text{Tx}}) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames.</p> <p><math>CFN_{\text{Tx}} =</math> the connection frame number for the UE transmission.</p> <p><math>SFN =</math> is the system frame number for the neighbouring cell frame (for FDD neighbour cells: P-CCPCH frame) received in the UE at the time instant <math>T_{Rx\text{SFN}}</math>.</p> <p>The reference point for the SFN-CFN observed time difference shall be the antenna connector of the UE.</p>
<b>Applicable for</b>	CELL_DCH intra, CELL_DCH inter

### 5.1.12 Observed time difference to GSM cell

<b>Definition</b>	<p>Observed time difference to GSM cell is reported as the time difference <math>T_m</math> in ms, where</p> <p><math>T_m = T_{Rx\text{GSM}k} - T_{Rx\text{SFN}0i}</math></p> <p><math>T_{Rx\text{SFN}0i}</math>: time of start (defined by the first detected path in time) of the received frame SFN=0 of the serving TDD cell <math>i</math></p> <p><math>T_{Rx\text{GSM}k}</math>: time of start of the GSM BCCH 51-multiframe of the considered target GSM frequency <math>k</math> received closest in time after the time <math>T_{Rx\text{SFN}0i}</math>. If the next GSM BCCH 51-multiframe is received exactly at <math>T_{Rx\text{SFN}0i}</math> then <math>T_{Rx\text{GSM}k} = T_{Rx\text{SFN}0i}</math> (which leads to <math>T_m=0</math>). The beginning of the GSM BCCH 51-multiframe is defined as the beginning of the first tail bit of the frequency correction burst in the first TDMA-frame of the GSM BCCH 51-multiframe, i.e. the TDMA-frame following the IDLE-frame.</p> <p>The reference point for the Observed time difference to GSM cell shall be the antenna connector of the UE.</p> <p>The reported time difference is calculated from the actual measurement in the UE. The actual measurement shall be based on:</p> <p><math>T_{\text{MeasGSM},j}</math>: The start of the first tail bit of the most recently received GSM SCH on frequency <math>j</math></p> <p><math>T_{\text{MeasSFN},j}</math>: The start of the last frame received in TDD cell <math>i</math> before receiving the GSM SCH on frequency <math>j</math></p> <p>For calculating the reported time difference, the frame lengths are always assumed to be 10 ms for UTRA and (60/13) ms for GSM.</p>
<b>Applicable for</b>	idle, URA PCH inter-RAT, CELL PCH inter-RAT, CELL_DCH Inter-RAT

### 5.1.13 UE GPS Timing of Cell Frames for UE positioning

<b>Definition</b>	<p><math>T_{UE\text{-GPS}j}</math> is defined as the time of occurrence of a specified UTRAN event according to GPS Time Of Week. The specified UTRAN event is the beginning of a particular frame (identified through its SFN) in the first detected path (in time) of the cell <math>j</math> P-CCPCH. The reference point for <math>T_{UE\text{-GPS}j}</math> shall be the antenna connector of the UE.</p>
<b>Applicable for</b>	CELL_FACH intra, CELL_DCH intra

## 5.2 UTRAN measurement abilities

NOTE 1: If the UTRAN supports multiple frequency bands then the measurements apply for each frequency band individually.

NOTE 2: The Interference part of the SIR measurement will be dependent on the receiver implementation, and will normally be different from the Timeslot ISCP measurement

NOTE 3: The term "antenna connector" used in this sub-clause to define the reference point for the UTRAN measurements refers to the "BS antenna connector" test port A and test port B as described in [18]. The term "antenna connector" refers to Rx or Tx antenna connector as described in the respective measurement definitions.

### 5.2.1 RSCP

<b>Definition</b>	Received Signal Code Power, the received power on one DPCH, PRACH or PUSCH code. The reference point for the RSCP shall be the Rx antenna connector.
-------------------	--

### 5.2.2 Timeslot ISCP

<b>Definition</b>	Interference Signal Code Power, the interference on the received signal in a specified timeslot measured on the midamble. The reference point for the ISCP shall be the Rx antenna connector.
-------------------	---

### 5.2.3 Received total wide band power

<b>Definition</b>	The received wide band power in a specified timeslot including the noise generated in the receiver, within the bandwidth defined by the pulse shaping filter. In case of receiver diversity the reported value shall be the linear average of the power in the diversity branches. The reference point for the Received total wideband power measurement shall be the output of the pulse shaping filter in the receiver.
-------------------	---

### 5.2.4 SIR

<b>Definition</b>	Signal to Interference Ratio, defined as: $(RSCP/Interference) \times SF$ . Where: RSCP = Received Signal Code Power, the received power on the code of a specified DPCH, PRACH or PUSCH. Interference = The interference on the received signal in the same timeslot which can't be eliminated by the receiver. SF = The used spreading factor.  The reference point for the SIR shall be the Rx antenna connector.
-------------------	--

### 5.2.5 Transport channel BER

<b>Definition</b>	The transport channel BER is an estimation of the average bit error rate (BER) of DCH or USCH data. The transport channel (TrCH) BER is measured from the data considering only non-punctured bits at the input of the channel decoder in Node B. It shall be possible to report an estimate of the transport channel BER for a TrCH after the end of each TTI of the TrCH. The reported TrCH BER shall be an estimate of the BER during the latest TTI for that TrCH. Transport channel BER is only required to be reported for TrCHs that are channel coded.
-------------------	---

## 5.2.6 Transmitted carrier power

<b>Definition</b>	<p>Transmitted carrier power, is the ratio between the total transmitted power and the maximum transmission power.</p> <p>Total transmission power is the power [W] transmitted on one DL carrier in a specific timeslot from one UTRAN access point.</p> <p>Maximum transmission power is the power [W] on the same carrier when transmitting at the configured maximum transmission power for the cell.</p> <p>The measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the transmitted carrier power measurement shall be the Tx antenna connector.</p> <p>In case of Tx diversity the transmitted carrier power is the ratio between the sum of the total transmitted powers of all branches and the maximum transmission power.</p>
-------------------	---

## 5.2.7 Transmitted code power

<b>Definition</b>	<p>Transmitted Code Power, is the transmitted power on one carrier and one channelisation code in one timeslot. The reference point for the transmitted code power measurement shall be the Tx antenna connector.</p>
-------------------	---

## 5.2.8 RX Timing Deviation

<b>Definition</b>	<p>'RX Timing Deviation' is the time difference <math>TRX_{dev} = TTS - TRX_{path}</math> in chips, with</p> <p>TRX<sub>path</sub>: time of the reception in the Node B of the first detected uplink path (in time) to be used in the detection process. The reference point for TRX<sub>path</sub> shall be the Rx antenna connector.</p> <p>TTS: time of the beginning of the respective slot according to the Node B internal timing</p>
-------------------	---

NOTE: This measurement can be used for timing advance calculation or location services.

## 5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning


<b>Definition</b>	<p><math>T_{UTRAN-GPS}</math> is defined as the time of occurrence of a specified UTRAN event according to GPS Time Of Week. The specified UTRAN event is the beginning of the transmission of a particular frame (identified through its SFN) transmitted in the cell. The reference point for <math>T_{UTRAN-GPSj}</math> shall be the Tx antenna connector.</p>
-------------------	--

## Annex A (informative): Monitoring GSM from TDD: Calculation Results

### A.1 Low data rate traffic using 1 uplink and 1 downlink slot

NOTE: The section evaluates the time to acquire the FCCH if all idle slots are devoted to the tracking of a FCCH burst, meaning that no power measurements is done concurrently. The derived figures are better than those for GSM. The section does not derive though any conclusion. A conclusion may be that the use of the idle slots is a valid option. An alternative conclusion may be that this is the only mode to be used, removing hence the use of the slotted frames for low data traffic or the need for a dual receiver, if we were to considering the monitoring of GSM cells only, rather than GSM, TDD and FDD.

If a single synthesiser UE uses only one uplink and one downlink slot, e.g. for speech communication, the UE is not in transmit or receive state during 13 slots in each frame. According to the timeslot numbers allocated to the traffic, this period can be split into two continuous idle intervals A and B as shown in the figure below.

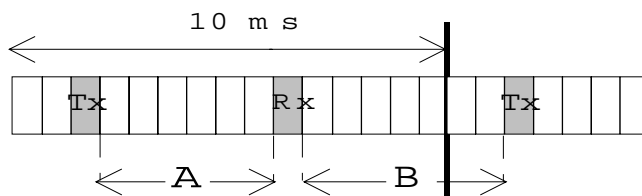

**Figure A.1: Possible idle periods in a frame with two occupied timeslots**

A is defined as the number of idle slots between the Tx and Rx slots and B the number of idle slots between the Rx and Tx slots. It is clear that  $A+B=13$  time slots.

In the scope of low cost terminals, a [0.8] ms period is supposed to be required to perform a frequency jump from UMTS to GSM. This lets possibly two free periods of  $A \cdot T_s - 1.6$  ms and  $B \cdot T_s - 1.6$  ms during which the mobile station can monitor GSM,  $T_s$  being the slot period.

Following table evaluates the average synchronisation time and maximum synchronisation time, where the announced synchronisation time corresponds to the time needed to find the FCCH. The FCCH is supposed to be perfectly detected meaning that the FCCH is found if it is entirely present in the monitoring window. The FCCH being found the SCH location is unambiguously known from that point. All the 13 idle slots are assumed to be devoted to FCCH tracking and the UL traffic is supposed to occupy the time slot 0.



**Table A.1: example- of average and maximum synchronisation time with two busy timeslots per frame and with 0.8 ms switching time (\*)**

Downlink time slot number	Number of free TS in A	Number of free TS in B	Average synchronisation time (ms)	Maximum synchronisation time (ms)
1	0	13	44	140
2	1	12	50	187
3	2	11	58	188
4	3	10	66	189
5	4	9	70	233
6	5	8	77	234
7	6	7	75	189
8	7	6	75	189
9	8	5	75	235
10	9	4	67	235
11	10	3	63	186
12	11	2	56	186
13	12	1	49	186
14	13	0	43	132

(\*) All simulations have been performed with a random initial delay between GSM frames and UMTS frames.

Each configuration of TS allocation described above allows a monitoring period sufficient to acquire synchronisation.

### A.1.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot

The minimum idle time to detect a complete FCCH burst for all possible alignments between the GSM and the TDD frame structure (called 'guaranteed FCCH detection'), assuming that monitoring happens every TDD frame, can be calculated as follows ( $t_{FCCH}$  = one GSM slot):

$$t_{\min, \text{guaranteed}} = 2 \times t_{\text{synth}} + t_{FCCH} + \frac{10\text{ms}}{13} = 2 \times t_{\text{synth}} + \frac{35\text{ms}}{26}$$

- (e.g for  $t_{\text{synth}}=0\text{ms}$ : 3 TDD **consecutive** idle timeslots needed, for  $t_{\text{synth}}=0,3\text{ms}$ : 3 slots, for  $t_{\text{synth}}=0,5\text{ms}$ : 4 slots, for  $t_{\text{synth}}=0,8\text{ms}$ : 5 slots). Under this conditions the FCCH detection time can never exceed the time of 660ms.
- (For a more general consideration  $t_{\text{synth}}$  may be considered as a sum of all delays before starting monitoring is possible).
- For detecting SCH instead of FCCH (for a parallel search) the same equation applies.
- In the equation before the dual synthesiser UE is included if the synthesiser switching time is 0ms.

**Table A.2: FCCH detection time for a dual synthesizer UE monitoring GSM from TDD every TDD frame**

occupied slots= 15-idle slots	cases	FCCH detection time in ms	
		Average	maximum
2	105	37	189
3	455	46	327
4	1365	58	419
5	3003	72	501
6	5005	90	646
7	6435	114	660
8	6435	144	660
9	5005	175	660
10	3003	203	660
11	1365	228	660
12	455	254	660
13	105	-	-
14	15	-	-

In the table above for a given number of occupied slots in the TDD mode all possible cases of distributions of these occupied TDD slots are considered (see 'cases'). For every case arbitrary alignments of the TDD and the GSM frame structure are taken into account for calculating the average FCCH detection time (only these cases are used which guarantee FCCH detection for all alignments; only the non-parallel FCCH search is reflected by the detection times in the table 2).

The term 'occupied slots' means that the UE is not able to monitor in these TDD slots.

For a synthesiser switching time of one or one half TDD timeslot the number of needed consecutive idle TDD timeslots is summarized in the table below:

**Table A.3: Link between the synthesiser performance and the number of free consecutive TSs for guaranteed FCCH detection, needed for GSM monitoring**

One-way switching time for the synthesiser	Number of free consecutive TDD timeslots needed in the frame for a guaranteed FCCH detection
1 TS (=2560 chips)	5
0.5 TS (=1280 chips)	4
0 (dual synthesiser)	3

## Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
14/01/00	RAN_05	RP-99595	-		Approved at TSG RAN #5 and placed under Change Control	-	3.0.0
14/01/00	RAN_06	RP-99700	001	1	Primary and Secondary CCPCH in TDD	3.0.0	3.1.0
14/01/00	RAN_06	RP-99701	002	1	Block STTD capability for P-CCPCH, TDD component	3.0.0	3.1.0
14/01/00	RAN_06	RP-99700	003	1	Update concerning measurement definitions, ranges and mappings	3.0.0	3.1.0
14/01/00	-	-	-		Change history was added by the editor	3.1.0	3.1.1
31/03/00	RAN_07	RP-000071	004	1	Correction of CPICH measurements and 'RX Timing Deviation' range	3.1.1	3.2.0
31/03/00	RAN_07	RP-000071	005	2	Editorial modifications to 25.225	3.1.1	3.2.0
31/03/00	RAN_07	RP-000071	006	1	Corrections to 25.225 Measurements for TDD	3.1.1	3.2.0
26/06/00	RAN_08	RP-000275	009	-	Clarifications on TxDiversity for UTRA TDD	3.2.0	3.3.0
26/06/00	RAN_08	RP-000275	010	-	Removal of Range/mapping	3.2.0	3.3.0
26/06/00	RAN_08	RP-000275	011	-	Removal of transport channel BLER	3.2.0	3.3.0
23/09/00	RAN_09	RP-000348	012	1	Alignment of TDD measurements with FDD : GPS related measurements	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	013	1	Alignment of TDD measurements with FDD :SFN-CFN observed time difference	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	014	-	Clarification of the Timeslot ISCP measurements	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	015	-	Terminology regarding the beacon function	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	016	-	Removal of Physical Channel BER	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	017	-	Update of TS25.225 due to recent change for FDD: Reporting of UTRAN TX carrier power	3.3.0	3.4.0
15/12/00	RAN_10	RP-000545	018	2	Corrections and Clarifications to 25.225	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	019	1	Corrections and Clarifications to 25.225	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	020	1	Clarification of measurement reference points	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	021	-	Removal of incorrect note relating to RSCP measurements	3.4.0	3.5.0
16/03/01	RAN_11	RP-010066	023	-	Correction of the observed time difference to GSM measurement	3.5.0	3.6.0
15/06/01	RAN_12	RP-010339	026	1	Addition to the abbreviation list	3.6.0	3.7.0
15/06/01	RAN_12	RP-010339	028	-	Renaming of LCS measurements	3.6.0	3.7.0
21/09/01	RAN_13	RP-010526	033	-	Clarification of the Beacon Measurement in TS25.225	3.7.0	3.8.0
14/12/01	RAN_14	RP-010743	035	1	Removal of references to Block STTD	3.8.0	3.9.0
14/12/01	RAN_14	RP-010743	039	-	Correction of measurement definition for UTRA carrier RSSI and CPICH_Ec/No	3.8.0	3.9.0
07/06/02	RAN_16	RP-020312	046	2	Clarification of UE measurements Applicability	3.9.0	3.10.0
20/09/02	RAN_17	RP-020558	059	-	Correction of UE SFN-SFN type 1 measurement for TDD	3.10.0	3.11.0
24/06/03	RAN_20	RP-030365	072	-	Correction of transmitted carrier power definition in case of Tx diversity	3.11.0	3.12.0

---

## History

<b>Document history</b>		
V3.1.1	January 2000	Publication
V3.2.0	March 2000	Publication
V3.3.0	June 2000	Publication
V3.4.0	September 2000	Publication
V3.5.0	December 2000	Publication
V3.6.0	March 2001	Publication
V3.7.0	June 2001	Publication
V3.8.0	September 2001	Publication
V3.9.0	December 2001	Publication
V3.10.0	June 2002	Publication
V3.11.0	September 2002	Publication
V3.12.0	June 2003	Publication