ETSITS 136 141 V10.13.0 (2017-07)



LTE;

Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing (3GPP TS 36.141 version 10.13.0 Release 10)



Reference RTS/TSGR-0436141vad0 Keywords LTE

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017. All rights reserved.

DECT[™], **PLUGTESTS**[™], **UMTS**[™] and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP**[™] and **LTE**[™] are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intelle	ctual Property Rights	2
Forew	ord	2
Modal	verbs terminology	2
Forew	ord	12
1	Scope	13
	References	
	Definitions, symbols and abbreviations	14
3.1	Definitions	
3.2	Symbols	
3.3	Abbreviations	
4	General test conditions and declarations	18
4.1	Measurement uncertainties and Test Requirements	18
4.1.1	General	
4.1.2	Acceptable uncertainty of Test System	18
4.1.2.1	Measurement of transmitter	19
4.1.2.2	Measurement of receiver	19
4.1.2.3	Measurement of performance requirement	24
4.1.3	Interpretation of measurement results	28
4.2	Base station classes	29
4.3	Regional requirements	29
4.4	Selection of configurations for testing	
4.5	BS Configurations	
4.5.1	Transmit configurations	
4.5.1.1	Transmission with multiple transmitter antenna connectors	
4.5.2	Receive configurations	
4.5.2.1	Reception with multiple receiver antenna connectors, receiver diversity	
4.5.3	Duplexers	
4.5.4	Power supply options	
4.5.5	Ancillary RF amplifiers	
4.5.6	BS with integrated Iuant BS modem	
4.5.7	BS using antenna arrays	
4.5.7.1	Receiver tests	
4.5.7.2	Transmitter tests	
4.6	Manufacturer's declarations of regional and optional requirements	
4.6.1	Operating band and frequency range	
4.6.2	Channel bandwidth	
4.6.3	Base station output power	
4.6.4	Spurious emissions Category	
4.6.5	Additional operating band unwanted emissions	
4.6.6	Co-existence with other systems.	
4.6.7	Co-location with other base stations	
4.6.8	Manufacturer's declarations of supported RF configurations	
4.7	Specified frequency range and supported channel bandwidth	
4.7.1	RF bandwidth position for non-single carrier testing	
4.7.2	Aggregated channel bandwidth position for CA specific testing	
4.7.2 4.8	Format and interpretation of tests	
4.10	Test configuration for non-single carrier operations	
	General test configuration	
4.10.1 .		
4.10.1 4.10.1		
4.10.1 4.10.2	CA specific test configuration	
4.10.2 4.10.2.1		
4.10.2 4.10.2		
T. I U.∠	4 1 Cot COIIII ZUI AUOII DO WCI AIIOCAUOII	4 1.

5	Operating bands and channel arrangement	
5.1	General	40
5.2	Void	41
5.3	Void	41
5.4	Void	41
5.5	Operating bands	41
5.6	Channel bandwidth	42
5.7	Channel arrangement	
5.7.1	Channel spacing	
5.7.1A	1 0	
5.7.2	Channel raster	
5.7.3	Carrier frequency and EARFCN	
	Transmitter characteristics	
6.1	General	
6.1.1	E-UTRA Test Models	
6.1.1.1	(—/	
6.1.1.2	(/	
6.1.1.3	2 0 1141 1 000 1/10 001 2 (2 11/12)	
6.1.1.4		
6.1.1.5	E-UTRA Test Model 3.2 (E-TM3.2)	52
6.1.1.6		
6.1.2	Data content of Physical channels and Signals	57
6.1.2.1	Reference signals	58
6.1.2.2	Primary Synchronization signal	58
6.1.2.3	Secondary Synchronization signal	58
6.1.2.4	PBCH	58
6.1.2.5	PCFICH	58
6.1.2.6	PHICH	58
6.1.2.7		
6.1.2.8		
6.2	Base station output power	
6.2.1	Definition and applicability	
6.2.2	Minimum Requirement	
6.2.3	Test purpose	
6.2.4	Method of test	
6.2.4.1	Initial conditions	
6.2.4.2		
6.2.5	Test Requirements	
6.2.6	Home BS output power for adjacent UTRA channel protection	61
6.2.6.1	Definition and applicability	
6.2.6.2		
6.2.6.3	•	
6.2.6.4	1 1	
6.2.6.4.		
6.2.6.4.		
6.2.6.4. 6.2.6.5		
6.2.7	Home BS output power for adjacent E-UTRA channel protection	
6.2.7.1		
6.2.7.1	• • • • • • • • • • • • • • • • • • • •	
6.2.7.3	1	
	1 1	
6.2.7.4		
6.2.7.4.		
6.2.7.4.		
6.2.7.5	1	
6.2.8	Home BS output power for co-channel E-UTRA protection	
6.2.8.1	Definition and applicability	
6.2.8.2	*	
6.2.8.3		
6.2.8.4		
6.2.8.4.		
6.2.8.4.	2. Procedure.	67

6.2.8.5	Test Requirements	
6.3	Output power dynamics	68
6.3.1	RE Power control dynamic range	68
6.3.1.1	Definition and applicability	
6.3.1.2	Minimum Requirement	
6.3.1.3	Method of test	
6.3.2	Total power dynamic range	
6.3.2.1	Definition and applicability	
6.3.2.2		
	Minimum Requirement	
6.3.2.3	Test purpose	
6.3.2.4	Method of test	
6.3.2.4.1	Initial conditions	
6.3.2.4.2	Procedure	
6.3.2.5	Test Requirement	
6.4	Transmit ON/OFF power	70
6.4.1	Transmitter OFF power	70
6.4.1.1	Definition and applicability	70
6.4.1.2	Minimum Requirement	70
6.4.1.3	Test purpose	
6.4.1.4	Method of test	
6.4.1.4.1	Void	
6.4.1.4.2	Void	
6.4.1.5	Test requirement	
6.4.2		
	Transmitter transient period	
6.4.2.1	Definition and applicability	
6.4.2.2	Minimum Requirement	
6.4.2.3	Test purpose	
6.4.2.4	Method of test	
6.4.2.4.1	Initial conditions	71
6.4.2.4.2	Procedure	71
6.4.2.5	Test requirement	72
6.5	Transmitted signal quality	72
6.5.1	Frequency error	72
6.5.1.1	Definition and applicability	72
6.5.1.2	Minimum Requirement	
6.5.1.3	Test purpose	
6.5.1.4	Method of test	
6.5.1.5	Test requirement	
6.5.2	Error Vector Magnitude	
6.5.2.1	Definition and applicability	
6.5.2.2	**	
	Minimum Requirement	
6.5.2.3	Test purpose	
6.5.2.4	Method of test	
6.5.2.4.1	Initial conditions	
6.5.2.4.2	Procedure	
6.5.2.5	Test requirement	
6.5.3	Time alignment error	
6.5.3.1	Definition and applicability	74
6.5.3.2	Minimum Requirement	74
6.5.3.3	Test Purpose	74
6.5.3.4	Method of Test	74
6.5.3.4.1	Initial Conditions	
6.5.3.4.2	Procedure	
6.5.3.5	Test Requirement	
6.5.4	DL RS power	
6.5.4.1	Definition and applicability	
6.5.4.2		
	**	
	Minimum Requirement	75
6.5.4.3	Minimum Requirement	75
6.5.4.3 6.5.4.4	Minimum Requirement Test purpose Method of test	
6.5.4.3 6.5.4.4 6.5.4.4.1	Minimum Requirement Test purpose Method of test Initial conditions	
6.5.4.3 6.5.4.4	Minimum Requirement Test purpose Method of test	

6.6	Unwanted emissions	
6.6.1	Occupied bandwidth	
6.6.1.1	Definition and applicability	76
6.6.1.2	Minimum Requirements	76
6.6.1.3	Test purpose	76
6.6.1.4	Method of test	
6.6.1.4.1	Initial conditions	77
6.6.1.4.2	2 Procedure	77
6.6.1.5	Test requirements	77
6.6.2	Adjacent Channel Leakage power Ratio (ACLR)	78
6.6.2.1	Definition and applicability	78
6.6.2.2	Minimum Requirement	78
6.6.2.3	Test purpose	78
6.6.2.4	Method of test	78
6.6.2.4.1	Initial conditions	78
6.6.2.4.2	Procedure	78
6.6.2.5	Test Requirement	78
6.6.3	Operating band unwanted emissions	80
6.6.3.1	Definition and applicability	80
6.6.3.2	Minimum Requirement	80
6.6.3.3	Test purpose	
6.6.3.4	Method of test	
6.6.3.4.1	Initial conditions	80
6.6.3.4.2	Procedure	80
6.6.3.5	Test requirement	81
6.6.3.5.1	<u>•</u>	
6.6.3.5.2	*	
6.6.3.5.2	*	
6.6.3.5.2		
6.6.3.5.2		
6.6.3.5.3	· · · · · · · · · · · · · · · · · · ·	
6.6.4	Transmitter spurious emissions	
6.6.4.1	Definition and applicability	
6.6.4.2	Minimum Requirements	
6.6.4.3	Test Purpose	
6.6.4.4	Method of Test	
6.6.4.4.1		
6.6.4.4.2		
6.6.4.5	Test requirements	
6.6.4.5.1	•	
6.6.4.5.2		
6.6.4.5.3		
6.6.4.5.4		
6.6.4.5.5	Co-location with other base stations	
6.7	Transmitter intermodulation	
6.7.1	Definition and applicability	
6.7.2	Minimum Requirement	
6.7.3	Test purpose	
6.7.4	Method of test	
6.7.4.1	Initial conditions	
6.7.4.2	Procedures	109
6.7.5	Test Requirements	110
7 5	•	
	Receiver characteristics	
7.1	General	
7.2	Reference sensitivity level	
7.2.1	Definition and applicability	
7.2.2	Minimum Requirement	
7.2.3	Test purpose	
7.2.4	Method of testing	
7.2.4.1	Initial conditions	
7242	Procedure	111

7.2.5	Test requirement	112
7.3	Dynamic range	
7.3.1	Definition and applicability	
7.3.2	Minimum Requirement	
7.3.3	Test purpose	
7.3.4	Method of testing	
7.3.4.1	Initial conditions	
7.3.4.2	Procedure	
7.3.4.2		
	Test Requirements	
7.4	In-channel selectivity	
7.4.1	Definition and applicability	
7.4.2	Minimum Requirement	
7.4.3	Test purpose	
7.4.4	Method of testing	
7.4.4.1	Initial conditions	
7.4.4.2	Procedure	
7.4.5	Test Requirements	
7.5	Adjacent Channel Selectivity (ACS) and narrow-band blocking	
7.5.1	Definition and applicability	118
7.5.2	Minimum Requirement	118
7.5.3	Test purpose	118
7.5.4	Method of test	118
7.5.4.1	Initial conditions	118
7.5.4.2	Procedure for Adjacent Channel Selectivity	
7.5.4.3	Procedure for narrow-band blocking	
7.5.5	Test Requirements	
7.6	Blocking	
7.6.1	Definition and applicability	
7.6.2	Minimum Requirements	
7.6.3	Test purpose	
7.6.4	Method of test	
7.6.4.1	Initial conditions	
7.6.4.2	Procedure	
7.6.5	Test Requirements	
7.6.5.1	General requirement	
7.6.5.2	Co-location with other base stations	
7.7	Receiver spurious emissions	
7.7.1	Definition and applicability	
7.7.2	Minimum Requirements	
7.7.3	Test purpose	
7.7.4	Method of test	132
7.7.4.1	Initial conditions	132
7.7.4.2	Procedure	132
7.7.5	Test requirements	133
7.8	Receiver intermodulation	133
7.8.1	Definition and applicability	
7.8.2	Minimum Requirement	
7.8.3	Test purpose	
7.8.4	Method of test	
7.8.4.1	Initial conditions	
7.8.4.2	Procedures	
7.8.5	Test requirements	
	•	
8	Performance requirement	.138
8.1	General	138
8.2	Performance requirements for PUSCH	
8.2.1	Performance requirements of PUSCH in multipath fading propagation conditions transmission on	
	single antenna port	139
8.2.1.1	Definition and applicability	
8.2.1.2	Minimum Requirement	
8.2.1.3	Test Purpose	
8.2.1.4	Method of test	
J		

8.2.1.4.1	Initial Conditions	139
8.2.1.4.2	Procedure	
8.2.1.5	Test Requirement	
8.2.1A	Performance requirements of PUSCH in multipath fading propagation conditions transmission or	
	two antenna ports	
8.2.1A.1	Definition and applicability	
8.2.1A.2	Minimum Requirement	
8.2.1A.3	Test Purpose	
8.2.1A.4	Method of test	
8.2.1A.4.		
8.2.1A.4.		
8.2.1A.5	Test Requirement	
8.2.1 A .3	Performance requirements for UL timing adjustment.	
8.2.2.1	· · · · · · · · · · · · · · · · · · ·	
8.2.2.1	Definition and applicability	
	Minimum Requirement	
8.2.2.3	Test Purpose	
8.2.2.4	Method of test	
8.2.2.4.1	Initial Conditions	
8.2.2.4.2	Procedure	
8.2.2.5	Test Requirement	
8.2.3	Performance requirements for HARQ-ACK multiplexed on PUSCH	
8.2.3.1	Definition and applicability	
8.2.3.2	Minimum Requirement	
8.2.3.3	Test Purpose	
8.2.3.4	Method of test	
8.2.3.4.1	Initial Conditions	
8.2.3.4.2	Procedure	
8.2.3.5	Test Requirement	
8.2.4	Performance requirements for High Speed Train conditions	
8.2.4.1	Definition and applicability	153
8.2.4.2	Minimum Requirement	153
8.2.4.3	Test Purpose	154
8.2.4.4	Method of test	154
8.2.4.4.1	Initial Conditions	154
8.2.4.4.2	Procedure	154
8.2.4.5	Test Requirement	155
8.3	Performance requirements for PUCCH	155
8.3.1	ACK missed detection for single user PUCCH format 1a transmission on single antenna port	155
8.3.1.1	Definition and applicability	
8.3.1.2	Minimum Requirement	
8.3.1.3	Test purpose	
8.3.1.4	Method of test	
8.3.1.4.1	Initial Conditions	
8.3.1.4.2	Procedure	
8.3.1.5	Test Requirement	
8.3.2	CQI performance requirements for PUCCH format 2 transmission on single antenna port	
8.3.2.1	Definition and applicability	
8.3.2.2	Minimum Requirement	
8.3.2.3	Test purpose	
8.3.2.4		
	Method of test	
8.3.2.4.1		
8.3.2.4.2	Procedure	
8.3.2.5	Test Requirement	
8.3.3	ACK missed detection for multi user PUCCH format 1a	
8.3.3.1	Definition and applicability	
8.3.3.2	Minimum Requirement	
8.3.3.3	Test purpose	
8.3.3.4	Method of test	
8.3.3.4.1	Initial Conditions	
8.3.3.4.2	Procedure	
8.3.3.5	Test Requirement	
831	ACK missed detection for PLICCH format 1b with Channel Selection	160

8.3.4.	11 *	
8.3.4.2	2 Minimum Requirement	161
8.3.4.3	3 Test purpose	161
8.3.4.4	4 Method of test	161
8.3.4.4	4.1 Initial Conditions	161
8.3.4.4	4.2 Procedure	161
8.3.4.	5 Test Requirement	162
8.3.5	ACK missed detection for PUCCH format 3	162
8.3.5.	1 Definition and applicability	162
8.3.5.2	2 Minimum Requirement	162
8.3.5.	3 Test purpose	162
8.3.5.4	4 Method of test	163
8.3.5.4	4.1 Initial Conditions	163
8.3.5.4	4.2 Procedure	163
8.3.5.		
8.3.6	NAK to ACK detection for PUCCH format 3	
8.3.6.	1 Definition and applicability	164
8.3.6.2	** *	
8.3.6.		
8.3.6.4		
8.3.6.4	4.1 Initial Conditions	164
8.3.6.4		
8.3.6.		
8.3.7	ACK missed detection for PUCCH format 1a transmission on two antenna ports	
8.3.7.		
8.3.7.2		
8.3.7.	1	
8.3.7.	1 1	
8.3.7.4		
8.3.7.4		
8.3.7.		
8.3.8	CQI performance requirements for PUCCH format 2 transmission on two antenna ports	
8.3.8.		
8.3.8.2	** *	
8.3.8.	•	
8.3.8.4	1 1	
8.3.8.4		
8.3.8.4	4.2 Procedure	167
8.3.8.	5 Test Requirement	168
8.4	Performance requirements for PRACH	
8.4.1	PRACH false alarm probability and missed detection	
8.4.1.		
8.4.1.2		
8.4.1.3	3 Test purpose	169
8.4.1.4	4 Method of test	169
8.4.1.4	4.1 Initial Conditions	169
8.4.1.4	4.2 Procedure	169
8.4.1.	5 Test Requirement	170
Anne	ex A (normative): Reference Measurement channels	171
A.0	General	171
A.1	Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3	3)171
A.2	Fixed Reference Channels for dynamic range (16QAM, R=2/3)	172
A.3	Fixed Reference Channels for performance requirements (QPSK 1/3)	
A.4	Fixed Reference Channels for performance requirements (16QAM 3/4)	
A.5	Fixed Reference Channels for performance requirements (64QAM 5/6)	
	PRACH Test preambles	173

	Transmitter	171casarement system set up	205
	ex I (Informative):	Measurement system set-up	
	ex H (Informative):	E-UTRAN Measurement Test Cases	
G.2 G.3		Formance Requirements	
G.2		viver	
G.1	· · · · · · · · · · · · · · · · · · ·	smitter	
Anne	ex G (informative):	Test Tolerances and Derivation of Test Requirements	194
F.4.2.	C	(TDD)	
F.4.1 F.4.2			
F.3.4		on	
F.3.3		ΓX power	
F.3.2	Timing of the FFT	window	189
F.3.1	Pre FFT minimizati	on process	188
F.2.5		S	
F.2.4		ts	
F.2.2 F.2.3		e 1X under test	
F.2.1 F.2.2		e TX under test	
F.1			
	ex F (normative):	Global In-Channel TX-Test	
	ex E (normative):	General rules for statistical testing	
D.6	Measurement of test	environments	185
D.5	Power supply		185
D.4	Vibration		185
D.3.1	Extreme tem	nperature	184
D.3	Extreme test environ	ment	184
D.2	Normal test environm	nent	184
D.1	General		184
	ex D (normative):	Environmental requirements for the BS equipment	
Anne	ex C (normative):	Characteristics of the interfering signals	183
B.5.2	MIMO Correlation	Matrices at High, Medium and Low Level	180
	Definition of MIMO Co	rrelation Matrices	179
B.5	Multi-Antenna chanr	nel models	179
B.4	Moving propagation	conditions	178
B.3		ndition	
B.2	Multi-path fading pro	opagation conditions	176
B.1	Static propagation co	ondition	176
Anne	ex B (normative):	Propagation conditions	176
A.10	PUCCH transmission	n on two antenna ports test	1/3
A.9			
A.8			
A.7	Fixed Reference Channels for UL timing adjustment (Scenario 1)		

I.1.1	Base station output power, output power dynamics, transmitted signal quality, Frequency error, EVM,	
	DL RS power, Unwanted emissions	207
I.1.2	Transmitter intermodulation	207
I.1.3	Time alignment error	208
I.1.4	Home BS output power for adjacent channel protection	208
I.1.5	Home BS output power for co-channel E-UTRA protection	208
I.2	Receiver	209
I.2.1	Reference sensitivity level	210
I.2.2	Dynamic range	
I.2.3	In-channel selectivity	
I.2.4	Adjacent Channel Selectivity (ACS) and narrowband blocking	212
I.2.5	Blocking characteristics	
I.2.6	Receiver spurious emission	
I.2.7	Intermodulation characteristics	213
I.3	Performance requirement	
I.3.1	Performance requirements for PRACH in static conditions	
I.3.2	Performance requirements for PUSCH, PRACH, single user PUCCH in multipath fading conditions and	
	for High Speed Train conditions	
I.3.3	Performance requirements for multi user PUCCH in multipath fading conditions	
I.3.4	Performance requirement for UL timing adjustment	215
I.3.5	Performance requirements for PUCCH transmission on two antenna ports in multipath fading	
	conditions	
I.3.6	Performance requirements for PUSCH transmission on two antenna ports in multipath fading condition	s217
Anne	ex J (Informative): Unwanted emission requirements for multi-carrier BS	218
J.1	General	218
J.2	Multi-carrier BS of different E-UTRA channel bandwidths	218
J.3	Multi-carrier BS of E-UTRA and UTRA	218
Anne	ex K (informative): Change history	
Histo	ory	225

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the Radio Frequency (RF) test methods and conformance requirements for E-UTRA Base Stations (BS) operating either in the FDD mode (used in paired bands) or the TDD mode (used in unpaired bands). These have been derived from, and are consistent with the E-UTRA Base Station (BS) specifications defined in [2].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- 3GPP TR 21.905: "Vocabulary for 3GPP Specifications. [1] [2] 3GPP TS 36 104: "E-UTRA Base Station (BS) radio transmission and reception". ITU-R Recommendation M.1545, "Measurement uncertainty as it applies to test limits for the [3] terrestrial component of International Mobile Telecommunications-2000". ITU-R recommendation SM.328: "Spectra and bandwidth of emissions". [4] ITU-R recommendation SM.329: "Unwanted emissions in the spurious domain ". [5] [6] IEC 60721-3-3 (2002): "Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 3: Stationary use at weather protected locations". IEC 60721-3-4 (1995): "Classification of environmental conditions - Part 3: Classification of [7] groups of environmental parameters and their severities - Section 4: Stationary use at non-weather protected locations". [8] IEC 60068-2-1 (2007): "Environmental testing - Part 2: Tests. Tests A: Cold". [9] IEC 60068-2-2 (2007): "Environmental testing - Part 2: Tests. Tests B: Dry heat".
- [10] IEC 60068-2-6 (2007): "Environmental testing Part 2: Tests Test Fc: Vibration (sinusoidal)".
- [11] 3GPP TR 25.942: "RF system scenarios".
- [12] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".
- [13] 3GPP TS 36.212: "Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding".
- [14] 3GPP TR 36.942: "E-UTRA RF system scenarios".
- [15] 3GPP TS 25.104: "Base Station (BS) radio transmission and Reception (FDD)".
- [16] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".
- [17] 3GPP TS 25.141: "Base Station (BS) conformance testing (FDD)".

[18] 3GPP TS 37.141: "E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) conformance testing".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Aggregated Channel Bandwidth: The RF bandwidth in which a Base Station transmits and receives multiple contiguously aggregated carriers. The aggregated channel bandwidth is measured in MHz.

Base station receive period: The time during which the base station is receiving data subframes or UpPTS.

Base Station RF bandwidth: The bandwidth in which a Base Station transmits and receives multiple carriers simultaneously

Base Station RF bandwidth edge: The frequency of one of the edges of the Base Station RF bandwidth.

Carrier: The modulated waveform conveying the E-UTRA or UTRA (WCDMA) physical channels

Carrier aggregation: aggregation of two or more component carriers in order to support wider transmission bandwidths

Carrier aggregation band: a set of one or more operating bands across which multiple carriers are aggregated with a specific set of technical requirements

NOTE: Carrier aggregation band(s) for an E-UTRA BS is declared by the manufacturer according to the designations in Tables 5.5-2 to 5.5-3

Channel bandwidth: The RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell. The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

Channel edge: The lowest and highest frequency of the E-UTRA carrier, separated by the channel bandwidth.

Contiguous carriers: a set of two or more carriers configured in a spectrum block where there are no RF requirements based on co-existence for un-coordinated operation within the spectrum block.

DL RS power: The resource element power of Downlink Reference Symbol.

Downlink operating band: The part of the operating band designated for downlink.

Higher Edge: The highest frequency in the aggregated channel bandwidth for multiple contiguously aggregated carriers in a specified operating band, or the highest frequency in the channel bandwidth of a single E-UTRA carrier, or the highest frequency in the channel bandwidth of the highest carrier for E-UTRA multi-carrier in a specified operating band; used as a frequency reference point for transmitter and receiver requirements.

Highest Carrier: The carrier with the highest carrier centre frequency transmitted/received in a specified operating band.

Inter-band carrier aggregation: carrier aggregation of component carriers in different operating bands.

NOTE: Carriers aggregated in each band can be contiguous or non-contiguous.

Intra-band contiguous carrier aggregation: contiguous carriers aggregated in the same operating band.

Intra-band non-contiguous carrier aggregation: non-contiguous carriers aggregated in the same operating band.

Lower Edge: The lowest frequency in the aggregated channel bandwidth for multiple contiguously aggregated carriers in a specified operating band, or the lowest frequency in the channel bandwidth of a single E-UTRA carrier, or the lowest frequency in the channel bandwidth of the lowest carrier for E-UTRA multi-carrier in a specified operating band; used as a frequency reference point for transmitter and receiver requirements.

Lowest Carrier: The carrier with the lowest carrier centre frequency transmitted/received in a specified operating band.

Maximum Base Station RF bandwidth: The maximum RF bandwidth supported by a BS within an operating band.

Maximum output power: The mean power level per carrier of the base station measured at the antenna connector in a specified reference condition.

Maximum throughput: The maximum achievable throughput for a reference measurement channel.

Mean power: When applied to E-UTRA transmission this is the power measured in the channel bandwidth of the carrier. The period of measurement shall be at least one subframe (1ms), unless otherwise stated.

Multi-carrier transmission configuration: A set of one or more contiguous carriers that a BS is able to transmit simultaneously according to the manufacturer's specification.

Occupied bandwidth: The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean power of a given emission.

Operating band: A frequency range (paired or unpaired) that is defined with a specific set of technical requirements, in which E-UTRA operates.

NOTE: The operating band(s) for an E-UTRA BS is declared by the manufacturer according to the designations in Table 5.5-1.

Output power: The mean power of one carrier of the base station, delivered to a load with resistance equal to the nominal load impedance of the transmitter.

Rated output power: Rated output power of the base station is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector.

RE power control dynamic range: The difference between the power of a RE and the average RE power for a BS at maximum output power for a specified reference condition.

Reference bandwidth: The bandwidth in which an emission level is specified.

RRC filtered mean power: The mean power as measured through a root raised cosine filter with roll-off factor α and a bandwidth equal to the chip rate of the radio access mode.

NOTE 1: The RRC filtered mean power of a perfectly modulated W-CDMA signal is 0.246 dB lower than the mean power of the same signal.

Synchronized operation: Operation of TDD in two different systems, where no simultaneous uplink and downlink occur.

Throughput: The number of payload bits successfully received per second for a reference measurement channel in a specified reference condition.

Total power dynamic range: The difference between the maximum and the minimum transmit power of an OFDM symbol for a specified reference condition.

Transmission bandwidth: Bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units.

Transmission bandwidth configuration: The highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units.

Transmitter OFF period: The time period during which the BS transmitter is not allowed to transmit.

Transmitter ON period: The time period during which the BS transmitter is transmitting data and/or reference symbols, i.e. data subframes or DwPTS.

Transmitter transient period: The time period during which the transmitter is changing from the OFF period to the ON period or vice versa.

Unsynchronized operation: Operation of TDD in two different systems, where the conditions for synchronized operation are not met.

Uplink operating band: The part of the operating band designated for uplink.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

 α Roll-off factor

β Percentage of the mean transmitted power emitted outside the occupied bandwidth on the assigned

channel

BW_{Channel} Channel bandwidth

 $BW_{Channel\ CA} \qquad \text{Aggregated channel bandwidth, expressed in MHz. } BW_{Channel_CA} = F_{edge_high} - F_{edge_low.}$

BW_{Config} Transmission bandwidth configuration, expressed in MHz, where BW_{Config} = N_{RB} x 180 kHz in the

uplink and BWConfig = 15 kHz + NRB x 180 kHz in the downlink.

CA_X CA for band X where X is the applicable E-UTRA operating band

CA_X-Y CA for band X and Band Y where X and Y are the applicable E-UTRA operating band

f Frequency

BW_{RF} Base Station RF bandwidth

BW_{RF,max} Maximum Base Station RF bandwidth

Δf Separation between the channel edge frequency and the nominal -3dB point of the measuring filter

closest to the carrier frequency

 Δf_{max} The largest value of Δf used for defining the requirement

F_C Carrier centre frequency

 F_{C_high} The carrier centre frequency of the highest carrier, expressed in MHz. The carrier centre frequency of the lowest carrier, expressed in MHz.

 $F_{edge_low} \qquad \qquad \text{The lower edge of aggregated channel bandwidth, expressed in MHz. } F_{edge_low} = F_{C_low} - F_{offset.} \\ F_{edge_high} \qquad \qquad \text{The higher edge of aggregated channel bandwidth, expressed in MHz. } F_{edge_high} = F_{C_high} + F_{offset.} \\ \end{cases}$

 F_{offset} Frequency offset from $F_{\text{C_high}}$ to the higher edge or $F_{\text{C_low}}$ to the lower edge.

F_{filter} Filter centre frequency

f_offset Separation between the channel edge frequency and the centre of the measuring filter

f_offset_{max} The maximum value of f_offset used for defining the requirement

E_A: EPRE (energy per resource element) of PDSCH REs (resource elements) type A, i.e. REs in

OFDM symbols that do not include reference symbols

E_B: EPRE of PDSCH REs type B, i.e. REs in OFDM symbols that include reference symbols

E_{RS}: EPRE of reference symbols REs

 $\begin{array}{ll} F_{DL_low} & The \ lowest \ frequency \ of \ the \ downlink \ operating \ band \\ F_{DL_high} & The \ highest \ frequency \ of \ the \ downlink \ operating \ band \\ F_{UL_high} & The \ lowest \ frequency \ of \ the \ uplink \ operating \ band \\ F_{UL_high} & The \ highest \ frequency \ of \ the \ uplink \ operating \ band \\ \end{array}$

N_{DL} Downlink EARFCN

 $\begin{array}{ll} N_{Offs\text{-}DL} & Offset \ used \ for \ calculating \ downlink \ EARFCN \\ N_{Offs\text{-}UL} & Offset \ used \ for \ calculating \ uplink \ EARFCN \end{array}$

 $N_{
m ID}^{
m cell}$ Physical layer cell identity

 $N_{\rm CS}$ Number of Cyclic shifts for preamble generation in PRACH

 $N_{\rm RB}$ Transmission bandwidth configuration, expressed in units of Resource Blocks

 $N_{\rm RB}^{\rm DL}$ Downlink bandwidth configuration, expressed in multiples of $N_{\rm sc}^{\rm RB}$

N_{UL} Uplink EARFCN

 $N_{\rm sc}^{\rm RB}$ Resource block size in the frequency domain, expressed as a number of subcarriers

 $n_{\rm f}$ System frame number

 n_{PRB} Physical resource block number n_{RNTI} Radio network temporary identifier

 $n_{\rm s}$ Slot number within a radio frame

p Antenna port number

Pd Probability of PRACH preamble detection

Pfa Total probability of false detection of the PRACH preamble

Pout Output power

P_{EM,N} Declared emission level for channel N

Pmax Maximum total output power
Pmax, c Maximum carrier output power
PREFSENS Reference sensitivity power level

q Code word number

T_A Timing advance command, as defined in [16]

 T_s Basic time unit, as defined in [12]

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

AC Alternating Current

ACLR Adjacent Channel Leakage Ratio ACK Acknowledgement (in HARQ protocols)

ACS Adjacent Channel Selectivity

ATT Attenuator

AWGN Additive White Gaussian Noise

B Bottom RF channel (for testing purposes)

BS Base Station
CA Carrier Aggregation

BW Bandwidth

CCE Control Channel Element

CP Cyclic prefix
CW Continuous Wave
DC Direct Current

DFT Discrete Fourier Transformation
DTT Digital Terrestrial Television

DUT Device Under Test

EPRE Energy per resource element E-TM E-UTRA Test Model

E-UTRA Evolved UTRA

EARFCN E-UTRA Absolute Radio Frequency Channel Number

EPA Extended Pedestrian A model
ETU Extended Typical Urban model
EVA Extended Vehicular A model
EVM Error Vector Magnitude
FDD Frequency Division Duplex
FFT Fast Fourier Transformation
FRC Fixed Reference Channel

HARQ Hybrid Automatic Repeat Request

ICS In-Channel Selectivity
IQ In-phase - *Quadrature* phase

ITU-R Radiocommunication Sector of the ITU

Iuant E-Node B internal logical interface between the implementation specific O&M function and the

RET antennas and TMAs control unit function of the E-Node B

LA Local Area

M Middle RF channel (for testing purposes)

MIMO Multiple Input Multiple Output MCS Modulation and Coding Scheme

OBW Occupied Band Width

OFDM Orthogonal Frequency Division Multiplex

OOB Out-Of-Band

PBCH Physical Broadcast Channel

PCFICH Physical control format indicator channel
PDCCH Physical downlink control channel
PDSCH Physical downlink shared channel
PHICH Physical hybrid-ARQ indicator channel
PUCCH Physical Uplink Control CHannel
PRACH Physical Random Access Channel

PRB Physical Resource Block

QAM Quadrature Amplitude Modulation QPSK Quadrature Phase-Shift Keying RAT Radio Access Technology

RB Resource Block
RE Resource Element
REG Resource Element Group

RF Radio Frequency RS Reference Symbol

RX Receive

RRC Root Raised Cosine SNR Signal-to-Noise Ratio

SQRT SQuare RooT

SRS Sounding Reference Signal

T Top RF channel (for testing purposes)

TA Timing Advance
TDD Time Division Duplex
TT Test Tolerance

TX Transmit UE User Equipment

UMTS Universal Mobile Telecommunications System

UTRA UMTS Terrestrial Radio Access

WA Wide Area

4 General test conditions and declarations

Many of the tests in this specification measure a parameter relative to a value that is not fully specified in the E-UTRA specifications. For these tests, the Minimum Requirement is determined relative to a nominal value specified by the manufacturer.

Certain functions of a BS are optional in the E-UTRA specifications. Some requirements for the BS may be regional as listed in subclause 4.3.

When specified in a test, the manufacturer shall declare the nominal value of a parameter, or whether an option is supported.

4.1 Measurement uncertainties and Test Requirements

4.1.1 General

The requirements of this clause apply to all applicable tests in this specification.

The Minimum Requirements are given in 36.104 [2] and test requirements are given in this specification. Test Tolerances are defined in Annex G of this specification. Test Tolerances are individually calculated for each test. The Test Tolerances are used to relax the Minimum Requirements in 36.104 [2] to create Test Requirements.

4.1.2 Acceptable uncertainty of Test System

The maximum acceptable uncertainty of the Test System is specified below for each test, where appropriate. The Test System shall enable the stimulus signals in the test case to be adjusted to within the specified tolerance and the

equipment under test to be measured with an uncertainty not exceeding the specified values. All tolerances and uncertainties are absolute values, and are valid for a confidence level of 95 %, unless otherwise stated.

A confidence level of 95% is the measurement uncertainty tolerance interval for a specific measurement that contains 95% of the performance of a population of test equipment.

For RF tests, it should be noted that the uncertainties in subclause 4.1.2 apply to the Test System operating into a nominal 50 ohm load and do not include system effects due to mismatch between the DUT and the Test System.

4.1.2.1 Measurement of transmitter

Table 4.1.2-1: Maximum Test System Uncertainty for transmitter tests

6.2. Base station output	Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
6.3.2 Total power dynamic range ± 0.4 dB Relative error of two OFDM Symbol TX power (OSTP) measurements 6.4.1 Transmitter OFF power ±2.0 dB, f ≤ 3.0GHz measurements 6.4.2 Transmitter transient period N/A N/A 6.5.1 Frequency error ± 12 Hz ± 1 % 6.5.2 EVM ± 1 % ± 25 ns 6.5.4 DL RS power ± 0.8 dB, f ≤ 3.0GHz ± 1.1 dB, 3.0GHz < f ≤ 4.2GHz	6.2. Base station output	±0.7 dB, f ≤ 3.0GHz	
6.4.1 Transmitter OFF power		±1.0 dB, 3.0GHz < f ≤ 4.2GHz	
6.4.1 Transmitter OFF power ±2.0 dB, f ≤ 3.0 GHz priod 6.5.1 Frequency error ±12 Hz 6.5.2 EVM ±1 % 6.5.3 Time alignment error ±25 ns 6.5.4 DL RS power ±2.5 ns 6.5.4 DL RS power ±0.8 dB, f ≤ 3.0 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz < f ≤ 4.2 GHz 4.1 dB, 3.0 GHz <	6.3.2 Total power dynamic	± 0.4 dB	
6.4.1 Transmitter OFF power 6.4.2 Transmitter transient period 6.5.1 Frequency error 6.5.2 EVM ±1 % 6.5.3 Time alignment error 6.5.4 DL RS power ±1.0 BL, 3.0GHz <±1.4 dB, 3.0GHz ±1.1 dB, 3.0GHz <±1.1 dB, 3.0GHz ±1.1 dB, 3.0GHz <±1.2 dBd 4.1 dBd,	range		
power ±2.5 dB, 3.0GHz < f ≤ 4.2GHz 6.4.2 Transmitter transient period N/A 6.5.1 Frequency error ± 12 Hz 6.5.2 EVM ± 1 % 6.5.3 Time alignment error ± 25 ns 6.5.4 DL RS power ±0.8 dB, f ≤ 3.0GHz ±1.1 dB, 3.0GHz < f ≤ 4.2GHz			measurements
6.4.2 Transmitter transient period 6.5.1 Frequency error ± 12 Hz 6.5.2 EVM ± 1 % 6.5.3 Time alignment error 6.5.4 DL RS power ± 2.5 ns 6.5.4 DL RS power ± 2.5 ns 6.6.1 Occupied bandwidth 5MHz, 10MHz Channel BW: 30kHz 5MHz, 10MHz Channel BW: 30kHz 15MHz, ≥20MHz: Channel BW: 300kHz 15MHz, ≥20MHz: Channel BW: 30kHz 15MHz, ≥20MHz, ≥3 DGHz 15MHz, ≥3 DG			
6.5.1 Frequency error ± 12 Hz 6.5.2 EVM ± 1 % 6.5.3 Time alignment error ± 25 ns 6.5.4 DL RS power ± 0.8 dB, f ≤ 3.0GHz ±1.1 dB, 3.0GHz < f ≤ 4.2GHz			
6.5.1 Frequency error ± 12 Hz 6.5.2 EVM ± 1 % 6.5.3 Time alignment error ± 25 ns 6.5.4 DL RS power ± 0.8 dB, f ≤ 3.0GHz ±1.1 dB, 3.0GHz < f ≤ 4.2GHz		N/A	
6.5.2 EVM ± 1 % 6.5.3 Time alignment error ± 25 ns 6.5.4 DL RS power ± 0.8 dB, f ≤ 3.0GHz ±1.1 dB, 3.0GHz < f ≤ 4.2GHz			
$ \begin{array}{lll} \underline{6.5.3 \text{ Time alignment error}} & \pm 25 \text{ ns} \\ \hline 6.5.4 \text{ DL RS power} & \pm 0.8 \text{ dB, } f \leq 3.0 \text{GHz} \\ & \pm 1.1 \text{ dB, } 3.0 \text{GHz} < f \leq 4.2 \text{GHz} \\ \hline 6.6.1 & \text{Occupied bandwidth} & 1.4 \text{MHz, } 30 \text{Hz Channel BW: } 30 \text{kHz} \\ \hline 5 \text{MHz, } 10 \text{MHz Channel BW: } 30 \text{kHz} \\ \hline 5 \text{MHz, } 10 \text{MHz Channel BW: } 30 \text{kHz} \\ \hline 5 \text{MHz, } 10 \text{MHz Channel BW: } 30 \text{kHz} \\ \hline 6.6.2 & \text{Adjacent Channel} & \text{ACLR} \pm 0.8 \text{ dB} \\ \text{Absolute power } \pm 2.0 \text{ dB, } f \leq 3.0 \text{GHz} \\ \hline 6.6.3 & \text{Operating band} & \pm 1.5 \text{ dB, } f \leq 3.0 \text{GHz} \\ \hline 4 \text{ Absolute power } \pm 2.5 \text{ dB, } 3.0 \text{GHz} < f \leq 4.2 \text{GHz} \\ \hline 6.6.4.5.1 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.2 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.2 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.3 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 8 \text{ Additional spurious emissions, } \\ \hline 7 \text{ Additional spurious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.4.5.5 & \text{Transmitter} & \text{Surious emissions, } \\ \hline 6.6.7 & \text{Transmitter} & The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the double the effect on the result double the $			
6.5.4 DL RS power ±0.8 dB, f ≤ 3.0GHz ±1.1 dB, 3.0GHz < f ≤ 4.2GHz			
±1.1 dB, 3.0GHz < f ≤ 4.2GHz			
6.6.1 Occupied bandwidth 1.4MHz, 3MHz Channel BW: 30kHz	6.5.4 DL RS power		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	6.6.1 Occupied bandwidth		
6.6.2 Adjacent Channel Leakage power Ratio (ACLR) Absolute power ±2.0 dB, f ≤ 3.0GHz Absolute power ±2.5 dB, 3.0GHz < f ≤ 4.2GHz 6.6.3 Operating band unwanted emissions 6.6.4.5.1 Transmitter 9 kHz < f ≤ 4 GHz: ±2.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 8 GHz < f ≤ 19 GHz: ±4.0 dB 8 GHz < f ≤ 19 GHz: ±4.0 dB 8 GHz < f ≤ 19 GHz: ±4.0 dB 8 GHz < f ≤ 19 GHz: ±4.0 dB 9 kHz < f ≤ 19 GHz: ±4.0 dB 9 kHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 1 GHz < f ≤ 19 GHz: ±4.0 dB 2 GHz < f ≤ 19 GHz: ±4.0 dB 3 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 4 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0 dB 5 GHz < f ≤ 19 GHz: ±4.0			
Leakage power Ratio (ACLR)Absolute power ± 2.0 dB, $f \le 3.0$ GHz Absolute power ± 2.5 dB, 3.0 GHz $< f \le 4.2$ GHz6.6.3 Operating band unwanted emissions ± 1.5 dB, $f \le 3.0$ GHz ± 1.5 dB, $f \le 3.0$ GHz ± 1.8 dB, 3.0 GHz $< f \le 4.2$ GHzbecause of the power ± 2.0 dB and the power ± 2.0 dB and the power ± 2.0 dB ± 1.8 dB, 3.0 GHz $< f \le 4.2$ GHzconstraint of the power ± 2.0 dB, $f \le 3.0$ GHz ± 1.5 dB, $f \le 3.0$ GHz ± 3.0 dBconstraint of the power ± 2.0 dB, $f \le 3.0$ GHz $f \le 4.2$ GHz ± 3.0 dBdata constraint of the power ± 2.5 dB, 3.0 GHz $< f \le 4.2$ GHz ± 2.5 dB, 3.0 GHz $< f \le 4.2$ GHz ± 3.0 dB for < 6.0 dBm, $f \le 3.0$ GHz ± 3.0 dB for < 6.0 dBm, $f \le 3.0$ GHz ± 3.0 dB for < 6.0 dBm, $f \le 3.0$ GHz ± 3.0 dBdata constraint of the power ± 2.5 dB, 3.0 GHz $< f \le 4.2$ GHz $= 4.2$ GHz 			
(ACLR)Absolute power ± 2.5 dB, 3.0 GHz $< f \le 4.2$ GHz6.6.3 Operating band unwanted emissions ± 1.5 dB, $f \le 3.0$ GHz6.6.4.5.1 Transmitter spurious emissions, $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ 6.6.4.5.2 Transmitter spurious emissions, $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ 6.6.4.5.2 Transmitter spurious emissions, $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ $6.6.4.5.3$ Transmitter spurious emissions, $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ $6.6.4.5.3$ Transmitter spurious emissions, $4 \text{ GHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $6.6.4.5.4$ Transmitter spurious emissions, $4 \text{ GHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $6.6.4.5.4$ Transmitter spurious emissions, $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4.0 \text{ dB}$ $4 \text{ CHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$ $4 \text{ GHz} < f \le 4.0 \text{ dB}$ $4 CH$			
6.6.3 Operating band unwanted emissions $\pm 1.5 \text{ dB}, f \le 3.0 \text{GHz} \pm 1.8 \text{ dB}, 3.0 \text{GHz} < f \le 4.2 \text{GHz}$ 6.6.4.5.1 Transmitter spurious emissions, $\pm 1.8 \text{ dB}, 3.0 \text{GHz} < f \le 4.2 \text{GHz}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 4 GHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 8 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 8 G.6.4.5.2 Transmitter spurious emissions, $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 8 G.4.5.3 Transmitter spurious emissions, Protection of BS receiver $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 9 kHz < f ≤ 19 GHz: $\pm 4.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 2.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text{ dB}$ 9 kHz < f ≤ 4 GHz: $\pm 3.0 \text$			
unwanted emissions $\pm 1.8 \text{ dB}, 3.0 \text{GHz} < f \le 4.2 \text{GHz}$ $6.6.4.5.1$ Transmitter spurious emissions, Mandatory Requirements $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ $6.6.4.5.2$ Transmitter spurious emissions, Mandatory Requirements $9 \text{ kHz} < f \le 4 \text{ GHz}: \pm 2.0 \text{ dB}$ $6.6.4.5.3$ Transmitter spurious emissions, Protection of BS receiver $\pm 3.0 \text{ dB}$ $6.6.4.5.4$ Transmitter spurious emissions, Additional spurious emissions requirements $\pm 2.0 \text{ dB for} > -60 \text{dBm}, f \le 3.0 \text{GHz}$ $\pm 2.5 \text{ dB}, 3.0 \text{GHz} < f \le 4.2 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ for $\le -60 \text{dBm}, f \le 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ for $\le -60 \text{dBm}, f \le 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ for $\le -60 \text{dBm}, f \le 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ for $\le -60 \text{dBm}, f \le 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ $= 6.6.4.5.5$ Transmitter spurious emissions, Colocation $\pm 3.0 \text{ dB}$ $= 6.7 \text{ Transmitter}$ intermodulation (interferer and is unrelated to the measurement uncertainty of the and is unrelated to the measurement uncertainty of the			
6.6.4.5.1 Transmitter spurious emissions, Mandatory Requirements 6.6.4.5.2 Transmitter spurious emissions, Mandatory Requirements 6.6.4.5.3 Transmitter spurious emissions, Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements 6.6.4.5.5 Transmitter spurious emissions requirements 6.6.4.5.5 Transmitter spurious emissions, Colocation 6.7 Transmitter The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the discontinual disco			
spurious emissions, Mandatory Requirements 6.6.4.5.2 Transmitter spurious emissions, Mandatory Requirements 6.6.4.5.3 Transmitter spurious emissions, Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions, emissions requirements 6.6.4.5.5 Transmitter spurious emissions, Colocation 6.7 Transmitter intermodulation (interferer 4 GHz < f \leq 19 GHz: \pm 4.0 dB 9 kHz < f \leq 4 GHz: \pm 2.0 dB 4 GHz < f \leq 4 GHz: \pm 4.0 dB 4 GHz < f \leq 4 GHz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 4 GHz < f \leq 4 GHz: \pm 4.0 dB 4 GHz < f \leq 4 GHz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 4 GHz < f \leq 4 GHz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 6 Hz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 6 Hz: \pm 4.0 dB 5 Hz: \pm 4.0 dB 6 Hz: \pm 4.0 dB 7 Hz: \pm 4.0 dB 8 Hz: \pm 4.0			
Mandatory Requirements9 kHz < f ≤ 4 GHz:±2.0 dB6.6.4.5.2 Transmitter spurious emissions, Mandatory Requirements9 kHz < f ≤ 19 GHz:±4.0 dB			
$\begin{array}{lll} 6.6.4.5.2 & \text{Transmitter} \\ \text{spurious emissions,} \\ \text{Mandatory Requirements} \\ 6.6.4.5.3 & \text{Transmitter} \\ \text{spurious emissions,} \\ \text{Protection of BS receiver} \\ 6.6.4.5.4 & \text{Transmitter} \\ \text{spurious emissions,} \\ \text{Additional spurious} \\ \text{emissions requirements} \\ \text{emissions requirements} \\ 6.6.4.5.5 & \text{Transmitter} \\ \text{spurious emissions, Colocation} \\ \text{The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the} \\ Summer of the provided by the properties of the provided by the $		4 GHz < f ≤ 19 GHz: ±4.0 dB	
spurious emissions, Mandatory Requirements 6.6.4.5.3 Transmitter spurious emissions, Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements 4. GHz < f \leq 19 GHz: \pm 4.0 dB 4. GHz < f \leq 19 GHz: \pm 4.0 dB 4. GHz < f \leq 19 GHz: \pm 4.0 dB 4. GHz < f \leq 3.0 dB 4. GHz < f \leq 4.2 GHz 4. 2.0 dB for > -60dBm, f \leq 3.0 GHz 4. 2.5 dB, 3.0 GHz < f \leq 4.2 GHz 4. 3.0 dB for \leq -60dBm, f \leq 3.0 GHz 4. 3.0 dB 5. GHz 4. 3.0 dB 5. GHz 5. GHz 6. 6. 4.5.5 Transmitter spurious emissions, Colocation 6.7 Transmitter 6.7 Transmitter 6.8 The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the double the effect on the result			
Mandatory Requirements $\pm 3.0 \text{ dB}$ 6.6.4.5.3 Transmitter spurious emissions, Protection of BS receiver $\pm 3.0 \text{ dB}$ 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements $\pm 2.0 \text{ dB for} > -60 \text{dBm, f} ≤ 3.0 \text{GHz}$ $\pm 2.5 \text{ dB, } 3.0 \text{GHz} < f ≤ 4.2 \text{GHz}$ $\pm 3.0 \text{ dB for} ≤ -60 \text{dBm, f} ≤ 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the			
6.6.4.5.3 Transmitter spurious emissions, Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements $\pm 3.0 \text{ dB}$ $\pm 2.5 \text{ dB}$, $3.0 \text{GHz} < f ≤ 4.2 \text{GHz}$ $\pm 3.0 \text{ dB}$ for $≤ -60 \text{dBm}$, $f ≤ 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ for $≤ -60 \text{dBm}$, $f ≤ 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ 6.6.4.5.5 Transmitter spurious emissions, Colocation 6.7 Transmitter The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the double the effect on the result		4 GHz < f ≤ 19 GHz:±4.0 dB	
spurious emissions, Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements ± 2.0 dB for > -60 dBm, f ≤ 3.0 GHz ± 2.5 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 3.0 dB for ≤ -60 dBm, f ≤ 3.0 GHz ± 3.0 GHz ± 3.0 dB for ≤ -60 dBm, f ≤ 3.0 GHz ± 3.0 dB ± 3.0 GHz ± 3.0 G		0.0 ID	
Protection of BS receiver 6.6.4.5.4 Transmitter spurious emissions, Additional spurious emissions requirements 6.6.4.5.5 Transmitter spurious emissions, Colocation 6.7 Transmitter intermodulation (interferer The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the		±3.0 dB	
$\begin{array}{lll} 6.6.4.5.4 & \text{Transmitter} \\ \text{spurious emissions,} \\ \text{Additional spurious} \\ \text{emissions requirements} \\ 6.6.4.5.5 & \text{Transmitter} \\ \text{spurious emissions, Colocation} \\ \end{array} \begin{array}{ll} \pm 2.0 & \text{dB for } > -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 & \text{dB for } \leq -60 \text{dBm, f} \leq 3.0 \text{GHz} \\ \pm 3.0 &$			
spurious emissions, Additional spurious emissions requirements $\pm 3.0 \text{ dB}$ for $\leq -60 \text{dBm}$, f $\leq 3.0 \text{GHz}$ $\pm 3.0 \text{ dB}$ for $\leq -60 \text{dBm}$, f $\leq 3.0 \text{GHz}$ $\pm 3.5 \text{ dB}$, $3.0 \text{GHz} < f \leq 4.2 \text{GHz}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$. 2 0 dD for	
Additional spurious $\pm 3.0 \text{ dB}$ for $\le -60 \text{dBm}$, f $\le 3.0 \text{GHz}$ $\pm 3.5 \text{ dB}$, $3.0 \text{GHz} < f \le 4.2 \text{GHz}$ 6.6.4.5.5 Transmitter $\pm 3.0 \text{ dB}$ 2 spurious emissions, Colocation 6.7 Transmitter The value below applies only to the interference signal and is unrelated to the measurement uncertainty of the double the effect on the result			
emissions requirements $\pm 3.5 \text{ dB}, 3.0 \text{GHz} < \text{f} \le 4.2 \text{GHz}$ 6.6.4.5.5 Transmitter $\pm 3.0 \text{ dB}$ $\pm 3.0 \text{ dB}$ 5.7 Transmitter on the value below applies only to the interference signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and is unrelated to the measurement uncertainty of the double the effect on the result of the signal and			
6.6.4.5.5 Transmitter spurious emissions, Co- location 6.7 Transmitter intermodulation (interferer and is unrelated to the measurement uncertainty of the			
spurious emissions, Co- location 6.7 Transmitter intermodulation (interferer and is unrelated to the measurement uncertainty of the double the effect on the result			
locationThe value below applies only to the interference signal intermodulation (interferer and is unrelated to the measurement uncertainty of theThe uncertainty of interferer has double the effect on the result		± 3.0 db	
6.7 Transmitter Intermodulation (interferer and is unrelated to the measurement uncertainty of the and is unrelated to the measurement uncertainty of the double the effect on the result			
intermodulation (interferer and is unrelated to the measurement uncertainty of the double the effect on the result		The value below applies only to the interference signal	The uncertainty of interferer has
			,
	requirements)	tests (6.6.2, 6.6.3 and 6.6.4) which have to be carried	due to the frequency offset.
out in the presence of the interferer.	Toquitorito)		due to the hequelley offset.
±1,0 dB		±1.0 dB	

4.1.2.2 Measurement of receiver

Table 4.1.2-2: Maximum Test System Uncertainty for receiver tests

Subclause	Maximum Test System Uncertainty ¹	Derivation of Test System Uncertainty
7.2 Reference sensitivity level	±0.7 dB, f ≤ 3.0GHz ±1.0 dB, 3.0GHz < f ≤ 4.2GHz	
7.3 Dynamic range	±0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB
		Definitions of signal-to-noise ratio, AWGN and related constraints are given in Table 4.1.2-3.
7.4 In-channel selectivity	±1.4 dB, f ≤ 3.0GHz ±1.8 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty comprises three quantities:
		Wanted signal level error Interferer signal level error Additional impact of interferer leakage
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared to provide the ratio error of the two signals. The interferer leakage effect is systematic, and is added aritmetically.
		Test System uncertainty = [SQRT (wanted_level_error² + interferer_level_error²)] + leakage effect.
		$f \le 3.0 GHz$ Wanted signal level $\pm 0.7 dB$ Interferer signal level $\pm 0.7 dB$ $3.0 GHz < f \le 4.2 GHz$ Wanted signal level $\pm 1.0 dB$ Interferer signal level $\pm 1.0 dB$
		f ≤ 4.2GHz Impact of interferer leakage 0.4dB.

7.5 Adjacent Channel Selectivity (ACS) and narrow-band blocking	±1.4 dB, f ≤ 3.0GHz ±1.8 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty comprises three quantities:
Trainer Baria Blooking		Wanted signal level error Interferer signal level error Additional impact of interferer ACLR
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared to provide the ratio error of the two signals. The interferer ACLR effect is systematic, and is added aritmetically.
		Test System uncertainty = [SQRT (wanted_level_error² + interferer_level_error²)] + ACLR effect.
		$\begin{array}{l} f \leq 3.0 \text{GHz} \\ \text{Wanted signal level} \pm 0.7 \text{dB} \\ \text{Interferer signal level} \pm 0.7 \text{dB} \\ 3.0 \text{GHz} < f \leq 4.2 \text{GHz} \\ \text{Wanted signal level} \pm 1.0 \text{dB} \\ \text{Interferer signal level} \pm 1.0 \text{dB} \\ \end{array}$
		f ≤ 4.2GHz Impact of interferer ACLR 0.4dB. See Note 2.

7.6.5.1 Blocking (General requirements) In-band blocking, using modulated interferer: $\pm 1.6 \text{ dB}$, $f \le 3.0 \text{GHz}$ $\pm 2.0 \text{ dB}$, $3.0 \text{GHz} < f \le 4.2 \text{GHz}$ Out of band blocking, using CW interferer: $f_{\text{wanted}} \le 3 \text{GHz}$: $\pm 1.3 \text{ dB}$ $3.0 \text{GHz} < f_{\text{interferer}} \le 4.2 \text{ GHz}$: $\pm 1.3 \text{ dB}$ $3.0 \text{GHz} < f_{\text{interferer}} \le 4.2 \text{ GHz}$: $\pm 1.5 \text{ dB}$ $4.2 \text{GHz} < f_{\text{interferer}} \le 12.75 \text{ GHz}$: $\pm 3.2 \text{ dB}$ Items 1 and 2 are assum be uncorrelated so can be uncorrelat	ror error noise
Out of band blocking, using CW interferer: fwanted ≤ 3GHz: 1MHz < finterferer ≤ 3 GHz: ±1.3 dB 3.0GHz < finterferer ≤ 4.2 GHz: ±3.2 dB 3GHz < fwanted ≤ 4.2GHz: 1MHz < finterferer ≤ 4.2 GHz: ±3.2 dB 3GHz < fwanted ≤ 4.2GHz: 1MHz < finterferer ≤ 3 GHz: ±1.5 dB 3.0GHz < finterferer ≤ 3 GHz: ±1.5 dB 3.0GHz < finterferer ≤ 3 GHz: ±1.7 dB 4.2GHz < finterferer ≤ 4.2 GHz: ±3.3 dB 1. Wanted signal level el 2. Interferer	error oise ed to
aritmetically. Test System uncertainty	vide CLR ct is
interferer_level_error²)] - ACLR effect + Broadbar	= ror ² +
noise effect. In-band blocking, using modulated interferer: f ≤ 3.0GHz Wanted signal level ± 0. Interferer signal level ± 1 3.0GHz < f ≤ 4.2GHz Wanted signal level ± 1. Interferer signal level ± 1.	.0dB)dB
f ≤ 4.2GHz Interferer ACLR 0.4dB Broadband noise not applicable	
$\begin{array}{c} \underline{\text{Out of band blocking, us}} \\ \underline{\text{CW interferer:}} \\ \\ \text{Wanted signal level:} \\ \pm 0.7\text{dB f} \leq 3.0\text{GHz} \\ \pm 1.0\text{dB } 3.0\text{GHz} < \text{f} \leq 4.2 \\ \\ \text{Interferer signal level:} \\ \pm 1.0\text{dB up to } 3\text{GHz} \\ \pm 1.2\text{dB } 3.0\text{GHz} < \text{f} \leq 4.2 \\ \\ \pm 3.0\text{dB up to } 12.75\text{GHz} \\ \\ \text{Interferer ACLR not apple limpact of interferer} \\ \\ \text{Broadband noise } 0.1\text{dB} \\ \\ \end{array}$	GHz GHz icable
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	′dB
f ≤ 4.2GHz Interferer signal level: ± 2.0dB Interferer ACLR not appl Impact of interferer Broadband noise 0.4dB	icable
7.7 Receiver spurious $30 \text{ MHz} \le f \le 4 \text{ GHz}:\pm 2.0 \text{ dB}$ emissions $4 \text{ GHz} < f \le 19 \text{ GHz}: \pm 4.0 \text{ dB}$	

7.8 Receiver intermodulation	±1.8 dB, f ≤ 3.0GHz ±2.4 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty comprises four quantities:
		Wanted signal level error CW Interferer level error Modulated Interferer level error Impact of interferer ACLR
		The effect of the closer CW signal has twice the effect.
		Items 1, 2 and 3 are assumed to be uncorrelated so can be root sum squared to provide the combined effect of the three signals. The interferer ACLR effect is systematic, and is added aritmetically.
		Test System uncertainty = SQRT [(2 x CW_level_error) ² +(mod interferer_level_error) ² +(wanted signal_level_error) ²] + ACLR effect.
		f \leq 3.0GHz Wanted signal level \pm 0.7dB CW Interferer level \pm 0.5dB Mod Interferer level \pm 0.7dB 3.0GHz $<$ f \leq 4.2GHz Wanted signal level \pm 1.0dB CW Interferer level \pm 0.7dB Mod Interferer level \pm 1.0dB
Note 1: Unless otherwise	e noted, only the Test System stimulus error is considered	f ≤ 4.2GHz Impact of interferer ACLR 0.4dB I here. The effect of errors in

- Note 1: Unless otherwise noted, only the Test System stimulus error is considered here. The effect of errors in the throughput measurements due to finite test duration is not considered.
- Note 2: The Test equipment ACLR requirement for a specified uncertainty contribution is calculated as below:

 a) The wanted signal to noise ratio for Reference sensitivity is calculated based on a 5dB noise figure
 - b) The same wanted signal to (noise + interference) ratio is then assumed at the desensitisation level according to the ACS test conditions
 - c) The noise is subtracted from the total (noise + interference) to compute the allowable BS adjacent channel interference. From this an equivalent BS ACS figure can be obtained
 - d) The contribution from the Test equipment ACLR is calculated to give a 0.4dB additional rise in interference. This corresponds to a Test equipment ACLR which is 10.2 dB better than the BS ACS
 - e) This leads to the following Test equipment ACLR requirements for the interfering signal:

Adjacent channel Selectivity

E-UTRA 1.4MHz channel bandwidth: 56dB E-UTRA 3MHz channel bandwidth: 56dB

E-UTRA 5MHz channel bandwidth and above: 56dB

Narrow band blocking

E-UTRA 1.4MHz channel bandwidth: 65dB E-UTRA 3MHz channel bandwidth: 61dB

E-UTRA 5MHz channel bandwidth and above: 59dB

4.1.2.3 Measurement of performance requirement

Table 4.1.2-3: Maximum Test System Uncertainty for Performance Requirements

Subclause	Maximum Test System Uncertainty ¹	Derivation of Test System Uncertainty
8.2.1 Performance requirements of	± 0.6 dB	Overall system uncertainty for fading
PUSCH in multipath fading propagation		conditions comprises two quantities:
conditions transmission on single antenna port		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.2.1A Performance requirements of PUSCH in multipath fading propagation	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities:
conditions transmission on two antenna ports		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for MIMO
8.2.2 Performance requirements for UL timing adjustment	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB
8.2.3 Performance requirements for HARQ-ACK multiplexed on PUSCH	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB

8.2.4 Performance requirements for High Speed Train conditions	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty. Signal-to-noise ratio uncertainty ±0.3 dB	
8.3.1 ACK missed detection for single user PUCCH format 1a transmission on	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:	
single antenna port		Signal-to-noise ratio uncertainty Fading profile power uncertainty	
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:	
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]	
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB	
8.3.2 CQI missed detection for PUCCH format 2 transmission on single antenna	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:	
port		Signal-to-noise ratio uncertainty Fading profile power uncertainty	
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:	
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]	
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB	
8.3.3 ACK missed detection for multi user PUCCH format 1a	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:	
		Signal-to-noise ratio uncertainty Fading profile power uncertainty	
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:	
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]	
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB	
8.3.4 ACK missed detection for PUCCH format 1b with Channel Selection	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:	
		Signal-to-noise ratio uncertainty Fading profile power uncertainty	
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:	
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]	
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB	

0.0.5.4.01/	. 0.0 -ID	Occupations of the Control
8.3.5 ACK missed detection for PUCCH format 3	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.3.6 NAK to ACK detection for PUCCH format 3	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities:
ports		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for Tx diversity
8.3.8 CQI performance requirements for PUCCH format 2 transmission on two	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities:
antenna ports		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for Tx diversity

8.4.1 PRACH false alarm probability and missed detection	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		Signal-to-noise ratio uncertainty Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty ² + Fading profile power uncertainty ²)]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB
In addition, the following Test System uncer	rtainties and related cons	traints apply:

AWGN Bandwidth	≥ 1.08MHz, 2.7MHz, 4.5MHz, 9MHz, 13.5MHz, 18MHz;
	NRB x 180kHz according to BW _{Config}
AWGN absolute power uncertainty, averaged over	±1.5 dB
BWConfig	
AWGN flatness and signal flatness, max deviation for	±2 dB
any Resource Block, relative to average over BW _{Config}	
AWGN flatness over BW _{Channel} , max deviation for any	+2 dB
Resource Block, relative to average over BW _{Config}	
AWGN flatness and signal flatness, max difference	±0.5 dB
between adjacent Resource Blocks	
AWGN peak to average ratio	≥10 dB @0.001%
Signal-to noise ratio uncertainty, averaged over uplink	±0.3 dB
transmission Bandwidth	
Fading profile power uncertainty	Test-specific
Fading profile delay uncertainty, relative to frame	±5 ns (excludes absolute errors related to baseband
timing	timing)
' 	

Note 1: Only the overall stimulus error is considered here. The effect of errors in the throughput measurements due to finite test duration is not considered.

4.1.3 Interpretation of measurement results

The measurement results returned by the Test System are compared - without any modification - against the Test Requirements as defined by the Shared Risk principle.

The Shared Risk principle is defined in ITU-R M.1545 [3].

The actual measurement uncertainty of the Test System for the measurement of each parameter shall be included in the test report.

The recorded value for the Test System uncertainty shall be, for each measurement, equal to or lower than the appropriate figure in subclause 4.1.2 of this specification.

If the Test System for a test is known to have a measurement uncertainty greater than that specified in subclause 4.1.2, it is still permitted to use this apparatus provided that an adjustment is made as follows.

Any additional uncertainty in the Test System over and above that specified in subclause 4.1.2 shall be used to tighten the Test Requirement, making the test harder to pass. (For some tests e.g. receiver tests, this may require modification of stimulus signals). This procedure (defined in Annex G) will ensure that a Test System not compliant with subclause 4.1.2 does not increase the chance of passing a device under test where that device would otherwise have failed the test if a Test System compliant with subclause 4.1.2 had been used.

4.2 Base station classes

The requirements in this specification apply to Wide Area Base Station, Local Area Base Station and Home Base Station unless other wise stated.

Wide Area Base Stations are characterised by requirements derived from Macro Cell scenarios with a BS to UE minimum coupling loss equals to 70 dB. The Wide Area Base Station class has the same requirements as the base station for General Purpose application in Release 8.

Local Area Base Stations are characterised by requirements derived from Pico Cell scenarios with a BS to UE minimum coupling loss equal to 45 dB.

Home Base Stations are characterised by requirements derived from Femto Cell scenarios.

The manufacturer shall declare the intended class of the BS under test.

4.3 Regional requirements

Some requirements in the present document may only apply in certain regions either as optional requirements or set by local and regional regulation as mandatory requirements. It is normally not stated in the 3GPP specifications under what exact circumstances that the requirements apply, since this is defined by local or regional regulation.

Table 4.3-1 lists all requirements that may be applied differently in different regions.

Table 4.3-1: List of regional requirements

Clause number	Requirement	Comments	
5.5	Operating bands	Some bands may be applied regionally.	
5.6	Channel bandwidth	Some channel bandwidths may be applied regionally.	
5.7	Channel arrangement	The requirement is applied according to what operating bands in Clause 5.5 that are supported by the BS.	
6.2.	Base station maximum output power	In certain regions, the minimum requirement for normal conditions may apply also for some conditions outside the range of conditions defined as normal. In certain regions, additional regional requirement specified in subclause 6.2.2 in [1] is applied for rated output power declared by the manufacturer.	
6.6.3.5.1	Operating band unwanted emissions (Category A)	This requirement is mandatory for regions where Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5] apply.	
6.6.3.5.2	Operating band unwanted emissions (Category B)	This requirement is mandatory for regions where Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5], apply.	
6.6.3.5.3	Additional requirements	These requirements may apply in certain regions as additional Operating band unwanted emission limits.	
6.6.4.5.1	Spurious emissions (Category A)	This requirement is mandatory for regions where Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5] apply.	
6.6.4.5.2	Spurious emissions (Category B)	This requirement is mandatory for regions where Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5], apply.	
6.6.4.5.4	Additional spurious emission requirements	These requirements may be applied for the protection of system operating in frequency ranges other than the E-UTRA BS operating band.	
6.6.4.5.5	Co-location with other base stations	These requirements may be applied for the protection of other BS receivers when a BS operating in another frequency band is co-located with an E-UTRA BS.	
7.6.5.2	Co-location with other base stations	These requirements may be applied for the protection of the BS receivers when a BS operating in another frequency band is colocated with an E-UTRA BS.	

4.4 Selection of configurations for testing

Most tests in the present document are only performed for a subset of the possible combinations of test conditions. For instance:

- Not all transceivers in the configuration may be specified to be tested;
- Only one RF channel may be specified to be tested;
- Not all channel bandwidths may be specified to be tested.

4.5 BS Configurations

4.5.1 Transmit configurations

Unless otherwise stated, the transmitter characteristics in clause 6 are specified at the BS antenna connector (test port A) with a full complement of transceivers for the configuration in normal operating conditions. If any external apparatus such as a TX amplifier, a filter or the combination of such devices is used, requirements apply at the far end antenna connector (test port B).

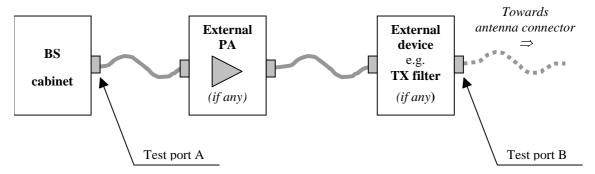


Figure 4.5-1: Transmitter test ports

4.5.1.1 Transmission with multiple transmitter antenna connectors

Unless otherwise stated, for the tests in clause 6 of the present document, the requirement applies for each transmitter antenna connector in the case of transmission with multiple transmitter antenna connectors.

Transmitter requirements are tested at the antenna connector, with the remaining antenna connector(s) being terminated. If the manufacturer has declared the transmitter paths to be equivalent, it is sufficient to measure the signal at any one of the transmitter antenna connectors..

4.5.2 Receive configurations

Unless otherwise stated, the receiver characteristics in clause 7 are specified at the BS antenna connector (test port A) with a full complement of transceivers for the configuration in normal operating conditions. If any external apparatus such as a RX amplifier, a filter or the combination of such devices is used, requirements apply at the far end antenna connector (test port B).

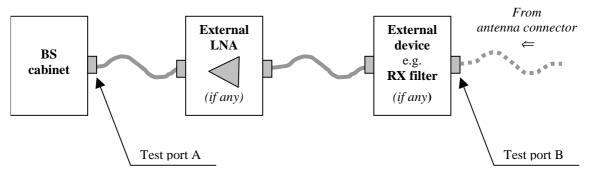


Figure 4.5-2: Receiver test ports

4.5.2.1 Reception with multiple receiver antenna connectors, receiver diversity

For the tests in clause 7 of the present document, the requirement applies at each receiver antenna connector for receivers with antenna diversity or in the case of multi-carrier reception with multiple receiver antenna connectors.

Receiver requirements are tested at the antenna connector, with the remaining receiver(s) disabled or their antenna connector(s) being terminated. If the manufacturer has declared the receiver paths to be equivalent, it is sufficient to apply the specified test signal at any one of the receiver antenna connectors.

4.5.3 Duplexers

The requirements of the present document shall be met with a duplexer fitted, if a duplexer is supplied as part of the BS. If the duplexer is supplied as an option by the manufacturer, sufficient tests should be repeated with and without the duplexer fitted to verify that the BS meets the requirements of the present document in both cases.

The following tests shall be performed with the duplexer fitted, and without it fitted if this is an option:

- 1) subclause 6.2, base station output power, for the highest static power step only, if this is measured at the antenna connector;
- 2) subclause 6.6, unwanted emissions; outside the BS transmit band;
- 3) subclause 6.6.4.5.3, protection of the BS receiver;
- 4) subclause 6.7, transmit intermodulation; for the testing of conformance, the carrier frequencies should be selected to minimize intermodulation products from the transmitters falling in receive channels.

The remaining tests may be performed with or without the duplexer fitted.

- NOTE 1: When performing receiver tests with a duplexer fitted, it is important to ensure that the output from the transmitters does not affect the test apparatus. This can be achieved using a combination of attenuators, isolators and filters.
- NOTE 2: When duplexers are used, intermodulation products will be generated, not only in the duplexer but also in the antenna system. The intermodulation products generated in the antenna system are not controlled by 3GPP specifications, and may degrade during operation (e.g. due to moisture ingress). Therefore, to ensure continued satisfactory operation of a BS, an operator will normally select EARFCNs to minimize intermodulation products falling on receive channels. For testing of complete conformance, an operator may specify the EARFCNs to be used.

4.5.4 Power supply options

If the BS is supplied with a number of different power supply configurations, it may not be necessary to test RF parameters for each of the power supply options, provided that it can be demonstrated that the range of conditions over which the equipment is tested is at least as great as the range of conditions due to any of the power supply configurations.

This applies particularly if a BS contains a DC rail which can be supplied either externally or from an internal mains power supply. In this case, the conditions of extreme power supply for the mains power supply options can be tested by

testing only the external DC supply option. The range of DC input voltages for the test should be sufficient to verify the performance with any of the power supplies, over its range of operating conditions within the BS, including variation of mains input voltage, temperature and output current.

4.5.5 Ancillary RF amplifiers

The requirements of the present document shall be met with the ancillary RF amplifier fitted. At tests according to clauses 6 and 7 for TX and RX respectively, the ancillary amplifier is connected to the BS by a connecting network (including any cable(s), attenuator(s), etc.) with applicable loss to make sure the appropriate operating conditions of the ancillary amplifier and the BS. The applicable connecting network loss range is declared by the manufacturer. Other characteristics and the temperature dependence of the attenuation of the connecting network are neglected. The actual attenuation value of the connecting network is chosen for each test as one of the applicable extreme values. The lowest value is used unless otherwise stated.

Sufficient tests should be repeated with the ancillary amplifier fitted and, if it is optional, without the ancillary RF amplifier to verify that the BS meets the requirements of the present document in both cases.

When testing, the following tests shall be repeated with the optional ancillary amplifier fitted according to the table below, where x denotes that the test is applicable:

Receiver Tests	Subclause	TX amplifier only	RX amplifier only	TX/RX amplifiers combined (Note)
	7.2		X	X
	7.5 (Narrowband blocking)		Х	Х
	7.6		X	X
	7.7		X	X
	7.8		X	
Transmitter	6.2	Χ		X
Tests	6.6.1	Χ		X
	6.6.2	Χ		X
	6.6.3	Χ		Х
	6.6.4	Χ		Χ
	6.7	Χ		X

Table 4.5-1: Tests applicable to Ancillary RF Amplifiers

NOTE: Combining can be by duplex filters or any other network. The amplifiers can either be in RX or TX branch or in both. Either one of these amplifiers could be a passive network.

In test according to subclauses 6.2 and 7.2 highest applicable attenuation value is applied.

4.5.6 BS with integrated luant BS modem

Unless otherwise stated, for the tests in the present document, the integrated Iuant BS modem shall be switched off. Spurious emissions according to clauses 6.6.4 and 7.7 shall be measured only for frequencies above 20MHz with the integrated Iuant BS modem switched on.

4.5.7 BS using antenna arrays

A BS may be configured with a multiple antenna port connection for some or all of its transceivers or with an antenna array related to one cell (not one array per transceiver). This subclause applies to a BS which meets at least one of the following conditions:

- the transmitter output signals from one or more transceiver appear at more than one antenna port; or
- there is more than one receiver antenna port for a transceiver or per cell and an input signal is required at more than one port for the correct operation of the receiver thus the outputs from the transmitters as well as the inputs to the receivers are directly connected to several antennas (known as "aircombining"); or
- transmitters and receivers are connected via duplexers to more than one antenna.

In case of diversity or spatial multiplexing, multiple antennas are not considered as an antenna array.

If a BS is used, in normal operation, in conjunction with an antenna system which contains filters or active elements which are necessary to meet the E-UTRA requirements, the conformance tests may be performed on a system comprising the BS together with these elements, supplied separately for the purposes of testing. In this case, it must be demonstrated that the performance of the configuration under test is representative of the system in normal operation, and the conformance assessment is only applicable when the BS is used with the antenna system.

For conformance testing of such a BS, the following procedure may be used.

4.5.7.1 Receiver tests

For each test, the test signals applied to the receiver antenna connectors shall be such that the sum of the powers of the signals applied equals the power of the test signal(s) specified in the test.

An example of a suitable test configuration is shown in figure 4.5.7.1-1.

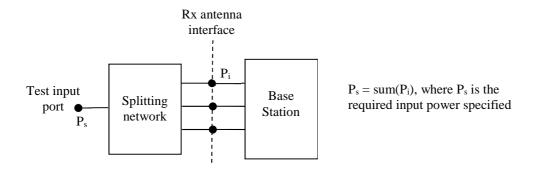


Figure 4.5.7.1-1: Receiver test set-up

For spurious emissions from the receiver antenna connector, the test may be performed separately for each receiver antenna connector.

4.5.7.2 Transmitter tests

For each test, the test signals applied to the transmitter antenna connectors (P_i) shall be such that the sum of the powers of the signals applied equals the power of the test signal(s) (P_s) specified in the test. This may be assessed by separately measuring the signals emitted by each antenna connector and summing the results, or by combining the signals and performing a single measurement. The characteristics (e.g. amplitude and phase) of the combining network should be such that the power of the combined signal is maximised.

An example of a suitable test configuration is shown in figure 4.5.7.2-1.

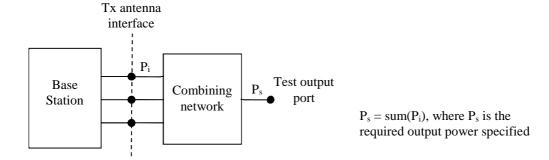


Figure 4.5.7.2-1: Transmitter test set-up

For Intermodulation attenuation, the test may be performed separately for each transmitter antenna connector.

4.6 Manufacturer's declarations of regional and optional requirements

4.6.1 Operating band and frequency range

The manufacturer shall declare which operating band(s) specified in clause 5.5 that is supported by the BS under test and if applicable, which frequency ranges within the operating band(s) that the base station can operate in. Requirements for other operating bands and frequency ranges need not be tested.

The manufacturer shall declare which operating band(s) specified in clause 5.5 are supported by the BS under test for carrier aggregation.

4.6.2 Channel bandwidth

The manufacturer shall declare which of the channel bandwidths specified in TS36.104[2] subclause 5.6 that are supported by the BS under test. Requirements for other channel bandwidths need not be tested.

4.6.3 Base station output power

The manufacturer shall declare for the BS under test the rated output power for each supported transmit channel bandwidth.

4.6.4 Spurious emissions Category

The manufacturer shall declare one of the following:

- a) The BS is tested against Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5]. In this case
 - conformance with the operating band unwanted emissions requirements in clause 6.6.3.5.1 is mandatory, and the requirements specified in clause 6.6.3.5.2 need not be tested..
 - conformance with the spurious emissions requirements in clause 6.6.4.5.1 is mandatory, and the requirements specified in clause 6.6.4.5.2 need not be tested.
- b) The BS is tested against Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5]. In this case,
 - conformance with the operating band unwanted emissions requirements in clause 6.6.3.5.2 is mandatory, and the requirements specified in clause 6.6.3.5.1 need not be tested.
 - conformance with the spurious emissions requirements in clause 6.6.4.5.2 is mandatory, and the requirements specified in clause 6.6.4.5.1 need not be tested.

4.6.5 Additional operating band unwanted emissions

The manufacturer shall declare whether the BS under test is intended to operate in geographic areas where the additional operating band unwanted emission limits defined in clause 6.6.3.5.3 apply. If this is the case, compliance with the test requirement specified in Tables 6.6.3.5.3-1, 6.6.3.5.3-2 or 6.6.3.5.3-3 are mandatory; otherwise these requirements need not be tested.

For a BS declared to support Band 20 and to operate in geographic areas within the CEPT in which frequencies are allocated to broadcasting (DTT) service, the manufacturer shall additionally declare the following quantities associated with the applicable test conditions of Table 6.6.3.5.3-4 and information in annex G of [2]:

P_{EM.N} Declared emission level for channel N

P_{10MHz} Maximum output Power in 10 MHz

For a BS declared to support Band 24 and intended to operate in geographic areas in which the conditions for emissions falling into the 1559-1610 MHz band according to FCC Order DA 10-534 apply, the manufacturer shall additionally declare the following quantities associated with the applicable test conditions of Table 6.6.4.5.4-4:

P_{E 1kHz} Declared emission level (measurement bandwidth = 1kHz)

 $P_{E\ 1MHz}$ Declared emission level (measurement bandwidth = 1MHz)

4.6.6 Co-existence with other systems

The manufacturer shall declare whether the BS under test is intended to operate in geographic areas where one or more of the systems GSM850, GSM900, DCS1800, PCS1900, UTRA FDD, UTRA TDD, E-UTRA and/or PHS operating in another band are deployed. If this is the case, compliance with the applicable test requirement for spurious emissions specified in clause 6.6.4.5.4 shall be tested.

4.6.7 Co-location with other base stations

The manufacturer shall declare whether the BS under test is intended to operate co-located with base stations of one or more of the systems GSM850, GSM900, DCS1800, PCS1900, UTRA FDD, UTRA TDD and/or E-UTRA operating in another band. If this is the case,

- compliance with the applicable test requirement for spurious emissions specified in clause 6.6.4.5.5 shall be tested.
- compliance with the applicable test requirement for receiver blocking specified in clause 7.6 shall be tested.

4.6.8 Manufacturer's declarations of supported RF configurations

The manufacturer shall declare which operational configurations the BS supports by declaring the following parameters:

- The supported operating bands defined in subclause 5.5;
- The frequency range within the above operating band(s) supported by the BS;
- The maximum Base Station RF bandwidth supported by a BS within each operating band;
- The supported operating configurations (multi-carrier, carrier aggregation, and/or single carrier) within each operating band.
- The supported component carrier combinations at nominal channel spacing within each operating band.
- The rated output power per carrier;

NOTE: Different rated output powers may be declared for different operating configurations.

- The rated total output power as a sum of all carriers;
- Maximum number of supported carriers within each band;

If the rated total output power and total number of supported carriers are not simultaneously supported, the manufacturer shall declare the following additional parameters:

- The reduced number of supported carriers at the rated total output power;

The reduced total output power at the maximum number of supported carriers.

4.7 Specified frequency range and supported channel bandwidth

Unless otherwise stated, the test shall be performed with a lowest and the highest bandwidth supported by the BS. The manufacturer shall declare that the requirements are fulfilled for all other bandwidths supported by the BS which are not tested.

The manufacturer shall declare:

- which of the operating bands defined in subclause 5.5 are supported by the BS.
- the frequency range within the above frequency band(s) supported by the BS.
- the channel bandwidths supported by the BS

For CA specific testing in section 4.7.2, the manufacturer's declaration in section 4.6.8 will be applied.

For the single carrier testing many tests in this TS are performed with appropriate frequencies in the bottom, middle and top channels of the supported frequency range of the BS. These are denoted as RF channels B (bottom), M (middle) and T (top).

Unless otherwise stated, the test shall be performed with a single carrier at each of the RF channels B, M and T.

When a test is performed by a test laboratory, the EARFCNs to be used for RF channels B, M and T shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

When a test is performed by a manufacturer, the EARFCNs to be used for RF channels B, M and T may be specified by an operator.

4.7.1 RF bandwidth position for non-single carrier testing

Many tests in this TS are performed with the maximum RF bandwidth located at the bottom, middle and top of the supported frequency range in each operating band. These are denoted as B_{RFBW} (bottom), M_{RFBW} (middle) and T_{RFBW} (top).

Unless otherwise stated, the test shall be performed at B_{RFBW} , M_{RFBW} and T_{RFBW} defined as following:

- B_{RFBW}: maximum RF bandwidth located at the bottom of the supported frequency range in each operating band;
- MRFBW: maximum RF bandwidth located in the middle of the supported frequency range in each operating band;
- T_{RFBW}: maximum RF bandwidth located at the top of the supported frequency range in each operating band.

When a test is performed by a test laboratory, the position of B_{RFBW} , M_{RFBW} and T_{RFBW} in the operating band shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

4.7.2 Aggregated channel bandwidth position for CA specific testing

Occupied bandwidth test in this TS is performed with the aggregated channel bandwidth located at the bottom, middle and top of the supported frequency range in the operating band. These are denoted as $B_{BW\ Channel\ CA}$ (bottom), $M_{BW\ Channel\ CA}$ (middle) and $T_{BW\ Channel\ CA}$ (top).

Unless otherwise stated, the test shall be performed at $B_{BW\ Channel\ CA}$, $M_{BW\ Channel\ CA}$ and $T_{BW\ Channel\ CA}$ defined as following:

- B_{BW Channel CA}: aggregated channel bandwidth located at the bottom of the supported frequency range in each operating band;
- M_{BW Channel CA}: aggregated channel bandwidth located close in the middle of the supported frequency range in each operating band, with the center frequency of each component carrier aligned to the channel raster;
- $T_{BW\ Channel\ CA}$: aggregated channel bandwidth located at the top of the supported frequency range in each operating band.

When a test is performed by a test laboratory, the position of $B_{BW\ Channel\ CA}$, $M_{BW\ Channel\ CA}$ and $T_{BW\ Channel\ CA}$ in the operating band shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

4.8 Format and interpretation of tests

Each test in the following clauses has a standard format:

X Title

All tests are applicable to all equipment within the scope of the present document, unless otherwise stated.

X.1 Definition and applicability

This subclause gives the general definition of the parameter under consideration and specifies whether the test is applicable to all equipment or only to a certain subset. Required manufacturer declarations may be included here.

X.2 Minimum Requirement

This subclause contains the reference to the subclause to the 3GPP reference (or core) specification which defines the Minimum Requirement.

X.3 Test Purpose

This subclause defines the purpose of the test.

X.4 Method of test

X.4.1 Initial conditions

This subclause defines the initial conditions for each test, including the test environment, the RF channels to be tested and the basic measurement set-up.

X.4.2 Procedure

This subclause describes the steps necessary to perform the test and provides further details of the test definition like point of access (e.g. test port), domain (e.g. frequency-span), range, weighting (e.g. bandwidth), and algorithms (e.g. averaging).

X.5 Test Requirement

This subclause defines the pass/fail criteria for the equipment under test. See subclause 4.1.2.5 Interpretation of measurement results.

4.9 Applicability of requirements

For BS that is E-UTRA (single-RAT) capable only, the requirements in the present document are applicable and additional conformance to TS 37.141 [18] is optional. For a BS additionally conforming to TS 37.141 [18], conformance to some of the RF requirements in the present document can be demonstrated through the corresponding requirements in TS 37.141 [18] as listed in Table 4.9-1

Table 4.9-1: Alternative RF test requirements for a BS additionally conforming to TS 37.141 [18]

RF requirement	Clause in the present document	Alternative clause in TS 37.141 [18]
Base station output power	6.2.5	6.2.1.5
Transmit ON/OFF power	6.4	6.4
Unwanted emissions		
Transmitter spurious emissions	6.6.4.5	6.6.1.5 (except for 6.6.1.5.3)
Operating band unwanted emissions	6.6.3.5.1, 6.6.3.5.2 (NOTE 1)	6.6.2.5 (except for 6.6.2.5.3 and 6.6.2.5.4)
Transmitter intermodulation	6.7.5	6.7.5.1
Narrowband blocking	7.5.5	7.4.5.2
Blocking	7.6.5.1	7.4.5.1
Out-of-band blocking	7.6.5.1	7.5.5.1
Co-location with other base stations	7.6.5.2	7.5.5.2
Receiver spurious emissions	7.7.5	7.6.5.1
Intermodulation	7.8.5	7.7.5.1
Narrowband intermodulation	7.8.5	7.7.5.2

NOTE 1: This does not apply when the lowest or highest carrier frequency is configured as 1.4 or 3 MHz carrier in bands of Band Category 1 or 3 according to clause 4.4 in TS 37.141 [18].

4.10 Test configuration for non-single carrier operations

4.10.1 General test configuration

The purpose of the general multi-carrier test configuration is to test all BS requirements excluding CA occupied bandwidth.

For test configurations used in receiver tests only the two outermost carriers within each supported operating band need to be generated by the test equipment.

4.10.1.1 Test configuration generation

The general test configuration should be constructed on a per band basis using the following method:

- Declared maximum supported RF bandwidth shall be used;
- Select the narrowest supported carrier and place it adjacent to the low edge of the RF bandwidth. Place a 5 MHz carrier adjacent to the high edge of the RF bandwidth.
- For transmitter tests, select as many 5 MHz carriers that the BS supports within a band and fit in the rest of the declared maximum supported RF bandwidth. Place the carriers adjacent to each other starting from the high RF bandwidth edge. The nominal carrier spacing defined in clause 5.7 shall apply;
- If 5 MHz carriers are not supported by the BS the narrowest supported channel BW shall be selected instead.

The test configuration should be constructed on a per band basis for all component carriers of the inter-band CA bands declared to be supported by the BS and are transmitted using the same antenna port. All configured component carriers are transmitted simultaneously in the tests where the transmitter should be on.

4.10.1.2 Test configuration power allocation

For a BS declared to support MC operation,

Set the power of each carrier to the same level so that the sum of the carrier powers equals the rated total output power according to the manufacturer's declaration in sub clause 4.6.8.

For a BS declared to support only CA operation,

Set the power spectral density of each carrier to the same level so that the sum of the carrier powers equals the rated total output power according to the manufacturer's declaration in sub clause 4.6.8.

4.10.2 CA specific test configuration

The test configuration in this clause is used to test CA occupied bandwidth.

4.10.2.1 Test configuration generation

The CA specific test configuration should be constructed on a per band basis using the following method:

- All CC combinations supported by the BS, which have different sum of channel bandwidth of CC, shall be tested. For all CC combinations which have the same sum of channel bandwidth of CC, only one of the CC combinations shall be tested.
- Of all CC combinations which have same sum of channel bandwidth of CC, select those with the narrowest carrier at the lower edge.
- Of the combinations selected in the previous step, select one with the narrowest carrier at the higher edge.
- If there are multiple combinations fulfilling previous steps, select the one with the smallest number of CC.
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the lowest carrier.
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the highest carrier
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the carrier which has been selected in the previous step.
- If there are multiple combinations fulfilling previous steps, repeat the previous step until there is only one combination left.
- The nominal carrier spacing defined in clause 5.7.1A shall apply.

4.10.2.2 Test configuration power allocation

Set the power spectral density of each carrier to be the same level so that the sum of the carrier powers equals the rated total output power for E-UTRA according to the manufacturer's declaration in sub clause 4.6.8.

5 Operating bands and channel arrangement

5.1 General

The channel arrangements presented in this clause are based on the operating bands and channel bandwidths defined in the present release of specifications.

NOTE: Other operating bands and channel bandwidths may be considered in future releases.

- 5.2 Void
- 5.3 Void
- 5.4 Void

5.5 Operating bands

E-UTRA is designed to operate in the operating bands defined in Table 5.5-1.

Table 5.5-1 E-UTRA operating bands

E-UTRA Operating Band	Uplink (UL) operating band BS receive UE transmit FuL_low - FuL_high			BS	trans rece		Duplex Mode
1	1920 MHz	_	1980 MHz	2110 MHz		2170 MHz	FDD
2	1850 MHz	_	1910 MHz	1930 MHz	_	1990 MHz	FDD
3	1710 MHz	_	1785 MHz	1805 MHz	_	1880 MHz	FDD
4	1710 MHz	_	1755 MHz	2110 MHz	_	2155 MHz	FDD
5	824 MHz	_	849 MHz	869 MHz	_	894MHz	FDD
6 ¹	830 MHz	_	840 MHz	875 MHz	_	885 MHz	FDD
7	2500 MHz	_	2570 MHz	2620 MHz	_	2690 MHz	FDD
8	880 MHz	_	915 MHz	925 MHz	_	960 MHz	FDD
9	1749.9 MHz	_	1784.9 MHz	1844.9 MHz	_	1879.9 MHz	FDD
10	1710 MHz	_	1770 MHz	2110 MHz	_	2170 MHz	FDD
11	1427.9 MHz	_	1447.9 MHz	1475.9 MHz	_	1495.9 MHz	FDD
12	699 MHz	_	716 MHz	729 MHz	_	746 MHz	FDD
13	777 MHz	_	787 MHz	746 MHz	_	756 MHz	FDD
14	788 MHz	_	798 MHz	758 MHz	_	768 MHz	FDD
15	Reserved		700 1111 12	Reserved		700 1711 12	FDD
16	Reserved			Reserved			FDD
17	704 MHz		716 MHz	734 MHz		746 MHz	FDD
18	815 MHz	_	830 MHz	860 MHz	_	875 MHz	FDD
19	830 MHz	_	845 MHz	875 MHz	_	890 MHz	FDD
20	832 MHz	_	862 MHz	791 MHz	_	821 MHz	FDD
21	1447.9 MHz	_	1462.9 MHz	1495.9 MHz	_	1510.9 MHz	FDD
22	3410 MHz	_	3490 MHz	3510 MHz	_	3590 MHz	FDD
23	2000 MHz	_	2020 MHz	2180 MHz	_	2200 MHz	FDD
24	1626.5 MHz	_	1660.5 MHz	1525 MHz	_	1559 MHz	FDD
25	1850 MHz	_	1915 MHz	1930 MHz	_	1995 MHz	FDD
33	1900 MHz	_	1920 MHz	1900 MHz	_	1920 MHz	TDD
34	2010 MHz	_	2025 MHz	2010 MHz	_	2025 MHz	TDD
35	1850 MHz	_	1910 MHz	1850 MHz	_	1910 MHz	TDD
36	1930 MHz	_	1990 MHz	1930 MHz	_	1990 MHz	TDD
37	1910 MHz	_	1930 MHz	1910 MHz	_	1930 MHz	TDD
38	2570 MHz	_	2620 MHz	2570 MHz	_	2620 MHz	TDD
39	1880 MHz	_	1920 MHz	1880 MHz	_	1920 MHz	TDD
40	2300 MHz	_	2400 MHz	2300 MHz	_	2400 MHz	TDD
41	2496 MHz	_	2690 MHz	2496 MHz	_	2690 MHz	TDD
42	3400 MHz	_	3600 MHz	3400 MHz	_	3600 MHz	TDD
43	3600 MHz	_	3800 MHz	3600 MHz	_	3800 MHz	TDD
	nd 6 is not applic	able					

E-UTRA is designed to operate for the carrier aggregation bands defined in Tables 5.5-2 to 5.5-3.

Table 5.5-2. Intra-band contiguous carrier aggregation bands

CA Band	E-UTRA operating band
CA_1	1
CA_40	40

Table 5.5-3. Inter-band carrier aggregation bands

CA Band	E-UTRA operating bands
CA_1-5	1
	5

5.6 Channel bandwidth

Requirements in present document are specified for the channel bandwidths listed in Table 5.6-1.

Table 5.6-1 Transmission bandwidth configuration $N_{\rm RB}$ in E-UTRA channel bandwidths

Channel bandwidth BW _{Channel} [MHz]	1.4	3	5	10	15	20
Transmission bandwidth configuration N _{RB}	6	15	25	50	75	100

Figure 5.6-1 shows the relation between the Channel bandwidth ($BW_{Channel}$) and the Transmission bandwidth configuration (N_{RB}). The channel edges are defined as the lowest and highest frequencies of the carrier separated by the channel bandwidth, i.e. at F_C +/- $BW_{Channel}$ /2.

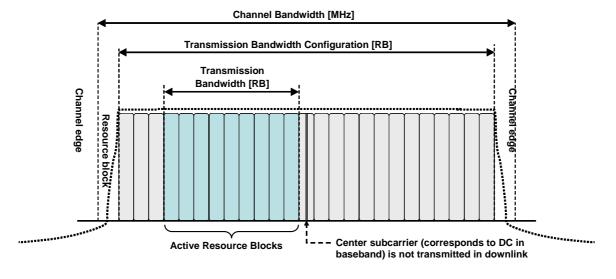


Figure 5.6-1 Definition of Channel Bandwidth and Transmission Bandwidth Configuration for one E-UTRA carrier.

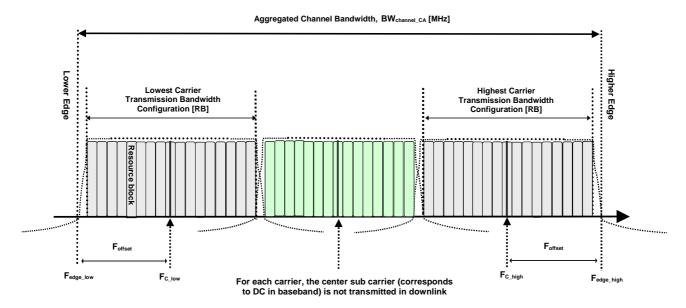


Figure 5.6-2 Definition of Aggregated Channel Bandwidth for intra-band contiguous carrier aggregation

The lower edge of the Aggregated Channel Bandwidth ($BW_{Channel_CA}$) is defined as $F_{edge_low} = F_{C_low} - F_{offset}$. The higher edge of the aggregated channel bandwidth is defined as $F_{edge_high} = F_{C_high} + F_{offset}$. The Aggregated Channel Bandwidth, $BW_{Channel_CA}$, is defined as follows:

$$BW_{Channel_CA} = F_{edge_high} - F_{edge_low} [MHz]$$

 F_{offset} is defined in Table 5.6-2 below where BW_{Channel} is defined in Table 5.6-1.

Table 5.6-2: Definition of Foffset

Channel Bandwidth of the Lowest or Highest Carrier: BW _{Channel} [MHz]	F _{offset} [MHz]
5, 10, 15, 20	BW _{Channel} /2

NOTE 1: F_{offset} is calculated separately for the Lower Edge and the Higher Edge of the Aggregated Channel Bandwidth.

NOTE 2: The values of BW_{Channel_CA} for UE and BS are the same if the lowest and the highest component carriers are identical.

5.7 Channel arrangement

5.7.1 Channel spacing

The spacing between carriers will depend on the deployment scenario, the size of the frequency block available and the channel bandwidths. The nominal channel spacing between two adjacent E-UTRA carriers is defined as following:

Nominal Channel spacing =
$$(BW_{Channel(1)} + BW_{Channel(2)})/2$$

where $BW_{Channel(1)}$ and $BW_{Channel(2)}$ are the channel bandwidths of the two respective E-UTRA carriers. The channel spacing can be adjusted to optimize performance in a particular deployment scenario.

5.7.1A CA Channel spacing

For intra-band contiguously aggregated carriers the channel spacing between adjacent component carriers shall be multiple of 300 kHz.

The nominal channel spacing between two adjacent aggregated E-UTRA carriers is defined as follows:

Nominal channel spacing =
$$\frac{BW_{Channel(1)} + BW_{Channel(2)} - 0.1 |BW_{Channel(1)} - BW_{Channel(2)}|}{0.6}$$

where $BW_{Channel(1)}$ and $BW_{Channel(2)}$ are the channel bandwidths of the two respective E-UTRA component carriers according to Table 5.6-1 with values in MHz. The channel spacing for intra-band contiguous carrier aggregation can be adjusted to any multiple of 300 kHz less than the nominal channel spacing to optimize performance in a particular deployment scenario.

5.7.2 Channel raster

The channel raster is 100 kHz for all bands, which means that the carrier centre frequency must be an integer multiple of 100 kHz.

5.7.3 Carrier frequency and EARFCN

The carrier frequency in the uplink and downlink is designated by the E-UTRA Absolute Radio Frequency Channel Number (EARFCN) in the range 0 - 65535. The relation between EARFCN and the carrier frequency in MHz for the downlink is given by the following equation, where F_{DL_low} and $N_{Offs-DL}$ are given in table 5.7.3-1 and N_{DL} is the downlink EARFCN.

$$F_{DL} = F_{DL_low} + 0.1(N_{DL} - N_{Offs-DL})$$

The relation between EARFCN and the carrier frequency in MHz for the uplink is given by the following equation where $F_{UL\ low}$ and $N_{Offs\text{-}UL}$ are given in table 5.7.3-1 and N_{UL} is the uplink EARFCN.

$$F_{UL} = F_{UL~low} + 0.1(N_{UL} - N_{Offs-UL})$$

Table 5.7.3-1: E-UTRA channel numbers

E-UTRA	Downlink			Uplink			
Operating Band	F _{DL_low} [MHz]	Noffs-DL	Range of N _{DL}	Ful_low [MHz]	Noffs-UL	Range of Nul	
1	2110	0	0 – 599	1920	18000	18000 - 18599	
2	1930	600	600 – 1199	1850	18600	18600 - 19199	
3	1805	1200	1200 – 1949	1710	19200	19200 - 19949	
4	2110	1950	1950 – 2399	1710	19950	19950 - 20399	
5	869	2400	2400 – 2649	824	20400	20400 - 20649	
6	875	2650	2650 – 2749	830	20650	20650 - 20749	
7	2620	2750	2750 – 3449	2500	20750	20750 - 21449	
8	925	3450	3450 - 3799	880	21450	21450 - 21799	
9	1844.9	3800	3800 – 4149	1749.9	21800	21800 - 22149	
10	2110	4150	4150 – 4749	1710	22150	22150 - 22749	
11	1475.9	4750	4750 – 4949	1427.9	22750	22750 - 22949	
12	729	5010	5010 – 5179	699	23010	23010 - 23179	
13	746	5180	5180 – 5279	777	23180	23180 - 23279	
14	758	5280	5280 - 5379	788	23280	23280 - 23379	
17	734	5730	5730 – 5849	704	23730	23730 - 23849	
18	860	5850	5850 - 5999	815	23850	23850 - 23999	
19	875	6000	6000 - 6149	830	24000	24000 - 24149	
20	791	6150	6150 - 6449	832	24150	24150 - 24449	
21	1495.9	6450	6450 – 6599	1447.9	24450	24450 - 24599	
22	3510	6600	6600-7399	3410	24600	24600-25399	
23	2180	7500	7500 – 7699	2000	25500	25500 - 25699	
24	1525	7700	7700 – 8039	1626.5	25700	25700 - 26039	
25	1930	8040	8040 - 8689	1850	26040	26040 - 26689	
33	1900	36000	36000 - 36199	1900	36000	36000 - 36199	
34	2010	36200	36200 - 36349	2010	36200	36200 - 36349	
35	1850	36350	36350 - 36949	1850	36350	36350 - 36949	
36	1930	36950	36950 - 37549	1930	36950	36950 - 37549	
37	1910	37550	37550 – 37749	1910	37550	37550 – 37749	
38	2570	37750	37750 – 38249	2570	37750	37750 - 38249	
39	1880	38250	38250 - 38649	1880	38250	38250 - 38649	
40	2300	38650	38650 - 39649	2300	38650	38650 - 39649	
41	2496	39650	39650 – 41589	2496	39650	39650 - 41589	
42	3400	41590	41590 – 43589	3400	41590	41590 – 43589	
43	3600	43590	43590 – 45589	3600	43590	43590 – 45589	

NOTE: The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.

6 Transmitter characteristics

6.1 General

General test conditions for transmitter tests are given in Clause 4, including interpretation of measurement results and configurations for testing. BS configurations for the tests are defined in Clause 4.5, while Annex H provides an informative description of E-UTRAN test cases.

6.1.1 E-UTRA Test Models

The set-up of physical channels for transmitter tests shall be according to one of the E-UTRA test models (E-TM) below. A reference to the applicable test model is made within each test.

The following general parameters are used by all E-UTRA test models:

- The test models are defined for a single antenna port (using p = 0); 1 code word (q = 0), 1 layer, precoding is not used
- Duration is 10 subframes (10 ms)
- Normal CP
- Virtual resource blocks of localized type, no intra-subframe hopping for PDSCH
- UE-specific reference signals are not used

Power settings of physical channels are defined by physical channel EPRE relative to the EPRE of the RS. The relative accuracy of the physical channel EPRE as referred to the EPRE of the RS shall have a tolerance of ± 0.5 dB.

For E-UTRA TDD, test models are derived based on the uplink/downlink configuration 3 and special subframe configuration 8 defined in TS36.211, i.e. as showing in the table 6.1.1-1. Number of frames for the test models is 2.

Table 6.1.1-1: Configurations of TDD eNB test models

Downlink-to- Uplink Switch-point	Number of UL/DL sub- frames per half frame (10 ms)		DwPTS	GP	UpPTS
periodicity	DL	UL			
10ms	6	3	$24144 \cdot T_{\rm s}$	$2192 \cdot T_{\rm s}$	$4384 \cdot T_{\rm s}$

6.1.1.1 E-UTRA Test Model 1.1 (E-TM1.1)

This model shall be used for tests on:

- · BS output power
- · Unwanted emissions
 - Occupied bandwidth
 - ACLR
 - Operating band unwanted emissions
 - · Transmitter spurious emissions
- Transmitter intermodulation
- RS absolute accuracy

Table 6.1.1.1-1: Physical channel parameters of E-TM1.1

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals	•		I.	JI		l.
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH	•		I.	JI		l.
PBCH EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH	•		I.	JI		I.
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E _{RS} [dB]	3.222	0	0	0	0	0
PHICH	•		I.	JI.	ı	l.
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH	1		<u> </u>		l.	l .
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E _{RS} [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH			•	•		•
# of QPSK PDSCH PRBs which are boosted	6	15	25	50	75	100
PRB $P_A = E_A/E_{RS}[dB]$	0	0	0	0	0	0
# of QPSK PDSCH PRBs which are de-boosted	0	0	0	0	0	0
PRB $P_A = E_A/E_{RS}[dB]$	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.

6.1.1.2 E-UTRA Test Model 1.2 (E-TM1.2)

This model shall be used for tests on:

- Unwanted emissions
 - ACLR
 - Operating band unwanted emissions

Table 6.1.1.2-1: Physical channel parameters of E-TM1.2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals						
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	-4.730	-4.730	-4.730	-4.730	-4.730
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH	•					
PBCH EPRE / E _{RS} [dB]	0.000	-4.730	-4.730	-4.730	-4.730	-4.730
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH	•					
# of symbols used for control channels	2	1	1	1	1	1

PCFICH EPRE / E _{RS} [dB]	3.222	0	0	0	0	0
PHICH	1		I.			l.
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH	1		I.	ı	ı	l.
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of dummy REGs added for padding	5	5	7	0	14	7
PDCCH REG EPRE / E _{RS} [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH			•			•
# of QPSK PDSCH PRBs which are boosted	2	6	10	20	30	40
PRB $P_A = E_A/E_{RS}[dB]$	3 (*)	3	3	3	3	3
# of QPSK PDSCH PRBs which are de-boosted	4	9	15	30	45	60
PRB $P_A = E_A/E_{RS}[dB]$	-2.990 (*)	-4.730	-4.730	-4.730	-4.730	-4.730

Note (*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB $P_A = E_A/E_{RS} = 0$ [dB]

Table 6.1.1.2-2: Numbers ($n_{\rm PRB}$) of the boosted PRBs (FDD)

	Subframe 0	Subframe 1	Subframe 2	Subframe 3	Subframe 4	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	N.A.	13	13	23	25	N.A.	02	0 5	25	15
3 MHz	0 1 2 11 12 13	0 4 10 11 12 13	0 3 5 6 11 13	0 1 4 5 7 12	02349 10	1 2 3 11 12 14	4 6 8 11 13 14	2 5 6 12 13 14	03478 11	1 3 4 5 11 12
5 MHz	0 1 3 6 7 8 16 18 20 21	0 1 4 5 9 10 12 17 18 24	0 1 2 12 13 14 19 20 23 24	0 5 8 12 13 15 17 20 21 24	0 4 6 7 12 13 15 16 22 23	0 1 2 3 8 16 18 21 22 24	1 3 5 7 9 10 12 15 21 22	0 1 2 3 7 10 14 18 20 21	1 4 8 9 10 12 15 16 18 20	1 2 3 5 6 9 10 13 16 17
10 MHz	1 2 7 8 9 10 11 16 20 31 32 33 35 36 39 40 42 46 47 48	5 6 7 9 11 15 20 21 22 24 25 27 34 35 36 37 40 44 46 49	3 5 11 12 14 17 18 19 20 22 26 27 28 29 31 34 38 41 42 49	1 2 3 5 8 14 16 22 23 26 28 30 32 34 38 41 42 45 46 47	0 3 6 7 8 9 10 12 13 16 18 21 23 31 33 41 42 45 46 47	0 2 3 4 5 7 9 10 11 12 15 19 20 28 29 30 31 34 36 48	0 1 4 6 8 9 10 16 17 19 20 21 24 29 30 31 35 37 38 47	2 3 4 5 6 9 10 12 16 17 19 22 24 25 26 30 34 37 42 48	7 9 14 15 16 21 22 28 30 31 32 34 35 41 42 43 44 46 48 49	11 13 16 17 18 21 24 27 28 29 30 32 37 38 40 42 45 47 48 49
15 MHz	0 1 2 3 5 7 8 9 12 18 19 20 21 23 24 25 29 30 31 32 33 42 47 48 49 63 65 68 71 73	0 1 3 4 5 6 7 11 18 20 21 24 26 30 31 38 46 47 49 50 51 53 54 57 60 67 68 70 73 74	2 11 12 15 18 21 22 24 25 26 29 32 33 34 42 45 46 47 50 51 52 54 58 59 60 64 68 70 72 74	2 3 4 7 9 11 12 15 17 20 24 27 33 34 35 39 42 43 45 46 48 56 59 60 62 67 70 71 73 74	4 5 6 8 13 17 22 25 27 29 31 32 33 34 35 41 44 46 48 50 52 56 59 60 64 67 69 70 71 74	0 2 3 4 7 8 18 20 23 24 25 27 29 42 43 45 47 49 50 54 56 60 62 65 66 67 70 71 72 73	2 11 14 15 18 25 26 28 30 31 32 33 36 37 38 39 41 43 45 50 53 54 58 59 62 65 67 68 70 71	3 4 7 12 19 23 24 26 27 28 30 33 34 35 41 42 49 53 54 58 59 60 61 62 65 67 69 70 71 73	0 3 8 9 10 13 14 15 17 18 19 22 23 24 25 26 27 32 37 39 47 50 53 56 61 63 69 71 73 74	0 3 7 8 11 13 14 16 18 23 25 30 32 35 44 46 47 48 53 55 57 59 61 62 64 67 68 69 70 71
20 MHz	0 6 10 13 15 16 20 23 25 28 29 30 31 32 33 39 41 42 44 45 54 56 57 63 66 67 68 76 77 79 82 84 85 88 92 94 95 97 98 99	1 3 7 9 10 13 19 20 21 22 23 25 26 27 30 33 34 35 36 47 49 50 51 53 55 57 60 61 64 68 76 77 80 83 84 86 87 89 95 99	1 2 3 6 8 10 11 15 16 17 19 21 25 26 28 29 32 35 39 41 42 43 44 51 52 54 60 64 69 76 79 81 84 86 88 89 90 93 94 99	5 7 9 10 12 15 16 21 23 24 27 28 29 30 33 34 35 36 39 47 49 54 55 56 57 64 66 70 72 76 77 80 81 86 87 90 91 92 98 99	2 3 4 5 6 7 14 17 19 21 22 24 26 37 42 44 47 49 51 56 57 62 63 65 67 70 71 73 76 77 81 83 85 86 87 89 94 95 97 99	1 2 5 6 8 9 12 13 21 22 25 26 28 32 35 39 40 43 45 46 57 59 61 62 64 66 68 71 73 77 78 84 85 86 93 94 95 96 97 99	0 1 2 3 5 8 9 10 12 22 25 26 27 29 31 32 33 36 38 39 43 45 49 53 55 59 62 63 64 71 72 73 75 77 78 81 84 89 97 98	0 1 3 4 5 7 11 18 19 20 21 26 27 29 30 31 33 35 39 40 41 43 44 46 47 50 53 55 56 62 64 66 67 69 70 72 74 92 93 98	2 3 4 7 11 13 15 16 24 25 27 29 35 36 40 43 44 45 46 51 52 55 56 57 63 64 65 68 71 77 78 81 82 83 84 85 86 90 94 98	0 4 7 8 10 11 16 18 22 26 29 32 35 37 43 44 46 47 48 49 53 54 57 59 60 61 64 66 67 69 70 76 78 81 84 87 89 91 95 96

Frame1 Subframe 0 Subframe 1 Subframe 5 Subframe 6 Subframe 8 Subframe 9 Subframe 7 1.4 MHz N.A 03 3 MHz 0 1 3 11 12 14 1 2 3 11 12 14 0 1 2 3 1113 1 3 11 12 13 1 4 8 10 11 12 16891112 023456 14 5 MHz 1 2 5 8 17 18 1356717 0345817 2367817 1 2 11 13 15 12456789 13481012 19 21 23 24 19 20 23 24 18 19 21 22 18 19 20 24 17 18 19 20 10 12 16 19 20 22 21 3 4 5 6 10 11 24671011 1367911 24678910 2 4 7 12 14 16 25891112 1 4 7 11 12 13 10 MHz 13 17 18 19 14 15 17 18 12 14 16 18 13 14 16 19 20 21 24 26 13 16 18 21 14 15 20 21 28 29 34 41 19 28 29 30 30 34 35 36 20 21 29 32 34 35 37 38 22 23 27 29 27 31 34 37 41 42 46 47 30 31 32 33 35 37 38 39 37 39 40 41 34 39 41 44 43 44 45 46 38 41 42 46 48 49 43 44 43 48 45 47 48 46 47 48 49 15 MHz 35691013 1578910 3467910 3 4 7 8 12 13 26891011 0 2 7 11 13 17 12378910 11 13 14 15 15 17 20 23 14 16 18 19 19 20 23 27 11 13 15 19 13 16 18 19 12 13 17 19 25 26 27 28 21 24 26 42 16 20 22 24 20 22 24 27 21 22 26 30 28 31 39 40 21 22 23 24 29 33 44 45 45 46 51 52 25 28 31 32 28 30 32 41 31 41 45 46 41 43 45 46 28 30 32 37 33 43 49 52 42 43 44 46 47 48 51 55 40 41 46 48 51 53 56 57 53 55 56 57 47 48 51 55 58 61 63 66 58 59 60 61 55 58 61 62 49 50 51 65 57 58 62 63 57 58 63 65 53 56 58 61 70 71 73 74 62 64 65 72 66 67 70 73 67 68 69 71 64 69 73 74 66 70 71 73 65 69 73 45678910 20 MHz 24781213 4 5 9 11 13 14 0.3.10.13.14 2 3 4 10 11 12 4 9 12 13 17 23891011 14 18 20 21 11 12 14 17 16 19 22 24 12 14 15 17 17 23 25 27 15 18 21 22 19 20 21 22 23 27 28 31 19 20 22 25 25 27 29 32 18 22 24 26 28 30 31 36 23 26 30 31 29 31 36 37 34 35 37 38 27 28 29 32 33 37 40 42 28 30 35 36 37 38 40 41 32 36 37 39 39 40 41 42 33 37 38 41 43 45 46 53 40 41 42 43 46 48 49 54 39 44 46 53 40 41 42 53 43 49 50 54 56 58 60 68 43 53 58 61 54 57 58 62 55 60 61 62 55 57 58 60 48 50 53 54 56 57 60 64 70 71 74 75 65 69 70 73 66 67 68 69 63 64 65 68 61 63 64 70 56 58 61 64 66 73 74 75 66 71 72 77 76 78 82 85 74 76 77 81 80 83 86 87 74 78 79 80 83 86 88 89 74 77 82 84 87 88 93 95 82 83 86 90 90 91 92 93 85 87 93 97 84 85 87 88 81 82 89 92 89 90 92 94

98 99

94 95 98

98 99

96 98 99

Table 6.1.1.2-3: Numbers (n_{PRB}) of the boosted PRBs (TDD)

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	N.A.	N.A.	N.A.	N.A	4 5	1 2	13
3 MHz	0 1 2 11 12 13	0 1 2 3 13 14	0 1 2 3 12 14	0 1 2 3 11 13	0 3 4 6 10 12	269111314	15791314
5 MHz	1 2 3 8 17 20	12456716	1 2 4 6 8 16	0356717	2 3 8 10 13 15	0 4 6 7 13 14	0 2 5 9 14 18
	21 22 23 24	17 22 23	18 21 23 24	19 20 21 24	16 21 23 24	15 16 19 24	19 21 22 23
10 MHz	1 4 5 6 8 11	0 1 7 15 18 19	12568911	6 7 10 11 15	2 4 10 11 18	689101114	2578914
	12 13 15 17	20 21 29 30	13 14 15 16	18 19 20 21	20 23 24 28	15 16 18 19	16 18 23 30
	20 28 30 31	32 34 35 37	18 20 30 32	28 29 33 35	30 32 37 40	20 21 23 24	32 33 34 37
	32 42 43 46	38 40 42 43	33 40 41 46	36 38 40 41	41 43 44 45	27 28 36 37	41 42 44 45
	48 49	44 47	49	43 44 49	46 47 48	47 49	46 49
15 MHz	3 7 10 11 15	8 9 11 12 14	1 3 9 11 13 17	0 2 4 6 10 11	0135911	0 4 5 8 9 10	1 5 8 9 10 13
	16 17 23 27	15 17 22 23	21 22 23 24	13 14 15 16	14 15 16 19	12 13 15 20	14 15 20 21
	29 30 31 32	24 27 28 29	25 28 29 46	17 20 22 23	24 25 26 27	22 30 32 33	23 26 27 28
	42 43 48 49	31 41 42 45	48 49 51 52	28 29 43 44	28 31 33 34	35 37 38 42	29 32 33 34
	50 53 54 57	48 51 54 55	53 54 55 57	46 47 51 53	38 40 42 43	44 45 46 47	39 43 44 57
	60 62 64 65	56 62 63 67	61 64 65 67	54 56 59 61	46 48 50 52	48 51 52 55	60 62 64 65
	66 67 69 72	68 70 71 73	68 72 73 74	63 69 71 72	59 61 67 74	59 60 66 69	69 71 72 73
	74	74					
20 MHz	1 4 10 14 15	0 1 3 5 8 12	02456711	0246711	3567916	1 4 7 10 13 18	0123578
	17 18 19 23	14 15 17 19	12 13 14 16	12 13 17 18	20 21 23 24	19 25 26 27	10 11 15 19
	29 30 31 32	20 22 23 25	19 20 21 27	19 20 27 28	25 26 31 32	28 30 32 35	20 21 24 26
	33 37 38 39	26 28 29 30	30 32 33 35	31 35 37 38	35 37 41 42	37 38 41 46	28 31 32 33
	42 46 55 61	37 38 39 45	37 41 44 46	40 43 45 56	43 44 46 48	47 50 51 52	34 44 45 54
	64 65 66 68	58 59 62 63	53 56 58 60	57 59 63 68	51 54 59 60	53 54 57 60	58 59 61 63
	69 70 72 73	68 71 72 75	61 62 64 65	70 71 77 79	61 62 64 67	62 70 71 73	65 67 69 70
	76 82 83 84	78 82 84 85	67 68 70 73	80 82 85 87	76 77 78 79	78 79 81 83	77 85 88 89
	86 89 90 93	91 92 93 94	79 82 90 92	89 92 95 96	82 84 86 87	84 87 91 95	90 92 94 98
	95 97 99	96 98	98	97 98	88 95	98 99	99

6.1.1.3 E-UTRA Test Model 2 (E-TM2)

This model shall be used for tests on:

97 99

97

95 97

- Total power dynamic range (lower OFDM symbol power limit at min power),
 - EVM of single 64QAM PRB allocation (at min power)

• Frequency error (at min power)

Table 6.1.1.3-1: Physical channel parameters of E-TM2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals	•		•	•	•	•
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH	•		<u> </u>		l.	l
PBCH EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH	•		<u> </u>		l.	l
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E _{RS} [dB]	0	0	0	0	0	0
PHICH	•		<u> </u>		l.	l
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH			•	•		
# of available REGs	23	23	43	90	140	187
# of PDCCH	1	1	1	1	1	1
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	9	9	18	18	18	18
# of <nil> REGs added for padding</nil>	14	14	25	72	122	169
PDCCH REG EPRE / E _{RS} [dB]	0	0	0	0	0	0
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH	•		l.	I.	ı	
# of 64QAM PDSCH PRBs within a slot for which EVM is measured	1	1	1	1	1	1
PRB $P_A = E_A/E_{RS}[dB]$	0	0	0	0	0	0
# of PDSCH PRBs which are not allocated	5	14	24	49	74	99
PRB $P_A = E_A/E_{RS}[dB]$	-inf	-inf	-inf	-inf	-inf	-inf

Table 6.1.1.3-2: Numbers (n_{PRB}) of the allocated PRB (64QAM) (FDD)

	Subframe 0	Subframe 1	Subframe 2	Subframe 3	Subframe 4	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	4	1	1	2	5	3	0	0	5	4
3 MHz	13	11	13	5	9	14	6	13	0	1
5 MHz	8	17	21	8	22	2	9	14	0	13
10 MHz	16	36	19	26	42	30	17	48	9	0
15 MHz	32	46	18	72	22	4	31	58	27	3
20 MHz	63	34	44	7	94	2	97	19	56	32

Table 6.1.1.3-3: Numbers (n_{PRB}) of the allocated PRB (64QAM) (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9

1.4 MHz	4	5	5	2	0	0	3
3 MHz	10	14	12	5	0	1	7
5 MHz	17	24	21	8	1	2	12
10 MHz	35	49	42	17	2	4	25
15 MHz	53	74	63	26	3	6	38
20 MHz	71	99	85	35	4	8	51

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	4	5	2	1	3	1	4
3 MHz	11	14	5	3	8	3	11
5 MHz	18	23	8	5	13	5	19
10 MHz	37	46	17	10	26	11	38
15 MHz	56	70	25	15	40	17	57
20 MHz	75	93	34	20	53	23	76

6.1.1.4 E-UTRA Test Model 3.1 (E-TM3.1)

This model shall be used for tests on:

- Output power dynamics
 - Total power dynamic range (upper OFDM symbol power limit at max power with all 64QAM PRBs allocated)
- Transmitted signal quality
 - Frequency error
 - EVM for 64QAM modulation (at max power)

Table 6.1.1.4-1: Physical channel parameters of E-TM3.1

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals		•	•	•	•	•
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH	I	<u> </u>			<u> </u>	l .
PBCH EPRE / E _{RS} [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH		I.	J.		I.	l.
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E _{RS} [dB]	3.222	0	0	0	0	0
PHICH	-	•	•	•	•	•
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH	-	•	•	•	•	•
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E _{RS} [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf

PDSCH						
# of 64QAM PDSCH PRBs within a slot for which EVM is measured	6	15	25	50	75	100
$PRB P_A = E_A / E_{RS} [dB]$	0	0	0	0	0	0
# of PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	0	0	0	0	0	0
$PRB P_A = E_A/E_{RS}[dB]$	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.

6.1.1.5 E-UTRA Test Model 3.2 (E-TM3.2)

This model shall be used for tests on:

- Transmitted signal quality
 - Frequency error
 - EVM for 16QAM modulation

Table 6.1.1.5-1: Physical channel parameters of E-TM3.2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals	•			1		•
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	1.573	2.426	2.426	3.005	2.426
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH		I	l	· L	l.	l .
PBCH EPRE / E _{RS} [dB]	0.000	1.573	2.426	2.426	3.005	2.426
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH	1		l		l.	l .
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E _{RS} [dB]	3.222	0	0	0	0	0
PHICH		I	l	· L	l.	l .
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH	1		l		l.	l .
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / ERS [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH	1		l .	I.	ı	l.
# of 16QAM PDSCH PRBs within a slot for which EVM is measured	4	7	15	30	50	60
PRB $P_A = E_A/E_{RS}[dB]$	-3 (*)	-3	-3	-3	-3	-3
# of QPSK PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	2	8	10	20	25	40
PRB $P_A = E_A/E_{RS}[dB]$	3.005 (*)	1.573	2.426	2.426	3.005	2.426

Note (*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB $P_A = E_A/E_{RS} = 0$ [dB]

Table 6.1.1.5-2: Numbers (n_{PRB}) of the 16QAM PRBs (FDD)

	Subframe 0	Subframe 1	Subframe 2	Subframe 3	Subframe 4	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	1345	1235	0134	1235	0235	0124	0125	0245	1235	0135
3 MHz	0 1 2 3 11 12 13	0 3 4 10 11 12 13	0 2 3 5 6 11 13	0 1 4 5 7 10 12	0 2 3 4 9 10 13	0 1 2 3 11 12 14	4 5 6 8 11 13 14	2 5 6 9 12 13 14	03478 911	1 2 3 4 5 11 12
5 MHz	0 1 3 4 6 7 8 16 17 18 19 20 21 23 24	0 1 2 3 4 5 6 9 10 12 13 17 18 20 24	0 1 2 3 7 8 9 10 12 13 14 19 20 23 24	0 5 6 8 10 11 12 13 15 17 18 20 21 22 24	0 1 2 4 6 7 12 13 14 15 16 17 22 23 24	0 1 2 3 4 6 7 8 16 17 18 21 22 23 24	1 3 4 5 7 9 10 11 12 13 14 15 21 22 24	0 1 2 3 4 7 8 10 13 14 18 19 20 21 24	1 4 8 9 10 11 12 13 15 16 18 20 22 23 24	1 2 3 4 5 6 9 10 11 12 13 16 17 21 23
10 MHz	1 2 3 4 5 6 7 8 9 10 11 15 16 17 20 21 28 30 31 32 33 35 36 39 40 42 44 46 47 48	0 1 2 4 5 6 7 9 10 11 13 15 18 20 21 22 24 25 27 28 29 34 35 36 37 40 43 44 46 49	0 1 3 4 5 6 7 11 12 14 17 18 19 20 21 22 24 25 26 27 28 29 31 32 34 38 41 42 45 49	0 1 2 3 5 6 8 12 14 15 16 17 18 22 23 26 28 29 30 32 34 35 38 39 40 41 42 45 46 47	0 3 6 7 8 9 10 12 13 15 16 17 18 21 23 25 28 31 33 37 38 39 41 42 44 45 46 47 48	0 2 3 4 5 7 9 10 11 12 13 14 15 19 20 28 29 30 31 34 36 37 38 39 40 42 44 45 48 49	0 1 3 4 5 6 8 9 10 13 14 16 17 18 19 20 21 23 24 29 30 31 32 35 37 38 39 40 47 48	0 1 2 3 4 5 6 7 9 10 12 14 16 17 18 19 22 24 25 26 27 28 30 31 32 34 37 42 45 48	2 5 7 8 9 10 11 14 15 16 17 21 22 27 28 29 30 31 32 34 35 37 38 41 42 43 44 46 48 49	1 3 6 9 11 13 15 16 17 18 21 24 25 26 27 28 29 30 32 34 37 38 39 40 41 42 45 47 48 49
15 MHz	0 1 2 3 5 6 7 8 9 12 14 16 17 18 19 20 21 23 24 25 26 28 29 30 31 32 33 41 42 45 47 48 49 50 52 53 56 57 60 62 63 64 65 67 68 69 70 71 72 73	0 1 2 3 4 5 6 7 8 11 18 20 21 24 25 26 27 29 30 31 33 36 37 38 39 40 43 45 46 47 48 49 50 51 53 54 55 57 58 59 60 61 65 67 68 69 70 71 73 74	1 2 3 4 9 11 12 13 14 15 17 18 20 21 22 24 25 26 28 29 31 32 33 34 40 42 43 44 45 46 47 48 50 51 52 54 56 58 59 60 61 62 63 64 68 70 71 72 73 74	2 3 4 6 7 9 11 12 14 15 17 18 20 22 24 25 27 28 29 30 31 33 34 35 38 39 40 42 43 45 46 47 48 49 55 56 59 60 61 62 63 65 66 67 68 69 70 71 73 74	2 4 5 6 8 10 13 15 16 17 18 20 22 24 25 26 27 28 29 30 31 32 33 34 35 38 40 41 44 45 46 47 48 50 51 52 53 54 56 59 60 63 64 67 69 70 71 72 73 74	0 2 3 4 5 7 8 11 12 14 16 18 20 22 23 24 25 27 28 29 30 31 33 42 43 45 46 47 48 49 50 51 53 54 56 58 60 61 62 63 64 65 66 67 68 69 70 71 72 73	0 1 2 3 9 11 12 14 15 17 18 20 23 25 26 28 29 30 31 32 33 36 37 38 39 41 42 43 45 46 50 52 53 54 57 58 59 60 61 62 63 64 65 67 68 70 71 72 73 74	0 1 3 4 5 6 7 8 11 12 14 19 20 21 23 24 26 27 28 30 31 33 34 35 38 40 41 42 44 45 46 49 51 52 53 54 55 58 59 60 61 62 63 65 67 69 70 71 72 73	0 1 2 3 7 8 9 10 12 13 14 15 17 18 19 21 22 23 24 25 26 27 28 29 32 33 34 36 37 39 40 43 46 47 48 49 50 53 54 56 61 62 63 66 68 69 71 72 73 74	0 1 3 7 8 11 13 14 16 18 19 20 21 22 23 25 27 28 29 30 32 34 35 36 40 41 42 43 44 45 46 47 48 50 51 53 54 55 57 59 61 62 63 64 66 67 68 69 70 71
20 MHz	0 1 4 6 7 8 9 10 11 13 14 15 16 20 21 22 23 25 26 28 29 30 31 32 33 34 36 39 41 42 44 45 54 56 57 58 60 61 63 66 67 68 72 75 76 77 79 81 82 84 85 87 88 91 92 94 95 97 98 99	1 3 5 6 7 9 10 13 17 19 20 21 22 23 24 25 26 27 28 30 32 33 34 35 36 39 41 47 48 49 50 51 53 54 55 57 58 59 60 61 64 65 67 68 75 76 77 79 80 81 83 84 86 87 89 90 91 93 95	0 1 2 3 6 8 10 11 15 16 17 19 21 22 23 25 26 28 29 30 32 33 35 38 39 40 41 42 43 44 46 49 51 52 53 54 57 59 60 62 63 64 65 67 69 71 72 73 76 79 81 84 86 88 89 90 92 93 94 99	5 6 7 9 10 12 14 15 16 17 21 22 23 24 27 28 29 30 31 33 34 35 36 37 39 41 44 45 47 49 50 53 54 55 56 57 59 64 65 66 68 70 72 75 76 77 80 81 84 85 86 87 90 91 92 94 95 97 98 99	0 2 3 4 5 6 7 11 12 14 15 17 19 21 22 24 26 32 36 37 40 42 43 44 47 48 49 50 51 54 56 57 60 62 63 65 66 67 70 71 73 76 77 78 79 81 82 83 84 85 86 87 89 91 94 95 96 97 98 99	1 2 5 6 8 9 11 12 13 15 21 22 25 26 27 28 29 30 31 32 34 35 38 39 40 41 43 44 45 46 53 57 58 59 61 62 63 64 65 66 68 69 71 72 73 75 77 78 80 82 83 84 85 86 93 94 95 96 97	0 1 2 3 5 8 9 10 12 13 14 16 22 25 26 27 28 29 31 32 33 34 36 37 38 39 43 44 45 46 48 49 52 53 55 59 61 62 63 64 70 71 72 73 74 75 77 78 80 81 82 84 86 89 90 91 93 97 98 99	0 1 3 4 5 7 8 10 11 15 18 19 20 21 26 27 29 30 31 33 35 37 38 39 40 41 43 44 45 46 47 48 49 50 52 53 55 56 58 60 62 64 65 66 67 69 70 71 72 73 74 81 83 84 86 92 93 94 96 98	2 3 4 5 7 9 11 13 15 16 17 21 23 24 25 27 28 29 31 33 35 36 40 42 43 44 45 46 48 49 51 52 53 54 55 56 57 59 61 63 64 65 68 71 76 77 78 81 82 83 84 85 86 87 90 91 93 94 98	0 3 4 6 7 8 10 11 13 16 18 21 22 23 25 26 28 29 32 35 36 37 38 43 44 46 47 48 49 53 54 57 58 59 60 61 64 66 67 68 69 70 72 76 77 78 80 81 82 83 84 86 87 88 89 91 92 94 95

Table 6.1.1.5-3: Numbers ($n_{\rm PRB}$) of the 16QAM PRBs (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	0 3 4 5	1 2 3 4	0 1 2 4	0 1 3 4	0245	2345	1 2 4 5
3 MHz	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	1 2 7 8 10 13	2346813	0368910
	14	13	14	13	14	14	14
5 MHz	12345678	02345678	12345678	12345678	1246789	02356710	0234678
	17 18 19 20	17 18 19 20	16 17 18 19	16 17 20 21	11 14 15 16	13 15 16 17	13 14 15 16
	21 23 24	21 22 24	20 21 22	22 23 24	18 21 23 24	19 20 21 24	19 21 23 24
10 MHz	1234679	23456789	2456789	14567811	0125678	24567910	25678910
	10 11 13 14	10 11 12 13	11 12 13 14	12 13 14 15	11 13 14 15	11 15 18 19	11 14 15 16
	15 17 18 19	14 16 17 18	16 18 20 21	17 19 20 21	16 18 20 21	20 21 24 25	18 19 20 21

	28 29 30 34	19 21 30 32	28 29 30 31	28 29 30 31	24 25 27 30	26 28 29 30	23 27 28 30
	35 37 38 39	34 35 36 37	32 33 34 41	32 34 37 38	32 34 35 37	32 33 35 36	32 33 34 37
	41 42 44 46	39 40 41 43	43 44 45 46	41 42 44 46	38 40 41 43	38 40 41 43	41 42 44 45
	47 48 49	45 48	47 48 49	47 48 49	46 47 49	44 48 49	46 47 49
15 MHz	13456789	2346789	01236789	37891011	0123469	0134589	1345789
	10 11 13 15	10 11 12 13	10 11 12 13	12 13 14 15	10 11 13 14	10 11 12 13	10 12 13 14
	16 17 19 20	14 15 16 18	16 17 18 19	16 17 22 23	15 16 17 20	14 15 16 19	15 16 17 19
	21 22 23 24	19 20 22 24	20 21 22 23	24 27 28 29	21 22 23 24	20 22 24 25	20 21 23 26
	25 26 27 28	25 27 28 30	24 26 27 28	30 31 32 41	25 28 29 34	26 27 28 31	27 28 29 30
	29 33 42 44	31 32 41 42	30 31 32 41	42 43 45 46	37 43 44 46	32 33 34 35	31 32 33 34
	45 46 51 52	43 44 45 46	43 45 46 47	48 49 50 53	47 48 49 51	36 37 38 40	36 37 38 39
	53 55 56 57	48 49 50 51	48 51 53 55	54 55 56 57	52 53 54 55	42 43 44 45	42 43 44 45
	58 59 60 61	52 55 58 61	56 57 58 61	58 60 61 62	57 59 61 62	46 47 48 50	46 52 53 57
	62 63 64 65	62 63 65 66	62 63 64 65	63 64 65 66	63 64 65 67	51 52 55 56	58 59 60 62
	66 70 71 72	67 68 69 70	66 69 70 71	67 68 69 70	68 69 70 71	59 60 61 66	63 64 65 69
	73 74	71 73 74	73 74	71 72 73 74	72 73 74	67 69 74	71 72 73
20 MHz	2456789	2458910	0234910	1 4 9 10 12 13	0134578	02456711	1345679
	10 11 12 13	11 12 13 14	11 12 13 14	14 15 17 18	12 13 14 15	12 13 14 16	10 13 16 18
	14 17 18 19	16 17 18 19	15 17 18 21	19 20 21 22	17 19 20 22	17 18 19 20	20 21 24 25
	20 21 22 23	22 24 25 26	22 23 24 25	23 29 30 31	23 25 26 28	21 23 27 28	26 27 28 30
	25 27 28 29	27 29 30 32	26 27 28 30	32 33 36 37	30 31 33 35	30 31 32 35	31 32 35 37
	31 32 33 34	33 36 37 38	31 32 35 36	39 40 41 42	37 38 39 41	37 38 40 43	38 41 42 43
	35 37 38 39	40 41 42 43	37 38 40 41	43 46 53 54	45 48 49 50	44 45 46 47	44 46 47 48
	43 44 46 53	45 46 53 54	42 43 53 54	55 56 57 58	51 58 59 62	50 51 53 56	50 51 52 53
	56 58 60 61	55 57 58 60	55 57 60 61	60 61 64 66	63 65 67 68	57 58 59 60	54 57 59 60
	68 69 70 71	62 64 65 66	63 64 65 66	68 69 71 72	69 70 71 72	61 62 63 64	61 62 64 67
	73 74 75 76	67 68 69 74	68 70 74 76	73 74 75 80	73 75 76 78	65 68 70 71	70 71 73 76
	78 79 80 82	78 82 83 84	77 81 82 84	82 83 84 86	82 84 85 86	73 77 79 80	77 78 79 81
	83 85 86 87	86 88 89 90	85 87 88 89	87 89 90 92	89 90 91 92	82 85 87 89	82 84 86 87
	88 93 95 97	91 92 93 95	93 94 95 97	93 94 95 96	93 94 96 97	92 95 96 97	88 91 95 98
	99	97 99	98 99	98 99	98	98	99

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	0 2 4 5	1 2 4 5	0 1 3 4	0 2 3 5	0124	1234	1235
3 MHz	0 1 2 3 12 13	0 1 2 3 11 12	1 2 3 11 12 13	0 1 2 11 12 13	2478910	0 1 3 4 5 13	0468911
	14	13	14	14	11	14	12
5 MHz	0234567	01234578	1234578	0134578	01367912	2345679	01345810
	16 17 18 19	16 17 18 19	16 17 18 20	16 17 18 19	14 17 18 20	11 12 14 15	11 12 14 16
	20 21 22 23	20 23 24	21 22 23 24	20 21 22 24	21 22 23 24	17 18 21 24	17 20 22 24
10 MHz	0126789	02346789	01235678	12345689	1 2 3 5 6 13	0125912	01234578
	11 13 14 15	10 11 12 15	9 10 13 14 15	10 11 12 13	14 15 16 17	13 14 16 17	9 10 12 13 14
	16 19 29 30	16 17 18 19	16 18 20 21	15 16 17 18	19 20 23 25	18 22 25 26	15 16 18 22
	32 34 35 36	20 29 31 33	28 29 30 31	19 21 30 35	26 27 29 30	27 28 29 30	27 28 29 30
	37 38 39 41	34 35 36 37	32 34 35 39	38 39 40 41	31 32 33 35	31 33 35 36	31 32 33 34
	42 43 44 45	42 45 46 47	40 41 42 44	42 43 46 47	38 39 40 41	38 39 41 42	42 43 45 46
	47 48 49	48 49	46	48 49	43 44 47 49	44 45 47 49	49
15 MHz	01234567	12345678	01245678	01234567	1345679	13467810	01256710
	8 10 11 14 15	9 10 11 13 14	9 10 11 12 13	8 9 10 11 13	10 11 12 14	11 13 14 15	11 12 16 17
	16 18 19 20	15 16 18 20	14 15 16 18	14 15 16 17	15 16 17 18	21 22 23 24	18 19 22 23
	21 23 24 25	21 22 23 27	20 22 24 25	18 19 21 23	19 20 21 22	26 27 28 29	25 27 28 29
	26 27 28 31	28 29 30 33	26 29 32 33	24 26 29 30	24 26 29 30	30 31 32 35	30 31 33 34
	32 33 41 43	42 43 45 46	44 45 46 49	33 41 42 45	32 33 34 35	39 40 43 44	35 36 37 39
	44 45 46 47	47 49 50 51	50 51 52 55	46 47 49 50 51 53 54 55	36 38 39 41 42 44 45 47	45 46 47 48 49 50 51 52	40 43 45 46 47 48 49 50
	48 50 52 53 55 57 58 59	54 55 56 58 59 60 61 64	56 57 58 59 60 61 63 64	56 57 58 60	48 49 50 52	53 54 55 56	52 54 55 56
	61 63 65 66	65 66 68 69	65 66 68 69	62 63 66 67	55 56 57 61	57 58 59 60	58 61 62 63
	67 68 69 71	70 71 72 73	70 71 72 73	69 71 72 73	62 63 69 70	63 64 65 66	64 66 67 68
	74	74	74	74	71 73 74	68 71 74	69 71 73
20 MHz	01234578	02347810	0124567	01234678	0124689	0123789	3467910
20 1111 12	9 10 11 15 17	11 12 13 14	10 11 12 13	9 12 13 15 16	10 11 14 15	13 15 16 21	11 12 13 14
	19 20 21 24	15 16 17 18	14 15 16 18	18 19 20 22	18 19 20 21	23 24 25 29	15 17 19 22
	26 27 28 29	19 20 22 24	19 20 21 23	24 25 27 28	25 29 31 32	30 31 33 34	23 25 26 27
	31 32 33 34	25 27 30 35	24 25 29 32	29 30 32 35	34 36 37 38	36 37 38 39	33 34 37 39
	36 37 44 45	37 39 41 42	33 34 40 42	39 40 42 43	40 41 42 47	40 41 42 44	40 41 43 45
	54 56 57 58	44 53 56 57	43 44 45 46	44 57 59 60	52 53 54 57	45 46 47 48	46 47 48 49
	59 60 61 63	59 61 62 63	53 54 55 57	61 63 64 65	58 59 60 62	49 52 53 57	50 53 55 56
	65 67 68 69	66 67 69 70	59 60 61 62	66 67 68 69	63 64 65 67	60 62 63 64	58 60 61 62
	70 73 77 79	73 74 75 76	63 67 68 71	70 72 73 74	68 69 70 71	65 66 69 72	63 65 69 71
	83 85 86 87	77 78 79 80	72 73 75 77	75 76 81 82	73 74 75 76	73 74 75 77	72 73 74 76
	88 89 90 91	81 82 84 85	81 82 84 85	83 84 88 89	77 78 79 80	81 82 83 84	77 78 79 80
	92 93 94 95	86 88 89 90	87 91 92 93	90 92 94 95	84 85 86 87	86 88 89 90	82 83 85 87
	96 98 99	91 92 94 96	95 96 97 98	97 98 99	88 90 92 95	91 92 93 95	91 92 94 95
		98	99		99	97	96 99

6.1.1.6 E-UTRA Test Model 3.3 (E-TM3.3)

This model shall be used for tests on:

- Transmitted signal quality
 - Frequency error
 - EVM for QPSK modulation

Table 6.1.1.6-1: Physical channel parameters of E-TM3.3

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals						
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E _{RS} [dB]	0.000	2.189	2.580	2.427	2.477	2.427
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH		I	<u> </u>			I
PBCH EPRE / E _{RS} [dB]	0.000	2.189	2.580	2.427	2.477	2.427
Reserved EPRE / E _{RS} [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH		I	<u> </u>			I
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E _{RS} [dB]	3.222	0	0	0	0	0
PHICH			•	•	•	
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E _{RS} [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E _{RS} [dB]	0	0	0	0	0	0
PDCCH			•	•	•	
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E _{RS} [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E_{RS} [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH						
# of QPSK PDSCH PRBs within a slot for which EVM is measured	3	7	13	25	38	50
PRB $P_A = E_A/E_{RS}[dB]$	-6 (*)	-6	-6	-6	-6	-6
# of 16QAM PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	3	8	12	25	37	50
PRB $P_A = E_A/E_{RS}[dB]$	2.427 (*)	2.189	2.580	2.427	2.477	2.427

Note (*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB $P_A = E_A/E_{RS} = 0$ [dB]

Table 6.1.1.6-2: Numbers ($n_{\rm PRB}$) of the QPSK PRBs (FDD)

	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe
	0	1	2	3	4	5	6	7	8	9
1.4 MHz	235	123	013	123	235	125	025	025	125	135
3	0 1 2 3	0 3 4 10	02356	0 1 4 5 7	0 2 3 4 9	0 1 2 3	4 5 6 8	2569	03478	1 2 3 4 5
MHz	11 12 13	11 12 13	1113	10 12	10 13	11 12 14	11 13 14	121314	911	11 12

						1				
5	01367	01245	01239	0568	02467	01234	13457	01234	1489	12345
MHz	8 16 17	6 9 10 12	10 12 13	10 12 13	12 13 15	67816	9 10 11	7 10 14	10 11 12	6 9 10 11
	18 20 21	17 18 20	14 19 20	15 17 18	16 17 22	18 21 22	12 15 21	18 19 20	13 15 16	13 16 17
	23 24	24	23 24	20 21 24	23 24	24	22 24	21 24	18 20 23	23
10	12356	12456	0356	01235	03678	02345	01456	02345	5789	3 9 11 13
MHz	78910	7 9 11 15	11 12 14	6 8 14 16	9 10 12	7 9 10 11	8 9 10 13	67910	14 15 16	16 17 18
	11 15 16	18 20 21	17 18 19	18 22 23	13 16 17	12 13 15	16 17 18	12 16 17	21 22 27	21 24 27
	20 28 31	22 24 25	20 21 22	26 28 30	18 21 23	19 20 28	19 20 21	18 19 22	28 30 31	28 29 30
	32 33 35	27 29 34	24 25 26	32 34 38	25 31 33	29 30 31	24 29 30	24 25 26	32 34 35	32 34 37
	36 39 40	35 36 37	27 28 29	39 40 41	37 41 42	34 36 37	31 32 35	30 31 34	37 38 41	38 39 40
	42 46 47	40 44 46	31 34 38	42 45 46	45 46 47	42 44 48	37 38 39	37 42 45	42 43 44	41 42 45
	48	49	41 42 49	47	48 49	49	47	48	46 48 49	47 48 49
15	01235	01345	2 11 12	23467	4568	02347	1 2 9 11	34678	01237	0378
MHz	678912	67811	13 15 17	9 11 12	10 13 17	8 11 14	14 15 18	11 12 19	8 9 10 13	11 13 14
	16 17 18	18 20 21	18 21 22	15 17 20	22 25 26	18 20 23	25 26 28	20 23 24	14 15 17	16 18 19
	19 20 21	24 25 26	24 25 26	24 27 30	27 28 29	24 25 27	29 30 31	26 27 28	18 19 22	23 25 27
	23 24 25	27 29 30	29 31 32	33 34 35	30 31 32	29 42 43	32 33 36	30 33 34	23 24 25	28 29 30
	28 29 30	31 38 46	33 34 40	38 39 42	33 34 35	45 46 47	37 38 39	35 40 41	26 27 28	32 35 41
	31 32 33	47 49 50	42 45 46	43 45 46	38 41 44	48 49 50	41 43 45	42 46 49	32 36 37	42 44 46
	42 47 48	51 53 54	47 50 51	48 49 55	46 48 50	51 54 56	46 50 53	51 53 54	39 46 47	47 48 50
	49 53 60	55 57 59	52 54 58	56 59 60	52 53 54	60 62 63	54 58 59	58 59 60	50 53 56	53 55 57
	63 65 67	60 61 67	59 60 61	61 62 65	56 59 60	65 66 67	60 62 63	61 62 65	61 62 63	59 61 62
	68 70 71	68 69 70	62 63 64	67 69 70	64 67 69	68 69 70	65 67 68	67 69 70	68 69 71	64 66 67
	73	73 74	68 70 71	71 73 74	70 71 73	71 72 73	70 71 72	71 72 73	73 74	68 69 70
			72 74		74		73			71
20	0146	1379	12368	57910	23456	12568	01235	01345	23479	04678
MHz	10 13 14	10 13 19	10 11 15	12 14 15	7 14 15	9 12 13	8 9 10 12	7 10 11	11 13 15	10 11 13
	15 16 20	20 21 22	16 17 19	16 21 22	17 19 21	21 22 25	13 22 25	15 18 19	16 24 25	16 18 21
	22 23 25	23 24 25	21 25 26	23 24 27	22 24 26	26 27 28	26 27 29	20 21 26	27 29 31	22 23 26
	26 28 29	26 27 30	28 29 30	28 29 30	37 40 42	29 31 32	31 32 33	27 29 30	33 35 36	29 32 35
	30 31 32	33 34 35	32 33 35	33 34 35	43 44 47	34 35 39	36 37 38	31 33 35	40 43 44	36 37 43
	33 36 39	36 47 48	38 39 40	36 37 39	49 51 54	40 43 45	39 43 45	39 40 41	45 46 49	44 46 47
	41 42 44	49 50 51	41 42 43	41 44 45	56 57 60	46 53 57	48 49 52	43 44 46	51 52 53	48 49 53
	45 54 56	53 54 55	44 46 49	47 49 54	62 63 65	59 61 62	53 55 59	47 49 50	54 55 56	54 57 59
	57 60 63	57 59 60	51 52 54	55 56 57	66 67 70	63 64 66	62 63 64	53 55 56	57 59 63	60 61 64
	66 67 68	61 64 65	60 62 63	64 66 68	71 73 76	68 69 71	71 72 73	62 64 65	64 65 68	66 67 68
	72 76 77	67 68 75	64 65 69	70 72 76	77 78 81	73 75 77	74 75 77	66 67 69	71 77 78	69 70 72
	79 82 84	76 77 80	72 76 79	77 80 81	82 83 84	78 82 83	78 81 82	70 71 72	81 82 83	76 78 80
	85 87 88	81 83 84	81 84 86	85 86 87	85 86 87	84 85 86	84 86 89	74 83 84	84 85 86	81 82 84
	91 92 94	86 87 89	88 89 90	90 91 92	89 94 95	93 94 95	91 93 97	86 92 93	90 91 93	87 89 91
	95 97 98	90 93 95	93 94 99	94 95 98	96 97 99	96 97 99	98 99	94 96 98	94 98 99	92 95 96
	99	99		99						
										1

Table 6.1.1.6-3: Numbers ($n_{\rm PRB}$) of the QPSK PRBs (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	1 3 4	1 4 5	0 1 2	0 2 4	245	034	125
3 MHz	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	1 2 7 8 10 13	2 3 4 6 8 13	0 3 6 8 9 10
	14	13	14	13	14	14	14
5 MHz	1 2 3 5 6 8 17	0 1 2 3 4 5 7 8	1 2 3 5 6 7 8	1 2 3 4 5 6 8	1 2 3 8 12 13	1 4 5 6 7 10	1 2 4 6 7 8 9
	18 19 20 21	17 18 19 20	17 18 19 20	16 17 19 20	14 17 20 21	11 13 14 15	14 16 18 21
	23 24	22	21 24	22 23	22 23 24	16 22 23	23 24
10 MHz	2 3 4 6 7 10	1 3 4 5 6 7 9	2 3 4 6 7 8 9	2 5 8 9 11 12	1 4 5 6 7 11	0 1 5 6 7 8 11	1 2 5 6 8 11
	11 13 15 17	10 12 14 16	10 11 13 14	13 14 16 18	12 13 14 15	12 13 15 19	13 14 15 16
	18 19 29 30	17 28 30 34	16 18 19 20	20 21 28 29	17 20 21 26	20 26 28 29	18 20 21 24
	34 35 37 38	35 36 37 38	21 29 32 34	30 31 32 33	27 31 32 34	30 31 32 37	25 27 30 32
	39 41 42 46	39 40 41 43	39 41 43 44	34 42 44 45	37 38 41 42	38 42 43 44	34 35 37 40
	47 48 49	44 48	45 46	46 47 49	46 48 49	47 49	43 46 47
15 MHz	1 3 5 6 9 10 11 13 15 17 20 21 23 24 25 26 27 28 29 33 42 44 45 51 52 53 56 57 58 61 62 63 65 66 70 71 73 74	3 4 5 6 7 8 9 10 13 14 15 16 19 20 21 22 24 25 28 31 32 33 43 45 46 49 51 52 55 58 59 60 61 62 64 66 67 72	3 4 7 8 10 11 12 13 14 16 18 19 20 22 24 25 27 28 30 32 41 42 43 44 45 46 48 50 51 62 65 67 68 69 70 71 73 74	2 6 7 8 9 10 11 13 16 17 18 19 20 21 22 23 26 30 31 41 43 45 46 47 48 51 55 57 58 62 63 64 65 69 70 71 73 74	0 1 2 3 7 8 9 10 11 12 17 19 21 22 23 24 27 28 30 31 32 37 40 41 45 48 51 53 55 56 57 58 61 63 65 66 70 73	3 7 10 11 13 15 16 17 23 27 29 30 31 32 35 36 37 40 42 43 45 46 48 49 50 53 54 57 60 62 64 65 66 67 68 69 72 74	1 3 8 9 11 12 13 14 15 17 22 23 24 25 28 29 30 31 34 37 40 41 42 46 48 49 51 54 55 56 61 62 63 67 70 71 73 74
20 MHz	2 4 7 8 9 10	4 5 6 7 8 9 11	2 3 4 5 8 9 10	0 2 3 4 10 11	4 9 12 13 15	0 1 4 10 12 14	0 1 3 4 5 7 8
	11 12 13 14	12 13 14 16	11 12 14 15	12 13 14 17	17 19 20 21	15 17 18 19	12 13 14 15
	18 20 21 23	17 19 20 22	17 18 19 22	18 22 23 25	22 29 30 31	23 28 29 30	17 19 20 22
	25 27 28 31	25 27 29 33	24 26 27 28	26 27 28 30	36 37 39 40	31 32 33 37	23 25 26 30
	32 34 35 37	37 38 40 41	30 32 35 36	31 32 36 37	41 42 43 46	38 39 42 46	32 33 35 37

38 3	9 44 46 42 43 4	4 45 37 40 41 42	38 40 41 43	48 49 50 53	55 61 64 65	38 39 41 44
53 5	6 58 60 53 54 5	7 58 46 53 55 58	54 55 57 58	54 56 57 58	66 68 69 70	45 48 49 50
61 6	8 69 70 61 62 6	5 67 60 61 62 63	60 61 63 64	60 64 66 71	71 72 73 74	51 58 59 62
71 7	4 75 76 68 70 7	3 78 64 65 66 68	66 68 70 74	72 73 74 75	76 78 82 83	63 67 68 70
78 7	9 80 82 80 82 8	3 86 74 77 82 84	76 77 81 82	80 82 83 86	84 85 86 89	72 75 82 84
83 8	5 87 88 88 89 9	0 91 85 87 92 93	84 85 87 88	87 89 90 92	90 91 93 94	85 90 92 93
93 9	5 97 99 93 95 9	7 97 98 99	92 94 95 98	94 95 96 98	96 97 98 99	94 96 98
				99		

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	1 2 3	1 3 5	0 1 4	0 3 4	134	2 4 5	0 1 2
3 MHz	0 1 2 3 12 13	0 1 2 3 11 12	1 2 3 11 12 13	0 1 2 11 12 13	2478910	0 1 3 4 5 13	0468911
	14	13	14	14	11	14	12
5 MHz	0235678	0234567	01234567	1234578	1 2 3 5 7 10	1 4 5 9 11 13	34578910
	16 17 19 20	16 18 19 22	17 18 20 21	16 17 19 20	12 14 16 18	15 18 20 21	11 12 13 14
	21 24	23 24	23	22 24	20 21 24	22 23 24	18 24
10 MHz	2567910	2468910	02578911	01246789	02367810	01256789	0136910
	11 15 19 20	11 14 15 16	14 15 16 18	11 13 14 18	11 12 15 16	10 15 16 17	13 14 20 21
	21 28 29 30	18 19 20 21	19 32 33 34	19 29 34 35	19 20 22 24	18 22 23 25	22 23 25 28
	32 33 35 36	28 30 32 37	36 38 41 42	36 39 41 42	25 29 31 33	26 28 29 30	29 30 31 34
	38 40 41 43	40 43 44 45	43 44 45 46	44 45 47 48	35 37 42 46	31 32 39 41	35 36 39 40
	44 48 49	46 47 49	48 49	49	47 49	46	42 44 47
15 MHz	02346910	0134589	0158910	23457810	1234578	01234567	13568910
	11 13 14 15	10 12 14 15	13 14 15 20	12 15 16 17	14 18 19 20	8 11 13 14 15	11 13 14 16
	16 17 20 21	16 19 20 22	21 23 26 27	18 19 23 24	21 24 25 27	16 20 21 23	18 20 22 28
	22 23 28 29	24 25 26 27	28 29 30 32	26 28 30 31	28 33 35 38	24 27 33 35	29 30 35 36
	43 44 48 51	28 29 31 33	33 42 43 44	32 33 41 44	40 43 45 46	41 43 44 45	37 38 42 43
	52 53 54 55	42 43 46 47	45 47 51 52	45 46 47 48	47 50 52 53	47 48 50 51	46 47 49 50
	57 59 61 63	48 50 51 52	55 57 59 60	50 52 53 57	55 58 61 62	52 64 65 68	51 55 56 59
	64 65 67 68	56 59 61 67	62 64 65 66	58 59 61 63	63 65 66 67	69 70 71 73	60 61 68 69
	70 72 73	69 71 74	69 71 72 73	65 66 71	68 71 74	74	72 73 74
20 MHz	0256711	34567910	01234510	12345789	02371112	01256810	12346789
	12 13 14 16	13 16 20 21	11 15 18 19	11 15 17 19	13 14 15 16	11 12 13 14	15 18 19 20
	17 18 19 20	23 24 25 26	20 21 24 25	20 21 22 24	17 18 19 20	15 16 20 21	21 23 24 25
	21 27 28 30	28 30 31 32	26 27 28 32	27 28 29 30	22 25 27 30	24 27 29 33	28 29 30 32
	31 35 37 38	35 37 38 41	33 34 37 44	31 32 33 36	35 37 39 42	34 39 40 42	35 39 44 45
	40 43 44 45	42 43 44 46	54 57 58 59	41 44 45 56	44 48 49 52	43 46 48 50	47 48 51 53
	46 53 56 57	53 54 59 60	60 61 62 63	57 61 62 63	53 59 62 63	54 59 60 61	55 57 60 61
	59 60 61 62	61 62 64 67	65 67 70 71	66 67 68 69	67 69 73 74	66 70 71 75	62 63 67 68
	63 64 65 68	70 71 76 77	73 77 78 83	73 79 80 82	75 76 77 78	76 78 79 82	72 73 74 75
	70 73 77 79	78 79 81 82	84 85 88 89	85 86 87 91	79 80 81 84	84 85 87 89	76 77 81 90
	80 82 85 87	84 86 87 88	90 91 92 94	92 93 95 96	85 86 88 91	90 91 95 96	92 93 95 96
	89 92 95 97	95 98 99	95 98 99	98 99	92 94 96 98	97 98 99	97 99

6.1.2 Data content of Physical channels and Signals

Randomisation of the data content is obtained by utilizing the length-31 Gold sequence scrambling of TS36.211, Clause 7.2 [12] which is invoked by all physical channels prior to modulation and mapping to the RE grid. An appropriate number of '0' bits shall be generated prior to the scrambling.

In case multiple carriers are configured with E-TMs, the $N_{\rm ID}^{\rm cell}$ shall be incremented by 1 for each additional configured carrier.

Initialization of the scrambler and RE-mappers as defined in TS36.211 [12] use the following additional parameters:

- $n_{\rm f} = 0$ (used for PBCH)
- The E-TM shall start when $n_s = 0$
- $N_{\rm ID}^{\rm cell} = 1$ for the lowest configured carrier, $N_{\rm ID}^{\rm cell} = 2$ for the $2^{\rm nd}$ lowest configured carrier,..., $N_{\rm ID}^{\rm cell} = n$ for the $n^{\rm th}$ configured carrier
- p = 0 (data generated according to definitions in TS36.211 for antenna port 0). p = 0 shall be used for the generation of the E-TM data, even if the signal is transmitted on a physical port other than port 0.
- q = 0 (single code word)

6.1.2.1 Reference signals

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.10.1

6.1.2.2 Primary Synchronization signal

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.11.1

6.1.2.3 Secondary Synchronization signal

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.11.2

6.1.2.4 PBCH

- 240 REs (480 bits) are available for PBCH for the duration of the E-UTRA test models (1 frame, 10 ms)
- Generate 480 bits of 'all 0' data
- Initialize scrambling generator for each invocation of the E-TM, i.e. set always $n_f = 0$
- Perform scrambling according to TS36.211, clause 6.6.1 of the 480 bits
- Perform modulation according to TS36.211, clause 6.6.2
- Perform mapping to REs according to TS36.211, clause 6.6.4

6.1.2.5 PCFICH

- Generate 32 bit CFI codeword according to TS36.212, clause 5.3.4.
- Perform scrambling according to TS36.211, clause 6.7.1
- Perform modulation according to TS36.211, clause 6.7.2
- Perform mapping to REs according to TS36.211, clause 6.7.4

6.1.2.6 PHICH

- PHICH duration is assumed as 'Normal' according to TS36.211, clause 6.9.3
- Set $N_{\rm g}=1/6$ to obtain $N_{
 m PHICH}^{
 m group}$, see TS36.211, clause 6.9
- Use 2 PHICH per group, $n_{PHICH}^{seq} = 0, 4$
- For frame structure type 2 the factor m_i shall not be set as per TS36.211, Table 6.9-1, but instead shall be set to $m_i = 1$ for all transmitted subframes (Note).
- For each subframe the required amount of HARQ Indicators (HI) is as follows: $N_{\rm PHICH}^{\rm group}$ *(2 PHICH per group).
- Generate this amount of HIs using '0' data for each HI.
- Generate 3 bit HI codeword according to TS36.212, clause 5.3.5
- Perform scrambling and modulation according to TS36.211, clause 6.9.1
- Perform mapping to REs according to TS36.211, clause 6.9.3

Note: this is in order to preserve commonality between FDD and TDD E-TM.

6.1.2.7 PDCCH

- For each subframe the required amount of bits for all PDCCHs is as follows: (# of PDCCH)*(# of CCE per PDCCH)* (9 REG per CCE)*(4 RE per REG)*(2 bits per RE) with these parameters according to the E-TM definitions in subclause 6.1.1
- Generate this amount of bits according to 'all 0' data
- Numbering of CCEs shall be according to TS36.211, clause 6.8.1. Mapping of PDCCHs to the available CCEs is performed as follows: First PDCCH is mapped to CCE(0), second PDCCH to CCE(0+ '# of CCEs per PDCCH'), ... etc. The remaining resources not used for PDCCH are treated as <NIL> REGs according to TS36.211, clause 6.8.2
- Perform PDCCH multiplexing and scrambling according to TS36.211, clause 6.8.2
- Perform modulation according to TS36.211, clause 6.8.3
- Perform mapping to REs according to TS36.211, clause 6.8.5

6.1.2.8 PDSCH

- For each subframe generate the required amount of bits for all PRBs according to 'all 0' data
- PRB numbering is according to TS36.211, clause 6.2.3
- E-TMs utilize 1 user or 2 user PDSCH transmissions distinguished by n_{RNTI} . For each E-TM, PRBs are mapped to users (n_{RNTI}) according to their respective PRB attribute as follows:

Table 6.1.2.8-1: Mapping of PRBs to $\,n_{\mathrm{RNTI}}\,$ for each E-TM

	$n_{ m \scriptscriptstyle RNTI}$
E-TM1.1	0 for all PRBs
E-TM1.2	0 for boosted PRBs or those with $P_A = 0$ dB
	1 for de-boosted PRBs
E-TM2	0 for all PRBs
E-TM3.1	0 for all PRBs
E-TM3.2	0 for QPSKPRBs
	1 for 16QAM PRBs
E-TM3.3	0 for 16QAM PRBs
	1 for QPSK PRBs

- The required amount of PDSCH '0' bits within a subframes and allocated PRBs shall be generated for each user
- Perform user specific scrambling according to TS36.211, clause 6.3.1. This makes use of n_{RNTI} .
- Perform modulation of the scrambled bits with the modulation scheme defined for each user according to TS36.211, clause 6.3.2
- Perform mapping of the complex-valued symbols to PRBs according to TS36.211, clause 6.3.5

6.2 Base station output power

6.2.1 Definition and applicability

Output power, Pout, of the base station is the mean power of one carrier delivered to a load with resistance equal to the nominal load impedance of the transmitter.

The maximum total output power (Pmax), of the base station is the mean power level measured at the antenna connector during the transmitter ON period in a specified reference condition.

Rated total output power of the base station is the mean power for BS operating in single carrier, multi-carrier, or carrier aggregation configurations that the manufacturer has declared to be available at the antenna connector during the transmitter ON period.

Base station maximum output power (Pmax, c), of the base station is the mean power level per carrier measured at the antenna connector during the transmitter ON period in a specified reference condition.

Rated output power, PRAT, of the base station is the mean power level per carrier for BS operating in single carrier, multi-carrier, or carrier aggregation configurations that the manufacturer has declared to be available at the antenna connector during the transmitter ON period.

NOTE: Different PRATs may be declared for different configurations

In certain regions, the minimum requirement for normal conditions may apply also for some conditions outside the ranges defined for the Normal test environment in Annex D.

The rated output power, PRAT, of the BS shall be as specified in Table 6.2.1-1

Table 6.2.1-1: Base Station rated output power

BS class	PRAT
Wide Area BS	(note)
Local Area BS	+ 24 dBm (for one transmit)
	antenna port)
	4 + 21 dBm (for two transmit)
	antenna ports)
	+ 18 dBm (for four transmit
	antenna ports)
	< + 15 dBm (for eight transmit
	antenna ports)
Home BS	+ 20 dBm (for one transmit)
	antenna port)
	≤ + 17 dBm (for two transmit
	antenna ports)
	≤ + 14 dBm (for four transmit
	antenna ports)
	< + 11 dBm (for eight transmit
	antenna ports)
NOTE: There is no upper limit require	ed for the rated output power of the Wide
Area Base Station.	

6.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.

6.2.3 Test purpose

The test purpose is to verify the accuracy of the maximum output power across the frequency range and under normal and extreme conditions for all transmitters in the BS.

6.2.4 Method of test

6.2.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested: B, M and T; see subclause 4.7

RF bandwidth position to be tested: B_{RFBW} , M_{RFBW} and T_{RFBW} ; see subclause 4.7.1.

In addition, on one EARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

1) Connect the power measuring equipment to the base station antenna connector as shown in Annex I.1.1.

6.2.4.2 Procedure

- 1) Set the base station to transmit a signal according to E-TM1.1.
- 2) Measure the mean power for each carrier at the antenna connector.

6.2.5 Test Requirements

In normal conditions, the measurement result in step 2 of 6.2.4.2 shall remain:

within +2.7 dB and -2.7 dB of the manufacturer's rated output power for carrier frequency $f \le 3.0$ GHz.

within +3.0 dB and -3.0 dB of the manufacturer's rated output power for carrier frequency $3.0 \text{GHz} < f \le 4.2 \text{GHz}$.

In extreme conditions, measurement result in step 2 of 6.2.4.2 shall remain:

within +3.2 dB and -3.2 dB of the manufacturer's rated output power for carrier frequency $f \le 3.0$ GHz.

within +3.5 dB and -3.5 dB of the manufacturer's rated output power for carrier frequency 3.0GHz $< f \le 4.2$ GHz.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.2.6 Home BS output power for adjacent UTRA channel protection

6.2.6.1 Definition and applicability

The Home BS shall be capable of adjusting the transmitter output power to minimize the interference level on the adjacent channels licensed to other operators in the same geographical area while optimize the Home BS coverage. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

The output power, Pout, of the Home BS shall be as specified in Table 6.2.6-1 under the following input conditions:

- CPICH Êc, measured in dBm, is the code power of the Primary CPICH on one of the adjacent channels present at the Home BS antenna connector for the CPICH received on the adjacent channels. If Tx diversity is applied on the Primary CPICH, CPICH Êc shall be the sum in [W] of the code powers of the Primary CPICH transmitted from each antenna.
- Ioh, measured in dBm, is the total received power density, including signals and interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.

In case that both adjacent channels are licensed to other operators, the most stringent requirement shall apply for Pout. In the case when one of the adjacent channels is licensed to a E-UTRA operator while the other adjacent channel is licensed to a UTRA operator, the more stringent requirement of this subclause and subclause 6.2.7 shall apply for Pout. In case the Home BS's operating channel and both adjacent channels are licensed to the same operator, the requirements of this clause do not apply.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

Table 6.2.6-1: Home BS output power for adjacent operator UTRA channel protection

Input Conditions	Output power, Pout
Ioh > CPICH Êc + 43 dB And CPICH Êc ≥ -105dBm	≤ 10 dBm
Ioh ≤ CPICH Êc + 43 dB and CPICH Êc ≥ -105dBm	≤ max(8 dBm, min(20 dBm, CPICH Êc + 100 dB))

NOTE 1: The Home BS transmitter output power specified in Table 6.2.6-1 assumes a Home BS reference antenna gain of 0 dBi, an target outage zone of 47dB around the Home BS for an UE on the adjacent channel, with an allowance of 2 dB for measurement errors, an ACIR of 33 dB, an adjacent channel UE CPICH Ec/Io target of -18 dB and the same CPICH Êc value at the adjacent channel UE as for the Home BS.

NOTE 2: For CPICH £c < -105 dBm, the requirements in subclause 6.2 apply.

NOTE 3: The output power Pout is the sum transmit power across all the antenna connectors of the Home BS, with each transmit power measured at the respective antenna connectors.

6.2.6.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.3.

6.2.6.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.6-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS.

6.2.6.4 Method of test

6.2.6.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested: M; see subclause 4.7.

In addition, on one UARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generators delivering co-channel and adjacent channel interferers are switched off.

- 1) Set-up the equipment as shown as shown in Annex I.1.4.
- 2) The Home BS is configured such that the adjacent channel is known to belong to another operator.

6.2.6.4.2 Procedure

- 1) Connect the combined downlink interfering signals (referred to as point D in Figure I.1-4) to the dedicated measurement port (referred to as point 1 in Figure I.1-4) if available, otherwise connect to point 2.
- 2) Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW_{Config} centred on RF channel M.
- 3) Configure the signal generator for adjacent channel DL signal to transmit test model 1 in subclause 6.1.1.1 in [17] at the centre frequency equal to RF channel M + $BW_{Channel}$ /2 + 2.5 MHz.
- 4) Switch on signal generators delivering co-channel and adjacent channel interferers, and adjust the ATT1 and ATT2 such that CPICH $\hat{E}c = -80 \text{ dBm}$ and Ioh = -50 dBm.
- 5) Trigger the Home BS power adjustment mechanism.

6) Configure the Home BS to transmit a signal according to E-TM1.1.

NOTE: The signal shall be transmitted with the maximum allowed output power.

- 7) Measure Home BS output power, Pout, and check it is below the required value according to the CPICH Êc and Ioh values determined in step 4.
- 8) Repeat steps 3) to 7) with the frequency in step 3 set to RF channel M BW_{Channel} /2 2.5 MHz.
- 9) Repeat steps 3) to 8) with different settings for ATT1 and ATT2 to arrive the CPICH Êc and Ioh pairs as specified in Table 6.2.6-2.

Table 6.2.6-2: CPICH Êc and loh pairs

Test Case	CPICH Êc (dBm)	loh (dBm)
2	-90	-60
3	-100	-70
4	-100	-50

6.2.6.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.6-1 plus 2.7 dB for carrier frequency $f \le 3.0 GHz$.

the value specified in Table 6.2.6-1 plus 3.0 dB for carrier frequency $3.0 GHz < f \le 4.2 GHz$.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.6-1 plus 3.2 dB for carrier frequency $f \le 3.0 \text{GHz}$.

the value specified in Table 6.2.6-1 plus 3.5 dB for carrier frequency $3.0 GHz < f \le 4.2 GHz$.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.2.7 Home BS output power for adjacent E-UTRA channel protection

6.2.7.1 Definition and applicability

The Home BS shall be capable of adjusting the transmitter output power to minimize the interference level on the adjacent channels licensed to other operators in the same geographical area while optimize the Home BS coverage. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

The output power, Pout, of the Home BS shall be as specified in Table 6.2.7-1 under the following input conditions:

- CRS Ês, measured in dBm, is the Reference Signal Received Power per resource element on one of the adjacent channels present at the Home BS antenna connector for the Reference Signal received on the adjacent channels. For CRS Ês determination, the cell-specific reference signal R0 according TS 36.211 [12] shall be used. If the Home BS can reliably detect that multiple TX antennas are used for transmission on the adjacent channel, it may use the average in [W] of the CRS Ês on all detected antennas.
- Ioh, measured in dBm, is the total received power density, including signals and interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.

In case that both adjacent channels are licensed to other operators, the most stringent requirement shall apply for Pout. In the case when one of the adjacent channels is licensed to a E-UTRA operator while the other adjacent channel is

licensed to a UTRA operator, the more stringent requirement of this subclause and subclause 6.2.6 shall apply for Pout. In case the Home BS's operating channel and both adjacent channels are licensed to the same operator, the requirements of this clause do not apply.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

Table 6.2.7-1: Home BS output power for adjacent operator E-UTRA channel protection

Input Conditions	Output power, Pout
loh > CRS Ês + $10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	≤ 10 dBm
+ 30 dB and CRS Ês ≥ -127dBm	
loh ≤ CRS Ês +	≤ max(8 dBm, min(20 dBm, CRS
$10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	Ês +
+ 30 dB	$10 \cdot \log_{10} \! \left(\! N_{\mathit{RB}}^{\mathit{DL}} \cdot N_{\mathit{sc}}^{\mathit{RB}} ight)$
and CRS Ês ≥ -127dBm	+ 85 dB))

NOTE 1: The Home BS transmitter output power specified in Table 6.2.7-1 assumes a Home BS reference antenna gain of 0 dBi, an target outage zone of 47dB around the Home BS for an UE on the adjacent channel, with an allowance of 2 dB for measurement errors, an ACIR of 30 dB, an adjacent channel UE £s/Iot target of -6 dB and the same CRS £s value at the adjacent channel UE as for the Home BS.

NOTE 2: For CRS $\hat{E}s < -127$ dBm, the requirements in subclause 6.2 apply.

NOTE 3: The output power Pout is the sum transmit power across all the antenna connectors of the Home BS, with each transmit power measured at the respective antenna connectors.

NOTE 4: N_{RB}^{DL} is the number of downlink resource blocks in the own Home BS channel.

NOTE 5: N_{sc}^{RB} is the number of subcarriers in a resource block, $N_{sc}^{RB} = 12$.

6.2.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.4.

6.2.7.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.7-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS.

6.2.7.4 Method of test

6.2.7.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested: M; see subclause 4.7.

In addition, on one EARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generators delivering co-channel and adjacent channel interferers are switched off.

1) Set-up the equipment as shown as shown in Annex I.1.4.

2) The Home BS is configured such that the adjacent channel is known to belong to another operator.

6.2.7.4.2 Procedure

- 1) Connect the combined downlink interfering signals (referred to as point D in Figure I.1-4) to the dedicated measurement port (referred to as point 1 in Figure I.1-4) if available, otherwise connect to point 2.
- 2) Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW_{Config} centred on RF channel M.
- 3) Configure the signal generator for adjacent channel DL signal to transmit a signal according to E-TM1.1 at the centre frequency equal to RF channel M + BW_{Channel} MHz.
- 4) Switch on signal generators delivering co-channel and adjacent channel interferers, and adjust the ATT1 and ATT2 such that CRS $\hat{E}s = -65 10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right) dBm$ and Ioh = -50 dBm.
- 5) Trigger the Home BS power adjustment mechanism.
- 6) Configure the Home BS to transmit a signal according to E-TM1.1.

NOTE: The signal shall be transmitted with the maximum allowed output power.

- 7) Measure Home BS output power, Pout, and check it is below the required value according to the CRS Ês and Ioh values determined in step 4.
- 8) Repeat steps 3) to 7) with the frequency in step 3 set to RF channel M BW_{Channel} MHz.
- 9) Repeat steps 3) to 8) with different settings for ATT1 and ATT2 to arrive the CRS Ês and Ioh pairs as specified in Table 6.2.7-2.

 $\begin{array}{c|cccc} \textbf{Test Case} & \textbf{CRS \^{E}s (dBm)} & \textbf{Ioh (dBm)} \\ \textbf{2} & \textbf{-75} - 10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right) & \textbf{-60} \\ \textbf{3} & \textbf{-90} - 10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right) & \textbf{-70} \\ \textbf{4} & \textbf{-90} - 10 \cdot \log_{10} \left(N_{RB}^{DL} \cdot N_{sc}^{RB} \right) & \textbf{-50} \\ \end{array}$

Table 6.2.7-2: CRS Ês and loh pairs

6.2.7.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.7-1 plus 2.7 dB for carrier frequency $f \le 3.0 GHz$.

the value specified in Table 6.2.6-1 plus 3.0 dB for carrier frequency $3.0 \text{GHz} < f \le 4.2 \text{GHz}$.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.7-1 plus 3.2 dB for carrier frequency $f \le 3.0 GHz$.

the value specified in Table 6.2.6-1 plus 3.5 dB for carrier frequency 3.0GHz < f \leq 4.2GHz.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.2.8 Home BS output power for co-channel E-UTRA protection

6.2.8.1 Definition and applicability

To minimize the co-channel DL interference to non-CSG macro UEs operating in close proximity while optimizing the CSG Home BS coverage, Home BS may adjust its output power according to the requirements set out in this clause. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

For Home BS that supports the requirements in this clause, the output power, Pout, of the Home BS shall be as specified in Table 6.2.8-1 under the following input conditions:

- CRS Ês, measured in dBm, is the Reference Signal Received Power per resource element present at the Home BS antenna connector received from the co-channel Wide Area BS. For CRS Ês determination, the cell-specific reference signal R0 according TS 36.211 [12] shall be used. If the Home BS can reliably detect that multiple TX antenna ports are used for transmission by the co-channel Wide Area Base Station, it may use the average in [W] of the CRS Ês on all detected TX antenna ports, including R0.
- Ioh, measured in dBm, is the total received DL power, including all interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.
- Iob, measured in dBm, is the uplink received interference power, including thermal noise, within one physical resource block's bandwidth of $N_{\rm sc}^{\rm RB}$ resource elements as defined in TS 36.214, present at the Home BS antenna connector on the Home BS operating channel.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

Table 6.2.8-1: Home BS output power for co-channel E-UTRA channel protection

Input Conditions	Output power, Pout
loh (DL) > CRS Ês + $10\log_{10}(N_{\rm RB}^{\rm DL} N_{\rm sc}^{\rm RB})$ + 30 dB	≤ 10 dBm
and	
Option 1: CRS Ês ≥ -127 dBm or	
Option 2: CRS Ês ≥ -127 dBm and lob > -103 dBm	
Ioh (DL) \leq CRS Ês + $10\log_{10}(N_{RB}^{DL}N_{sc}^{RB})$ + 30 dB	≤ max (Pmin, min (Pmax, CRS Ês +
, KB sc /	$10\log_{10}(N_{RB}^{DL}N_{sc}^{RB}) + X))$
and	
0 (4 000 Ê > 407 ID	30 dB ≤ X ≤ 70 dB
Option 1: CRS Ês ≥ -127 dBm or	Pmin = - 10 dBm
Option 2. CRS Ês ≥ -127 dBm and lob > -103 dBm	

- Note 1: Only the option supported by the Home BS shall be tested.
- Note 2: For CRS $\hat{E}s < -127dBm$, or Iob ≤ -103 dBm when Option 2 is supported, the requirements in sub-clauses 6.2.1 and 6.2.2 apply.
- Note 3: The output power Pout is the sum of transmits power across all the antennas of the Home BS, with each transmit power measured at the respective antenna connectors.
- Note 4: N_{RB}^{DL} is the number of downlink resource blocks in the own Home BS channel.
- Note 5: N_{sc}^{RB} is the number of subcarriers in a resource block, $N_{sc}^{RB} = 12$.

Note 6: X is a network configurable parameter.

Note 7: Pmin can be lower dependent on the Home BS total dynamic range.

Note8: Other input conditions and output power to be applied for network scenarios other than co-channel E-UTRA macro channel protection shall not be precluded.

6.2.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.5.

6.2.8.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.8-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS. For Home BS that supports the requirements in this clause, only the option in Table 6.2.8-1 supported by the Home BS shall be tested.

6.2.8.4 Method of test

6.2.8.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested: M: see subclause 4.7.

In addition, on one EARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generator delivering co-channel interferers is switched off.

- 1) Set-up the equipment as shown in Annex I.1.5, base on the option supported by Home BS.
- 2) The co-channel interference should be configured containing at least signals from a neighbouring Marco BS. For option 2 of Table 6.2.8-1, additional signal generator needed to deliver the MUE UL signal.

6.2.8.4.2 Procedure

- 1) Connect the downlink co-channel interfering signals (referred to as point D in Figure I.1-5) to the dedicated measurement port (referred to as point 1 in Figure I.1-5) if available, otherwise connect to point 2. Specifically for option 2 of Table 6.2.8-1, connect the UL interference to point 2 for UL receiving on the figure of I.1.5-b.
- 2) Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW_{Config} centred on RF channel M.
- 3) Configure the X as 30 dB. Switch on signal generators delivering interferers, and adjust the ATT such that CRS $\hat{E}s = -10 10\log_{10}(N_{RB}^{DL}N_{sc}^{RB})$ dBm and Ioh = -50 dBm.
- 4) Trigger the Home BS power adjustment mechanism.
- 5) Configure the Home BS to transmit a signal according to E-TM1.1.

NOTE: The signal shall be transmitted with the maximum allowed output power.

- 6) Measure Home BS output power, Pout, and check it is below the required value according to the CRS Ês and Ioh values determined in step 4. The value of Pmin for testing is -10dBm.
- 7) Repeat steps 4) to 6) with different settings for ATT to arrive the input parameter pairs as specified in Table 6.2.8-2 or 6.2.8-3, basing the option of Table 6.2.8-1 supported by the Home BS.

Table 6.2.8-2: CRS Ês and loh pairs for option 1

Test Case	CRS Ês (dBm)	loh (dBm)
1	-20- 10log ₁₀ ($N_{ m RB}^{ m DL} \ N_{ m sc}^{ m RB}$)	-60
2	Pmin-30 -10log ₁₀ ($N_{\mathrm{RB}}^{\mathrm{DL}}$ $N_{\mathrm{sc}}^{\mathrm{RB}}$)	-70
3	-90 - 10log ₁₀ ($N_{ m RB}^{ m DL} \ N_{ m sc}^{ m RB}$)	-50

Table 6.2.8-3: CRS Ês, loh and lob pairs for option 2

Test Case	CRS Ês (dBm)	loh (dBm)	lob (dBm)
1	-20 - 10log ₁₀ ($N_{ m RB}^{ m DL} \ N_{ m sc}^{ m RB}$)	-60	-98
2	Pmin-30 -10log ₁₀ ($N_{\mathrm{RB}}^{\mathrm{DL}}$ $N_{\mathrm{sc}}^{\mathrm{RB}}$)	-70	-98
3	-90 - 10log ₁₀ ($N_{ m RB}^{ m DL} \ N_{ m sc}^{ m RB}$)	-50	-98

6.2.8.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than the value specified in Table 6.2.8-1 plus 2.7 dB.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than the value specified in Table 6.2.8-1 plus 3.2 dB.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.3 Output power dynamics

The requirements in subclause 6.3 apply during the transmitter ON period.

6.3.1 RE Power control dynamic range

6.3.1.1 Definition and applicability

The RE power control dynamic range is the difference between the power of an RE and the average RE power for a BS at maximum output power for a specified reference condition. Unwanted emissions (as specified in subclause 6.6) and Transmit modulation quality (as specified in subclause 6.5) shall be maintained within the whole power control dynamic range.

6.3.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.3.1.1.

6.3.1.3 Method of test

No specific test or test requirements are defined for RE Power control dynamic range. The Error Vector Magnitude test, as described in subclause 6.5.2 provides a sufficient test coverage for this requirement.

6.3.2 Total power dynamic range

6.3.2.1 Definition and applicability

The total power dynamic range is the difference between the maximum and the minimum transmit power of an OFDM symbol for a specified reference condition.

NOTE: The upper limit of the dynamic range is the OFDM symbol power for a BS at maximum output power. The lower limit of the dynamic range is the OFDM symbol power for a BS when one resource block is transmitted. The OFDM symbol shall carry PDSCH and not contain RS, PBCH or synchronisation signals.

6.3.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.3.2.1.

6.3.2.3 Test purpose

The test purpose is to verify that the total power dynamic range is met as specified by the minimum requirement.

6.3.2.4 Method of test

6.3.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

6.3.2.4.2 Procedure

- 1) Set-up BS transmission at maximum total power as specified by the supplier. Channel set-up shall be according to E-TM 3.1.
- 2) Measure the average OFDM symbol power as defined in Annex F.
- 3) Set the BS to transmit a signal according to E-TM 2.
- 4) Measure the average OFDM symbol power as defined in Annex F. The measured OFDM symbols shall not contain RS, PBCH or synchronisation signals.

6.3.2.5 Test Requirement

The downlink (DL) total power dynamic range for each E-UTRA carrier shall be larger than or equal to the level in Table 6.3.2-1.

Table 6.3.2-1 E-UTRA BS total power dynamic range, paired spectrum

E-UTRA	Total power dynamic	
channel bandwidth (MHz)	range (dB)	
1.4	7.3	
3	11.3	
5	13.5	
10	16.5	
15	18.3	
20	19.6	

NOTE 1: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

NOTE2: Additional test requirements for the Error Vector Magnitude (EVM) at the lower limit of the dynamic range are defined in subclause 6.5.2

6.4 Transmit ON/OFF power

The requirements in section 6.4 are only applied for E-UTRA TDD BS.

6.4.1 Transmitter OFF power

6.4.1.1 Definition and applicability

Transmitter OFF power is defined as the mean power measured over 70 us filtered with a square filter of bandwidth equal to the transmission bandwidth configuration of the BS (BW_{Config}) centred on the assigned channel frequency during the transmitter OFF period.

For BS supporting intra-band contiguous CA, the transmitter OFF power is defined as the mean power measured over 70 us filtered with a square filter of bandwidth equal to the Aggregated Channel Bandwidth $BW_{Channel_CA}$ centred on $(F_{edge\ high} + F_{edge\ low})/2$ during the transmitter OFF period.

6.4.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.4.1.1.

6.4.1.3 Test purpose

The purpose of this test is to verify the E-UTRA BS transmitter OFF power is within the limit of the minimum requirement.

6.4.1.4 Method of test

Requirement is tested together with transmitter transient period, as described in subclause 6.4.2.4.

6.4.1.4.1 Void

6.4.1.4.2 Void

6.4.1.5 Test requirement

The conformance testing of transmit OFF power is included in the conformance testing of transmitter transient period; therefore, see subclause 6.4.2.5 for test requirements.

6.4.2 Transmitter transient period

6.4.2.1 Definition and applicability

The transmitter transient period is the time period during which the transmitter is changing from the OFF period to the ON period or vice versa. The transmitter transient period is illustrated in Figure 6.4.2.1-1.

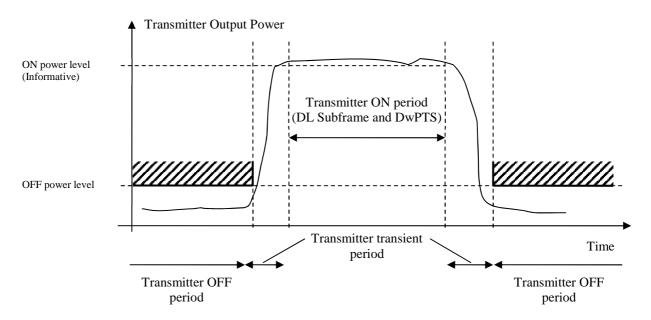


Figure 6.4.2.1-1 Illustration of the relations of transmitter ON period, transmitter OFF period and transmitter transient period.

6.4.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.4.2.1.

6.4.2.3 Test purpose

The purpose of this test is to verify the E-UTRA BS transmitter transient periods are within the limit of the minimum requirement.

6.4.2.4 Method of test

6.4.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: M; see subclause 4.7.

RF bandwidth position to be tested: M_{RFBW} ; see subclause 4.7.1.

Connect the signal analyzer to the BS antenna connector as shown in Annex I.1.1.

As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity, efficiency and avoiding e.g. carrier leakage, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

6.4.2.4.2 Procedure

- 1) Set the BS to transmit a signal according to E-TM1.1 at the manufacturer's specified maximum output power.
- 2) Measure the mean power spectral density over 70 μs filtered with a square filter of bandwidth equal to the RF bandwidth of the BS centred on the central frequency of the RF bandwidth. 70 μs average window centre is set from 35 μs after end of one transmitter ON period + 17 μs to 35 μs before start of next transmitter ON period 17 μs.

3) For BS supporting contiguous CA, measure the the mean power spectral density over 70 μ s filtered with a square filter of bandwidth equal to the Aggregated Channel Bandwidth BW_{Channel_CA} centred on (F_{edge_high}+F_{edge_low})/2. 70 μ s average window centre is set from 35 μ s after end of one transmitter ON period + 17 μ s to 35 μ s before start of next transmitter ON period – 17 μ s.

6.4.2.5 Test requirement

The measured mean power spectral density shall be less than -83dBm/MHz for carrier frequency $f \le 3.0 GHz$.

The measured mean power spectral density shall be less than -82.5dBm/MHz for carrier frequency $3.0GHz < f \le 4.2GHz$.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.5 Transmitted signal quality

The requirements in subclause 6.5 apply to the transmitter ON period.

6.5.1 Frequency error

6.5.1.1 Definition and applicability

Frequency error is the measure of the difference between the actual BS transmit frequency and the assigned frequency. The same source shall be used for RF frequency and data clock generation.

It is not possible to verify by testing that the data clock is derived from the same frequency source as used for RF generation. This may be confirmed by the manufacturer's declaration.

6.5.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.1.

6.5.1.3 Test purpose

To verify that the Frequency Error is within the limit of the minimum requirement.

6.5.1.4 Method of test

Requirement is tested together with Error Vector Magnitude test, as described in subclause 6.5.2.

6.5.1.5 Test requirement

The modulated carrier frequency of each E-UTRA carrier configured by the BS shall be accurate to within the accuracy range given in Table 6.5.1-1 observed over a period of one subframe (1ms).

Table 6.5.1-1: Frequency error test requirement

BS class	Accuracy
Wide Area BS	± (0.05 ppm + 12 Hz)
Local Area BS	± (0.1 ppm + 12 Hz)
Home BS	± (0.25 ppm + 12 Hz)

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.5.2 Error Vector Magnitude

6.5.2.1 Definition and applicability

The Error Vector Magnitude is a measure of the difference between the ideal symbols and the measured symbols after the equalization. This difference is called the error vector. The equaliser parameters are estimated as defined in Annex F. The EVM result is defined as the square root of the ratio of the mean error vector power to the mean reference power expressed in percent.

6.5.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.2.

6.5.2.3 Test purpose

The test purpose is to verify that the Error Vector Magnitude is within the limit specified by the minimum requirement.

6.5.2.4 Method of test

6.5.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

6.5.2.4.2 Procedure

- 1) Start BS transmission at Pmax
- 2) Set the BS to transmit a signal according to E-TM 3.1
- 3) Measure the EVM and frequency error as defined in Annex F.
- 4) Repeat steps 2 and 3 for E-TM 3.2, E-TM 3.3 and E-TM 2. For E-TM2 the OFDM symbol power shall be at the lower limit of the dynamic range according to the test procedure in subclause 6.3.2.4.2 and test requirements in subclause 6.3.2.5.

6.5.2.5 Test requirement

The EVM of each E-UTRA carrier for different modulation schemes on PDSCH shall be less than the limits in table 6.5.2.5-1:

Table 6.5.2.5-1 EVM requirements

Modulation scheme for PDSCH	Required EVM [%]
QPSK	18.5 %
16QAM	13.5 %
64QAM	9 %

The EVM requirement shall be applicable within a time period around the centre of the CP therefore the EVM requirement is tested against the maximum of the RMS average of 10 subframes at the two window W extremities.

Table 6.5.2.5-2 specifies EVM window length (W) for normal CP, the cyclic prefix length N_{cp} is 160 for symbols 0 and 144 for symbols 1-6.

Table 6.5.2.5-2 EVM window length for normal CP

Channel Bandwidth MHz	FFT size	Cyclic prefix length for symbols 0 in FFT samples	Cyclic prefix length for symbols 1-6 in FFT samples	EVM window length <i>W</i>	Ratio of W to total CP for symbols 1-6* [%]
1.4	128	10	9	5	55.6
3	256	20	18	12	66.7
5	512	40	36	32	88.9
10	1024	80	72	66	91.7
15	1536	120	108	102	94.4
20	2048	160	144	136	94.4
* Note: These percentages are informative and apply to symbols 1 through 6. Symbol					

* Note: These percentages are informative and apply to symbols 1 through 6. Symbol 0 has a longer CP and therefore a lower percentage.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

6.5.3 Time alignment error

6.5.3.1 Definition and applicability

Frames of the LTE signals present at the BS transmitter antenna port(s) are not perfectly aligned in time. In relation to each other, the RF signals present at the BS transmitter antenna port(s) experience certain timing differences.

For a specific set of signals/transmitter configuration/transmission mode, time alignment error (TAE) is defined as the largest timing difference between any two signals. This test is only applicable for eNode B supporting TX diversity MIMO transmission, carrier aggregation and their combinations.

6.5.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.3.

6.5.3.3 Test Purpose

To verify that the timing alignment error in TX diversity, MIMO transmission, carrier aggregation and their combinations is within the limit specified by the minimum requirement.

6.5.3.4 Method of Test

6.5.3.4.1 Initial Conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: M; see subclause 4.7.

RF bandwidth position to be tested: M_{RFBW} ; see subclause 4.7.1.

1) Connect two base station RF antenna ports to the measurement equipment according to Annex I.1.3. If available terminate the other unused antenna ports.

6.5.3.4.2 Procedure

1) Set the base station to transmit E-TM1.1 or any DL signal using TX diversity, MIMO transmission or carrier aggregation.

For a BS declared to be capable of single carrier operation only, set the BS to transmit according to the manufacturer's specified maximum output power.

If the BS supports intra band Carrier Aggregation set the base station to transmit according to the applicable test configuration in sub-clause 4.10.

If the BS supports inter band carrier aggregation set the base station to transmit, for each band, a single carrier or all carriers according to the applicable test configuration in sub clause 4.10.

- 2) Measure the time alignment error between the reference symbols on the carrier(s) from active antenna port(s).
- 3) Repeat the step 1 and 2 for any other possible configuration of transmit antennas.

6.5.3.5 Test Requirement

For MIMO or TX diversity transmissions, at each carrier frequency, TAE shall not exceed 90 ns.

For intra-band carrier aggregation, with or without MIMO or TX diversity, TAE shall not exceed 155 ns.

For inter-band carrier aggregation, with or without MIMO or TX diversity, TAE shall not exceed 285 ns.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.5.4 DL RS power

6.5.4.1 Definition and applicability

DL RS power is the resource element power of Downlink Reference Symbol.

The absolute DL RS power is indicated on the DL-SCH. The absolute accuracy is defined as the maximum deviation between the DL RS power indicated on the DL-SCH and the DL RS power of each E-UTRA carrier at the BS antenna connector.

6.5.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.4.

6.5.4.3 Test purpose

The test purpose is to verify that the DL RS power is within the limit specified by the minimum requirement.

6.5.4.4 Method of test

6.5.4.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

6.5.4.4.2 Procedure

Set-up BS transmission at maximum total power (Pmax) as specified by the supplier. Channel set-up shall be according to E-TM 1.1.

Measure the RS transmitted power according to annex F.

6.5.4.5 Test requirement

DL RS power of each E-UTRA carrier shall be:

within \pm 2.9 dB of the DL RS power indicated on the DL-SCH for carrier frequency f \leq 3.0GHz.

within \pm 3.2 dB of the DL RS power indicated on the DL-SCH for carrier frequency $3.0 \text{GHz} < f \le 4.2 \text{GHz}$.

NOTE 1: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

NOTE 2: PDSCH in E-TM1.1 is configured as "all 0" and DL RS power is not indicated on PDSCH during the measurement. The absolute DL RS power indicated on the DL-SCH can be calculated as Pmax,c – $10\log_{10}(12*N_{RB})$ dBm, where N_{RB} is the transmission bandwidth configuration of E-TM1.1.

6.6 Unwanted emissions

Unwanted emissions consist of out-of-band emissions and spurious emissions [5]. Out of band emissions are unwanted emissions immediately outside the channel bandwidth resulting from the modulation process and non-linearity in the transmitter but excluding spurious emissions. Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions.

The out-of-band emissions requirement for the BS transmitter is specified both in terms of Adjacent Channel Leakage power Ratio (ACLR) and Operating band unwanted emissions. The Operating band unwanted emissions define all unwanted emissions in the downlink operating band plus the frequency ranges 10 MHz above and 10 MHz below the band. Unwanted emissions outside of this frequency range are limited by a spurious emissions requirement.

For a BS supporting multi-carrier or intra-band contiguous CA, the unwanted emissions requirements apply to channel bandwidths of the outermost carrier larger than or equal to 5 MHz.

There is in addition a requirement for occupied bandwidth.

6.6.1 Occupied bandwidth

6.6.1.1 Definition and applicability

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean transmitted power.

The value of $\beta/2$ shall be taken as 0.5%.

6.6.1.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 6.6.1.

6.6.1.3 Test purpose

The occupied bandwidth, defined in the Radio Regulations of the International Telecommunication Union ITU, is a useful concept for specifying the spectral properties of a given emission in the simplest possible manner; see also ITU-R Recommendation SM.328 [4]. The test purpose is to verify that the emission of the BS does not occupy an excessive bandwidth for the service to be provided and is, therefore, not likely to create interference to other users of the spectrum beyond undue limits.

6.6.1.4 Method of test

6.6.1.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

Aggregated channel bandwidth position to be tested: $B_{BW\ Channel\ CA}$, $M_{BW\ Channel\ CA}$ and $T_{BW\ Channel\ CA}$; see subclause 4.7.2.

Connect the Measurement device to the BS antenna connector as shown in Annex I.1.1.

2) Start transmission according to E-TM1.1 at the manufacturer's specified maximum output power.

6.6.1.4.2 Procedure

1) Measure the spectrum emission of the transmitted signal using at least the number of measurement points, and across a span, as listed in Table 6.6.1.4.2-1. The selected resolution bandwidth (RBW) filter of the analyser shall be 30 kHz or less.

Table 6.6.1.4.2-1 Span and number of measurement points for OBW measurements

Channel bandwidth BW _{Channel} [MHz]	1.4	3	5	10	15	20	>20
Span [MHz]	10	10	10	20	30	40	$2 \times BW_{Channel_CA}$
Minimum number of measurement points	1429	667	400	400	400	400	$\left[\frac{2 \times BW_{Channel_CA}}{100kHz}\right]$

NOTE: The detection mode of the spectrum analyzer will not have any effect on the result if the statistical properties of the out-of-OBW power are the same as those of the inside-OBW power. Both are expected to have the Rayleigh distribution of the amplitude of Gaussian noise. In any case where the statistics are not the same, though, the detection mode must be power responding. The analyser may be set to respond to the average of the power (root-mean-square of the voltage) across the measurement cell.

- 2) Compute the total of the power, P0, (in power units, not decibel units) of all the measurement cells in the measurement span. Compute P1, the power outside the occupied bandwidth on each side. P1 is half of the total power outside the bandwidth. P1 is half of (100 % (occupied percentage)) of P0. For the occupied percentage of 99 %, P1 is 0.005 times P0.
- 3) Determine the lowest frequency, f1, for which the sum of all power in the measurement cells from the beginning of the span to f1 exceeds P1.
- 4) Determine the highest frequency, f2, for which the sum of all power in the measurement cells from f2 to the end of the span exceeds P1.
- 5) Compute the occupied bandwidth as f2 f1.

6.6.1.5 Test requirements

The occupied bandwidth for each E-UTRA carrier shall be less than the channel bandwidth as defined in Table 5.6-1. For contiguous CA, the occupied bandwidth shall be less than or equal the Aggregated Channel Bandwidth as defined in subclause 5.6.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.6.2 Adjacent Channel Leakage power Ratio (ACLR)

6.6.2.1 Definition and applicability

Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the filtered mean power centered on the assigned channel frequency to the filtered mean power centered on an adjacent channel frequency.

The requirements shall apply outside the Base Station RF bandwidth edges whatever the type of transmitter considered (single carrier or multi-carrier). It applies for all transmission modes foreseen by the manufacturer's specification. The requirement applies during the transmitter ON period.

6.6.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.6.2.1

6.6.2.3 Test purpose

To verify that the adjacent channel leakage power ratio requirement shall be met as specified by the minimum requirement.

6.6.2.4 Method of test

6.6.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

RF bandwidth position to be tested: B_{RFBW}, M_{RFBW} and T_{RFBW}; see subclause 4.7.1.

- 1) Connect measurement device to the base station antenna connector as shown in Annex I.1.1.
- 2) The measurement device characteristics shall be:
 - measurement filter bandwidth: defined in subclause 6.6.2.5;
 - detection mode: true RMS voltage or true average power.
- 3) Set the base station to transmit a signal according to E-TM1.1. The mean power at the antenna connector shall be the maximum output power as specified by the manufacturer.
- 4) Set carrier frequency within the frequency band supported by BS.

6.6.2.4.2 Procedure

- 1) Measure Adjacent channel leakage power ratio for the frequency offsets both side of channel frequency as specified in Table 6.6.2-1 (Paired spectrum case) or Table 6.6.2-2 (Unpaired spectrum case) respectively. In multiple carrier case only offset frequencies below the lowest and above the highest carrier frequency used shall be measured.
- 2) Repeat the test with the channel set-up according to E-TM1.2.

6.6.2.5 Test Requirement

The ACLR is defined with a square filter of bandwidth equal to the transmission bandwidth configuration of the transmitted signal (BW_{Config}) centered on the assigned channel frequency and a filter centered on the adjacent channel frequency according to the tables below.

For Category A Wide Area BS, either the ACLR limits in the tables below or the absolute limit of -13 dBm/MHz apply, whichever is less stringent.

For Category B Wide Area BS, either the ACLR limits in the tables below or the absolute limit of -15 dBm/MHz apply, whichever is less stringent.

For Local Area BS, either the ACLR limits in the tables below or the absolute limit of -32dBm/MHz shall apply, whichever is less stringent.

For Home BS, either the ACLR limits in the tables below or the absolute limit of -50dBm/MHz apply, whichever is less stringent.

For operation in paired spectrum, the ACLR shall be higher than the value specified in Table 6.6.2-1.

Table 6.6.2-1: Base Station ACLR in paired spectrum

Channel bandwidth of E-UTRA lowest (highest) carrier transmitted BW _{Channel} [MHz]	BS adjacent channel centre frequency offset below the lowest or above the highest carrier centre frequency transmitted	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit	
1.4, 3.0, 5, 10, 15, 20	BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB	
	2 x BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB	
	BW _{Channel} /2 + 2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	
	BW _{Channel} /2 + 7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	
NOTE 1: BW _{Channel} and BW _{Config} are the channel bandwidth and transmission bandwidth configuration of the E-					
UTRA lowest (highest) carrier transmitted on the assigned channel frequency.					
NOTE 2: The RRC filter shall be equivalent to the transmit pulse shape filter defined in [15], with a chip rate as					
defined in this	table.				

For operation in unpaired spectrum, the ACLR shall be higher than the value specified in Table 6.6.2-2.

Table 6.6.2-2: Base Station ACLR in unpaired spectrum with synchronized operation

Channel bandwidth of E-UTRA lowest (highest) carrier transmitted BW _{Channel} [MHz]	BS adjacent channel centre frequency offset below the lowest or above the highest carrier centre frequency transmitted	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit
1.4, 3.0	BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB
	2 x BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB
	BW _{Channel} /2 + 0.8 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB
	BW _{Channel} /2 + 2.4 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB
5, 10, 15, 20	BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB
	2 x BW _{Channel}	E-UTRA of same BW	Square (BW _{Config})	44.2 dB
	BW _{Channel} /2 + 0.8 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB
	BW _{Channel} /2 + 2.4 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB
	BW _{Channel} /2 + 2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB
	BW _{Channel} /2 + 7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB
	BW _{Channel} /2 + 5 MHz	7.68 Mcps UTRA	RRC (7.68 Mcps)	44.2 dB
	BW _{Channel} /2 + 15 MHz	7.68 Mcps UTRA	RRC (7.68 Mcps)	44.2 dB

NOTE 1: BW_{Channel} and BW_{Config} are the channel bandwidth and transmission bandwidth configuration of the E-UTRA lowest (highest) carrier transmitted on the assigned channel frequency.

NOTE 2: The RRC filter shall be equivalent to the transmit pulse shape filter defined in [15], with a chip rate as defined in this table.

NOTE: If the above Test Requirements differ from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

6.6.3 Operating band unwanted emissions

6.6.3.1 Definition and applicability

Unless otherwise stated, the Operating band unwanted emission limits are defined from 10 MHz below the lowest frequency of the downlink operating band up to 10 MHz above the highest frequency of the downlink operating band (see Table 5.5-1).

The requirements shall apply whatever the type of transmitter considered (single carrier or multi-carrier) and for all transmission modes foreseen by the manufacturer's specification.

The unwanted emission limits in the part of the downlink operating band that falls in the spurious domain are consistent with ITU-R Recommendation SM.329 [5].

For a multicarrier E-UTRA BS or BS configured for intra-band contiguous carrier aggregation the definitions above apply to the lower edge of the carrier transmitted at the lowest carrier frequency and the higher edge of the carrier transmitted at the highest carrier frequency within a specified operating band.

For Wide Area BS, the requirements of either subclause 6.6.3.5.1 (Category A limits) or subclause 6.6.3.5.2 (Category B limits) shall apply.

For Local Area BS, the requirements of subclause 6.6.3.5.2A shall apply (Category A and B).

For Home BS, the requirements of subclause 6.6.3.5.2X shall apply (Category A and B).

The application of either Category A or Category B limits shall be the same as for Transmitter spurious emissions (Mandatory Requirements) in subclause 6.6.4.5.

For Category B Operating band unwanted emissions, there are two options for the limits that may be applied regionally. Either the limits in subclause 6.6.3.5.2.1 or subclause 6.6.3.5.2.2 shall be applied.

6.6.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.6.3.

6.6.3.3 Test purpose

This test measures the emissions of the BS, close to the assigned channel bandwidth of the wanted signal, while the transmitter is in operation.

6.6.3.4 Method of test

6.6.3.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

1) Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity, efficiency and avoiding e.g. carrier leakage, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

2) Detection mode: True RMS.

6.6.3.4.2 Procedure

1) Set the BS transmission at maximum total power (Pmax) as specified by the supplier. Channel set-up shall be according to E-TM 1.1.

- 2) Step the centre frequency of the measurement filter in contiguous steps and measure the emission within the specified frequency ranges with the specified measurement bandwidth.
- 3) Repeat the test with the channel set-up according to E-TM 1.2

6.6.3.5 Test requirement

The measurement results in step 2 of 6.6.3.4.2 shall not exceed the maximum levels specified in the tables below, where:

- Δf is the separation between the channel edge frequency and the nominal -3dB point of the measuring filter closest to the carrier frequency.
- f_offset is the separation between the channel edge frequency and the centre of the measuring filter.
- f_offset_{max} is the offset to the frequency 10 MHz outside the downlink operating band.
- Δf_{max} is equal to f_{max} minus half of the bandwidth of the measuring filter.

6.6.3.5.1 Test requirements for Wide Area BS (Category A)

For E-UTRA BS operating in Bands 5, 6, 8, 12, 13, 14, 17, 18, 19, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-1 to 6.6.3.5.1-3.

Table 6.6.3.5.1-1: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands <1GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
$1.4 \text{ MHz} \leq \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$2.85 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-13 dBm	100 kHz

Table 6.6.3.5.1-2: General operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands <1GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
3 MHz ≤ Δf < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-13.5 dBm	100 kHz
6 MHz ≤ Δ f ≤ Δ fmax	6.05 MHz ≤ f_offset < f_offsetmax	-13 dBm	100 kHz

Table 6.6.3.5.1-3: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands <1GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.05 MHz ≤ f_offset < f_offset _{max}	-13 dBm (Note 4)	100 kHz

For E-UTRA BS operating in Bands 1, 2, 3, 4, 7, 9, 10, 11, 21, 23, 24, 25, 33, 34, 35, 36, 37, 38, 39, 40, 41, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-4, 6.6.3.5.1-5 and 6.6.3.5.1-6:

For E-UTRA BS operating in Bands 22, 42, 43, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-4a, 6.6.3.5.1-5a and 6.6.3.5.1-6a:

Table 6.6.3.5.1-4: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$3.3 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-13 dBm	1MHz

Table 6.6.3.5.1-4a: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.8dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.2 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$3.3 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	-13 dBm	1MHz

Table 6.6.3.5.1-5: General operating band unwanted emission limits for 3 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.5 MHz ≤ f_offset < f_offset _{max}	-13 dBm	1MHz

Table 6.6.3.5.1-5a: General operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.2dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.2 dBm	100 kHz
$6~\text{MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$6.5 \text{ MHz} \leq f_offset < f_offset_{max}$	-13 dBm	1MHz

Table 6.6.3.5.1-6: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset _{max}	-13 dBm (Note 4)	1MHz

Table 6.6.3.5.1-6a: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.2dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	$5.05 \text{ MHz} \le f_\text{offset} < $ min(10.05 MHz, f_offset _{max})	-12.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset _{max}	-13 dBm (Note 4)	1MHz

6.6.3.5.2 Test requirements for Wide Area BS (Category B)

For Category B Operating band unwanted emissions, there are two options for the limits that may be applied regionally. Either the limits in subclause 6.6.3.5.2.1 or subclause 6.6.3.5.2.2 shall be applied.

6.6.3.5.2.1 Category B test requirements (Option 1)

For E-UTRA BS operating in Bands 5, 8, 12, 13, 14, 17, 20, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-1 to 6.6.3.5.2.1-3:

Table 6.6.3.5.2.1-1: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	2.85 MHz ≤ f_offset < f_offset _{max}	-16 dBm	100 kHz

Table 6.6.3.5.2.1-2: General operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.05 MHz ≤ f_offset < f_offset _{max}	-16 dBm	100 kHz

Table 6.6.3.5.2.1-3: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.05 MHz ≤ f_offset < f_offset _{max}	-16 dBm (Note 4)	100 kHz

For E-UTRA BS operating in Bands 1, 2, 3, 4, 7, 10, 25, 33, 34, 35, 36, 37, 38, 39, 40, 41, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-4, 6.6.3.5.2.1-5 and 6.6.3.5.2.1-6:

For E-UTRA BS operating in Bands 22, 42, 43, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-4a, 6.6.3.5.2.1-5a and 6.6.3.5.2.1-6a:

Table 6.6.3.5.2.1-4: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
$1.4 \text{ MHz} \leq \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$3.3 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	-15 dBm	1MHz

Table 6.6.3.5.2.1-4a: General operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$+0.8dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.2 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	3.3 MHz \leq f_offset $<$ f_offset _{max}	-15 dBm	1MHz

Table 6.6.3.5.2.1-5: General operating band unwanted emission limits for 3 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.5 dBm	100 kHz
$6~\text{MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.5 MHz ≤ f_offset < f_offset _{max}	-15 dBm	1MHz

Table 6.6.3.5.2.1-5a: General operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.2dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.2 dBm	100 kHz
$6~\text{MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.5 MHz ≤ f_offset < f_offset _{max}	-15 dBm	1MHz

Table 6.6.3.5.2.1-6: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset _{max}	-15 dBm (Note 4)	1MHz

Table 6.6.3.5.2.1-6a: General operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.2dBm - \frac{7}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f <$ min(10 MHz, Δf_{max})	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-12.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f \max$	10.5 MHz ≤ f_offset < f_offsetmax	-15 dBm (Note 4)	1MHz

6.6.3.5.2.2Category B (Option 2)

The limits in this subclause are intended for Europe and may be applied regionally for BS operating in band 1, 3, 8, 33 or 34.

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-1 below for 5, 10, 15 and 20 MHz channel bandwidth:

Table 6.6.3.5.2.2-1: Regional operating band unwanted emission limits in band 1, 3, 8, 33 or 34 for 5, 10, 15 and 20 MHz channel bandwidth for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
$0 \text{ MHz} \leq \Delta f < 0.2 \text{ MHz}$	0.015MHz ≤ f_offset < 0.215MHz	-12.5dBm	30 kHz
0.2 MHz ≤ Δf < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5dBm - 15 \cdot \left(\frac{f - offset}{MHz} - 0.215\right)dB$	30 kHz
(Note 3)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5dBm	30 kHz
1 MHz $\leq \Delta f \leq$ min(10 MHz , Δf_{max})	$1.5 \text{ MHz} \le f_\text{offset} < $ min(10.5 MHz, f_offset_{max})	-11.5dBm	1 MHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset _{max}	-15 dBm (Note 4)	1 MHz

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-2 below for 3 MHz channel bandwidth:

Table 6.6.3.5.2.2-2: Regional operating band unwanted emission limits in band 1, 3, 8, 33 or 34 for 3 MHz channel bandwidth for Category B

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 0.05 MHz	0.015 MHz ≤ f_offset < 0.065 MHz	$6.5dBm - 60 \cdot \left(\frac{f_{offset}}{MHz} - 0.015\right)dB$	30 kHz
0.05 MHz ≤ Δf < 0.15 MHz	0. 065 MHz ≤ f_offset < 0.165 MHz	$3.5dBm - 160 \cdot \left(\frac{f_{offset}}{MHz} - 0.065\right)dB$	30 kHz
0.15 MHz ≤ Δf < 0.2 MHz	0.165MHz ≤ f_offset < 0.215MHz	-12.5dBm	30 kHz
0.2 MHz ≤ Δf < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5dBm - 15 \cdot \left(\frac{f - offset}{MHz} - 0.21\right)$	30 kHz
(Note 3)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5dBm	30 kHz
1 MHz $\leq \Delta f \leq$ 6 MHz	1.5MHz ≤ f_offset < 6.5 MHz,	-11.5dBm	1 MHz
6 MHz $\leq \Delta f \leq \Delta f_{max}$	6.5 MHz ≤ f_offset < f_offset _{max}	-15 dBm	1 MHz

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-3 below for 1.4 MHz channel bandwidth:

Table 6.6.3.5.2.2-3: Regional operating band unwanted emission limits in band 1, 3, 8, 33 or 34for 1.4 MHz channel bandwidth for Category B

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 0.05 MHz	0.015 MHz ≤ f_offset < 0.065 MHz	$6.5dBm - 60 \cdot \left(\frac{f_{offset}}{MHz} - 0.015\right)dB$	30 kHz
0.05 MHz ≤ Δf < 0.15 MHz	0. 065 MHz ≤ f_offset < 0.165 MHz	$3.5dBm - 160 \cdot \left(\frac{f_{offset}}{MHz} - 0.065\right)dB$	30 kHz
$0.15 \text{ MHz} \le \Delta f < 0.2 \text{ MHz}$	0.165MHz ≤ f_offset < 0.215MHz	-12.5 dBm	30 kHz
0.2 MHz ≤ Δf < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5dBm - 15 \cdot \left(\frac{f - offset}{MHz} - 0.21\right)$	30 kHz
(Note 3)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5 dBm	30 kHz
1 MHz $\leq \Delta f \leq 2.8$ MHz	1.5 MHz ≤ f_offset < 3.3 MHz	-11.5 dBm	1 MHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$3.3 \text{ MHz} \leq f_offset < f_offset_{max}$	-15 dBm	1 MHz

6.6.3.5.2A Test requirements for Local Area BS (Category A and B)

For Local Area BS in E-UTRA bands \leq 3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2A-1, 6.6.3.5.2A-2 and 6.6.3.5.2A-3.

For Local Area BS in E-UTRA bands >3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2A-1a, 6.6.3.5.2A-2a and 6.6.3.5.2A-3a.

Table 6.6.3.5.2A-1: Local Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-19.5dBm - \frac{10}{1.4} \left(\frac{f_offset}{MHz} - 0.05 \right) dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-29.5 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$2.85 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-31 dBm	100 kHz

Table 6.6.3.5.2A-1a: Local Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-19.2dBm - \frac{10}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
$1.4 \text{ MHz} \leq \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	-29.2 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	2.85 MHz ≤ f_offset < f_offset _{max}	-31 dBm	100 kHz

Table 6.6.3.5.2A-2: Local Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-23.5dBm - \frac{10}{3} \left(\frac{f_offset}{MHz} - 0.05 \right) dB$	100 kHz
$3 \text{ MHz} \leq \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-33.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.05 MHz ≤ f_offset < f_offset _{max}	-35 dBm	100 kHz

Table 6.6.3.5.2A-2a: Local Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-23.2dBm - \frac{10}{3} \cdot \left(\frac{f_offset}{MHz} - 0.05 \right) dB$	100 kHz
3 MHz ≤ Δf < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-33.2 dBm	100 kHz
6 MHz $\leq \Delta f \leq \Delta f_{max}$	6.05 MHz ≤ f offset < f offset _{max}	-35 dBm	100 kHz

Table 6.6.3.5.2A-3: Local Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-28.5dBm - \frac{7}{5} \left(\frac{f - offset}{MHz} - 0.05 \right) dB$	100 kHz
$\begin{array}{c} 5 \text{ MHz} \leq \Delta f < \\ min(10 \text{ MHz}, \Delta f_{max}) \end{array}$	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-35.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.05 MHz ≤ f_offset < f_offset _{max}	-37 dBm (Note 4)	100 kHz

Table 6.6.3.5.2A-3a: Local Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-28.2dBm - \frac{7}{5} \cdot \left(\frac{f - offset}{MHz} - 0.05\right)dB$	100 kHz
$\begin{array}{c} 5 \text{ MHz} \leq \Delta f < \\ \min(10 \text{ MHz}, \Delta f_{max}) \end{array}$	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset _{max})	-35.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.05 MHz ≤ f_offset < f_offset _{max}	-37 dBm (Note 4)	100 kHz

6.6.3.5.2X Test requirements for Home BS (Category A and B)

For Home BS in E-UTRA bands \leq 3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2X-1, 6.6.3.5.2X-2 and 6.6.3.5.2X-3.

For Home BS in E-UTRA bands >3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2X-1a, 6.6.3.5.2X-2a and 6.6.3.5.2X-3a.

Table 6.6.3.5.2X-1: Home BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands ≤3GHz

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-28.5dBm + \frac{6}{1.4} \left(\frac{f - offset}{MHz} - 0.05 \right) dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-34.5 dBm	100 kHz
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{\text{max}}$	3.3 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ -50dBm, \ P < 2dBm \end{cases}$	1MHz
		(Note 5)	

Table 6.6.3.5.2X-1a: Home BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-28.2dBm - \frac{6}{1.4} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
1.4 MHz ≤ Δf < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-34.2 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	3.3 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ 50dBm, \ D \le 2dBm \end{cases}$	1MHz
		(-50 <i>dBm</i> , P<2dBm	
		(Note 5)	

Table 6.6.3.5.2X-2: Home BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-32.5dBm - 2\left(\frac{f_offset}{MHz} - 0.05\right)dB$	100 kHz
3 MHz ≤ Δf < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-38.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.5 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ -50dBm, \ P < 2dBm \end{cases}$	1MHz
		(Note 5)	

Table 6.6.3.5.2X-2a: Home BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-32.2dBm-2\cdot\left(\frac{f_offset}{MHz}-0.05\right)dB$	100 kHz
3 MHz ≤ Δf < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-38.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	6.5 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ -50dBm, \ P < 2dBm \end{cases}$ (Note 5)	1MHz

Table 6.6.3.5.2X-3: Home BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
0 MHz ≤ Δf < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-34.5dBm - \frac{6}{5} \left(\frac{f_offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz ≤ Δf < 10 MHz	5.05 MHz ≤ f_offset < 10.05 MHz	-40.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ -50dBm, \ P < 2dBm \end{cases}$ (Note 5)	1MHz

Table 6.6.3.5.2X-3a: Home BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
$0 \text{ MHz} \le \Delta f < 5 \text{ MHz}$	0.05 MHz ≤ f_offset < 5.05 MHz	$-34.2dBm - \frac{6}{5} \cdot \left(\frac{f_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz ≤ Δf < 10 MHz	5.05 MHz ≤ f_offset < 10.05 MHz	-40.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{\text{max}}$	10.5 MHz ≤ f_offset < f_offset _{max}	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ -50dBm, \ P < 2dBm \end{cases}$	1MHz
		(Note 5)	

6.6.3.5.3 Additional requirements

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 5, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.3-1.

Table 6.6.3.5.3-1: Additional operating band unwanted emission limits for E-UTRA bands <1GHz

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
1.4 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.005 MHz ≤ f_offset < 0.995 MHz	-14 dBm	10 kHz
3 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-13 dBm	30 kHz
5 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-15 dBm	30 kHz
10 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-13 dBm	100 kHz
15 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-13 dBm	100 kHz
20 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-13 dBm	100 kHz
All	1 MHz $\leq \Delta f < \Delta f_{max}$	1.05 MHz ≤ f_offset < f_offset _{max}	-13 dBm	100 kHz

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 2, 4, 10, 23, 25, 35, 36, 41, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.3-2.

Table 6.6.3.5.3-2: Additional operating band unwanted emission limits for E-UTRA bands>1GHz

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
1.4 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.005 MHz ≤ f_offset < 0.995 MHz	-14 dBm	10 kHz
3 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-13 dBm	30 kHz
5 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-15 dBm	30 kHz
10 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-13 dBm	100 kHz
15 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-15 dBm	100 kHz
20 MHz	$0 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-16 dBm	100 kHz
All	1 MHz $\leq \Delta f < \Delta f_{max}$	1.5 MHz ≤ f_offset < f_offset _{max}	-13 dBm	1 MHz

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 12, 13, 14, 17, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.3-3.

Table 6.6.3.5.3-3: Additional operating band unwanted emission limits for E-UTRA (bands 12, 13, 14 and 17)

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 1)
All	$0 \text{ MHz} \leq \Delta f < 100 \text{ kHz}$	0.015 MHz ≤ f_offset < 0.085 MHz	-13 dBm	30 kHz
All	100 kHz $\leq \Delta f < \Delta f_{max}$	150 kHz ≤ f_offset < f_offset _{max}	-13 dBm	100 kHz

In certain regions, the following requirements may apply to an E-UTRA TDD BS operating in the same geographic area and in the same operating band as another E-UTRA TDD system without synchronisation. For this case the emissions shall not exceed -52 dBm/MHz in the downlink operating band except in:

- The frequency range from 10 MHz below the lower channel edge to the frequency 10 MHz above the upper channel edge.

In certain regions the following requirement may apply for protection of DTT. For E-UTRA BS operating in Band 20, the level of emissions in the band 470-790 MHz, measured in an 8MHz filter bandwidth on centre frequencies F_{filter} according to Table 6.6.3.3-4, shall not exceed the maximum emission level $P_{\text{EM,N}}$ declared by the manufacturer. This requirement applies in the frequency range 470-790 MHz even though part of the range falls in the spurious domain.

Table 6.6.3.5.3-4: Declared emissions levels for protection of DTT

Filter centre frequency, Ffilter	Measurement bandwidth	Declared emission level [dBm]
$F_{\text{filter}} = 8*N + 306 \text{ (MHz)};$ $21 \le N \le 60$	8 MHz	P _{EM,N}

Note:

The regional requirement is defined in terms of EIRP (effective isotropic radiated power), which is dependent on both the BS emissions at the antenna connector and the deployment (including antenna gain and feeder loss). The requirement defined above provides the characteristics of the basestation needed to verify compliance with the regional requirement. Compliance with the regional requirement can be determined using the method outlined in Annex G of [2].

In certain regions the following requirement may apply for the protection of systems operating in frequency bands adjacent to band 1 as defined in clause 5.5, in geographic areas in which both an adjacent band service E-UTRA are deployed.

The power of any spurious emission shall not exceed:

Table 6.6.3.5.3-5: Emissions limits for protection of adjacent band services

Operating Band	Frequency range	Maximum Level	Measurement Bandwidth
1	2100-2105 MHz	-30 + 3.4 · (f - 2100 MHz) dBm	1 MHz
	2175-2180 MHz	-30 + 3.4 · (2180 MHz - f) dBm	1 MHz

The following notes are common to all subclauses in 6.6.3.5:

- NOTE 1: As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth can be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.
- NOTE 2: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.
- NOTE 3: This frequency range ensures that the range of values of f offset is continuous.
- NOTE 4: The requirement is not applicable when $\Delta f_{max} < 10$ MHz.
- NOTE 5 For Home BS, the parameter P is defined as the aggregated maximum power of all transmit antenna ports of Home BS.

In regions where FCC regulation applies, requirements for protection of GPS according to FCC Order DA 10-534 applies for operation in Band 24. The following normative requirement covers the base station, to be used together with other information about the site installation to verify compliance with the requirement in FCC Order DA 10-534. The requirement applies to BS operating in Band 24 to ensure that appropriate interference protection is provided to the 1559 – 1610 MHz band. This requirement applies to the frequency range 1559-1610 MHz, even though part of this range falls within the spurious domain.

The level of emissions in the 1559-1610 MHz band, measured in measurement bandwidth according to Table 6.6.3.5.3-6 shall not exceed the maximum emission levels P_{E_1MHz} and P_{E_1kHz} declared by the manufacturer.

Table 6.6.3.5.3-6: Declared emissions levels for protection of the 1559-1610 MHz band

Operating Band	Frequency range	Declared emission level [dBW] (Measurement bandwidth = 1 MHz)	Declared emission level [dBW] of discrete emissions of less than 700 Hz bandwidth (Measurement bandwidth = 1 kHz)
24	1559 - 1610 MHz	P _{E 1MHz}	P _{E 1kHz}

Note:

The regional requirement in FCC Order DA 10-534 is defined in terms of EIRP (effective isotropic radiated power), which is dependent on both the BS emissions at the antenna connector and the deployment (including antenna gain and feeder loss). The EIRP level is calculated using: $P_{EIRP} = P_E + G_{ant}$ where P_E denotes the BS unwanted emission level at the antenna connector, G_{ant} equals the BS antenna gain minus feeder loss. The requirement defined above provides the characteristics of the base station needed to verify compliance with the regional requirement.

6.6.4 Transmitter spurious emissions

6.6.4.1 Definition and applicability

Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions. This is measured at the base station antenna connector.

The transmitter spurious emission limits apply from 9 kHz to 12.75 GHz, excluding the frequency range from 10 MHz below the lowest frequency of the downlink operating band up to 10 MHz above the highest frequency of the downlink operating band (see Table 5.5-1). Exceptions are the requirements in Table 6.6.4.5.4-2, Table 6.6.4.5.4-3, Table 6.6.4.5.4-4, and specifically stated exceptions in Table 6.6.4.5.4-1 that apply also closer than 10 MHz from the downlink operating band. For some operating bands the upper frequency limit is higher than 12.75 GHz.

The requirements shall apply whatever the type of transmitter considered (single carrier or multi-carrier). It applies for all transmission modes foreseen by the manufacturer's specification.

Unless otherwise stated, all requirements are measured as mean power (RMS).

6.6.4.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 6.6.4.

6.6.4.3 Test Purpose

This test measures conducted spurious emission from the E-UTRA BS transmitter antenna connector, while the transmitter is in operation.

6.6.4.4 Method of Test

6.6.4.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

- 1) Connect the BS antenna connector to a measurement receiver according to Annex I.1.1 using an attenuator or a directional coupler if necessary
- 2) Measurements shall use a measurement bandwidth in accordance to the conditions in TS 36.104 [2] subclause 6.6.4.
- 3) Detection mode: True RMS.

4) Configure the BS with transmitters active at their maximum output power.

6.6.4.4.2 Procedure

- 1) Set the BS to transmit a signal according to E-TM1.1 at the manufacturer's specified maximum output power.
- 2) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value.

6.6.4.5 Test requirements

The measurement result in step 2 of 6.6.4.4.2 shall not exceed the maximum level specified in Table 6.6.4.5.1-1 to Table 6.6.4.5.6-1 if applicable for the BS under test.

NOTE: If a Test Requirement in this clause differs from the corresponding Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

As mandatory requirement, either subclause 6.6.4.5.1 (Category A limits) or subclause 6.6.4.5.2 (Category B limits) shall apply. The application of either Category A or Category B limits shall be the same as for Operating band unwanted emissions in subclause 6.6.3.

6.6.4.5.1 Spurious emissions (Category A)

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.1-1.

Table 6.6.4.5.1-1: BS Spurious emission limits, Category A

Frequency range	Maximum level	Measurement Bandwidth	Note
9kHz - 150kHz		1 kHz	Note 1
150kHz - 30MHz		10 kHz	Note 1
30MHz - 1GHz		100 kHz	Note 1
1GHz – 12.75 GHz	-13 dBm	1 MHz	Note 2
12.75 GHz – 5 th harmonic of the upper frequency	-13 dbiii	1 MHz	Note 2, Note 3
edge of the DL operating band in GHz			

NOTE 1: Bandwidth as in ITU-R SM.329 [5], s4.1

NOTE 2: Bandwidth as in ITU-R SM.329 [5], s4.1. Upper frequency as in ITU-R SM.329 [5], s2.5

table 1

NOTE 3: Applies only for Bands 22, 42 and 43.

6.6.4.5.2 Spurious emissions (Category B)

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.2-1.

Table 6.6.4.5.2-1: BS Spurious emissions limits, Category B

Frequency range	Maximum Level	Measurement Bandwidth	Note
9 kHz ↔ 150 kHz	-36 dBm	1 kHz	Note 1
150 kHz ↔ 30 MHz	-36 dBm	10 kHz	Note 1
30 MHz ↔ 1 GHz	-36 dBm	100 kHz	Note 1
1 GHz ↔ 12.75 GHz	-30 dBm	1 MHz	Note 2
12.75 GHz ↔ 5 th harmonic of the upper frequency edge of the DL operating band in GHz	-30 dBm	1 MHz	Note 2, Note 3

NOTE 1: Bandwidth as in ITU-R SM.329 [5], s4.1

NOTE 2: Bandwidth as in ITU-R SM.329 [5], s4.1. Upper frequency as in ITU-R SM.329 [5] , s2.5 table 1

NOTE 3: Applies only for Bands 22, 42 and 43.

6.6.4.5.3 Protection of the BS receiver of own or different BS

This requirement shall be applied for E-UTRA FDD operation in paired operating bands in order to prevent the receivers of the BSs being desensitised by emissions from a BS transmitter. It is measured at the transmit antenna port for any type of BS which has common or separate Tx/Rx antenna ports.

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.3-1.

Table 6.6.4.5.3-1: BS Spurious emissions limits for protection of the BS receiver

	Frequency range	Maximum Level	Measurement Bandwidth	Note
Wide Area BS	Ful_low - Ful_high	-96 dBm	100 kHz	
Local Area BS	Ful_low - Ful_high	-88 dBm	100 kHz	
Home BS	Ful_low - Ful_high	-88 dBm	100 kHz	

6.6.4.5.4 Co-existence with other systems in the same geographical area

6.6.4.5.4.1 Void

These requirements may be applied for the protection of system operating in frequency ranges other than the E-UTRA BS operating band. The limits may apply as an optional protection of such systems that are deployed in the same geographical area as the E-UTRA BS, or they may be set by local or regional regulation as a mandatory requirement for an E-UTRA operating band. It is in some cases not stated in the present document whether a requirement is mandatory or under what exact circumstances that a limit applies, since this is set by local or regional regulation. An overview of regional requirements in the present document is given in Clause 4.3.

Some requirements may apply for the protection of specific equipment (UE, MS and/or BS) or equipment operating in specific systems (GSM, CDMA, UTRA, E-UTRA, etc.) as listed below. The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.4-1 for a BS where requirements for co-existence with the system listed in the first column apply.

Table 6.6.4.5.4-1: BS Spurious emissions limits for E-UTRA BS for co-existence with systems operating in other frequency bands

System type for E-UTRA to co-exist with	Frequency range for co-existence requirement	Maximu m Level	Measurement Bandwidth	Note
GSM900	921 - 960 MHz	-57 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 8
	876 - 915 MHz	-61 dBm	100 kHz	For the frequency range 880-915 MHz, this requirement does not apply to E-UTRA BS operating in band 8, since it is already covered by the requirement in subclause 6.6.4.5.3.
DCS1800	1805 - 1880 MHz	-47 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 3.
	1710 - 1785 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 3, since it is already covered by the requirement in subclause 6.6.4.5.3.
PCS1900	1930 - 1990 MHz	-47 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 2, band 25 or band 36.
	1850 - 1910 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3. This requirement does not apply to E-UTRA BS operating in frequency band 35.
GSM850 or CDMA850	869 - 894 MHz	-57 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 5
	824 - 849 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 5, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band I or	2110 - 2170 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 1,
E-UTRA Band 1	1920 - 1980 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 1, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band II or	1930 - 1990 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 2 or 25.
E-UTRA Band 2	1850 - 1910 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3
UTRA FDD Band III or E-UTRA Band 3	1805 - 1880 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3.
Ç	1710 - 1785 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3 or 9, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in band 9, it applies for 1710 MHz to 1749.9 MHz and 1784.9 MHz to 1785 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band IV or	2110 - 2155 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 4 or 10
E-UTRA Band 4	1710 - 1755 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 4 or 10, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band V or	869 - 894 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 5
E-UTRA Band 5	824 - 849 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 5, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VI, XIX or	860 - 890 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 6, 18, 19.
E-UTRA Band 6, 18, 19	815 - 830 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 18, since it is already covered by the requirement in subclause 6.6.4.5.3.
	830 - 845 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 6, 19, since it is already covered by the requirement in subclause 6.6.4.5.3.
	2620 - 2690 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 7.

UTRA FDD	2500 - 2570 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band VII or E-UTRA Band				operating in band 7, since it is already covered by the requirement in subclause 6.6.4.5.3.
7				requirement in subclause 6.6.4.5.5.
UTRA FDD	925 - 960 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band VIII or	323 - 300 IVII IZ	-32 dbiii	1 1011 12	operating in band 8.
E-UTRA Band	880 - 915 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
8	000 010 11112	10 dBiii	1 1011 12	operating in band 8, since it is already covered by the
				requirement in subclause 6.6.4.5.3.
UTRA FDD	1844.9 - 1879.9	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band IX or	MHz	0_ 0		operating in band 3 or 9.
E-UTRA Band				approximity in carrier of the
9	1749.9 - 1784.9	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
	MHz			operating in band 3 or 9, since it is already covered by
				the requirement in subclause 6.6.4.5.3.
UTRA FDD	2110 - 2170 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band X or				operating in band 4 or 10
E-UTRA Band	1710 - 1770 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
10				operating in band 10, since it is already covered by the
				requirement in subclause 6.6.4.5.3. For E-UTRA BS
				operating in Band 4, it applies for 1755 MHz to
				1770 MHz, while the rest is covered in sub-clause
				6.6.4.5.3.
UTRA FDD	1475.9 - 1510.9	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XI or XXI	MHz	40 dD	4 MII-	operating in band 11 or 21
E-UTRA Band	1427.9 - 1447.9	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
11 or 21	MHz			operating in band 11, since it is already covered by the
	1447.9 - 1462.9	-49 dBm	1 MHz	requirement in subclause 6.6.4.5.3. This requirement does not apply to E-UTRA BS
	1447.9 - 1462.9 MHz	-49 dbiii	I IVITIZ	operating in band 21, since it is already covered by the
	IVII IZ			requirement in subclause 6.6.4.5.3.
UTRA FDD	729 - 746 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XII or	720 7 10 10112	OZ GDIII	1 1411 12	operating in band 12.
E-UTRA Band	699 - 716 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
12				operating in band 12, since it is already covered by the
				requirement in subclause 6.6.4.5.3.
UTRA FDD	746 - 756 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XIII or				operating in band 13.
E-UTRA Band	777 - 787 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
13				operating in band 13, since it is already covered by the
				requirement in subclause 6.6.4.5.3.
UTRA FDD	758 - 768 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XIV or				operating in band 14.
E-UTRA Band	788 - 798 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
14				operating in band 14, since it is already covered by the
E 1170 A D	704 740 1411	=0 ID	4.5.01.1	requirement in subclause 6.6.4.5.3.
E-UTRA Band	734 - 746 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
17	704 740 1411-	40 4D	4 MI !-	operating in band 17.
	704 - 716 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
				operating in band 17, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD	791 - 821 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XX or	131 OZ 1 IVIMZ	-JZ UDIII	I IVII7Z	operating in band 20.
E-UTRA Band	832 - 862 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
20	002 002 IVII IZ	ווושט	1 IVII 12	operating in band 20, since it is already covered by the
				requirement in subclause 6.6.4.5.3.
UTRA FDD	3510 – 3590 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XXII or	23.0 0000 111112	0_ 05		operating in band 22 or 42.
E-UTRA Band	3410 – 3490 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
22			<u></u>	operating in band 22, since it is already covered by the
				requirement in subclause 6.6.4.2. This requirement
				does not apply to E-UTRA BS operating in Band 42
E-UTRA Band	2180 - 2200 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
23				operating in band 23.

	2000 - 2020 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 23, since it is already covered by the requirement in subclause 6.6.4.5.3. This requirement does not apply to BS operating in Bands 2 or 25, where the limits are defined separately.
	2000 – 2010 MHz	-30 dBm	1 MHz	This requirement only applies to E-UTRA BS operating
	2010 – 2020 MHz	-49 dBm	1 MHz	in Band 2 or Band 25. This requirement applies starting 5 MHz above the Band 25 downlink operating band. (Note 4)
E-UTRA Band 24	1525 – 1559 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 24.
	1626.5 – 1660.5 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 24, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XXV or	1930 - 1995 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 2 or 25
E-UTRA Band 25	1850 - 1915 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 25, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 2, it applies for 1910 MHz to 1915 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA TDD Band a) or E- UTRA Band 33	1900 – 1920 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in Band 33.
UTRA TDD Band a) or E- UTRA Band 34	2010 – 2025 MHz	-52 dBm	1 MHz	This requirement does not apply eto E-UTRA BS operating in Band 34.
UTRA TDD Band b) or E- UTRA Band 35	1850 – 1910 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in Band 35.
UTRA TDD Band b) or E- UTRA Band 36	1930 – 1990 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in Band 2 and 36.
UTRA TDD Band c) or E- UTRA Band 37	1910 – 1930 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 37. This unpaired band is defined in ITU-R M.1036, but is pending any future deployment.
UTRA TDD Band d) or E- UTRA Band 38	2570 – 2620 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in Band 38.
UTRA TDD Band f) or E- UTRA Band 39	1880 – 1920MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 39.
UTRA TDD Band e) or E- UTRA Band 40	2300 – 2400MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 40.
E-UTRA Band 41	2496 – 2690 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 41.
E-UTRA Band 42	3400 – 3600 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 42 or 43.
E-UTRA Band 43	3600 – 3800 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band 42 or 43.

NOTE 4: This requirement does not apply to a Band 2 E-UTRA BS of an earlier release. In addition, it does not apply to an E-UTRA Band 2 BS from an earlier release manufactured before 31 December, 2012, which is upgraded to support Rel-10 features, where the upgrade does not affect existing RF parts of the radio unit related to this requirement.

NOTE 1: As defined in the scope for spurious emissions in this clause, except for Band 25, the co-existence requirements in Table 6.6.4.5.4-1 do not apply for the 10 MHz frequency range immediately outside the downlink operating band (see Table 5.5-1). Emission limits for this excluded frequency range may be covered by local or regional requirements.

NOTE 2: Table 6.6.4.5.4-1 assumes that two operating bands, where the frequency ranges in Table 5.5-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-existence requirements may apply that are not covered by the 3GPP specifications.

NOTE 3: TDD base stations deployed in the same geographical area, that are synchronized and use the same or adjacent operating bands can transmit without additional co-existence requirements. For unsynchronized base stations, special co-existence requirements may apply that are not covered by the 3GPP specifications.

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.4-1a for a Home BS where requirements for co-existence with a Home BS type listed in the first column apply.

Table 6.6.4.5.4-1a: Home BS Spurious emissions limits for co-existence with Home BS operating in other frequency bands

Type of coexistence BS Frequency Maximum Measurement		Note		
	range for co- location requirement	Level	Bandwidth	
UTRA FDD Band I or E- UTRA Band 1	1920 - 1980 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 1, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band II or E- UTRA Band 2	1850 - 1910 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band III or E- UTRA Band 3	1710 - 1785 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 3, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in band 9, it applies for 1710 MHz to 1749.9 MHz and 1784.9 MHz to 1785 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band IV or E- UTRA Band 4	1710 - 1755 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 4 or 10, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band V or E- UTRA Band 5	824 - 849 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 5, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VI, XIX or E-UTRA Band 6, 18, 19	815 - 830 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 18, since it is already covered by the requirement in subclause 6.6.4.5.3.
	830 - 845 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 6, 19, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VII or E- UTRA Band 7	2500 - 2570 MHz	-71 dBm	100 KHz	This requirement does not apply to Home BS operating in band 7, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VIII or E-UTRA Band 8	880 - 915 MHz	-71 dBm	100 KHz	This requirement does not apply to Home BS operating in band 8, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band IX or E- UTRA Band 9	1749.9 - 1784.9 MHz	-71 dBm	100 KHz	This requirement does not apply to Home BS operating in band 3 or 9, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band X or E- UTRA Band 10	1710 - 1770 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 10, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in Band 4, it applies for 1755 MHz to 1770 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band XI, XXI or E-UTRA Band 11, 21	1427.9 - 1447.9 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 11, since it is already covered by the requirement in subclause 6.6.4.5.3.
	1447.9 - 1462.9 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 21, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XII or E-UTRA Band 12	699 - 716 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 12, since it is already covered by the requirement in subclause 6.6.4.5.3.

_			1	_
UTRA FDD Band XIII or E-UTRA Band 13	777 - 787 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 13, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XIV or E-UTRA Band 14	788 - 798 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 14, since it is already covered by the requirement in subclause 6.6.4.5.3.
E-UTRA Band 17	704 - 716 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 17, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XX or E- UTRA Band 20	832 - 862 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 20, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XXII or E-UTRA Band 22	3410 - 3490 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 22, since it is already covered by the requirement in sub-clause 6.6.4.2. This requirement does not apply to Home BS operating in Band 42
E-UTRA Band 23	2000 - 2020 MHz	TBD	TBD	This requirement does not apply to Home BS operating in band 23, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
E-UTRA Band 24	1626.5 – 1660.5 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 24, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
UTRA FDD Band XXV or E-UTRA Band 25	1850 - 1915 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 25, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
UTRA TDD Band a) or E- UTRA Band 33	1900 - 1920 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 33.
UTRA TDD Band a) or E- UTRA Band 34	2010 - 2025 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 34.
UTRA TDD Band b) or E- UTRA Band 35	1850 - 1910 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 35.
UTRA TDD Band b) or E- UTRA Band 36	1930 - 1990 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 2 and 36.
UTRA TDD Band c) or E- UTRA Band 37	1910 - 1930 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 37. This unpaired band is defined in ITU-R M.1036, but is pending any future deployment.
UTRA TDD Band d) or E- UTRA Band 38	2570 - 2620 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 38.
UTRA TDD Band f) or E- UTRA Band 39	1880 - 1920MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 39.
UTRA TDD Band e) or E- UTRA Band 40	2300 - 2400MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 40.
E-UTRA Band 41	2496 – 2690 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 41.
E-UTRA Band 42	3400 - 3600 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 42 or 43
E-UTRA Band 43	3600 - 3800 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 42 or 43

NOTE 1: As defined in the scope for spurious emissions in this clause, the coexistence requirements in Table 6.6.4.5.4-1a do not apply for the 10 MHz frequency range immediately outside the Home BS transmit frequency range of a downlink operating band (see Table 5.5-1). Emission limits for this excluded frequency range may be covered by local or regional requirements.

- NOTE 2: Table 6.6.4.5.4-1a assumes that two operating bands, where the frequency ranges in Table 5.5-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-existence requirements may apply that are not covered by the 3GPP specifications.
- NOTE 3: TDD base stations deployed in the same geographical area, that are synchronized and use the same or adjacent operating bands can transmit without additional co-existence requirements. For unsynchronized base stations, special co-existence requirements may apply that are not covered by the 3GPP specifications.

The following requirement may be applied for the protection of PHS. This requirement is also applicable at specified frequencies falling between 10 MHz below the lowest BS transmitter frequency of the downlink operating band and 10 MHz above the highest BS transmitter frequency of the downlink operating band (see Table 5.5-1).

The power of any spurious emission shall not exceed:

Table 6.6.4.5.4-2: E-UTRA BS Spurious emissions limits for BS for co-existence with PHS

Frequency range	Maximum Level	Measurement Bandwidth	Note
1884.5 - 1915.7 MHz	-41 dBm	300 kHz	Applicable when co-existence with PHS system operating in 1884.5 -1915.7MHz

The following requirement shall be applied to BS operating in Bands 13 and 14 to ensure that appropriate interference protection is provided to 700 MHz public safety operations. This requirement is also applicable at the frequency range from 10 MHz below the lowest frequency of the BS transmitter operating band up to 10 MHz above the highest frequency of the BS transmitter operating band. The power of any spurious emission shall not exceed:

Table 6.6.4.5.4-3: BS Spurious emissions limits for protection of public safety operations

Operating Band	Band	Maximum Level	Measurement Bandwidth	Note
13	763 - 775 MHz	-46 dBm	6.25 kHz	
13	793 - 805 MHz	-46 dBm	6.25 kHz	
14	769 - 775 MHz	-46 dBm	6.25 kHz	
14	799 - 805 MHz	-46 dBm	6.25 kHz	

Table 6.6.4.5.4-4: Void

6.6.4.5.5 Co-location with other base stations

These requirements may be applied for the protection of other BS receivers when GSM900, DCS1800, PCS1900, GSM850, CDMA850, UTRA FDD, UTRA TDD and/or E-UTRA BS are co-located with an E-UTRA BS.

The requirements assume a 30 dB coupling loss between transmitter and receiver and are based on co-location with base stations of the same class.

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.5-1 for a Wide Area BS where requirements for co-location with a BS type listed in the first column apply.

Table 6.6.4.5.5-1: BS Spurious emissions limits for Wide Area BS co-located with another BS

Type of co-located BS	Frequency range for co-	Maximum	Measurement	Note
	location requirement	Level	Bandwidth	
Macro GSM900	876-915 MHz	-98 dBm	100 kHz	
Macro DCS1800	1710 - 1785 MHz	-98 dBm	100 kHz	
Macro PCS1900	1850 - 1910 MHz	-98 dBm	100 kHz	
Macro GSM850 or CDMA850	824 - 849 MHz	-98 dBm	100 kHz	
WA UTRA FDD Band I or E-UTRA Band 1	1920 - 1980 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band II or E-UTRA Band 2	1850 - 1910 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band III or E-UTRA Band 3	1710 - 1785 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band IV or E-UTRA Band 4	1710 - 1755 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band V or E-UTRA Band 5	824 - 849 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band VI, XIX or E-UTRA Band 6, 19	830 - 845 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band VII or E-UTRA Band 7	2500 - 2570 MHz	-96 dBm	100 KHz	
WA UTRA FDD Band VIII or E-UTRA Band 8	880 - 915 MHz	-96 dBm	100 KHz	
WA UTRA FDD Band IX or E-UTRA Band 9	1749.9 - 1784.9 MHz	-96 dBm	100 KHz	
WA UTRA FDD Band X or E-UTRA Band 10	1710 - 1770 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band XI or E-UTRA Band 11	1427.9 –1447.9 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band XII or E-UTRA Band 12	699 - 716 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band XIII or	777 - 787 MHz	-96 dBm	100 kHz	
E-UTRA Band 13 WA UTRA FDD Band XIV or	788 - 798 MHz	-96 dBm	100 kHz	
E-UTRA Band 14			100111	
WA E-UTRA Band 17	704 - 716 MHz	-96 dBm	100 kHz	
WA E-UTRA Band 18 WA UTRA FDD Band XX	815 - 830 MHz 832 - 862 MHz	-96 dBm -96 dBm	100 kHz 100 kHz	
E-UTRA Band 20 WA E-UTRA Band 24	1626 F 1660 F MU-	OC dDm	100 kH=	
WA UTRA FDD Band XXI	1626.5 – 1660.5 MHz 1447.9 – 1462.9 MHz	-96 dBm -96 dBm	100 kHz 100 kHz	
or E-UTRA Band 21	0440 0400 1411	00 10	400111	This
WA UTRA FDD Band XXII or E-UTRA Band 22	3410 – 3490 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42
WA E-UTRA Band 23	2000 - 2020 MHz	-96 dBm	100 kHz	
WA UTRA TDD Band a) or E-UTRA Band 33	1900 - 1920 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 33
WA UTRA TDD Band a) or E-UTRA Band 34	2010 - 2025 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 34
WA UTRA TDD Band b) or E-UTRA Band 35	1850 – 1910 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 35

WA UTRA TDD Band b) or E-UTRA Band 36	1930 - 1990 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 2 and 36
WA UTRA TDD Band c) or E-UTRA Band 37	1910 - 1930 MHz	-96 dBm	100 kHz	This is not applicable to E-UTRA BS operating in Band 37. This unpaired band is defined in ITU-R M.1036, but is pending any future deployment.
WA UTRA TDD Band d) or E-UTRA Band 38	2570 – 2620 MHz	-96 dBm	100 kHz	This is not applicable to E-UTRA BS operating in Band 38.
WA UTRA TDD Band f) or E-UTRA Band 39	1880 <i>–</i> 1920MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 33 and 39
WA UTRA TDD Band e) or E-UTRA Band 40	2300 – 2400MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 40
WA E-UTRA Band 41	2496 – 2690 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 41
WA E-UTRA Band 42	3400 – 3600 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43
WA E-UTRA Band 43	3600 – 3800 MHz	-96 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.5-2 for a Local Area BS where requirements for co-location with a BS type listed in the first column apply.

Table 6.6.4.5.5-2: BS Spurious emissions limits for Local Area BS co-located with another BS

Type of an Innated PS	Eroguanay ranga for as	Maximum	Magguramant	Note
Type of co-located BS	Frequency range for co- location requirement	Maximum Level	Measurement Bandwidth	Note
Pico GSM900	876-915 MHz	-70 dBm	100 kHz	
Pico DCS1800	1710 - 1785 MHz	-80 dBm	100 kHz	
Pico PCS1900	1850 - 1910 MHz	-80 dBm	100 kHz	
Pico GSM850	824 - 849 MHz	-70 dBm	100 kHz	
LA UTRA FDD Band I or E-	1920 - 1980 MHz	-88 dBm	100 kHz	
UTRA Band 1	1020 1000 11112	oo abiii	100 1112	
LA UTRA FDD Band II or	1850 - 1910 MHz	-88 dBm	100 kHz	
E-UTRA Band 2				
LA UTRA FDD Band III or	1710 - 1785 MHz	-88 dBm	100 kHz	
E-UTRA Band 3				
LA UTRA FDD Band IV or	1710 - 1755 MHz	-88 dBm	100 kHz	
E-UTRA Band 4				
LA UTRA FDD Band V or	824 - 849 MHz	-88 dBm	100 kHz	
E-UTRA Band 5				
LA UTRA FDD Band VI,	830 - 845 MHz	-88 dBm	100 kHz	
XIX or E-UTRA Band 6, 19			122101	
LA UTRA FDD Band VII or	2500 - 2570 MHz	-88 dBm	100 KHz	
E-UTRA Band 7	000 045 MIL-	00 dD	400 1/11-	
LA UTRA FDD Band VIII or	880 - 915 MHz	-88 dBm	100 KHz	
E-UTRA Band 8 LA UTRA FDD Band IX or	1749.9 - 1784.9 MHz	-88 dBm	100 KHz	
E-UTRA Band 9	1749.9 - 1764.9 MHZ	-00 UDIII	100 KHZ	
LA UTRA FDD Band X or	1710 - 1770 MHz	-88 dBm	100 kHz	
E-UTRA Band 10	17 10 - 17 70 IVII 12	-00 dbiii	100 KHZ	
LA UTRA FDD Band XI or	1427.9 - 1447.9 MHz	-88 dBm	100 kHz	
E-UTRA Band 11	1127.6 1117.6 111.2	00 05	10011112	
LA UTRA FDD Band XII or	699 - 716 MHz	-88 dBm	100 kHz	
E-UTRA Band 12				
LA UTRA FDD Band XIII or	777 - 787 MHz	-88 dBm	100 kHz	
E-UTRA Band 13				
LA UTRA FDD Band XIV or	788 - 798 MHz	-88 dBm	100 kHz	
E-UTRA Band 14				
LA E-UTRA Band 17	704 - 716 MHz	-88 dBm	100 kHz	
LA E-UTRA Band 18	815 - 830 MHz	-88 dBm	100 KHz	
LA UTRA FDD Band XX or	832 - 862 MHz	-88 dBm	100 kHz	
E-UTRA Band 20	=			
LA UTRA FDD Band XXI or	1447.9 – 1462.9 MHz	-88 dBm	100 kHz	
E-UTRA Band 21	2440 2400 MH=	00 dD	400 141 1-	This is not
LA UTRA FDD Band XXII or E-UTRA Band 22	3410 – 3490 MHz	-88 dBm	100 kHz	This is not applicable to E-
OI E-OTRA Ballu 22				UTRA BS operating
				in Band 42
LA E-UTRA Band 23	2000 - 2020 MHz	-88 dBm	100 kHz	III Dalla 42
LA E-UTRA Band 24	1626.5 – 1660.5 MHz	-88 dBm	100 KHz	
LA UTRA FDD Band XXV	1850 – 1915 MHz	-88 dBm	100 KHz	
or E-UTRA Band 25				
LA UTRA TDD Band a) or	1900 - 1920 MHz	-88 dBm	100 kHz	This is not
E-UTRA Band 33				applicable to E-
				UTRA BS operating
				in Band 33
LA UTRA TDD Band a) or	2010 - 2025 MHz	-88 dBm	100 kHz	This is not
E-UTRA Band 34				applicable to E-
				UTRA BS operating
LAUTDA TOO S	4050 4040	00 15	400111	in Band 34
LA UTRA TDD Band b) or	1850 – 1910 MHz	-88 dBm	100 kHz	This is not
E-UTRA Band 35				applicable to E-
				UTRA BS operating
I A LITPA TOD Band b) or	1930 - 1990 MHz	-88 dBm	100 kHz	in Band 35 This is not
LA UTRA TDD Band b) or E-UTRA Band 36	1930 - 1990 MIDZ	-00 UDIII	100 KHZ	applicable to E-
E-011A balla 30				UTRA BS operating
				in Band 2 and 36
	I		I.	2010 2 010 00

LA UTRA TDD Band c) or E-UTRA Band 37	1910 - 1930 MHz	-88 dBm	100 kHz	This is not applicable to E-UTRA BS operating in Band 37. This unpaired band is
				defined in ITU-R M.1036, but is pending any future deployment.
LA UTRA TDD Band d) or E-UTRA Band 38	2570 – 2620 MHz	-88 dBm	100 kHz	This is not applicable to E-UTRA BS operating in Band 38.
LA UTRA TDD Band f) or E-UTRA Band 39	1880 <i>–</i> 1920MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 33 and 39
LA UTRA TDD Band e) or E-UTRA Band 40	2300 – 2400MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 40
LA E-UTRA Band 41	2496 – 2690 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 41
LA E-UTRA Band 42	3400 – 3600 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43
LA E-UTRA Band 43	3600 – 3800 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43

- NOTE 1: As defined in the scope for spurious emissions in this clause, the co-location requirements in Table 6.6.4.5.5-1 and Table 6.6.4.5.5-2 do not apply for the 10 MHz frequency range immediately outside the BS transmit frequency range of a downlink operating band (see Table 5.5-1). The current state-of-the-art technology does not allow a single generic solution for co-location with other system on adjacent frequencies for 30dB BS-BS minimum coupling loss. However, there are certain site-engineering solutions that can be used. These techniques are addressed in TR 25.942 [11].
- NOTE 2: Table 6.6.4.5.5-1 and Table 6.6.4.5.5-2 assume that two operating bands, where the corresponding eNode B transmit and receive frequency ranges in Table 5.3-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-location requirements may apply that are not covered by the 3GPP specifications.
- NOTE 3: Co-located TDD base stations that are synchronized and using the same or adjacent operating band can transmit without special co-locations requirements. For unsynchronized base stations, special co-location requirements may apply that are not covered by the 3GPP specifications.

6.7 Transmitter intermodulation

6.7.1 Definition and applicability

The transmit intermodulation requirement is a measure of the capability of the transmitter to inhibit the generation of signals in its non linear elements caused by presence of the own transmit signal and an interfering signal reaching the transmitter via the antenna. The requirement applies during the transmitter ON period and the transmitter transient period.

The transmit intermodulation level is the power of the intermodulation products when an E-UTRA signal of channel bandwidth 5 MHz as an interfering signal is injected into an antenna connector at a mean power level of 30 dB lower than that of the mean power of the wanted signal.

The wanted signal is E-UTRA single carrier, or multi-carrier, or multiple contiguously aggregated carriers. The interfering signal centre frequency offset from the wanted signal carrier centre frequency shall be as in Table 6.7.1-1.

Table 6.7.1-1 Interfering signal centre frequency offset from wanted signal carrier centre frequency

Parameter	Value	
Interfering signal centre frequency offset from	± 2.5 MHz	
the lower (higher) edge of the wanted signal	± 7.5 MHz	
	± 12.5 MHz	
NOTE 1: Interfering signal positions that are pa	rtially or completely outside of the downlink operating band of the	
base station are excluded from the red	quirement, unless the interfering signal positions fall within the	
frequency range of adjacent downlink operating bands in the same geographical area.		
NOTE 2: NOTE 1 is not applied in Band 1, 3, 8,	9, 11, 18, 19, 21, 34 in certain regions.	

The wanted signal channel bandwidth $BW_{Channel}$ shall be the maximum channel bandwidth supported by the base station.

The requirements shall apply whatever the type of transmitter considered (single carrier or multi-carrier). It applies for all transmission modes foreseen by the manufacturer's specification.

In case that none of the interfering signal positions according to the conditions of Table 6.7.1-1 is applicable, a wanted signal channel bandwidth $BW_{Channel}$ less than the maximum channel bandwidth supported by the base station shall be selected so that at least one applicable interfering signal position according to Table 6.7.1-1 is obtained. If the BS does not support any channel bandwidths less than the maximum supported bandwidth, an interfering signal outside or partly outside the downlink operating band shall used.

6.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.7.1.

6.7.3 Test purpose

The test purpose is to verify the ability of the BS transmitter to restrict the generation of intermodulation products in its non linear elements caused by presence of the wanted signal and an interfering signal reaching the transmitter via the antenna to below specified levels.

6.7.4 Method of test

6.7.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

RF bandwidth position to be tested: B_{RFBW} , M_{RFBW} and T_{RFBW} ; see subclause 4.7.1.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.2.

6.7.4.2 Procedures

- 1) Generate the wanted signal according to E-TM1.1 at specified maximum output power, Pmax.
- 2) Generate the interfering signal according to E-TM1.1, with 5 MHz channel bandwidth and a centre frequency offset according to the conditions of Table 6.7.1-1.
- 3) Adjust ATT1 so that level of the E-UTRA modulated interfering signal is as defined in subclause 6.7.5.

- 4) Perform the Out-of-band emission tests as specified in subclauses 6.6.2 and 6.6.3, for all third and fifth order intermodulation products which appear in the frequency ranges defined in subclauses 6.6.2 and 6.6.3. The width of the intermodulation products shall be taken into account.
- 5) Perform the Transmitter spurious emissions test as specified in subclause 6.6.4, for all third and fifth order intermodulation products which appear in the frequency ranges defined in subclause 6.6.4. The width of the intermodulation products shall be taken into account.
- 6) Verify that the emission level does not exceed the required level with the exception of interfering signal frequencies.
- 7) Repeat the test for the remaining interfering signal centre frequency offset s according to the conditions of Table 6.7.1-1.

NOTE: The third order intermodulation products are centred at 2F1±F2 and 2F2±F1. The fifth order intermodulation products are centred at 3F1±2F2, 3F2±2F1, 4F1±F2, and 4F2±F1 where F1 represents the wanted signal centre frequency and F2 represents the interfering signal centre frequency. The width of intermodulation products are

- $(n*BW_{Channel} + m*5MHz)$ for the nF1±mF2 products
- $(n*5MHz + m*BW_{Channel})$ for the nF2±mF1 products

6.7.5 Test Requirements

In the frequency range relevant for this test, the transmit intermodulation level shall not exceed the out-of-band emission requirements of subclauses 6.6.2 and 6.6.3 and transmitter spurious emissions requirements of subclause 6.6.4 in the presence of a E-UTRA modulated interfering signal with a mean power 30 dB below the mean power of the wanted signal.

The measurements for out-of-band emissions and spurious emission requirements due to intermodulation can be limited to the frequency ranges of all third and fifth order intermodulation products, excluding the channel bandwidths of the wanted and interfering signals.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7 Receiver characteristics

7.1 General

General test conditions for receiver tests are given in Clause 4, including interpretation of measurement results and configurations for testing. BS configurations for the tests are defined in Clause 4.5, while Annex H provides an informative description of E-UTRAN test cases.

Unless otherwise stated the requirements in clause 7 apply during the base station receive period.

The throughput requirements defined for the receiver characteristics in this clause do not assume HARQ transmissions.

When the BS is configured to receive multiple carriers, all the throughput requirements are applicable for each received carrier. For ACS, blocking and intermodulation characteristics, the negative offsets of the interfering signal apply relative to the lower edge and positive offsets of the interfering signal apply relative to the higher edge.

7.2 Reference sensitivity level

7.2.1 Definition and applicability

The reference sensitivity power level P_{REFSENS} is the minimum mean power received at the antenna connector at which a throughput requirement shall be met for a specified reference measurement channel.

The test is set up according to Annex I.2.1 and performed without interfering signal power applied to the BS antenna connector. For duplex operation, the measurement configuration principle is indicated for one duplex branch in Annex I.2.1. The reference point for signal power is at the input of the receiver (antenna connector).

7.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.2.1.

7.2.3 Test purpose

To verify that at the BS Reference sensitivity level the throughput requirement shall be met for a specified reference measurement channel.

7.2.4 Method of testing

7.2.4.1 Initial conditions

Test environment: normal; see subclause D.2

RF channels to be tested: B, M and T; see subclause 4.7.

The following additional tests shall be performed:

a) On each of B, M and T, the test shall be performed under extreme power supply as defined in subclause D.5

NOTE: Tests under extreme power supply also test extreme temperature.

1) Connect the test equipment as shown in Annex I.2.1.

7.2.4.2 Procedure

- 1) For FDD BS start BS transmission according to E-TM 1.1 at Pmax
- 2) Set the test signal mean power as specified in table 7.2-1 for Wide Area BS, in Table 7.2-2 for Local Area BS and in Table 7.2-3 for Home BS.

- 3) Measure the throughput according to Annex E.
- 4) Repeat the measurement for the other RX port.

7.2.5 Test requirement

For each measured E-UTRA carrier, the throughput shall be \geq 95% of the maximum throughput of the reference measurement channel as specified in Annex A.1 with parameters specified in Table 7.2-1 for Wide Area BS, in Table 7.2-2 for Local Area BS and in Table 7.2-3 for Home BS..

Table 7.2-1: Wide Area BS reference sensitivity levels

E-UTRA channel bandwidth [MHz]	Reference measurement channel		ensitivity power level, FSENS [dBm]
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz
1.4	FRC A1-1 in Annex A.1	-106.1	-105.8
3	FRC A1-2 in Annex A.1	-102.3	-102.0
5	FRC A1-3 in Annex A.1	-100.8	-100.5
10	FRC A1-3 in Annex A.1*	-100.8	-100.5
15	FRC A1-3 in Annex A.1*	-100.8	-100.5
20	FRC A1-3 in Annex A.1*	-100.8	-100.5

Note*: Preference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A1-3 mapped to disjoint frequency ranges with a width of 25 Resource Blocks each.

Table 7.2-2: Local Area BS reference sensitivity levels

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Reference sensitivity power level, PREFSENS [dBm]	
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz
1.4	FRC A1-1 in Annex A.1	-98.1	-97.8
3	FRC A1-2 in Annex A.1	-94.3	-94.0
5	FRC A1-3 in Annex A.1	-92.8	-92.5
10	FRC A1-3 in Annex A.1*	-92.8	-92.5
15	FRC A1-3 in Annex A.1*	-92.8	-92.5
20	FRC A1-3 in Annex A.1*	-92.8	-92.5

Note*: PREFSENS is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A1-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each

Table 7.2-3: Home BS reference sensitivity levels

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Reference sensitivity power level, PREFSENS [dBm]	
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz
1.4	FRC A1-1 in Annex A.1	-98.1	-97.8
3	FRC A1-2 in Annex A.1	-94.3	-94.0
5	FRC A1-3 in Annex A.1	-92.8	-92.5
10	FRC A1-3 in Annex A.1*	-92.8	-92.5
15	FRC A1-3 in Annex A.1*	-92.8	-92.5
20	FRC A1-3 in Annex A.1*	-92.8	-92.5

Note*: Preference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A1-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7.3 Dynamic range

7.3.1 Definition and applicability

The dynamic range is specified as a measure of the capability of the receiver to receive a wanted signal in the presence of an interfering signal inside the received channel bandwidth. In this condition a throughput requirement shall be met for a specified reference measurement channel. The interfering signal for the dynamic range requirement is an AWGN signal.

7.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.3.1.

7.3.3 Test purpose

To verify that at the BS receiver dynamic range, the relative throughput shall fulfil the specified limit.

7.3.4 Method of testing

7.3.4.1 Initial conditions

Test environment: normal; see subclause D.2

RF channels to be tested: B, M and T; see subclause 4.7

1) Connect the test equipment as shown in Annex I.2.2.

7.3.4.2 Procedure

For each supported E-UTRA channel BW:

- 1) Adjust the signal generator for the wanted signal as specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS and in Table 7.3-3 for Home BS.
- 2) Adjust the AWGN generator level as specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS and in Table 7.3-3 for Home BS and set the frequency to the same frequency as the tested channel.
- 3) Measure the throughput according to Annex E and verify that it is within the specified level.

Repeat the measurement for the other RX port.

7.3.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in Annex A with parameters specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS and in Table 7.3-3 for Home BS.

Table 7.3-1: Wide Area BS dynamic range

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BW _{Config}	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-76.0	-88.7	AWGN
3	FRC A2-2 in Annex A.2	-72.1	-84.7	AWGN
5	FRC A2-3 in Annex A.2	-69.9	-82.5	AWGN
10	FRC A2-3 in Annex A.2*	-69.9	-79.5	AWGN
15	FRC A2-3 in Annex A.2*	-69.9	-77.7	AWGN
20	FRC A2-3 in Annex A.2*	-69.9	-76.4	AWGN

Note*: The wanted signal mean power is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each

Table 7.3-2: Local Area BS dynamic range

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BWConfig	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-68.0	-80.7	AWGN
3	FRC A2-2 in Annex A.2	-64.1	-76.7	AWGN
5	FRC A2-3 in Annex A.2	-61.9	-74.5	AWGN
10	FRC A2-3 in Annex A.2*	-61.9	-71.5	AWGN
15	FRC A2-3 in Annex A.2*	-61.9	-69.7	AWGN
20	FRC A2-3 in Annex A.2*	-61.9	-68.4	AWGN
Note*: The wanted signal mean power is the power level of a single instance of the reference measurement channel. This requirement shall be met for				

Table 7.3-3: Home BS dynamic range

each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BW _{Config}	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-31.5	-44.2	AWGN
3	FRC A2-2 in Annex A.2	-27.6	-40.2	AWGN
5	FRC A2-3 in Annex A.2	-25.4	-38	AWGN
10	FRC A2-3 in Annex A.2*	-25. 4	-35	AWGN
15	FRC A2-3 in Annex A.2*	-25. 4	-33.2	AWGN
20	FRC A2-3 in Annex A.2*	-25. 4	-31.9	AWGN
Note*: The wanted signal mean power is the power level of a single instance of the reference measurement channel. This requirement shall be met for				

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each

7.4 In-channel selectivity

7.4.1 Definition and applicability

In-channel selectivity (ICS) is a measure of the receiver ability to receive a wanted signal at its assigned Resource Block locations in the presence of an interfering signal received at a larger power spectral density. In this condition a throughput requirement shall be met for a specified reference measurement channel. The interfering signal shall be an E-UTRA signal as specified in Annex C and shall be time aligned with the wanted signal.

7.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.4.1.

7.4.3 Test purpose

The purpose of this test is to verify the BS receiver ability to suppress the IQ leakage.

7.4.4 Method of testing

7.4.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested: B, M and T; see subclause 4.7

1) Connect the test equipment as shown in Annex I.2.3.

7.4.4.2 Procedure

For each supported E-UTRA channel BW:

- Adjust the signal generator for the wanted signal as specified in Table 7.4-1 for Wide Area BS, in Table 7.4-2 for Local Area BS and in Table 7.4-3 for Home BS on one side of the F_C .
- 2) Adjust the signal generator for the interfering signal as specified in Table 7.4-1 for Wide Area BS, in Table 7.4-2 for Local Area BS and in Table 7.4-3 for Home BS at opposite side of the F_C and adjacent to the wanted signal.
- 3) Measure the throughput according to Annex E.
- Repeat the measurement with the wanted signal on the other side of the F_C , and the interfering signal at opposite side of the F_C and adjacent to the wanted signal.
- 5) Repeat the measurement for the other RX port.

7.4.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in Annex A with parameters specified in Table 7.4-1 for Wide Area BS, in Table 7.4-2 for Local Area BS and in Table 7.4-3 for Home BS.

Table 7.4-1 E-UTRA Wide Area BS in-channel selectivity

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-105.5	-105.1	-87	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-100.7	-100.3	-84	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-98.6	-98.2	-81	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-97.1	-96.7	-77	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-97.1	-96.7	-77	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-97.1	-96.7	-77	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

Table 7.4-2 E-UTRA Local Area BS in-channel selectivity

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-97.5	-97.1	-79	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-92.7	-92.3	-76	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-90.6	-90.2	-73	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-89.1	-88.7	-69	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-89.1	-88.7	-69	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-89.1	-88.7	-69	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

E-UTRA Interfering Reference channel Type of interfering measurement Wanted signal mean power [dBm] signal mean bandwidth signal channel power [dBm] (MHz) 3.0GHz < f ≤ f ≤ 3.0GHz 4.2GHz A1-4 in Annex 1.4 MHz E-UTRA 1.4 -97.5 -97.1 -79 signal, 3 RBs A.1 A1-5 in Annex 3 MHz E-UTRA -76 3 -92.7 -92.3 signal, 6 RBs A.1 A1-2 in Annex 5 MHz E-UTRA 5 -90.6 -90.2 -73 A.1 signal, 10 RBs A1-3 in Annex 10 MHz E-UTRA 10 -89.1 -88.7 -69 signal, 25 RBs A.1 A1-3 in Annex 15 MHz E-UTRA 15 -89.1 -88.7 -69 A.1* signal, 25 RBs* A1-3 in Annex 20 MHz E-UTRA 20 -88.7 -69 -89.1A.1* signal, 25 RBs* Note*: Wanted and interfering signal are placed adjacently around Fc

Table 7.4-3 E-UTRA Home BS in-channel selectivity

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7.5 Adjacent Channel Selectivity (ACS) and narrow-band blocking

7.5.1 Definition and applicability

Adjacent channel selectivity (ACS) is a measure of the receiver's ability to receive a wanted signal at its assigned channel frequency in the presence of an adjacent channel signal with a specified centre frequency offset of the interfering signal to the band edge of a victim system.

The interfering signal shall be an E-UTRA signal as specified in Annex C.

7.5.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.5.

7.5.3 Test purpose

The test purpose is to verify the ability of the BS receiver filter to suppress interfering signals in the channels adjacent to the wanted channel.

7.5.4 Method of test

7.5.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

RF bandwidth position to be tested: M_{RFBW} , see subclause 4.7.1.

1) Set-up the measurement system as shown in Annex I.2.4.

7.5.4.2 Procedure for Adjacent Channel Selectivity

- 1) Generate the wanted signal and adjust the input level to the base station under test to the level specified in Table 7.5-3 for Wide Area BS, in Table 7.5-4 for Local Area BS and in Table 7.5-5 for Home BS.
- 2) Set-up the interfering signal at the adjacent channel frequency and adjust the interfering signal level at the base station input to the level defined in Table 7.5-3 for Wide Area B, in Table 7.5-4 for Local Area BS S and in Table 7.5-5 for Home BS.
- 3) Measure the throughput according to Annex E, for multi-carrier operation the throughput shall be measured for relevant carriers specified by the test configuration in subclause 4.10.
- 4) Repeat the test for the port, which was terminated.

7.5.4.3 Procedure for narrow-band blocking

- 1) For FDD BS start BS transmission according to E-TM 1.1 at Pmax, for multi-carrier operation start BS transmission according to applicable test configuration in 4.10 with the same carrier locations used for the wanted signal with the sum of the carrier powers equal to Pmax.
- 2) Generate the wanted signal and adjust the input level to the base station under test to the level specified in Table 7.5-1.
- 3) Adjust the interfering signal level at the base station input to the level defined in Table 7.5-1. Set-up and sweep the interfering RB centre frequency offset to the channel edge of the wanted signal according to Table 7.5-2.
- 4) Measure the throughput according to Annex E, for multi-carrier operation the throughput shall be measured for relevant carriers specified by the test configuration in subclause 4.10.
- 5) Repeat the test for the port, which was terminated.

7.5.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel.

For Wide Area BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Table 7.5-1 and 7.5-2 for narrowband blocking and 7.5-3 for ACS. The reference measurement channel for the wanted signal is identified in Table 7.2-1 for each channel bandwidth and further specified in Annex A.

For Local Area BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Tables 7.5-1 and 7.5-2 for narrowband blocking and 7.5-4 for ACS. The reference measurement channel for the wanted signal is identified in Table 7.2-2 for each channel bandwidth and further specified in Annex A.

For Home BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Table 7.5-1 and 7.5-2 for narrowband blocking and 7.5-5 for ACS. The reference measurement channel for the wanted signal is identified in Table 7.2-3 for each channel bandwidth and further specified in Annex A.

Table 7.5-1: Narrowband blocking requirement

	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Type of interfering signal	
Wide Area BS	Prefsens + 6dB*	-49	See Table 7.5-2	
Local Area BS	Prefsens +6dB*	-41	See Table 7.5-2	
Home BS	Prefsens + 14dB*	-33	See Table 7.5-2	
Note*: Prefsens depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.				

Table 7.5-2: Interfering signal for Narrowband blocking requirement

E-UTRA channel BW of the lowest (highest) carrier received [MHz]	Interfering RB centre frequency offset to the lower (higher) edge [kHz]	Type of interfering signal
1.4	±(252.5+m*180), m=0, 1, 2, 3, 4, 5	1.4 MHz E-UTRA signal, 1 RB*
3	±(247.5+m*180), m=0, 1, 2, 3, 4, 7, 10, 13	3 MHz E-UTRA signal, 1 RB*
5	±(342.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*
10	±(347.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*
15	±(352.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*
20	±(342.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*

Note*: Interfering signal consisting of one resource block is positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (higher) edge.

Table 7.5-3: Adjacent channel selectivity for Wide Area BS

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the lower (higher) edge [MHz]	Type of interfering signal			
1.4	P _{REFSENS} + 11dB*	-52	±0.7025	1.4MHz E-UTRA signal			
3	Prefsens + 8dB*	-52	±1.5075	3MHz E-UTRA signal			
5	Prefsens + 6dB*	-52	±2.5025	5MHz E-UTRA signal			
10	Prefsens + 6dB*	-52	±2.5075	5MHz E-UTRA signal			
15	Prefsens + 6dB*	-52	±2.5125	5MHz E-UTRA signal			
20	Prefsens + 6dB*	-52	±2.5025	5MHz E-UTRA signal			
Note*: P	Note*: Prefsens depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.						

Table 7.5-4: Adjacent channel selectivity for Local Area BS

E-UTRA channel bandwidth [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the channel edge of the wanted signal [MHz]	Type of interfering signal			
1.4	P _{REFSENS} + 11dB*	-44	0.7025	1.4MHz E-UTRA signal			
3	Prefsens + 8dB*	-44	1.5075	3MHz E-UTRA signal			
5	Prefsens + 6dB*	-44	2.5025	5MHz E-UTRA signal			
10	P _{REFSENS} + 6dB*	-44	2.5075	5MHz E-UTRA signal			
15	Prefsens + 6dB*	-44	2.5125	5MHz E-UTRA signal			
20	P _{REFSENS} + 6dB*	-44	2.5025	5MHz E-UTRA signal			
Note*: PR	Note*: Prefsens depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.						

Table 7.5-5: Adjacent channel selectivity for Home BS

E-UTRA channel bandwidth [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the channel edge of the wanted signal [MHz]	Type of interfering signal		
1.4	P _{REFSENS} + 27dB*	-28	0.7025	1.4MHz E-UTRA signal		
3	Prefsens + 24dB*	-28	1.5075	3MHz E-UTRA signal		
5	Prefsens + 22dB*	-28	2.5025	5MHz E-UTRA signal		
10	Prefsens + 22dB*	-28	2.5075	5MHz E-UTRA signal		
15	P _{REFSENS} + 22dB*	-28	2.5125	5MHz E-UTRA signal		
20	Prefsens + 22dB*	-28	2.5025	5MHz E-UTRA signal		
Note*: Preserve depends on the channel handwidth as specified in TS 36 10/1 [2] subclause 7.2.1						

Prefsens depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1. Note*:

If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7.6 Blocking

7.6.1 Definition and applicability

The blocking characteristics is a measure of the receiver ability to receive a wanted signal at its assigned channel in the presence of an unwanted interferer, which are either a 1.4MHz, 3MHz or 5MHz E-UTRA signal for in-band blocking or a CW signal for out-of-band blocking. The interfering E-UTRA signal shall be as specified in Annex C.

The blocking performance requirement applies as specified in the Tables 7.6-1, 7.6-1a, 7.6-1b and 7.6-2 in clause 7.6.5.

7.6.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 7.6.1.

7.6.3 Test purpose

The test stresses the ability of the BS receiver to withstand high-level interference from unwanted signals at specified frequency offsets without undue degradation of its sensitivity.

7.6.4 Method of test

7.6.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested: M see subclause 4.7. The BS shall be configured to operate as close to the centre of the operating band (see Table 5.5-1) as possible.

RF bandwidth position to be tested: M_{RFBW} , see subclause 4.7.1.

Channel bandwidths to be tested:

- a) In the interferer frequency range (F_{UL_low} -20) MHz to (F_{UL_high} +20) MHz the requirement shall be tested with the lowest and the highest bandwidth supported by the BS.
- b) In the interferer frequency ranges 1 MHz to $(F_{UL_low}-20)$ MHz and $(F_{UL_high}+20)$ MHz to 12750 MHz the requirement shall be tested only with the lowest bandwidth supported by the BS.
- 1) Connect the signal generator for the wanted signal and the signal generator for the interfering signal to the antenna connector of one Rx port as shown in Annex I.2.5.
- 2) Terminate any other Rx port not under test.
- 3) Start to transmit according to reference measurement channel in annex A.1 to the BS under test. The level of the wanted signal measured at the BS antenna connector shall be set to the level specified in subclause 7.6.5.

7.6.4.2 Procedure

1) For FDD BS start BS transmission according to E-TM 1.1 at Pmax, for multi-carrier operation start BS transmission according to applicable test configuration in 4.10 with the same carrier locations used for the wanted signal with the sum of the carrier powers equal to Pmax.

The transmitter may be turned off for the out-of-band blocker tests when the frequency of the blocker is such that no IM2 or IM3 products fall inside the bandwidth of the wanted signal.

2) Adjust the signal generators to the type of interfering signals, levels and the frequency offsets as specified in Tables 7.6-1, 7.6-2 and 7.6-3 for Wide Area BS, in Tables 7.6-1a, 7.6-2 and 7.6-4 for Local Area BS and in Table 7.6-1b and 7.6-2 for Home BS. The E-UTRA interfering signal shall be swept with a step size of 1 MHz starting from the minimum offset to the channel edges of the wanted signal as specified in Table 7.6-2. The CW interfering signal shall be swept with a step size of 1 MHz within the range specified in Table 7.6-1 and 7.6-3 for Wide Area BS, in Table 7.6-1a and 7.6-4 for Local Area BS and in Table 7.6-1b for Home BS.

- 3) Measure the throughput of the wanted signal at the BS receiver according to Annex E, for multi-carrier operation the throughput shall be measured for relevant carriers specified by the test configuration in subclause 4.10.
- 4) Interchange the connections of the BS Rx ports and repeat the measurements according to steps (1) to (3).

7.6.5 Test Requirements

7.6.5.1 General requirement

For each measured E-UTRA carrier, the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel, with a wanted and an interfering signal coupled to BS antenna input using the parameters in Table 7.6-1, 7.6-1a, 7.6-1b and 7.6-2. The reference measurement channel for the wanted signal is identified in Tables 7.2-1 and 7.2-2 for each channel bandwidth and further specified in Annex A.

Table 7.6-1: Blocking performance requirement for Wide Area BS

Operating Band		ency nal [N	of Interfering /IHz]	Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm]	Interfering signal centre frequency minimum frequency offset from the lower (higher) edge [MHz]	Type of Interfering Signal							
1-7, 9-11, 13, 14, 18,	(F _{UL_low} -20)	to	(F _{UL_high} +20)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
19, 21-23, 24, 33-43	1 (F _{UL_high} +20)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier							
8	(F _{UL_low} -20)	to	(F _{UL_high} +10)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
	1 (F _{UL_high} +10)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier							
12	(Ful_low -20)	to	(F _{UL_high} +13)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
	1 (F _{UL_high} +13)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier							
17	(Ful_low -20)	to	(F _{UL_high} +18)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
	1 (F _{UL_high} +18)	to to	(F _{UL_low} -20) 12750	-15	P _{REFSENS} +6dB*	_	CW carrier							
20	(Ful_low -11)	to	(F _{UL_high} +20)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
	1 (F _{UL_high} +20)	to to	(F _{UL_low} -11) 12750	-15	P _{REFSENS} +6dB*	_	CW carrier							
25	(Ful_low -20)	to	(F _{UL_high} +15)	-43	Prefsens +6dB*	See table 7.6-2	See table 7.6-2							
	1 (F _{UL_high} +15)	to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier							
Note*: PR		on th	e channel band	width as specifie	d in TS 36.104 [2] s	subclause 7.2.1.	(* OL_mgn * **)							

NOTE: Table 7.6-1 assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Table 7.6-1a: Blocking performance requirement for Local Area BS

Operating Band	Centre Frequ Sigi	ency nal [N		Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm]	Interfering signal centre frequency minimum frequency offset from the channel edge of the wanted signal [MHz]	Type of Interfering Signal
1-7, 9-11, 13-14,	(Ful_low -20)	to	(F _{UL_high} +20)	-35	Prefsens +6dB*	See table 7.6-2	See table 7.6-2
18,19,21- 23, 24, 33- 43	1 (F _{UL_high} +20)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier
8	(F _{UL_low} -20)	to	(F _{UL_high} +10)	-35	Prefsens +6dB*	See table 7.6-2	See table 7.6-2
	1 (F _{UL_high} +10)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier
12	(F _{UL_low} -20)	to	(F _{UL_high} +13)	-35	Prefsens +6dB*	See table 7.6-2	See table 7.6-2
	1 (F _{UL_high} +13)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier
17	(F _{UL_low} -20)	to	(F _{UL_high} +18)	-35	P _{REFSENS} +6dB*	See table 7.6-2	See table 7.6-2
	1 (F _{UL_high} +18)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier
20	(F _{UL_low} -11)	to	(F _{UL_high} +20)	-35	P _{REFSENS} +6dB*	See table 7.6-2	See table 7.6-2
	1 (F _{UL_high} +20)	to to	(F _{UL_low} -11) 12750	-15	Prefsens +6dB*	_	CW carrier
25	(F _{UL_low} -20)	to	(F _{UL_high} +15)	-35	P _{REFSENS} +6dB*	See table 7.6-2	See table 7.6-2
	1 (F _{UL_high} +15)	to	(F _{UL_low} -20) 12750	-15	Prefsens +6dB*	_	CW carrier

NOTE: Table 7.6-1a assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Table 7.6-1b: Blocking performance requirement for Home BS

Operating Band		ency nal [N	of Interfering /IHz]	Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm]	Interfering signal centre frequency minimum frequency offset from the channel edge of the wanted signal [MHz]	Type of Interfering Signal		
1-7, 9-11, 13, 14,	(Ful_low -20)	to	(F _{UL_high} +20)	-27	Prefsens +14dB*	See table 7.6-2	See table 7.6-2		
18,19, 21- 23, 24, 33- 43	1 (F _{UL_high} +20)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +14dB*		CW carrier		
8	(F _{UL_low} -20)	to	(F _{UL_high} +10)	-27	Prefsens +14dB*	See table 7.6-2	See table 7.6-2		
	1 (F _{UL_high} +10)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +14dB*		CW carrier		
12	(F _{UL_low} -20)	to	(F _{UL_high} +13)	-27	Prefsens +14dB*	See table 7.6-2	See table 7.6-2		
	1 (F _{UL_high} +13)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +14dB*	_	CW carrier		
17	(F _{UL_low} -20)	to	$(F_{UL_high} + 18)$	-27	P _{REFSENS} +14dB*	See table 7.6-2	See table 7.6-2		
	1 (F _{UL_high} +18)	to to	(F _{UL_low} -20) 12750	-15	Prefsens +14dB*	_	CW carrier		
20	(F _{UL_low} -11)	to	$(F_{UL_high} + 20)$	-27	P _{REFSENS} +14dB*	See table 7.6-2	See table 7.6-2		
	1 (F _{UL_high} +20)	to to	(F _{UL_low} -11) 12750	-15	Prefsens +14dB*	_	CW carrier		
25	(F _{UL_low} -20)	to	(F _{UL_high} +15)	-27	P _{REFSENS} +14dB*	See table 7.6-2	See table 7.6-2		
	1 (F _{UL_high} +15)	to	(F _{UL_low} -20) 12750	-15	Prefsens +14dB*	_	CW carrier		
Note*: Pr	REFSENS depends	FSENS depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.							

NOTE: Table 7.6-1b assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Table 7.6-2: Interfering signals for Blocking performance requirement

E-UTRA channel BW of the lowest (highest) carrier received [MHz]	Interfering signal centre frequency minimum offset to the lower (higher) edge [MHz]	Type of interfering signal
1.4	±2.1	1.4MHz E-UTRA signal
3	±4.5	3MHz E-UTRA signal
5	±7.5	5MHz E-UTRA signal
10	±7.5	5MHz E-UTRA signal
15	±7.5	5MHz E-UTRA signal
20	±7.5	5MHz E-UTRA signal

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7.6.5.2 Co-location with other base stations

This additional blocking requirement may be applied for the protection of E-UTRA BS receivers when GSM, CMDA, UTRA or E-UTRA BS operating in a different frequency band are co-located with an E-UTRA BS. The requirement is applicable to all channel bandwidths supported by the E-UTRA BS.

The requirements in this clause assume a 30 dB coupling loss between interfering transmitter and E-UTRA BS receiver and are based on co-location with base stations of the same class.

For each measured E-UTRA carrier, the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel, with a wanted and an interfering signal coupled to BS antenna input using the parameters in Table 7.6-3 for Wide Area BS and 7.6-4 for Local Area BS. The reference measurement channel for the wanted signal is identified in Tables 7.2-1 and 7.2-2 for each channel bandwidth and further specified in Annex A.

Table 7.6-3: Blocking performance requirement for E-UTRA Wide Area BS when co-located with BS in other frequency bands.

Co-located BS type	Centre Frequency of	Interfering Signal mean	Wanted Signal mean power (dBm)	Type of Interfering
	Interfering Signal (MHz)	power (dBm)	,	Signal
Macro GSM850 or CDMA850	869 – 894	+16	P _{REFSENS} + 6dB*	CW carrier
Macro GSM900	921 – 960	+16	Prefsens + 6dB*	CW carrier
Macro DCS1800	1805 – 1880	+16	Prefsens + 6dB*	CW carrier
Macro PCS1900	1930 – 1990	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band I or E-UTRA Band 1	2110 – 2170	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band II or E-UTRA Band 2	1930 – 1990	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band III or E-UTRA Band 3	1805 – 1880	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band IV or E-UTRA Band 4	2110 – 2155	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band V or E-UTRA Band 5	869 – 894	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band VI or E-UTRA Band 6	875 – 885	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band VII or E-UTRA Band 7	2620 – 2690	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band VIII or E-UTRA Band 8	925 – 960	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band IX or E-UTRA Band 9	1844.9 – 1879.9	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band X or E-UTRA Band 10	2110 – 2170	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XI or E-UTRA Band 11	1475.9 –1495.9	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XII or E-UTRA Band 12	729 - 746	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XIIII or E-UTRA Band 13	746 - 756	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA FDD Band XIV or E-UTRA Band 14	758 - 768	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 17	734 - 746	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 18	860 - 875	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA FDD Band XIX or E-UTRA Band 19	875 - 890	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA FDD Band XX or E-UTRA Band 20	791 - 821	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 24	1525 – 1559	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XXI or E-UTRA Band 21	1495.9 – 1510.9	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XXII or E-UTRA Band 22	3510 – 3590	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 23	2180-2200	+16	Prefsens + 6dB*	CW carrier
WA UTRA FDD Band XXV or E-UTRA Band 25	1930 – 1995	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA TDD Band a) or E-UTRA TDD in Band 33	1900-1920	+16	Prefsens + 6dB*	CW carrier
WA UTRA TDD Band a) or E-UTRA TDD in Band 34	2010-2025	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA TDD Band b) or E-UTRA TDD in Band 35	1850-1910	+16	Prefsens + 6dB*	CW carrier
WA UTRA TDD Band b) or E-UTRA TDD in Band 36	1930-1990	+16	Prefsens + 6dB*	CW carrier
WA UTRA TDD Band c) or E-UTRA TDD Band 37	1910-1930	+16	Prefsens + 6dB*	CW carrier
WA UTRA TDD Band d) or E-UTRA Band 38	2570-2620	+16	Prefsens + 6dB*	CW carrier
WA UTRA TDD Band f) or E-UTRA Band 39	1880-1920	+16	P _{REFSENS} + 6dB*	CW carrier
WA UTRA TDD Band e) or E-UTRA Band 40	2300-2400	+16	Prefsens + 6dB*	CW carrier

WA E-UTRA Band 41	2496-2690	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 42	3400 - 3600	+16	Prefsens + 6dB*	CW carrier
WA E-UTRA Band 43	3600 - 3800	+16	Prefsens + 6dB*	CW carrier

Note*: Preference is related to the channel bandwidth and specified in TS 36.104 [2] subclause 7.2.1.

NOTE 1: Except for a BS operating in Band 13, these requirements do not apply when the interfering signal falls within the uplink operating band or in the 10 MHz immediately outside the uplink operating band.

For a BS operating in band 13 the requirements do not apply when the interfering signal

falls within the frequency range 768-797 MHz.

For BS operating in Band 42 or 43, the requirements do not apply when the interfering signal falls within the Band 42 or 43 uplink operating bands and the Base Stations are synchronized.

NOTE 2: Some combinations of bands may not be possible to co-site based on the requirements above. The current state-of-the-art technology does not allow a single generic solution for co-location of UTRA TDD or E-UTRA TDD with E-UTRA FDD on adjacent frequencies for 30dB BS-BS minimum coupling loss. However, there are certain site-engineering solutions that can be used. These techniques are addressed in TR 25.942 [11].

Table 7.6-4: Blocking performance requirement for Local Area BS when co-located with BS in other frequency bands.

Co-located BS type	Centre	Interfering	Wanted Signal	Type of
, , , , , , , , , , , , , , , , , , ,	Frequency of Interfering Signal (MHz)	Signal mean power (dBm)	mean power (dBm)	Interfering Signal
Pico GSM850	869 – 894	-7	Prefsens + 6dB*	CW carrier
Pico GSM900	921 – 960	-7	Prefsens + 6dB*	CW carrier
Pico DCS1800	1805 – 1880	-4	Prefsens + 6dB*	CW carrier
Pico PCS1900	1930 – 1990	-4	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band I or E-		·		
UTRA Band 1	2110 – 2170	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band II or E-UTRA Band 2	1930 – 1990	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band III or E-UTRA Band 3	1805 – 1880	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA FDD Band IV or E-UTRA Band 4	2110 – 2155	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band V or E-UTRA Band 5	869 – 894	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA FDD Band VI or E-UTRA Band 6	875 – 885	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band VII or E-UTRA Band 7	2620 – 2690	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA FDD Band VIII or E-UTRA Band 8	925 – 960	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band IX or E-UTRA Band 9	1844.9 – 1879.9	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band X or E-UTRA Band 10	2110 – 2170	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XI or E-UTRA Band 11	1475.9 - 1495.9	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XII or E-UTRA Band 12	729 - 746	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA FDD Band XIIII or E-UTRA Band 13	746 - 756	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XIV or E-UTRA Band 14	758 - 768	-6	P _{REFSENS} + 6dB*	CW carrier
LA E-UTRA Band 17	734 - 746	-6	Prefsens + 6dB*	CW carrier
LA E-UTRA Band 18	860 - 875	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XIX				
or E-UTRA Band 19 LA UTRA FDD Band XX or	875 - 890	-6	Prefsens + 6dB*	CW carrier
E-UTRA Band 20	791 - 821	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XXI or E-UTRA Band 21	1495.9 – 1510.9	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XXII or E-UTRA Band 22	3510 – 3590	-6	Prefsens + 6dB*	CW carrier
LA E-UTRA Band 23	2180-2200	-6	Prefsens + 6dB*	CW carrier
LA E-UTRA Band 24	1525 – 1559	-6	Prefsens + 6dB*	CW carrier
LA UTRA FDD Band XXV or E-UTRA Band 25	1930 – 1995	-6	Prefsens + 6dB*	CW carrier
LA UTRA TDD Band a) or E-UTRA Band 33	1900-1920	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA TDD Band a) or E-UTRA Band 34	2010-2025	-6	Prefsens + 6dB*	CW carrier
LA UTRA TDD Band b) or E-UTRA Band 35	1850-1910	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA TDD Band b) or E-UTRA Band 36	1930-1990	-6	Prefsens + 6dB*	CW carrier
LA UTRA TDD Band c) or E-UTRA Band 37	1910-1930	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA TDD in Band d) or E-UTRA Band 38	2570-2620	-6	Prefsens + 6dB*	CW carrier
LA UTRA TDD in Band f) or E-UTRA Band 39	1880-1920	-6	P _{REFSENS} + 6dB*	CW carrier
LA UTRA TDD in Band e) or E-UTRA Band 40	2300-2400	-6	Prefsens + 6dB*	CW carrier
LA E-UTRA Band 41	2496-2690	-6	Prefsens + 6dB*	CW carrier

LA E-UTF	LA E-UTRA Band 42 3400 - 3600		-6	Prefsens + 6dB*	CW carrier			
LA E-UTF	RA Band 43	3600 - 3800	-6	Prefsens + 6dB*	CW carrier			
Note*:	Prefsens is related	to the channel band	width and specif	ied in TS 36.104 [2] sul	oclause			
	7.2.1.							
NOTE 1:	Except for a BS or	erating in Band 13, t	hese requireme	nts do not apply when t	he			
	interfering signal fa	alls within the uplink	operating band o	or in the 10 MHz immed	liately			
	outside the uplink	operating band.			-			
	For a BS operating	g in band 13 the requ	irements do not	apply when the interfer	ing signal			
	falls within the free	uency range 768-79	7 MHz.					
	For BS operating i	n Band 42 or 43, the	requirements do	not apply when the int	erfering			
	signal falls within t	he Band 42 or 43 upl	ink operating ba	inds and the Base Stati	ons are			
	synchronized.							
NOTE 2:	Some combination	is of bands may not b	oe possible to co	o-site based on the requ	irements			
	above. The curren	above. The current state-of-the-art technology does not allow a single generic solution for						
	co-location of UTR	co-location of UTRA TDD or E-UTRA TDD with E-UTRA FDD on adjacent frequencies for						
	30dB BS-BS minir	num coupling loss. H	However, there a	re certain site-engineer	ring solutions			
	that can be used.	These techniques are	e addressed in T	R 25.942 [11].				

7.7 Receiver spurious emissions

7.7.1 Definition and applicability

The spurious emissions power is the power of emissions generated or amplified in a receiver that appear at the BS receiver antenna connector. The requirements apply to all BS with separate RX and TX antenna ports. The test shall be performed when both TX and RX are on, with the TX port terminated.

For TDD BS with common RX and TX antenna port the requirement applies during the Transmitter OFF period. For FDD BS with common RX and TX antenna port the transmitter spurious emission as specified in clause 6.6.4 is valid.

7.7.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 7.7.1.

7.7.3 Test purpose

The test purpose is to verify the ability of the BS to limit the interference caused by receiver spurious emissions to other systems.

7.7.4 Method of test

7.7.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested: M, see subclause 4.7.

RF bandwidth position to be tested: M_{RFBW} , see subclause 4.7.1.

- 1) Connect a measurement receiver to the BS antenna connector as shown in Annex I.2.6.
- 2) Enable the BS receiver.
- 3) Terminate the BS Tx antenna connector as shown in Annex I.2.6.

7.7.4.2 Procedure

- 1) Start BS transmission according to E-TM 1.1 at Pmax, for multi-carrier operation start BS transmission according to applicable test configuration in 4.10 with the sum of the carrier powers equal to Pmax.
- 2) Set measurement equipment parameters as specified in table 7.7-1.

- 3) Measure the spurious emissions over each frequency range described in subclause 7.7.5.
- 4) Repeat the test using diversity antenna connector if available.

7.7.5 Test requirements

The power of any spurious emission shall not exceed the levels in Table 7.7-1.

In addition to the requirements in Table 7.7-1, the power of any spurious emission shall not exceed the levels specified for Protection of the E-UTRA FDD BS receiver of own or different BS in Clause 6.6.4.5.3 and for Co-existence with other systems in the same geographical area in Clause 6.6.4.5.4. In addition, the co-existence requirements for co-located base stations specified in subclause 6.6.4.5.5 may also be applied.

Table 7.7-1: General spurious emission test requirement

Frequency range	Maximum level	Measurement Bandwidth	Note
30MHz - 1 GHz	-57 dBm	100 kHz	
1 GHz - 12.75 GHz	-47 dBm	1 MHz	
12.75 GHz - 5 th harmonic of the upper frequency edge of the UL operating band in GHz	-47 dBm	1 MHz	Applies only for Bands 22, 42 and 43.

NOTE: The frequency range between 2.5 * BW_{Channel} below the first carrier frequency and 2.5 * BW_{Channel} above the last carrier frequency transmitted by the BS, where BW_{Channel} is the channel bandwidth according to Table 5.6-1, may be excluded from the requirement. However, frequencies that are more than 10 MHz below the lowest frequency of the BS downlink operating band or more than 10 MHz above the highest frequency of the BS downlink operating band (see Table 5.5-1) shall not be excluded from the requirement.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

7.8 Receiver intermodulation

7.8.1 Definition and applicability

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two interfering signals which have a specific frequency relationship to the wanted signal. Interfering signals shall be a CW signal and an E-UTRA signal as specified in Annex C.

7.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.8.1.

7.8.3 Test purpose

The test purpose is to verify the ability of the BS receiver to inhibit the generation of intermodulation products in its non-linear elements caused by the presence of two high-level interfering signals at frequencies with a specific relationship to the frequency of the wanted signal.

7.8.4 Method of test

7.8.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested: B, M and T; see subclause 4.7.

RF bandwidth position to be tested: B_{RFBW} and T_{RFBW} , see subclause 4.7.1.

1) Set-up the measurement system as shown in Annex I.2.7.

7.8.4.2 Procedures

1) Generate the wanted signal and adjust the signal level to the BS under test to the level specified in Table 7.8-1.

- 2) Adjust the signal generators to the type of interfering signals, levels and the frequency offsets as specified in Table 7.8-2 for intermodulation requirement and Table 7.8-3, Table 7.8-4 and Table 7.8-5 for narrowband intermodulation requirement.
- 3) Adjust the signal generators to obtain the specified level of interfering signal at the BS input.
- 4) Measure the throughput according to Annex E, for multi-carrier operation the throughput shall be measured for relevant carriers specified by the test configuration in subclause 4.10.
- 5) Repeat the whole test for the port which was terminated.

7.8.5 Test requirements

For eahc measured E-UTRA carrier, the throughput shall be \geq 95% of the maximum throughput of the reference measurement channel, with a wanted signal at the assigned channel frequency and two interfering signals with the conditions specified in Table 7.8-1 and Table 7.8-2 for intermodulation performance and in Table 7.8-3, Table 7.8-4 and Table 7.8-5 for narrowband intermodulation performance. The reference measurement channel for the wanted

signal is identified in Table 7.2-1, Table 7.2-2 and Table 7.2-3 for each channel bandwidth and further specified in Annex A.

Table 7.8-1: Intermodulation performance requirement

BS type	ype Wanted signal Interfering signal mean power [dBm]		Type of interfering signal
Wide Area BS	Prefsens + 6dB*	-52	
Local Area BS	Prefsens + 6dB*	-44	See Table 7.8-2
Home BS	P _{REFSENS} + 14dB*	-36	

Note*: Prefsens depends on the channel bandwidth as specified in TS 36.104 [2]

subclause 7.2.1. For E-UTRA channel bandwidths 10, 15 and 20 MHz this requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals.

Table 7.8-2: Interfering signal for Intermodulation performance requirement

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Interfering signal centre frequency offset from the lower (higher) edge [MHz]	Type of interfering signal
1.4	±2.1	CW
1.4	±4.9	1.4MHz E-UTRA signal
3	±4.5	CW
3	±10.5	3MHz E-UTRA signal
5	±7.5	CW
5	±17.5	5MHz E-UTRA signal
10	±7. 375	CW
10	±17.5	5MHz E-UTRA signal
15	±7.25	CW
15	±17.5	5MHz E-UTRA signal
20	±7.125	CW
20	±17.5	5MHz E-UTRA signal

Table 7.8-3: Narrowband intermodulation performance requirement for Wide Area BS

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the lower (higher) edge [kHz]	Type of interfering signal
4.4	D	-52	±270	CW
1.4	Prefsens + 6dB*	-52	±790	1.4 MHz E-UTRA signal, 1 RB**
	D	-52	±270	CW
3	P _{REFSENS} + 6dB*	-52	±780	3.0 MHz E-UTRA signal, 1 RB**
5	P _{REFSENS} + 6dB*	-52	±360	CW
5		-52	±1060	5 MHz E-UTRA signal, 1 RB**
40	Prefsens + 6dB*	-52	±325	CW
10	(***)	-52	±1240	5 MHz E-UTRA signal, 1 RB**
45	Prefsens + 6dB*	-52	±380	CW
15	(***)	-52	±1600	5MHz E-UTRA signal, 1 RB**
20	Prefsens + 6dB*	-52	±345	CW
20	(***)	-52	±1780	5MHz E-UTRA signal, 1 RB**

Note*: PREFSENS is related to the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.

Note**: Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (higher) edge.

Note***: This requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals

Table 7.8-4: Narrowband intermodulation performance requirement for Local Area BS

E-UTRA channel bandwidth [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the channel edge of the wanted signal [kHz]	Type of interfering signal
4.4	D	-44	270	CW
1.4	P _{REFSENS} + 6dB*	-44	790	1.4 MHz E-UTRA signal, 1 RB**
	D . 04D*	-44	275	CW
3	Prefsens + 6dB*	-44	790	3.0 MHz E-UTRA signal, 1 RB**
	D	-44	360	CW
5	Prefsens + 6dB*	-44	1060	5 MHz E-UTRA signal, 1 RB**
40	Prefsens + 6dB*	-44	415	CW
10	(***)	-44	1420	5 MHz E-UTRA signal, 1 RB**
45	Prefsens + 6dB*	-44	380	CW
15	(***)	-44	1600	5MHz E-UTRA signal, 1 RB**
	Prefsens + 6dB*	-44	345	CW
20	(***)	-44	1780	5MHz E-UTRA signal, 1 RB**

Note*: PREFSENS is related to the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.

Note**:

Interfering signal consisting of one resource block positioned at the stated offset.

This requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge Note***: adjacent to the interfering signals

Table 7.8-5: Narrowband intermodulation performance requirement for Home BS

E-UTRA channel bandwidth [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the channel edge of the wanted signal [kHz]	Type of interfering signal
		-36	270	CW
1.4	Prefsens + 14dB*	-36	790	1.4 MHz E-UTRA signal, 1 RB**
		-36	270	CW
3	3 Prefsens + 14dB*	-36	780	3.0 MHz E-UTRA signal, 1 RB**
		-36	360	CW
5	Prefsens + 14dB*	-36	1060	5 MHz E-UTRA signal, 1 RB**
	D . 14dD*	-36	325	CW
10	P _{REFSENS} + 14dB* (***)	-36	1240	5 MHz E-UTRA signal, 1 RB**
	D 1 14dD*	-36	380	CW
15 Prefse	Prefsens + 14dB* (***)	-36	1600	5MHz E-UTRA signal, 1 RB**
	D 1 14dD*	-36	345	CW
20	Prefsens + 14dB* (***)	-36	1780	5MHz E-UTRA signal, 1 RB**
Note*: P	REFSENS is related to the char	nnel bandwidth as specifi	ed in TS 36.104 [2] sub	clause 7.2.1.

Note**: Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of

the interfering signal is located adjacently to the channel bandwidth of the wanted signal.

Note***: This requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8 Performance requirement

8.1 General

Performance requirements are specified for a number of test environments and multipath channel classes.

Unless stated otherwise, performance requirements apply for a single carrier only. Performance requirements for a BS supporting carrier aggregation are defined in terms of single carrier requirements. The requirements only apply to those measurement channels that are supported by the base station.

The performance requirements for High Speed Train conditions defined in Annex B.3 are optional.

The performance requirements for UL timing adjustment scenario 2 defined in Annex B.4 are optional.

For BS with receiver antenna diversity the required SNR shall be applied separately at each antenna port.

In tests performed with signal generators a synchronization signal may be provided, from the base station to the signal generator, to enable correct timing of the wanted signal.

For tests in clause 8 the transmitter may be off.

8.2 Performance requirements for PUSCH

8.2.1 Performance requirements of PUSCH in multipath fading propagation conditions transmission on single antenna port

8.2.1.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput for a given SNR. The required throughput is expressed as a fraction of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths and not supporting carrier aggregation only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

For a BS supporting carrier aggregation only the CC combination with largest aggregated bandwidth and the largest number of component carriers is used for the test. For this CC combination the tests using full PRB allocation FRC are conducted on per CC basis and measured by the required SNR levels corresponding to the bandwidths used on the different CCs.

For a BS supporting carrier aggregation the tests with single PRB FRC are conducted on any single component carrier only.

8.2.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.1.1.

8.2.1.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput under multipath fading propagation conditions for a given SNR.

8.2.1.4 Method of test

8.2.1.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M: see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.2.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.1.4.2-1.

Table 8.2.1.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7dBm / 1.08MHz
3	-88.7dBm / 2.7MHz
5	-86.5dBm / 4.5MHz
10	-83.5dBm / 9MHz
15	-81.7dBm / 13.5MHz
20	-80.4dBm / 18MHz

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in annex A and the test parameters in Table 8.2.1.4.2-2. For reference channels using 1 resource block the resource block in the middle of the channel bandwidth shall be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.

Table 8.2.1.4.2-2 Test parameters for testing PUSCH

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.1.5-1 to 8.2.1.5-6 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.1.5-1 to 8.2.1.5-6 applicable for the base station, measure the throughput, according to annex E.

8.2.1.5 Test Requirement

The throughput measured according to subclause 8.2.1.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.1.5-1 to 8.2.1.5-6.

Table 8.2.1.5-1 Test requirements for PUSCH, 1.4 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
	_		(Annex B)			
1	2	Normal	EPA 5Hz Low	A3-2	30%	-3.5
					70%	0.7
				A4-3	70%	11.2
				A5-2	70%	18.3
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	5.0
					70%	11.9
			E) (A = 0.1.1	A5-1	70%	19.2
			EVA 70Hz	A3-2	30%	-3.3
			Low		70%	1.3
				A4-3	30%	4.6
			FT11 7011 *	10.4	70%	12.5
			ETU 70Hz*	A3-1	30%	-1.8
			Low	10.4	70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
		Distance de el	Low ETU 70Hz*	A4-2	70% 30%	3.5
		Extended	Low	M4-Z	70%	5.4 14.1
	4	4 Normal	EPA 5Hz Low	A3-2	30%	
	4			A3-2	70%	-6.0 -2.5
				A4-3	70%	7.7
					70%	15.0
			EVA 5Hz Low	A5-2 A3-1	30%	-4.4
			EVA SHZ LOW	A3-1	70%	-4.4
				A4-1	30%	1.9
				A4-1	70%	8.4
				A5-1	70%	16.0
			EVA 70Hz	A3-1 A3-2	30%	-5.7
			Low	A3-2	70%	-2.1
			2011	A4-3	30%	1.4
				A+-3	70%	8.9
			ETU 70Hz*	A3-1	30%	-4.2
			Low	7.0 1	70%	-0.4
			ETU 300Hz*	A3-1	30%	-4.0
			Low	7.0 1	70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
		Zatoriada	Low	/	70%	10.5
Note*: Not applica	able for Local Area	BS and Home BS		<u> </u>		

Table 8.2.1.5-2 Test requirements for PUSCH, 3 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-3	30%	-3.5
					70%	0.7
				A4-4	70%	11.5
				A5-3	70%	18.7
			EVA 5Hz Low	A3-1	30%	-2.2
					70%	2.4
				A4-1	30%	4.9
					70%	12.1
				A5-1	70%	19.4
			EVA 70Hz	A3-3	30%	-3.4
			Low		70%	1.2
				A4-4	30%	5.3
					70%	13.1
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
		-	Low	A 4 0	70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.3
	4	NI - mas - I	Low	40.0	70%	14.1
	4	Normal	EPA 5Hz Low	A3-3	30%	-6.2
				A 4 4	70%	-2.8
				A4-4	70%	8.3
			EVA 5Hz Low	A5-3 A3-1	70% 30%	15.0
				A3-1	70%	-4.4
				A4-1	30%	-0.7 1.8
				A4-1	70%	8.4
				A5-1	70%	16.0
			EVA 70Hz	A3-1	30%	-5.9
			Low	A3-3	70%	-2.3
				A4-4	30%	2.2
				,,,,	70%	9.3
			ETU 70Hz*	A3-1	30%	-4.2
			Low	'	70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.1
			Low	_	70%	10.5
Note*: Not appli	icable for Local Are	ea BS and Home		ı l		

Table 8.2.1.5-3 Test requirements for PUSCH, 5 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-4	30% 70%	-4.1 -0.1
				A4-5	70%	11.0
				A5-4	70%	18.6
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	4.9
					70%	12.1
				A5-1	70%	19.2
			EVA 70Hz	A3-4	30%	-3.9
			Low		70%	0.5
				A4-5	30%	4.9
					70%	12.9
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low		70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.4
			Low		70%	14.1
	4	4 Normal	EPA 5Hz Low	A3-4	30%	-6.5
					70%	-3.2
				A4-5	70%	8.2
				A5-4	70%	15.0
			EVA 5Hz Low	A3-1	30%	-4.5
					70%	-0.8
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.1
			EVA 70Hz	A3-4	30%	-6.3
			Low		70%	-2.7
				A4-5	30%	1.8
					70%	8.9
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
	able for Local Area		Low		70%	10.5

Table 8.2.1.5-4 Test requirements for PUSCH, 10 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-5	30%	-3.6
					70%	0.2
				A4-6	70%	11.4
				A5-5	70%	18.9
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.5
				A4-1	30%	4.9
					70%	12.0
				A5-1	70%	19.4
			EVA 70Hz	A3-5	30%	-3.5
			Low		70%	0.7
				A4-6	30%	5.1
					70%	13.2
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low		70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.4
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-5	30%	-6.2
					70%	-2.9
				A4-6	70%	8.1
				A5-5	70%	15.3
			EVA 5Hz Low	A3-1	30%	-4.4
					70%	-0.6
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.1
			EVA 70Hz	A3-5	30%	-6.1
			Low		70%	-2.3
				A4-6	30%	1.3
					70%	8.6
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.3
	cable for Local Are		Low		70%	10.9

Table 8.2.1.5-5 Test requirements for PUSCH, 15 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-6	30%	-3.9
					70%	-0.2
				A4-7	70%	11.9
				A5-6	70%	19.4
			EVA 5Hz Low	A3-1	30%	-2.2
					70%	2.4
				A4-1	30%	4.8
					70%	12.0
				A5-1	70%	19.3
			EVA 70Hz	A3-6	30%	-3.9
			Low		70%	0.3
				A4-7	30%	4.8
					70%	13.5
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low		70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.5
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-6	30%	-6.6
					70%	-3.2
				A4-7	70%	8.2
				A5-6	70%	15.6
			EVA 5Hz Low	A3-1	30%	-4.4
					70%	-0.6
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.3
			EVA 70Hz	A3-6	30%	-6.4
			Low		70%	-2.7
				A4-7	30%	1.3
					70%	9.1
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.4
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
					70%	10.7

Table 8.2.1.5-6 Test requirements for PUSCH, 20 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-7	30%	-3.6
					70%	0.2
				A4-8	70%	12.1
				A5-7	70%	20.3
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	4.9
					70%	12.1
				A5-1	70%	19.3
			EVA 70Hz	A3-7	30%	-3.5
			Low		70%	8.0
				A4-8	30%	4.8
					70%	13.6
			ETU 70Hz*	A3-1	30%	-1.8
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.5
			Low		70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.3
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-7	30%	-6.2
				110	70%	-2.9
				A4-8	70%	8.1
			E) (A 511 1	A5-7	70%	16.5
			EVA 5Hz Low	A3-1	30%	-4.5
					70%	-0.7
				A4-1	30%	1.8
				A = 4	70%	8.5
			E) (A 7011	A5-1	70%	16.2
			EVA 70Hz	A3-7	30%	-6.1
			Low	A 4 0	70%	-2.3
				A4-8	30%	1.3
			ETIL 701 !-*	A 2 4	70%	9.2
			ETU 70Hz*	A3-1	30%	-3.8
			Low	A 2 4	70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
		Establish 1	Low	A 4 0	70%	-0.1
		Extended	ETU 70Hz*	A4-2	30%	2.2
	 icable for Local Are	L	Low		70%	10.6

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.2.1A Performance requirements of PUSCH in multipath fading propagation conditions transmission on two antenna ports

8.2.1A.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput for a given SNR. The required throughput is expressed as a fraction of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

For the tests on two antenna ports the HARQ retransmissions for multiple codewords are independent.

8.2.1A.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.1.1.

8.2.1A.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput of two layer spatial multiplexing transmission under multipath fading propagation conditions for a given SNR.

8.2.1A.4 Method of test

8.2.1A.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.6.

8.2.1A.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.1A.4.2-1.

Table 8.2.1A.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7dBm / 1.08MHz
3	-88.7dBm / 2.7MHz
5	-86.5dBm / 4.5MHz
10	-83.5dBm / 9MHz
15	-81.7dBm / 13.5MHz
20	-80.4dBm / 18MHz

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in annex A and the test parameters in Table 8.2.1A.4.2-2. For reference channels using 1 resource block the resource block in the middle of the channel bandwidth shall be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.

Table 8.2.1 A.4.2-2 Test parameters for testing PUSCH

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.1A.5-1 to 8.2.1A.5-6 is achieved at the BS input.

5) For each of the reference channels in Table 8.2.1A.5-1 to 8.2.1A.5-6 applicable for the base station, measure the throughput, according to annex E.

8.2.1A.5 Test Requirement

The throughput measured according to subclause 8.2.1A.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.1A.5-1 to 8.2.1A.5-6.

Table 8.2.1A.5-1 Test requirements for PUSCH, 1.4 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-2	70%	[5.4]
				A4-3	70%	18.5
	4	Normal	EPA 5Hz Low	A3-2	70%	0.7
				A4-3	70%	12.7

Table 8.2.1A.5-2 Test requirements for PUSCH, 3 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-3	70%	5.2
				A4-4	70%	18.4
	4	Normal	EPA 5Hz Low	A3-3	70%	1.1
				A4-4	70%	12.6

Table 8.2.1A.5-3 Test requirements for PUSCH, 5 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-4	70%	4.5
				A4-5	70%	19.0
	4	Normal	EPA 5Hz Low	A3-4	70%	0.3
				A4-5	70%	12.7

Table 8.2.1 A.5-4 Test requirements for PUSCH, 10 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-5	70%	5.0
				A4-6	70%	19.4
	4	Normal	EPA 5Hz Low	A3-5	70%	1.0
				A4-6	70%	12.8

Table 8.2.1 A.5-5 Test requirements for PUSCH, 15 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-6	70%	4.5
				A4-7	70%	20.2
	4	Normal	EPA 5Hz Low	A3-6	70%	0.6
				A4-7	70%	13.5

Table 8.2.1A.5-6 Test requirements for PUSCH, 20 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-7	70%	5.2
				A4-8	70%	20.5
	4	Normal	EPA 5Hz Low	A3-7	70%	1.3
				A4-8	70%	13.5

8.2.2 Performance requirements for UL timing adjustment

8.2.2.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput measured for the moving UE at given SNR. The required throughput is expressed as 70% of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

In the tests for UL timing adjustment, two signals are configured, one being transmitted by moving UE and the other being transmitted by stationary UE. The transmission of SRS from UE is optional. FRC parameters in Table A.7-1 and Table A.8-1 are applied for both UEs. The received power for both UEs is the same. The resource blocks allocated for both UEs are consecutive. In Scenario 2, Doppler shift is not taken into account.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

This requirement shall not be applied to Local Area BS and Home BS.

8.2.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.2.1.

8.2.2.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput measured for the moving UE at given SNR under moving propagation conditions.

8.2.2.4 Method of test

8.2.2.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.4.

8.2.2.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.2.4.2-1.

Table 8.2.2.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

2) The characteristics of the wanted signals (transmitted by moving UE) shall be configured according to the corresponding UL reference measurement channel defined in Annex A and the test parameters in Table 8.2.2.4.2-2.

Table 8.2.2.4.2-2 Test parameters for testing UL timing adjustment

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)
Subframes in which PUSCH is transmitted	For FDD: subframe #0, #2, #4, #6, and #8 in radio frames For TDD:
	Subframe #2, #3, #7, #8 in each radio frame
Subframes in which sounding RS is transmitted (Note 1)	For FDD: subframe #1 in radio frames
	For TDD: UpPTS in each radio frame
Note 1. The transmission of SRS is optional.	

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.2.5-1 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.2.5-1 applicable for the base station, measure the throughput, according to Annex E.

8.2.2.5 Test Requirement

The throughput measured for the moving UE according to subclause 8.2.2.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.2.5-1.

A8-6

-1.5

Number of TX Moving Channel antennas propagation Number of RX **FRC** SNR Cyclic prefix **Bandwidth** conditions and antennas (Annex A) [dB] [MHz] correlation matrix (Annex B) Scenario 1 Low A7-1 13.7 1.4 Scenario 2 Low A8-1 -1.6 Scenario 1 Low A7-2 14.0 3 Scenario 2 Low A8-2 -1.2 Scenario 1 Low A7-3 13.8 5 Scenario 2 Low A8-3 -1.3 2 Normal 1 Scenario 1 Low A7-4 14.4 10 Scenario 2 Low A8-4 -1.5 Scenario 1 Low A7-5 14.6 15 Scenario 2 Low A8-5 -1.5 Scenario 1 Low A7-6 14.5 20

Table 8.2.2.5-1 Test requirements for UL timing adjustment

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

Scenario 2 Low

8.2.3 Performance requirements for HARQ-ACK multiplexed on PUSCH

8.2.3.1 Definition and applicability

The performance requirement of HARQ-ACK multiplexed on PUSCH is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less at PUSCH power settings presented in table 8.2.3.5-1.

The probability of detection of ACK on PUSCH is defined as conditional probability of detection of the ACK when the ACK is transmitted on PUSCH allocated RE.

The probability of false detection of the ACK on PUSCH is defined as a conditional probability of erroneous detection of the ACK when data only is sent on PUSCH allocated RE, where HARQ-ACK can be allocated (i.e. by puncturing data). Pseudo-random data shall be used as an input for PUSCH coding and modulation purposes.

These tests shall be performed on one of RE's, where HARQ-ACK information was multiplexed on PUSCH.

In the test for HARQ-ACK multiplexed on PUSCH data is punctured by HARQ-ACK information in both slots within a subframe on symbols as specified in 36.212 [13] subclause 5.2.2.8. Amount of resources for HARQ-ACK information is calculated according to 36.212 [13] subclause 5.2.2.6. None of CQI, RI nor SRS is to be transmitted in these tests. Tests are performed for one bit HARQ-ACK information (O = 1).

This test is applied for QPSK 1/3 and 16QAM 3/4 modulation and coding schemes, with appropriate fixed reference channels for performance requirement applied as presented in table 8.2.3.5-1. Normal CP, 2 Rx antennas and ETU70 propagation conditions shall be used for this test.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

8.2.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.4.1.

8.2.3.3 Test Purpose

The test shall verify the receiver's ability to detect HARQ-ACK information multiplexed on PUSCH under multipath fading propagation conditions for a given SNR.

8.2.3.4 Method of test

8.2.3.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M: see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.2.3.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.3.4.2-1.

Table 8.2.3.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A and details presented in chapter 8.2.3.1. For reference channels using 1 resource block the RB in the middle of the channel bandwidth should be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.
- 3) The multipath fading emulators shall be configured according to ETU70 channel model defined in Annex B.2.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.3.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern on one of RE's where HARQ-ACK information can be multiplexed on PUSCH with the pattern outlined in figure 8.2.3.4.2-1. The following statistics are kept: the number of ACKs detected during data only transmissions and the number of missed ACKs during PUSCH with ACK transmission.

PUSCH (data only)	PUSCH with ACK	PUSCH (data only)	PUSCH with ACK	PUSCH (data only)	•••
(data only)	with ACK	(data only)	with ACK	(data only)	

Figure 8.2.3.4.2-1 Test signal pattern for HARQ-ACK multiplexed on PUSCH demodulation tests

8.2.3.5 Test Requirement

The fraction of falsely detected ACKs measured according to subclause 8.2.3.4.2 shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in table 8.2.3.5-1.

Table 8.2.3.5-1 Test requirements for HARQ-ACK multiplexed on PUSCH

Number of TX antennas	Number of RX antennas	Cyclic Prefix	Propagation conditions and correlation matrix (Annex B)	Channel Bandwidth [MHz]	FRC (Annex A)	$I_{\it offset}^{\it HARQ-ACK}$	SNR [dB]
1	2	Normal	EVA 5* Low	1.4	A.3-1	8	7.4
					A.4-3	5	14.2
				3	A.3-1	8	7.4
					A.4-4	5	13.7
				5	A.3-1	8	7.5
					A.4-5	5	13
				10	A.3-1	8	7.4
					A.4-6	5	13
				15	A.3-1	8	7.4
					A.4-7	5	12.6
				20	A.3-1	8	7.4
					A.4-8	5	12.5
			ETU70** Low	1.4	A.3-1	8	7.2
					A.4-3	5	14.4
				3	A.3-1	8	7.2
					A.4-4	5	13.5
				5	A.3-1	8	7.1
					A.4-5	5	13.1
				10	A.3-1	8	7.2
					A.4-6	5	12.9
				15	A.3-1	8	7.3
					A.4-7	5	12.7
				20	A.3-1	8	7.1
	applicable for W				A.4-8	5	12.6

Note*: Not applicable for Wide Area BS.

Note**: Not applicable for Local Area BS and Home BS.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.2.4 Performance requirements for High Speed Train conditions

8.2.4.1 Definition and applicability

The performance requirement of PUSCH for High Speed Train conditions is determined by a minimum throughput for a given SNR. The required throughput is expressed as 30% and 70% of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ retransmissions and are applied for normal CP.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

The performance requirements for High Speed Train conditions are optional.

This requirement shall not be applied to Local Area BS and Home BS.

8.2.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.3.1

8.2.4.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput under High Speed Train conditions for a given SNR.

8.2.4.4 Method of test

8.2.4.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, channel simulators and AWGN generators to all BS antenna connectors (depending on HST scenario) via a combining network as shown in Annex I.3.2.

8.2.4.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.4.4.2-1.

Table 8.2.4.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A and the test parameters in Table 8.2.4.4.2-2.

Table 8.2.4.4.2-2: Test parameters for High Speed Train conditions

Value				
4				
0, 2, 3, 1, 0, 2, 3, 1				
Configuration 1 (2:2)				
For FDD: subframe #0 and #8 in radio frames for which SFN mod $4 = 0$ subframe #6 in radio frames for which SFN mod $4 = 1$ subframe #4 in radio frames for which SFN mod $4 = 2$ subframe #2 in radio frames for which SFN mod $4 = 3$ For TDD: Subframe #2 in each radio frames				
For FDD: subframe #5 in radio frames For TDD: Subframe #3 in each radio frame				

- 3) The channel simulators shall be configured according to the corresponding channel model defined in Annex B.3.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.4.5-1 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.4.5-1 applicable for the base station, measure the throughput, according to Annex E.

8.2.4.5 Test Requirement

The throughput measured according to subclause 8.2.4.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.4.5-1.

Table 8.2.4.5-1: Test requirements for High Speed Train conditions

Channel Bandwidth [MHz]	FRC (Annex A)	Number of TX antennas	Number of RX antennas	Propagation conditions and correlation matrix (Annex B)	Fraction of maximum throughput	SNR [dB]
			1	HST Scenario 3	30% 70%	-1.2 2.2
1.4	A3-2		2	HST Scenario 1 Low	30% 70%	-3.6 -0.3
_			1	HST Scenario 3	30% 70%	-1.8 1.9
3	A3-3		2	HST Scenario 1 Low	30% 70%	-4.2 -0.7
_	10.4		1	HST Scenario 3	30% 70%	-2.3 1.6
5	A3-4	1	2	HST Scenario 1 Low	30% 70%	-4.8 -1.1
40	42.5	'	1	HST Scenario 3	30% 70%	-2.4 1.5
10	A3-5		2	HST Scenario 1 Low	30% 70%	-5.1 -1.2
45	40.0		1	HST Scenario 3	30% 70%	-2.4 1.5
15	A3-6		2	HST Scenario 1 Low	30% 70%	-4.9 -1.1
	40.7		1	HST Scenario 3	30% 70%	-2.4 1.5
20	A3-7		2	HST Scenario 1 Low	30% 70%	-5.0 -1.1

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3 Performance requirements for PUCCH

8.3.1 ACK missed detection for single user PUCCH format 1a transmission on single antenna port

8.3.1.1 Definition and applicability

The performance requirement of single user PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

ACK/NAK repetitions are disabled for PUCCH transmission.

8.3.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.2.1.

8.3.1.3 Test purpose

The test shall verify the receiver's ability to detect ACK under multipath fading propagation conditions for a given SNR.

8.3.1.4 Method of test

8.3.1.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.3.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.1.4.2-1.

Table 8.3.1.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.1.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.1.4.2-1. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs.



Figure 8.3.1.4.2-1 Test signal pattern for single user PUCCH format 1a demodulation tests

8.3.1.5 Test Requirement

The fraction of falsely detected ACKs shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.1.5-1.

Table 8.3.1.5-1 Required SNR for single user PUCCH format 1a demodulation tests

Number	Number	Cyclic	Propagation		Chann	el Band	width / SI	NR [dB]	
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1	2	Normal	EPA 5 Low	-1.9	-3.3	-4.2	-4.8	-4.7	-4.5
		[EVA 5 Low	-3.9	-4.5	-4.5	-4.4	-4.5	-4.5
			EVA 70 Low	-4.3	-4.6	-4.6	-4.5	-4.6	-4.5
			ETU 300* Low	-4.4	-4.5	-4.3	-4.4	-4.6	-4.6
		Extended	ETU 70* Low	-3.6	-3.7	-3.5	-3.7	-3.6	-3.7
	4	Normal	EPA 5 Low	-7.3	-7.8	-8.1	-8.3	-8.3	-8.4
			EVA 5 Low	-8.2	-8.5	-8.5	-8.2	-8.3	-8.3
			EVA 70 Low	-8.3	-8.4	-8.4	-8.2	-8.4	-8.2
			ETU 300* Low	-8.1	-8.3	-8.1	-8.1	-8.3	-8.2
		Extended	ETU 70* Low	-7.3	-7.5	-7.3	-7.5	-7.4	-7.4
Note*: Not	applicable fo	r Local Area	BS and Home BS.						

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.2 CQI performance requirements for PUCCH format 2 transmission on single antenna port

8.3.2.1 Definition and applicability

The performance requirement of PUCCH format 2 for CQI is determined by the block error probability (BLER) of CQI. The performance is measured by the required SNR at BLER of 1%.

The CQI block error probability is defined as the conditional probability of incorrectly decoding the CQI information when the CQI information is sent. All CQI information shall be decoded (no exclusion due to DTX).

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

8.3.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.3.1.

8.3.2.3 Test purpose

The test shall verify the receiver's ability to detect CQI under multipath fading propagation conditions for a given SNR.

8.3.2.4 Method of test

8.3.2.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.3.2.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.2.4.2-1.

Table 8.3.2.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211. The CQI information bit payload per sub-frame is equal to 4 bits.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.2.5-1 is achieved at the BS input during the CQI transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.2.4.2-1. The following statistics are kept: the number of incorrectly decoded CQI.



Figure 8.3.2.4.2-1 Test signal pattern for PUCCH format 2 demodulation tests

8.3.2.5 Test Requirement

The fraction of incorrectly decoded CQIs shall be less than 1% for the SNR listed in Table 8.3.2.5-1.

Table 8.3.2.5-1 Required SNR for PUCCH format 2 demodulation tests

Number	Number	Cyclic	Propagation		Chan	nel Bandv	idth / SNR	[dB]	
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1	2	Normal	EVA 5* Low	-3.1	-3.5	-3.8	-3.4	-3.6	-3.6
			ETU 70**	-3.3	-3.8	-3.6	-3.8	-3.8	-3.8
			Low						

Note*: Not applicable for Wide Area BS.

Note**: Not applicable for Local Area BS and Home BS.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.3 ACK missed detection for multi user PUCCH format 1a

8.3.3.1 Definition and applicability

The performance requirement of multi user PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK on the wanted signal. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less. These probabilities are measured on the wanted signal at presence of three interfering signals as specified in section 8.3.3.4.2.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise and the interfering signals are present.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

Multi user PUCCH test is performed only for 2 Rx antennas, Normal CP and for ETU70 propagation conditions.

ACK/NAK repetitions are disabled for PUCCH transmission.

8.3.3.2 Minimum Requirement

The minimum requirements are in TS 36.104 [2] subclause 8.3.1.1 and 8.3.4.1.

8.3.3.3 Test purpose

The test shall verify the receiver's ability to detect ACK on the wanted signal at presence of three interfering signals as specified in section 8.3.3.4.2, under multipath fading propagation conditions for a given SNR.

8.3.3.4 Method of test

8.3.3.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

- Connect the BS tester generating the wanted and all interfering signals, multipath fading simulators and AWGN generators to both BS antenna connectors for 2Rx diversity reception via a combining network as shown in Annex I.3.3.
- 2) Interconnect attenuators for relative power setting purposes for all transmitting branches (wanted signal and all interferers, separately).

8.3.3.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.3.4.2-1.

Table 8.3.3.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

2) In multi user PUCCH test, four signals are configured: one wanted signal and three interferers, which are transmitted via separate fading paths using relative power settings presented in Annex A.9.

All signals are transmitted on the same PUCCH resources, with different PUCCH channel indices, as presented in Annex A.9.

The characteristics of the all signals (i.e. wanted and all interferers) shall be configured according to 36.211 [12].

- 3) The multipath fading emulators shall be configured according to ETU70 propagation conditions defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.3.5-1 is achieved at the BS input during the ACK transmissions on the wanted signal.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.3.4.2-1. This statement is valid for the wanted PUCCH signal. All interferers are present for all subframes. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs on the wanted PUCCH signal.



Figure 8.3.3.4.2-1 Test signal pattern for multi user PUCCH demodulation tests

8.3.3.5 Test Requirement

The fraction of falsely detected ACKs on the wanted signal shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.3.5-1.

Table 8.3.3.5-1 Required SNR for multi user PUCCH demodulation tests

Number	Number	Cyclic	Propagation	Channel Bandwidth / SNR [dB]						
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
1	2	Normal	ETU 70* Low	-3.5	-3.8	-3.8	-4.0	-4.0	-3.8	
Note*: Not a	Note*: Not applicable for Local Area BS and Home BS.									

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.4 ACK missed detection for PUCCH format 1b with Channel Selection

8.3.4.1 Definition and applicability

The performance requirement of PUCCH format 1b with Channel Selection for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular channel when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the ACK was sent at particular channel.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NAK bits per sub-frame is equal to 4 bits (AAAA),

ACK/NAK repetitions are disabled for PUCCH transmission.

8.3.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.5.1.

8.3.4.3 Test purpose

The test shall verify the receiver's ability to detect ACK bits under multipath fading propagation conditions for a given SNR.

8.3.4.4 Method of test

8.3.4.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.3.4.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.4.4.2-1.

Table 8.3.4.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.4.5-1 is achieved at the BS input during the AAAA codeword transmissions.
- 5) The signal generator sends AAAA codeword in regular time periods. The following statistics are kept: the number of ACK bits falsely detected in the idle periods and the number of missed ACK bits. Each falsely detected ACK bit in the idle periods is accounted as one error for the statistics of false ACK detection, and each missed ACK bit is accounted as one error for the statistics of missed ACK detection.

8.3.4.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of correctly detected ACK bits shall be larger than 99% for the SNR listed in Table 8.3.4.5-1.

Table 8.3.4.5-1 Required SNR for PUCCH format 1b with Channel Selection demodulation tests

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and	Channel Bandwidth / SNR [dB]						
antennas	antennas	Pielix	correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz	
1	2	Normal	EPA 5 Low	-	-	-	-3,9	-4,0	-4,0	
			EVA70 Low	-	-	-	-3,7	-3,9	-3,9	
	4	Normal	EPA 5 Low	-	-	-	-7,8	-7,9	-8,0	
			EVA70 Low	-	-	-	-7,7	-7,9	-7.9	

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.5 ACK missed detection for PUCCH format 3

8.3.5.1 Definition and applicability

The performance requirement of PUCCH format 3 for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular bit position when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the ACK was sent at particular bit position. Each missed ACK bit is counted as one error.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NAK bits per sub-frame is defined for two cases as presented below:

• 4AN bits: applicable for FDD and TDD

• 16AN bits : applicable for TDD

ACK/NAK repetitions are disabled for PUCCH transmission. Random codeword selection is assumed.

8.3.5.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.6.1.

8.3.5.3 Test purpose

The test shall verify the receiver's ability to detect ACK bits in codeword's from applicable codebook being randomly selected, under multipath fading propagation conditions for a given SNR.

8.3.5.4 Method of test

8.3.5.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.3.5.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.5.4.2-1.

Table 8.3.5.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.5.5-1 or 8.3.5.5-2 is achieved at the BS input during the codeword's transmissions.
- 5) The signal generator sends random codewords from applicable codebook, in regular time periods. The following statistics are kept: the number of ACK bits falsely detected in the idle periods and the number of missed ACK bits. Each falsely detected ACK bit in the idle periods is accounted as one error for the statistics of false ACK detection, and each missed ACK bit is accounted as one error for the statistics of missed ACK detection.

8.3.5.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of correctly detected ACK bits shall be larger than 99% for the SNR listed in Tables 8.3.5.5-1 and 8.3.5.5-2.

Table 8.3.5.5-1 Required SNR for PUCCH format 3 demodulation tests, 4AN bits

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and	Channel Bandwidth / SNR [dB]						
antennas	antennas	Pielix	correlation matrix (Annex		3MHz	5MHz	10 MHz	15MHz	20MHz	
			B)							
1	2	Normal	EPA 5 Low	-	-	-	-3,1	-3,2	-3,2	
			EVA70 Low	-	-	-	-2,9	-3,0	-3,1	
	4	Normal	EPA 5 Low	-	-		-6,7	-6,8	-6,9	
			EVA70 Low	-	-	-	-6,6	-6,7	-6,7	

Table 8.3.5.5-2 Required SNR for PUCCH format 3 demodulation tests, 16AN bits

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and	Channel Bandwidth / SNR [dB]						
antenna antennas cor	conditions and correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz			
1	2	Normal	EPA 5 Low	-	-	-	-0,7	-0,6	-0,6	
			EVA70 Low	-	-	•	-0,2	-0,3	-0,3	
	4	Normal	EPA 5 Low	-	-	•	-4,7	-4,7	-4,8	
			EVA70 Low	-	-		-4.4	-4.5	-4,5	

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.6 NAK to ACK detection for PUCCH format 3

8.3.6.1 Definition and applicability

The performance requirement of PUCCH format 3 for NAK to ACK detection is determined by the two parameters: probability of false detection of the ACK and the NAK to ACK detection probability. The performance is measured by the required SNR at probability of the NAK to ACK detection equal to 0.001 or less. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular bit position when input is only noise. Each false bit detection is counted as one error.

The NAK to ACK detection probability is the probability of detecting an ACK bit when an NAK bit was sent on particular bit position. Each NAK bit erroneously detected as ACK bit is counted as one error. Erroneously detected NAK bits in the definition do not contain the NAK bits which are mapped from DTX, i.e. NAK bits received when DTX is sent should not be considered.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NAK bits per sub-frame is defined as presented below, with random codeword selection assumed:

• 16AN bits: applicable for TDD

ACK/NAK repetitions are disabled for PUCCH transmission. Random codeword selection is assumed.

8.3.6.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.6.1.

8.3.6.3 Test purpose

The test shall verify the receiver's ability not to falsely detect NAK bits, transmitted in codeword randomly selected from applicable codebook, as ACK bits under multipath fading propagation conditions for a given SNR.

8.3.6.4 Method of test

8.3.6.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

8.3.6.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.6.4.2-1.

Table 8.3.6.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.6.5-1 is achieved at the BS input during the codeword's transmissions.
- 5) The signal generator sends random codeword from applicable codebook, in regular time periods. The following statistics are kept: the number of ACK bits detected in the idle periods and the number of NAK bits detected as ACK.

8.3.6.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of NAK bits falsely detected as ACK shall be less than 0,1% for the SNR listed in Tables 8.3.6.5-1.

Table 8.3.6.5-1 Required SNR for PUCCH format 3 demodulation tests, 16AN bits

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and		Cha	nnel Ban	dwidth / SI	NR [dB]	j					
antennas	antennas	FIGUR	correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz					
1	2	Normal	EPA 5 Low	-	-	-	2,0	2,2	2,1					
			EVA70 Low	-	-	-	2,7	2,5	2,5					
	4	Normal	EPA 5 Low	-	-	-	-2,5	-2,7	-2,9					
			EVA70 Low	-	-	-	-2,3	-2,5	-2,6					

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna ports

8.3.7.1 Definition and applicability

The performance requirement of PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

ACK/NAK repetitions are disabled for PUCCH transmission.

8.3.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.2.1.

8.3.7.3 Test purpose

The test shall verify the receiver's ability to detect ACK under multipath fading propagation conditions for a given SNR.

8.3.7.4 Method of test

8.3.7.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.5.

8.3.7.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.7.4.2-1.

Table 8.3.7.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) Signals transmitted on two antenna ports are on the same PUCCH resource block with different channel indices as presented in Annex A.10. The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.7.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.7.4.2-1. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs.



Figure 8.3.7.4.2-1: Test signal pattern for PUCCH format 1a demodulation tests

8.3.7.5 Test Requirement

The fraction of falsely detected ACKs shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.7.5-1.

Table 8.3.7.5-1: Required SNR for single user PUCCH format 1a demodulation tests

Number	Number	Cyclic	Propagation		Chan	nel Bandv	idth / SNR	[dB]	
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
2	2	Normal	EPA 5 Low	-3.8	-4.1	-5.6	-5.7	-5.7	-5.9
			EVA 70 Low	-5.0	-5.1	-5.6	-5.1	-5.6	-5.6
	4	Normal	EPA 5 Low	-7.7	-7.7	-8.5	-8.7	-8.7	-8.7
			EVA 70 Low	-8.2	-8.4	-8.5	-8.5	-8.6	-8.7

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.3.8 CQI performance requirements for PUCCH format 2 transmission on two antenna ports

8.3.8.1 Definition and applicability

The performance requirement of PUCCH format 2 for CQI is determined by the block error probability (BLER) of CQI. The performance is measured by the required SNR at BLER of 1%.

The CQI block error probability is defined as the conditional probability of incorrectly decoding the CQI information when the CQI information is sent. All CQI information shall be decoded (no exclusion due to DTX).

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

8.3.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.2.1.

8.3.8.3 Test purpose

The test shall verify the receiver's ability to detect CQI under multipath fading propagation conditions for a given SNR.

8.3.8.4 Method of test

8.3.8.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.5.

8.3.8.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.8.4.2-1.

Table 8.3.8.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) Signals transmitted on two antenna ports are on the same PUCCH resource block with different channel indices as presented in Annex A.10. The characteristics of the wanted signal shall be configured according to TS 36.211. The CQI information bit payload per sub-frame is equal to 4 bits.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.8.5-1 is achieved at the BS input during the CQI transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.8.4.2-1. The following statistics are kept: the number of incorrectly decoded CQI.



Figure 8.3.8.4.2-1 Test signal pattern for PUCCH format 2 demodulation tests

8.3.8.5 Test Requirement

The fraction of incorrectly decoded CQIs shall be less than 1% for the SNR listed in Table 8.3.8.5-1.

Table 8.3.8.5-1 Required SNR for PUCCH format 2 demodulation tests

Number	Number	Cyclic	Propagation	Channel Bandwidth / SNR [dB]					
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
2	2	Normal	EVA 5 Low	-4.9	-4.8	-5.1	-5.0	-5.1	-5.1

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

8.4 Performance requirements for PRACH

8.4.1 PRACH false alarm probability and missed detection

8.4.1.1 Definition and applicability

The performance requirement of PRACH for preamble detection is determined by the two parameters: total probability of false detection of the preamble (Pfa) and the probability of detection of preamble (Pd). The performance is measured by the required SNR at probability of detection, Pd of 99%. Pfa shall be 0.1% or less.

Pfa is defined as a conditional total probability of erroneous detection of the preamble (i.e. erroneous detection from any detector) when input is only noise.

Pd is defined as conditional probability of detection of the preamble when the signal is present. The erroneous detection consists of several error cases – detecting different preamble than the one that was sent, not detecting a preamble at all or correct preamble detection but with the wrong timing estimation. For AWGN, a timing estimation error occurs if the estimation error of the timing of the strongest path is larger than 1.04us. For ETU70, a timing estimation error occurs if the estimation error of the timing of the strongest path is larger than 2.08us. The strongest path for the timing estimation error refers to the strongest path (i.e. average of the delay of all paths having the same highest gain = 310ns for ETU) in the power delay profile.

The normal mode test is applicable to all BS. The high speed mode test is applicable to high speed BS.

8.4.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.4.1.1 and 8.4.2.1.

8.4.1.3 Test purpose

The test shall verify the receiver's ability to detect PRACH preamble under multipath fading propagation conditions for a given SNR.

8.4.1.4 Method of test

8.4.1.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.1 or Annex I.3.2 as applicable.

8.4.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth.

Table 8.4.1.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the frequency offset of the test signal according to Table 8.4.1.5-1 or 8.4.1.5-2.
- 5) Adjust the equipment so that the SNR specified in Table 8.4.1.5-1 or 8.4.1.5-2 is achieved at the BS input during the PRACH preambles.
- 6) The test signal generator sends a preamble and the receiver tries to detect the preamble. This pattern is repeated as illustrated in figure 8.4.1.4.2-1. The preambles are sent with certain timing offsets as described below. The

following statistics are kept: the number of preambles detected in the idle period and the number of missed preambles.



Figure 8.4.1.4.2-1 PRACH preamble test pattern

The timing offset base value is set to 50% of Ncs. This offset is increased within the loop, by adding in each step a value of 0.1us, until the end of the tested range, which is 0.9us. Then the loop is being reset and the timing offset is set again to 50% of Ncs. The timing offset scheme is presented in Figure 8.4.1.4.2-2.

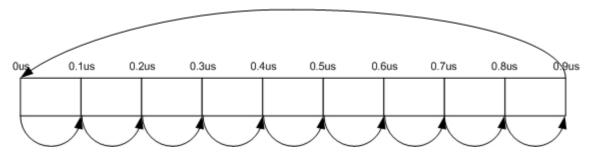


Figure 8.4.1.4.2-2 Timing offset scheme

8.4.1.5 Test Requirement

Pfa shall not exceed 0.1%. Pd shall not be below 99% for the SNRs in Table 8.4.1.5-1 and 8.4.1.5-2.

Table 8.4.1.5-1 PRACH missed detection test requirements for Normal Mode

Number of	Number	Propagation	Frequency	SNR [dB]				
TX antennas	of RX antennas	conditions and correlation matrix (Annex B)	offset	Burst format 0	Burst format 1	Burst format 2	Burst format 3	Burst format 4
1	2	AWGN	0	-13.9	-13.9	-16.1	-16.2	-6.9
		ETU 70 Low*	270 Hz	-7.4	-7.2	-9.4	-9.5	0.5
	4	AWGN	0	-16.6	-16.4	-18.7	-18.5	-9.5
		ETU 70 Low*	270 Hz	-11.5	-11.1	-13.5	-13.3	-4.5
Note*: Not appli	cable for Loc	al Area BS and Home	BS.					

The requirements in Table 8.4.1.5-2 shall not be applied to Local Area BS and Home BS

Table 8.4.1.5-2 PRACH missed detection test requirements for High speed Mode

Number of	Number of	Propagation	Frequency		SNR [dB]			
TX antennas	RX antennas	conditions and correlation matrix (Annex B)	offset	Burst format 0	Burst format 1	Burst format 2	Burst format 3	
1	2	AWGN	0	-13.8	-13.9	-16.0	-16.3	
		ETU 70 Low	270 Hz	-6.8	-6.7	-8.7	-8.9	
		AWGN	625 Hz	-12.1	-12.0	-14.1	-14.1	
		AWGN	1340 Hz	-13.1	-13.2	-15.2	-15.4	
	4	AWGN	0	-16.6	-16.3	-18.6	-18.5	
		ETU 70 Low	270 Hz	-11.2	-10.8	-13.1	-13.1	
		AWGN	625 Hz	-14.6	-14.3	-16.5	-16.5	
		AWGN	1340 Hz	-15.6	-15.2	-17.5	-17.5	

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

Annex A (normative): Reference Measurement channels

A.0 General

The parameters for the reference measurement channels are specified in clause A.1 for reference sensitivity and inchannel selectivity and in clause A.2 for dynamic range.

A schematic overview of the encoding process for the reference measurement channels is provided in Figure A0-1.

Receiver requirements in the present document are defined with a throughput stated relative to the Maximum throughput of the FRC. The Maximum throughput for an FRC equals the Payload size * the Number of uplink subframes per second. For FDD, 1000 uplink sub-frames per second are used.

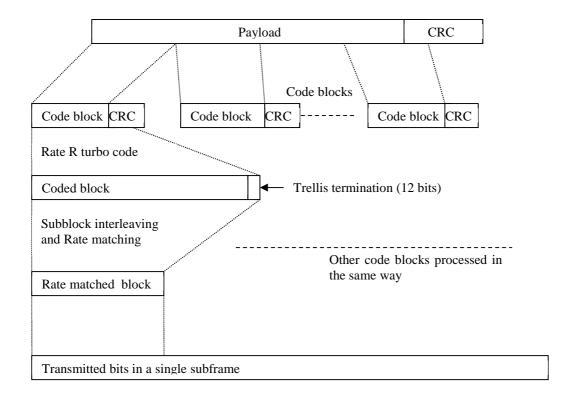


Figure A0-1. Schematic overview of the encoding process

A.1 Fixed Reference Channels for reference sensitivity and in--channel selectivity (QPSK, R=1/3)

The parameters for the reference measurement channels are specified in Table A.1-1 for reference sensitivity and in-channel selectivity

Table A.1-1 FRC parameters for reference sensitivity and in-channel selectivity

Reference channel	A1-1	A1-2	A1-3	A1-4	A1-5
Allocated resource blocks	6	15	25	3	9
DFT-OFDM Symbols per subframe	12	12	12	12	12
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK
Code rate	1/3	1/3	1/3	1/3	1/3
Payload size (bits)	600	1544	2216	256	936
Transport block CRC (bits)	24	24	24	24	24
Code block CRC size (bits)	0	0	0	0	0
Number of code blocks - C	1	1	1	1	1
Coded block size including 12bits trellis	1884	4716	6732	852	2892
termination (bits)					
Total number of bits per sub-frame	1728	4320	7200	864	2592
Total symbols per sub-frame	864	2160	3600	432	1296

A.2 Fixed Reference Channels for dynamic range (16QAM, R=2/3)

The parameters for the reference measurement channels are specified in Table A.2-1 for dynamic range.

Table A.2-1 FRC parameters for dynamic range

Reference channel	A2-1	A2-2	A2-3
Allocated resource blocks	6	15	25
DFT-OFDM Symbols per subframe	12	12	12
Modulation	16QAM	16QAM	16QAM
Code rate	2/3	2/3	2/3
Payload size (bits)	2344	5992	9912
Transport block CRC (bits)	24	24	24
Code block CRC size (bits)	0	0	24
Number of code blocks – C	1	1	2
Coded block size including 12bits trellis termination (bits)	7116	18060	14988
Total number of bits per sub-frame	3456	8640	14400
Total symbols per sub-frame	864	2160	3600

A.3 Fixed Reference Channels for performance requirements (QPSK 1/3)

Table A.3-1 FRC parameters for performance requirements (QPSK 1/3)

Reference channel	A3-1	A3-2	A3-3	A3-4	A3-5	A3-6	A3-7
Allocated resource blocks	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	12	12	12	12	12	12
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK
Code rate	1/3	1/3	1/3	1/3	1/3	1/3	1/3
Payload size (bits)	104	600	1544	2216	5160	6712	10296
Transport block CRC (bits)	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	0	0	24	24
Number of code blocks - C	1	1	1	1	1	2	2
Coded block size including 12bits trellis termination (bits)	396	1884	4716	6732	15564	10188	15564
Total number of bits per sub-frame	288	1728	4320	7200	14400	21600	28800
Total symbols per sub-frame	144	864	2160	3600	7200	10800	14400

A.4 Fixed Reference Channels for performance requirements (16QAM 3/4)

Table A.4-1 FRC parameters for performance requirements (16QAM 3/4)

Reference channel	A4-1	A4-2	A4-3	A4-4	A4-5	A4-6	A4-7	A4-8
Allocated resource blocks	1	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	10	12	12	12	12	12	12
Modulation	16QAM							
Code rate	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Payload size (bits)	408	376	2600	6456	10680	21384	32856	43816
Transport block CRC (bits)	24	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	24	24	24	24	24
Number of code blocks - C	1	1	1	2	2	4	6	8
Coded block size including 12bits trellis termination (bits)	1308	1212	7884	9804	16140	16140	16524	16524
Total number of bits per sub-frame	576	480	3456	8640	14400	28800	43200	57600
Total symbols per sub-frame	144	120	864	2160	3600	7200	10800	14400

A.5 Fixed Reference Channels for performance requirements (64QAM 5/6)

Table A.5-1 FRC parameters for performance requirements (64QAM 5/6)

Reference channel	A5-1	A5-2	A5-3	A5-4	A5-5	A5-6	A5-7
Allocated resource blocks	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	12	12	12	12	12	12
Modulation	64QAM						
Code rate	5/6	5/6	5/6	5/6	5/6	5/6	5/6
Payload size (bits)	712	4392	11064	18336	36696	55056	75376
Transport block CRC (bits)	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	24	24	24	24	24
Number of code blocks - C	1	1	2	3	6	9	13
Coded block size including 12bits trellis termination (bits)	2220	13260	16716	18444	18444	18444	17484
Total number of bits per sub-frame	864	5184	12960	21600	43200	64800	86400
Total symbols per sub-frame	144	864	2160	3600	7200	10800	14400

A.6 PRACH Test preambles

Table A.6-1 Test preambles for Normal Mode

Burst format	Ncs	Logical sequence index	٧
0	13	22	32
1	167	22	2
2	167	22	0
3	0	22	0
4	10	0	0

Table A.6-2 Test preambles for High speed Mode

Burst format	Ncs	Logical sequence index	V
0	15	384	0
1	202	384	0
2	202	384	0
3	237	384	0

A.7 Fixed Reference Channels for UL timing adjustment (Scenario 1)

Table A.7-1 FRC parameters for UL timing adjustment (Scenario 1)

Reference channel	A7-1	A7-2	A7-3	A7-4	A7-5	A7-6
Allocated resource blocks	3	6	12	25	25	25
DFT-OFDM Symbols per subframe	12	12	12	12	12	12
Modulation	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM
Code rate	3/4	3/4	3/4	3/4	3/4	3/4
Payload size (bits)	1288	2600	5160	10680	10680	10680
Transport block CRC (bits)	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	24	24	24
Number of code blocks - C	1	1	1	2	2	2
Coded block size including 12bits trellis termination	3948	7884	15564	16140	16140	16140
(bits)						
Total number of bits per sub-frame	1728	3456	6912	14400	14400	14400
Total symbols per sub-frame	432	864	1728	3600	3600	3600
SRS bandwidth configuration (See TS 36.211, 5.5.3)	7	5	3	2	5	2
(Note 1)						
SRS-Bandwidth b (See TS 36.211, 5.5.3) (Note 1, 2)	0	0	0	0	0	1
Note 1. The transmission of SRS is optional						

Note 2. PUSCH resource blocks shall be included in SRS resource blocks

8.A Fixed Reference Channels for UL timing adjustment (Scenario 2)

Table A.8-1 FRC parameters for UL timing adjustment (Scenario 2)

3	6			A8-5	A8-6
	6	12	25	25	25
12	12	12	12	12	12
QPSK	QPSK	QPSK	QPSK	QPSK	QPSK
1/3	1/3	1/3	1/3	1/3	1/3
256	600	1224	2216	2216	2216
24	24	24	24	24	24
0	0	0	0	0	0
1	1	1	1	1	1
852	1884	3756	6732	6732	6732
864	1728	3456	7200	7200	7200
432	864	1728	3600	3600	3600
7	5	3	2	5	2
0	0	0	0	0	1
	QPSK 1/3 256 24 0 1 852 864 432 7	QPSK QPSK 1/3 1/3 256 600 24 24 0 0 1 1 852 1884 864 1728 432 864 7 5	QPSK QPSK QPSK 1/3 1/3 1/3 256 600 1224 24 24 24 0 0 0 1 1 1 852 1884 3756 864 1728 3456 432 864 1728 7 5 3	QPSK QPSK QPSK QPSK 1/3 1/3 1/3 1/3 256 600 1224 2216 24 24 24 24 0 0 0 0 1 1 1 1 852 1884 3756 6732 864 1728 3456 7200 432 864 1728 3600 7 5 3 2	QPSK QPSK QPSK QPSK QPSK 1/3 1/3 1/3 1/3 1/3 256 600 1224 2216 2216 24 24 24 24 24 0 0 0 0 0 1 1 1 1 1 852 1884 3756 6732 6732 864 1728 3456 7200 7200 432 864 1728 3600 3600 7 5 3 2 5

Note 1. The transmission of SRS is optional

Note 2. PUSCH resource blocks shall be included in SRS resource blocks

A.9 Multi user PUCCH test

Table A.9-1 Test parameters for multi user PUCCH case

	Resource index for PUCCH formats 1/1a/1b $n_{ m PUCCH}^{(1)}$	Relative power [dB]	Relative timing [ns]
Tested signal	2	-	-
Interferer 1	1	0	
Interferer 2	7	-3	0
Interferer 3	14	3	

NOTE1: The following parameters shall be used $N_{
m ID}^{
m cell}=150$, $N_{
m cs}^{(1)}=0$ and $\Delta_{
m shift}^{
m PUCCH}=2$.

NOTE2: All above listed signals are transmitted on the same PUCCH resource block, with different PUCCH resource indices as presented above.

A.10 PUCCH transmission on two antenna ports test

Table A.10-1 Test parameters for PUCCH transmission on two antenna ports case

PUCCH format		Resource indices for two antenna ports	
Format 1a $n_{\text{PUCCH}}^{(1,p=p_0)} = 1$ $n_{\text{PUCCH}}^{(1,p=p_0)}$		$n_{\text{PUCCH}}^{(1,p=p_0)} = 1$, $n_{\text{PUCCH}}^{(1,p=p_1)} = 2$	
Format 2 $n_{PUCCH}^{(2,p=p_0)} = 1, n_{PUCCH}^{(2,p=p_1)} = 2$		$n_{\text{PUCCH}}^{(2,p=p_0)} = 1, n_{\text{PUCCH}}^{(2,p=p_1)} = 2$	
NOTE1: The following parameters shall be used $N_{\rm ID}^{\rm cell}=150$, $N_{\rm cs}^{(1)}=0$. For PUCCH format 1a, $\Delta_{\rm shift}^{\rm PUCCH}=2$ is			
NOTE2:	assumed.		

Annex B (normative): Propagation conditions

B.1 Static propagation condition

The propagation for the static performance measurement is an Additive White Gaussian Noise (AWGN) environment. No fading or multi-paths exist for this propagation model.

B.2 Multi-path fading propagation conditions

Tables B.2-1 - B.2-3 show multi-path delay profiles that are used for the performance measurements in multi-path fading environment. All taps have classical Doppler spectrum, defined as:

(CLASS)
$$S(f) \propto 1/(1 - (f/f_D)^2)^{0.5}$$
 for $f \in f_D, f_D$.

Table B.2-1 Extended Pedestrian A model (EPA)

Excess tap delay [ns]	Relative power [dB]
0	0.0
30	-1.0
70	-2.0
90	-3.0
110	-8.0
190	-17.2
410	-20.8

Table B.2-2 Extended Vehicular A model (EVA)

Excess tap delay [ns]	Relative power [dB]
0	0.0
30	-1.5
150	-1.4
310	-3.6
370	-0.6
710	-9.1
1090	-7.0
1730	-12.0
2510	-16.9

Table B.2-3 Extended Typical Urban model (ETU)

Excess tap delay [ns]	Relative power [dB]
0	-1.0
50	-1.0
120	-1.0
200	0.0
230	0.0
500	0.0
1600	-3.0
2300	-5.0
5000	-7.0

A multipath fading propagation condition is defined by a combination of a multi-path delay profile and a maximum Doppler frequency f_D which is either 5, 70 or 300 Hz. In addition, 200 Hz Doppler frequency is specified for UL timing adjustment performance requirement.

B.3 High speed train condition

High speed train conditions are as follows:

Scenario 1: Open space

Scenario 3: Tunnel for multi-antennas

The high speed train conditions for the test of the baseband performance are two non-fading propagation channels in both scenarios. For BS with Rx diversity defined in scenario 1, the Doppler shift variation is the same between antennas.

Doppler shift for both scenarios is given by:

$$f_s(t) = f_d \cos \theta(t) \tag{B.3.1}$$

where $f_s(t)$ is the Doppler shift and f_d is the maximum Doppler frequency. The cosine of angle $\theta(t)$ is given by:

$$\cos \theta(t) = \frac{D_s/2 - vt}{\sqrt{D_{\min}^2 + (D_s/2 - vt)^2}}, \ 0 \le t \le D_s/v$$
(B.3.2)

$$\cos \theta(t) = \frac{-1.5D_s + vt}{\sqrt{D_{\min}^2 + (-1.5D_s + vt)^2}}, \ D_s/v < t \le 2D_s/v$$
(B.3.3)

$$\cos\theta(t) = \cos\theta(t \mod (2D_s/v)), \ t > 2D_s/v \tag{B.3.4}$$

where $D_s/2$ is the initial distance of the train from BS, and D_{\min} is BS-Railway track distance, both in meters; v is the velocity of the train in m/s, t is time in seconds.

Doppler shift and cosine angle is given by equations B.3.1 and B.3.2-B.3.4 respectively, where the required input parameters listed in Table B.3-1 and the resulting Doppler shift is shown in Figure B.3-1 and B.3-2 are applied for all frequency bands.

Table B.3-1: Parameters for high speed train conditions

Parameter	Value		
	Scenario 1	Scenario 3	
D_s	1000 m	300 m	
D_{\min}	50 m	2 m	
v	350 km/h	300 km/h	
f_d	1340 Hz 1150 Hz		

NOTE1: Parameters for HST conditions in table B.3-1 including f_d and Doppler shift trajectories presented on figures B.3-1 and B.3-2 were derived for Band 1.

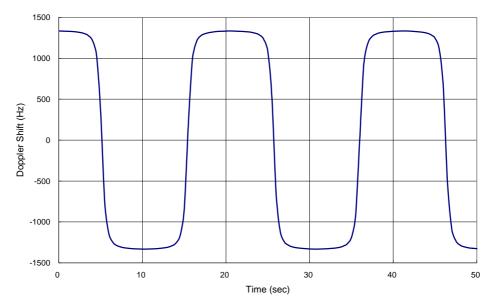


Figure B.3-1: Doppler shift trajectory for scenario 1

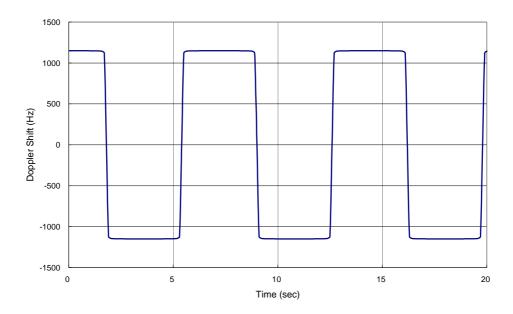


Figure B.3-2: Doppler shift trajectory for scenario 3

B.4 Moving propagation conditions

Figure B.4-1 illustrates the moving propagation conditions for the test of the UL timing adjustment performance. The time difference between the reference timing and the first tap is according Equation (B.4-1). The timing difference between moving UE and stationary UE is equal to $\Delta \tau - (T_A - 31) \times 16T_s$. The relative timing among all taps is fixed. The parameters for the moving propagation conditions are shown in Table B.4-1.

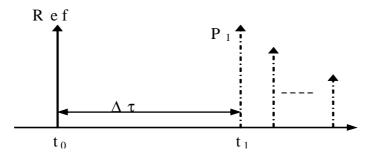


Figure B.4-1: Moving propagation conditions

$$\Delta \tau = \frac{A}{2} \cdot \sin(\Delta \omega \cdot t) \tag{B.4-1}$$

Table B.4-1: Parameters for UL timing adjustment

Parameter	Scenario 1	Scenario 2
Channel model	Stationary UE: AWGN	AWGN
	Moving UE: ETU200	
UE speed	120 km/h	350 km/h
CP length	Normal	Normal
A	10 μs	10 μs
Δω	0.04 s ⁻¹	0.13 s ⁻¹

NOTE 1: Multipath fading propagation conditions for Scenario 1 were derived for Band 1 with additional rounding applied to the Doppler frequency calculated for the specified UE speed.

NOTE 2: In Scenario 2, Doppler shift is not taken into account.

B.5 Multi-Antenna channel models

B.5.1 Definition of MIMO Correlation Matrices

Table B.5.1-1 defines the correlation matrix for the eNodeB:

Table B.5.1-1 eNodeB correlation matrix

	One antenna	Two antennas	Four antennas
eNode B Correlation	$R_{eNB} = 1$	$R_{eNB} = \begin{pmatrix} 1 & \alpha \\ \alpha^* & 1 \end{pmatrix}$	$R_{eNB} = \begin{pmatrix} 1 & \alpha^{1/9} & \alpha^{4/9} & \alpha \\ \alpha^{1/9} & 1 & \alpha^{1/9} & \alpha^{4/9} \\ \alpha^{4/9} & \alpha^{1/9} & 1 & \alpha^{1/9} \\ \alpha^* & \alpha^{4/9} & \alpha^{1/9} & 1 \end{pmatrix}$

Table B.5.1-2 defines the correlation matrix for the UE:

Table B.5.1-2 UE correlation matrix

	One antenna	Two antennas	Four antennas
UE Correlation	$R_{UE} = 1$	$R_{UE} = \begin{pmatrix} 1 & \beta \\ \beta^* & 1 \end{pmatrix}$	$R_{UE} = \begin{pmatrix} 1 & \beta^{1/9} & \beta^{4/9} & \beta \\ \beta^{1/9} & 1 & \beta^{1/9} & \beta^{4/9} \\ \beta^{4/9} & \beta^{1/9} & 1 & \beta^{1/9} \\ \beta^* & \beta^{4/9} & \beta^{1/9} & 1 \end{pmatrix}$

Table B.5.1-3 defines the channel spatial correlation matrix R_{spat} . The parameters α and β in Table B.5.1-3 defines the spatial correlation between the antennas at the eNodeB and UE.

Table B.5.1-3: R_{spat} correlation matrices

1x2 case	$R_{spat} = R_{eNB} = \begin{pmatrix} 1 & \alpha \\ \alpha^* & 1 \end{pmatrix}$
2x2 case	$R_{spat} = R_{UE} \otimes R_{eNB} = \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \alpha \\ \alpha^* & 1 \end{bmatrix} = \begin{bmatrix} 1 & \alpha & \beta & \beta \alpha \\ \alpha^* & 1 & \beta \alpha^* & \beta \\ \beta^* & \beta^* \alpha & 1 & \alpha \\ \beta^* \alpha^* & \beta^* & \alpha^* & 1 \end{bmatrix}$
2x4 case	$R_{spat} = R_{UE} \otimes R_{eNB} = egin{bmatrix} 1 & eta \ eta^* & 1 \end{bmatrix} \otimes egin{bmatrix} 1 & lpha^{1/9} & lpha^{1/9} & lpha \ lpha^{1/9^*} & 1 & lpha^{1/9} & lpha^{1/9} \ lpha^{4/9^*} & lpha^{1/9} & 1 & lpha^{1/9} \ lpha^* & lpha^{4/9^*} & lpha^{1/9} & 1 \end{bmatrix}$
4x4 case	$R_{spat} = R_{UE} \otimes R_{eNB} = \begin{pmatrix} 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} & \beta \\ \beta^{\frac{1}{9}*} & 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} \\ \beta^{\frac{4}{9}*} & \beta^{\frac{1}{9}*} & 1 & \beta^{\frac{1}{9}} \end{pmatrix} \otimes \begin{pmatrix} 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} & \alpha \\ \alpha^{\frac{1}{9}*} & 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} \\ \alpha^{\frac{4}{9}*} & \alpha^{\frac{1}{9}*} & 1 \end{pmatrix}$

For cases with more antennas at either eNodeB or UE or both, the channel spatial correlation matrix can still be expressed as the Kronecker product of R_{UE} and R_{eNB} according to $R_{\mathit{spat}} = R_{\mathit{UE}} \otimes R_{\mathit{eNB}}$.

B.5.2 MIMO Correlation Matrices at High, Medium and Low Level

The α and β for different correlation types are given in Table B.5.2-1.

Table B.5.2-1: Correlation for High Medium and Low Level

Low cor	Low correlation		orrelation	High Correlation	
α	β	α	β	α	β
0	n	0.9	0.3	0.9	0.9

The correlation matrices for high, medium and low correlation are defined in Table B.5.2-2, B.5.2-3 and B.5.2-4 as below.

The values in Table B.5.2-2 have been adjusted for the 2x4 and 4x4 high correlation cases to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision. This is done using the equation:

$$\mathbf{R}_{high} = [\mathbf{R}_{spatial} + aI_n]/(1+a)$$

Where the value "a" is a scaling factor such that the smallest value is used to obtain a positive semi-definite result. For the 2x4 high correlation case, a=0.00010. For the 4x4 high correlation case, a=0.00012.

The same method is used to adjust the 4x4 medium correlation matrix in Table B.5.2-3 to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision with a =0.00012.

Table B.5.2-2: MIMO correlation matrices for high correlation

1x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 \\ 0.9 & 1 \end{pmatrix}$				
2x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 & 0.9 & 0.81 \\ 0.9 & 1 & 0.81 & 0.9 \\ 0.9 & 0.81 & 1 & 0.9 \\ 0.81 & 0.9 & 0.9 & 1 \end{pmatrix}$				
2x4 case	$R_{high} = \begin{bmatrix} 1.0000 & 0.9883 & 0.9542 & 0.8999 & 0.8999 & 0.8894 & 0.8587 & 0.8099 \\ 0.9883 & 1.0000 & 0.9883 & 0.9542 & 0.8894 & 0.8999 & 0.8894 & 0.8587 \\ 0.9542 & 0.9883 & 1.0000 & 0.9883 & 0.8587 & 0.8894 & 0.8999 & 0.8894 \\ 0.8999 & 0.9542 & 0.9883 & 1.0000 & 0.8099 & 0.8587 & 0.8894 & 0.8999 \\ 0.8999 & 0.8894 & 0.8587 & 0.8099 & 1.0000 & 0.9883 & 0.9542 & 0.8999 \\ 0.8894 & 0.8999 & 0.8894 & 0.8587 & 0.9883 & 1.0000 & 0.9883 & 0.9542 \\ 0.8587 & 0.8894 & 0.8999 & 0.8894 & 0.9542 & 0.9883 & 1.0000 & 0.9883 \\ 0.8099 & 0.8587 & 0.8894 & 0.8999 & 0.8999 & 0.9542 & 0.9883 & 1.0000 \end{bmatrix}$				
4x4 case	$R_{high} = \begin{bmatrix} 1.0000 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 0.9541 & 0.9430 & 0.9105 & 0.8587 & 0.8999 & 0.8894 & 0.8587 \\ 0.9882 & 1.0000 & 0.9882 & 0.9541 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.8894 & 0.8999 & 0.8894 \\ 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9105 & 0.9430 & 0.9541 & 0.9430 & 0.8587 & 0.8894 & 0.8999 \\ 0.8999 & 0.9541 & 0.9882 & 1.0000 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8587 & 0.9105 & 0.9430 & 0.9541 & 0.8099 & 0.8587 & 0.8894 \\ 0.9882 & 0.9767 & 0.9430 & 0.8894 & 1.0000 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 & 0.9541 & 0.9430 & 0.9105 \\ 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 & 0.9541 & 0.9767 & 0.9430 & 0.9430 & 0.9541 & 0.9430 \\ 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 & 0.8587 & 0.9105 & 0.9430 \\ 0.9541 & 0.9430 & 0.9767 & 0.9882 & 0.8999 & 0.9541 & 0.9882 & 1.0000 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8587 & 0.9105 & 0.9430 \\ 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 \\ 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 0.9541 & 0.9767 & 0.9882 & 0.9767 \\ 0.9105 & 0.9430 & 0.9541 & 0.9430 & 0.9430 & 0.9767 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 \\ 0.8587 & 0.9105 & 0.9430 & 0.9541 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 0.8484 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 0.8484 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 \\ 0.8587 & 0.8894 & 0.8587 & 0.8894 & 0.8587 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 \\ 0.8587 & 0.8894 & 0.8999 & 0.8587 & 0.9430 & 0.9541 & 0.9430 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9767 & 0.9882 & 0.9767 & 0.9882 & 0.8999 & 0.9541 & 0.9882 & 0.9767$	4 0.8587 9 0.8894 4 0.8999 5 0.8587 0 0.9105 1 0.9430 10 0.9541 0 0.8894 7 0.9430 2 0.9767 7 0.9882 1 0.8999 12 0.9541 0 0.9882			

Table B.5.2-3: MIMO correlation matrices for medium correlation

1x2 case					[N/A]				
2x2 case			$R_{_{medium}} =$	(1.0000 0.9000 0.3000 0.2700	0.9000 1.0000 0.2700 0.3000	0.3000 0.2700 1.0000 0.9000	0.2700 0.3000 0.9000 1.0000)		
2x4 case	$R_{{}_{medium}}=$	1.0000 0.9884 0.9543 0.9000 0.3000 0.2965 0.2863 0.2700	0.9884 0.9543 0.2965 0.3000 0.2965	1.0000 0.9884 0.2863 0.2965 0.3000	0.9884 1.0000 0.2700 0.2863 0.2965	0.2863 0.2700 1.0000 0.9884 0.9543	0.3000 0.2965 0.2863 0.9884 1.0000 0.9884	0.2863 (0.2965 0.3000 0.2965 0.9543 0.9884 1.0000 0.9884	0.2700 0.2863 0.2965 0.3000 0.9000 0.9543 0.9884 1.0000
4x4 case	$R_{medium} = \begin{pmatrix} 1.0000 \\ 0.99 \\ 0.89 \\ 0.88 \\ 0.88 \\ 0.80 \\ 0.50$	541 0.9882 1.00 599 0.9541 0.98 747 0.8645 0.83 545 0.8747 0.86 347 0.8645 0.87 372 0.8347 0.85 355 0.5787 0.55 367 0.5855 0.57 368 0.5787 0.58 270 0.5588 0.57 000 0.2965 0.28 365 0.3000 0.29 362 0.2965 0.3000 0.2965 0.3000 0.2965	00 0.9882 0.8 82 1.0000 0.7 47 0.7872 1.0 45 0.8347 0.9 47 0.8645 0.9 45 0.8747 0.8 88 0.5270 0.8 87 0.5588 0.8 87 0.5585 0.7 62 0.2700 0.5 65 0.2862 0.5 00 0.2965 0.5	645 0.8747 0. 347 0.8645 0. 872 0.8347 0. 000 0.9882 0. 882 1.0000 0. 541 0.9882 1. 999 0.9541 0. 747 0.8645 0. 645 0.8747 0. 347 0.8645 0. 872 0.8347 0. 8855 0.5787 0. 588 0.5787 0.	8645 0.8347 8747 0.8645 8645 0.8747 9541 0.8999 9882 0.9541 0000 0.9882 9882 1.0000 8347 0.7872 8645 0.8347 8747 0.8645 8645 0.8747 5588 0.5270 5787 0.5588 5855 0.5787	0.7872 0.8347 1.0000 0.9882 0.9882 1.0000 0.9541 0.9882 0.8999 0.9541	0.5787 0.5588 0.5855 0.5787 0.5787 0.5855 0.8347 0.7872 0.8645 0.8347 0.9541 0.8999 0.9882 0.9541 1.0000 0.9882 0.9882 1.0000 0.8347 0.7872 0.8645 0.8347 0.8747 0.8645	0.2862 0.2965 0.2700 0.2862 0.5855 0.5787 0.5588 0.5787 0.5270 0.5588 0.8747 0.8645 0.8645 0.8747 0.8347 0.8645 0.7872 0.8347 1.0000 0.9882 0.9882 1.0000 0.9541 0.9882	0.2965 0.2862 0.3000 0.2965 0.3000 0.5588 0.5270 0.5588 0.5855 0.5787 0.5787 0.5855 0.8347 0.7872 0.8645 0.8747 0.8645 0.8747 0.9541 0.8999 0.9882 0.9541 1.0000 0.9882

Table B.5.2-4: MIMO correlation matrices for low correlation

1x2 case	$R_{low} = \mathbf{I}_2$
1x4 case	$R_{low} = \mathbf{I}_4$
2x2 case	$R_{low} = \mathbf{I}_4$
2x4 case	$R_{low} = \mathbf{I}_8$
4x4 case	$R_{low} = \mathbf{I}_{16}$

In Table B.5.2-4, \mathbf{I}_d is a $d \times d$ identity matrix.

NOTE: For completeness, the 1x2 cases were defined for high, medium and low correlation but for Rel-8 onwards for 1Tx, performance requirements exist only for low correlation.

Annex C (normative): Characteristics of the interfering signals

<Text will be added.>

The interfering signal shall be a PUSCH containing data and reference symbols. Normal cyclic prefix is used. The data content shall be uncorrelated to the wanted signal and modulated according to clause 5 of TS36.211. Mapping of PUSCH modulation to receiver requirement are specified in Table C.1.

Table C.1.: Modulation of the interfering signal

Receiver requirement	Modulation
In-channel selectivity	16QAM
Adjacent channel selectivity	QPSK
and narrow-band blocking	
Blocking	QPSK
Receiver intermodulation	QPSK

Annex D (normative): Environmental requirements for the BS equipment

D.1 General

For each test in the present document, the environmental conditions under which the BS is to be tested are defined.

D.2 Normal test environment

When a normal test environment is specified for a test, the test should be performed within the minimum and maximum limits of the conditions stated in Table D.1.

Table D.1: Limits of conditions for Normal Test Environment

Condition	Minimum	Maximum		
Barometric pressure	86 kPa	106 kPa		
Temperature	15°C	30°C		
Relative Humidity	20 %	85 %		
Power supply	Nominal, as declared by the manufacturer			
Vibration	Negligible			

The ranges of barometric pressure, temperature and humidity represent the maximum variation expected in the uncontrolled environment of a test laboratory. If it is not possible to maintain these parameters within the specified limits, the actual values shall be recorded in the test report.

NOTE: This may, for instance, be the case for measurements of radiated emissions performed on an open field test site.

D.3 Extreme test environment

The manufacturer shall declare one of the following:

- 1) the equipment class for the equipment under test, as defined in the IEC 60 721-3-3 [6];
- 2) the equipment class for the equipment under test, as defined in the IEC 60 721-3-4 [7];
- 3) the equipment that does not comply to the mentioned classes, the relevant classes from IEC 60 721 documentation for Temperature, Humidity and Vibration shall be declared.

NOTE: Reduced functionality for conditions that fall out side of the standard operational conditions are not tested in the present document. These may be stated and tested separately.

D.3.1 Extreme temperature

When an extreme temperature test environment is specified for a test, the test shall be performed at the standard minimum and maximum operating temperatures defined by the manufacturer's declaration for the equipment under test.

Minimum temperature:

The test shall be performed with the environment test equipment and methods including the required environmental phenomena into the equipment, conforming to the test procedure of IEC 60 068-2-1 [8].

Maximum temperature:

The test shall be performed with the environmental test equipment and methods including the required environmental phenomena into the equipment, conforming to the test procedure of IEC 60 068-2-2 [9].

NOTE: It is recommended that the equipment is made fully operational prior to the equipment being taken to its lower operating temperature.

D.4 Vibration

When vibration conditions are specified for a test, the test shall be performed while the equipment is subjected to a vibration sequence as defined by the manufacturer's declaration for the equipment under test. This shall use the environmental test equipment and methods of inducing the required environmental phenomena in to the equipment, conforming to the test procedure of IEC 60 068-2-6 [10]. Other environmental conditions shall be within the ranges specified in clause D.2.

NOTE: The higher levels of vibration may induce undue physical stress in to equipment after a prolonged series of tests. The testing body should only vibrate the equipment during the RF measurement process.

D.5 Power supply

When extreme power supply conditions are specified for a test, the test shall be performed at the standard upper and lower limits of operating voltage defined by manufacturer's declaration for the equipment under test.

Upper voltage limit:

The equipment shall be supplied with a voltage equal to the upper limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60 068-2-1 [8] Test Ab/Ad and IEC 60 068-2-2 [9] Test Bb/Bd: Dry Heat.

Lower voltage limit:

The equipment shall be supplied with a voltage equal to the lower limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60 068-2-1 [8] Test Ab/Ad and IEC 60 068-2-2 [9] Test Bb/Bd: Dry Heat.

D.6 Measurement of test environments

The measurement accuracy of the BS test environments defined in Annex D, Test environments shall be.

 $\begin{array}{lll} \text{Pressure:} & \pm 5 \text{ kPa.} \\ \text{Temperature:} & \pm 2 \text{ degrees.} \\ \text{Relative Humidity:} & \pm 5 \%. \\ \text{DC Voltage:} & \pm 1,0 \%. \\ \text{AC Voltage:} & \pm 1,5 \%. \\ \text{Vibration:} & 10 \%. \\ \text{Vibration frequency:} & 0,1 \text{ Hz.} \\ \end{array}$

The above values shall apply unless the test environment is otherwise controlled and the specification for the control of the test environment specifies the uncertainty for the parameter.

Annex E (normative): General rules for statistical testing

<Text will be added.>

Annex F (normative): Global In-Channel TX-Test

F.1 General

The global in-channel Tx test enables the measurement of all relevant parameters that describe the in-channel quality of the output signal of the TX under test in a single measurement process.

The parameters describing the in-channel quality of a transmitter, however, are not necessarily independent. The algorithm chosen for description inside this annex places particular emphasis on the exclusion of all interdependencies among the parameters.

F.2.1 Basic principle

The process is based on the comparison of the actual **output signal of the TX under test**, received by an ideal receiver, with a **reference signal**, that is generated by the measuring equipment and represents an ideal error free received signal. All signals are represented as equivalent (generally complex) baseband signals.

The description below uses numbers and illustrations as examples. These numbers are taken from frame structure 1 with normal CP length and a transmission bandwidth configuration of $N_{RB} = 100$. The application of the text below, however, is not restricted to this parameterset.

F.2.2 Output signal of the TX under test

The output signal of the TX under test is acquired by the measuring equipment and stored for further processing. It is sampled at a sampling rate of 30.72 Msps and it is named z(v). In the time domain it comprises at least 1 frame:: z(v). It is modelled as a signal with the following parameters: demodulated data content, carrier frequency, amplitude and phase for each subcarrier.

F.2.3 Reference signal

Two types of reference signal are defined:

The reference signal $i_1(v)$ is constructed by the measuring equipment according to the relevant TX specifications, using the following parameters: demodulated data content, nominal carrier frequency, nominal amplitude and phase for each subcarrier. It is represented as a sequence of samples at a sampling rate of 30.72 Msps in the time domain. The structure of the signal is described in the testmodells.

The reference signal $i_2(v)$ is constructed by the measuring equipment according to the relevant TX specifications, using the following parameters: restricted data content: nominal Reference Symbols and the Primary Synchronisation Channel, (all other modulation symbols are set to 0 V), nominal carrier frequency, nominal amplitude and phase for each applicable subcarrier, nominal timing. It is represented as a sequence of samples at a sampling rate of 30.72 Msps in the time domain.

F.2.4 Measurement results

The measurement results, achieved by the global in channel TX test are the following:

- Carrier Frequency error
- EVM (Error Vector Magnitude)
- Resource Element TX power
 - o RS TX power (RSTP)

o OFDM Symbol TX power (OSTP)

Other side results are: residual amplitude- and phase response of the TX chain after equalisation.

F.2.5 Measurement points

Resource element TX power is measured after the FFT as described below. EVM is calculated after the Equalizer (Ampl./ Phase correction). The result of the frequency synchronisation is the frequency offset. It is performed in the pre- and/or post-FFT domain. The FFT window of 2048 samples out of 2194 samples (data +CP) in the time domain is selected in the box CP removal.

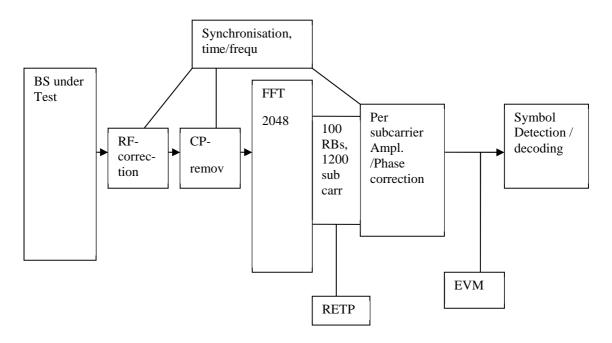


Figure E.2.5-1: Measurement points

F.3.1 Pre FFT minimization process

Sample Timing, Carrier Frequency in z(v) are varied in order to minimise the difference between z(v) and $i_1(v)$, after the amplitude ratio of z(v) and $i_1(v)$ has been scaled. Best fit (minimum difference) is achieved when the RMS difference value between z(v) and i(v) is an absolute minimum.

The carrier frequency variation is the measurement result: Carrier Frequency Error.

From the acquired samples one carrier frequency error can be derived.

- Note 1. The minimisation process, to derive the RF error can be supported by Post FFT operations. However the minimisation process defined in the pre FFT domain comprises all acquired samples (i.e. it does not exclude the samples inbetween the FFT widths and it does not exclude the bandwidth outside the transmission bandwidth configuration.
- Note 2. The algorithm would allow to derive Carrier Frequency error and Sample Frequency error of the TX under test separately. However there are no requirements for Sample Frequency error. Hence the algorithm models the RF and the sample frequency commonly (not independently). It returns one error and does not distinuish between both.

After this process the samples z(v) are called $z^0(v)$.

F.3.2 Timing of the FFT window

The FFT window length is 2048 samples per OFDM symbol. 140 FFTs (286720 samples) cover less than the acquired number of samples (30720 samples in 10 subframes) The position in time for FFT must be determined.

In an ideal signal, the FFT may start at any instant within the cyclic prefix without causing an error. The TX filter, however, reduces the window. The EVM requirements shall be met within a window W < CP. There are three different instants for FFT:

Centre of the reduced window, called $\Delta \tilde{c}$, $\Delta C - W/2$ and $\Delta C + W/2$,

The BS shall transmit a signal according to the Test models, intended for EVM. The primary synchronisation signal and the reference signal shall be used to find the centre of the FFT window.

The timing of the measured signal is determined in the pre FFT domain as follows, using $z^0(v)$ and $i_2(v)$:

- 1. The measured signal is delay spread by the TX filter. Hence the distinct boarders between the OFDM symbols and between Data and CP are also spread and the timing is not obvious.
- 2. In the Reference Signal i2(v) the timing is known.
- 3. Correlation between (1.) and (2.) will result in a correlation peak. The meaning of the correlation peak is approx. the "impulse response" of the TX filter.

The meaning of "impulse response" assumes that the autocorrelation of the reference signal i2(v) is a Dirac peak and that the correlation between the reference signal i2(v) and the data in the measured signal is 0. The correlation peak, (the highest, or in case of more than one highest, the earliest) indicates the timing in the measured signal.

The number of samples, used for FFT is reduced compared to $z^0(v)$. This subset of samples is called z'(v).

From the acquired samples one timing can be derived.

The timing of the centre $\Delta \tilde{c}$ with respect to the different CP length in a slot is as follows: (Frame structure 1, normal CP length)

 $\Delta \tilde{c}$ is on T_f=72 within the CP of length 144 (in OFDM symbol 1 to 6)

 $\Delta \tilde{c}$ is on T_f=88 (=160-72) within the CP of length 160 (in OFDM symbol 0)

F.3.3 Resource Element TX power

Perform FFT (z'(v)) with the FFT window timing $\Delta \tilde{c}$

The result is called Z'(t,f). The RE TX power is then defined as:

$$RETP = |Z'(t, f)|^2 15 KHz$$

From this the Reference Signal Transmit power (RSTP) is derives as follows:

$$RSTP = \frac{1}{n} \sum_{\substack{RS \ RE \ locations \ within \ subframe}} RETP \ ,$$

It is an average power and accumulates the powers of the reference symbols within a sub frame divided by n, the number of reference symbols within a sub frame.

From RETP the OFDM Symbol TX power (OSTP) is derived as follows:

$$OSTP = \sum_{\substack{all \ N_{RB}^{DL} N_{sc}^{RB} \ RE \ locations \\ of \ 4th \ symbol \ within \ subframe}} RETP$$

It accumulates all sub carrier powers of the 4th OFDM symbol. The 4th (out of 14 OFDM symbols within a subframe (in case of frame type 1, normal CP length)) contains exclusively PDSCH.

From the acquired samples 10 values for each RSTP and OSTP can be derived.

F.3.4 Post FFT equalisation

Perform 140 FFTs on z'(v), one for each OFDM symbol comprising the full frame with the FFT window timing $\Delta \widetilde{c}$. (in case of frame type 1, normal CP length) The result is an array of samples, 140 in the time axis t times 2048 in the frequency axis f.

The equalizer coefficients $\tilde{a}(f)$ and $\tilde{\varphi}(f)$ are determined as follows:

1. Calculate the complex ratios (amplitude and phase) of the post-FFT acquired signal Z'(t,f) and the post-FFT Ideal signal $I_2(t,f)$, for each reference symbol, over 10 subframes. This process creates a set of complex ratios:

$$a(t, f).e^{j\varphi(t, f)} = \frac{Z'(t, f)}{I_2(t, f)}$$

2. Perform time averaging at each reference signal subcarrier of the complex ratios, the time-averaging length is 10 subframes. Prior to the averaging of the phases $\varphi(t_i, f)$ an unwrap operation must be performed according to the following definition: The unwrap operation corrects the radian phase angles of $\varphi(t_i, f)$ by adding multiples of 2*PI when absolute phase jumps between consecutive time instances t_i are greater then or equal to the jump tolerance of PI radians. This process creates an average amplitude and phase for each reference signal subcarrier (i.e. every third subcarrier with the exception of the reference subcarrier spacing across the DC subcarrier).

$$a(f) = \frac{\sum_{i=1}^{N} a(t_i, f)}{N}$$

$$\varphi(f) = \frac{\sum_{i=1}^{N} \varphi(t_i, f)}{N}$$

Where *N* is the number of reference symbol time-domain locations t_i from Z'(f,t) for each reference signal subcarrier f.

- 3. The equalizer coefficients for amplitude and phase $\hat{a}(f)$ and $\hat{\varphi}(f)$ at the reference signal subcarriers are obtained by computing the moving average in the frequency domain of the time-averaged reference signal subcarriers, i.e. every third subcarrier. The moving average window size is 19. For reference subcarriers at or near the edge of the channel the window size is reduced accordingly as per figure F. 3.4.
- 4. Perform linear interpolation from the equalizer coefficients $\hat{a}(f)$ and $\hat{\varphi}(f)$ to compute coefficients $\tilde{a}(f)$, $\tilde{\varphi}(f)$ for each subcarrier.

The equalized samples are called $Z'_{eq}(f,t)$.

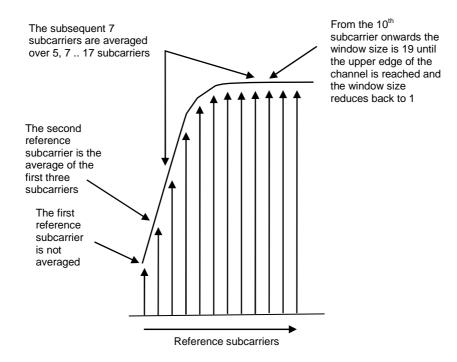


Figure F.3.4-1: Reference subcarrier smoothing in the frequency domain

F.4.1 EVM

For EVM create two sets of $Z'_{eq}(f,t)$, according to the timing " $\Delta C - W/2$ and $\Delta C + W/2$ ", using the equalizer coefficients from F.3.4.

The equivalent ideal samples are calculated form $i_1(v)$ (clause F.2.3) and are called I(f,t).

The EVM is the difference between the ideal waveform and the measured and equalized waveform.

$$EVM = \sqrt{\frac{\displaystyle\sum_{t \in T} \sum_{f \in F(t)} \left| Z_{eq}'(f, t) - I(f, t) \right|^2}{\displaystyle\sum_{t \in T} \sum_{f \in F(t)} \left| I(f, t) \right|^2}},$$

where

T is the set of symbols with the considered modulation scheme being active within the subframe,

F(t) is the set of subcarriers within the $N_{\rm SC}^{\rm RB}$ resource blocks with the considered modulation scheme being active in symbol t,

I(t, f) is the ideal signal reconstructed by the measurement equipment in accordance with relevant Test models,

 $Z'_{eq}(t,f)$ is the equalized signal under test.

Note1: Although the basic unit of measurement is one subframe, the equalizer is calculated over the entire 10 subframes measurement period to reduce the impact of noise in the reference symbols.

Note 2: Applicability of EVM calculation:

One EVM value is associated to 12 subcarriers times 1 subframe = pair of 2 RBs = 168 resource elements.

But only a reduced number of REs in this pair of 2 RBs contribute to EVM. Those are the PDSCH REs, containing the considered modulation scheme. Only those pairs of 2 RBs are evaluated with respect to EVM, which contain the maximum number of PDSCH REs. (EVM-relevant location in the time/frequency grid) The others are not evaluated.

In specific:

For bandwidth 1.4 MHz:

Only the pairs of 2 RBs containing 138 PDSCH REs are used for EVM. Only those 138 REs contribute to EVM

All pairs of 2 RBs, which contain less than 138 PDSCH REs, are not evaluated with respect to EVM.

For all other Bandwidths:

Only the pairs of 2 RBs containing 150 PDSCH REs are used for EVM. Only those 150 REs contribute to EVM

All pairs of 2 RBs, which contain less than 150 PDSCH REs, are not evaluated with respect to EVM.

This restriction serves to avoid weighted averaging in F.4.2.

F.4.2 Averaged EVM

EVM is averaged over all allocated EVM relevant locations in the frequency domain, and 10 consecutive downlink subframes (10 ms):

(The locations in the time-frequency grid are occupied irregularly, see Fig F.4.2-1)

EVM is derived by: square the EVM resultsin F.4.1, sum the squares over all EVM relevant locations in the time/frequency grid, divide the sum by the number of EVM relevant locations, square-root the quotient.

The EVM requirements should be tested against the maximum of the average EVM at the window W extremities of the EVM measurements:


Thus $\overline{\text{EVM}}_1$ is calculated using $\Delta \widetilde{t} = \Delta \widetilde{t}_l$ in the expressions above and $\overline{\text{EVM}}_h$ is calculated using $\Delta \widetilde{t} = \Delta \widetilde{t}_h$. (1 and h, low and high. Where 1 is the timing $\Delta C - W/2$ and and high is the timing $\Delta C + W/2$)


Thus we get:

$$EVM_{final} = \max(\overline{EVM}_1, \overline{EVM}_h)$$

For TDD special fields (DwPTS and GP) are not included in the averaging.

15 RBs

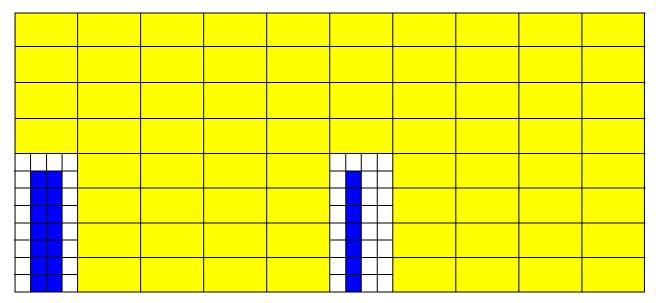

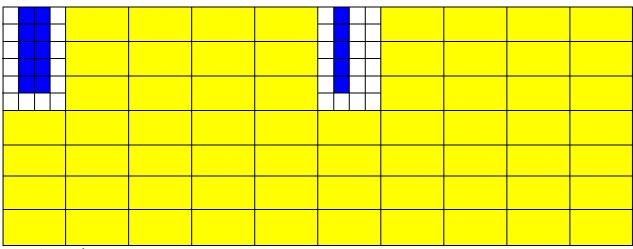

10 subframes →

Yellow: 136 EVM-relevant locations in the time/frequency grid

Blue: non PDSCH REs

White: RBs with non-maximum number of PDSCH REs

Figure F.4.2-1: Applicability of EVM calculation Example: E-TM1.x, E-TM3.x, 3MHz

F.4.2.1 Averaged EVM (TDD)

For TDD the averaging in the time domain can be calculated from subframes of different frames and should have a minimum of 10 subframes averaging length. TDD special fields (DwPTS and GP) are not included in the averaging.

EVM frame is derived by: Square the EVM results in a frame. Relevant for EVM are subframes in a frame, which are active in the DL, Ndl. Within these subframes, those RBs are relevant, that carry the maximum number of PDSCH REs (same as FDD). Sum the squares, divide the sum by the number of EVM relevant locations, square-root the quotient. (RMS)

The EVM_{frame} is calculated, using the maximum of $\overline{EVM}_{\text{frame}}$ at the window W extremities. Thus $\overline{EVM}_{\text{frame,l}}$ is calculated using $\Delta \widetilde{t} = \Delta \widetilde{t}_l$ and $\overline{EVM}_{\text{frame,h}}$ is calculated using $\Delta \widetilde{t} = \Delta \widetilde{t}_h$. (1 and h, low and high. Where 1 is the timing $\Delta C - W/2$ and and high is the timing $\Delta C + W/2$)

$$EVM_{frame} = \max(\overline{EVM}_{frame,l}, \overline{EVM}_{frame,h})$$

In order to unite at least 10 subframes, consider the minimum integer number of radio frames, containing at least 10 EVM relevant subframes. Unite by RMS.

$$\overline{EVM} = \sqrt{\frac{1}{N_{frame}} \sum_{k=1}^{N_{frame}} EVM_{frame,k}^{2}}, N_{frame} = \left[\frac{10}{N_{dl}}\right]$$

The result, \overline{EVM} , is compared against the limit.

Annex G (informative): Test Tolerances and Derivation of Test Requirements

The Test Requirements in this specification have been calculated by relaxing the Minimum Requirements of the core specification using the Test Tolerances defined here. When the Test Tolerance is zero, the Test Requirement will be the same as the Minimum Requirement. When the Test Tolerance is non-zero, the Test Requirements will differ from the Minimum Requirements, and the formula used for this relaxation is given in the following tables.

The Test Tolerances are derived from Test System uncertainties, regulatory requirements and criticality to system performance. As a result, the Test Tolerances may sometimes be set to zero.

The test tolerances should not be modified for any reason e.g. to take account of commonly known test system errors (such as mismatch, cable loss, etc.).

Note that a formula for applying Test Tolerances is provided for all tests, even those with a test tolerance of zero. This is necessary in the case where the Test System uncertainty is greater than that allowed in clause 4.1.2. In this event, the excess error shall be subtracted from the defined test tolerance in order to generate the correct tightened Test Requirements as defined in this Annex.

[FFS: For example, a Test System having 0.9 dB uncertainty for test 6.2 Base Station maximum output power (which is 0.2 dB above the limit specified in clause 4.1.2) would subtract 0.2 dB from the Test Tolerance of 0.7 dB defined in this Annex. This new test tolerance of 0.5 dB would then be applied to the Minimum Requirement using the formula defined in Table G.2-1 to give a new range of ±2.5 dB of the manufacturer's rated output power.

Using this same approach for the case where a test had a test tolerance of 0 dB, an excess error of 0.2 dB would result in a modified test tolerance of -0.2 dB.]

G.1 Measurement of transmitter

Table G.1-1: Derivation of Test Requirements (Transmitter tests)

Test	Minimum Requirement in TS 36.104	Test Tolerance (TT)	Test Requirement in TS 36.141
6.2 Base station		,	Formula:
maximum output power			Upper limit + TT, Lower limit - TT
pens.	In normal conditions: within ±2 dB of manufacturer's	Normal and extreme conditions:	In normal conditions: within +2.7 dB and -2.7 dB of the manufacturer's rated output power, $f \le 3.0 GHz$
	rated output power	0.7 dB, f ≤ 3.0GHz	within +3.0 dB and -3.0 dB of the manufacturer's rated output power, $3.0 \text{GHz} < \text{f} \le 4.2 \text{GHz}$
	In extreme	1.0 dB, 3.0GHz < f ≤ 4.2GHz	In extreme conditions: within +3.2 dB and -3.2 dB of the manufacturer's rated output power, $f \le 3.0 GHz$
	conditions: within ±2.5 dB of manufacturer's rated output power		within +3.5 dB and -3.5 dB of the manufacturer's rated output power, 3.0GHz < f ≤ 4.2GHz
6.3.2 Total power dynamic range	Total power dynamic range (dB): 1.4 MHz E-UTRA: 7.7 3 MHz E-UTRA: 11.7 5 MHz E-UTRA: 13.9 10 MHz E-UTRA: 16.9 15 MHz E-UTRA: 18.7 20 MHz E-UTRA: 20	0.4 dB	Formula: Total power dynamic range – TT (dB) 1.4 MHz E-UTRA: 7.3 3 MHz E-UTRA: 11.3 5 MHz E-UTRA: 13.5 10 MHz E-UTRA: 16.5 15 MHz E-UTRA: 18.3 20 MHz E-UTRA: 19.6
6.4.1 Transmitter OFF power	-85dBm/MHz.	2 dB, f ≤ 3.0GHz 2.5 dB, 3.0GHz < f	Formula: Minimum Requirement + TT
6.4.2 Transmitter transient period	Transmitter transient period : off to on: 17 us on to off: 17 us	≤ 4.2GHz N/A	Minimum Requirement
6.5.1 Frequency error	Frequency error limit ±0.05 ppm	12 Hz	Formula: Frequency Error limit + TT 0.05 ppm + 12 Hz
6.5.2 EVM	EVM limit: QPSK: 17.5 % 16QAM: 12.5 % 64QAM: 8 %	1 %	Formula: EVM limit + TT QPSK: 18.5 % 16QAM: 13.5 % 64QAM: 9 %
6.5.3 Time alignment error	Time alignment error within 65 ns	25 ns	Formula: Time alignment error limit + TT 90 ns

6.5.4 DL RS power	DL RS power	0.8 dB, f ≤	Formula:
	shall be within ±2.1 dB	3.0GHz	Upper limit + TT Lower limit - TT
		1.1 dB, 3.0GHz < f	DL RS power shall be within ±2.9 dB, f ≤ 3.0GHz
		3.0GH2 < 1 ≤ 4.2GHz	DL RS power shall be within ±3.2 dB, 3.0GHz < f ≤ 4.2GHz
6.6.1 Occupied bandwidth	1.4 MHz 3 MHz 5 MHz 10 MHz 15 MHz 20 MHz	0 kHz	Formula: Minimum Requirement + TT
6.6.2 Adjacent	20 1411 12		Formula:
Channel Leakage power Ratio (ACLR)			ACLR Minimum Requirement - TT Absolute limit +TT
	Paired spectrum ACLR: 45 dB for E- UTRA 45 dB for UTRA Unpaired spectrum ACLR: 45 dB for E- UTRA 45 dB for 1.28 Mcps UTRA 45 dB for 3.84 Mcps UTRA 45 dB for 7.82 Mcps UTRA A5 dB for 7.82 Mcps UTRA A5 dB for 7.82 Mcps UTRA A5 dB for 7.82 Mcps UTRA	0.8 dB 0.8 dB 0.8 dB 0.8 dB 0.8 dB 0.8 dB	Paired spectrum ACLR: 44.2 dB 44.2 dB Unpaired spectrum ACLR: 44.2 dB 44.2 dB 44.2 dB 44.2 dB 44.2 dB Absolute limit -13dBm / MHz

198

CCO On anatina	[[] [] [] [] [] [] [] [] [] [Formula
6.6.3 Operating band unwanted emissions	For Wide Area BS:		Formula:
Cilisatoria	Category A, bands < 1GHz For 1.4MHz BW:		Minimum Requirement + TT
	Offsets < 2.8MHz		
	-1dBm to - 11dBm / 100kHz	1.5dB	
	Offsets ≥ 2.8MHz	OdD	
	-13dBm / 100kHz For 3MHz BW:	0dB	
	Offsets < 3MHz -4.5dBm to - 14.5dBm /		
	100kHz	1.5dB	
	Offsets ≥ 3MHz -13dBm / 100kHz	0dB	
	For 5, 10, 15, 20MHz BW: Offsets < 10MHz		
	-7dBm to -		
	14dBm / 100kHz Offsets ≥ 10MHz	1.5dB	
	-13dBm / 100kHz	0dB	
	Cotogon		
	Category A, bands > 1GHz	1.5dB, f ≤	
	For 1.4MHz BW:	3.0GHz	
	Offsets < 2.8MHz -1dBm to -	1.8dB, 3.0GHz < f	
	11dBm / 100kHz	≤ 4.2GHz	
	Offsets ≥ 2.8MHz -13dBm / 1MHz	0dB	
	For 3MHz BW: Offsets < 6MHz	1.5dB, f ≤ 3.0GHz	
	-5dBm to - 15dBm / 100kHz	1.8dB, 3.0GHz < f ≤ 4.2GHz	
	Offsets ≥ 6MHz -13dBm / 1MHz	0dB	
	For 5, 10, 15, 20MHz BW:	1.5dB, f ≤ 3.0GHz	
	Offsets < 10MHz	1.8dB,	
	-7dBm to - 14dBm / 100kHz	3.0GHz < f ≤ 4.2GHz	
	Offsets ≥ 10MHz		
	-13dBm / 1MHz	0dB	
	Category B, bands < 1GHz For 1.4MHz BW:		
	Offsets < 2.8MHz -1dBm to - 11dBm / 100kHz	1.5dB	
	Offsets ≥ 2.8MHz -16dBm / 100kHz	0dB	
	For 3MHz BW:		
	Offsets < 6MHz -5dBm to -	1.5dB	
	-5dBm to - 15dBm / 100kHz		
	Offsets ≥ 6MHz		
	-16dBm / 100kHz	0dB	

г			
	For 5, 10, 15, 20MHz BW: Offsets < 10MHz -7dBm to -	1.5dB	
	14dBm / 100kHz Offsets ≥ 10MHz -16dBm / 100kHz	0dB	
	Category B, bands > 1GHz For 1.4MHz BW: Offsets < 2.8MHz -1dBm to - 11dBm / 100kHz Offsets ≥ 2.8MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz 0dB	
	-15dBm / 1MHz For 3MHz BW: Offsets < 6MHz -5dBm to - 15dBm / 100kHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
	Offsets ≥ 6MHz -15dBm / 1MHz	0dB 1.5dB, f ≤	
	For 5, 10, 15, 20MHz BW: Offsets < 10MHz -7dBm to - 14dBm / 100kHz Offsets ≥ 10MHz -15dBm / 1MHz	3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz 0dB	
	For Home BS:		
	Category A and B: For 1.4MHz BW: Offsets < 2.8MHz -30dBm to - 36dBm / 100kHz Offsets ≥ 2.8MHz -50 dBm to -	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
	32dBm / 1MHz For 3MHz BW: Offsets < 6MHz -34dBm to - 40dBm / 100kHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
	Offsets ≥ 6MHz -50dBm to - 32dBm / 1MHz	OdB	
	For 5, 10, 15, 20MHz BW: Offsets < 10MHz -36dBm to - 42dBm / 100kHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
	Offsets ≥ 10MHz -50dBm to - 32dBm / 1MHz	0dB	
	Additional Reqts, bands < 1GHz All BWs:	0dB	
	Additional Reqts, bands > 1GHz	0dB	

	L A II DIA/		T
	All BWs:		
	Additional Reqts bands 12,13,14 All BWs:	0dB	
	Additional Reqts bands 20 All BWs:	0dB	
6.6.4.5.1	Category A	0dB	Formula:
Transmitter spurious emissions, Mandatory	9 kHz ≤ f < 150 kHz: -13dBm / 1kHz		Minimum Requirement + TT
Requirements	150 kHz ≤ f < 30 MHz: -13dBm / 10 kHz		
	30 MHz ≤ f < 1 GHz: -13dBm / 100 kHz		
	1 GHz ≤ f < 12.75 GHz: -13dBm / 1 MHz		
6.6.4.5.2 Transmitter	Category B	0dB	Formula:
spurious emissions, Mandatory Requirements	9 kHz ≤ f < 150 kHz: -36dBm / 1 kHz		Minimum Requirement + TT
	150 kHz ≤ f < 30 MHz: -36dBm / 10 kHz		
	30 MHz ≤ f < 1 GHz:		
	-36dBm / 100 kHz		
	1 GHz ≤ f < 12.75 GHz: -36dBm / 1 MHz		
6.6.4.5.3	-96dBm / 100	0dB	Formula:
Transmitter spurious emissions, Protection of BS receiver	kHz		Minimum Requirement + TT
6.6.4.5.4 Transmitter spurious emissions,	Levels from - 61dBm to - 41dBm	0dB	Formula: Minimum Requirement + TT
Additional spurious emissions requirements	Bandwidths from 6.25 kHz to 1MHz		
	See TS 36.104 [2] for details		
6.6.4.5.5 Transmitter spurious emissions,	Levels from - 98dBm to - 96dBm	0dB	Formula: Minimum Requirement + TT
Co-location	Bandwidth 100 kHz		
	See TS 36.104 [2] for details		

6.7 Transmitter	Wanted signal	0dB	Formula: Ratio + TT
intermodulation	level - interferer		
(interferer	level = 30dB		Wanted signal level - interferer level = 30 + 0dB
requirements)			
This tolerance			
applies to the			
stimulus and not the			
measurements			
defined in 6.6.2,			
6.6.3 and 6.6.4.			

G.2 Measurement of receiver

Table G.2-1: Derivation of Test Requirements (Receiver tests)

Test	Minimum Requirement in TS 36.104	Test Tolerance	Test Requirement in TS 36.141
		(TT)	
7.2 Reference sensitivity level	Reference sensitivity power level:		Formula: Reference sensitivity power level + TT
	-106.8 dBm for 1.4 MHz BW -103.0 dBm for 3 MHz BW -101.5 dBm for 5 MHz BW -101.5 dBm for 10 MHz BW -101.5 dBm for 15 MHz BW -101.5 dBm for 20 MHz BW	f ≤ 3.0GHz 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB	f ≤ 3.0GHz -106.1 dBm for 1.4 MHz BW -102.3 dBm for 3 MHz BW -100.8 dBm for 5 MHz BW -100.8 dBm for 10 MHz BW -100.8 dBm for 15 MHz BW -100.8 dBm for 20 MHz BW
		3.0GHz < f ≤ 4.2GHz 1.0 dB	3.0GHz < f ≤ 4.2GHz -105.8 dBm for 1.4 MHz BW -102.0 dBm for 3 MHz BW -100.5 dBm for 5 MHz BW -100.5 dBm for 10 MHz BW -100.5 dBm for 15 MHz BW -100.5 dBm for 20 MHz BW
	T-put limit = 95% of maximum for the Ref Meas channel		T-put limit unchanged
7.3 Dynamic range	Wanted signal power for Wide Area BS:		Formula: Wanted signal power + TT
	-76.3 dBm for 1.4 MHz BW -72.4 dBm for 3 MHz BW -70.2 dBm for 5 MHz BW -70.2 dBm for 10 MHz BW -70.2 dBm for 15 MHz BW -70.2 dBm for 20 MHz BW Wanted signal power for Home BS: -31.8 dBm for 1.4 MHz BW -27.9 dBm for 3 MHz BW -25.7 dBm for 5 MHz BW -25.7 dBm for 10 MHz BW -25.7 dBm for 15 MHz BW -25.7 dBm for 15 MHz BW	0.3 dB 0.3 dB 0.3 dB 0.3 dB 0.3 dB	-76.0 dBm for 1.4 MHz BW -72.1 dBm for 3 MHz BW -69.9 dBm for 5 MHz BW -69.9 dBm for 10 MHz BW -69.9 dBm for 15 MHz BW -69.9 dBm for 20 MHz BW Interferer signal power unchanged T-put limit unchanged
	-25.7 dBm for 20 MHz BW T-put limit = 95% of maximum for the Ref Meas channel		

7.4 In-channel selectivity	Wanted signal power:		Formula: Wanted signal power + TT
	-106.9 dBm for 1.4 MHz BW -102.1 dBm for 3 MHz BW -100.0 dBm for 5 MHz BW -98.5 dBm for 10 MHz BW -98.5 dBm for 15 MHz BW -98.5 dBm for 20 MHz BW	f ≤ 3.0GHz 1.4 dB 1.4 dB 1.4 dB 1.4 dB 1.4 dB 1.4 dB	$f \le 3.0 GHz$ -105.5 dBm for 1.4 MHz BW -100.7 dBm for 3 MHz BW -98.6 dBm for 5 MHz BW -97.1 dBm for 10 MHz BW -97.1 dBm for 15 MHz BW -97.1 dBm for 20 MHz BW
		3.0GHz < f ≤ 4.2GHz 1.8 dB	3.0GHz < f ≤ 4.2GHz -105.1 dBm for 1.4 MHz BW -100.3 dBm for 3 MHz BW -98.2 dBm for 5 MHz BW -96.7 dBm for 10 MHz BW -96.7 dBm for 15 MHz BW -96.7 dBm for 20 MHz BW
	T-put limit = 95% of maximum for the Ref Meas channel		Interferer signal power unchanged T-put limit unchanged
7.5 Adjacent Channel Selectivity (ACS) and narrow-band blocking	Narrowband blocking: Wanted signal power, all BWs: (PREFSENS + 6 dB) Interferer signal power, all BWs: -49dBm	0 dB	Formula: Wanted signal power + TT Narrowband blocking: all BWs: (Prefsens + 6 dB) Interferer signal power unchanged
	Adjacent channel selectivity: Wanted signal power For 1.4 MHz BW: (PREFSENS + 11dB) For 3 MHz BW: (PREFSENS + 8dB) For 5 MHz, 10MHz, 15MHz and 20MHz BW: (PREFSENS + 6dB)		Adjacent channel selectivity: Wanted signal power For 1.4 MHz BW: (PREFSENS + 11dB) For 3 MHz BW: (PREFSENS + 8dB) For 5 MHz, 10MHz, 15MHz and 20MHz BW: (PREFSENS + 6dB)
	Interferer signal power, all BWs: -52 dBm		Interferer signal power unchanged
	T-put limit = 95% of maximum for the Ref Meas channel		T-put limit unchanged
7.6.5.1 Blocking (General requirements)	In-band blocking Wanted signal power, all BWs: (P _{REFSENS} + 6 dB)	0 dB	Formula: Wanted signal power + TT, all BWs: (Prefsens + 6 dB)
	Interferer signal power, all BWs: -43dBm		Interferer signal power unchanged
	Out of band blocking Wanted signal power, all BWs: (P _{REFSENS} + 6 dB)		T-put limit unchanged
	Interferer signal power, all BWs: -15dBm CW		
	T-put limit = 95% of maximum for the Ref Meas channel		

			1
7.6.5.2 Blocking (Colocation with other base stations)	Co-located blocking Wanted signal power, all BWs: (Prefsens + 6 dB)	0 dB	Formula: Wanted signal power + TT, all BWs: (Prefsens + 6 dB)
	Interferer signal power, all BWs: +16dBm		Interferer signal power unchanged
	T-put limit = 95% of maximum for the Ref Meas channel		T-put limit unchanged
7.7 Receiver spurious emissions	-57dBm / 100 kHz -47dBm / 1 MHz	0dB	Formula: Minimum Requirement + TT
			Emission requirements unchanged
7.8 Receiver intermodulation	Wanted signal power, all BWs: (Prefsens + 6dB)	0 dB	Formula: Wanted signal power + TT, all BWs: (Prefsens + 6dB)
	CW Interferer power, all BWs: -52 dBm		CW Interferer signal power unchanged
	Modulated_Interferer power:, all BWs: -52 dBm		Modulated Interferer signal power unchanged
	T-put limit = 95% of maximum for the Ref Meas channel		T-put limit unchanged

G.3 Measurement of Performance Requirements

Table G.4-1: Derivation of Test Requirements (Performance tests)

Test	Minimum Requirement in TS 36.104	Test Tolerance (TT)	Test Requirement in TS 36.141		
8.2.1 Performance requirements of PUSCH in multipath fading propagation conditions transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT T-put limit unchanged		
8.2.1A Performance requirements of PUSCH in multipath fading propagation conditions transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT T-put limit unchanged		
8.2.2 Performance requirements for UL timing adjustment	SNRs as specified	0.6dB for fading cases 0.3dB for AWGN cases	Formula: SNR + TT T-put limit unchanged		
8.2.3 Performance requirements for HARQ-ACK multiplexed on PUSCH	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.2.4 Performance requirements for High Speed Train conditions	SNRs as specified	0.3dB	Formula: SNR + TT T-put limit unchanged		
8.3.1 ACK missed detection for single user PUCCH format 1a transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.3.2 CQI missed detection for PUCCH format 2 transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT False CQI limit unchanged Correct CQI limit unchanged		
8.3.3 ACK missed detection for multi user PUCCH format 1a	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.3.4 ACK missed detection for PUCCH format 1b with Channel Selection	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.3.5 ACK missed detection for PUCCH format 3	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.3.6 NAK to ACK detection for PUCCH format 3	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct NAK limit unchanged		
8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.3.8 CQI performance requirements for PUCCH format 2 transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged		
8.4.1 PRACH false alarm probability and missed detection	SNRs as specified	0.6dB for fading cases 0.3dB for AWGN cases	Formula: SNR + TT PRACH False detection limit unchanged PRACH detection limit unchanged		

Annex H (Informative): E-UTRAN Measurement Test Cases

<Text will be added.>

Annex I (Informative): Measurement system set-up

Example of measurement system set-ups are attached below as an informative annex.

I.1 Transmitter

I.1.1 Base station output power, output power dynamics, transmitted signal quality, Frequency error, EVM, DL RS power, Unwanted emissions

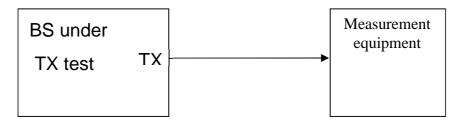


Figure I.1-1: Measuring system Set-up for base station output power, output power dynamics, transmitted signal quality, Frequency error, EVM, DL RS power, Unwanted emissions

I.1.2 Transmitter intermodulation

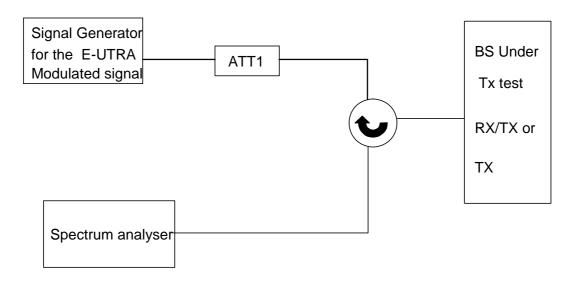


Figure I.1-2: Measuring system Set-up for Transmitter intermodulation

I.1.3 Time alignment error

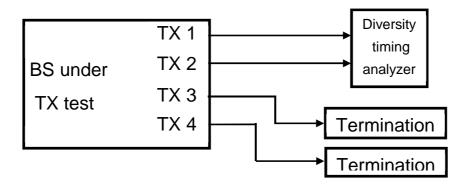


Figure I.1-3: Measuring system Set-up for Test of Time alignment error

I.1.4 Home BS output power for adjacent channel protection

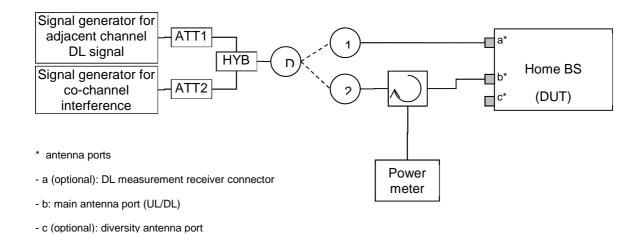


Figure I.1-4: Measuring system set-up for Home BS output power for adjacent channel protection

I.1.5 Home BS output power for co-channel E-UTRA protection

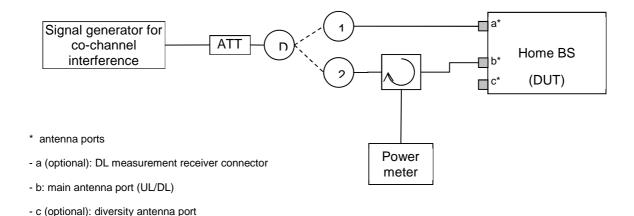


Figure I.1-5: (Option 1) Measuring system set-up for Home BS output power for co-channel E-UTRA protection

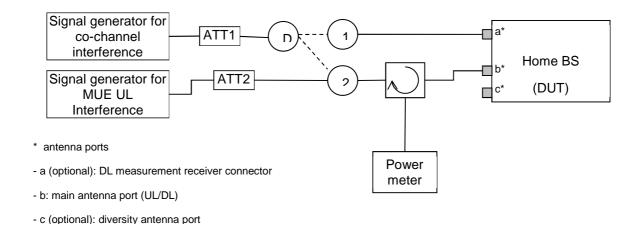


Figure I.1-6: (Option 2) Measuring system set-up for Home BS output power for co-channel E-UTRA protection

I.2 Receiver

NOTE: No HARQ feedback is done for any receiver test in Annex I.2.

I.2.1 Reference sensitivity level

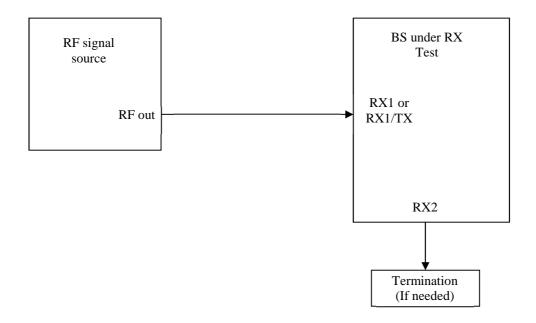


Figure I.2-1: Measuring system Set-up for Base Station Reference sensitivity level Test

I.2.2 Dynamic range

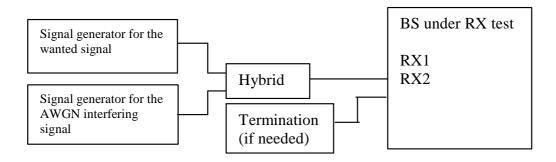


Figure I.2-2: Measuring system Set-up for Dynamic range

I.2.3 In-channel selectivity

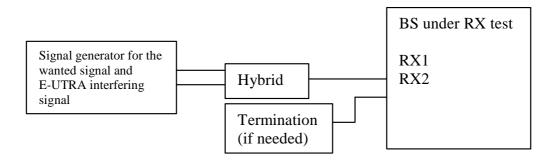


Figure I.2-3: Measuring system Set-up for In-channel selectivity

I.2.4 Adjacent Channel Selectivity (ACS) and narrowband blocking

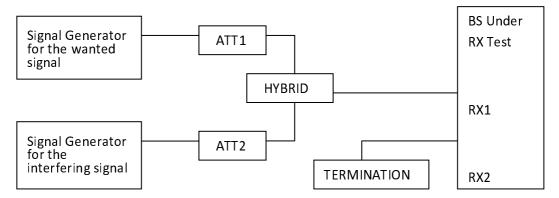


Figure I.2-4: Measuring system Set-up for Adjacent channel selectivity and narrowband blocking

I.2.5 Blocking characteristics

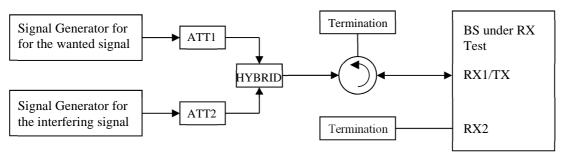


Figure I.2-5: Measuring system Set-up for Blocking characteristics

I.2.6 Receiver spurious emission

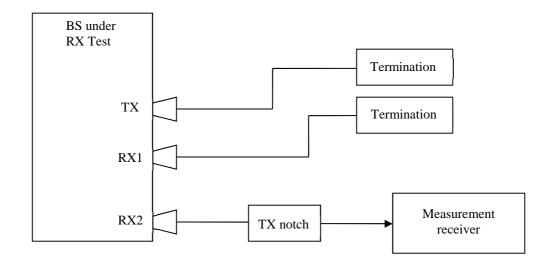


Figure I.2-6: Measuring system Set-up for Receiver spurious emission

I.2.7 Intermodulation characteristics

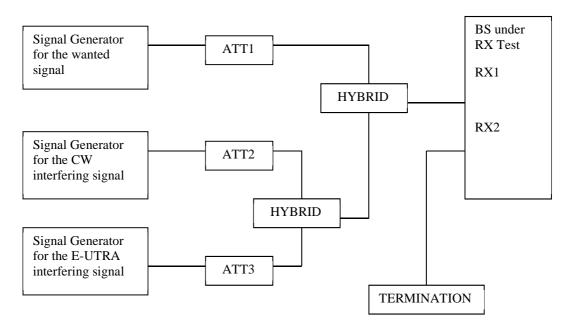


Figure I.2-7: Measuring system Set-up for intermodulation characteristics

I.3 Performance requirement

I.3.1 Performance requirements for PRACH in static conditions

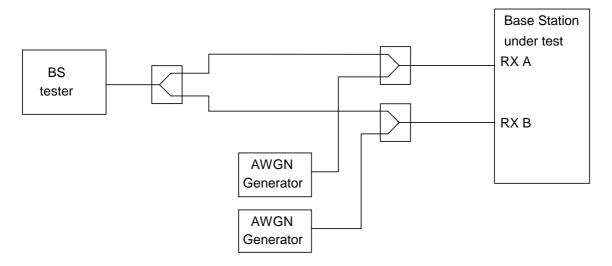


Figure I.3-1: Functional set-up for performance requirements for PRACH in static conditions for BS with Rx diversity (2 Rx case shown)

I.3.2 Performance requirements for PUSCH, PRACH, single user PUCCH in multipath fading conditions and for High Speed Train conditions

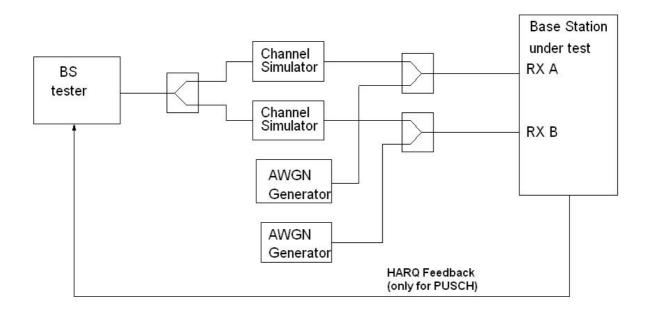


Figure I.3-2: Functional set-up for performance requirements for PUSCH, PRACH, single user PUCCH in multipath fading conditions and for High Speed Train conditions for BS with Rx diversity (2 Rx case shown)

- NOTE 1: For HST tests which are specified in static conditions, the Channel Simulators are assumed to simulate the Doppler shift.
- NOTE 2: The HARQ Feedback could be done as an RF feedback or as a digital feedback. The HARQ Feedback should be error free.

I.3.3 Performance requirements for multi user PUCCH in multipath fading conditions

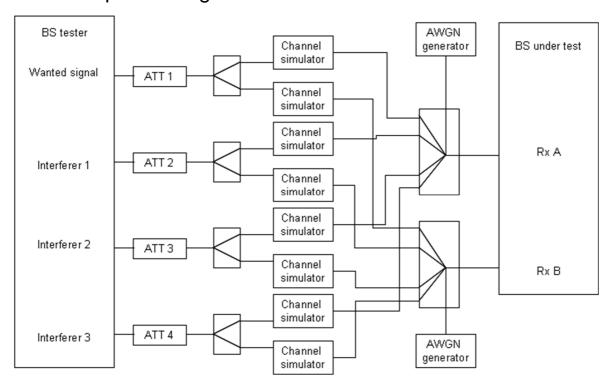


Figure I.3-3: Functional set-up for performance requirements for multi user PUCCH in multipath fading conditions

I.3.4 Performance requirement for UL timing adjustment

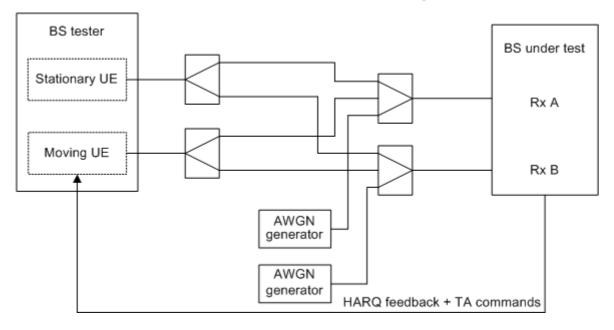


Figure I.3-4: Functional set-up for performance requirement for UL timing adjustment (Scenario 2 case shown)

- NOTE 1: In case of UL timing adjustment Scenario 1, channel simulators needs to be used for fading and Doppler shift emulation.
- NOTE 2: The HARQ feedback and TA commands could be done as an RF feedback or as a digital feedback. The HARQ feedback and TA commands should be error free.

I.3.5 Performance requirements for PUCCH transmission on two antenna ports in multipath fading conditions

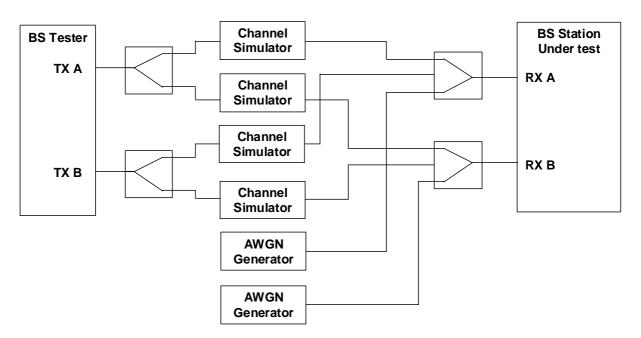


Figure I.3-5: Functional set-up for performance requirements for PUCCH transmission on two antenna ports in multipath fading conditions (2 Rx case shown)

I.3.6 Performance requirements for PUSCH transmission on two antenna ports in multipath fading conditions

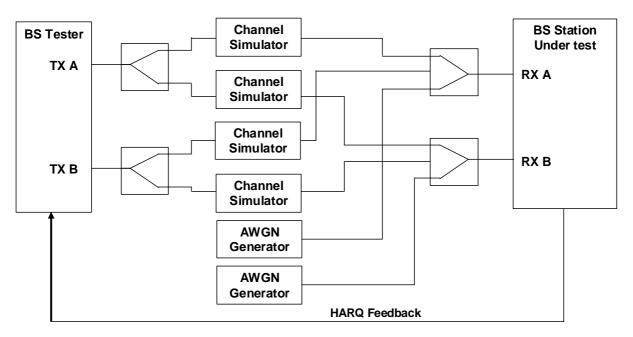


Figure I.3-6: Functional set-up for performance requirements for PUSCH transmission on two antenna ports in multipath fading conditions (2 Rx case shown)

Annex J (Informative): Unwanted emission requirements for multi-carrier BS

J.1 General

In section 6.6, unwanted emission requirements for single carrier or multi-carrier BS are specified. This multi-carrier BS corresponds to a multi-carrier BS for E-UTRA, or a BS supporting intra-band contiguous CA. The following two pragmatic scenarios are considered in this annex:

- multi-carrier BS of different E-UTRA channel bandwidths, covering all scenarios except the channel bandwidth of the outermost carrier less than 5 MHz
- multi-carrier BS of E-UTRA and UTRA, covering all scenarios except the channel bandwidth of the outermost carrier less than 5 MHz.

All scenarios for channel bandwidths of the outermost carrier less than 5 MHz are for further study. Only multi-carrier BS with contiguous carriers are considered. The guidelines below assumes that the power spectral density of the multiple carriers is the same. All other combinations of multiple carriers are ffs.

Note 1: Further information and analysis for these scenarios can be found in TR 36.942 [14].

J.2 Multi-carrier BS of different E-UTRA channel bandwidths

For a multi-carrier E-UTRA BS transmitting a group of carriers of different channel bandwidths, the channel bandwidth of the outermost carriers (≥5 MHz) should be considered for ACLR and Operating band unwanted emission requirements. That is, the corresponding requirements for the channel bandwidth of each of the outermost carriers should be applied at the respective side of the group of transmitted carriers.

J.3 Multi-carrier BS of E-UTRA and UTRA

For a multi-carrier BS transmitting a group of carriers of E-UTRA and UTRA, the RAT being used on the outermost carriers (\geq 5 MHz) should be considered for ACLR and Operating band unwanted emission requirements. That is, the corresponding requirements for the RAT being used on each of the outermost carriers should be applied at the respective side of the group of transmitted carriers.

Annex K (informative): Change history

					Change history		
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2007-08 2008-02		R4-071503 R4-080004			TS skeleton created from 3GPP TS template. Text proposals for section 2 to 4 (R4-072237) and Annex A (R4-	0.0,1	0.0.1
2000-02	INAIN4#40	N4-000004			072048), which were agreed at RAN4#45, are incorporated.	0.0, 1	0.1.0
2008-02	RAN4#46	R4-080446			Section for In-channel selectivity (new 7.4) is inserted and following sections are re-numbered. Editorial corrections are made in section 1, 3.2, 4,3, Table 4.3-1, 4.5.2.1, 4.6, 4.6.3, 4.6.4, 4.6.5 and A.2.	0.1,0	0.1.1
2008-02	RAN4#46	R4-080508			Text proposals in R4-080447, R4-080058, R4-080453, R4-080047, R4-080048, R4-080049, R4-080050, R4-080051, R4-080444, R4-080501, R4-080044, R4-080045 and R4-080046 are incorporated with modifications agreed in the first round discussion in RAN4#46 meeting. Overlapped parts in R4-080058 and R4-080044 for Annx A, R4-080444 and R4-080501 for section 8 are merged by the editor.	0.1.1	0.2.0
2008-03	RAN4#46 bis	R4-080659			Editorial correction on section 8 is made: Text proposals for section 8 in R4-080444 are removed and the text proposal in R4-080501 is applied. Some editorial corrections are applied.	0.2.0	0.2.1
2008-04	RAN4#46 bis	R4-080828			Text proposals agreed in R4-080583,R4-080617,R4-080663,R4-080664,R4-080606,R4-080584,,R4-080660,R4-080792,R4-080586,R4-080587,R4-080564,R4-080566 and R4-0806007 are incorporated with some editorial modifications.	0.2.1	0.3.0
2008-05	RAN4#47	R4-080844			Text proposals agreed in R4-080803,R4-0799,R4-0800,R4-080801 and R4-080826 are incorporated with editorial modifications.	0.3.0	0.4.0
2008-05		R4-081198			Text proposals agreed in R4-081055, R4-081007, R4-081070, R4-081170, R4-080924, R4-080888, R4-081176, R4-080853, R4-080854, R4-080855, R4-081056, R4-080889 and R4-081178 are incorporated.	0.4.0	0.5.0
2008-05	RAN#40	RP-080381			Presented for information as V1.0.0.	0.5.0	1.0.0
2008-05	RAN#40	RP-080456			Editorial corrections on the formats in order to comply with the drafting rule of 3GPP.	1.0.0	1.0.1
2008-06	RAN4#47 bis	R4-081255			Correction in section 6.5.1.5, which was incorrectly proposed in R4-081226, is made. Editorial corrections on 6.5.3.4.1 and 8.4.1.4.2 are made.	1.0.1	1.0.2
2008-06	RAN4#47 bis	R4-081256			Text proposals agreed in R4-081184 and R4-081187 are incorporated.	1.0.2	1.1.0
2008-06		R4-081329			Editorial corrections in Table 8.4.1.5-2.	1.1.0	1.1.1
2008-08		R4-081832			Text proposals agreed in the following documents are incorporated: R4-081377, R4-081547, R4-081282, R4-081284,R4-081652, R4-081502, R4-081283, R4-081650, R4-081268, R4-081269, R4-081270, R4-081653, R4-081272, R4-081645, R4-081481, R4-081281, R4-081322.	1.1.1	1.2.0
2008-08	RAN4#48	R4-082185			Text proposals agreed in the following documents are incorporated: R4-081832, R4-082087, R4-082093, R4-081847, R4-081965, R4-081967, R4-081944, R4-081709, 4-082109, R4-081711, R4-081712, R4-082090, R4-081714, R4-081715, R4-081834, R4-082135, R4-082173, R4-082160, R4-082171	1.2.0	1.3.0
2008-09	RAN#41	RP-080715			Typo in Table 8.4.1.5-1 (section 8.4.1.5), which was brought in at V1.1.0 when implementing R4-081187 is corrected.	1.3.0	2.0.0
2008-09	RAN#41	RP-080715			Presented for approval as V2.0.0	2.0.0	8.0.0
2008-12	RAN #42	RP-080915	10		Correction to the figure with the Transmision Bandwidth configuration	8.0.0	8.1.0
2008-12		RP-080916			Modification to EARFCN	8.0.0	8.1.0
2008-12		RP-080919			Introduction of Band 17	8.0.0	8.1.0
2008-12	RAN #42	RP-080920		-	Update of total dynamic range limits	8.0.0	8.1.0
2008-12 2008-12		RP-080921 RP-080922		1	Update of TDD-FDD coexistance requirements PRACH demodulation requirements update	8.0.0	8.1.0
2008-12	RAN #42	RP-080922 RP-090923		-	General corrections in section 7-Annexes	8.0.0	8.1.0 8.1.0
2008-12	RAN #42	RP-080923			General corrections in section 7-America General corrections in sections 4-6	8.0.0	8.1.0
2008-12		RP-080923		1	Corrections to references, definitions symbols and abbreviations	8.0.0	8.1.0
2008-12	RAN #42	RP-080923	20	1	Corrections to clause 4 and 5	8.0.0	8.1.0
2008-12	RAN #42	RP-080923		2	Correction to clause 6	8.0.0	8.1.0
2008-12		RP-080923		1	Correction to clause 7	8.0.0	8.1.0
2008-12 2008-12	RAN #42 RAN #42	RP-080923 RP-080923		-	Correction to clause 8 Correction to Annex G	8.0.0	8.1.0 8.1.0
2008-12	RAN #42	RP-080924	5		Correction of EVM test condition related to total power dynamic range	8.0.0	8.1.0
2008-12		RP-080924			Addition of BS transmit ON/OFF power tests	8.0.0	8.1.0
2008-12	RAN #42	RP-080924	11		Clarificatiopn on emission requirements	8.0.0	8.1.0

2008-12 RAN #42 RP-080924 17 Correction to transmitter intermodulation test 8.0.0 2008-12 RAN #42 RP-080925 25 EVM averaging for TDD in the global in channel TX test 8.0.0 2008-12 RAN #42 RP-080926 11 1 eNB performance test requirement for PUCCH format 8.0.0 2008-12 RAN #42 RP-080926 12 1 eNB performance test requirement for PUCCH format 8.0.0 2008-12 RAN #42 RP-080926 13 1 eNB performance test requirement for PUCCH format 8.0.0 2008-12 RAN #42 RP-080927 8 eNB performance requirements for HARD ACK multiplexed on 8.0.0 2008-12 RAN #42 RP-080927 9 eNB performance test requirements for HARD ACK multiplexed on 8.0.0 2008-12 RAN #42 RP-080927 7 1 Correction of eNB HST propagation conditions (36.141, ref-8) 8.0.0 2008-12 RAN #42 RP-080927 7 1 Correction of Doppler shift trajectories equations for HST conditions 8.0.0 2009-03 RAN #43 RP-090173 54 Clarification of EARFCN for 36.141 8.1.0 2009-03 RAN #43 RP-090177 43 Clarification of the BS performance test w.r.t PUCCH 8.1.0 2009-03 RAN #43 RP-090177 53 Regional requirement on maximum rated power for Band 34 8.1.0 2009-03 RAN #43 RP-090178 64 Exployed Region of the BS performance test w.r.t PUCCH	040	0.00	C LITDA TDD toot models		20	DD 000004	DANI #40	2000 42
2008-12 RAN #42 RP-080924 26 Correction to E-UTRA test models 8.0.0 2008-12 RAN #42 RP-080926 1 I eNB performance test requirement tor UL timing adjustment 8.0.0 2008-12 RAN #42 RP-080926 2 1 eNB performance test requirement for UL timing adjustment 8.0.0 2008-12 RAN #42 RP-080926 2 1 eNB performance test requirement for PUCCH format 2 2008-12 RAN #42 RP-080926 31 eNB performance test requirements for PUCCH format 8.0.0 2008-12 RAN #42 RP-080927 1 eNB performance requirements for HARQ ACK multiplexed on PUSCH 8.0.0 2008-12 RAN #42 RP-080927 1 eNB performance requirements for HARQ ACK multiplexed on PUSCH 8.0.0 2008-12 RAN #43 RP-080927 15 1 Clarification of eNB HST propagation conditions (36.141, ref-8) 8.0.0 2009-03 RAN #43 RP-090173 54 Correction of Doppler shift trajectories equations for HST conditions 8.1.0 2009-03 RAN #43 RP-090177	8.1.0	8.0.0	E-UTRA TDD test models	_				2008-12
2008-12 RAN #42 RP-080926 25 EVM averaging for TDD in the global in channel TX test 8.0.0 2008-12 RAN #42 RP-080926 1 eNB performance test requirement for UL inining adjustment 8.0 2008-12 RAN #42 RP-080926 1 eNB performance test requirements for PUCCH format 2 8.0 2008-12 RAN #42 RP-080926 31 eNB performance test requirements for Multi User PUCCH 8.0 2008-12 RAN #42 RP-080926 31 eNB performance requirements for Multi User PUCCH 8.0 2008-12 RAN #42 RP-080927 9 eNB performance test requirements for High Speed Train 8.0 2008-12 RAN #42 RP-080927 1 Correction of Doppler shift trajectories equations for HST 8.0 2008-03 RAN #42 RP-080927 1 Correction of Doppler shift trajectories equations for HST 8.0 2009-03 RAN #43 RP-090173 54 Clarification of EARFCN for 36.141 8.1 2009-03 RAN #43 RP-090175 54 Clarification of the Sp performance test w.r.t PUCCH	8.1.0			_				
2008-12 RAN #42 RP-080926 1 1 eNB performance test requirement for UL timing adjustment at 80.0 2008-12 RAN #42 RP-080926 13 1 eNB performance test requirement for PUCCH format 2 8.0.0 2008-12 RAN #42 RP-080926 13 1 eNB performance test requirements for Multi User PUCCH 8.0.0 eNB performance requirements for Hulti User PUCCH 8.0.0 eNB performance requirements for Hulti User PUCCH 8.0.0 eNB performance requirements for Hulti User PUCCH 8.0.0 eNB performance requirements for High Speed Train 8.0.0 2008-12 RAN #42 RP-080927 15 1 Constitution of PUSCH PUSC	8.1.0			_				
2008-12 RAN #42 RP-080926 13 1 eNB performance test requirement for PUCCH format 2 8.0.0 2008-12 RAN #42 RP-080926 31 1 eNB performance test requirements for Multi User PUCCH 8.0.0 2008-12 RAN #42 RP-080927 9 eNB performance requirements for HARQ ACK multiplexed on eNB performance test requirements for High Speed Train 8.0.0 2008-12 RAN #42 RP-080927 15 1 Clarification of eNB HST propagation conditions (36.141, rel-8) 8.0.0 2008-12 RAN #42 RP-080927 7 1 Correction of Doppler shift trajectories equations for HST conditions conditions 8.0.0 2009-33 RAN #43 RP-090173 54 Clarification of EARCN for 36.141 strajectories equations for HST conditions 8.1.0 2009-03 RAN #43 RP-090177 43 RP-090177 43 Clarification of the BS performance test w.r.t PUCCH 8.1.0 8.1.0 2009-03 RAN #43 RP-090177 53 Simulations with implementation margins intrajectories equirement margins 8.1.0 2009-03 RAN #43 RP-090178 55 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090179 53 Simulations with implementation margins HARC-ACK multiplexed on PUSCH performance requirement results 2009-03 RAN #43 RP-090178 50 Simulations with implementation margins 8.1.0 2009-03 RAN #43 RP-090178 50 Simulations with implementation margins 8.1.0 2009-03 RAN #43 RP-090178 50 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090178 51 Correction of clause 4.	8.1.0							
2008-12 RAN #42 RP-080926 13 I eNB performance test requirements for Multi User PUCCH 8.0.0 2008-12 RAN #42 RP-080926 31 eNB performance requirements for HARQ ACK multiplexed on PUSCH 8.0.0 2008-12 RAN #42 RP-080927 9 eNB performance test requirements for High Speed Train 8.0.0 2008-12 RAN #42 RP-080927 15 1 Ciarification of eNB HST propagation conditions (36.141, rel-8) 8.0.0 2009-03 RAN #43 RP-090173 54 Correction of Doppler shift trajectories equations for HST 8.0.0 2009-03 RAN #43 RP-090175 55 Clarification of EARFCN for 36.141 8.1.0 2009-03 RAN #43 RP-090177 48 Clarification of the BS performance test w.r.t PUCCH 8.1.0 2009-03 RAN #43 RP-090177 53 HARC-ACK/NACK Repetition configuration 8.1.0 2009-03 RAN #43 RP-090177 53 HARC-ACK multiplexed on PUSCH performance requirement 8.1.0 2009-03 RAN #43 RP-090178 19 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090178 36 Correction and update of Annex G. 8.1.0 2009-03 RAN #43 RP-090179 31 Correction and update of E-UTRA test models 8.1.0 2009-03 RAN #43 RP-090179 34 Correction of E-UTRAN TDD eNodeB test models 8.1.0 2009-03 RAN #43 RP-090179 55 <td>8.1.0</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	8.1.0							
2008-12 RAN #42 RP-080926 31 eNB performance requirements for HARQ ACK multiplexed on PUSCH 2008-12 RAN #42 RP-080927 9 eNB performance test requirements for High Speed Train 8.0.0 2008-12 RAN #42 RP-080927 5 1 Correction of ENB HST propagation conditions 36.141, rel-8) 8.0.0 2008-12 RAN #42 RP-080927 7 1 Correction of Doppler shift trajectories equations for HST 8.0.0 2009-03 RAN #43 RP-090175 55 1 Regional requirement on maximum rated power for Band 34 8.1.0 2009-03 RAN #43 RP-090175 55 Regional requirement on maximum rated power for Band 34 8.1.0 2009-03 RAN #43 RP-090177 43 Regional requirement on maximum rated power for Band 34 8.1.0 2009-03 RAN #43 RP-090177 48 RP-090177 48 PUSCH ACK/NAK repetition configuration RAN #43 RP-090177 53 HARQ-ACK multiplexed on PUSCH performance requirement results Results RP-090178 80 Correction of clause 4. Results RP-090178 81 Correction of clause 4. Results RP-090178 81 Correction of clause 4. Results RP-090178 81 Correction of clause 4. Results RP-090179 81 Correction and update of Annex G. Results RP-090179 81 Correction and update of Annex G. Results RP-090179 81 Correction and update of clause 6. Results Results RP-090179 82 Correction and update of clause 6. Results Results RP-090179 82 Correction and update of clause 6. Results Results RP-090179 83 Correction of E-UTRAN TDD eNodeB test models Results Results RP-090179 83 Correction of Lesse 6. Results Results RP-090179 84 Correction of Lesse 6. Results Results RP-090179 84 Correction of Lesse 6. Results Results Results RP-090179 85 Correction of Lesse 6. Results	8.1.0	1						
PUSCH Pusc	8.1.0 8.1.0			1				
2008-12 RAN #42 RP-080927 Security RP-080927 Security RAN #42 RP-080927 Security RAN #43 RP-090175 Security RAN #43 RP-090175 Security RAN #43 RP-090175 Security RAN #43 RP-090176 Security RAN #43 RP-090177 Security RAN #43 RP-090178 Security RAN #43 RAN #43 RP-090178 Security RAN #43 RAN #43 RP-090178 Security RAN #43 RP-090178 Security RP-090178 Security RP-090178 Security RP-090178 Security RAN #43 RP-090179 Security RP-090179 Security RP-090179 Security RAN #43 RP-090179 Security RP-090179 Security RP-090179 Security RP-090179 Security RAN #43 RP-090179 Security RP-090179 Security RP-090179 Security RAN #43 RP	8.1.0	8.0.0			31	RP-080926	KAN #42	2008-12
2008-12 RAN #42 RP-080927 1 1 Clarification of RNB HST propagation conditions (36.141, rel-8) 8.0.0 2008-12 RAN #42 RP-080927 7 1 Correction of Doppler shift trajectories equations for HST 8.0.0 2009-03 RAN #43 RP-090175 54 Clarification of EARFCN for 36.141 8.1.0 2009-03 RAN #43 RP-090177 43 Clarification of the BS performance test w.rt.PUCCH 8.1.0 2009-03 RAN #43 RP-090177 48 PUSCH ACK/NAK simulation assumptions finalization for simulations with implementation margins 8.1.0 2009-03 RAN #43 RP-090177 53 HARC-ACK multiplexed on PUSCH performance requirement results 8.1.0 2009-03 RAN #43 RP-090178 36 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090178 36 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090179 36 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090179 35 Correction of clause 4. 8.1.0 </td <td>8.1.0</td> <td>8.0.0</td> <td>eNB performance test requirements for High Speed Train</td> <td></td> <td>9</td> <td>RP-080927</td> <td>RAN #42</td> <td>2008-12</td>	8.1.0	8.0.0	eNB performance test requirements for High Speed Train		9	RP-080927	RAN #42	2008-12
2008-12 RAN #42 RP-080927 7 1 Correction of Doppler shift trajectories equations for HST 2009-03 RAN #43 RP-090173 54 Clarification of EARFCN for 36.141 8.1.0 2009-03 RAN #43 RP-090177 43 Clarification of the Sperformance test w.r.t PUCCH ACK/NACK Repetition configuration ACK/NACK Repetition configuration R.1.0 Simulation swith implementation margins R.1.0 R.1.0 RACK/NACK Repetition configuration R.1.0 R.1.0	8.1.0	800		1	15	RP-080927	RAN #42	2008-12
2009-03	8.1.0				_			
2009-03 RAN #43 RP-090175 55 1 Regional requirement on maximum rated power for Band 34 8.1.0 2009-03 RAN #43 RP-090177 43 Clarification of the BS performance test w.r.t.PUCCH 8.1.0 2009-03 RAN #43 RP-090177 48 PUSCH ACK/NAK simulation assumptions finalization for simulations with implementation margins 8.1.0 2009-03 RAN #43 RP-090177 53 HARQ-ACK multiplexed on PUSCH performance requirement 8.1.0 2009-03 RAN #43 RP-090178 36 Correction of clause 4. 8.1.0 2009-03 RAN #43 RP-090179 36 Correction and update of Annex G. 8.1.0 2009-03 RAN #43 RP-090179 34 Correction and update of Annex G. 8.1.0 2009-03 RAN #43 RP-090179 35 Correction of E-UTRAN TDD eNodeB test models 8.1.0 2009-03 RAN #43 RP-090179 37 Correction of E-UTRAN TDD eNodeB test models 8.1.0 2009-03 RAN #43 RP-090179 37 Correction to incurrent incurrent incurrent incurrent incurrent	0.1.0	0.0.0		'	ľ	111 000021	10 01 7 11 12	2000 12
2009-03 RAN #43 RP-090177 43 Clarification of the BS performance test w.r.t PUCCH 8.1.0 2009-03 RAN #43 RP-090177 48 PUSCH ACK/NAK simulation assumptions finalization for simulations with implementation margins 8.1.0 2009-03 RAN #43 RP-090178 36 Correction and update of PUSCH performance requirement results 8.1.0 2009-03 RAN #43 RP-090178 39 Correction and update of Annex G. 8.1.0 2009-03 RAN #43 RP-090179 34 Correction and update of Annex G. 8.1.0 2009-03 RAN #43 RP-090179 35 Correction of E-UTRAN test models 8.1.0 2009-03 RAN #43 RP-090179 35 Correction of E-UTRAN TDD eNodeB test models 8.1.0 2009-03 RAN #43 RP-090179 37 Correction of E-UTRAN TDD eNodeB test models 8.1.0 2009-03 RAN #43 RP-090179 40 Clarification of PHS band including the future plan 8.1.0 2009-03 RAN #43 RP-090179 5 Correction to incluse s. 8.1.0 <t< td=""><td>8.2.0</td><td>8.1.0</td><td>Clarification of EARFCN for 36.141</td><td></td><td>54</td><td>RP-090173</td><td>RAN #43</td><td>2009-03</td></t<>	8.2.0	8.1.0	Clarification of EARFCN for 36.141		54	RP-090173	RAN #43	2009-03
ACK/NACK Repetition configuration 2009-03 RAN #43 RP-090177 48 PUSCH ACK/NAK simulation assumptions finalization for simulations with implementation margins 8.1.0	8.2.0	8.1.0	Regional requirement on maximum rated power for Band 34	1	55	RP-090175	RAN #43	2009-03
Simulations with implementation margins	8.2.0	8.1.0			43	RP-090177	RAN #43	2009-03
2009-03 RAN #43 RP-090178 36 Correction of clause 4. 8.1.0	8.2.0	8.1.0			48	RP-090177	RAN #43	2009-03
2009-03	8.2.0	8.1.0	HARQ-ACK multiplexed on PUSCH performance requirement		53	RP-090177	RAN #43	2009-03
2009-03	8.2.0	8.1.0			36	RP-090178	RAN #43	2009-03
2009-03	8.2.0			\dashv				
2009-03	8.2.0			\neg				
2009-03 RAN #43 RP-090179 37 Correction and update of clause 6. 8.1.0 2009-03 RAN #43 RP-090179 40 Clarification of PHS band including the future plan 8.1.0 2009-03 RAN #43 RP-090179 45 Correction to transmitter intermodulation test 8.1.0 2009-03 RAN #43 RP-090179 51 Correction to unwanted emission limit for 3MHz(E-UTRA bands 8.1.0 2009-03 RAN #43 RP-090180 42 1 Correction to unwanted emission limit for 3MHz(E-UTRA bands 8.1.0 2009-03 RAN #43 RP-090180 42 1 Correction to BS reciever test requirements 8.1.0 2009-03 RAN #43 RP-090181 42 1 Correction to Glause 8. 8.1.0 2009-03 RAN #43 RP-090181 41 Modifications on parameter settings for some demodulation test cases. 8.1.0 2009-03 RAN #44 RP-090181 44 AWGN level for UL demodulation performance tests 8.1.0 2009-05 RAN #44 RP-090545 62 Correction to Ext models	8.2.0	8.1.0						2009-03
2009-03	8.2.0	1						
2009-03 RAN #43 RP-090179 45 Correction to transmitter intermodulation test 8.1.0 2009-03 RAN #43 RP-090179 49 Unsynchronized TDD coexistence requirements 8.1.0 2009-03 RAN #43 RP-090180 51 Correction to unwanted emission limit for 3MHz(E-UTRA bands < 1GHz) for Category A	8.2.0							
2009-03	8.2.0	8.1.0			45	RP-090179		2009-03
Caregory A Correction to BS reciever test requirements Sandamorphisms Sandamorphism	8.2.0	8.1.0						2009-03
2009-03 RAN #43 RP-090180 56 eNB ACS frequency offset 8.1.0 2009-03 RAN #43 RP-090181 38 Correction of clause 8. 8.1.0 2009-03 RAN #43 RP-090181 41 Modifications on parameter settings for some demodulation test cases. 8.1.0 2009-05 RAN #43 RP-090181 44 AWGN level for UL demodulation performance tests 8.1.0 2009-05 RAN #44 RP-090544 61 Clarification of requirements for multicarrier BS. (Technically Endorsed CR in R4-50bis - R4-091445) 8.2.0 2009-05 RAN #44 RP-090545 62 Correction of test models for E-UTRAN. (Technically Endorsed CR in R4-50bis - R4-091461) 8.2.0 2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances f	8.2.0	8.1.0	Correction to unwanted emission limit for 3MHz(E-UTRA bands				RAN #43	2009-03
2009-03 RAN #43 RP-090180 56 eNB ACS frequency offset 8.1.0 2009-03 RAN #43 RP-090181 38 Correction of clause 8. 8.1.0 2009-03 RAN #43 RP-090181 41 Modifications on parameter settings for some demodulation test cases. 8.1.0 2009-05 RAN #43 RP-090181 44 AWGN level for UL demodulation performance tests 8.1.0 2009-05 RAN #44 RP-090544 61 Clarification of requirements for multicarrier BS. (Technically Endorsed CR in R4-50bis - R4-091445) 8.2.0 2009-05 RAN #44 RP-090545 62 Correction of test models for E-UTRAN. (Technically Endorsed CR in R4-50bis - R4-091461) 8.2.0 2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances f	8.2.0	8.1.0	Correction to BS reciever test requirements	1	42	RP-090180	RAN #43	2009-03
2009-03	8.2.0	8.1.0						2009-03
Cases. 2009-03 RAN #43 RP-090181 44 AWGN level for UL demodulation performance tests 8.1.0	8.2.0	8.1.0			38	RP-090181	RAN #43	2009-03
2009-05 RAN #44 RP-090544 61 Clarification of requirements for multicarrier BS. (Technically Endorsed CR in R4-50bis - R4-091445) 8.2.0 2009-05 RAN #44 RP-090545 62 Correction of test models for E-UTRAN. (Technically Endorsed CR in R4-50bis - R4-091461) 8.2.0 2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545	8.2.0	8.1.0			41	RP-090181	RAN #43	2009-03
2009-05 RAN #44 RP-090544 61 Clarification of requirements for multicarrier BS. (Technically Endorsed CR in R4-50bis - R4-091445) 8.2.0 2009-05 RAN #44 RP-090545 62 Correction of test models for E-UTRAN. (Technically Endorsed CR in R4-50bis - R4-091461) 8.2.0 2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545	8.2.0	8.1.0	AWGN level for UL demodulation performance tests		44	RP-090181	RAN #43	2009-03
2009-05 RAN #44 RP-090545 62 Correction of test models for E-UTRAN. (Technically Endorsed CR in R4-50bis - R4-091461) 8.2.0 2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545	8.3.0	8.2.0	Clarification of requirements for multicarrier BS. (Technically		61	RP-090544		
2009-05 RAN #44 RP-090545 66 Test system uncertainty for Transmitter intermodulation 8.2.0 2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0 </td <td>8.3.0</td> <td>8.2.0</td> <td>Correction of test models for E-UTRAN. (Technically Endorsed</td> <td></td> <td>62</td> <td>RP-090545</td> <td>RAN #44</td> <td>2009-05</td>	8.3.0	8.2.0	Correction of test models for E-UTRAN. (Technically Endorsed		62	RP-090545	RAN #44	2009-05
2009-05 RAN #44 RP-090545 67 Adding test model for transmit ON/OFF test 8.2.0 2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0	8.2.0			66	RP-090545	RAN #44	2009-05
2009-05 RAN #44 RP-090545 68 Correction to DL RS power 8.2.0 2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0	1						
2009-05 RAN #44 RP-090545 64r1 Addition of missing Test Tolerances for transmitter tests 8.2.0 2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0				_			
2009-05 RAN #44 RP-090545 70 Test system uncertainty for Receiver dynamic range 8.2.0 2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0		•	1				
2009-05 RAN #44 RP-090545 58 CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4-50bis - R4-091330) 8.2.0 2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0							
2009-05 RAN #44 RP-090545 63r2 Test Tolerances for Performance test cases 8.2.0 2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0		CR 36.141 ACS frequency offset. (Technically Endorsed CR in					
2009-05 RAN #44 RP-090545 59 UL timing adjustment measurement system set-up. (Technically Endorsed CR in R4-50bis - R4-091414) 8.2.0 2009-05 RAN #44 RP-090545 60 UL timing adjustment performance requirement clarifications. (Technically Endorsed CR in R4-50bis - R4-091438) 8.2.0 2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0	8.2.0		2	63r2	RP-090545	RAN #44	2009-05
2009-05	8.3.0	8.2.0	UL timing adjustment measurement system set-up. (Technically					2009-05
2009-05 RAN #44 RP-090559 57 Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064) 8.3.0	8.3.0	8.2.0	UL timing adjustment performance requirement clarifications.		60	RP-090545	RAN #44	2009-05
	9.0.0	8.3.0	Introduction of Extended LTE800 requirements. (Technically		57	RP-090559	RAN #44	2009-05
	9.1.0	9.0.0	Clarification of the multi user PUCCH performance determintion	2		RP-090833	RAN #45	2009-09
	9.1.0	9.0.0	Clarification of the UL timing adjustment performance			RP-090833	RAN #45	2009-09
	9.1.0	9.0.0				RP-090833	RAN #45	2009-09
	9.1.0							
	9.1.0							
2009-09 RAN #45 RP-090833 081 Clarifications on testing UL timing adjustment requirements 9.0.0	9.1.0	9.0.0						2009-09
	9.1.0	9.0.0						
2009-09 RAN #45 RP-090833 092 LTE operating band unwanted emissions revision 9.0.0	9.1.0	9.0.0	LTE operating band unwanted emissions revision					
2009-12 Introduction of Extended LTE1500 requirements for TS36.141								2009-12
RP-46 RP-091286 095 (Technically endorsed at RAN 4 52bis in R4-093637) 9.1.0	9.2.0	9.1.0		5	095	RP-091286	RP-46	0000 12
2009-12 RP-46 RP-091267 098 Clarification of the test method for blocking (Technically endorsed at RAN 4 52bis in R4-093769) 9.1.0	9.2.0	9.1.0	endorsed at RAN 4 52bis in R4-093769)	3	098	RP-091267	RP-46	
Adding missing EARFCN for band 33 and 34 (Technically	9.2.0	9.1.0	Adding missing EARFCN for band 33 and 34 (Technically endorsed at RAN 4 52bis in R4-093770))	100	RP-091267	RP-46	2009-12

2009-12	RP-46	RP-091267	102		Incorrect FRC A3-2 Coded block size (Technically endorsed at RAN 4 52bis in R4-093771)	9.1.0	9.2.0
2009-12	RP-46	RP-091266	104		LTE operating band unwanted emissions correction (Technically endorsed at RAN 4 52bis in R4-093802)	9.1.0	9.2.0
2009-12	RP-46	RP-091267			HARQ feedback clarification addition (Annex B) (Technically endorsed at RAN 4 52bis in R4-093997)	9.1.0	9.2.0
2009-12	_				Clarification on Spurious emissions limits for BS co-existed with		
2009-12	RP-46	RP-091266			another BS (Technically endorsed at RAN 4 52bis in R4-094012) Corrections to ICS requirement (Technically endorsed at RAN 4		9.2.0
2009-12	RP-46 RP-46	RP-091265 RP-091270		1	52bis in R4-093640) Clarification on PRACH False alarm probability	9.1.0 9.1.0	9.2.0 9.2.0
2009-12	RP-46	RP-091295		1	E-UTRA BS classification	9.1.0	9.2.0
2009-12	RP-46	RP-091295		1	Home eNode B maximum output power	9.1.0	9.2.0
2009-12	RP-46	RP-091295		1	Home eNode B in-channel selectivity requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295		1	Home eNode B receiver intermodulation requirement	9.1.0	9.2.0
2009-12 2009-12	RP-46 RP-46	RP-091269 RP-091266		1	UL Timing Adjustment test clarifications	9.1.0 9.1.0	9.2.0 9.2.0
2009-12	KF-40	KF-091200	119		Multi-path fading propagation conditions reference correction Corrections on frequency range of unwanted emissions	9.1.0	9.2.0
2003 12	RP-46	RP-091265	121		requirements	9.1.0	9.2.0
2009-12	RP-46	RP-091266	122	1	Correction to the transmitter intermodulation	9.1.0	9.2.0
2009-12	RP-46	RP-091276			Testing in case of Rx diversity, Tx diversity and MIMO	9.1.0	9.2.0
2009-12	RP-46	RP-091295		1	Home eNode B ACLR requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295		1	Home eNode B ACS and narrow band blocking requirement	9.1.0	9.2.0
2009-12 2009-12	RP-46 RP-46	RP-091295 RP-091294		1	Home eNode B Blocking requirement Home eNode B dynamic range requirement	9.1.0	9.2.0 9.2.0
2009-12	RP-46	RP-091294		1	Home eNode B frequency error requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294		2	Home eNode B performance requirement	9.1.0	9.2.0
2009-12	111 10	141 001201	100	_	Home eNode B operating band unwanted emissions	0.1.0	0.2.0
	RP-46	RP-091294	136	1	requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294		1	Home eNode B reference sensitivity level requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294		2	Home eNode B spurious emission requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091284		2	Inclusion of Band 20 BS Test parameters	9.1.0	9.2.0
2009-12 2010-03	RP-46 RP-47	RP-091267 RP-100252	144	1	Applicability of uncertainty for transmitter transient period	9.1.0 9.2.0	9.2.0 9.3.0
2010-03	KF-47				Correction of the frequency range for unwanted emmissions limits (cat-B/option 2/BW 3MHz)	9.2.0	9.3.0
2010-03	RP-47	RP-100252	171		Correction of Band 4 and 10 co-existence requirement	9.2.0	9.3.0
2010-03	RP-47	RP-100275	148		Dynamic range requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	149		In-channel selectivity for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	150		ACS and narrow band blocking for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275			Receiver intermodulation for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	152		Performance requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275			E-UTRA BS classification	9.2.0	9.3.0
2010-03	RP-47	RP-100275			Maximum output power for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275			Frequency error requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275			Reference sensitivity level requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275			ACLR requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	159		Operating band unwanted emissions requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	147	1	Spurious emissions requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	157	2	Blocking requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100263	172		Correction of DTT protection requirement	9.2.0	9.3.0
2010-03	RP-47	RP-100266	161		Operating band unwanted emissions requirement for Home eNodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100266	160	1	Dynamic range requirement for Home eNodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100266	162		Corrections of additional spurious emissions and blocking requirements for HeNB	9.2.0	9.3.0

2010-03							
	RP-47	RP-100266	166		Home BS Output Power Conformance Testing for Adjacent Channel Protection	9.2.0	9.3.0
2010-03	RP-47	RP-100274	175		Requirements for HARQ-ACK multiplexed on PUSCH for E-UTRA LA and Home BS	9.2.0	9.3.0
2010-03	RP-47	RP-100274	176		CQI missed detection requirements for PUCCH format 2 for E- UTRA LA and Home BS	9.2.0	9.3.0
2010-03	RP-47	RP-100274	165	1	Corrections to the receiver intermodulation requirements	9.2.0	9.3.0
2010-06	RP-48	RP-100621	180		Clarification on narrowband blocking requirements	9.3.0	9.4.0
2010-06	RP-48	RP-100621	178		Spurious emissions limits and blocking requirements for coexistence with CDMA850	9.3.0	9.4.0
2010-06	RP-48	RP-100621	183	1	Correction to the FRC for PUSCH 1.4M requirements	9.3.0	9.4.0
2010-06	RP-48	RP-100625	191	1	Clarification of applicability of requirements for multi-carrier BS	9.3.0	9.4.0
2010-06	RP-48	RP-100631	186		Co-existence with services in adjacent frequency bands	9.3.0	9.4.0
2010-09	RP-49	RP-100916	193		Clarifications on Base Station transmit and receive configurations	9.4.0	9.5.0
2010-09	RP-49	RP-100920	196		UL Timing Adjustment: Stationary UE propagation channel clarification	9.4.0	9.5.0
2010-09	RP-49	RP-100917	198	1	Modification on testing of time mask of E-UTRA TDD base station in R9	9.4.0	9.5.0
2010-09	RP-49	RP-100916	207		Adding operating unwanted emissions test to tests applicable to Ancillary RF Amplifiers	9.4.0	9.5.0
2010-09	RP-49	RP-100928	194		CR LTE_TDD_2600_US spectrum band definition additions to TS 36.141	9.5.0	10.0.0
2010-12	RP-50	RP-101327	224		Band 12 channel arrangement correction on 36.141	10.0.0	10.1.0
2010-12	RP-50	RP-101328			PUCCH format 2 performance requirements definition clarification	10.0.0	10.1.0
2010-12	RP-50	RP-101328	236		Correction on multi user PUCCH test	10.0.0	10.1.0
2010-12	RP-50	RP-101342			Equaliser coefficient derivation for Global In-Channel TX-Test	10.0.0	10.1.0
2010-12	RP-50	RP-101342			Correction of applicability of requirements	10.0.0	10.1.0
2010-12	RP-50	RP-101356	211	3	CR UMTS/LTE-3500 TDD spectrum band definition additions for BS to TS 36.141	10.0.0	10.1.0
2010-12	RP-50	RP-101362	209	3	Introduction of L-band in TS36.141	10.0.0	10.1.0
2011-04	RP-51	RP-110336		-	Receiver spurious emissions reference correction	10.1.0	10.2.0
2011-04	RP-51	RP-110337	247	2	Power off test tolerance	10.1.0	10.2.0
2011-04	RP-51	RP-110352		1	TS 36.141 subclause 6.5.4: DL RS Power	10.1.0	10.2.0
2011-04	RP-51	RP-110352	251	1	Correction of the test port description for TS 36.141 Rel-10	10.1.0	10.2.0
2011-04	RP-51	RP-110357	253	2	Band 42 and 43 co-existence for UMTS/LTE 3500 (TDD) for TS 36.141	10.1.0	10.2.0
2011-04	RP-51	RP-110344	255	-	Operating band unwanted emissions for Band 1, 33 and 34 (TS 36.141)	10.1.0	10.2.0
2011-06	RP-52	RP-110794	261		Modifications to Band 3 to allow LTE Band 3 operation in Japan (Rel-10 TS36.141 CR)	10.2.0	10.3.0
2011-06	RP-52	RP-110807			Carrier Aggregation for LTE in TS 36.141 / general requirements	10.2.0	10.3.0
2011-06	RP-52	RP-110807			Carrier Aggregation for LTE in TS 36.141 / receiver requirements		10.3.0
2011-06	RP-52	RP-110802			Co-existence/co-location between Band 42 and 43 in TS 36.141	10.2.0	10.3.0
2011-06	RP-52	RP-110796			Harmonization of co-existence between Home BS and WA BS in 36.141		10.3.0
	RP-52	RP-110804		1	Expanded 1900 MHz addition to 36.141 Carrier Aggregation for LTE in TS 36.141 / transmitter	10.2.0	10.3.0
2011-06 2011-06	RP-52	RP-110807	203		requirements		
	RP-52 RP-52 RP-52	RP-110807 RP-110813 RP-110795	265	1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence	10.2.0	10.3.0
2011-06 2011-06 2011-06	RP-52 RP-52	RP-110813 RP-110795	265 273		Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141	10.2.0	10.3.0
2011-06 2011-06 2011-06 2011-09	RP-52 RP-52 RP-53	RP-110813 RP-110795 RP-111252	265 273 290		Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan	10.2.0 10.3.0	10.3.0
2011-06 2011-06 2011-06 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255	265 273 290 287	1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz	10.2.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0
2011-06 2011-06 2011-06 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255	265 273 290 287 292	1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141	10.2.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0
2011-06 2011-06 2011-06 2011-09 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255 RP-111255	265 273 290 287 292 293	1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141 Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141	10.2.0 10.3.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0 10.4.0
2011-06 2011-06 2011-06 2011-09 2011-09 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255 RP-111255 RP-111260	265 273 290 287 292 293 277	1 1 1 1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141 Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141 Test tolerance for UL-MIMO performance test cases	10.2.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0
2011-06 2011-06 2011-06 2011-09 2011-09 2011-09 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255 RP-111260 RP-111260	265 273 290 287 292 293 277 278	1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141 Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141 Test tolerance for UL-MIMO performance test cases Performance requirements for UL-MIMO	10.2.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0
2011-06 2011-06 2011-06 2011-09 2011-09 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255 RP-111255 RP-111260	265 273 290 287 292 293 277 278 282	1 1 1 1	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141 Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141 Test tolerance for UL-MIMO performance test cases Performance requirements for UL-MIMO Specifying acceptable uncertainty of OBW test in CA CR to TS 36.141 Test requirements of Operating Band	10.2.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0
2011-06 2011-06 2011-09 2011-09 2011-09 2011-09 2011-09 2011-09 2011-09 2011-09	RP-52 RP-52 RP-53 RP-53 RP-53 RP-53 RP-53 RP-53 RP-53	RP-110813 RP-110795 RP-111252 RP-111255 RP-111255 RP-111260 RP-111260 RP-111262	265 273 290 287 292 293 277 278 282 285	1 1 1 1 2	Add 2GHz S-Band (Band 23) in 36.141 Fixing the misalignment of Band 24 GPS Coexistence specifications between 36.104 and 36.141 Band 3/III operation in Japan Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141 Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141 Test tolerance for UL-MIMO performance test cases Performance requirements for UL-MIMO Specifying acceptable uncertainty of OBW test in CA	10.2.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0 10.3.0	10.3.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0 10.4.0

2211 22	Inn	IDD 444000		_	Toos () OD DUOSIL :	1.0.0.0	
2011-09	RP-53	RP-111266		3	TS36.141 CR: on PUSCH tests	10.3.0	10.4.0
2011-09	RP-53	RP-111266			CA PUCCH performance requirements for 36.141	10.3.0	10.4.0
2011-12	RP-54	RP-111684	295		Corrections of CA uplink performance test cases in TS36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111691	296		CA PUCCH performance requirements with test tolerance updates for 36.141	10.4.0	10.5.0
2011-12	RP-54	KF-111091	290		Clarification of general blocking requirements for co-existence in	10.4.0	10.5.0
2011-12	111 -34	RP-111734	297		TS 36.141	10.4.0	10.5.0
2011-12	RP-54	141 111704	201		Home BS Output Power for co-channel E-UTRA protection for	10.4.0	10.0.0
2011 12	" " "	RP-111693	298		36.141	10.4.0	10.5.0
2011-12	RP-54				Update on Home BS Output Power for co-channel E-UTRA		
		RP-111693	300		protection for 36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111735	301		Corrections to 3500 MHz	10.4.0	10.5.0
2011-12	RP-54	RP-111686	302	1	TS36.141 CR: on Multi-Antenna channel models	10.4.0	10.5.0
2011-12	RP-54				Test procedure clarification for ACK false detection of multi-user		
		RP-111690			PUCCH format 1a	10.4.0	10.5.0
2011-12	RP-54	RP-111687	304	3	TX ON or OFF CR 36.141	10.4.0	10.5.0
2011-12	RP-54				Correction of frequency range for spurious emission		
0040.00	DD 55	RP-111733		_	requirements	10.4.0	10.5.0
2012-03	RP-55	RP-120303		1	Clarification on test procedure for BS In-channel selectivity test	10.5.0	10.6.0
2012-03 2012-03	RP-55 RP-55	RP-120304 RP-120295		1	Definition of synchronized operation Finalizing Home BS Output Power parameters for co-channel E-	10.5.0 10.5.0	10.6.0 10.6.0
2012-03	KP-33	KP-120295	312	'	UTRA protection in 36.141	10.5.0	10.6.0
2012-03	RP-55	RP-120298	314	1	Addition of Band 23 HeNB specifications in 36.141	10.5.0	10.6.0
2012-06	RP-56	RP-120770		-	Editorial corrections in Home BS output power tests	10.6.0	10.7.0
2012 00	111 00	141 120770	022		Editorial corrections in Frome 20 output power tosts	10.0.0	10.7.0
2012-06	RP-56	RP-120782	339		Time alignment error headline	10.6.0	10.7.0
2012-06	RP-56	RP-120783	340	1	Time alignment procedure in TS 36.141	10.6.0	10.7.0
2212.22		DD 100=01				1000	
2012-06	RP-56	RP-120764	347		Correction of PHS protection requirements for TS 36.141	10.6.0	10.7.0
2012-09	RP-57	RP-121305	349		Clarification of inter-band CA test configuration generation	10.7.0	10.8.0
2012 00	07	141 121000	0.0		onalinication of into band of those configuration goneration	10.7.0	10.0.0
2012-09	RP-57	RP-121301	356		Introduction of Japanese regulatory requirements for LTE band 8	10.7.0	10.8.0
					in 36.141 R10		
2012-09	RP-57	RP-121300	368		Modifications of frequency ranges on spurious emission	10.7.0	10.8.0
					requirements for Band 6, 18, 19		
2012-12	RP-58	RP-121867	383	-	Clean up of specification R10	10.8.0	10.9.0
2012-12	RP-58	RP-121867	207	1	Clean up of 36.141 performance	10.8.0	10.9.0
2012-12	KF-30	KF-121007	307	'	Clean up of 30.141 performance	10.0.0	10.9.0
2012-12	RP-58	RP-121853	396	1	CR to add the HeNB rated ouput power for 8 Tx antennas	10.8.0	10.9.0
	" " "	1		·	or to dad the rioria rated depart perior for a rivial constant		10.0.0
2012-12	RP-58	RP-121867	399	-	Correction to test requirements of operating band unwanted	10.8.0	10.9.0
					emissions		
2012-12	RP-58	RP-121867	406	1	Modification on ACLR requirement	10.8.0	10.9.0
2012-12	RP-58	RP-121863	411	-	Removal of brackets around medium correlation in table B.5.2-1	10.8.0	10.9.0
2012-12	RP-58	RP-121867	44.4	_	Clarification of BS RF channels to be tested for ACLR	10.8.0	10.9.0
2012-12	KF-30	KF-121007	414	-	Ciamication of BS RF charmers to be tested for ACLR	10.6.0	10.9.0
2013-03	RP-59	RP-130266	420		Correction of BS performance conformance tests	10.9.0	10.10.0
2013-03	RP-59	RP-130268			Correction to test requirements for PUSCH with 20 MHz channel	10.9.0	10.10.0
					bandwidth		
2013-06	RP-60	RP-130766			CR on TAE for inter-band CA	10.10.0	10.11.0
2013-06	RP-60	RP-130765		1	CR for UL-MIMO conformance test	10.10.0	10.11.0
09-2013	RP-61	RP-131282			Editorial correction for the UL-MIMO channel model	10.11.0	10.12.0
09-2013	RP-61	RP-131280	463		Add the Receiver Blocking test procedure for Home BS to	10.11.0	10.12.0
06-2017	RP-76	RP-171294	1010	-	TS36.141 Correction of maximum test system uncertainty for out of band	10.12.0	10.13.0
00-2017	175-70	NF-1/1294	1019		blocking	10.12.0	10.13.0
	1			.		ļ	

History

	Document history						
V10.1.0	January 2011	Publication					
V10.2.0	May 2011	Publication					
V10.3.0	July 2011	Publication					
V10.4.0	November 2011	Publication					
V10.5.0	January 2012	Publication					
V10.6.0	April 2012	Publication					
V10.7.0	July 2012	Publication					
V10.8.0	October 2012	Publication					
V10.9.0	February 2013	Publication					
V10.10.0	April 2013	Publication					
V10.11.0	July 2013	Publication					
V10.12.0	October 2013	Publication					
V10.13.0	July 2017	Publication					