ETSI TS 148 018 V5.12.0 (2005-07)

Technical Specification

Digital cellular telecommunications system (Phase 2+);
General Packet Radio Service (GPRS);
Base Station System (BSS) Serving GPRS Support Node (SGSN);
BSS GPRS Protocol
(3GPP TS 48.018 version 5.12.0 Release 5)



Reference
RTS/TSGG-0248018v5c0

Keywords
GSM

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

| Intelle | ectual Property Rights | 2 |
|------------------|---|----|
| Forew | vord | 2 |
| Forew | vord | 11 |
| 1 | Scope | 12 |
| | References | |
| | | |
| 3 | Abbreviations | |
| 4 | Logical configuration of the Gb-interface | |
| 4.1 | High-level characteristics of the Gb-interface | |
| 4.2 | Position of BSSGP within the protocol stack on the Gb-interface | 14 |
| 5 | Elements for layer-to-layer communication | 14 |
| 5.1 | Definition of service model | 14 |
| 5.2 | Service primitives provided by the BSSGP at a BSS | 16 |
| 5.2.1 | RL-DL-UNITDATA.ind | 18 |
| 5.2.2 | RL-UL-UNITDATA.req | 18 |
| 5.2.3 | RL-PTM-UNITDATA.ind | |
| 5.2.4 | GMM-PAGING.ind | 18 |
| 5.2.5 | GMM-RA-CAPABILITY.ind | 18 |
| 5.2.6 | GMM-RA-CAPABILITY-UPDATE.req | |
| 5.2.7 | GMM-RA-CAPABILITY-UPDATE.cnf | 18 |
| 5.2.8 | GMM-RADIO-STATUS.req | |
| 5.2.9 | GMM-SUSPEND.req | |
| 5.2.10 | | |
| 5.2.11 | - 1 · · · · · · · · · · · · · · · · · · | |
| 5.2.12 | | |
| 5.2.13 | | |
| 5.2.14 | | |
| 5.2.15 | 1 | |
| 5.2.16 | | |
| 5.2.17 | | |
| 5.2.18 | 1 | |
| 5.2.19 | | |
| 5.2.19 | | |
| 5.2.19 | | |
| 5.2.20 | 1 | |
| 5.2.21 | | |
| 5.2.22 | 1 | |
| 5.2.23 | | |
| 5.2.24 | | |
| 5.2.25 | | |
| 5.2.26 | 1 | |
| 5.2.27 | | |
| 5.2.28 5.2.29 | | |
| 5.2.29 | | |
| 5.2.31 | | |
| 5.2.31 | | |
| 5.2.32 | | |
| 5.2.34 | | |
| 5.2.35 | 1 | |
| 5.2.36 | | |
| 5.2.37 | | |
| 5.2.38 | | |
| 5.2.39 | | |

| 5.2.40 | LCS-LOCATE.ind | 21 |
|------------------|---|----|
| 5.2.41 | LCS-LOCATE.res | 21 |
| 5.2.42 | LCS-ABORT.ind | 21 |
| 5.2.43 | LCS-INFORMATION-TRANSFER.req | 21 |
| 5.2.44 | LCS-INFORMATION-TRANSFER.cnf | 21 |
| 5.2.45 | RIM-PDU-TRANSFER.req | 21 |
| 5.2.46 | RIM-PDU-TRANSFER.ind | 22 |
| 5.2.47 | (void) | |
| 5.2.48 | (void) | |
| 5.2.49 | (void) | |
| 5.2.50 | (void) | |
| 5.2.51 | (void) | |
| 5.2.52 | (void) | |
| 5.3 | Service primitives provided by the BSSGP at an SGSN | |
| 5.3.1 | BSSGP-DL-UNITDATA.req | |
| 5.3.2 | BSSGP-UL-UNITDATA.ind | |
| 5.3.3 | BSSGP-PTM-UNITDATA.req | |
| 5.3.4 | GMM-PAGING.req | |
| 5.3.5 | GMM-RA-CAPABILITY.req | |
| 5.3.6 5.3.7 | GMM-RA-CAPABILITY-UPDATE.ind | |
| 5.3.7 5.3.8 | GMM-RADIO-STATUS.ind | |
| 5.3.9 | GMM-SUSPEND.ind | |
| 5.3.10 | GMM-RESUME.ind | |
| 5.3.11 | NM-FLUSH-LL.req. | |
| 5.3.12 | NM-FLUSH-LL.cnf. | |
| 5.3.13 | NM-LLC-DISCARDED.ind | |
| 5.3.14 | NM-FLOW-CONTROL-BVC.ind | |
| 5.3.15 | NM-FLOW-CONTROL-MS.ind | |
| 5.3.15a | NM-FLOW-CONTROL-PFC.ind | 26 |
| 5.3.16 | NM-STATUS.req | 26 |
| 5.3.17 | NM-STATUS.ind | 26 |
| 5.3.18 | NM-BVC-BLOCK.ind | |
| 5.3.19 | NM-BVC-UNBLOCK.ind | |
| 5.3.20 | NM-BVC-RESET.req | |
| 5.3.21 | NM-BVC-RESET.res | |
| 5.3.22 | NM-BVC-RESET.ind | |
| 5.3.23 | NM-BVC-RESET.cnf | |
| 5.3.24 | NM-TRACE.reqPFM-DOWNLOAD-BSS-PFC.ind | |
| 5.3.25 5.3.26 | PFM-CREATE-BSS-PFC.req | |
| 5.3.20 5.3.27 | PFM-CREATE-BSS-PFC.req | |
| 5.3.28 | PFM-MODIFY-BSS-PFC.ind | |
| 5.3.29 | PFM-MODIFY-BSS-PFC.res | |
| 5.3.30 | PFM-DELETE-BSS-PFC.req | |
| 5.3.31 | PFM-DELETE-BSS-PFC.cnf | |
| 5.3.32 | LCS-LOCATE.req | |
| 5.3.33 | LCS-LOCATE.cnf | |
| 5.3.34 | LCS-ABORT.req | |
| 5.3.35 | LCS-INFORMATION-TRANSFER.ind | |
| 5.3.36 | LCS-INFORMATION-TRANSFER.res | |
| 5.3.37 | RIM-PDU-TRANSFER.req | |
| 5.3.38 | RIM-PDU-TRANSFER.ind | |
| 5.3.39 | (void) | |
| 5.3.40 | (void) | |
| 5.3.41 | (void) | |
| 5.3.42 | (void) | |
| 5.3.43 | (void) | |
| 5.3.44 | (void) | |
| 5.4 | Primitive parameters. | |
| 5.4.1 | BSSGP Virtual Connection Identifier (BVCI) | |
| 5.4.2 | Link Selector Parameter (LSP) | 29 |

| 5.4.3 | [functional-name] PDU | 29 |
|---------|---|----|
| 5.4.4 | Network Service Entity Identifier (NSEI) | 29 |
| 5.4.5 | BSS Context | |
| 6 | User data and signalling procedures between RL and BSSGP SAPs | |
| 6.1 | Downlink UNITDATA procedure | |
| 6.1.1 | Abnormal conditions | 31 |
| 6.2 | Uplink UNITDATA procedure | 31 |
| 6.2.1 | Abnormal conditions | 32 |
| 6.3 | RA-CAPABILITY procedure | |
| 6.3.1 | Abnormal conditions | |
| 7 | Signalling procedures between GMM SAPs | 33 |
| 7.1 | Paging procedure | |
| 7.2 | Radio Access Capability Update procedure | |
| 7.2.1 | Abnormal conditions | |
| 7.3 | Radio Status procedure | |
| 7.4 | SUSPEND procedure | |
| 7.4.1 | Abnormal conditions | |
| 7.5 | RESUME procedure | |
| 7.5.1 | Abnormal conditions | |
| o | Signalling magadyas between NIM CADs | 24 |
| 8 | Signalling procedures between NM SAPs | |
| 8.1 | FLUSH-LL (logical link) procedure | |
| 8.1.1 | Abnormal Conditions | |
| 8.2 | Flow Control procedure | |
| 8.2.1 | General model of operation | |
| 8.2.2 | Mode of operation | |
| 8.2.3 | Flow Control of Traffic from an SGSN to BSS | |
| 8.2.3.1 | | |
| 8.2.3.2 | | |
| 8.2.3.3 | | |
| 8.2.3.4 | | |
| 8.2.3.5 | | |
| 8.2.3.6 | | |
| 8.2.4 | Flow Control of Uplink Traffic from a BSS to an SGSN | |
| 8.3 | BVC blocking and unblocking procedure | |
| 8.3.1 | PTP BVC | |
| 8.3.2 | Signalling BVC | |
| 8.3.3 | Abnormal Conditions | |
| 8.4 | BVC-RESET procedure | 45 |
| 8.4.1 | Signalling BVC | 46 |
| 8.4.2 | PTP BVC | |
| 8.4.3 | Abnormal Conditions | 46 |
| 8.5 | Trace procedure | 47 |
| 8a | Signalling procedures between PFM SAPs | 47 |
| 8a.1 | Create BSS PFC procedure | |
| 8a.1.1 | Abnormal conditions | 48 |
| 8a.2 | Modify BSS PFC procedure | 48 |
| 8a.2.1 | • 1 | |
| 8a.3 | Delete BSS PFC procedure | 48 |
| 8b | Signalling Procedures between LCS SAPs | 49 |
| 8b.1 | Location Procedure. | |
| 8b.1.1 | | |
| 8b.1.2 | 1 | |
| 8b.1.3 | | |
| 8b.2 | Position Command Procedure | |
| 8b.2.1 | | |
| 8b.2.2 | | |
| 8b.2.3 | * | |
| | • | |
| 8c | Signalling procedures between RIM SAPs | 51 |

| 8c.1 | General | |
|------------|---|----|
| 8c.1.1 | Introduction | |
| 8c.1.2 | Definitions | |
| 8c.1.2.1 | Controlling and serving nodes | |
| 8c.1.2.2 | RIM association | |
| 8c.1.2.3 | RIM variables | |
| 8c.1.3 | RIM PDUs description | |
| 8c.1.3.1 | RAN-INFORMATION-REQUEST PDU | |
| 8c.1.3.2 | RAN-INFORMATION PDU | |
| 8c.1.3.3 | RAN-INFORMATION-ACK PDU | |
| 8c.1.3.4 | RAN-INFORMATION-ERROR PDU | |
| 8c.1.3.5 | RAN-INFORMATION-APPLICATION-ERROR PDU | |
| 8c.1.4 | RIM addressing and routing principles | |
| 8c.1.4.1 | RIM routing address | |
| 8c.1.4.1.1 | GERAN BSS identification | 53 |
| 8c.1.4.1.2 | UTRAN RNS identification | 53 |
| 8c.1.4.2 | Routing via the core network | |
| 8c.1.4.3 | Address mirroring | |
| 8c.1.5 | In-order delivery and reliable transfer - RSN | |
| 8c.1.5.1 | General | 54 |
| 8c.1.5.2 | Allocating RSN values at the sending BSS | 54 |
| 8c.1.5.3 | Comparing RSN values at the receiving BSS | |
| 8c.1.6 | RIM Protocol Version Number | 55 |
| 8c.2 | RIM procedures | 55 |
| 8c.2.1 | General | 55 |
| 8c.2.2 | RAN Information Request procedure | 55 |
| 8c.2.2.1 | RAN Information Request/Single Report procedure | 55 |
| 8c.2.2.1.1 | Initiation by the controlling BSS | 56 |
| 8c.2.2.1.2 | Reception of a valid RAN-INFORMATION-REQUEST/Single Report PDU by the serving | |
| | BSS | |
| 8c.2.2.1.3 | Reception of a valid RAN-INFORMATION/Single Report PDU by the controlling BSS | 57 |
| 8c.2.2.1.4 | Expiration of T(RIR) in the controlling BSS | 57 |
| 8c.2.2.2 | RAN Information Request/Multiple Report procedure | 57 |
| 8c.2.2.2.1 | Initiation by the controlling BSS | 57 |
| 8c.2.2.2.2 | Reception of a valid RAN-INFORMATION-REQUEST/Multiple Report PDU by the serving BSS | 57 |
| 8c.2.2.3 | Reception of a valid RAN-INFORMATION PDU/Initial Multiple Report PDU by the | |
| 0 2224 | controlling BSS | |
| 8c.2.2.2.4 | Expiration of T(RIR) in the controlling BSS | |
| 8c.2.2.3 | RAN Information Request/Stop procedure | |
| 8c.2.2.3.1 | Initiation by the controlling BSS | |
| 8c.2.2.3.2 | Reception of a valid RAN-INFORMATION-REQUEST/Stop PDU by the serving BSS | |
| 8c.2.2.3.3 | | |
| 8c.2.2.3.4 | Expiration of T(RIR) in the controlling BSS | |
| 8c.2.3 | RAN Information Send procedure | |
| 8c.2.3.1 | Initiation by the serving BSS | |
| 8c.2.3.2 | Reception of a valid RAN-INFORMATION PDU by the controlling BSS | |
| 8c.2.3.3 | Reception of a valid RAN-INFORMATION-ACK PDU in the serving BSS | |
| 8c.2.3.4 | Expiration of T(RI) in the serving BSS | |
| 8c.2.4 | RAN Information Application Error procedure | |
| 8c.2.4.1 | Initiation by the controlling BSS | |
| 8c.2.4.2 | Reception of a valid RAN-INFORMATION-APPLICATION-ERROR PDU by the serving BSS | |
| 8c.2.4.3 | Reception of a valid RAN-INFORMATION-ACK PDU by the controlling BSS | |
| 8c.2.4.4 | Expiration of T(RIAE) in the controlling BSS | |
| 8c.2.5 | RAN Information Error procedure | |
| 8c.3 | Abnormal conditions | |
| 8c.3.0 | General | |
| 8c.3.1 | Abnormal conditions at the BSSGP level | |
| 8c.3.1.1 | General PIM addressing overer in PSS | |
| 8c.3.1.2 | RIM addressing error in BSS | |
| 8c.3.1.3 | RIM addressing error in the CN | |
| 8c.3.1.4 | RIM PDU addressed to a BSS not supporting RIM | o4 |

| 8c.3.2 | Abnormal conditions encountered in the RIM container | |
|-----------|---|-----------|
| 8c.3.2.1 | Unknown RIM Application Identity | 64 |
| 8c.3.2.2 | Erroneous PDU Type Extension field | 64 |
| 8c.3.2.3 | Missing conditional IE | 65 |
| 8c.3.2.4 | Missing mandatory IE | 65 |
| 8c.3.2.5 | Syntactical error in an expected conditional IE | 65 |
| 8c.3.2.6 | Syntactical error in a mandatory IE | |
| 8c.3.2.7 | Unexpected conditional IE | |
| 8c.3.2.8 | Containers with out-of-sequence information elements | |
| 8c.3.2.9 | Container with semantically incorrect content | |
| 8c.3.3 | Unexpected RIM PDU | |
| 8c.3.4 | RIM error reporting | |
| 8c.3.4.1 | General | |
| 8c.3.4.2 | Sending of a RAN-INFORMATION-ERROR PDU | |
| 8c.3.4.3 | Reception of a RAN-INFORMATION-ERROR PDU in the BSS | |
| 8c.4 | RIM timers | |
| 8c.5 | Action upon deletion of a cell in a BSS | |
| 8c.5.0 | General | |
| 8c.5.1 | Actions due to the deletion of the cell | |
| 8c.5.2 | Additional actions in the case the deleted cell is used as a source cell by RIM | |
| 8c.6 | Specific requirements related to RIM applications | |
| 8c.6.0 | General requirements | |
| 8c.6.1 | Requirements related to the NACC RIM application | |
| | | |
| 9 G | eneral Protocol Error Handling | 69 |
| 10 DI | NII famadiana 1 da finidiana and a antanta | 60 |
| | OU functional definitions and contents | |
| 10.1 | General Structure Of A PDU | |
| 10.2 | PDU functional definitions and contents at RL and BSSGP SAPs | |
| 10.2.1 | DL-UNITDATA | |
| 10.2.2 | UL-UNITDATA | |
| 10.2.3 | RA-CAPABILITY | |
| 10.2.4 | PTM-UNITDATA | |
| 10.3 | PDU functional definitions and contents at GMM SAP | |
| 10.3.1 | PAGING PS | |
| 10.3.2 | PAGING CS | |
| 10.3.3 | RA-CAPABILITY-UPDATE | |
| 10.3.4 | RA-CAPABILITY-UPDATE-ACK | |
| 10.3.5 | RADIO-STATUS | |
| 10.3.6 | SUSPEND | |
| 10.3.7 | SUSPEND-ACK | |
| 10.3.8 | SUSPEND-NACK | |
| 10.3.9 | RESUME | |
| 10.3.10 | RESUME-ACK | |
| 10.3.11 | RESUME-NACK | |
| 10.4 | PDU functional definitions and contents at NM SAP | |
| 10.4.1 | FLUSH-LL | 75 |
| 10.4.2 | FLUSH-LL-ACK | |
| 10.4.3 | LLC-DISCARDED | 75 |
| 10.4.4 | FLOW-CONTROL-BVC | |
| 10.4.5 | FLOW-CONTROL-BVC-ACK | 76 |
| 10.4.6 | FLOW-CONTROL-MS | |
| 10.4.7 | FLOW-CONTROL-MS-ACK | 77 |
| 10.4.8 | BVC-BLOCK | 77 |
| 10.4.9 | BVC-BLOCK-ACK | 77 |
| 10.4.10 | BVC-UNBLOCK | |
| 10.4.11 | BVC-UNBLOCK-ACK | |
| 10.4.12 | BVC-RESET | |
| 10.4.13 | BVC-RESET-ACK | |
| 10.4.14 | STATUS | |
| 10.4.14.1 | | |
| 10 4 15 | SGSN-INVOKE-TRACE | |

| 10.4.16 | | |
|---------|--|-----|
| 10.4.17 | | |
| 10.4.18 | | |
| 10.4.19 | CREATE-BSS-PFC-NACK | 81 |
| 10.4.20 | MODIFY-BSS-PFC | 81 |
| 10.4.21 | MODIFY-BSS-PFC-ACK | 81 |
| 10.4.22 | DELETE-BSS-PFC | 82 |
| 10.4.23 | DELETE-BSS-PFC-ACK | 82 |
| 10.4.24 | FLOW-CONTROL-PFC | 82 |
| 10.4.25 | | |
| 10.5 | PDU functional definitions and contents at LCS SAP | 83 |
| 10.5.1 | PERFORM-LOCATION-REQUEST | |
| 10.5.2 | PERFORM-LOCATION-RESPONSE | |
| 10.5.3 | PERFORM-LOCATION-ABORT | 84 |
| 10.5.4 | POSITION-COMMAND | |
| 10.5.5 | POSITION-RESPONSE | |
| 10.6 | PDU functional definitions and contents at RIM SAP | |
| 10.6.1 | RAN-INFORMATION-REQUEST | |
| 10.6.2 | RAN-INFORMATION | |
| 10.6.3 | RAN-INFORMATION-ACK | |
| 10.6.4 | RAN-INFORMATION-ERROR | |
| 10.6.5 | RAN-INFORMATION-APPLICATION-ERROR | 87 |
| 11 | General information elements coding | 87 |
| 11.1 | General structure of the information elements | |
| 11.2 | Information element description | |
| 11.3 | Information Element Identifier (IEI) | |
| 11.3.1 | Alignment octets | |
| 11.3.2 | Bmax default MS | |
| 11.3.3 | BSS Area Indication | |
| 11.3.4 | Bucket Leak Rate (R) | |
| 11.3.5 | BVC Bucket Size | |
| 11.3.6 | BVCI (BSSGP Virtual Connection Identifier) | |
| 11.3.7 | BVC Measurement | |
| 11.3.8 | Cause | |
| 11.3.9 | Cell Identifier | 91 |
| 11.3.10 | Channel needed | 91 |
| 11.3.11 | DRX Parameters | 92 |
| 11.3.12 | eMLPP-Priority | 92 |
| 11.3.13 | Flush Action | 92 |
| 11.3.14 | IMSI | 93 |
| 11.3.15 | LLC-PDU | 93 |
| 11.3.16 | LLC Frames Discarded | 93 |
| 11.3.17 | Location Area | 93 |
| 11.3.18 | LSA Identifier List | 94 |
| 11.3.19 | | |
| 11.3.20 | | |
| 11.3.21 | | |
| 11.3.22 | 1 2 | |
| 11.3.23 | | |
| 11.3.24 | | |
| 11.3.25 | | |
| 11.3.26 | 71 | |
| 11.3.27 | • | |
| 11.3.28 | | |
| 11.3.29 | | |
| 11.3.30 | 1 | |
| 11.3.31 | \mathcal{E} | |
| 11.3.32 | <u> </u> | |
| 11.3.33 | | |
| 11.3.34 | E | |
| 11.3.35 | 1 emporary logical link Identity (TLLI) | 100 |

| 11.3.36 | Temporary Mobile Subscriber Identity (TMSI) | |
|--------------------|--|-----|
| 11.3.37 | Trace Reference | |
| 11.3.38 | Trace Type | |
| 11.3.39 | Transaction Id | |
| 11.3.40 | Trigger Id | |
| 11.3.41 | Number of octets affected | |
| 11.3.42 | Packet Flow Identifier (PFI) | |
| 11.3.42a | (void) | |
| 11.3.43 | Aggregate BSS QoS Profile | |
| 11.3.44 | GPRS Timer | |
| 11.3.45 | Feature Bitmap | |
| 11.3.46 | Bucket Full Ratio | |
| 11.3.47 | Service UTRAN CCO | |
| 11.3.48 | NSEI (Network Service Entity Identifier) | |
| 11.3.49 | RRLP APDU | |
| 11.3.50 | LCS QoS | |
| 11.3.51 | LCS Client Type | |
| 11.3.52 | Requested GPS Assistance Data | |
| 11.3.53 | Location Type | |
| 11.3.54 | Location Estimate | |
| 11.3.55 | Positioning Data Deciphering Keys | |
| 11.3.56 11.3.57 | LCS Priority | |
| 11.3.57 | LCS Cause | |
| 11.3.59 | LCS Capability | |
| 11.3.60 | RRLP Flags | |
| 11.3.61 | RIM Application Identity | |
| 11.3.62 | RIM Sequence Number | |
| 11.3.62a | RIM Container | |
| 11.3.62a | General | |
| 11.3.62a.0 | RAN-INFORMATION-REQUEST RIM Container | |
| 11.3.62a.2 | RAN-INFORMATION RIM Container | |
| 11.3.62a.3 | RAN-INFORMATION-ACK RIM Container | |
| 11.3.62a.4 | RAN-INFORMATION-ERROR RIM Container | |
| 11.3.62a.5 | RAN-INFORMATION-APPLICATION-ERROR RIM Container | |
| 11.3.63 | Application Container | |
| 11.3.63.1 | RAN-INFORMATION-REQUEST Application Container | |
| 11.3.63.1.0 | General | |
| 11.3.63.1.1 | RAN-INFORMATION-REQUEST Application Container for the NACC Application | |
| 11.3.63.2 | RAN-INFORMATION Application Container Unit | |
| 11.3.63.2.0 | General | |
| 11.3.63.2.1 | RAN-INFORMATION Application Container for the NACC Application | 111 |
| 11.3.63 | Application Container | |
| 11.3.63.1 | RAN-INFORMATION-REQUEST Application Container | |
| 11.3.63.1.0 | General | |
| 11.3.63.1.1 | RAN-INFORMATION-REQUEST Application Container for the NACC Application | |
| 11.3.63.2 | RAN-INFORMATION Application Container Unit | |
| 11.3.63.2.0 | General | 112 |
| 11.3.63.2.1 | RAN-INFORMATION Application Container for the NACC Application | 112 |
| 11.3.65 | RIM PDU Indications | 113 |
| 11.3.65.0 | General | 113 |
| 11.3.65.1 | RAN-INFORMATION-REQUEST RIM PDU Indications | 114 |
| 11.3.65.2 | RAN-INFORMATION RIM PDU Indications | |
| 11.3.65.3 | RAN-INFORMATION-APPLICATION-ERROR RIM PDU Indications | |
| 11.3.66 | (void) | |
| 11.3.67 | RIM Protocol Version Number | |
| 11.3.68 | PFC Flow Control parameters | |
| 11.3.69 | Global CN-Id | |
| 11.3.70 | RIM Routing Information | 116 |
| 12 List o | of system variables | 117 |
| 12.1 G | eneral Variables | 117 |

| 12.2 | Flow control variables | s1 | 18 |
|---------|------------------------|-----------------|----|
| Annex A | (informative): | Change history1 | 19 |
| History | | 1 | 20 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The present document specifies or references procedures used on the Base Station System (BSS) to Serving GPRS Support Node (SGSN) interface for control of GSM packet data services within the digital cellular telecommunications system (Phase 2+).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies or references procedures used on the Base Station System (BSS) to Serving GPRS Support Node (SGSN) interface for control of GSM packet data services.

The functional split between BSS and SGSN is defined in 3GPP TS 23.060 which states that a BSS is responsible for local radio resource allocation. The required procedures between BSS and SGSN are defined in detail in the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

| [1] | 3GPP TR 21.905: "Vocabulary for 3GPP Specifications". |
|------|---|
| [2] | (void). |
| [3] | (void). |
| [4] | (void). |
| [5] | (void). |
| [6] | (void). |
| [7] | 3GPP TS 23.060: "General Packet Radio Service (GPRS); Service Description; Stage 2". |
| [8] | (void). |
| [9] | (void). |
| [10] | 3GPP TS 43.064: "Overall description of the GPRS radio interface; Stage 2". |
| [11] | $3 GPP\ TS\ 24.008: "Mobile\ radio\ interface\ Layer\ 3\ specification;\ Core\ network\ protocols;\ Stage\ 3".$ |
| [12] | 3GPP TS 44.064: "Mobile Station - Serving GPRS Support Node (MS-SGSN) Logical Link Control (LLC) Layer Specification". |
| [13] | (void). |
| [14] | 3GPP TS 48.008: "Mobile Switching Centre - Base Station System (MSC-BSS) interface; Layer 3 specification". |
| [15] | (void). |
| [16] | 3GPP TS 48.016: "General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN) interface; Network Service" |
| [17] | 3GPP TS 29.018: "General Packet Radio Service (GPRS); Serving GPRS Support Node (SGSN) - Visitors Location Register (VLR); Gs Interface Layer 3 specification". |
| [18] | 3GPP TS 32.008: "Subscriber and equipment trace". |

| [19] | ITU-T Recommendation X.200 (White Book): "Information technology - Open Systems Interconnection - Basic Reference Model: The basic model". |
|------|--|
| [20] | 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture". |
| [21] | (void). |
| [22] | 3GPP TS 44.060: "General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol". |
| [23] | 3GPP TS 43.059: "Functional Stage 2 Description of Location Services (LCS) in GERAN". |
| [24] | 3GPP TS 49.031: "Location Services (LCS); Base Station System Application Part LCS Extension (BSSAP-LE)". |
| [25] | 3GPP TS 44.018: "Mobile radio interface layer 3 specification; Radio Resource Control Protocol". |
| [26] | 3GPP TR 44.901: "External Network Assisted Cell Change (NACC)". |
| [27] | 3GPP TS 23.236: "Intra-domain connection of Radio Access Network (RAN) nodes to multiple Core Network (CN) nodes". |
| [28] | 3GPP TS 12.20: "Base Station System (BSS) Management Information". |

3 Abbreviations

A D O D

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 and in 3GPP TS 48.016 and the following apply:

| ABQP | Aggregate BSS QoS Profile |
|------|------------------------------|
| CBL | Current Bucket Level |
| CCN | Cell Change Notification |
| CS | Circuit switched |
| DL | Downlink |
| LCS | Location Services |
| NACC | Network Assisted Cell Change |
| NSE | Network Service Entity |
| PFC | Packet Flow Context |
| PFI | Packet Flow Identifier |
| PFM | Packet Flow Management |
| PFT | Packet Flow Timer |
| PS | Packet switched |
| RAN | Radio Access Network |
| RRLP | Radio Resource LCS Protocol |
| TOM | Tunneling of Messages |
| RIM | RAN Information Management |
| RIM | RAN Information Management |
| RSN | RIM Sequence Number |
| UL | Uplink |

A ----- DCC O-C D--C1-

4 Logical configuration of the Gb-interface

4.1 High-level characteristics of the Gb-interface

In contrast to the A-interface, where a single user has the sole use of a dedicated physical resource throughout the lifetime of a call irrespective of information flow, the Gb-interface allows many users to be multiplexed over a common physical resource.

GPRS signalling and user data may be sent on the same physical resources.

Access rates per user may vary from zero data to the maximum possible bandwidth (e.g. the available bit rate of an E1).

4.2 Position of BSSGP within the protocol stack on the Gbinterface

Across the Gb-interface the following peer protocols have been identified: the Base Station Subsystem GPRS Protocol (BSSGP) and the underlying network service (NS). The NS shall transport BSSGP PDUs between a BSS and an SGSN (refer to 3GPP TS 48.016).

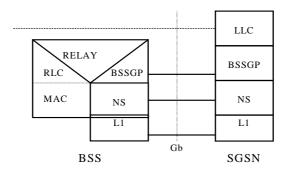


Figure 4.1: BSSGP's position within the Gb-interface protocol stack

NOTE: The Relay function provides buffering and parameter mapping between the RLC/MAC and the BSSGP.

EXAMPLE: On the uplink the RLC/MAC shall provide a TLLI. The Relay function shall then make it available to BSSGP. For a definition of the RLC/MAC function refer to 3GPP TS 43.064.

The primary functions of the BSSGP include:

- in the downlink, the provision by an SGSN to a BSS of radio related information used by the RLC/MAC function;
- in the uplink, the provision by a BSS to an SGSN of radio related information derived from the RLC/MAC function; and
- the provision of functionality to enable two physically distinct nodes, an SGSN and a BSS, to operate node management control functions.

The present doument describes the service model, service primitives, procedures and PDU formats of the BSSGP.

5 Elements for layer-to-layer communication

5.1 Definition of service model

In the present document, the communication between adjacent layers and the services provided by the layers are distributed by use of abstract service primitives. Only externally observable behaviour resulting from the description is normatively prescribed by the present document.

The service primitive model used in the present document is based on the concepts developed in ITU-T Recommendation X.200.

The service model for a BSS and an SGSN is asymmetric. The service models for a BSS and an SGSN are shown in figure 5.1.

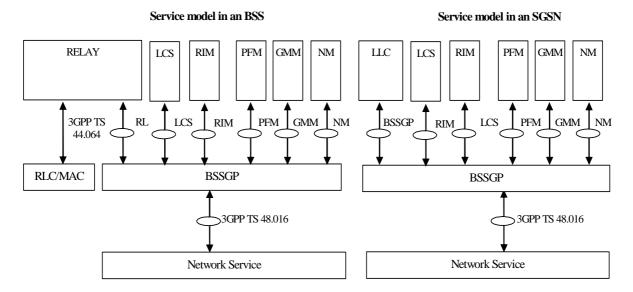


Figure 5.1: BSSGP service model

Primitives consist of commands and their respective responses associated with the services requested of another layer. The general syntax of a primitive is:

- XX - Generic name - Type (Parameters);

where XX designates the layer providing or using the service.

In the present document, XX is:

- "BSSGP" for functions controlling the transfer of LLC frames passed between an SGSN and an MS across the Gb interface;
- "RL" (relay) for functions controlling the transfer of LLC frames between the RLC/MAC function and BSSGP;
- "GMM" (GPRS mobility management) for functions associated with mobility management between an SGSN and a BSS; and
- "NM" (network management) for functions associated with Gb-interface and BSS-SGSN node management;
- "PFM" (packet flow management) for functions associated with the management of BSS Packet Flow Contexts (PFCs);
- "LCS" (location services) for functions associated with location services (LCS) procedures;
- "RIM" (RAN Information Management) for functions associated with generic procedures to communicate between two BSSs over the core network.

5.2 Service primitives provided by the BSSGP at a BSS

Table 5.2: Service primitives provided by BSSGP at a BSS

| Generic name | Туре | | Parameters | | |
|------------------------------|---------|------------|------------|---------|--|
| | REQuest | INDication | RESponse | CoNFirm | |
| RL ⇔ BSSGP | _ | | | | |
| RL-DL-UNITDATA | - | Х | - | - | BVCI, NSEI, Refer to DL-UNITDATA PDU |
| RL-UL-UNITDATA | Х | - | - | - | BVCI, NSEI, LSP, Refer to UL- UNITDATA PDU |
| RL-PTM-UNITDATA | - | Х | - | - | BVCI, NSEI, Refer to PTM-UNITDATA PDU |
| GMM ⇔ BSSGP | | | | | |
| GMM-PAGING | - | X | - | - | BVCI, NSEI, Refer to PAGING PS PDU Refer to PDU PAGING CS PDU |
| GMM-RA-CAPABILITY | - | X | - | - | BVCI, NSEI, Refer to RA-CAPABILITY PDU |
| GMM-RA-CAPABILITY- UPDATE | Х | - | - | Х | BVCI, NSEI, Refer to RA-CAPABILITY- UPDATE PDU, Refer to RA-CAPABILITY- UPDATE-ACK PDU |
| GMM-RADIO-STATUS | Х | - | - | - | BVCI, NSEI, Refer to RADIO-STATUS PDU |
| GMM-SUSPEND | Х | - | - | Х | BVCI, NSEI, Refer to SUSPEND PDU Refer to SUSPEND- (N)ACK PDU |
| GMM-RESUME | Х | - | - | Х | BVCI, NSEI, Refer to RESUME PDU Refer to RESUME-(N)ACK PDU |
| NM ⇔ BSSGP | | | | 1 | |
| NM-FLUSH-LL | - | Х | Х | - | BVCI, NSEI, Refer to FLUSH-LL PDU Refer to FLUSH-LL-ACK PDU |
| NM-LLC-DISCARDED | Х | - | - | - | BVCI, NSEI, Refer to LLC-DISCARDED PDU |
| NM-FLOW-CONTROL- BVC | Х | - | - | Х | BVCI, NSEI, Refer to FLOW- CONTROL-BVC PDU Refer to FLOW- CONTROL-BVC ACK PDU |
| NM-FLOW-CONTROL-MS | Х | - | - | Х | BVCI, NSEI, Refer to FLOW- CONTROL-MS PDU Refer to FLOW-CONTROL-MS ACK PDU |
| NM-FLOW-CONTROL-PFC | Х | - | - | Х | BVCI, NSEI, Refer to FLOW- CONTROL-PFC PDU Refer to FLOW- CONTROL-PFC ACK PDU |
| NM-STATUS | Х | Х | - | - | BVCI, NSEI, Refer to STATUS PDU |

| Generic name | | Ту | Parameters | | |
|---------------------------------|---------|------------|------------|---------|--|
| | REQuest | INDication | RESponse | CoNFirm | |
| NM-BVC-BLOCK | Х | - | - | Х | BVCI, NSEI, Refer to BVC-BLOCK PDU Refer to BVC-BLOCK-ACK PDU |
| NM-BVC-UNBLOCK | Х | - | - | X | BVCI, NSEI, Refer to BVC-UNBLOCK PDU Refer to BVC-UNBLOCK- ACK PDU |
| NM-BVC-RESET | Х | X | Х | Х | BVCI, NSEI, Refer to BVC-RESET PDU Refer to BVC-RESET-ACK PDU |
| NM-TRACE | - | Х | - | - | BVCI, NSEI, Refer to SGSN-INVOKE- TRACE PDU |
| PFM ⇔ BSSGP | | | • | • | • |
| PFM-DOWNLOAD-BSS- PFC | Х | • | - | - | BVCI, NSEI Refer to DOWNLOAD- BSS-PFC PDU |
| PFM-CREATE-BSS-PFC | - | X | X | - | BVCI, NSEI Refer to CREATE-BSS- PFC PDU Refer to CREATE-BSS- PFC-ACK PDU Refer to CREATE-BSS- PFC-NACK PDU |
| PFM-MODIFY-BSS-PFC | Х | - | - | Х | BVCI, NSEI Refer to MODIFY-BSS- PFC PDU Refer to MODIFY-BSS- PFC-ACK PDU |
| PFM-DELETE-BSS-PFC | - | Х | Х | - | BVCI, NSEI Refer to DELETE-BSS- PFC PDU Refer to DELETE-BSS- PFC-ACK PDU |
| LCS ⇔ BSSGP | | | | | <u> </u> |
| LCS-LOCATE | - | X | X | - | BVCI, NSEI Refer to PERFORM- LOCATION-REQUEST PDU Refer to PERFORM- LOCATION-RESPONSE PDU |
| LCS-ABORT | - | Х | - | - | BVCI, NSEI Refer to PERFORM- LOCATION-ABORT PDU |
| LCS-INFORMATION- TRANSFER | Х | - | - | Х | BVCI, NSEI Refer to POSITION- COMMAND PDU Refer to POSITION- RESPONSE PDU |
| RIM ⇔ BSSGP RIM-PDU-TRANSFER | Х | X | | | BVCI, NSEI |
| MINI-FDU-I KANSFEK | ^ | * | - | - | Refer to RAN- INFORMATION- REQUEST, RAN- INFORMATION, RAN- INFORMATION-ACK, RAN-INFORMATION- APPLICATION-ERROR, RAN-INFORMATION- ERROR PDUS; |

5.2.1 RL-DL-UNITDATA.ind

Receipt of a DL-UNITDATA PDU from an SGSN by a BSS containing an LLC-PDU and MS control information necessary for the transmission of the LLC-PDU across the radio interface.

5.2.2 RL-UL-UNITDATA.reg

Request to send a UL-UNITDATA PDU to an SGSN from a BSS containing an LLC-PDU and radio interface derived information.

5.2.3 RL-PTM-UNITDATA.ind

This shall be developed in GPRS phase 2.

5.2.4 GMM-PAGING.ind

Receipt of a PAGING PS or PAGING CS PDU from an SGSN by a BSS containing instructions to page an MS within a given group of cells.

5.2.5 GMM-RA-CAPABILITY.ind

Receipt of a RA-CAPABILITY PDU from an SGSN by a BSS providing the new Radio Access capability of an MS.

5.2.6 GMM-RA-CAPABILITY-UPDATE.req

Request to send a RA-CAPABILITY-UPDATE PDU to an SGSN from a BSS in order to receive the current Radio Access capabilities of an MS.

5.2.7 GMM-RA-CAPABILITY-UPDATE.cnf

Receipt of a RA-CAPABILITY-UPDATE-ACK PDU from a SGSN by a BSS containing the current Radio Access capabilities of an MS.

5.2.8 GMM-RADIO-STATUS.reg

Request to send a RADIO-STATUS PDU to an SGSN from a BSS to report that an exception condition occurred in the operation of the radio interface for an MS.

5.2.9 GMM-SUSPEND.req

Request to send a SUSPEND PDU to an SGSN from a BSS to mark an MS's GPRS service as suspended.

5.2.10 GMM-SUSPEND.cnf

Receipt of a SUSPEND-ACK PDU from an SGSN by a BSS confirming that an SGSN has marked an MS's GPRS service as suspended.

5.2.11 GMM-RESUME.req

Request to send a RESUME PDU to an SGSN from a BSS to mark an MS's GPRS service as resumed.

5.2.12 GMM-RESUME.cnf

Receipt of a RESUME-ACK PDU from an SGSN by a BSS confirming that an SGSN has marked an MS's GPRS service as resumed.

5.2.13 NM-FLUSH-LL.ind

On receipt of a FLUSH-LL PDU by a BSS from an SGSN, the BSS will either delete queued LLC-PDUs for a TLLI or move the queued LLC-PDUs from an old to a new BVC. If there is a BSS context for the Mobile Station identified by the TLLI and the BSS is able to move the queued LLC-PDUs, the BSS has to move the BSS context from the old to the new BVC, even if it is not able to offer the same QoS characteristics in the new BVC.

5.2.14 NM-FLUSH-LL.res

Sending of a FLUSH-LL-ACK PDU to the SGSN from a BSS to report if queued LLC-PDU(s) for an MS were deleted or transferred from the old to the new cell within the routing area. The FLUSH-LL-ACK PDU may also report whether the QoS characteristics of the BSS context associated to the MS could be kept in the new cell.

5.2.15 NM-LLC-DISCARDED.req

Request to send a LLC-DISCARDED PDU to an SGSN from a BSS indicating that LLC frames pertaining to an MS have been locally discarded.

5.2.16 NM-FLOW-CONTROL-BVC.req

Request to send a FLOW-CONTROL-BVC PDU to an SGSN from a BSS indicating the ability of a BVC to accept a certain flow of data.

5.2.17 NM-FLOW-CONTROL-BVC.cnf

Confirmation that a FLOW-CONTROL-BVC PDU has been received by an SGSN for a given BVC.

5.2.18 NM-FLOW-CONTROL-MS.req

Request to send a FLOW-CONTROL-MS PDU to an SGSN from a BSS indicating the ability to accept a certain flow of data for a given MS.

5.2.19 NM-FLOW-CONTROL-MS.cnf

Confirmation that a FLOW-CONTROL-MS PDU has been received by an SGSN for a given MS.

5.2.19a NM-FLOW-CONTROL-PFC.reg

Request to send a FLOW-CONTROL-PFC PDU to an SGSN from a BSS indicating the ability to accept a certain flow of data for a given PFC of a given MS.

5.2.19b NM-FLOW-CONTROL-PFC.cnf

Confirmation that a FLOW-CONTROL-PFC PDU has been received by an SGSN for a given PFC of a given MS.

5.2.20 NM-STATUS.req

Request to send a STATUS PDU to an SGSN from a BSS to report that an exception condition occurred within the BSS.

5.2.21 NM-STATUS.ind

Receipt of a STATUS PDU from an SGSN by a BSS indicating that an exception condition occurred within an SGSN.

5.2.22 NM-BVC-BLOCK.req

Request to send a BVC-BLOCK PDU to an SGSN from a BSS to mark a BVC as blocked.

5.2.23 NM-BVC-BLOCK.cnf

Receipt of a BVC-BLOCK-ACK PDU from an SGSN by a BSS confirming that an SGSN has marked a BVC as blocked.

5.2.24 NM-BVC-UNBLOCK.req

Request to send a BVC-UNBLOCK PDU to an SGSN from a BSS to mark a BVC as unblocked.

5.2.25 NM-BVC-UNBLOCK.cnf

Receipt of a BVC-UNBLOCK-ACK PDU from an SGSN by a BSS confirming that an SGSN has marked a BVC as unblocked.

5.2.26 NM-BVC-RESET.req

Request to send a BVC-RESET PDU to an SGSN from a BSS to reset an SGSN's GPRS BVC contexts.

5.2.27 NM-BVC-RESET.res

Sending of a BVC-RESET-ACK PDU to the SGSN from an BSS indicating that a GPRS BVC context has been reset in the BSS.

5.2.28 NM-BVC-RESET.ind

Receipt of a BVC-RESET PDU at a BSS from an SGSN indicating that GPRS BVC contexts have been reset at the SGSN.

5.2.29 NM-BVC-RESET.cnf

Receipt of a BVC-RESET-ACK PDU at a BSS confirming that GPRS BVC context has been reset at the SGSN.

5.2.30 NM-TRACE.ind

Receipt of a SGSN-INVOKE-TRACE PDU at a BSS from an SGSN indicating the need to produce a trace record on an MS.

5.2.31 PFM-DOWNLOAD-BSS-PFC.reg

Upon a request to transfer an uplink or downlink LLC PDU for which it currently does not have a BSS Packet Flow Context, the BSS may send a DOWNLOAD-BSS-PFC PDU to an SGSN.

5.2.32 PFM-CREATE-BSS-PFC.ind

Receipt of a CREATE-BSS-PFC PDU at a BSS from an SGSN indicating that the BSS should create or modify a BSS Packet Flow Context using the Aggregate BSS QoS Profile.

5.2.33 PFM-CREATE-BSS-PFC.res

Sending of a CREATE-BSS-PFC-ACK PDU to the SGSN from a BSS to respond with an Aggregate BSS QoS Profile or a CREATE-BSS-PFC-NACK in case the BSS was unable to create the PFC.

5.2.34 PFM-MODIFY-BSS-PFC.req

Request to send a MODIFY-BSS-PFC PDU to an SGSN from a BSS to modify an Aggregate BSS QoS Profile.

5.2.35 (void)

5.2.36 (void)

5.2.37 PFM-MODIFY-BSS-PFC.cnf

Reception of a MODIFY-BSS-PFC-ACK PDU at a BSS from an SGSN confirming the modification of an Aggregate BSS QoS Profile.

5.2.38 PFM-DELETE-BSS-PFC.ind

Receipt of a DELETE-BSS-PFC PDU at a BSS from an SGSN to delete an Aggregate BSS QoS Profile.

5.2.39 PFM-DELETE-BSS-PFC.res

Sending of a DELETE-BSS-PFC-ACK PDU to an SGSN from a BSS to respond to a deletion.

5.2.40 LCS-LOCATE.ind

Receipt of a PERFORM-LOCATION-REQUEST PDU at a BSS from an SGSN requesting a location procedure for a target MS.

5.2.41 LCS-LOCATE.res

Sending of a PERFORM-LOCATION-RESPONSE PDU to an SGSN responding to the location request for a target MS.

5.2.42 LCS-ABORT.ind

Receipt of a PERFORM-LOCATION-ABORT PDU at a BSS from an SGSN indicating a request of an abort of a location procedure for a target MS.

5.2.43 LCS-INFORMATION-TRANSFER.reg

Request to send a POSITION-COMMAND PDU to an SGSN from a BSS that has LCS related information associated with a higher level protocol available to transfer.

5.2.44 LCS-INFORMATION-TRANSFER.cnf

Confirmation in a POSTION-RESPONSE PDU that the higher layer message has been received and an indication of the result of the message transfer and possibly including a reply with another higher layer protocol message.

5.2.45 RIM-PDU-TRANSFER.reg

Sending of a RAN-INFORMATION-REQUEST, RAN-INFORMATION, RAN-INFORMATION-ACK, RAN-INFORMATION-APPLICATION-ERROR, RAN-INFORMATION-ERROR PDU to an SGSN from a BSS for routing of the PDU to another BSS.

5.2.46 RIM-PDU-TRANSFER.ind

Reception of a RAN-INFORMATION-REQUEST, RAN-INFORMATION, RAN-INFORMATION-ACK, RAN-INFORMATION-APPLICATION-ERROR, RAN-INFORMATION-ERROR PDU at a BSS from an SGSN originating from another BSS.

- 5.2.47 (void)
- 5.2.48 (void)
- 5.2.49 (void)
- 5.2.50 (void)
- 5.2.51 (void)
- 5.2.52 (void)

5.3 Service primitives provided by the BSSGP at an SGSN

Table 5.3: Service primitives provided by BSSGP at an SGSN

| Generic name | Generic name Type | | | | Parameters |
|------------------------------|-------------------|------------|----------|---------|---|
| | REQuest | INDication | RESponse | CoNFirm | 7 |
| LL ⇔ BSSGP | | | | | |
| BSSGP-DL-UNITDATA | X | - | - | - | BVCI, NSEI, LSP, Refer to DL-UNITDATA PDU |
| BSSGP-UL-UNITDATA | - | X | | | BVCI, NSEI, Refer to UL-UNITDATA PDU |
| BSSGP-PTM-UNITDATA | Х | - | - | - | BVCI, NSEI, Refer to PTM-UNITDATA PDU |
| GMM ⇔ BSSGP | | | | | |
| GMM-PAGING | X | - | - | - | BVCI, NSEI, Refer to PAGING PS PDU Refer to PAGING CS PDU |
| GMM-RA-CAPABILITY | Х | | | | BVCI, NSEI, Refer to RA-CAPABILITY PDU |
| GMM-RA-CAPABILITY- UPDATE | - | Х | X | - | BVCI, NSEI, Refer to RA-CAPABILITY- UPDATE PDU, Refer to RA-CAPABILITY- UPDATE-ACK PDU |
| GMM-RADIO-STATUS | - | Х | - | - | BVCI, NSEI, Refer to RADIO-STATUS PDU |

| Generic name | | T | Parameters | | |
|-------------------------|---------|------------|------------|---------|---|
| | REQuest | INDication | RESponse | CoNFirm | |
| GMM-SUSPEND | - | Х | - | - | BVCI, NSEI, Refer to SUSPEND PDU Refer to SUSPEND-(N)ACK PDU |
| GMM-RESUME | - | Х | - | - | BVCI, NSEI, Refer to RESUME PDU Refer to RESUME-(N)ACK PDU |
| NM ⇔ BSSGP | | | T | T | In to |
| NM-FLUSH-LL | X | | - | X | BVCI, NSEI, Refer to FLUSH-LL PDU Refer to FLUSH-LL-ACK PDU |
| NM-LLC-DISCARDED | - | Х | - | - | BVCI, NSEI, Refer to LLC-DISCARDED PDU |
| NM-FLOW-CONTROL- BVC | - | X | - | - | BVCI, NSEI, Refer to FLOW-CONTROL- BVC PDU Refer to FLOW- CONTROL-BVC ACK PDU |
| NM-FLOW-CONTROL- MS | - | Х | - | - | BVCI, NSEI, Refer to FLOW-CONTROL- MS PDU Refer to FLOW- CONTROL-MS ACK PDU |
| NM-FLOW-CONTROL- PFC | - | Х | - | - | BVCI, NSEI, Refer to FLOW-CONTROL- PFC PDU Refer to FLOW- CONTROL-PFC ACK PDU |
| NM-STATUS | Х | Х | - | - | BVCI, NSEI, Refer to STATUS PDU |
| NM-BVC-BLOCK | - | Х | - | - | BVCI, NSEI, Refer to BVC-BLOCK PDU Refer to BVC-BLOCK-ACK PDU |
| NM-BVC-UNBLOCK | - | Х | - | - | BVCI, NSEI, Refer to BVC-UNBLOCK PDU Refer to BVC-UNBLOCK- ACK PDU |
| NM-BVC-RESET | X | X | Х | X | BVCI, NSEI, Refer to BVC-RESET PDU Refer to BVC-RESET-ACK PDU |
| NM-TRACE | Х | - | - | - | BVCI, NSEI, Refer to SGSN-INVOKE- TRACE PDU |

| Generic name | Туре | | Parameters | | |
|------------------------------|---------|------------|------------|---------|--|
| | REQuest | INDication | RESponse | CoNFirm | |
| PFM ⇔ BSSGP | | | | | |
| PFM-DOWNLOAD-BSS- PFC | - | Х | - | - | BVCI, NSEI Refer to DOWNLOAD-BSS- PFC PDU |
| PFM-CREATE-BSS-PFC | Х | - | - | Х | BVCI, NSEI Refer to CREATE-BSS-PFC PDU Refer to CREATE-BSS- PFC-ACK PDU Refer to CREATE-BSS- PFC-NACK PDU |
| PFM-MODIFY-BSS-PFC | | Х | Х | | BVCI, NSEI Refer to MODIFY-BSS-PFC PDU Refer to MODIFY-BSS- PFC-ACK PDU |
| PFM-DELETE-BSS-PFC | Х | - | - | Х | BVCI, NSEI Refer to DELETE-BSS-PFC PDU Refer to DELETE-BSS- PFC-ACK PDU |
| LCS ⇔ BSSGP | • | | | | |
| LCS-LOCATE | Х | - | - | Х | BVCI, NSEI Refer to PERFORM- LOCATION-REQUEST PDU Refer to PERFORM- LOCATION-RESPONSE PDU |
| LCS-ABORT | X | - | - | - | BVCI, NSEI Refer to PERFORM- LOCATION-ABORT PDU |
| LCS-INFORMATION- TRANSFER | - | Х | Х | - | BVCI, NSEI Refer to POSITION- COMMAND PDU Refer to POSITION- RESPONSE PDU |
| RIM ⇔ BSSGP | | | | | |
| RIM-PDU-TRANSFER | X | X | - | - | BVCI, NSEI Refer to RAN- INFORMATION-REQUEST, RAN-INFORMATION, RAN- INFORMATION-ACK, RAN- INFORMATION- APPLICATION-ERROR, RAN-INFORMATION- ERROR PDUs; |

NOTE: The parameters in the BSSGP-DL-UNITDATA and BSSGP-UL-UNITDATA primitives that are not included in the corresponding primitives in 3GPP TS 44.064 are provided or extracted by some intermediate function out of the scope of the present document.

5.3.1 BSSGP-DL-UNITDATA.req

Request to send a DL-UNITDATA PDU to a BSS from an SGSN containing an LLC-PDU and control information necessary for the transmission of the LLC-PDU across the radio interface.

5.3.2 BSSGP-UL-UNITDATA.ind

Receipt of a UL-UNITDATA PDU from a BSS by an SGSN containing an LLC-PDU and radio interface derived information.

5.3.3 BSSGP-PTM-UNITDATA.reg

This shall be developed in GPRS phase 2.

5.3.4 GMM-PAGING.reg

Request to send a PAGING PS or PAGING CS PDU from an SGSN to a BSS containing instructions to page an MS within a given group of cells.

5.3.5 GMM-RA-CAPABILITY.reg

Request to send a RA-CAPABILITY PDU to the BSS from an SGSN containing the Radio Access capability of an MS.

5.3.6 GMM-RA-CAPABILITY-UPDATE.ind

Receipt of a RA-CAPABILITY-UPDATE PDU from a BSS by an SGSN, requesting that the SGSN sends the Radio Access capability of an MS to the BSS.

5.3.7 GMM-RA-CAPABILITY-UPDATE.res

Sending of a RA-CAPABILITY-UPDATE-ACK PDU to the BSS from an SGSN containing the current Radio Access capability of an MS.

5.3.8 GMM-RADIO-STATUS.ind

Receipt of a RADIO-STATUS PDU from a BSS by an SGSN to report that an exception condition occurred in the operation of the radio interface for an MS.

5.3.9 GMM-SUSPEND.ind

Receipt of a SUSPEND PDU from a BSS by an SGSN indicating that an MS wishes to suspended its GPRS service.

5.3.10 GMM-RESUME.ind

Receipt of a RESUME PDU from a BSS by an SGSN indicating that an MS wishes to resume its GPRS service.

5.3.11 NM-FLUSH-LL.req

Request to send a FLUSH-LL PDU from an SGSN to a BSS, instructing the BSS to either delete queued LLC-PDUs for a TLLI or move the queued LLC-PDUs from an old to a new BVC.

5.3.12 NM-FLUSH-LL.cnf

Receipt of a FLUSH-LL-ACK PDU at an SGSN informing if the queued LLC-PDU(s) for an MS were deleted or transferred from the old to the new cell within the routing area. The FLUSH-LL-ACK PDU may also report whether the QoS characteristics of the BSS context associated to the MS could be kept in the new cell.

5.3.13 NM-LLC-DISCARDED.ind

Receipt of a LLC-DISCARDED PDU from a BSS by an SGSN indicating that LLC frames pertaining to an MS have been locally discarded.

5.3.14 NM-FLOW-CONTROL-BVC.ind

Receipt of a FLOW-CONTROL-BVC PDU from a BSS by an SGSN indicating the ability of a BVC to accept a certain flow of data.

5.3.15 NM-FLOW-CONTROL-MS.ind

Receipt of a FLOW-CONTROL-MS PDU from a BSS by an SGSN indicating the ability to accept a certain flow of data for a given MS.

5.3.15a NM-FLOW-CONTROL-PFC.ind

Receipt of a FLOW-CONTROL-PFC PDU from a BSS by an SGSN indicating the ability to accept a certain flow of data for a given PFC of a given MS.

5.3.16 NM-STATUS.reg

Request to send a STATUS PDU to a BSS from an SGSN to report that an exception condition occurred within an SGSN.

5.3.17 NM-STATUS.ind

Receipt of a STATUS PDU from a BSS by an SGSN indicating an exception condition occurred within the BSS.

5.3.18 NM-BVC-BLOCK.ind

Receipt of a BVC-BLOCK PDU from a BSS by an SGSN indicating that a BVC shall be marked as blocked.

5.3.19 NM-BVC-UNBLOCK.ind

Receipt of a BVC-UNBLOCK PDU from a BSS by an SGSN indicating that a BVC shall be marked as unblocked.

5.3.20 NM-BVC-RESET.req

Request to send a BVC-RESET PDU to a BSS from an SGSN to reset a BSS's GPRS BVC contexts.

5.3.21 NM-BVC-RESET.res

Sending of a BVC-RESET-ACK PDU to the BSS from a SGSN indicating that a GPRS BVC context has been reset in the SGSN.

5.3.22 NM-BVC-RESET.ind

Receipt of a BVC-RESET PDU at an SGSN from a BSS indicating that GPRS BVC contexts have been reset at the BSS.

5.3.23 NM-BVC-RESET.cnf

Receipt of a BVC-RESET-ACK PDU at an SGSN confirming that GPRS BVC contexts have been reset at the BSS.

5.3.24 NM-TRACE.reg

Request to send an SGSN-INVOKE-TRACE PDU to a BSS from an SGSN to begin producing a trace record on an MS.

5.3.25 PFM-DOWNLOAD-BSS-PFC.ind

Receipt of a DOWNLOAD-BSS-PFC PDU at an SGSN from a BSS.

5.3.26 PFM-CREATE-BSS-PFC.req

Sending of a CREATE-BSS-PFC PDU to a BSS from an SGSN requesting that the BSS should create or modify a BSS Packet Flow Context using the Aggregate BSS QoS Profile.

5.3.27 PFM-CREATE-BSS-PFC.cnf

Receipt of a CREATE-BSS-PFC-ACK PDU at an SGSN from a BSS confirming the creation or modification of a BSS Packet Flow Context using the Aggregate BSS QoS Profile or a CREATE-BSS-PFC-NACK in to indicate the BSS was unable to create the PFC.

5.3.28 PFM-MODIFY-BSS-PFC.ind

Receipt of a MODIFY-BSS-PFC PDU at an SGSN from a BSS to modify an Aggregate BSS QoS Profile.

5.3.29 PFM-MODIFY-BSS-PFC.res

Sending of a MODIFY-BSS-PFC-ACK PDU to a BSS from an SGSN to respond with an Aggregate BSS QoS Profile.

5.3.30 PFM-DELETE-BSS-PFC.reg

Sending of a DELETE-BSS-PFC PDU to a BSS from an SGSN to delete an Aggregate BSS QoS Profile.

5.3.31 PFM-DELETE-BSS-PFC.cnf

Receipt of a DELETE-BSS-PFC-ACK PDU at an SGSN from a BSS to confirm the deletion of an Aggregate BSS QoS Profile.

5.3.32 LCS-LOCATE.req

Sending of a PERFORM-LOCATION-REQUEST PDU at an SGSN requesting a location procedure for a target MS.

5.3.33 LCS-LOCATE.cnf

Receipt of a PERFORM-LOCATION-RESPONSE PDU confirming that the location request for a target MS has been attempted indicating the result of this attempt.

5.3.34 LCS-ABORT.reg

Sending of a PERFORM-LOCATION-ABORT PDU from an SGSN to a BSS requesting an abort of a location procedure for a target MS.

5.3.35 LCS-INFORMATION-TRANSFER.ind

Receipt of a POSITION-COMMAND PDU at an SGSN from a BSS requesting a transfer of a higher level protocol message.

5.3.36 LCS-INFORMATION-TRANSFER.res

Sending of a POSITION-RESPONSE PDU from an SGSN to a BSS indicating the result of the message transfer and possibly including the transfer of a new higher layer protocol message.

5.3.37 RIM-PDU-TRANSFER.req

Sending of a RAN-INFORMATION-REQUEST, RAN-INFORMATION, RAN-INFORMATION-ACK, RAN-INFORMATION-APPLICATION-ERROR, RAN-INFORMATION-ERROR PDU to a BSS from an SGSN.

5.3.38 RIM-PDU-TRANSFER.ind

Reception of a RAN-INFORMATION-REQUEST, RAN-INFORMATION, RAN-INFORMATION-ACK, RAN-INFORMATION-APPLICATION-ERROR, RAN-INFORMATION-ERROR PDU at an SGSN from a BSS for routing of the PDU to another BSS.

- 5.3.39 (void)
- 5.3.40 (void)
- 5.3.41 (void)
- 5.3.42 (void)
- 5.3.43 (void)
- 5.3.44 (void)

5.4 Primitive parameters

5.4.1 BSSGP Virtual Connection Identifier (BVCI)

BSSGP Virtual Connections (BVCs) provide communication paths between BSSGP entities. Each BVC is used in the transport of BSSGP PDUs between peer point-to-point (PTP) functional entities, peer point-to-multipoint (PTM) functional entities and peer signalling functional entities. Table 5.4.1 lists the mapping of the BSSGP PDU to the associated functional entity and the BVCI. The BVCI is used to enable the lower network service layer to efficiently route the BSSGP PDU to the peer entity. This parameter is not part of the BSSGP PDU across the Gb interface, but is used by the network service entity across the Gb.

Any BSSGP PDU received by the BSS or the SGSN containing a PDU type that does not fit, according to the mapping defined in table 5.4.1, with the functional entity identified by the BVCI provided by the network service entity, is discarded and a STATUS PDU with a cause value set to "Protocol error - unspecified" is sent.

A PTP functional entity is responsible for PTP user data transmission. There is one PTP functional entity per cell. Within the present document, a cell is identified by a BVCI unless it is explicitly stated otherwise.

A PTM functional entity is responsible for PTM user data transmission. There is one or more PTM functional entities per BSS.

A signalling functional entity is responsible for other functions e.g. paging. There is only one signalling entity per Network Service Entity (NSE). There is one or more NSEs per BSS.

Each BVC is identified by means of a BSSGP Virtual Connection Identifier (BVCI) which has end-to-end significance across the Gb interface. Each BVCI is unique between two peer Network Service Entities.

In the BSS, it shall be possible to configure BVCIs statically by administrative means, or dynamically. In case of dynamic configuration, the BSSGP shall accept any BVCI passed by the underlying Network Service entity.

At the SGSN side, BVCIs associated with PTP functional entities shall be dynamically configured. The BVCIs associated with signalling functional entities and PTM functional entities are statically configured.

The BVCI value 0000 hex shall be used for the signalling functional entities.

The BVCI value 0001 hex shall be used for the PTM functional entities.

All other values may be used freely by the BSS and shall be accepted by the SGSN.

Table 5.4.1: BSSGP PDU, BVCI and functional entity mapping

| BSSGP PDU | Mapping of BVCI to functional entity |
|---|--------------------------------------|
| DL-UNITDATA | PTP |
| UL-UNITDATA | PTP |
| RA-CAPABILITY | PTP |
| PTM-UNITDATA | PTM |
| PAGING-PS | PTP or SIGNALLING (note 1) |
| PAGING-CS | PTP or SIGNALLING (note 2) |
| RA-CAPABILITY-UPDATE / RA-CAPABILITY-UPDATE-ACK | PTP |
| RADIO-STATUS | PTP |
| SUSPEND / SUSPEND-ACK / SUSPEND-NACK | SIGNALLING |
| RESUME / RESUME-ACK / RESUME-NACK | SIGNALLING |
| FLUSH-LL / FLUSH-LL-ACK | SIGNALLING |
| LLC DISCARDED | SIGNALLING |
| FLOW-CONTROL-BVC / FLOW-CONTROL-BVC-ACK | PTP |
| FLOW-CONTROL-MS / FLOW-CONTROL-MS-ACK | PTP |
| FLOW-CONTROL-PFC / FLOW-CONTROL-PFC-ACK | PTP |
| STATUS | PTP or PTM or SIGNALLING (note 3) |
| BVC-BLOCK / BVC-BLOCK-ACK | SIGNALLING |
| BVC-UNBLOCK / BVC-UNBLOCK-ACK | SIGNALLING |
| BVC-RESET / BVC-RESET-ACK | SIGNALLING |
| SGSN-INVOKE-TRACE | SIGNALLING |
| DOWNLOAD-BSS-PFC | PTP |
| CREATE-BSS-PFC / CREATE-BSS-PFC-ACK / CREATE-BSS- | PTP |
| PFC-NACK | |
| MODIFY-BSS-PFC / MODIFY-BSS-PFC-ACK | PTP |
| DELETE-BSS-PFC / DELETE-BSS-PFC-ACK | PTP |
| PERFORM-LOCATION-REQUEST / PERFORM-LOCATION- | SIGNALLING |
| RESPONSE / PERFORM-LOCATION-ABORT | |
| POSITION-COMMAND / POSITION-RESPONSE | SIGNALLING |
| RAN-INFORMATION-REQUEST/ RAN-INFORMATION/ RAN- | SIGNALLING |
| INFORMATION-ACK/ RAN-INFORMATION-ERROR/ RAN- | |
| INFORMATION-APPLICATION-ERROR | |

NOTE 1: The network may initiate paging of an MS in READY mobility management state at an indication of a lower layer failure (see 3GPP TS 24.008 sub-clause 4.7.9.1). In this case, the BVCI=PTP may be used.

5.4.2 Link Selector Parameter (LSP)

The link selector parameter is defined in 3GPP TS 48.016. At one side of the Gb interface, all BSSGP UNITDATA PDUs related to an MS shall be passed with the same LSP, e.g. the LSP contains the MS's TLLI, to the underlying network service. The LSPs used at the BSS and SGSN for the same MS may be set to different values.

5.4.3 [functional-name] PDU

The parameters that make up a [functional-name] PDU are defined in clause 10, "PDU Functional Definitions and contents".

5.4.4 Network Service Entity Identifier (NSEI)

The Network Service Entity at the BSS and the SGSN provides the network management functionality required for the operation of the Gb interface. The Network Service Entity is described in 3GPP TS 48.016.

NOTE 2: If the network initiates circuit-switched paging of a MS in READY mobility management state (e.g. a MS in class A or B mode of operation and in packet transfer mode), then the BVCI=PTP. If the MS is in STANDBY state, then the BVCI=SIGNALLING.

NOTE 3: The setting of the BVCI is dependent upon the context within which the STATUS PDU was generated.

Each Network Service Entity is identified by means of a Network Service Entity Identifier (NSEI). The NSEI together with the BVCI uniquely identifies a BSGP Virtual Connection (e.g. a PTP functional entity) within an SGSN. The NSEI is used by the BSS and the SGSN to determine the NS-VCs that provides service to a BVCI.

5.4.5 BSS Context

The SGSN can provide a BSS with information related to ongoing user data transmission. The information related to one MS is stored in a BSS context. The BSS may contain BSS contexts for several MSs. A BSS context contains a number of BSS packet flow contexts. A BSS packet flow context is identified by a packet flow identifier assigned by the SGSN. There are four pre-defined packet flows identified by four reserved packet flow identifier values. One pre-defined packet flow is used for best-effort service, one for signalling, one for SMS, and one for TOM8. The BSS shall not negotiate BSS packet flow contexts for these pre-defined packet flows with the SGSN.

NOTE: The TOM8 PFI is used to transfer LCS RRLP messages between the MS and the SGSN.

6 User data and signalling procedures between RL and BSSGP SAPs

6.1 Downlink UNITDATA procedure

On the downlink, a DL-UNITDATA PDU shall contain information elements to be used by the RLC/MAC function and an LLC-PDU. There shall be only one LLC-PDU per DL-UNITDATA PDU. The LLC-PDU shall always be the last information element in the DL-UNITDATA PDU, and shall be aligned on a 32 bit boundary for efficient processing.

An SGSN provides the BSSGP with a current TLLI, identifying the MS. If an SGSN provides a second TLLI, indicating that an MS has recently changed its TLLI, this shall be considered as the "old" TLLI. A BSS uses the "old" TLLI to locate an MS's existing context. Subsequent uplink data transfers for this MS shall reference the current TLLI, and not the old TLLI.

The SGSN shall include the IMSI in the PDU. As an exception, the SGSN may omit the IMSI in the PDU if the mobile station identified by the TLLI is in MM non-DRX mode period (i.e. during a GMM procedure for *GPRS attach* or *routing area updating* defined in 3GPP TS 24.008) and the SGSN does not have a valid IMSI.

The SGSN may include the *Service UTRAN CCO* (Cell Change Order) information element in the PDU (relevant if the *network initiated cell change order to UTRAN* procedure is used). If this information element is received in both the DL-UNITDATA PDU and the CREATE-BSS-PFC PDU, the information element received in the DL-UNITDATA PDU shall take precedence.

If the SGSN has valid DRX Parameters for a TLLI, then the SGSN shall include them in the PDU. Nevertheless, the SGSN can omit the DRX Parameters if the MS identified with the TLLI is in MM non-DRX mode period to speed up the transmission of the LLC-PDU on the radio interface. The SGSN shall not send a DL-UNITDATA PDU without the DRX Parameters IE if the MS identified with the TLLI is not in MM non-DRX mode period.

An SGSN provides the BSSGP with MS specific information, enabling the RLC/MAC entity in a BSS to transmit an LLC-PDU to the MS in a user specific manner. The information made available to the radio interface includes:

- MS Radio Access Capability. This defines the radio capabilities of the ME. If there is valid MS Radio Access
 Capability information known by the SGSN for the associated MS, the SGSN shall include it in the
 DL-UNITDATA PDU. Otherwise, MS Radio Access Capability shall not be present;
- Packet Flow Identifier. This identifies the packet flow context associated with the LLC PDU and is included by the SGSN if the packet flow context feature is negotiated. If the mobile station does not support the PFC feature or if the PFI is not known (e.g. the new SGSN did not get the PFI from the old SGSN during a RAU) then the SGSN shall use the pre-defined PFI to indicate best-effort QoS;
- QoS Profile. This defines the (peak) bit rate, the type of BSSGP's SDU (signalling or data), the type of LLC frame (ACK, SACK, or not), the precedence class, and the transmission mode to be used when transmitting the LLC-PDU across the radio interface. If the PFI is included then the maximum bit rate for downlink specified in the PFC ABQP shall supersede the peak bit rate specified in the QoS Profile IE;

- PDU Lifetime. This defines the remaining time period that the PDU is considered as valid within the BSS. If the PDU is held for a period exceeding the "PDU Lifetime" time period, the PDU shall be locally discarded. The PDU Lifetime is set within the SGSN by the upper layers.

A BSS may incorporate the PDU Lifetime, the Precedence and the (peak) bit rate into its radio resource scheduler. If the PFI is present then the BSS may incorporate the information from the associated ABQP into its radio resource scheduler. The algorithm to do this is out of scope of the present document.

Two types of BSSGP SDU are distinguished within the QoS Profile: layer 3 signalling and data. Layer 3 signalling may be transmitted over the Um interface with higher protection. If the MS has an RR connection to the network (see 3GPP TS 44.018), Layer 3 signalling may be transmitted over the Um interface on the main signalling link of the RR connection, provided that the LLC PDU meets length restrictions imposed by the BSS. In this case, the BSS shall include the LLC PDU contained in the BSSGP PDU in the correspondent Layer 3 Um interface message (see 3GPP TS 44.018).

The type of LLC frame indicates if the LLC frame type is an ACK or SACK command/response, or not (see 3GPP TS 44.064). An ACK or SACK command/response frame type may be transmitted over the Um interface with higher protection.

Two transmission modes across the radio interface are possible: acknowledged (using RLC/MAC ARQ functionality) and unacknowledged (using RLC/MAC unitdata functionality). These transmission modes do not apply when the MS has an RR connection to the network and BSS uses the main signalling link of the RR connection, in which case the acknowledged transmission mode is used.

If Priority is present, only the priority-level field shall be regarded. The management of priority levels is implementation dependent and under operator control. The preemption capability indicator, the queuing allowed indicator and preemption vulnerability indicator shall be ignored.

In addition to constructing the DL-UNITDATA, the SGSN supplies the LSP, the BVCI, the NSEI, and for an IP subnetwork the NS Change IP endpoint, associated with the MS to the lower layer network service, enabling network service routeing to the peer entity. These parameters are not transmitted as part of the BSSGP across the Gb-interface for the purpose of identifying the receiving endpoint (they are sent in the BSSGP Perform-Location-Request PDU to identify the serving cell of the target MS).

If the Gb-interface is supported using an IP sub-network, then the Resource Distribution function at the SGSN may transmit a BSSGP DL-UNITDATA PDU with an LLC-PDU Length Indicator set to 0. The BSS uses this DL-UNITDATA to change the IP endpoint at the SGSN to which any future UL-UNITDATA for the TLLI (indicated in the DL-UNITDATA) is sent. The LLC-PDU with a Length Indicator set to 0 is not sent across the radio interface.

In the case where localised service area is supported the SGSN may inform the BSS as to which LSA identities that the mobile has preferences by sending the LSA INFORMATION element. The BSS stores this information and uses it e.g. for network controlled cell re-selection when determining specific cell selection parameters for the mobile. The algorithm for determining specific cell selection parameters for the mobile is not defined further in the present document.

6.1.1 Abnormal conditions

The following actions are defined in periods of congestion.

To satisfy the maximum number of service requests, the BSS may redistribute MSs among cells (i.e. network controlled cell reselection is initiated). If this occurs, the BSS may inform the SGSN through the RADIO STATUS PDU (Radio Cause value: cell reselection ordered). The BSS shall update any internal references that indicate the location of the MS. The BSS may attempt to internally re-route queued LLC frames to an MS that has been moved to a new cell. If this functionality is not supported, or if it is not possible to internally re-route LLC frames, the LLC frame shall be discarded.

It is the responsibility of the higher layer protocols in the SGSN to cope with discarded LLC frames.

6.2 Uplink UNITDATA procedure

On the uplink, a UL-UNITDATA PDU shall contain information elements derived from the RLC/MAC function (except when GTTP is used in the Um interface, see 3GPP TS 44.018), meaningful to higher-layer protocols in an

SGSN, and an LLC-PDU. There shall be only one LLC-PDU per UL-UNITDATA PDU. The LLC-PDU shall always be the last information element in the UL-UNITDATA PDU, and shall be aligned on a 32 bit boundary for efficient processing.

The BSS shall provide the TLLI, received from the MS, to the SGSN.

The BSS shall provide a BVCI and an NSEI indicating the PTP functional entity (i.e. the cell) upon which the LLC-PDU was received. The SGSN shall obtain the BVCI, the NSEI, and in the case of an IP sub-network may obtain the LSP and the NS Change IP endpoint, from the underlying network service; the BVCI and the NSEI are not visible in the UL-UNITDATA PDU.

The BSS provides the SGSN with the QoS Profile used in the LLC-PDU's transmission from the mobile station across the radio interface.

- QoS Profile. This reports the (peak) bit rate, the precedence used at radio access and the transmission mode used across the radio path. The type of the BSSGP SDU, layer 3 signalling or data, and the type of LLC frame, SACK, ACK, or not, are not meaningful on the uplink and shall be ignored.
- Packet Flow Identifier. This identifies the packet flow context that is obtained from the mobile. If the mobile station does not provide a PFI then the BSS shall use the pre-defined PFI to indicate best-effort QoS.

In order to support location based services, the BSS shall include the cell identifier of the cell upon which the LLC-PDU was received.

In the case where localised service area is supported, the BSS shall include the LSA identities of the cell upon which the LLC-SDU was received. The BSS may exclude LSA identities that are not included in the LSA INFORMATION element.

In addition to constructing the UL-UNITDATA, the BSS supplies the LSP, the NSEI, the BVCI, and for an IP subnetwork the NS Change IP endpoint, associated with the MS to the lower layer network service, enabling network service routeing to the peer entity. These parameters are not transmitted as part of the BSSGP across the Gb-interface. If the Gb-interface is supported using an IP sub-network , then the Resource Distribution function at the BSS may transmit a BSSGP UL-UNITDATA PDU with an LLC-PDU Length Indicator set to 0. The SGSN uses this UL-UNITDATA to change the IP endpoint at the BSS to which any future DL-UNITDATA for the TLLI (indicated in the UL-UNITDATA) is sent.

6.2.1 Abnormal conditions

None specified.

6.3 RA-CAPABILITY procedure

The SGSN stores an MS's current radio access capability (which may be changed by higher layer mobility management procedures). An MS's current radio access capability, and the TLLI identifying the MS, are conveyed to a BSS in a RA-CAPABILITY PDU. The received MS's radio access capability, if valid, shall then replace any radio access capability previously associated with the MS.

6.3.1 Abnormal conditions

If the BSS receives an unknown Access Technology Type in the MS Radio Access Capability field, it shall ignore the fields associated with that Access Technology type.

If the BSS receives unknown fields within a known Access Technology Type in the MS Radio Access Capability field, it shall ignore the unknown fields.

7 Signalling procedures between GMM SAPs

7.1 Paging procedure

When an SGSN initiates the paging procedure for GPRS services as defined in 3GPP TS 24.008, it shall send one or more PAGING-PS PDUs to the BSS.

When instructed by an MSC/VLR to initiate a paging procedure for non-GPRS services as defined in 3GPP TS 24.008, an SGSN shall send one or more PAGING-CS PDUs to the BSS.

These paging PDUs shall contain the information elements necessary for the BSS to initiate paging for an MS within a group of cells.

The SGSN provides an indication of the cells within which the BSS shall page the MS. The levels of resolution within one BSS are: all cells within the BSS, all cells on the BSS within one location area, all cells on the BSS within one routing area, and one BVCI (i.e. cell). A routing area, a location area, or a BSS area is associated with one or more NSEIs. If the cells in which to page the MS are served by several NSEIs then one paging PDU must be sent to each of these NSEIs.

A paging PDU shall be used to generate the corresponding radio interface paging request message(s) to be transmitted at the appropriate time.

It should be noted that each paging PDU relates to only one MS and therefore a BSS may pack pages for different MSs into the relevant 3GPP TS 24.008 or 3GPP TS 44.060 radio interface paging request messages.

In the case of paging for non-GPRS services, the SGSN shall provide the MS's IMSI and DRX Parameters. The SGSN shall also include the Global CN-Id information element in the paging PDU when this information element is received from the MSC/VLR. The Global CN-Id information element is received from the MSC/VLR if paging using only the IMSI parameter as identifier of the MS is performed via the SGSN when the MSC/VLR applies intra domain connection of RAN nodes to multiple CN nodes as described in 3GPP TS 23.236. The BSS shall then buffer this information element until receiving the paging response from the MS in order to route the paging response to the correct MSC/VLR.

In the case of paging for GPRS services, the SGSN shall provide the MS's IMSI. If DRX Parameters are available, the SGSN shall also provide the DRX Parameters.

NOTE: The IMSI and the DRX Parameters enable the BSS to derive the paging population number. Paging without DRX parameters may require a considerable extension of the paging duration.

An SGSN may provide the BSSGP with MS specific information, enabling a BSS to execute the paging procedure in an MS specific manner. This includes:

- QoS Profile. The Precedence parameter is set by the upper layers [in the SGSN]. The SGSN shall set the bit rate parameter to "best effort". The SGSN shall set the transmission mode to unacknowledged. The BSS shall ignore the received bit rate, the BSSGP SDU type, LLC type, and transmission mode parameters;
- PFI or an aggregate BSS QoS profile information which indicates if the page is for signalling, for SMS, for TOM8, for best-effort, or for a specific packet flow. The aggregate BSS QoS profile in this case is used for paging only and is not stored by the BSS. If both of the optional PFI and ABQP IEs are present, the ABQP takes precedence.

If an SGSN provides a P-TMSI in a PAGING-PS PDU, then the BSS shall use the P-TMSI to address the MS. If the SGSN does not provide the P-TMSI in the PAGING-PS PDU, then the BSS shall use the IMSI to address the MS.

If an SGSN provides a TLLI in a PAGING-CS PDU and a radio context identified by the TLLI exists within the BSS, then the paging request message shall be directly sent to the MS. If the SGSN does not provide the TLLI in the PAGING-CS PDU or if no radio context identified by the TLLI exists within the BSS, then the BSS shall use the TMSI, if provided in the PAGING-CS PDU, else the IMSI, to address the MS.

The PAGING-CS PDU consists of the parameters described above for a PAGING-PS PDU (except the P-TMSI, PFI, ABQP and QoS profile parameters) and, optionally, some or all of the following parameters; TMSI, TLLI, Global CN-Id, Channel Needed and eMLPP-Priority information shall be handled transparently by the BSS.

7.2 Radio Access Capability Update procedure

The BSS may request an MS's current Radio Access capability and/or its IMSI by sending to an SGSN a RA-CAPABILITY-UPDATE PDU which includes the TLLI of the MS and a Tag. The allocation of the Tag is implementation specific. The BSS then starts timer T5.

The SGSN shall respond by sending a RA-CAPABILITY-UPDATE-ACK PDU which includes the TLLI of the MS, the Tag received in the corresponding RA-CAPABILITY-UPDATE PDU, and an RA-Cap-UPD-Cause field; the IMSI of the MS is also included when known. The BSS shall stop timer T5.

If the RA-Cap-UPD-Cause is set to "OK", then an MS Radio Access Capability field and the IMSI shall be present. The received MS's radio access capability, if valid, shall then replace any radio access capability previously associated with the MS. If the RA-Cap-UPD-Cause is not set to "OK", then neither the MS Radio Access Capability nor the IMSI shall be present in the RA-CAPABILITY-UPDATE-ACK PDU.

7.2.1 Abnormal conditions

If an SGSN receives a RA-CAPABILITY-UPDATE PDU which includes an unknown TLLI, it shall answer with a RA-CAPABILITY-UPDATE-ACK PDU which includes the RA-CAP-UPD-Cause set to the value "TLLI unknown".

If an SGSN receives a RA-CAPABILITY-UPDATE PDU which includes a known TLLI, but there are no Radio Access parameters or IMSI known to the SGSN for the associated MS, the SGSN shall reply to the request with a RA-CAPABILITY-UPDATE-ACK PDU in which the RA-CAP-UPD-Cause is set to: "no RA capability or IMSI available".

If a BSS receives a RA-CAPABILITY-UPDATE-ACK PDU containing a Tag which is different from the last transmitted Tag by the BSS, it shall ignore the reception of this PDU.

If a BSS sends a RA-CAPABILITY-UPDATE PDU to an SGSN and the RA-CAPABILITY-UPDATE-ACK is not returned within a period T5 with the same Tag value as provided in the request, the RA-CAPABILITY-UPDATE procedure shall be repeated a maximum of RA-CAPABILITY-UPDATE-RETRIES attempts. The Tag value shall be changed by the BSS at each new retry.

7.3 Radio Status procedure

A BSS and an MS radio interface communication may not be successfully completed as requested because:

- 1) the MS goes out of coverage and is lost;
 - This condition is signalled by setting the Radio Cause value to "Radio contact lost with MS".
- 2) the link quality is too bad to continue the communication;
 - This condition is signalled by setting the Radio Cause value to "Radio link quality insufficient to continue communication".
- 3) the BSS has ordered the MS to perform a cell-reselection.

This condition is signalled by setting the Radio Cause value to "cell-reselection ordered".

Conditions 1) and 2) indicate that attempts to communicate between an MS and an SGSN via this cell should be suspended or abandoned. An SGSN shall stop sending LLC-PDUs to the cell for the MS. The criteria for deciding whether condition 1) or 2) has occurred is not in the scope of the present document.

The conditions for resuming a suspended or abandoned communication between an MS and SGSN are defined in 3GPP TS 24.008.

Condition 3) indicates that the SGSN should wait for a cell update before resuming the transmission of LLC-PDUs to the BSS.

A BSS shall signal these exception conditions to an SGSN by sending a RADIO-STATUS PDU. It shall contain a reference to the MS, either TLLI or TMSI or IMSI, and an indication of the exception condition, i.e. the Radio Cause value.

NOTE: After receipt of a RADIO-STATUS PDU, the SGSN should try to locate the mobile station in case any downlink LLC PDU needs to be sent to the mobile station, as it can not expect to receive systematically an uplink LLC PDU from the mobile station to resume the downlink transfer. To this avail, the SGSN should send a PAGING-PS PDU towards the mobile station.

7.4 SUSPEND procedure

If the MS signals to the BSS that it wishes its GPRS service to be suspended, the BSS shall send a SUSPEND PDU to the SGSN and start timer T3. Actions within the SGSN while an MS is suspended are not specified, but paging is typically stopped. The SUSPEND PDU contains:

- the TLLI of the MS; and
- the Routeing Area of the MS as received in the Layer 3 Um interface message GPRS Suspension Request (see 3GPP TS 44.018).

For each SUSPEND PDU received by an SGSN, a SUSPEND-ACK PDU shall be returned to the BSS. Upon reception of the SUSPEND-ACK PDU, the BSS shall stop T3. The SUSPEND-ACK PDU contains:

- the TLLI of the MS as received in the SUSPEND PDU;
- the Routeing Area of the MS as received in the SUSPEND PDU; and
- the Suspend Reference Number.

The SGSN generates the Suspend Reference Number in a manner that it enables it to differentiate between different SUSPEND PDUs relating to the same MS.

7.4.1 Abnormal conditions

If a SUSPEND-ACK PDU is not received for a SUSPEND PDU within T3 seconds, then the SUSPEND PDU procedure shall be repeated a maximum of SUSPEND-RETRIES attempts. After SUSPEND-RETRIES attempts the procedure is stopped and the O&M system is informed.

If a SUSPEND-ACK PDU is received for an MS that is already marked as suspended, then the SUSPEND-ACK PDU is ignored.

If a SUSPEND PDU refers to an MS which is unknown in the SGSN, then a SUSPEND-NACK PDU is returned containing a cause value (Cause value: Unknown MS). The BSS shall stop the SUSPEND procedure.

If the Suspend procedure is supported on the Gn interface, in case of an inter-SGSN suspend procedure the MS shall not be treated as unknown in the SGSN when the RA indicated in the SUSPEND PDU is not served by the SGSN.

7.5 RESUME procedure

When the reason why a GPRS-attached MS was suspended disappears, i.e.:

- it leaves dedicated mode, disconnecting the MS from the MSC; or
- it is handed over to a cell that supports DTM;

the BSS shall either a) instruct the MS to initiate the Routeing Area Update procedure, or b) signal to the SGSN that an MS's GPRS service shall be resumed.

If the BSS executes a), then no further action is required.

If the BSS executes b), then the BSS shall send a RESUME PDU containing the same Suspend Reference Number received in the SUSPEND-ACK PDU to the SGSN and start timer T4. The RESUME PDU contains:

- the TLLI of the MS;
- the Routeing Area of the MS; and

- the Suspend Reference Number.

For each RESUME PDU received by an SGSN, a RESUME-ACK PDU shall be returned to the BSS. Upon reception of the RESUME-ACK PDU, the BSS shall stop T4. The RESUME-ACK PDU contains:

- the TLLI of the MS; and
- the Routeing Area of the MS.

7.5.1 Abnormal conditions

If a RESUME-ACK PDU is not received for a RESUME PDU within T4 seconds, then the RESUME PDU procedure shall be repeated a maximum of RESUME-RETRIES attempts. After RESUME-RETRIES attempts the procedure is stopped, the O&M system is informed and the MS shall be instructed to initiate the Routeing Area Update procedure.

If a RESUME-ACK PDU is received for an MS that is not suspended, then the RESUME-ACK PDU is ignored.

If a RESUME PDU refers to an MS which is unknown in the SGSN, then a RESUME-NACK PDU is returned containing a cause value (Cause value: Unknown MS). The BSS shall stop the RESUME procedure and the MS shall be instructed to initiate the Routeing Area Update procedure.

8 Signalling procedures between NM SAPs

8.1 FLUSH-LL (logical link) procedure

When an SGSN detects a cell change of an MS from a cell update or a routing area update, the SGSN shall send a FLUSH-LL PDU to the old BVC to initiate the following procedures:

- at a cell change within one NSE (e.g. the BSS is a NSE) and within one routing area, LLC-PDU(s) for a given TLLI stored at an "old" BVCI (corresponding to the old cell) are either deleted or transferred to a "new" BVCI (corresponding to the new cell) with which the TLLI is currently associated; or
- at a cell change between two NSEs within one routing area, LLC PDU(s) for a given TLLI stored at an "old" BVCI (corresponding to the old cell) are either deleted or transferred to a "new" BVCI (corresponding to the new cell) with which the TLLI is currently associated. In that case, transferring of LLC PDU(s) can only be requested by the SGSN if the NSE underlying the "old" BVCI indicated support for the "Inter-NSE re-routing";
- at a cell change within the same routing area, and within one NSE or between two NSEs, the on-going location procedure, if any, is either maintained in the BSS after the cell reselection or aborted by the BSS towards the SMLC: or
- at a cell change between two routing areas, LLC-PDU(s) stored at the "old" BVCI for the TLLI are deleted.

The SGSN provides the BSSGP with:

- a MS's TLLI identifying the MS;
- the "old" BVCI identifying the cell in which to find buffered LLC-PDU(s) for the MS;
- the "new" BVCI identifying the cell to which the MS is currently associated (only when within the same routing area); and
- if the SGSN supports "Inter-NSE re-routing" or "LCS Procedures" and the old NSE supports the "Inter-NSE re-routing" or "LCS Procedures", the "new" NSEI identifying the cell to which the MS is currently associated (only when within the same routing area but between two NSEs). The NSEI associated to the "old" BVCI shall be assumed if the "new NSEI" field is not provided.

If there is a BSS Context for the MS in the "old" BVCI and there is a "new" BVCI in the FLUSH-LL PDU, the BSS shall interpret this as a request to transfer the BSS Context to the new cell. The BSS shall assume that the ABQP that was negotiated for each PFC in the "old" BVCI is requested in the "new" BVCI by the SGSN. Also, the values of the Packet Flow Timer and the Service UTRAN CCO Information Elements should be kept for each transferred PFC.

If a "new" BVCI is not provided, then the FLUSH-LL PDU shall be interpreted as an instruction to delete the queued LLC-PDU(s) at the old BVC, and also to delete the BSS Context associated to the MS identified by the TLLI, if any exists in the "old" BVCI.

Queued BSSGP signalling, e.g. pages, shall not be affected by this procedure.

In response to a FLUSH-LL PDU the BSS shall send a FLUSH-LL-ACK PDU to the SGSN containing:

- the TLLI received in the FLUSH-LL PDU;
- an indication of whether the LLC-PDU(s) were "transferred" or "deleted". In case the SDUs were "transferred" the BVCI (new) IE, and the NSEI (new) IE if present in the FLUSH-LL PDU, shall be included;
- the number of octets that have been transferred or deleted.

On receipt of a FLUSH-LL-ACK PDU by the SGSN, indicating that the LLC-PDU(s) associated with the old BVC have been "deleted", the SGSN may choose to:

- immediately retransmit all unacknowledged LLC-PDU(s) (in acknowledged LLC operation) to the MS at the new BVC (i.e. new cell); or
- rely on LLC retransmission mechanism to transmit unacknowledged LLC-PDU(s).

On receipt of a FLUSH-LL-ACK PDU by the SGSN, indicating that the LLC-PDU(s) associated with the old BVC have been "transferred", the SGSN shall not take any of the above actions.

If the "new" BVCI could not accept the QoS characteristics of all PFCs of the BSS Context, the BSS Context shall still be transferred and the BSS shall then initiate in the "new" BVCI a Modify BSS PFC procedure for each PFC for which the requested ABQP could not be accepted. The BSS may resume the transfer of downlink LLC PDU(s) before the Modify BSS PFC procedure is completed.

In order to avoid desequencing DL LLC PDU (in LLC acknowledged or unacknowledged operation) during the FLUSH procedure, upon sending a FLUSH-LL PDU to the BSS requesting the rerouting of DL LLC PDUs to a new cell, the SGSN should wait for the receipt of the FLUSH-LL-ACK PDU or rely on an internal guard timer, before starting to transmit subsequent DL LLC PDUs on the new BVCI. In the case the SGSN does not request the BSS to reroute DL LLC PDUs to a new cell, it may immediately resume the transmission of subsequent DL LLC PDUs on the new BVCI, or start the Create BSS PFC procedure, without waiting for the receipt of the FLUSH-LL-ACK PDU.

8.1.1 Abnormal Conditions

If the BSS receives a FLUSH-LL PDU for an unknown BVCI or TLLI not associated with the given BVCI, then the FLUSH-LL PDU is discarded and no FLUSH-LL-ACK PDU is returned.

If the SGSN does not receive a FLUSH-LL-ACK PDU in response to a FLUSH-LL PDU, no further action is taken.

8.2 Flow Control procedure

8.2.1 General model of operation

From the perspective of the BSSGP, the flow control mechanism is based on the following model:

- there is a downlink buffer for each BVC, as identified by a BVCI, in a BSS;
- the transfer of BSSGP UNITDATA PDUs for an MS from the SGSN is controlled by the BSS; and
- only downlink BSSGP UNITDATA PDU transfer to the BSS is managed via flow control procedures. Uplink flow control is not performed.

8.2.2 Mode of operation

The flow control mechanism manages the transfer of BSSGP UNITDATA PDUs sent by the SGSN on the Gb interface to the BSS.

The BSS shall control the flow of BSSGP UNITDATA PDUs to its BVC buffers by indicating to the SGSN the maximum allowed throughput in total for each BVC. The BSS shall control the flow of BSSGP UNITDATA PDUs to the BVC buffer for an individual MS by indicating to the SGSN the maximum allowed throughput for a certain TLLI. If the PFC Flow Control feature is negotiated, the BSS may control the flow of BSSGP UNITDATA PDUs to the BVC buffer for a certain PFC of an individual MS by indicating to the SGSN the maximum allowed throughput for a certain PFI.

The BSS uses flow control to adjust the flow of BSSGP UNITDATA PDUs to a BVC buffer. The amount of buffered BSSGP UNITDATA PDUs in the BSS should be optimised to efficiently use the available radio resource. The volume of buffered BSSGP UNITDATA PDUs for a BVC or MS or PFC should be low. BSSGP UNITDATA PDUs queued within the BSS that are not transferred across the radio interface before the PDU Lifetime expires shall be locally deleted from the BSS. The local deletion of BSSGP UNITDATA PDUs in the BSS shall be signalled to the SGSN by the transmission of a LLC-DISCARDED PDU.

For each FLOW-CONTROL PDU received by an SGSN, a confirmation shall always be sent across the Gb interface by the SGSN. The confirmation uses the Tag that was received in the FLOW-CONTROL PDU, which was set by the BSS to associate the response with the request. When receiving no confirmation to a FLOW-CONTROL PDU, the reasons that gave rise to the triggering of a flow control message may trigger another message, or, if the condition disappears, it may not. For the repetition of non-confirmed FLOW CONTROL PDUs, the maximum repetition rate still applies in the BSS.

8.2.3 Flow Control of Traffic from an SGSN to BSS

8.2.3.1 Control of the downlink throughput by the SGSN

The principle of the BSSGP flow control procedures is that the BSS sends to the SGSN flow control parameters which allow the SGSN to locally control its transmission output in the SGSN to BSS direction. The SGSN shall perform flow control on each BVC, on each MS and optionally on each PFC for an MS. The flow control is performed on each LLC-PDU first by the PFC flow control mechanism if applicable and if negotiated, then by the MS flow control mechanism and then by the BVC flow control mechanism.

If the PFC Flow Control feature has been negotiated and the LLC-PDU corresponds to a PFC for which the SGSN has received some flow control parameters, then the SGSN has to check that the LLC-PDU is passed by the individual PFC flow control. If it is passed or if the PFC flow control has not been negotiated, or if it has been negotiated but no flow control parameter has been received for the PFC corresponding to the LLC-PDU, the SGSN applies the MS flow control. If passed, the SGSN finally applies the BVC flow control to the LLC-PDU. If an LLC-PDU is passed by all flow control mechanisms, the entire LLC-PDU is delivered to the Network Services for transmission to the BSS (see figure 8.1).

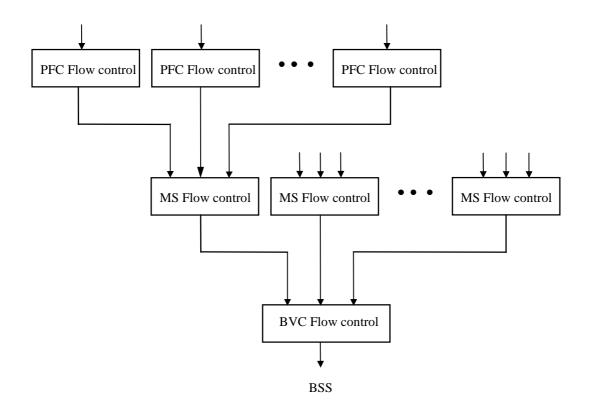


Figure 8.1: BSSGP Flow control

The flow control parameters sent by the BSS to the SGSN consist of the following information:

- the bucket size (Bmax) for a given BVC or MS or PFC in the downlink direction; and
- the bucket leak rate (R) for a given BVC or MS or PFC in the downlink direction; and
- the bucket full ratio for a given BVC or MS or PFC in the downlink direction, if the Current Bucket Level (CBL) feature is negotiated.

NOTE: The information for a given PFC is only received if the PFC flow control feature is negotiated.

The SGSN shall perform flow control on an individual MS using SGSN determined values of Bmax and R unless it receives a FLOW-CONTROL-MS message from the BSS regarding that MS. The SGSN shall continue to perform flow control for a particular MS using the Bmax and R values received from the BSS for at least Th seconds after receiving a FLOW-CONTROL-MS message from the BSS regarding that MS. When timer Th has expired or when the MS changes cells, the SGSN may reinitialise the SGSN internal flow control variables for that MS and begin to use SGSN generated values for Bmax and R.

The SGSN shall start performing flow control on a given PFC for an individual MS as soon as it receives the first FLOW-CONTROL-PFC message for that PFC and the feature has been negotiated; it shall stop applying PFC flow control for a given PFC of an individual MS as soon as it receives subsequently a FLOW-CONTROL-MS message for that MS or if more than Tf seconds have elapsed since the last FLOW-CONTROL-PFC message was received for that PFC. When the MS changes cells, the SGSN shall stop performing flow control per PFC, until it receives a FLOW-CONTROL-PFC message.

In case the MS flow control parameters needs to be updated and the PFC flow control feature is negotiated and the PFC flow control parameters for that MS remains unchanged then the FLOW-CONTROL-PFC PDU is used by the BSS to update the MS flow control parameters. The 'Number of PFCs' IE within the 'PFC Flow Control parameters' IE shall be set to '0' in this case.

The BSSGP flow control model is the algorithm shown in Figure 8.2. The model of the algorithm is that an LLC-PDU is passed by the algorithm as long as the bucket counter (B) plus the length of the LLC-PDU does not exceed the bucket size Bmax. When the LLC-PDU is passed, the LLC-PDU length is added to B. Any PDU not transmitted is delayed until B plus the LLC-PDU length is less than Bmax.

8.2.3.2 Flow Control Conformance Definition

A BSSGP flow control algorithm shall be implemented in the SGSN. The BSSGP flow control conformance algorithm is defined in figure 8.2.

The conformance definition is used to decide which LLC-PDUs are conforming to the flow to the PFC of an MS, to an MS or in a BSSGP virtual connection (BVC) over the Gb interface. The conformance definition should not be interpreted as the required implementation algorithm, as the SGSN manufacturer may use any algorithm as long as the operation of the BSSGP flow control does not violate the objectives of compliant BVCs or MSs or PFC. That is, the SGSN shall never transmit more data than can be accommodated within the BSS buffer for a BVC or individual MS or for a given PFC of an MS.

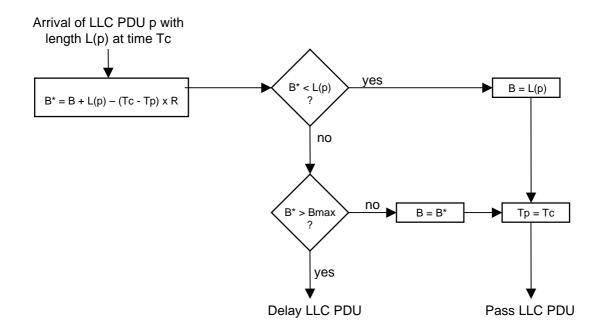


Figure 8.2: Conformance Definition Algorithm for BSSGP Flow Control

The variables used by the algorithm are:

- Bmax Bucket Size. Set by the BSS for each cell and each mobile station and optionally for each PFC of an MS. Bmax shall be large enough to accommodate at least one LLC-PDU;
- R leak rate of the bucket;
- B bucket counter:
- B* predicted value of the bucket counter;
- L(p) length of LLC-PDU p;
- Tp the time that the last LLC-PDU p was transferred; and
- Tc arrival time of LLC-PDU p.

The initial conditions of these variables in the SGSN are:

- Bmax = 0 for BVCs or MSs. For BVCs, this value is valid until Bmax is received in the FLOW-CONTROL-BVC. For MSs, this value is valid until Bmax_default_ MS is received in the FLOW-CONTROL-BVC message. Thereafter, sub-clause 8.2.3.6, shall apply;
- Bmax = 0 for PFCs until a FLOW-CONTROL-BVC message is received for the cell in which the PFC is running. Thereafter, Bmax for a PFC shall not be greater than Bmax of the corresponding MS until PFC flow control applies for the PFC. As long as PFC flow control applies, Bmax shall then not be greater than the value of Bmax provided in the latest valid FLOW-CONTROL-PFC message;
- R = 0 for BVC or MSs. For a BVC, this value is valid until a FLOW-CONTROL-BVC message is received. For an MS, this value is valid until a FLOW-CONTROL-BVC message is received. Thereafter, sub-clause 8.2.3.6 shall apply;
- R = 0 for PFCs until a FLOW-CONTROL-BVC message is received for the cell in which the PFC is running. Thereafter, R for a PFC shall not be greater than R of the corresponding MS until PFC flow control applies for the PFC. As long as PFC flow control applies, R shall then not be greater than the value of R provided in the latest valid FLOW-CONTROL-PFC message;
- B = 0 (the bucket is empty); and Tp = the current time for the first LLC-PDU.

The SGSN shall not transmit a LLC-PDU on a BVC until a FLOW-CONTROL-BVC message is received from the BSS for that BVC.

When a LLC-PDU p arrives at current time Tc, the variable B^* is set to the predicted bucket size if the LLC-PDU were to be transferred to the BSS. This is given by the previous bucket size plus the new LLC-PDU size, $B^* = B + L(p)$, less the amount that the bucket will have leaked away since the last compliant LLC-PDU, R x (Tc - Tp). If this is less than L(p) then the LLC-PDU is compliant and the bucket size B is reset to L(p) and the LLC-PDU is passed. When a compliant LLC-PDU is passed the last LLC-PDU transfer time is set to the current time, Tp = Tc.

If the bucket has not completely leaked away then the bucket has to be checked to see if the limit Bmax is going to be exceeded, $B^* > B$ max. If the limit is exceeded then the LLC-PDU is non compliant and is delayed for some time period, and no updates are done on the variables. If the bucket limit Bmax is not exceeded then the LLC-PDU is compliant and the bucket counter (B) is set equal to the value of B^* . When a conforming LLC-PDU is passed then the last LLC-PDU transfer time is set to the current time, Tp = Tc.

On receipt of a FLUSH-LL-ACK PDU by the SGSN, indicating that the LLC-PDU(s) associated with the old BVC have been "deleted", the SGSN should update the value of the bucket counter (B) for the MS and for the old BVC, B = max (B - N, 0). N is provided by FLUSH-LL-ACK PDU, indicating the number of octets deleted by the BSS.

On receipt of a FLUSH-LL-ACK PDU by the SGSN, indicating that the LLC-PDU(s) associated with the old BVC have been "transferred" within the NSE, the SGSN should update the value of the bucket counter (B) for the old BVC, B = max (B - N, 0). The value of B for the new BVC should also be updated, B = min (B + N, Bmax). N is provided by FLUSH-LL-ACK PDU, indicating the number of octets transferred by the BSS.

On receipt of a LLC-DISCARDED PDU by the SGSN, indicating that the LLC-PDU(s) associated with the MS or the PFC of an MS have been locally deleted by the BSS, the SGSN should update the value of the bucket counter (B) for the MS or the PFC and for the BVC, B = max (B - N, 0). N is provided by LLC-DISCARDED PDU, indicating the number of octets deleted by the BSS.

The BSS may update the values of Bmax and R within the SGSN at any time by transmitting a new Flow Control PDU containing the new Bmax and R values. The variables B, B*, Tp and Tc are local to the SGSN and are not affected by the reception of a Flow-Control-BVC or Flow Control-MS PDU.

If the Current Bucket Level (CBL) feature is negotiated, the SGSN shall update the variable B based upon the Bucket_Full_Ratio information element received in the Flow Control PDU. During the time period when SGSN does not receive a Flow Control PDU, it shall continue computing the bucket counter (B) as defined above.

8.2.3.3 Response time within the SGSN to flow control messages

Upon reception of flow control requests from a BSS, the SGSN shall modify its downlink transmission as instructed within 100 ms.

8.2.3.4 Frequency of sending BVC or MS or PFC Flow Control PDUs

The rate at which the BSS is allowed to send flow control messages for a given BVC or MS or PFC is limited and defined by the following rule: the BSS may send a new Flow Control PDU every C seconds, where C is a value which is pre-defined and common to the BSS and SGSN.

If the BSS detects a missing FLOW-CONTROL-ACK from the SGSN and the condition which causes the sending of a FLOW-CONTROL PDU still remains, the FLOW-CONTROL PDU may be retransmitted immediately. In this case the BSS may violate the repetition rate defined by the C value.

After a BVC reset procedure, the BSS may send a BVC-BLOCK PDU. Otherwise, the BSS shall send a BVC-FLOW-CONTROL PDU. When the blocked BVC is unblocked, a BVC-FLOW-CONTROL PDU shall be sent.

8.2.3.5 FLOW-CONTROL PDUs

Based on the criteria for flow control, a BSS shall send to an SGSN a FLOW-CONTROL PDU containing a list of IEs.

For BVC Flow Control, the following information is sent:

- the maximum bucket size (Bmax) for the BVC on the Gb Interface;
- the leak rate parameter (R) to be applied to the bucket;
- the bucket full ratio to resynchronize the bucket counter for the BVC, if the Current Bucket Level (CBL) feature is negotiated;
- the default MS bucket size (Bmax_default_MS);
- the default MS leak rate (R_default_MS); and
- the optional measurement of the delay for PDU delivery inside that BVC.

For MS Flow Control, the following information is sent:

- the TLLI identifying the MS;
- the maximum bucket size (Bmax) for this MS on the Gb interface;
- the leak rate parameter (R) to be applied to the bucket; and
- the bucket full ratio to resynchronize the bucket counter for the MS, if the Current Bucket Level (CBL) feature is negotiated.

For PFC Flow Control, the following information is sent:

- the TLLI identifying the MS;
- the maximum bucket size (Bmax) for this MS on the Gb interface (optional);
- the leak rate parameter (R) to be applied to the bucket (optional);
- the bucket full ratio to resynchronize the bucket counter for the MS, if the Current Bucket Level (CBL) feature is negotiated (optional);
- the number of PFCs for which flow control parameters are included;
- for each PFC:
 - the PFI identifying the PFC for that MS;
 - the maximum bucket size (Bmax) for this PFC on the Gb interface;
 - the leak rate parameter (R) to be applied to the bucket;
 - the bucket full ratio to resynchronize the bucket counter for the PFC, if the Current Bucket Level (CBL) feature is negotiated.

NOTE: The supply of the MS flow control parameters inside the FLOW-CONTROL-PFC message allows the SGSN utilising the most up-to-date parameters both for PFC and MS flow control. Also, because the receipt of a FLOW-CONTROL-MS message notifies the end of PFC flow control for a given MS, if the MS flow control parameters have changed since the last update, then it is necessary to provide the MS flow control parameters inside the FLOW-CONTROL-PFC message.

8.2.3.6 Condition of Bmax for MS after Initial Flow-Control-BVC

The SGSN may use the following (informative) equation to generate an initial bucket size, Bmax, for an MS.

Bmax (bits) = min (R_default_MS for 1 s, 72 000, max MS throughput for 1 s, (max MS throughput for 1 s + current throughput of all other MSs in the cell for 1 s) / number of MSs in the cell)

where, the number of MSs in the cell includes the MS being added.

Under no circumstance shall the SGSN use a value of Bmax greater than Bmax_default_MS for an MS unless it receives a Flow-Control-MS message from the BSS for that MS.

The SGSN shall not use a leak rate (R) for an MS greater than R_default_MS unless it receives a Flow-Control-MS message from the BSS for that MS.

8.2.4 Flow Control of Uplink Traffic from a BSS to an SGSN

No flow control procedures are defined between the BSS and the SGSN in uplink direction.

8.3 BVC blocking and unblocking procedure

8.3.1 PTP BVC

The following statement applies only for PTP BVC.

The BVC blocking and unblocking procedures are initiated by the BSS to remove from use, or bring in to use, a BVC.

A BSS may block one BVC because of:

- operation and Maintenance intervention for a cell;
- equipment failure at the BSS;
- cell equipment failure at the BSS; or

- other causes not regarded in phase 1 of the implementation of GPRS (Cause Value: "reserved for future use").

When a BSS wishes to block a BVC, the BSS shall mark that BVC as blocked, thereafter discarding any traffic sent to the BVC in the uplink direction. The cell associated with the BVC should not accept data in the downlink direction. The BSS shall send a BVC-BLOCK PDU to the SGSN and start timer T1. The BVC-BLOCK PDU contains:

- the BVCI of the BVC to be blocked; and
- a Cause element indicating the reason for blocking (typical cause values: O&M intervention, Equipment failure).

On receipt of a BVC-BLOCK PDU, the SGSN shall mark the indicated BVC as blocked and stop transmitting traffic addressed to this BVC. The SGSN shall then acknowledge the blocking of the BVC by sending a BVC-BLOCK-ACK PDU to the BSS.

The BVC-BLOCK-ACK PDU contains the BVCI received in the BVC-BLOCK PDU.

On receipt of the BVC-BLOCK-ACK PDU the BSS shall stop timer T1.

The BVC shall be seen as blocked by an SGSN until a BVC-UNBLOCK PDU is received indicating that the BVC's status has changed.

During the BVC blocking procedure, traffic in transit to or from a cell is in an indetermined state and may be lost. When unblocking a BVC both the BSS and SGSN shall be in an operational state, i.e. the underlying network service and the BVC shall be available for use.

If a BSS wishes to unblock a blocked BVC it shall send a BVC-UNBLOCK PDU, and start timer T1.

The BVC-UNBLOCK PDU contains:

the BVCI of the BVC to be unblocked.

If a BVC-UNBLOCK PDU is received by an SGSN for a blocked BVC, the BVC shall be marked as unblocked and a BVC-UNBLOCK-ACK PDU shall be returned to the BSS, containing the BVCI received in the BVC-UNBLOCK PDU.

The BSS shall stop timer T1 on receipt of the BVC-UNBLOCK-ACK PDU and mark the BVC as unblocked.

8.3.2 Signalling BVC

The blocking and unblocking procedure is not applicable for the signalling BVC. The signalling BVC shall never be blocked.

8.3.3 Abnormal Conditions

The following statements apply only for a signalling BVC.

If a BVC-BLOCK PDU is received by an SGSN for the signalling BVC, the PDU is ignored.

If a BVC-BLOCK-ACK PDU is received by a BSS for the signalling BVC, the PDU is ignored.

If BVC-UNBLOCK PDU is received by an SGSN for the signalling BVC, the PDU is ignored.

If BVC-UNBLOCK-ACK PDU is received by an BSS for the signalling BVC, the PDU is ignored.

The following statements apply only for PTP BVC.

If a BVC-BLOCK-ACK PDU is not received for a BVC-BLOCK PDU within T1 seconds, then the BVC-BLOCK PDU procedure shall be repeated a maximum of BVC-BLOCK-RETRIES attempts. After BVC-BLOCK-RETRIES attempts the BVC remains blocked, the procedure is stopped and the O&M system is informed.

If a BVC-UNBLOCK-ACK PDU is not received for a BVC-UNBLOCK PDU within T1 seconds, then the BVC-UNBLOCK PDU procedure shall be repeated a maximum of BVC-UNBLOCK-RETRIES attempts. After BVC-UNBLOCK-RETRIES attempts the status of the BVC remains blocked, the procedure is stopped and the O&M system is informed.

If traffic is received on a BVC that is marked at a BSS or at an SGSN as blocked, and no BVC-Unblocking procedure is pending, the received PDU shall not be accepted and a STATUS PDU (Cause value: BVC blocked) shall be sent to the peer entity on the signalling BVC. The STATUS PDU shall indicate the BVCI of the BVC upon which the error was detected.

If a BVC-BLOCK PDU is received by an SGSN for a blocked BVC, a BVC-BLOCK-ACK PDU shall be returned.

If a BVC-UNBLOCK PDU is received by an SGSN for an unblocked BVC, a BVC-UNBLOCK-ACK PDU shall be returned.

If an unexpected BVC-BLOCK-ACK PDU is received by a BSS, and it is related to a BVC that is locally blocked, the BVC-BLOCK-ACK PDU is discarded. If the BVC-BLOCK-ACK PDU is related to a BVC that is not locally blocked, then a BVC unblock procedure shall be performed.

If an unexpected BVC-UNBLOCK-ACK PDU is received by a BSS and it is related to a BVC that is locally not blocked, the BVC-UNBLOCK-ACK PDU is discarded. If the BVC-UNBLOCK-ACK PDU is related to a BVC that is locally blocked, then a BVC block procedure shall be performed.

8.4 BVC-RESET procedure

The purpose of the BVC-RESET procedure is to synchronise the initialisation of GPRS BVC related contexts at a BSS and SGSN. This enables the BSS and SGSN to begin communication in known states. A BVC-RESET procedure is performed because of recovery procedures related to:

- a system failure in the SGSN or BSS that affects GPRS BVC functionality (e.g. processor recovery);
- an underlying network service system failure; or
- a change in the transmission capability of the underlying network service, where the "change" is from zero kbps to greater-than-zero kbps;
- a change in mapping between the BVCI and cell identifier.

The BSS may also send BVC-RESET as a means to create the initial mapping between BVCIs and cell identifications.

After any of the possible events stated above, the status of the affected BVCs may be inconsistent at the SGSN and the BSS. After performing the BVC Reset procedure all affected BVCs are assumed to be unblocked at the SGSN. The reset procedure forces a consistent state upon SGSN and BSS by requiring that after the completion of the BVC-Reset procedure the BSS initiates the block procedure for all affected BVCs that are marked as blocked at the BSS.

Before a BSS (or SGSN) sends a BVC-RESET PDU, the operational status of the associated network service shall be obtained by the BSS (or SGSN).

If the associated network service is operational, the BSS (or SGSN) shall send a BVC-RESET PDU to its peer entity and start timer T2. The BSS (or SGSN) may receive BVC related signalling and UNITDATA PDUs before the procedure is acknowledged, but shall not transmit PDUs.

If the associated network service is not operational, the BVC-RESET procedure is postponed until internal periodic status checks indicate that it is operational.

The BVC-RESET PDU contains:

- the BVCI of the reset BVC;
- a cause element indicating the reason for reset;
- the cell identifier, when the reset is for a PTP BVC and BSS is initiator of the reset;
- feature bitmap, when the reset is for a signalling BVC.

After the SGSN (or BSS) has initialised all affected GPRS related contexts, a BVC-RESET-ACK PDU is returned.

The BVC-RESET-ACK PDU contains:

- the BVCI of the reset BVC;
- the cell identifier, when the reset is for a PTP BVC and SGSN is initiator of the reset.

Upon reception by a BSS (or SGSN) of the BVC-RESET-ACK PDU the timer T2 is stopped.

8.4.1 Signalling BVC

After any failure affecting the NSE, the party (BSS or SGSN) where the failure resided shall reset the signalling BVC. After sending or receiving a BVC-RESET PDU for the signalling BVC, the BSS shall stop all traffic and initiate the BVC-RESET procedure for all BVCs corresponding to PTP functional entities of the underlying network service entity. The BSS must complete the BVC-RESET procedure for signalling BVC before starting PTP BVC-RESET procedures.

The Feature bitmap is sent to identify the optional features that can be supported by the network service entity. After completion of the signalling BVC-RESET procedure both entities shall locally determine the common set of optional features supported by both NSEs. This is done by performing the bit AND operation of the received Feature bitmap with its own Feature bitmap.

If the Feature bitmap IE is missing in a signalling BVC-RESET or BVC-RESET-ACK PDU or if the result of the AND operation is '0' then no optional features are activated.

After sending or receiving a BVC-RESET PDU for the signalling BVC, the SGSN shall stop all traffic in the PTP BVCs of the corresponding NSE.

8.4.2 PTP BVC

After any failure affecting only part of the BVC functionality not including the signalling BVC the party where the failure resided shall reset only the affected BVCs.

If the BSS was the initiator of the BVC-RESET procedure, the BSS may initiate the blocking procedure upon receipt of a BVC-RESET-ACK PDU. If the SGSN was the initiator of the BVC-RESET procedure while the affected BVC is marked as blocked at the BSS side, the BSS shall initiate the BVC-Blocking procedure after having returned the BVC-RESET-ACK PDU to the SGSN.

Upon reception of a BVC-RESET PDU, the SGSN (or BSS) shall discard UNITDATA PDUs addressed to the reset BVC.

After reset of a PTP BVC, UNITDATA PDUs addressed to the BVC may then be received and transmitted, unless it is blocked.

8.4.3 Abnormal Conditions

The following statements are valid for both signalling and PTP BVC.

If a BSS (or SGSN) sends a BVC-RESET PDU to an SGSN (or BSS) and the BVC-RESET-ACK PDU is not returned within a period T2, the BVC-RESET procedure shall be repeated a maximum of BVC-RESET-RETRIES attempts. After BVC-RESET-RETRIES attempts the procedure is stopped and the O&M system is informed. In case of PTP BVC, the status of all affected BVCs at the BSS (or SGSN) shall be blocked as a consequence.

If the BSS receives a BVC-RESET PDU for a BVCI which is unknown in the BSS, then the BSS shall return a STATUS PDU towards the SGSN including the BVCI and the cause value 'BVCI unknown'.

If the BSS (or SGSN) has sent a BVC-RESET PDU for a BVCI to the SGSN (or BSS) and is awaiting a BVC-RESET-ACK PDU in response, but instead receives a BVC-RESET PDU indicating the same BVCI, then this shall be interpreted as a BVC-RESET ACK PDU and the T2 timer shall be stopped.

The BVC_RESET for signalling BVC overrides all pending procedures for PTP BVC, i.e. other pending procedures are stopped and corresponding running timers are stopped.

If the BSS (or SGSN) receives an unexpected BVC-RESET ACK PDU, this shall be ignored.

If the BSS has sent a BVC-UNBLOCK PDU and receives a BVC-RESET PDU before the BVC-UNBLOCK-ACK PDU has been received from the SGSN, then the BSS shall consider the corresponding BVC marked as unblocked.

8.5 Trace procedure

The purpose of the trace invocation procedure is to inform the receiving entity that it should begin producing a trace record on an MS. The trace is invoked by an SGSN by sending an SGSN-INVOKE-TRACE PDU to the peer entity. The SGSN-INVOKE-TRACE PDU is not acknowledged.

The events and parameters to be recorded are indicated in the "Trace type" information element are defined in 3GPP TS 32.008.

The remaining elements, when received, are to be passed transparently to the OMC receiving the trace record.

The element "OMCId", if present, indicates the OMC to which the record is destined.

The PDU includes a trace reference which is allocated by the entity which triggered the trace.

The element "TriggerId", if present, indicates the entity which triggered the trace.

The Trace Reference and TriggerId IEs are used to tag the trace record to allow simpler construction of the total record by the entity which combines trace records.

8a Signalling procedures between PFM SAPs

8a.1 Create BSS PFC procedure

If the BSS receives a request to transfer an uplink or downlink LLC PDU for which it currently does not have a BSS packet flow context and the PFI does not indicate best-effort or SMS or TOM8 or signalling then the BSS may send a DOWNLOAD-BSS-PFC PDU to the SGSN and start timer T6. In the uplink case the TLLI, optional Radio Priority, and optional Packet Flow ID are received from the MS as defined in 3GPP TS 44.060. Until the BSS receives the BSS PFC the BSS shall handle uplink and downlink transfers according to a best-effort default aggregate BSS QoS profile. For uplink transfers the best-effort default profile is specific to the radio priority level.

If the BSS does not receive a PFI from the MS, e.g. from a R97 or R98 MS, the BSS shall not send a DOWNLOAD-BSS-PFC PDU to the SGSN. In this case the QoS Profile IE is utilized instead.

Following a DOWNLOAD-BSS-PFC PDU if there is not an ongoing Delete PFC procedure for that corresponding PFI, the SGSN shall send a CREATE-BSS-PFC PDU to the BSS with a requested Aggregate BSS QoS Profile and start timer T7. On receipt of CREATE-BSS-PFC PDU the BSS stops timer T6 and responds with a CREATE-BSS-PFC-ACK PDU containing the negotiated Aggregate BSS QoS Profile. The BSS may restrict the requested ABQP given its capabilities and the current load. The SGSN may include the *Service UTRAN CCO* (Cell Change Order) information element in the PDU (relevant if the *network initiated cell change order to UTRAN* procedure is used). If this information element is received in both the CREATE-BSS-PFC PDU and the DL-UNITDATA PDU, the information element received in the DL-UNITDATA PDU shall take precedence. If there is an ongoing Delete PFC procedure the SGSN shall not send a CREATE-BSS-PFC-PDU (see subclause 8a.3).

The SGSN may also initiate the Create BSS PFC procedure. It is not required that the SGSN receive a DOWNLOAD-BSS-PFC PDU before sending a CREATE-BSS-PFC request.

The BSS may return a CREATE-BSS-PFC-NACK with a cause if it is unable to create or modify the PFC. On receipt of the CREATE-BSS-PFC-ACK or CREATE-BSS-PFC-NACK PDU the SGSN shall stop timer T7.

The Packet Flow Timer (PFT) is provided to the BSS by the SGSN. It is defined as the maximum time the BSS may hold the PFC during periods of inactivity for a PFC. The timer is started upon the receipt of a CREATE-BSS-PFC PDU and restarted after the transmission of an uplink PDU for that PFC. The timer is also restarted upon the transfer of the corresponding PFC from an old to a new cell.

If a CREATE-BSS-PFC PDU is received for an MS which has a BSS PFC in the BSS, then this shall be interpreted by the BSS as a request to modify the existing PFC.

8a.1.1 Abnormal conditions

If the SGSN receives a DOWNLOAD-BSS-PFC PDU with an unknown PFI it shall not respond with a CREATE-BSS-PFC PDU.

If a CREATE-BSS-PFC PDU is not received for a DOWNLOAD-BSS-PFC PDU within T6 seconds, then the DOWNLOAD-BSS-PFC PDU shall be repeated a maximum of DOWNLOAD-BSS-PFC-RETRIES attempts. After DOWNLOAD-BSS-PFC-RETRIES + 1 attempts the procedure is stopped and the O&M system is informed. If a BSS PFC is not received then the BSS shall handle uplink and downlink transfers according to a best-effort default aggregate BSS QoS profile.

If a CREATE-BSS-PFC-ACK or CREATE-BSS-PFC-NACK PDU is not received in response to a CREATE-BSS-PFC PDU within T7 seconds, then the CREATE-BSS-PFC PDU shall be repeated a maximum of CREATE-BSS-PFC-RETRIES attempts. After CREATE-BSS-PFC-RETRIES+1 attempts the procedure is stopped and the O&M is informed.

If the BSS is unable to create the PFC then a CREATE-BSS-PFC-NACK PDU is returned with a cause value (e.g. Cause value: PFC create failure). The SGSN shall stop the Create BSS PFC procedure.

8a.2 Modify BSS PFC procedure

The BSS may request modification of the contents of an existing BSS PFC at any time via the MODIFY-BSS-PFC PDU, e.g. due to a change in resource availability at the BSS. The BSS sends the MODIFY-BSS-PFC PDU and start timer T8. The SGSN inserts the modified parameters in the MODIFY-BSS-PFC PDU into the relevant PDP contexts. The SGSN shall respond to a modify request with a MODIFY-BSS-PFC-ACK PDU except when there is an ongoing Delete BSS PFC procedure for that PFI (see subclause 8a.3). The Packet Flow Timer (PFT) may be provided to the BSS by the SGSN. This timer is (started or) restarted upon the receipt of the MODIFY-BSS-PFC-ACK PDU and restarted after the transmission of an uplink PDU for that PFC. On receipt of a response to the Modify procedure the BSS shall stop timer T8.

The SGSN can reject the profile proposed by the BSS by answering with a MODIFY-BSS-PFC-ACK PDU containing the previous ABQP. The SGSN may request the modification of the contents of a BSS PFC at any time via the CREATE-BSS-PFC PDU, e.g. due to the activation, modification, or deactivation of a PDP context. It shall not use the MODIFY-BSS-PFC PDU. If the BSS PFC already exists the BSS shall interpret the message as a modification request and the BSS shall reply with a CREATE-BSS-PFC-ACK. The BSS may restrict the requested ABQP given its capabilities and the current load.

8a.2.1 Abnormal conditions

If a MODIFY-BSS-PFC-ACK is not received in response to a MODIFY-BSS-PFC PDU within T8 seconds, then the MODIFY-BSS-PFC PDU shall be repeated a maximum of MODIFY-BSS-PFC-RETRIES attempts. After MODIFY-BSS-PFC-RETRIES+1 attempts the procedure is stopped and the O&M is informed.

8a.3 Delete BSS PFC procedure

The SGSN may request the deletion of a BSS PFC at any time using the DELETE-BSS-PFC PDU. The BSS shall respond with a DELETE-BSS-PFC-ACK PDU. The BSS may at any time delete a BSS packet flow context without notifying the SGSN, except in the case of PFCs associated to real-time traffic flows (e.g. with the Traffic Class attribute set to "Streaming" in the ABQP). The BSS may delete such PFCs without notifying the SGSN only in case of user inactivity, otherwise it shall always start the Modify BSS PFC procedure.

The Delete BSS PFC procedure takes precedence over the Modify BSS PFC and the Create BSS PFC procedures, i.e. when the BSS receives a DELETE-BSS-PFC PDU it shall abort any ongoing Create BSS PFC or Modify BSS PFC procedure for that PFI.

8b Signalling Procedures between LCS SAPs

8b.1 Location Procedure

When the SGSN receives a location request, and the BSS supports LCS, the SGSN starts the location procedure by sending a PERFORM-LOCATION-REQUEST PDU.

The SGSN shall provide the BVCI and the NSEI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS as well as the Cell ID received together with that LLC-PDU. The SGSN shall also provide the IMSI. If the SGSN has valid DRX Parameters for a TLLI, then the SGSN shall include them in the PDU.

The Location Type indicates which type of location information the SGSN is requesting. The LCS capability IE reports the PS LCS capabilities of the MS and is included by the SGSN if it has been received from the MS. LCS Priority and LCS QoS are provided if available in the SGSN.

On receipt of the PERFORM-LOCATION-REQUEST PDU for positioning of the target MS, the BSS transfers the positioning request to the SMLC according to the procedures defined in 3GPP TS 43.059 and 3GPP TS 49.031 and awaits the result. The BSS then returns the result of positioning to the SGSN in the PERFORM-LOCATION-RESPONSE PDU. This message contains the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS, a location estimate and optionally positioning data.

If assistance data was instead requested by the SGSN for an MS, the BSS transfers the request to the SMLC according to the procedures defined in 3GPP TS 43.059 and 3GPP TS 49.031 and awaits the result. If the Requested GPS Assistance Data IE was received from the MS, it is forwarded to the BSS. If the SMLC indicates to the BSS that it was able successfully to transfer this to the MS, the BSS shall return a PERFORM-LOCATION-RESPONSE PDU to the SGSN. This message shall contain the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS but no other optional or conditional information elements. The absence of an LCS Cause parameter in this case implies that the transfer was successful.

Otherwise, if a deciphering keys were requested for LCS broadcast assistance data, the BSS transfers the request to the SMLC according to the procedures defined in 3GPP TS 43.059 and 3GPP TS 49.031 and awaits the result. If the BSS receives the deciphering keys, the BSS shall send them to the SGSN in a PERFORM-LOCATION-RESPONSE PDU containing also the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS.

8b.1.1 Unsuccessful Operation

If the BSS fails to respond to the PERFORM-LOCATION-REQUEST PDU it returns a PERFORM-LOCATION-RESPONSE PDU with a LCS cause value indicating the failure cause.

If the BSS receives a failure indication from the SMLC it shall send a PERFORM-LOCATION-RESPONSE PDU to the SGSN with the LCS cause value that it received from the SMLC.

8b.1.2 Abnormal Conditions

The following condition may occur:

If the SGSN needs to abort previously initiated location request, it shall send the PERFORM LOCATION ABORT PDU to the BSS. This message shall include the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS. As a result of reception of this message the BSS shall abort activities related to positioning of the target MS or assistance data delivery. The BSS shall return a PERFORM-LOCATION-RESPONSE PDU with a cause value indicating the abortion of location request. The SGSN may reattempt the positioning request after the PERFORM-LOCATION-RESPONSE PDU is received from the BSS, but not before the PDU is received.

If the P-TMSI is reallocated for a target MS during the location procedure, the SGSN shall abort the location procedure.

If a SUSPEND PDU is received for a target MS during the location procedure, the SGSN shall abort the location procedure.

If a Routing Area Update request is received from a target MS during the location procedure, the SGSN shall abort the location procedure.

If an Inter NSE Cell Change, within the same routing area, occurs for a target MS during the location procedure, the SGSN shall provide the new NSEI and new BVCI in the FLUSH-LL PDU sent to the BSS, in order for the BSS to maintain the on-going location procedure, if possible. In case the BSS is unable to maintain the on-going location procedure, then a location abort shall be triggered by the BSS towards the SMLC.

8b.1.3 Overload

For location requests initiated by the SGSN, the BSC may employ the same procedures defined for an SMLC in 3GPP TS 49.031 to alleviate an overload condition in the BSS.

8b.2 Position Command Procedure

The position command procedure is used to convey an embedded RRLP message between the BSS and the MS.

8b.2.1 Position Command

The BSS initiates the position command procedure by sending the POSTION-COMMAND PDU to the SGSN. The procedure is only valid while a location procedure for the target MS is ongoing.

The POSITION-COMMAND PDU shall include the RRLP Flags and the RRLP APDU information elements and the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS. The RRLP APDU information element carries the RRLP message and the RRLP Flags information element carries control information for RRLP.

The SGSN shall extract the RRLP message from the RRLP APDU information element and forward it, together with the RRLP Flags, to the MS in a TOM message carried in an LLC-PDU, see 3GPP TS 44.064.

8b.2.2 Position Response

The SGSN initiates the position response procedure when it receives a TOM message in an LLC-PDU carrying an RRLP message for a target MS. The procedure is only valid while a location procedure for the target MS is ongoing.

When the SGSN receives a TOM message in an LLC-PDU carrying an RRLP message for a target MS, the SGSN shall extract the RRLP message and forward it to the BSS in a POSITION-RESPONSE PDU. The RRLP message shall be included in the RRLP APDU information element. The RRLP Flags information shall be extracted from the TOM header and be included in the RRLP Flags information element The POSITION-RESPONSE PDU shall also include the PTP BVCI indicating the PTP functional entity (i.e. the cell) upon which the last LLC-PDU was received from the MS.

8b.2.3 Unsuccessful Operation

If the SGSN fails to process the POSITION-COMMAND PDU it returns a POSITION-RESPONSE PDU with a LCS cause value indicating the failure cause.

If a POSITION-COMMAND PDU is received by the SGSN while a location procedure for the target MS is not ongoing a POSITION-RESPONSE PDU with a LCS cause value indicating this failure cause is returned.

If a POSITION-RESPONSE PDU is received by the BSS while a location procedure for the target MS is not ongoing the BSS shall ignore the PDU.

8c Signalling procedures between RIM SAPs

8c.1 General

8c.1.1 Introduction

The following sub-clauses describe the generic RAN Information Management (RIM) procedures which support the exchange of information, via the core network, between peer application entities located in a GERAN or in a UTRAN access network.

The RIM function is performed through the interaction of the following sub-layers:

- the underlying part of BSSGP used to transport and route the RIM PDUs from a BSS to an SGSN or from an SGSN to a BSS over the Gb interface;
- the RIM protocol allowing the exchange of the information between two BSSs or between a BSS and an RNS transparently through the core network;
- the application part on the top of the RIM protocol, referred to as the "RIM application" in this specification.

NOTE: The functional split between the RIM application and the RIM protocol is provided for information in the present specification and should allow for various implementations.

The PDUs conveying the RAN information between two RIM entities are including containers that shall not be interpreted by the core network nodes. The exchange of information is triggered by the application in a controlling BSS.

The support of different applications is achieved by the appropriate definition of specific application containers for those applications.

If the RAN Information Management (RIM) feature is supported by both the BSS and the SGSN, the RIM procedures can be used by any RIM application running on this BSS and requiring information transfer between two BSSs via the core network.

NOTE: Specific requirements applicable to RIM between GERAN and UTRAN are specified in sub-clause 8c.1.4.

8c.1.2 Definitions

8c.1.2.1 Controlling and serving nodes

The BSS requesting the information is called the "controlling BSS", the BSS providing the requested information is called the "serving BSS". Considering a pair of BSSs, each may be at the same time both a controlling BSS and a serving BSS.

In the present specification the term "BSS" should be understood as "RNS" in the relevant situations (e. g. NACC from UTRAN to GERAN), unless it is explicitly stated otherwise.

8c.1.2.2 RIM association

A RIM association links unambiguously a cell in the serving BSS with the controlling BSS that has initiated an information request related to that cell for a given application, and is identified by the following triplet:

- Controlling BSS identifier
- Cell Identifier in the serving BSS
- RIM Application Identity

8c.1.2.3 RIM variables

In this protocol description, variables are used to represent the status of the relevant entity as a result of an event, such as the reception of an information element in a message. The variables serve the purpose of specifying an abstract model of the protocol entity, and do not therefore impose any particular implementation.

The following variables are defined in the serving BSS:

- MULTIPLE_REPORTING_ONGOING: this variable indicates whether event-based multiple reporting is active or not for a given RIM association. This variable is initialised to FALSE prior to the reception of any request related to the corresponding association from the controlling BSS, then it is updated according to the relevant procedure requirements.
- MULTIPLE_REPORT_SETTING_RSN: this variable stores the RSN of the last request having initiated or reinitiated multiple reporting in the serving BSS and is used as a reference to ascertain whether any further request received for this association is outdated or not. The value of this variable is only significant when multiple reporting is active (i.e. MULTIPLE_REPORTING_ONGOING set to TRUE).

8c.1.3 RIM PDUs description

8c.1.3.1 RAN-INFORMATION-REQUEST PDU

The RAN-INFORMATION-REQUEST PDU is used by the controlling BSS to request or interrupt an information transfer from a serving BSS. The RAN-INFORMATION-REQUEST PDU specifies the requested operation and the expected information when applicable. The following RAN-INFORMATION-REQUEST PDU type extensions are defined:

- RAN-INFORMATION-REQUEST/Single Report is used to request a single report.
- RAN-INFORMATION-REQUEST/Multiple Report is used to request event-driven multiple reports.
- RAN-INFORMATION-REQUEST/Stop is used to stop event-driven multiple reports.

8c.1.3.2 RAN-INFORMATION PDU

The RAN-INFORMATION PDU is used by the serving BSS to transmit the requested information to the controlling BSS. The following RAN-INFORMATION PDU type extensions are defined:

- RAN-INFORMATION/Single Report is used to acknowledge the reception of a RAN-INFORMATION-REQUEST/Single Report and to transmit the requested single report information.
- RAN-INFORMATION/Initial Multiple Report is used to acknowledge the reception of a RAN-INFORMATION-REQUEST/Multiple Report and to transmit the initial report of the event-driven multiple reporting.
- RAN-INFORMATION/Multiple Report is used to transmit subsequent reports while event-driven multiple reporting is active.
- RAN-INFORMATION/Stop is used to acknowledge the reception of a RAN-INFORMATION-REQUEST/Stop.
- RAN-INFORMATION/End is used to indicate that the serving BSS will not longer send multiple reports for other reasons than the reception of a RAN-INFORMATION-REQUEST/Stop.

8c.1.3.3 RAN-INFORMATION-ACK PDU

The RAN-INFORMATION-ACK PDU is used by the controlling BSS to acknowledge the reception of a previous RAN-INFORMATION PDU if so requested by the serving BSS and is used by the serving BSS to acknowledge the reception of a previous RAN-INFORMATION-APPLICATION-ERROR PDU if so requested by the controlling BSS.

8c.1.3.4 RAN-INFORMATION-ERROR PDU

The RAN-INFORMATION-ERROR PDU is used, by either the controlling or the serving BSS, to report an error diagnosed at the RIM protocol level to the peer entity.

8c.1.3.5 RAN-INFORMATION-APPLICATION-ERROR PDU

The RAN-INFORMATION-APPLICATION-ERROR PDU is used by the controlling BSS to inform the peer application in the serving BSS about erroneous application information in a previously received RAN-INFORMATION PDU.

8c.1.4 RIM addressing and routing principles

8c.1.4.1 RIM routing address

8c.1.4.1.1 GERAN BSS identification

As there is no BSS address identifier defined as such in the 3GPP specifications, RIM makes use of the cell identifier (RAI + CI - see sub-clause 11.3.9 in the present document and 3GPP TS 23.003) of any cell parented by the BSS:

- the cell identifier of the source cell is used to identify the BSS issuing a RIM PDU;
- the cell identifier of the destination cell is used to identify the BSS towards which a RIM PDU is issued.

The source cell identifying the BSS issuing a RAN-INFORMATION-REQUEST PDU may be chosen arbitrarily within all the cells parented by the controlling BSS. The deletion or the re-parenting of any cell used as a source cell in the controlling BSS shall trigger the actions described in sub-clause 8c.5.2.

8c.1.4.1.2 UTRAN RNS identification

When RIM is used to support the exchange of information with a peer application entity located in UTRAN, the Global RNC-Id (see 3GPP TS 23.003) shall be used as the RIM Routing Address (Source Cell Identifier or Destination Cell Identifier) to identify the corresponding RNS.

8c.1.4.2 Routing via the core network

The RIM PDUs shall be conveyed transparently by the core network toward the destination BSS or RNS. A SGSN shall use the destination address included in each RIM PDU either to send the PDU to the relevant BSS or RNS through the Gb or the Iu interface respectively, or to tunnel the PDU towards the target SGSN parenting the destination node through the Gn interface.

If the destination SGSN or the destination BSS does not support RIM the PDU is discarded without further action.

8c.1.4.3 Address mirroring

The following address mirroring principles shall be applied:

- the serving BSS shall mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the received RAN-INFORMATION-REQUEST PDU into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE, respectively, of the related RAN-INFORMATION PDU(s);
- the controlling BSS shall mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION PDU to be acknowledged into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE, respectively, of the related RAN-INFORMATION-ACK PDU;
- the BSS having identified an error at the RIM protocol level in a received RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU shall mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the erroneous PDU into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE, respectively, of the RAN-INFORMATION-ERROR PDU;

- the controlling BSS having identified an error at application level in a received PDU shall mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION PDU which carried the erroneous application information into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE, respectively, of the RAN-INFORMATION-APPLICATION-ERROR PDU.

8c.1.5 In-order delivery and reliable transfer - RSN

8c.1.5.1 General

A BSS shall allocate a RIM Sequence Number (RSN) to any RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION PDU or RAN-INFORMATION-APPLICATION-ERROR PDU sent by this BSS. The purpose of the RSN is twofold:

- to assess whether a RAN-INFORMATION-REQUEST PDU or a RAN-INFORMATION PDU received for a given RIM association is providing up-to-date information or is outdated if having been overtaken by a PDU received previously;
- to identify the PDU acknowledged with a RAN-INFORMATION-ACK PDU or reported in a RAN-INFORMATION-ERROR PDU.

For the purpose of comparing any RSN value to a given RSN X, the RSN numbering space is halved in two equal parts (see figure 8c.1) located on either sides of RSN X, the half part "below" RSN X (modulo RSN MAX+1) defining the RSN values "older" than RSN X, the half part "above" (modulo RSN MAX+1) RSN X defining the RSN values "newer" than RSN X.

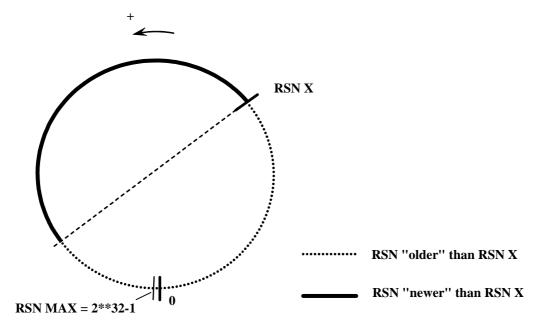


Figure 8c.1: Comparing RSN values

8c.1.5.2 Allocating RSN values at the sending BSS

The RSN allocated to a RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION PDU or RAN-INFORMATION-APPLICATION-ERROR PDU shall be greater (modulo 2**32) than the RSN value allocated to the previous PDU of the same type sent for this association. In case a given PDU needs to be resent, this PDU may be reissued with either the same RSN value or an increased RSN value (modulo 2**32).

NOTE: The RSN values allocated to two different PDUs sent successively for a given RIM association need not be consecutive (e.g. the RSN values could be uniquely allocated for a given application or within the whole BSS). However, in order to avoid RSN values depletion, the sending BSS should allocate the next higher RSN value (modulo 2**32) to the next PDU to be sent.

To allow a receiving entity to assess whether two PDUs are received in the same relative order they have been sent or not, the difference between the RSN values allocated to those two PDUs should not exceed an RSN window size of 2**31 (see sub-clause 8c.1.5.3).

NOTE: In order to cope with RSN values outside the RSN window for a given RIM association, the relevant RIM procedures might be triggered on a timely basis for advancing the RSN window.

8c.1.5.3 Comparing RSN values at the receiving BSS

Let PDU1 and PDU2 be two PDUs received at the BSS and related to the same RIM association, PDU1 is considered as having been sent earlier than PDU2 if the difference between the associated RSNs is less than an RSN window size of 2**31 (see sub-clause 8c.1.5.2), i.e.:

 $(RSN2 - RSN1) \mod (2**32) < 2**31$

8c.1.6 RIM Protocol Version Number

The *RIM Protocol Version Number* Information Element may be included in a RIM PDU. The *RIM Protocol Version Number* IE indicates which version of the RIM protocol is in use in the BSS having issued the PDU. If this Information Element is omitted, the behaviour of the receiving BSS should be the same as if the value of the *RIM Protocol Version Number* IE was "Version 1".

Only "Version 1" is defined in the present version of the specification.

In case the protocol version of the receiving BSS is lower than the version of the sending BSS, and unless otherwise specified in the present specification, the general rules of the BSSGP protocol apply and any unknown parameter shall be ignored.

8c.2 RIM procedures

8c.2.1 General

The RAN Information Request procedure is initiated by an application in the controlling BSS when it either requires information or wants to stop the transmission of information from a remote peer entity of the same application in the serving BSS. The application on the controlling side indicates the type of operation (Multiple Reports, Single Report, Stop) to the peer entity.

The RAN Information Send procedure is used to transfer application information between two entities of the same application in two BSSs via the core network.

The RAN Information Application Error procedure is initiated by an application in the controlling BSS to transfer application error information to the peer application entity of the same application in the serving BSS.

The RAN Information Error procedure is initiated by the RIM entity in the controlling or the serving BSS to transfer error information to the RIM entity in the peer BSS.

8c.2.2 RAN Information Request procedure

8c.2.2.1 RAN Information Request/Single Report procedure

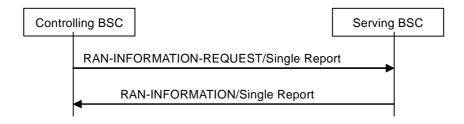


Figure 8c.2.2.1: RAN Information Request/Single Report Procedure

8c.2.2.1.1 Initiation by the controlling BSS

Upon initiation of the procedure, the controlling BSS shall:

- 1> set the content of the RAN-INFORMATION-REQUEST/Single Report PDU as follows:
 - 2> set the PDU type IE, the Destination Cell Identifier IE and the Source Cell Identifier IE;
 - 2> set the content of the RIM Container IE as follows:
 - 3> set the RIM Application Identity IE and the RIM Sequence Number IE;
 - 3> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION-REQUEST/Single Report";
 - 3> set the RIM Protocol Version Number IE if necessary (see sub-clause 8c.1.6);
 - 3> include the Application Container IE according to the requirements of the application;
- 1> send the RAN-INFORMATION-REQUEST/Single Report PDU;
- 1> start T(RIR);

8c.2.2.1.2 Reception of a valid RAN-INFORMATION-REQUEST/Single Report PDU by the serving BSS

Upon reception of a valid RAN-INFORMATION-REQUEST/Single Report PDU as defined in sub-clause 8c.3.2 the serving BSS shall:

- 1> set the content of the RAN-INFORMATION/Single Report PDU as follows:
 - 2> set the *PDU type* IE; mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION-REQUEST/Single Report PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION/Single Report PDU;
 - 2> set the content of the RIM Container IE as follows:
 - 3> set the RIM Application Identity IE as required by the application;
 - 3> set the *RIM Sequence Number* IE and, if necessary, the *RIM Protocol Version Number* IE (see sub-clause 8c.1.6);
 - 3> set the ACK indicator in the RIM PDU Indications IE to "No ACK requested";
 - 3> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION/Single Report";
 - 3> include either the RAN-INFORMATION *Application Container* IE or the *Application Error Container* IE according to the requirements of the application;
- 1> send the RAN-INFORMATION/Single Report PDU to the controlling BSS.

8c.2.2.1.3 Reception of a valid RAN-INFORMATION/Single Report PDU by the controlling BSS

Upon reception of a valid RAN-INFORMATION/Single Report PDU as defined in sub-clause 8c.3.2 the controlling BSS shall:

- 1> stop T(RIR) for this RIM association;
- 1> deliver the relevant information to the application;

and the procedure ends.

8c.2.2.1.4 Expiration of T(RIR) in the controlling BSS

If T(RIR) expires the controlling BSS shall as an implementation option either inform the application that the procedure has failed or restart the RAN Information Request/Single Report procedure as described in sub-clause 8c.2.2.1.1.

8c.2.2.2 RAN Information Request/Multiple Report procedure

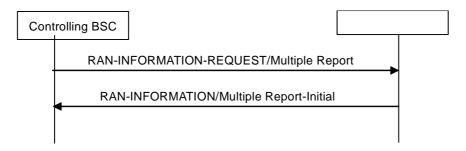


Figure 8c.2.2.2: Successful RAN Information Request/Multiple Report Procedure

8c.2.2.2.1 Initiation by the controlling BSS

Upon initiation of the procedure, the controlling BSS shall:

- 1> set the content of the RAN-INFORMATION-REQUEST/Multiple Report PDU as follows:
- 2> set the PDU type IE, the Destination Cell Identifier IE and the Source Cell Identifier IE;
- 2> set the content of the RIM Container IE as follows:
 - 3> set the RIM Application Identity IE and the RIM Sequence Number IE;
 - 3> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION-REQUEST/Multiple Report";
 - 3> set the RIM Protocol Version Number IE if necessary (see sub-clause 8c.1.6);
 - 3> include the *Application Container* IE according to the requirements of the application;
- 1> send the RAN-INFORMATION-REQUEST/Multiple Report PDU;
- 1> Start T(RIR);

8c.2.2.2.2 Reception of a valid RAN-INFORMATION-REQUEST/Multiple Report PDU by the serving BSS

Upon reception of a valid RAN-INFORMATION-REQUEST/Multiple Report PDU as defined in sub-clauses 8c.3.2 the serving BSS shall:

- 1> if MULTIPLE_REPORTING_ONGOING is set to TRUE for this RIM association and if the received RAN-INFORMATION-REQUEST/Multiple Report PDU is considered as having been sent earlier (see sub-clause 8c.1.5) than the PDU whose RSN is stored in MULTIPLE_REPORT_SETTING_RSN, then:
 - 2> discard the PDU without further actions and the procedure ends;
- 1> otherwise:
 - 2> set the MULTIPLE_REPORTING_ONGOING variable to TRUE for this RIM association;
 - 2> store the *RIM Sequence Number* IE value of the received PDU in the MULTIPLE_REPORT_SETTING_RSN variable;
 - 2> set the content of the RAN-INFORMATION/Initial Multiple Report PDU as follows:
 - 3> set the *PDU type* IE; mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION-REQUEST/Multiple Report PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION/Initial Multiple Report PDU;
 - 3> set the content of the RIM Container IE as follows:
 - 4> set the RIM Application Identity IE as required by the application;
 - 4> set the *RIM Sequence Number* IE and, if necessary, the *RIM Protocol Version Number* IE (see subclause 8c.1.6);
 - 4> set the ACK indicator in the RIM PDU Indications IE to "No ACK requested";
 - 4> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION/Initial Multiple Report";
 - 4> include either the RAN-INFORMATION *Application Container* IE or the *Application Error Container* IE according to the requirements of the application;
 - 2> send the RAN-INFORMATION/Initial Multiple Report PDU.

8c.2.2.2.3 Reception of a valid RAN-INFORMATION PDU/Initial Multiple Report PDU by the controlling BSS

Upon reception of a valid RAN-INFORMATION/Initial Multiple Report PDU as defined in sub-clause 8c.3.2 the controlling BSS shall:

- 1> stop T(RIR) for this RIM association;
- 1> deliver the relevant information to the application;

and the procedure ends.

8c.2.2.2.4 Expiration of T(RIR) in the controlling BSS

If T(RIR) expires the controlling BSS shall as an implementation option either inform the application that the procedure has failed or restart the RAN Information Request/Multiple Report procedure as described in sub-clause 8c.2.2.2.1.

8c.2.2.3 RAN Information Request/Stop procedure

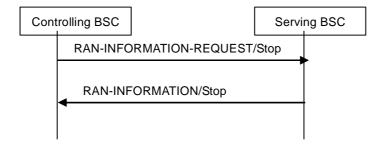


Figure 8c.2.2.3: RAN Information Request/Stop Procedure

8c.2.2.3.1 Initiation by the controlling BSS

Upon initiation of the procedure, the controlling BSS shall:

- 1> set the content of the RAN-INFORMATION-REQUEST/Stop PDU as follows:
- 2> set the PDU type IE, the Destination Cell Identifier IE and the Source Cell Identifier IE;
- 2> set the content of the RIM Container IE as follows:
 - 3> set the RIM Application Identity IE and the RIM Sequence Number IE;
 - 3> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION-REQUEST/Stop";
 - 3> set the RIM Protocol Version Number IE if necessary (see sub-clause 8c.1.6);
 - 3> include the *Application Container* IE according to the requirements of the application;
- 1> send the RAN-INFORMATION-REQUEST/Stop PDU;
 - 1> start T(RIR).

8c.2.2.3.2 Reception of a valid RAN-INFORMATION-REQUEST/Stop PDU by the serving BSS

Upon reception of a valid RAN-INFORMATION-REQUEST/Stop PDU as defined in sub-clause 8c.3.2, the serving BSS shall:

- 1> if MULTIPLE_REPORTING_ONGOING is set to TRUE for this RIM association and if the received RAN-INFORMATION-REQUEST/Stop PDU is considered as having been sent earlier (see sub-clause 8c.1.5) than the PDU whose RSN is stored in MULTIPLE REPORT SETTING RSN, then:
 - 2> discard the PDU without further actions and the procedure ends;
- 1> otherwise:
 - 2> set the MULTIPLE_REPORTING_ONGOING variable to FALSE for this RIM association;
 - 2> set the content of the RAN-INFORMATION/Stop as follows:
 - 3> set the *PDU type* IE; mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION-REQUEST/Stop PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION/Stop PDU;
 - 3> set the content of the RIM Container IE as follows:
 - 4> set the RIM Application Identity IE as required by the application;
 - 4> set the *RIM Sequence Number* IE and, if necessary, the *RIM Protocol Version Number* IE (see subclause 8c.1.6);

- 4> set the ACK indicator in the RIM PDU Indications IE to "No ACK requested";
- 4> set the PDU Type Extension field in the RIM PDU Indications IE to "RAN-INFORMATION/Stop";
- 4> include either the *Application Container* IE or the *Application Error Container* IE according to the requirements of the application;
- 2> send the RAN-INFORMATION/Stop PDU.

8c.2.2.3.3 Reception of a valid RAN-INFORMATION/Stop PDU by the controlling BSS

Upon reception of a valid RAN-INFORMATION/Stop PDU as defined in sub-clause 8c.3.2 the controlling BSS shall:

- 1> stop T(RIR) for this RIM association;
- 1> deliver the relevant information to the application;

and the procedure ends.

8c.2.2.3.4 Expiration of T(RIR) in the controlling BSS

If T(RIR) expires the controlling BSS shall as an implementation option either inform the application that the procedure has failed or restart the RAN Information Request/Stop procedure as described in sub-clause 8c.2.2.3.1.

8c.2.3 RAN Information Send procedure

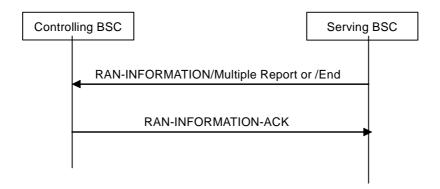


Fig 8c.2.3 Acknowledged RAN Information Send procedure

8c.2.3.1 Initiation by the serving BSS

If multiple reporting has been requested for a given RIM association (i.e. the MULTIPLE_REPORTING_ONGOING variable is set to TRUE), the RAN Information Send procedure is initiated by the application in the serving BSS either to send updated information (using the RAN-INFORMATION/Multiple Report PDU) or to indicate that multiple reporting has been deactivated on the serving BSS side (using the RAN-INFORMATION/End PDU).

Upon initiation of the procedure, the serving BSS shall:

- 1> set the content of the RAN-INFORMATION PDU as follows:
 - 2> set the PDU type IE, mirror the Source Cell Identifier IE value and the Destination Cell Identifier IE value of the RAN-INFORMATION-REQUEST/Multiple Report PDU that is identified by the RSN stored in the MULTIPLE_REPORT_SETTING_RSN variable respectively into the Destination Cell Identifier IE and the Source Cell Identifier IE of the RAN-INFORMATION PDU;
 - 2> set the content of the RIM Container IE as follows:

- 3> mirror the *RIM Application Identity* IE value of the RAN-INFORMATION-REQUEST/Multiple Report PDU that is identified by the RSN stored in the MULTIPLE_REPORT_SETTING_RSN variable into the *RIM Application Identity* IE of the RAN-INFORMATION PDU;
- 3> set the *RIM Sequence Number* IE and, if necessary, the *RIM Protocol Version Number* IE (see sub-clause 8c.1.6);
- 3> set the *PDU Type Extension* field in the *RIM PDU Indications* IE to "RAN-INFORMATION/Multiple Report" or "RAN-INFORMATION/End" as required by the application;
- 3> for a RAN-INFORMATION/Multiple Report PDU, set the *ACK* indicator to the value required by the application; for a RAN-INFORMATION/End PDU, set the *ACK* indicator to "ACK requested";
- 3> set the Application Container IE according to the requirements of the application;
- 1> if the RAN-INFORMATION PDU is a RAN-INFORMATION/End (multiple reporting deactivated), set the MULTIPLE REPORTING ONGOING variable to FALSE;
- 1> send the RAN-INFORMATION PDU;
- 1> if the *ACK* indicator has been set to "ACK requested", start a T(RI) instance for this RAN-INFORMATION PDU:
- 1> otherwise the procedure ends.

8c.2.3.2 Reception of a valid RAN-INFORMATION PDU by the controlling BSS

Upon reception of a valid RAN-INFORMATION/Multiple Report or RAN-INFORMATION/End PDU as defined in sub-clause 8c.3.2 the controlling BSS shall:

- 1> deliver the relevant information to the application;
- 1> if the *ACK* indicator in the *RIM PDU Indications* IE included in the RIM container of the RAN-INFORMATION PDU is set to "ACK requested", the controlling BSS shall:
 - 2> set the content of the RAN-INFORMATION-ACK PDU as follows:
 - 3> set the *PDU type* IE; mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION-ACK PDU;
 - 3> set the content of the *RIM Container* IE as follows:
 - 4> mirror the *RIM Sequence Number* IE value and the *RIM Application Identity* IE value included in the RIM container of the RAN-INFORMATION PDU respectively into the *RIM Sequence Number* IE and the *RIM Application Identity* IE of the RAN-INFORMATION-ACK PDU;
 - 4> set, if necessary, the RIM Protocol Version Number IE (see sub-clause 8c.1.6);
- NOTE: If the RAN-INFORMATION PDU is a RAN-INFORMATION/End, the controlling BSS shall consider that multiple reporting is deactivated for this RIM association in the serving BSS.
 - 2> send the RAN-INFORMATION-ACK PDU.
- 1> otherwise, the procedure ends.

8c.2.3.3 Reception of a valid RAN-INFORMATION-ACK PDU in the serving BSS

Upon reception of a valid RAN-INFORMATION-ACK PDU as defined in sub-clause 8c.3.2 the serving BSS shall:

- 1> if the *RIM Sequence Number* IE value contained in the RAN-INFORMATION-ACK PDU matches the RSN of the RAN-INFORMATION PDU having initiated the procedure then:
 - 2> stop the T(RI) instance corresponding to the acknowledged PDU;

and the procedure ends.

8c.2.3.4 Expiration of T(RI) in the serving BSS

Upon expiration of the T(RI) instance the serving BSS shall, as an implementation option, either inform the application that the procedure has failed or restart the RAN Information Send procedure as described in sub-clause 8c.2.3.1.

8c.2.4 RAN Information Application Error procedure

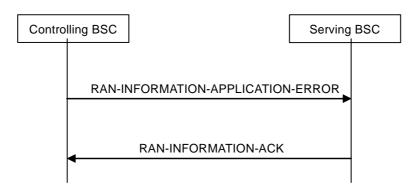


Fig 8c.2.4 RAN Information Application Error procedure

8c.2.4.1 Initiation by the controlling BSS

Upon initiation of the procedure, the controlling BSS shall:

- 1> set the content of the RAN-INFORMATION-APPLICATION-ERROR PDU as follows:
 - 2> set the PDU type IE, mirror the Source Cell Identifier IE value and the Destination Cell Identifier IE value of the RAN-INFORMATION PDU with the erroneous application container respectively into the Destination Cell Identifier IE and the Source Cell Identifier IE of the RAN-INFORMATION-APPLICATION-ERROR PDU;
 - 2> set the content of the RIM Container IE as follows:
 - 3> set the RIM Application Identity IE and the RIM Sequence Number IE;
 - 3> set the RIM Protocol Version Number IE if necessary (see sub-clause 8c.1.6);
 - 3> set the ACK indicator in the RIM PDU Indications IE according to the requirements of the application;
 - 3> include the Application Error Container IE according to the requirements of the application
- 1> send the RAN-INFORMATION-APPLICATION-ERROR PDU to the serving BSS;
- 1> if the *ACK* indicator has been set to "ACK requested", start a T(RIAE) instance for this RAN-INFORMATION-APPLICATION-ERROR PDU;
- 1> otherwise the procedure ends.

8c.2.4.2 Reception of a valid RAN-INFORMATION-APPLICATION-ERROR PDU by the serving BSS

Upon reception of a valid RAN-INFORMATION-APPLICATION-ERROR PDU as defined in sub-clause 8c.3.2 the serving BSS shall:

- 1> deliver the relevant information to the application;
- 1> if the *ACK* indicator in the *RIM PDU Indications* IE included in the RIM container of the RAN-INFORMATION-APPLICATION-ERROR PDU is set to "ACK requested", then the serving BSS shall:
 - 2> set the content of the RAN-INFORMATION-ACK PDU as follows:

- 3> set the *PDU type* IE, mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the RAN-INFORMATION-APPLICATION-ERROR PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION-ACK PDU;
- 3> set the content of the RIM Container IE as follows:
 - 4> mirror the *RIM Sequence Number* IE value and the *RIM Application Identity* IE value included in the RIM container of the RAN-INFORMATION-APPLICATION-ERROR PDU respectively into the *RIM Sequence Number* IE and the *RIM Application Identity* IE of the RAN-INFORMATION-ACK PDU;
 - 4> set the RIM Protocol Version Number IE if necessary (see sub-clause 8c.1.6);
- 2> send the RAN-INFORMATION-ACK PDU.
- 1> otherwise, the procedure ends.

8c.2.4.3 Reception of a valid RAN-INFORMATION-ACK PDU by the controlling BSS

Upon reception of a valid RAN-INFORMATION-ACK PDU as defined in sub-clause 8c.3.2, the controlling BSS shall:

- 1> if the *RIM Sequence Number* IE value contained in the RAN-INFORMATION-ACK PDU matches the RSN of the RAN-INFORMATION-APPLICATION-ERROR PDU having initiated the procedure
 - 2> then stop the T(RIAE) instance corresponding to the acknowledged PDU;
- 1> else discard the PDU without further action;

and the procedure ends.

8c.2.4.4 Expiration of T(RIAE) in the controlling BSS

At the expiration of the T(RIAE) instance corresponding to the RAN-INFORMATION-APPLICATION-ERROR PDU sent previously by the controlling BSS, the controlling BSS shall, as an implementation option, either inform the application that the procedure has failed or restart the RAN Information Application Error procedure as described in sub-clause 8c.2.4.1.

8c.2.5 RAN Information Error procedure

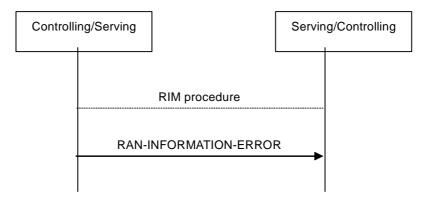


Fig 8c.2.5 RAN Information Error procedure

The RAN Information Error procedure is initiated by the RIM in the source BSS (controlling or serving) to transfer error information to the RIM entity in the associated BSS;

The procedure is described in sub-clause 8c.3.4.

8c.3 Abnormal conditions

8c.3.0 General

Two levels of abnormal conditions are defined for the RIM function:

- the abnormal conditions encountered at the BSSGP level as described in sub-clause 8c.3.1, affecting the routing mechanisms and the related IEs in the RIM PDUs;
- the abnormal conditions encountered in the RIM container as described in sub-clauses 8c.3.2 and 8c.3.3;

The errors encountered in the application container are handled by the application and are made known to the peer application entity by including the *Application Error container* IE.

8c.3.1 Abnormal conditions at the BSSGP level

8c.3.1.1 General

The general protocol error handling as defined in section 9 applies.

However, the RIM containers being defined as general containers for passing field elements transparently between BSSs via the core network are not subject to error handling at the BSSGP level but only at the RIM protocol level (see sub-clause 8c.3.2).

Additionally the abnormal conditions defined in the following sub-clauses apply.

8c.3.1.2 RIM addressing error in BSS

If a BSS receives from an SGSN a RIM PDU with a *Destination Cell Identifier* IE value which does not match the cell identifier of any of its parented cells, the PDU shall be discarded and a STATUS PDU with the cause "Invalid mandatory information" shall be sent back to the SGSN.

8c.3.1.3 RIM addressing error in the CN

If an SGSN receives from a BSS a RIM PDU with an invalid destination address, the PDU shall be discarded and a STATUS PDU with the cause set to "Invalid mandatory information" shall be sent back to the BSS.

8c.3.1.4 RIM PDU addressed to a BSS not supporting RIM

If an SGSN receives a RIM PDU addressed to a parented BSS that does not support the RIM procedures, the PDU shall be discarded without further action.

8c.3.2 Abnormal conditions encountered in the RIM container

8c.3.2.1 Unknown RIM Application Identity

If the RIM container included in a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU contains an unknown value in the *RIM Application Identity* IE, the BSS shall send a RAN-INFORMATION-ERROR PDU with the *RIM Cause* IE set to "Unknown RIM Application Identity" back to the originating BSS (see sub-clause 8c.3.4.2) and discard the received PDU.

If the RIM container included in a RAN-INFORMATION-ERROR PDU contains an unknown value in the *RIM Application Identity* IE, the BSS shall discard the RIM PDU without further action.

8c.3.2.2 Erroneous PDU Type Extension field

If the *PDU Type Extension* field in the *RIM PDU Indications* IE included in the RIM container of a RAN-INFORMATION-REQUEST PDU does not indicate "RAN-INFORMATION-REQUEST/Multiple Report", "RAN-IN

INFORMATION-REQUEST/Stop" or "RAN-INFORMATION-REQUEST/Single Report", the serving BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "PDU not compatible with the feature set" back to the originating BSS (see sub-clause 8c.3.4.2) and shall discard the received PDU.

If the *PDU Type Extension* field in the *RIM PDU Indications* IE included in the RIM container of a RAN-INFORMATION PDU does not indicate "RAN-INFORMATION/Single Report", "RAN-INFORMATION/Multiple Report", "RAN-INFORMATION/Initial Multiple Report", "RAN-INFORMATION/Stop" or "RAN-INFORMATION/End", the serving BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "PDU not compatible with the feature set" back to the originating BSS (see sub-clause 8c.3.4.2) and shall discard the received PDU.

8c.3.2.3 Missing conditional IE

If an expected conditional Information Element is not included in the RIM container of a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU, the BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Missing Conditional IE" back to the originating BSS (see sub-clause 8c.3.4.2) and discard the received PDU.

If an expected conditional Information Element is not included in the RIM container of a RAN-INFORMATION-ERROR PDU, the BSS shall discard the received PDU without further action.

8c.3.2.4 Missing mandatory IE

If a mandatory Information Element is not included in the RIM container of a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU, the BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Missing Mandatory IE" back to the originating BSS (see sub-clause 8c.3.4.2) and discard the received PDU.

If a mandatory Information Element is not included in the RIM container of a RAN-INFORMATION-ERROR PDU, the BSS shall discard the received PDU without further action.

8c.3.2.5 Syntactical error in an expected conditional IE

If a syntactical error is detected in an expected conditional Information Element included in the RIM container of a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU, the BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Conditional IE error" back to the originating BSS (see sub-clause 8c.3.4.2) and discard the received PDU.

If a syntactical error is detected in an expected conditional Information Element included in the RIM container of a RAN-INFORMATION-ERROR PDU, the BSS shall discard the received PDU without further action.

8c.3.2.6 Syntactical error in a mandatory IE

If a syntactical error is detected in a mandatory IE included in the RIM container of a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU, the BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Invalid mandatory information" back to the originating BSS (see subclause 8c.3.4.2) and discard the received PDU.

For this rule the following exceptions apply:

- unknown RIM Application Identity IE (see sub-clause 8c.3.2.1); or
- erroneous *PDU Type Extension* field (see sub-clause 8c.3.2.2)

If a syntactical error is detected in a mandatory IE included in the RIM container of a RAN-INFORMATION-ERROR PDU, the BSS shall discard the received PDU without further action.

8c.3.2.7 Unexpected conditional IE

If an unexpected conditional Information Element is received in the RIM container of a RAN-INFORMATION PDU, RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION-ACK PDU or RAN-INFORMATION-APPLICATION-ERROR PDU, the BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Unexpected Conditional IE" back to the originating BSS (see subclause 8c.3.4.2) and discard the received PDU.

If an unexpected conditional Information Element is received in the RIM container of a RAN-INFORMATION-ERROR PDU, the BSS shall discard the received PDU without further action.

8c.3.2.8 Containers with out-of-sequence information elements

The receiving BSS may accept RIM containers that include information elements that do not appear to be in the correct sequence. Elements that occur more than once in a RIM container shall be assumed to have been transmitted in the correct order. Recipients that do not accept out of sequence information elements shall regard the RIM container as containing unexpected and/or missing information elements and follow the procedures defined in the rest of this subclause 8c.3.2.

8c.3.2.9 Container with semantically incorrect content

When any IE with semantically incorrect contents is received within a RIM container, the receiving BSS shall react according to the relevant protocol specification. If however no such reactions are specified, the receiving BSS shall ignore that IE and treat the rest of the RIM container. If the rest of the RIM container can no longer be handled because this IE was ignored then the receiving BSS shall send a RAN-INFORMATION-ERROR PDU containing the complete received PDU and with the *RIM Cause* IE set to "Semantically incorrect PDU" back to the originating BSS (see subclause 8c.3.4.2) and discard the received PDU.

8c.3.3 Unexpected RIM PDU

If a BSS receives a RIM PDU in a case not covered by the RIM procedures specified in sub-clause 8c.2, it shall discard the RIM PDU without further action.

8c.3.4 RIM error reporting

8c.3.4.1 General

A BSS diagnosing any of the abnormal cases identified in sub-clause 8c.3.2 in a received RIM PDU shall inform the originating BSS by sending in return a RAN-INFORMATION-ERROR PDU as described in sub-clause 8c.3.4.2.

The tasks to be performed upon reception of the RAN-INFORMATION-ERROR PDU are described in sub-clause 8c.3.4.3.

8c.3.4.2 Sending of a RAN-INFORMATION-ERROR PDU

A BSS receiving an erroneous RIM PDU according to sub-clause $8c.3.2\ shall$:

- 1> set the *PDU type* IE, mirror the *Source Cell Identifier* IE value and the *Destination Cell Identifier* IE value of the erroneous RIM PDU respectively into the *Destination Cell Identifier* IE and the *Source Cell Identifier* IE of the RAN-INFORMATION-ERROR PDU
- 1> set the content of *RIM Container* IE as follows:
 - 2> mirror the *RIM Application Identity* IE value of the erroneous RIM PDU into the *RIM Application Identity* IE in the *RIM Container* IE of the RAN-INFORMATION-ERROR PDU;
 - 2> set the RIM Cause IE and, if necessary, the RIM Protocol Version Number IE (see sub-clause 8c.1.6);
 - 2> include the complete erroneous RIM PDU in to the PDU in Error IE;
- 1> send the RAN-INFORMATION-ERROR PDU.

8c.3.4.3 Reception of a RAN-INFORMATION-ERROR PDU in the BSS

Upon reception of an erroneous RAN-INFORMATION-ERROR PDU according to sub-clause 8c.3.2 the BSS shall discard the received PDU without further action.

The actions to be taken upon reception of a valid RAN-INFORMATION-ERROR PDU are an implementation-dependent option.

8c.4 RIM timers

The following RIM timers are defined:

- T(RIR) is used in the controlling BSS to control the reception of the response to a previously transmitted RAN-INFORMATION-REQUEST PDU.
- T(RI) is used in the serving BSS used to control the reception of the acknowledgement of a previously transmitted RAN-INFORMATION PDU.
- T(RIAE) is used in the controlling BSS used to control the reception of the acknowledgement of a previously transmitted RAN-INFORMATION-APPLICATION-ERROR PDU.

| Timer | Start | Stop | Action at expiry |
|---------|--|--|--|
| T(RIR) | Transmission of a RAN-INFORMATION-REQUEST/Multiple Report PDU | Reception of the answering RAN-INFORMATION/Initial Multiple Report | Either (implementation option) inform the application that the procedure has failed or restart the procedure |
| | Transmission of a RAN-INFORMATION-REQUEST/Single Report PDU | Reception of the answering RAN-INFORMATION/Single Report | Either (implementation option) inform the application that the procedure has failed or restart the procedure |
| | Transmission of a RAN- INFORMATION- REQUEST/Stop PDU | Reception of the answering RAN-INFORMATION/Stop | Either (implementation option) inform the application that the procedure has failed or restart the procedure |
| T(RI) | Transmission of a RAN-INFORMATION/Multiple Report or RAN-INFORMATION/End PDU | Reception of the answering RAN-INFORMATION-ACK | Either (implementation option) inform the application that the procedure has failed or restart the procedure |
| T(RIAE) | Transmission of a RAN- INFORMATION- APPLICATION-ERROR PDU | Reception of the answering RAN-INFORMATION-ACK | Either (implementation option) inform the application that the procedure has failed or restart the procedure |

8c.5 Action upon deletion of a cell in a BSS

8c.5.0 General

The deletion of a cell in a BSS should trigger the actions described in this sub-clause to ensure the proper operation of the RIM procedures for RIM associations related to this cell.

8c.5.1 Actions due to the deletion of the cell

If the deleted cell has to report to one or more controlling BSS(s), the serving BSS parenting the deleted cell shall trigger a RAN Information Send procedure to inform each of the corresponding controlling BSS(s) that multiple reporting has been deactivated by the sending of a RAN-INFORMATION/End PDU.

The controlling BSS parenting the deleted cell may also decide that, as a consequence of the deletion of this cell, some multiple reports previously requested from some cells parented by other BSS(s) are no longer needed and shall trigger the relevant RAN Information Request/Stop procedure.

8c.5.2 Additional actions in the case the deleted cell is used as a source cell by RIM

If the cell identifier of the cell being deleted has been used as the *Source Cell Identifier* IE value in a previous RAN-INFORMATION-REQUEST/Multiple report PDU, the deletion of this cell shall trigger the following additional actions to update this information in the serving BSS, as the *Source Cell Identifier* IE is used by the serving BSS to address the controlling BSS (address mirroring - see sub-clause 8c.1.4.3):

- The controlling BSS parenting this cell shall trigger a RAN Information Request/Stop procedure for each of the involved cells in the serving BSS.
- After the completion of this procedure the parenting BSS shall, if event-based multiple reporting is still needed from the involved cells, trigger further RAN Information Request/Multiple Report procedure(s) with a different cell identifier as *Source Cell Identifier* IE value.

8c.6 Specific requirements related to RIM applications

8c.6.0 General requirements

Any error condition detected in the *Application Error Container* IE included in the *RIM Container* IE of a valid RIM PDU shall not be reported to the peer application entity.

Any error condition detected in the *Application Container* IE included in the *RIM Container* IE of an erroneous RIM PDU shall not trigger a RAN Information Application Error procedure.

A controlling BSS shall not send another RAN-INFORMATION-REQUEST PDU for the same association before the first RAN-INFORMATION-REQUEST PDU has been acknowledged or before T(RIR) associated to this request has expired.

8c.6.1 Requirements related to the NACC RIM application

The rules specified in this sub-clause apply when the *RIM Application Identity* IE is set to "Network Assisted Cell Change (NACC)":

- The RAN-INFORMATION-REQUEST PDU is used by a controlling BSS to request the system information required for NACC operation in the controlling BSS and related to a single cell parented by a serving BSS. The *Destination Cell Identifier* IE of the RAN-INFORMATION-REQUEST PDU shall be set to the value of the *Reporting Cell Identifier* field contained in the application container of the PDU.
- The presence of the *Application Container* IE is mandatory in the *RIM Container* IE of the RAN-INFORMATION-REQUEST PDU.
- The RAN-INFORMATION PDU is used by a serving BSS to send the system information required for NACC operation (i.e. if a PBCCH is allocated in the cell, PSI1, a consistent set of PSI2 and PSI14 messages; if no PBCCH is allocated in the cell, SI3, SI13 and, if available, SI1 messages see 3GPP TS 4.060) related to a single reporting cell, to a controlling BSS.
- In the present specification, NACC between UTRAN and GERAN is restricted to the case of a controlling RNS and a serving BSS (i.e. assistance is provided for MSs moving from UTRAN to GERAN). The reporting cell

located in the serving BSS is therefore always a GERAN cell and shall be addressed as such (RAI + CI) in the NACC application containers.

- The presence of the *Application Container* IE is mandatory in the *RIM Container* IE of the RAN-INFORMATION PDU, except in the case of a RAN-INFORMATION/Initial Multiple Report PDU and of a RAN-INFORMATION/Single Report PDU, where the *Application Error Container* IE may be included instead.
- When multiple reports from a certain cell have been requested, the RAN-Information Send procedure shall be triggered every time the set of NACC related (packet) system information for this cell is changed; the NACC application shall request acknowledgements.
- The *Application Container* IE included in the *RIM container* IE of a RAN-INFORMATION/End PDU or of a RAN-INFORMATION/Stop PDU shall contain only the identity of the reporting cell.

9 General Protocol Error Handling

Refer to General Protocol Error Handling/3GPP TS 48.016. In addition:

- any type of BSSGP PDU received without an expected conditional IE is discarded and a STATUS PDU (cause "Missing conditional IE") is sent;
- any type of BSSGP PDU received without a mandatory IE is discarded and a STATUS PDU (cause "Missing mandatory IE") is sent;
- any type of BSSGP PDU received with a syntactical error in an expected conditional IE is discarded and a STATUS PDU (cause "Conditional IE error") is sent;
- any type of BSSGP PDU received with a syntactical error in a mandatory IE is discarded and a STATUS PDU (cause "Invalid mandatory information") is sent;
- any type of BSSGP PDU received for a feature that is not negotiated is discarded and a STATUS PDU (cause "PDU not compatible with the feature set") is sent.

Some BSSGP PDU shall contain one and only one conditional IE amongst a defined list of possible conditional IE (e.g. PAGING-PS PDU). If such a BSSGP PDU is received with more than one conditional IE amongst the defined list of possible conditional IE, as defined in sub-clause 10, the PDU is discarded and a STATUS PDU (cause "Unexpected conditional IE") is sent.

10 PDU functional definitions and contents

10.1 General Structure Of A PDU

Refer to General Structure Of A PDU/3GPP TS 48.016.

SGSN to BSS

10.2 PDU functional definitions and contents at RL and BSSGP SAPs

10.2.1 DL-UNITDATA

Direction:

This PDU is sent to the BSS to transfer an LLC-PDU across the radio interface to an MS.

PDU type: DL-UNITDATA

Table 10.2.1: DL-UNITDATA PDU contents

| Information element | Type / Reference | Presence | Format | Length |
|------------------------------------|------------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI (current) | TLLI/11.3.35 | М | V | 4 |
| QoS Profile | QoS Profile/11.3.28 | М | V | 3 |
| PDU Lifetime | PDU Lifetime/11.3.25 | М | TLV | 4 |
| MS Radio Access apability (note 1) | MS Radio Access Capability/11.3.22 | 0 | TLV | 7-? |
| Priority | Priority/11.3.27 | 0 | TLV | 3 |
| DRX Parameters | DRX Parameters/11.3.11 | 0 | TLV | 4 |
| IMSI | IMSI/11.3.14 | 0 | TLV | 5-10 |
| TLLI (old) | TLLI/11.3.35 | 0 | TLV | 6 |
| PFI | PFI/11.3.42 | 0 | TLV | 3 |
| LSA Information | LSA Information/11.3.19 | 0 | TLV | 7-? |
| Service UTRAN CCO | Service UTRAN CCO/11.3.47 | 0 | TLV | 3 |
| Alignment octets | Alignment octets/11.3.1 | 0 | TLV | 2-5 |
| LLC-PDU (note 2) | LLC-PDU/11.3.15 | М | TLV | 2-? |

NOTE 1: The field shall be present if there is valid MS Radio Access Capability information known by the SGSN; the field shall not be present otherwise.

10.2.2 UL-UNITDATA

This PDU transfers an MS's LLC-PDU and its associated radio interface information across the Gb-interface.

PDU type: UL-UNITDATA

Direction: BSS to SGSN

Table 10.2.2: UL-UNITDATA PDU content

| Information element | Type / Reference | Presence | Format | Length |
|---|-----------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | V | 4 |
| QoS Profile | QoS Profile/11.3.28 | М | V | 3 |
| Cell Identifier | Cell Identifier/11.3.9 | М | TLV | 10 |
| PFI | PFI/11.3.42 | 0 | TLV | 3 |
| LSA Identifier List | LSA Identifier List/11.3.18 | 0 | TLV | 3-? |
| Alignment octets | Alignment octets/11.3.1 | 0 | TLV | 2-5 |
| LLC-PDU (note) | LLC-PDU/11.3.15 | M | TLV | 2-? |
| NOTE: The LLC-PDU Length Indicator may be zero. | | | | |

10.2.3 RA-CAPABILITY

This PDU informs the BSS of the new Radio Access Capability of an MS.

PDU type: RA-CAPABILITY

Direction: SGSN to BSS

Table 10.2.3: RA-CAPABILITY PDU content

| Information element | Type / Reference | Presence | Format | Length |
|----------------------------|------------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| MS Radio Access Capability | MS Radio Access Capability/11.3.22 | М | TLV | 7-? |

10.2.4 PTM-UNITDATA

This shall be developed in GPRS phase 2.

NOTE 2: The LLC-PDU Length Indicator may be zero.

10.3 PDU functional definitions and contents at GMM SAP

10.3.1 PAGING PS

This PDU indicates that a BSS shall initiate the packet paging procedure for an MS within a group of cells.

PDU type: PAGING PS
Direction: SGSN to BSS

Table 10.3.1: PAGING PS PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------------|-----------------------------------|------------------|-------------|------------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| IMSI | IMSI/11.3.14 | M | TLV | 5 -10 |
| DRX Parameters | DRX Parameters/11.3.11 | 0 | TLV | 4 |
| BVCI a) | BVCI/11.3.6 | С | TLV | 4 |
| Location Area (note) | Location Area/11.3.17 | С | TLV | 7 |
| Routeing Area (note) | Routeing Area/11.3.31 | С | TLV | 8 |
| BSS Area Indication (note) | BSS Area Indication/11.3.3 | С | TLV | 3 |
| PFI | PFI/11.3.42 | 0 | TLV | 3 |
| ABQP | ABQP/11.3.43 | 0 | TLV | 13-? |
| QoS Profile | QoS Profile/11.3.28 | M | TLV | 5 |
| P-TMSI | TMSI/11.3.36 | 0 | TLV | 6 |
| NOTE: One and only one | e of the conditional IEs shall be | e present. No re | eneated ins | stances of |

NOTE: One and only one of the conditional IEs shall be present. No repeated instances of the conditional IEs are permissible (e.g. one and only one Location Area shall be present).

10.3.2 PAGING CS

This PDU indicates that a BSS shall initiate a circuit-switched paging procedure for an MS within a group of cells.

PDU type: PAGING CS
Direction: SGSN to BSS

Table 10.3.2: PAGING CS PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|------------------------------|----------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| IMSI | IMSI/11.3.14 | М | TLV | 5 -10 |
| DRX Parameters | DRX Parameters/11.3.11 | М | TLV | 4 |
| BVCI a) | BVCI/11.3.6 | С | TLV | 4 |
| Location Area (note 1) | Location Area/11.3.17 | C | TLV | 7 |
| Routeing Area (note 1) | Routeing Area/11.3.31 | C | TLV | 8 |
| BSS Area Indication (note 1) | BSS Area Indication/11.3.3 | C | TLV | 3 |
| TLLI | TLLI/11.3.35 | 0 | TLV | 6 |
| Channel needed (note 2) | Channel needed/11.3.10 | 0 | TLV | 3 |
| eMLPP-Priority (note 2) | eMLPP-Priority/11.3.12 | 0 | TLV | 3 |
| TMSI (note 2) | TMSI/11.3.36 | 0 | TLV | 6 |
| Global CN-Id (note 2) | Global CN-Id/11.3.69 | 0 | TLV | 7 |

NOTE 1: One and only one of the conditional IEs shall be present. No repeated instances of the conditional IEs are permissible (e.g. one and only one Location Area shall be present).

NOTE 2: These fields are provided by the MSC via the Gs-Interface.

RA-CAPABILITY-UPDATE 10.3.3

This PDU requests that the SGSN send an MS's current Radio Access capability or IMSI to the BSS.

PDU type: RA-CAPABILITY-UPDATE

Direction: BSS to SGSN

Table 10.3.3: RA-CAPABILITY-UPDATE PDU content

| Information element | Type / Reference | Presence | Format | Length |
|---------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| Tag | Tag/11.3.34 | M | TLV | 3 |

10.3.4 RA-CAPABILITY-UPDATE-ACK

This PDU provides the BSS with an MS's current Radio Access capability and IMSI.

PDU type: RA-CAPABILITY-UPDATE-ACK

SGSN to BSS Direction:

Table 10.3.4: RA-CAPABILITY-UPDATE-ACK PDU content

| Information element | Type / Reference | Presence | Format | Length |
|---|---------------------------------------|----------|--------|-----------------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| Tag | Tag/11.3.34 | М | TLV | 3 |
| IMSI (note) | IMSI/11.3.14 | С | TLV | 5 -10 |
| RA-Cap-UPD-CAUSE | RA-Cap-UPD- CAUSE/11.3.30 | М | TLV | 3 |
| MS Radio Access Capability | MS Radio Access Capability/11.3.22 | С | TLV | 7-? |
| NOTE: If RA-Cap-UPD-CAUSE indicates failure of the RA-CAPABILITY-UPDATE | | | |) the a music a |

procedure due to TLLI unknown in SGSN the IMSI IE will not be present. Otherwise,

the IMSI will be present.

RADIO-STATUS 10.3.5

This PDU indicates that an exception condition related to the radio interface has occurred.

PDU type: **RADIO-STATUS**

Direction: BSS to SGSN

Table 10.3.5: RADIO STATUS PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|---|---------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI (note) | TLLI/11.3.35 | С | TLV | 6 |
| TMSI (note) | TMSI/11.3.36 | С | TLV | 6 |
| IMSI (note) | IMSI/11.3.14 | С | TLV | 5-10 |
| Radio Cause | Radio Cause/11.3.29 | М | TLV | 3 |
| NOTE: One and only one of the conditional IEs shall be present. | | | | |

10.3.6 SUSPEND

This PDU indicates that an MS wishes to suspend its GPRS service.

PDU type: SUSPEND
Direction: BSS to SGSN

Table 10.3.6: SUSPEND PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-----------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | М | TLV | 8 |

10.3.7 SUSPEND-ACK

This PDU positively acknowledges the reception of a SUSPEND PDU for an MS.

PDU type: SUSPEND-ACK
Direction: SGSN to BSS

Table 10.3.7: SUSPEND-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--------------------------|----------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | M | TLV | 8 |
| Suspend Reference Number | Suspend Reference Number/11.3.33 | M | TLV | 3 |

10.3.8 SUSPEND-NACK

This PDU negatively acknowledges the reception of a SUSPEND PDU for an MS.

PDU type: SUSPEND-NACK

Direction: SGSN to BSS

Table 10.3.8: SUSPEND-NACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-----------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | M | TLV | 8 |
| Cause | Cause/11.3.8 | 0 | TLV | 3 |

10.3.9 RESUME

This PDU indicates that an MS wishes to RESUME its GPRS service.

PDU type: RESUME

Direction: BSS to SGSN

Table 10.3.9: RESUME PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--------------------------|----------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | М | TLV | 8 |
| Suspend Reference Number | Suspend Reference Number/11.3.33 | М | TLV | 3 |

10.3.10 RESUME-ACK

This PDU positively acknowledges the reception of a RESUME PDU for an MS.

PDU type: RESUME-ACK
Direction: SGSN to BSS

Table 10.3.10: RESUME-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-----------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | М | TLV | 8 |

10.3.11 RESUME-NACK

This PDU negatively acknowledges the reception of a RESUME PDU for an MS.

PDU type: RESUME-NACK

Direction: SGSN to BSS

Table 10.3.11: RESUME-NACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-----------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Routeing Area | Routeing Area/11.3.31 | M | TLV | 8 |
| Cause | Cause/11.3.8 | 0 | TLV | 3 |

10.4 PDU functional definitions and contents at NM SAP

10.4.1 FLUSH-LL

This PDU informs a BSS that an MS has moved from one cell to another.

PDU type: FLUSH-LL

Direction: SGSN to BSS

Table 10.4.1: FLUSH LL PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| BVCI (old) | BVCI/11.3.6 | М | TLV | 4 |
| BVCI (new) | BVCI/11.3.6 | 0 | TLV | 4 |
| NSEI (new) | NSEI/11.3.48 | O (note) | TLV | 4 |

NOTE: NSEI (new) is included if the SGSN supports "Inter-NSE re-routing" or "LCS Procedures" and the old NSE supports the "Inter-NSE re-routing" or "LCS Procedures" and the cell change is an Inter-NSE cell change within a routing area.

10.4.2 FLUSH-LL-ACK

This PDU indicates that LLC-PDU(s) buffered for an MS in the old cell have been either deleted or transferred to the new cell within the routing area.

PDU type: FLUSH-LL-ACK

Direction: BSS to SGSN

Table 10.4.2: FLUSH LL ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|---------------------------|-----------------------------------|------------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| Flush Action | Flush Action/11.3.13 | M | TLV | 3 |
| BVCI (new) | BVCI/11.3.13 | C (note 1) | TLV | 4 |
| Number of octets affected | Number of octets affected/11.3.41 | M | TLV | 5 |
| NSEI (new) | NSEI/11.3.48 | C (note 2) | TLV | 4 |

NOTE 1: BVCI (new) is included only if Flush action indicated that LLC-PDUs are transferred.

NOTE 2: NSEI (new) is included only if BVCI(new) is included and NSEI (new) is received in the FLUSH-LL PDU.

10.4.3 LLC-DISCARDED

This PDU indicates that a number of buffered LLC-PDUs in a cell for an MS have been deleted inside the BSS (because of PDU Lifetime expiration or radio outage for example). The LLC frames and the related octets deleted by the BSS as a consequence of a FLUSH-LL procedure (see sub-clause 8.1) shall not be reported a second time by means of an LLC-DISCARDED PDU.

PDU type: LLC-DISCARDED

Direction: BSS to SGSN

Table 10.4.3: LLC DISCARDED PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--|-----------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| LLC Frames Discarded | LLC Frames Discarded/11.3.16 | М | TLV | 3 |
| BVCI | BVCI/11.3.6 | M | TLV | 4 |
| Number of octets deleted | Number of octets affected/11.3.41 | М | TLV | 5 |
| PFI (note) | PFI/11.3.42 | 0 | TLV | 3 |
| NOTE: The PFI may be provided in case the PFC flow control feature is negotiated. It | | | | |

NOTE: The PFI may be provided in case the PFC flow control feature is negotiated. It corresponds to the Packet Flow Identifier of the PFC for which LLC frames have been discarded.

10.4.4 FLOW-CONTROL-BVC

This PDU informs the flow control mechanism at an SGSN of the status of a BVC's maximum acceptable SGSN to BSS throughput on the Gb interface.

PDU type: FLOW-CONTROL-BVC

Direction: BSS to SGSN

Table 10.4.4: FLOW-CONTROL-BVC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|---------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| Tag | Tag/11.3.34 | М | TLV | 3 |
| BVC Bucket Size | BVC Bucket Size/11.3.5 | M | TLV | 4 |
| Bucket Leak Rate | Bucket Leak Rate/11.3.4 | М | TLV | 4 |
| Bmax default MS | Bmax default MS/11.3.2 | М | TLV | 4 |
| R_default_MS | R_default_MS/11.3.32 | М | TLV | 4 |
| Bucket_Full Ratio | Bucket_Full Ratio/11.3.46 | С | TLV | 3 |
| BVC Measurement | BVC Measurement/11.3.7 | 0 | TLV | 4 |

10.4.5 FLOW-CONTROL-BVC-ACK

This PDU informs the flow control mechanism at the BSS that the SGSN has received the FLOW-CONTROL-BVC PDU indicated by the Tag.

PDU type: FLOW-CONTROL-BVC-ACK

Direction: SGSN to BSS

Table 10.4.5: FLOW-CONTROL-BVC-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| Tag | Tag/11.3.34 | M | TLV | 3 |

10.4.6 FLOW-CONTROL-MS

This PDU informs the flow control mechanism at an SGSN of the status of an MS's maximum acceptable SGSN to BSS throughput on the Gb interface.

PDU type: FLOW-CONTROL-MS

Direction: BSS to SGSN

Table 10.4.6: FLOW-CONTROL-MS PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|---------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Tag | Tag/11.3.34 | M | TLV | 3 |
| MS Bucket Size | MS Bucket Size/11.3.21 | M | TLV | 4 |
| Bucket Leak rate | Bucket Leak rate/11.3.4 | М | TLV | 4 |
| Bucket_Full Ratio | Bucket_Full Ratio/11.3.46 | С | TLV | 3 |

10.4.7 FLOW-CONTROL-MS-ACK

This PDU informs the flow control mechanism at the BSS that the SGSN has received the FLOW-CONTROL-MS PDU indicated by the TLLI and the Tag.

PDU type: FLOW-CONTROL-MS-ACK

Direction: SGSN to BSS

Table 10.4.7: FLOW-CONTROL-MS-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Tag | Tag/11.3.34 | М | TLV | 3 |

10.4.8 BVC-BLOCK

This PDU indicates that the contained BVC shall be blocked at the recipient entity.

PDU type: BVC-BLOCK

Direction: BSS to SGSN

Table 10.4.8: BVC-BLOCK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| BVCI | BVCI/11.3.6 | М | TLV | 4 |
| Cause | Cause/11.3.8 | М | TLV | 3 |

10.4.9 BVC-BLOCK-ACK

This PDU acknowledges that a BVC has been blocked.

PDU type: BVC-BLOCK-ACK

Direction: SGSN to BSS

Table 10.4.9: BVC-BLOCK-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| BVCI | BVCI/11.3.6 | М | TLV | 4 |

10.4.10 BVC-UNBLOCK

This PDU indicates that the identified BVC shall be unblocked at the recipient entity.

PDU type: BVC-UNBLOCK

Direction: BSS to SGSN

Table 10.4.10: BVC-UNBLOCK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| BVCI | BVCI/11.3.6 | M | TLV | 4 |

10.4.11 BVC-UNBLOCK-ACK

This PDU acknowledges that a BVC has been unblocked.

PDU type: BVC-UNBLOCK-ACK

Direction: SGSN to BSS

Table 10.4.11: BVC-UNBLOCK-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| BVCI | BVCI/11.3.6 | M | TLV | 4 |

10.4.12 BVC-RESET

This PDU indicates that BVC initialisation is required, e.g. because of a BVC failure.

PDU type: BVC-RESET

Direction: SGSN to BSS, BSS to SGSN

Table 10.4.12: BVC-RESET PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--------------------------|------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| BVCI | BVCI/11.3.6 | М | TLV | 4 |
| Cause | Cause/11.3.8 | М | TLV | 3 |
| Cell Identifier (note 1) | | С | TLV | 10 |
| Feature bitmap (note 2) | Feature bitmap/11.3.40 | 0 | TLV | 3 |

NOTE 1: The Cell Identifier IE is mandatory in the BVC-RESET PDU sent from BSS to SGSN in order to reset a BVC corresponding to a PTP functional entity. The Cell Identifier IE shall not be used in any other BVC-RESET PDU.

NOTE 2: The Feature bitmap is only sent in a BVC-RESET PDU related to the signalling BVC. Absence of this IE implies no optional features are available over the NSE.

10.4.13 BVC-RESET-ACK

This PDU indicates that BVC initialisation has been executed.

PDU type: BVC-RESET-ACK

Direction: BSS to SGSN, SGSN to BSS

Table 10.4.13: BVC-RESET-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--------------------------|------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| BVCI | BVCI/11.3.6 | M | TLV | 4 |
| Cell Identifier (note 1) | | С | TLV | 10 |
| Feature bitmap (note 2) | Feature bitmap/11.3.40 | 0 | TLV | 3 |

NOTE 1: The Cell Identifier IE is mandatory in the BVC-RESET-ACK PDU sent from BSS to SGSN in response to reset a BVC corresponding to a PTP functional entity. The Cell Identifier IE shall not be used in any other BVC-RESET-ACK PDU.

NOTE 2: The Feature bitmap is only sent in a BVC-RESET-ACK PDU related to the signalling BVC. Absence of this IE implies no optional features are available over the NSE.

10.4.14 STATUS

This PDU indicates that an exception condition occurred.

PDU type: STATUS

Direction: SGSN to BSS, BSS to SGSN

Table 10.4.14: STATUS PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|----------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Cause | Cause/11.3.8 | М | TLV | 3 |
| BVCI | BVCI/11.3.6 | С | TLV | 4 |
| PDU In Error (note) | PDU In Error/11.3.24 | 0 | TLV | 3-? |

NOTE: This is the whole PDU (starting with the [PDU type]) within which an error was detected. This PDU may be truncated if it exceeds the information carrying capacity of the underlying network service.

10.4.14.1 Static conditions for BVCI

The "BVCI" IE shall be included when the "Cause" IE is set to one of the following values:

a) "BVCI blocked";

b) "BVCI unknown";

and shall not be included otherwise.

10.4.15 SGSN-INVOKE-TRACE

This PDU indicates that the BSS shall begin the production of a trace record for an MS.

PDU type: SGSN-INVOKE-TRACE

Direction: SGSN to BSS

Table 10.4.15: SGSN-INVOKE-TRACE PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| Trace Type | Trace Type/11.3.38 | M | TLV | 3 |
| Trace Reference | Trace Reference/11.3.37 | M | TLV | 4 |
| Trigger Id | Trigger Id/11.3.40 | 0 | TLV | 4-24 |
| Mobile Id | Mobile Id/11.3.20 | 0 | TLV | 3-10 |
| OMC Id | OMC Id/11.3.23 | 0 | TLV | 4-24 |
| TransactionId | TransactionId/11.3.39 | 0 | TLV | 4 |

10.4.16 DOWNLOAD-BSS-PFC

This PDU requests a SGSN to initiate a CREATE-BSS-PFC procedure.

PDU type: DOWNLOAD-BSS-PFC

Direction: BSS to SGSN

Table 10.4.16: DOWNLOAD-BSS-PFC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| PFI | PFI/11.3.42 | М | TLV | 3 |

10.4.17 CREATE-BSS-PFC

This PDU allows the SGSN to request that a BSS create or modify a BSS Packet Flow Context.

PDU type: CREATE-BSS-PFC

Direction: SGSN to BSS

Table 10.4.17: CREATE-BSS-PFC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|---------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| IMSI | IMSI/11.3.14 | 0 | TLV | 5 –10 |
| PFI | PFI/11.3.42 | M | TLV | 3 |
| PFT | GPRS Timer/11.3.44 | M | TLV | 3 |
| ABQP | ABQP/11.3.43 | M | TLV | 13-? |
| Service UTRAN CCO | Service UTRAN CCO/11.3.47 | 0 | TLV | 3 |

10.4.18 CREATE-BSS-PFC-ACK

This PDU allows the BSS to acknowledge a request from the SGSN for the creation or modification of a BSS Packet Flow Context.

PDU type: CREATE-BSS-PFC-ACK

Direction: BSS to SGSN

Table 10.4.18: CREATE-BSS-PFC-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |
| ABQP | ABQP/11.3.43 | M | TLV | 13-? |

10.4.19 CREATE-BSS-PFC-NACK

This PDU allows the BSS to Nack a request from the SGSN for the creation of a BSS Packet Flow Context.

PDU type: CREATE-BSS-PFC-NACK

Direction: BSS to SGSN

Table 10.4.19: CREATE-BSS-PFC-NACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |
| Cause | Cause/11.3.8 | М | TLV | 3 |

10.4.20 MODIFY-BSS-PFC

This PDU allows the BSS to request a modification of a BSS Packet Flow Context.

PDU type: MODIFY-BSS-PFC

Direction: BSS to SGSN

Table 10.4.20: MODIFY-BSS-PFC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |
| ABQP | ABQP/11.3.43 | M | TLV | 13-? |

10.4.21 MODIFY-BSS-PFC-ACK

This PDU allows the SGSN to acknowledge a modification to a BSS Packet Flow Context.

PDU type: MODIFY-BSS-PFC-ACK

Direction: SGSN to BSS

Table 10.4.21: MODIFY-BSS-PFC-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |
| PFT | GPRS Timer | M | TLV | 3 |
| ABQP | ABQP/11.3.43 | M | TLV | 13-? |

10.4.22 DELETE-BSS-PFC

This PDU allows the SGSN to request that a BSS delete a BSS Packet Flow Context.

PDU type: DELETE-BSS-PFC

Direction: SGSN to BSS

Table 10.4.22: DELETE-BSS-PFC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |

10.4.23 DELETE-BSS-PFC-ACK

This PDU allows the BSS to acknowledge a request for the deletion of a BSS Packet Flow Context.

PDU type: DELETE-BSS-PFC-ACK

Direction: BSS to SGSN

Table 10.4.23: DELETE-BSS-PFC-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| PFI | PFI/11.3.42 | M | TLV | 3 |

10.4.24 FLOW-CONTROL-PFC

This PDU provides the SGSN with flow control information regarding one or more PFC(s) of a given Mobile Station.

PDU type: FLOW-CONTROL-PFC

Direction: BSS to SGSN

Table 10.4.24: FLOW-CONTROL-PFC PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|-------------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Tag | Tag/11.3.34 | М | TLV | 3 |
| MS Bucket Size | MS Bucket Size/11.3.21 | 0 | TLV | 4 |
| Bucket Leak rate | Bucket Leak rate/11.3.4 | 0 | TLV | 4 |
| Bucket_Full Ratio | Bucket_Full Ratio/11.3.46 | 0 | TLV | 3 |
| PFC flow control parameters | PFC flow control parameters/11.3.68 | М | TLV | |

10.4.25 FLOW-CONTROL-PFC-ACK

This PDU informs the flow control mechanism at the BSS that the SGSN has received the FLOW-CONTROL-PFC PDU indicated by the TLLI and the Tag.

PDU type: FLOW-CONTROL-PFC-ACK

Direction: SGSN to BSS

Table 10.4.25: FLOW-CONTROL-PFC-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| Tag | Tag/11.3.34 | М | TLV | 3 |

10.5 PDU functional definitions and contents at LCS SAP

10.5.1 PERFORM-LOCATION-REQUEST

This PDU allows the SGSN to request the BSS to perform a location procedure for the target MS.

PDU type: PERFORM-LOCATION-REQUEST

Direction: SGSN to BSS

Table 10.5.1: PERFORM-LOCATION-REQUEST PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|--|---------------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| IMSI | IMSI/11.3.14 | M | TLV | 5-10 |
| DRX Parameters (note 1) | DRX Parameters/11.3.11 | 0 | TLV | 4 |
| BVCI (PCU-PTP) | BVCI/11.3.6 | M | TLV | 4 |
| NSEI (PCU-PTP) | NSEI/11.3.48 | M | TLV | 4-? |
| Location Type | Location Type/11.3.53 | M | TLV | 3-? |
| Cell Identifier | Cell Identifier/11.3.9 | M | TLV | 10 |
| LCS Capability (note 2) | LCS Capability/11.3.59 | 0 | TLV | 3-? |
| LCS Priority | LCS Priority/11.3.57 | 0 | TLV | 3-? |
| LCS QoS | LCS QoS/11.3.50 | 0 | TLV | 3-? |
| LCS Client Type (note 3) | LCS Client Type/11.3.51 | С | TLV | 3-? |
| Requested GPS Assistance Data (note 4) | Requested GPS Assistance Data/11.3.52 | 0 | TLV | 3-? |

NOTE 1: This IE is present if the SGSN has valid DRX Parameters for the TLLI.

NOTE 2: This IE is present if the SGSN has received the information from the MS.

NOTE 3: This IE is present if the location type indicates a request for a location estimate and is optional otherwise.

NOTE 4: This IE is present if GPS assistance data is requested.

10.5.2 PERFORM-LOCATION-RESPONSE

This PDU allows the BSS to respond to the SGSN after the completion of the location procedure.

PERFORM-LOCATION-RESPONSE PDU type:

Direction: BSS to SGSN

Table 10.5.2: PERFORM-LOCATION-RESPONSE PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------------|---------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| TLLI | TLLI/11.3.35 | М | TLV | 6 |
| BVCI (PCU-PTP) | BVCI/11.3.6 | M | TLV | 4 |
| Location Estimate (note 1) | Location Estimate/11.3.54 | С | TLV | 3-? |
| Positioning Data | Positioning Data/11.3.55 | 0 | TLV | 3-? |
| Deciphering Keys (note 2) | Deciphering Keys/11/.3.56 | С | TLV | 3-? |
| LCS Cause (note 3) | LCS Cause/11.3.58 | 0 | TLV | 3-? |

NOTE 1: This IE is present if the location of the target MS was requested and the

procedure succeeded.

NOTE 2: This IE is present if the deciphering keys were requested and the procedure

succeeded.

NOTE 3: This IE is present if the procedure failed.

10.5.3 PERFORM-LOCATION-ABORT

This PDU allows the SGSN to request the BSS to ABORT the LCS procedure.

PDU type: PERFORM-LOCATION-ABORT

Direction: SGSN to BSS

Table 10.5.3: PERFORM-LOCATION-ABORT PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|-------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| BVCI (PCU-PTP) | BVCI/11.3.6 | M | TLV | 4 |
| LCS Cause | LCS Cause/11.3.58 | M | TLV | 3-? |

10.5.4 POSITION-COMMAND

This PDU allows the BSS to request the SGSN to perform the position command procedure.

PDU type: POSITION-COMMAND

BSS to SGSN Direction:

Table 10.5.4: POSITION-COMMAND PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|----------------------|--------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | M | V | 1 |
| TLLI | TLLI/11.3.35 | M | TLV | 6 |
| BVCI (PCU-PTP) | BVCI/11.3.6 | M | TLV | 4 |
| RRLP Flags | RRLP Flags/11.3.60 | M | TLV | 3 |
| RRLP APDU | RRLP APDU/11.3.49 | М | TLV | 3-? |

10.5.5 POSITION-RESPONSE

This PDU allows the SGSN to respond to the position command request procedure.

PDU type: POSITION-RESPONSE

Direction: SGSN to BSS

Table 10.5.5: POSITION-RESPONSE PDU content

| Information elements | Type / Reference | Presence | Format | Length | | | |
|---|--------------------|----------|--------|--------|--|--|--|
| PDU type | PDU type/11.3.26 | M | V | 1 | | | |
| TLLI | TLLI/11.3.35 | М | TLV | 6 | | | |
| BVCI (PCU-PTP) | BVCI/11.3.6 | M | TLV | 4 | | | |
| RRLP Flags a) | RRLP Flags/11.3.60 | С | TLV | 3 | | | |
| RRLP APDU a) | RRLP APDU/11.3.49 | С | TLV | 3-? | | | |
| LCS Cause b) LCS Cause/11.3.58 O TLV 3-? | | | | | | | |
| a) This IE is present if the procedure succeeded. | | | | | | | |
| b) This IE is present if the procedure failed. | | | | | | | |

10.6 PDU functional definitions and contents at RIM SAP

10.6.1 RAN-INFORMATION-REQUEST

The RAN-INFORMATION-REQUEST PDU allows a controlling BSS to request information from another BSS.

PDU type: RAN-INFORMATION-REQUEST

Direction: BSS to SGSN

SGSN to BSS

Table 10.6.1: RAN-INFORMATION-REQUEST PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|---------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Destination Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| Source Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| RIM Container | RAN-INFORMATION-REQUEST RIM | М | TLV | 3-? |
| | Container/11.3.62a.1 | | | |

10.6.2 RAN-INFORMATION

The RAN-INFORMATION PDU allows a serving BSS to send information to a controlling BSS.

PDU type: RAN-INFORMATION

Direction: BSS to SGSN

SGSN to BSS

Table 10.6.2: RAN-INFORMATION-PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|---------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Destination Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| Source Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| RIM Container | RAN-INFORMATION RIM | М | TLV | 3-? |
| | Container/11.3.62a.2 | | | |

10.6.3 RAN-INFORMATION-ACK

The RAN-INFORMATION-ACK PDU allows a controlling BSS to acknowledge the reception of a RAN-INFORMATION-APPLICATION-ERROR PDU.

PDU type: RAN-INFORMATION-ACK

Direction: BSS to SGSN

SGSN to BSS

Table 10.6.3: RAN-INFORMATION-ACK PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|---------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Destination Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| Source Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| RIM Container | RAN-INFORMATION-ACK RIM | М | TLV | 3-? |
| | Container/11.3.62a.3 | | | |

10.6.4 RAN-INFORMATION-ERROR

The RAN-INFORMATION-ERROR PDU allows a BSS to send an error PDU back to an originating BSS as a response to a RAN-INFORMATION, a RAN-INFORMATION-REQUEST, a RAN-INFORMATION-ACK or a RAN-INFORMATION-APPLICATION-ERROR PDU.

PDU type: RAN-INFORMATION-ERROR

Direction: BSS to SGSN

SGSN to BSS

Table 10.6.4: RAN-INFORMATION-ERROR content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|---------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Destination Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| Source Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| RIM Container | RAN-INFORMATION-ERROR | М | TLV | 3-? |
| | RIM Container/11.3.62a.4 | | | |

10.6.5 RAN-INFORMATION-APPLICATION-ERROR

The RAN-INFORMATION-APPLICATION-ERROR PDU allows a controlling BSS to inform the serving BSS about erroneous application information in a previously received RAN-INFORMATION PDU.

PDU type: RAN-INFORMATION-APPLICATION-ERROR

Direction: BSS to SGSN

SGSN to BSS

Table 10.6.5: RAN-INFORMATION-APPLICATION-ERROR PDU content

| Information elements | Type / Reference | Presence | Format | Length |
|-----------------------------|---------------------------------|----------|--------|--------|
| PDU type | PDU type/11.3.26 | М | V | 1 |
| Destination Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| Source Cell Identifier | RIM Routing Information/11.3.70 | М | TLV | 3-? |
| RIM Container | RAN-INFORMATION-APPLICATION- | M | TLV | 3-? |
| | ERROR RIM Container/11.3.62a.5 | | | |

11 General information elements coding

The figures and text in this sub-clause describe the Information Elements contents.

11.1 General structure of the information elements

Refer to General Structure Of The Information Elements/3GPP TS 48.016.

11.2 Information element description

Refer to Information Element Description/3GPP TS 48.016.

11.3 Information Element Identifier (IEI)

An Information Element Identifier (IEI) is identified by the same coding in all BSSGP PDUs.

Table 11.3: IEI types

| IEI coding | IEI Types |
|---------------|----------------------|
| (hexadecimal) | |
| x00 | Alignment Octets |
| x01 | Bmax default MS |
| x02 | BSS Area Indication |
| x03 | Bucket Leak Rate |
| x04 | BVCI |
| x05 | BVC Bucket Size |
| x06 | BVC Measurement |
| x07 | Cause |
| x08 | Cell Identifier |
| x09 | Channel needed |
| x0a | DRX Parameters |
| x0b | eMLPP-Priority |
| x0c | Flush Action |
| x0d | IMSI |
| x0e | LLC-PDU |
| x0f | LLC Frames Discarded |
| x10 | Location Area |
| x11 | Mobile Id |
| x12 | MS Bucket Size |

| IEI coding (hexadecimal) | IEI Types |
|-----------------------------|---|
| x13 | MS Radio Access Capability |
| x14 | OMC Id |
| x15 | PDU In Error |
| x16 | PDU Lifetime |
| x17 | Priority |
| x18 | QoS Profile |
| x19 | Radio Cause |
| x1a | RA-Cap-UPD-Cause |
| x1b | Routeing Area |
| x1c | R_default_MS |
| x1d | Suspend Reference Number |
| x1e | Tag |
| x1f | TLLI |
| x20 | TMSI |
| x21 | Trace Reference |
| x22 | Trace Type |
| x23 | TransactionId |
| x24 | Trigger Id |
| x25 | Number of octets affected |
| x26 | LSA Identifier List |
| x27 | LSA Information |
| x28 | Packet Flow Identifier |
| | |
| x29 | Packet Flow Timer |
| x3a | Aggregate BSS QoS Profile (ABQP) |
| x3b | Feature Bitmap |
| x3c | Bucket_Full Ratio |
| x3d | Service UTRAN CCO (Cell Change Order) |
| x3e | NSEI |
| x3f | RRLP APDU |
| x40 | LCS QoS |
| x41 | LCS Client Type |
| x42 | Requested GPS Assistance Data |
| x43 | Location Type |
| x44 | Location Estimate |
| x45 | Positioning Data |
| x46 | Deciphering Keys |
| x47 | LCS Priority |
| x48 | LCS Cause |
| x49 | LCS Capability |
| x4a | RRLP Flags |
| x4b | RIM Application Identity |
| x4c | RIM Sequence number |
| x4d | RAN-INFORMATION-REQUEST Application Container |
| x4e | RAN-INFORMATION Application Container |
| x4f | RIM PDU Indications |
| x50 | This value is reserved for future use and shall be treated by the recipient |
| | as an unknown IEI |
| x52 | PFC flow control parameters |
| x53 | Global CN-Id |
| x54 | RIM Routing Information |
| x55 | RIM Protocol Version Number |
| x56 | Application Error Container |
| x57 | RAN-INFORMATION-REQUEST RIM Container |
| x58 | RAN-INFORMATION RIM Container |
| x59 | RAN-INFORMATION-APPLICATION-ERROR RIM Container |
| x5a | RAN-INFORMATION-ACK RIM Container |
| x5b | RAN-INFORMATION-ERROR RIM Container |
| RESERVED | All values not explicitly shown are reserved for future use and shall be |
| | treated by the recipient as an unknown IEI |
| | Thousand by the recipions do all dilitionin IEI |

11.3.1 Alignment octets

The Alignment Octets are used to align a subsequent IEI onto a 32 bit boundary. The element coding is:

Table 11.3.1: Alignment octets IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|-------------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator (note) | | | | | | |
| octet 3-5 | | spare octet | | | | | | |
| NOTE: | The Length Indicator may indicate that from 0 to 3 spare octets are | | | | | | | |
| F | oresent. | | | | | | | |

11.3.2 Bmax default MS

This information element indicates the default bucket size (Bmax) in octets for an MS. The element coding is:

Table 11.3.2: Bmax default MS IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3-4 | | Bmax | | | | | | |

The Bmax field is coded as Bmas of BVC Bucket Size, see sub-clause 11.3.5.

11.3.3 BSS Area Indication

This element is used to indicate that the paging shall be done in all the cells within the BSS. The element coding is:

Table 11.3.3: BSS Area Indication IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|---|----|----|---|---|---|
| octet 1 | | | | IE | ΞI | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | BSS indicator | | | | | | |

The coding of octet 2 is a binary number indicating the Length of the remaining element.

The coding of octet 3 shall not be specified. The recipient shall ignore the value of this octet.

11.3.4 Bucket Leak Rate (R)

This information element indicates the leak rate (R) to be applied to a flow control bucket. The element coding is:

Table 11.3.4: Bucket Leak Rate IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|---|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3 | | R Value (MSB) | | | | | | | |
| octet 4 | | R Value (LSB) | | | | | | | |

The R field is the binary encoding of the rate information expressed in 100 bits/s increments, starting from 0×100 bits/s until 65 535 x 100 bits/s (6 Mbps).

11.3.5 BVC Bucket Size

This information element indicates the maximum bucket size (Bmax) in octets for a BVC. The element coding is:

Table 11.3.5: BVC Bucket Size IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|---|------|-------|---|---|---|
| octet 1 | | | | IE | ΞΙ | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Bmax (MSB) | | | | | | |
| octet 4 | | | | Bmax | (LSB) | | | |

The Bmax field is the binary encoding of the bucket-size information expressed in 100 octet increments, starting from 0×100 octets until 65 535 x 100 octets (6 Mbytes).

11.3.6 BVCI (BSSGP Virtual Connection Identifier)

The BVCI identifies a BVC. The element coding is:

Table 11.3.6: BVCI IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|--------------------|---|---|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-4 | | Unstructured value | | | | | | | |

11.3.7 BVC Measurement

This information element describes average queuing delay for a BVC. The element coding is:

Table 11.3.7: BVC Measurement IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|--------------------------------|---|---|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3,4 | | Delay Value (in centi-seconds) | | | | | | | |

The Delay Value field is coded as a 16-bit integer value in units of centi-seconds (one hundredth of a second). This coding provides a range of over 10 minutes in increments of 10 ms. As a special case, the hexadecimal value 0xFFFF (decimal 65 535) shall be interpreted as "infinite delay".

11.3.8 Cause

The Cause information element indicates the reason for an exception condition. The element coding is:

Table 11.3.8.a: Cause IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|---|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3 | | Cause value | | | | | | | |

Table 11.3.8.b: Cause coding

| Cause value Hexadecimal | semantics of coding |
|----------------------------|---|
| | All values not listed below shall be treated as |
| | "protocol error - unspecified" |
| x00 | Processor overload |
| x01 | Equipment failure |
| x02 | Transit network service failure |
| x03 | Network service transmission capacity modified |
| | from zero kbps to greater than zero kbps |
| x04 | Unknown MS |
| x05 | BVCI unknown |
| x06 | cell traffic congestion |
| x07 | SGSN congestion |
| x08 | O & M intervention |
| x09 | BVCI-blocked |
| x0a | PFC create failure |
| x20 | Semantically incorrect PDU |
| x21 | Invalid mandatory information |
| x22 | Missing mandatory IE |
| x23 | Missing conditional IE |
| x24 | Unexpected conditional IE |
| x25 | Conditional IE error |
| x26 | PDU not compatible with the protocol state |
| x27 | Protocol error - unspecified |
| x28 | PDU not compatible with the feature set |
| x29 | Requested Information not available |
| x2a | Unknown Destination address |
| x2b | Unknown RIM Application Identity |
| x2c | Invalid Container Unit Information |

11.3.9 Cell Identifier

This information element uniquely identifies one cell. The element coding is:

Table 11.3.9: Cell Identifier IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|-----------------|--|------------|----------|------------|----------|----------------------|---|--|
| octet 1 | | | | IE | El | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | |
| octets 3-8 | | | Identifica | | lefined ir | 1 3ĞPP 1 | octet 2) FS 24.00 | | |
| octets 9-10 | Octets 9 Cel | Octets 9 and 10 contain the value part (starting with octet 2) of the Cell Identity IE defined in 3GPP TS 24.008, not including 3GPP TS 24.008 IEI | | | | | | | |

11.3.10 Channel needed

This information element is coded as defined in 3GPP TS 29.018. It is relevant to circuit-switched paging requests. The element coding is:

Table 11.3.10: Channel needed IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|-------|---|---------|----------|------------|------------|---------|--------|
| octet 1 | | | | IE | El | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Rest of element coded as the value part of the Channel Needed | | | | | | |
| | PDU d | efined in | 3GPP T | S 29.018 | 3, not inc | luding 30 | GPP TS: | 29.018 |
| | | IEI | and 3GF | P TS 29 | .018 len | gth indica | ator | |

11.3.11 DRX Parameters

This information element contains MS specific DRX information. The element coding is:

Table 11.3.11: DRX Parameters IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----|--|----------|----------|-----------|-----------|-----------|---|
| octet 1 | | | | IE | <u> </u> | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |
| octet 3-n | | Rest of | element | coded as | the valu | ue part d | efined in | |
| | 3G | 3GPP TS 24.008, not including 3GPP TS 24.008 IEI and | | | | | | |
| | | 30 | SPP TS 2 | 24.008 o | ctet leng | th indica | tor | |

11.3.12 eMLPP-Priority

This element indicates the eMLPP-Priority of a PDU. The element coding is:

Table 11.3.12: eMLPP-Priority IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|--|--------|----------|------------|----------|---|---|--|
| octet 1 | | | | IE | ΞI | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | |
| octet 3 | | Rest of element coded as the value part of the eMLPP-Priority IE lefined in 3GPP TS 48.008, not including 3GPP TS 48.008 IEI and | | | | | | | |
| | | | 3GPP T | S 48.008 | 3 length i | ndicator | | | |

11.3.13 Flush Action

The Flush action information element indicates to the SGSN the action taken by the BSS in response to the flush request. The element coding is:

Table 11.3.13: Flush Action IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|--------|-------|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3 | | | | Action | value | | | | |

Table 11.3.14: Action coding

| Action value Hexadecimal | semantics of coding |
|-----------------------------|--|
| x00 | LLC-PDU(s) deleted |
| x01 | LLC-PDU(s) transferred |
| | All values not explicitly shown are reserved for |
| | future use |

11.3.14 IMSI

This information element contains the International Mobile Subscriber Identity. The element coding is:

Table 11.3.14: IMSI IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---------|-----------|-----------|--|---------------------|---------|---------|---------|--|--|
| octet 1 | | IEI | | | | | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | | |
| octet 3-n | octet 3 | s) of the | Mobile Id | MSI code dentity IE 24.008 IE indic | defined I and 3G | in 3GPP | TS 24.0 | 08, not | | |

11.3.15 LLC-PDU

This information element contains an LLC-PDU. The element coding is:

Table 11.3.15: LLC-PDU IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|----------------------|---|--------|----------|-----|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3 | | LLC-PDU (first part) | | | | | | | |
| octet n | | | L | LC-PDU | (last pa | rt) | | | |

11.3.16 LLC Frames Discarded

This element describes the number of LLC frames that have been discarded inside a BSS. The element coding is:

Table 11.3.16: LLC Frames Discarded IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------|------------|----------|-----------|----------|--------|---|
| octet 1 | | | | IE | ΞI | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |
| octet 3 | | Numb | er of frai | mes disc | arded (ir | n hexade | cimal) | |

11.3.17 Location Area

This element uniquely identifies one Location Area. The element coding is:

Table 11.3.17: Location Area IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|---|-----------|----------|-----------|----------------------|---|---|
| octet 1 | | | | IE | ΞΙ | | | |
| octet 2, 2a | | | | Length I | ndicator | • | | |
| octets 3-7 | | | Identific | | defined i | rting with n 3GPP | | |
| | | | IIICIUUI | ng sor r | 10 24. | 000 ILI | | |

The coding of octet 2 is a binary number indicating the Length of the remaining element.

11.3.18 LSA Identifier List

This information element uniquely identifies LSAs. The element coding is:

Table 11.3.18: LSA Identifier List IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|-----------|--------------------|-----------------------|--------------------|----------------------|----------------------|-----------|---|--|--|
| octet 1 | | | | IE | ΞΙ | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3-? | Rest of 6 | element S 48.00 | coded as 8 IEI and | s in 3GP 3GPP T | P TS 48. S 48.008 | 008, not 3 length | including | 9 | | |

11.3.19 LSA Information

This information element uniquely identifies LSAs, the priority of each LSA and the access right outside these LSAs. The element coding is:

Table 11.3.19: LSA Information IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|------|----------|-----------|-----------|----------|-----------|------------|-------|--|--|
| octet 1 | | IEI | | | | | | | | |
| octet 2, 2a | | | | Length I | ndicator | • | | | | |
| octet 3-? | Rest | of elem | ent code | d as in 3 | GPP TS | 48.008, | not inclu | iding | | |
| | 3GF | PP TS 48 | 3.008 IEI | and 3GF | PP TS 48 | 3.008 len | igth indic | ator | | |

11.3.20 Mobile Id

The element coding is:

Table 11.3.20: Mobile Id IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | |
|-------------|----|---|--------|----------|----------|-----------|---|---|--|--|--|
| octet 1 | | IEI | | | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | | |
| octet 3-n | | Octets 3-n contain either the IMSI, IMEISV or IMEI coded as the | | | | | | | | | |
| | | | | | | bile Iden | | | | | |
| | 3G | 3GPP TS 24.008, not including 3GPP TS 24.008 IEI and | | | | | | | | | |
| | | | 3GPP T | S 24.008 | 3 length | indcator | | | | | |

11.3.21 MS Bucket Size

This information element indicates an MS's bucket size (Bmax). The element coding is:

Table 11.3.21: MS Bucket Size IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|-----|-----|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-4 | | | | Brr | nax | | | | |

The Bmax field is coded as Bmax of BVC Bucket Size, see sub-clause 11.3.5.

11.3.22 MS Radio Access Capability

This information element contains the capabilities of the ME. The element coding is:

Table 11.3.22: MS Radio Access Capability IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|----|--|----------|-----------|-----------|------------|-----------|---|--|--|
| octet 1 | | | | IE | I | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3-? | | Rest of | element | coded as | the valu | ue part d | efined in | | | |
| | 30 | 3GPP TS 24.008, not including 3GPP TS 24.008 IEI and | | | | | | | | |
| | | 30 | SPP TS 2 | 24.008 od | tet lengt | th indicat | or. | | | |

11.3.23 OMC ld

The element coding is:

Table 11.3.23: OMC Id IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---------|-----------|--------|---------|------|---|--|
| octet 1 | | IÉI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-22 | | For | the OMC | identity. | see 3G | PP TS 1 | 2.20 | | |

11.3.24 PDU In Error

The element coding is:

Table 11.3.24: PDU In Error IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|------|----------|--------|----|---|---|--|
| octet 1 | | IÉI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-? | | • | Erro | oneous E | SSGP F | DU | • | | |

11.3.25 PDU Lifetime

This information element describes the PDU Lifetime for a PDU inside the BSS. The element coding is:

Table 11.3.25: PDU Lifetime IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3-4 | | Delay Value | | | | | | |

The Delay Value field is coded as Delay Value of BVC Measurement, see sub-clause 11.3.7.

11.3.26 PDU Type

The first octet of a BSSGP PDU shall contain the PDU type IE. The PDU type IE is one octet long.

Table 11.3.26: PDU Types

| PDU type coding | PDU Types |
|-----------------|---|
| (Hexadecimal) | PDUs between RL and BSSGP SAPs |
| x00 | DL-UNITDATA |
| x01 | UL-UNITDATA |
| x02 | RA-CAPABILITY |
| x03 | PTM-UNITDATA |
| | PDUs between GMM SAPs |
| x06 | PAGING PS |
| x07 | PAGING CS |
| x08 | RA-CAPABILITY-UPDATE |
| x09 | RA-CAPABILITY-UPDATE-ACK |
| x0a | RADIO-STATUS |
| x0b | SUSPEND |
| x0c | SUSPEND-ACK |
| x0d | SUSPEND-NACK |
| x0e | RESUME |
| x0f | RESUME-ACK |
| x10 | RESUME-NACK |
| | PDUs between NM SAPs |
| x20 | BVC-BLOCK |
| x21 | BVC-BLOCK-ACK |
| x22 | BVC-RESET |
| x23 | BVC-RESET-ACK |
| x24 | BVC-UNBLOCK |
| x25 | BVC-UNBLOCK-ACK FLOW-CONTROL-BVC |
| x26 | |
| x27 | FLOW-CONTROL-BVC-ACK FLOW-CONTROL-MS |
| x28 x29 | FLOW-CONTROL-MS-ACK |
| x2a | FLUSH-LL |
| x2b | FLUSH-LL-ACK |
| x2c | LLC-DISCARDED |
| x2d | FLOW-CONTROL-PFC |
| x2e | FLOW-CONTROL-PFC-ACK |
| x40 | SGSN-INVOKE-TRACE |
| x41 | STATUS |
| 0x50 | DOWNLOAD-BSS-PFC |
| 0x51 | CREATE-BSS-PFC |
| 0x52 | CREATE-BSS-PFC-ACK |
| 0x53 | CREATE-BSS-PFC-NACK |
| 0x54 | MODIFY-BSS-PFC |
| 0x55 | MODIFY-BSS-PFC-ACK |
| 0x56 | DELETE-BSS-PFC |
| 0x57 | DELETE-BSS-PFC-ACK |
| | PDUs between LCS SAPs |
| 0x60 | PERFORM-LOCATION-REQUEST |
| 0x61 | PERFORM-LOCATION-RESPONSE |
| 0x62 | PERFORM-LOCATION-ABORT |
| 0x63 | POSITION-COMMAND |
| 0x64 | POSITION-RESPONSE |
| 070 | PDUs between RIM SAPs |
| 0x70 | RAN-INFORMATION PEOUEST |
| 0x71 | RAN-INFORMATION ACK |
| 0x72 | RAN-INFORMATION EDROP |
| 0x73 | RAN-INFORMATION APPLICATION ERROR |
| 0x74 | RAN-INFORMATION-APPLICATION-ERROR |
| RESERVED | all values not explicitly shown are reserved for future use |

11.3.27 Priority

This element indicates the priority of a PDU. The element coding is:

Table 11.3.27: Priority IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|--------|----------|------------|----------|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | Rest of element coded as the value part of the Priority IE defined in | | | | | | | |
| | 3GPP TS 48.008, not including 3GPP TS 48.008 IEI and | | | | | | | |
| | | | 3GPP T | S 48.008 | 3 length i | ndicator | | |

11.3.28 QoS Profile

This information element describes the QoS Profile associated with a PDU. The element coding is:

Table 11.3.28.a: QoS Profile IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|--|---|---|---|----|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3-4 | Peak bit rate provided by the network, coded as the Bucket Leak | | | | | | | |
| | | Rate "R value" part, see sub-clause 11.3.4 (note) | | | | | | |
| octet 5 | SPARE C/R T A Precedence | | | | се | | | |
| NOTE: Th | NOTE: The bit rate 0 (zero) shall mean "best effort" in this IE. | | | | | | | |

[&]quot;Precedence" is coded as shown below (complying with 3GPP TS 23.060).

Table 11.3.28.b: Precedence coding

| coding | s | semantic | | | | | | |
|--------|-----------------|------------------------|--|--|--|--|--|--|
| | DL-UNITDATA | UL-UNITDATA | | | | | | |
| 000 | High priority | Radio priority 1 | | | | | | |
| 001 | Normal priority | Radio priority 2 | | | | | | |
| 010 | Low priority | Radio priority 3 | | | | | | |
| 011 | Reserved | Radio priority 4 | | | | | | |
| 100 | Reserved | Radio Priority Unknown | | | | | | |

All values not allocated are reserved. All reserved values shall be interpreted as value 010.

Table 11.3.28.c: "A bit" coding

| coding | semantic |
|--------|---|
| 0 | Radio interface uses RLC/MAC ARQ functionality |
| 1 | Radio interface uses RLC/MAC-UNITDATA functionality |

[&]quot;T-bit" is coded as shown below.

Table 11.3.28.d: "T bit" coding

| coding | semantic |
|--------|---|
| 0 | The SDU contains signalling (e.g. related to GMM) |
| 1 | The SDU contains data |

[&]quot;A-bit" is coded as shown below.

"C/R-bit" is coded as shown below.

Table 11.3.28.e: "C/R bit" coding

| coding | semantic |
|--------|---|
| 0 | The SDU contains a LLC ACK or SACK command/response |
| | frame type |
| 1 | The SDU does not contain a LLC ACK or SACK |
| | command/response frame type |

11.3.29 Radio Cause

This information element indicates the reason for an exception condition on the radio interface. The element coding is:

Table 11.3.29.a: Radio Cause IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|-------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Radio Cause value | | | | | | |

Table 11.3.29.b: Radio Cause value

| radio cause value Hexadecimal | semantics of coding |
|----------------------------------|--|
| x00 | Radio contact lost with the MS |
| x01 | Radio link quality insufficient to continue communication |
| x02 | Cell-reselection ordered |
| | All values not explicitly listed are reserved. If received, they shall be handled as "radio contact lost with the MS". |

11.3.30 RA-Cap-UPD-Cause

The RA-Cap-UPD-Cause indicates the success of the RA-CAPABILITY-UPDATE procedure or the reason of the failure. The element coding is:

Table 11.3.30.a: RA-Cap-UPD-Cause IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | RA-Cap-UPD Cause value | | | | | | |

Table 11.3.30.b: RA-Cap-UPD Cause value

| RA-Cap-UPD cause value | semantics of coding |
|------------------------|--|
| Hexadecimal | |
| x00 | OK, RA capability IE present |
| x01 | TLLI unknown in SGSN |
| x02 | No RA Capabilities or IMSI available for this MS |
| | All values not explicitly listed are reserved. If received, they shall be handled as "TLLI unknown in SGSN". |

11.3.31 Routeing Area

This element uniquely identifies one routeing area. The element coding is:

Table 11.3.31: Routeing Area IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|--------|----------|------------|------------|-----------|---------------------|----------|--------|
| octet 1 | | | | IE | El | | | |
| octet 2, 2a | | | | Length I | ndicator | • | | |
| octets 3-8 | Octets | 3 to 8 c | contain th | ne value j | oart (sta | rting with | octet 2) | of the |
| | Routi | ng Area | Identifica | ation IE d | efined in | ո 3ĞPP ⁻ | TS 24.00 | 8, not |
| | | | includi | ng 3GPF | TS 24. | 008 IEI | | |

The coding of octet 2 is a binary number indicating the Length of the remaining element.

11.3.32 R_default_MS

This information element indicates the default bucket leak rate (R) to be applied to a flow control bucket for an MS. The element coding is:

Table 11.3.32: R_default_MS IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|--------------------|---|---|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-4 | | R_default_MS value | | | | | | | |

The R_default_MS field is coded as The "R Value" of Bucket Leak Rate, see sub-clause 11.3.4.

11.3.33 Suspend Reference Number

The Suspend Reference Number information element contains an un-formatted reference number for each suspend/resume transaction. The element coding is:

Table 11.3.33: Suspend Reference Number IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|--------------------------|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Suspend Reference Number | | | | | | |

The Suspend Reference Number is an un-formatted 8 bit field.

11.3.34 Tag

This information element is used to correlate request and response PDUs. The element coding is:

Table 11.3.34: Tag IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---|--------------------|---|---|---|---|---|---|--|--|
| octet 1 | | IEI | | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3 | | Unstructured value | | | | | | | | |

11.3.35 Temporary logical link Identity (TLLI)

The element coding is:

Table 11.3.35: TLLI IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|------------------------|---|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-6 | | | | as the va 1.018, no | | | | | |

11.3.36 Temporary Mobile Subscriber Identity (TMSI)

The element coding is:

Table 11.3.36: TMSI IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|---|---------|----------|----------|-----------|------------------------------------|---|
| octet 1 | | | | 16 | ΞΙ | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |
| octet 3-6 | | | n eleme | | P TS 24 | I.008, no | TMSI/P- ⁻ t includin | |

11.3.37 Trace Reference

This element provides a trace reference number allocated by the triggering entity. The element coding is:

Table 11.3.37: Trace Reference IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---|----------|----------|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-4 | | | | Trace Re | eference | | | | |

11.3.38 Trace Type

This element provides the type of trace information to be recorded. The element coding is:

Table 11.3.38: Trace Type IE

| _ | | | | | | | | | | |
|-------------|---|---|---|---------|--------|---|---|---|--|--|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
| octet 1 | | IEI | | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3 | • | This is coded as specified in Technical Specification | | | | | | | | |
| | | | ; | 3GPP TS | 32.008 | | | | | |

11.3.39 Transaction Id

This element indicates a particular transaction within a trace. The element coding is:

Table 11.3.39: Transaction Id IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|----------------|---|----------|----------|---|---|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | |
| octet 3-4 | • | Transaction Id | | | | | | | |

11.3.40 Trigger Id

This element provides the identity of the entity which initiated the trace. The element coding is:

Table 11.3.40: Trigger Id IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|------------------|------------|-------------|-----------|---------|-------|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3-22 | | Ent | ity Identi | ty (typica | ally an C | MC iden | tity) | |

11.3.41 Number of octets affected

This information element indicates, for an MS, the number of octets transferred or deleted by BSS. The element coding is:

Table 11.3.41: Number of octets affected IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|------------------|---------|------------|-----------|----------|----|---|--|
| octet 1 | | IEI | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | |
| octet 3-5 | | nu | mber of | octets tra | ansferrec | or delet | ed | | |

The number of octets transferred or deleted by the BSS may be higher than the maximum Bmax value (6 553 500). SGSN shall handle any value higher than 6 553 500 as the value 6 553 500.

11.3.42 Packet Flow Identifier (PFI)

This information element indicates the Packet Flow Identifier for a BSS Packet Flow Context. The element coding is:

Table 11.3.42: Packet Flow Identifier (PFI) IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---------|---|---|---|---|---|---|---|--|--|
| octet 1 | | IEI | | | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3 | Res | Rest of element coded as the value part of the Packet Flow | | | | | | | | |
| | Identif | Identifier information element in 3GPP TS 24.008, not including | | | | | | | | |
| | | 3GPP TS 24.008 IEI | | | | | | | | |

The BSS shall not negotiate BSS PFCs for the following pre-defined PFI values: Best Effort, Signaling, SMS, and TOM8.

PFIs have local significance to a mobile station. A BSS Packet Flow Context shall be uniquely identified by the PFI along with the IMSI or TLLI within a routeing area.

11.3.42a (void)

11.3.43 Aggregate BSS QoS Profile

This information element indicates the Aggregate BSS QoS Profile (ABQP) for a BSS Packet Flow Context. The ABQP is considered to be a single parameter with multiple data transfer attributes as defined in 3GPP TS 23.107.

The element coding is:

Table 11.3.43: Aggregate BSS QoS Profile IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|--------------------------------------|---------------------|--------------------|--------------------------|----------|--------|----------|---------|
| octet 1 | IEI | | | | | | | |
| octet 2, 2a | Length I | ndicator | | | | | | |
| | Rest of of element length in allowed | in 3GPF dicator. | TS 24.0 The sho | 008, not i rter 3-byt | ncluding | 3GPP T | S 24.008 | IEI and |

11.3.44 GPRS Timer

The purpose of the *GPRS timer* information element is to specify GPRS specific timer values, e.g. the Packet Flow timer.

Table 11.3.44: GPRS Timer IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|------------------------|------------------|---|---|---|---|---|---|
| octet 1 | GPRS T | GPRS Timer IEI | | | | | | |
| octet 2, 2a | Length I | _ength Indicator | | | | | | |
| octet 3 | Unit Value Timer value | | | | | | | |

Timer value: Bits 5 to 1 represent the binary coded timer value.

Unit value: Bits 6 to 8 defines the timer value unit for the GPRS timer as follows:

Bits

8 7 6
0 0 0 value is incremented in multiples of 2 s
0 0 1 value is incremented in multiples of 1 minute
0 1 0 value is incremented in multiples of decihours
1 1 1 value indicates that the timer does not expire.

Other values shall be interpreted as multiples of 1 minute in this version of the protocol.

11.3.45 Feature Bitmap

The Feature bitmap information element indicates the optional features supported by the underlying NSE. The element coding is:

Table 11.3.45.a: Feature Bitmap IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|-------|------------------|------------|-----|-----|-----|-----|-----|
| octet 1 | | | | IE | ΞI | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | Spare | Spare | PFC- FC | RIM | LCS | INR | CBL | PFC |

Table 11.3.45.b: "PFC bit" coding

| coding | semantic |
|--------|--|
| 0 | Packet Flow Context Procedures not supported |
| 1 | Packet Flow Context Procedures supported |

Table 11.3.45.c: "CBL bit" coding

| coding | semantic |
|--------|---|
| 0 | Current Bucket Level Procedures not supported |
| 1 | Current Bucket Level Procedures supported |

Table 11.3.45.d: "INR bit" coding

| coding | Semantic |
|--------|------------------------------------|
| 0 | Inter-NSE re-routing not supported |
| 1 | Inter-NSE re-routing supported |

Table 11.3.45.e: "LCS bit" coding

| coding | semantic | | | | | | |
|--------|------------------------------|--|--|--|--|--|--|
| 0 | LCS Procedures not supported | | | | | | |
| 1 | LCS Procedures supported | | | | | | |

Table 11.3.45.f: "RIM bit" coding

| coding | Semantic |
|--------|---|
| 0 | RAN Information Management (RIM) procedures not |
| | supported |
| 1 | RAN Information Management (RIM) procedures supported |

Table 11.3.45.g: "PFC-FC" coding

| coding | Semantic |
|--------|---|
| 0 | PFC Flow Control Procedures not supported |
| 1 | PFC Flow Control Procedures supported |

11.3.46 Bucket Full Ratio

This information element is used to convey the current bucket counter. It is binary encoded as follows: $B_{\text{current}} \, x \, (100 \, / \, B_{\text{max}})$. The element coding is:

Table 11.3.46: Bucket Full Ratio IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|---|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Ratio of the bucket that is filled up with data | | | | | | |

The field ranges from zero (00000000) to two hundred and fifty five (11111111). A value of zero means that the bucket is empty. A value of hundred means that the bucket is exactly full, while a value of two hundred and fifty five means that the bucket is at least 2.55 times B_{max}

11.3.47 Service UTRAN CCO

The Service UTRAN CCO (Cell Change Order) information element indicates information for Network initiated Cell Change Order to UTRAN, relevant if the procedure is used:

Table 11.3.47.a: Service UTRAN CCO IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|-------------------------|---|---|---|---|-----------|----|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | Spare Service UTRAN CCO | | | | | 1 CCO | |
| | | | | | | \ | /alue pai | rt |

Table 11.3.47.b: UTRAN CCO Value part coding

| coding bits 321 | Semantic |
|--------------------|--|
| 000 | Network initiated cell change order procedure to UTRAN should be performed |
| 001 | Network initiated cell change order procedure to UTRAN should not be performed |
| 010 | Network initiated cell change order procedure to UTRAN shall not be performed |
| Other values | No information available |

11.3.48 NSEI (Network Service Entity Identifier)

The NSEI unambiguously identifies a NSE. The element coding is:

Table 11.3.48: NSEI IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|--------------------------------|---------|------------|-----------|--------|---|---|
| octet 1 | | | | IE | ΞI | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3 | | most significant octet of NSEI | | | | | | |
| octet 4 | | | least s | significan | t octet o | f NSEI | | |

11.3.49 RRLP APDU

This information element conveys an embedded message associated with a higher level protocol. The element coding is:

Table 11.3.49: RRLP APDU IE

| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|--------------|-------------------------|---|---|--|---|--|-------------------|
| | | | IE | [| | | |
| | | | Length I | ndicator | | | |
| messag 3G | e whose PP TS 4 | content 4.031. Ti | and enco | oding are protoco | e defined Il is not o | l accordii ctet aligr | ng to the led. |
| | The res messag 3G | The rest of the message whose 3GPP TS 4 | The rest of the informati message whose content 3GPP TS 44.031. T | Length I The rest of the information eleme message whose content and enco 3GPP TS 44.031. The RRLP | The rest of the information element conta message whose content and encoding are 3GPP TS 44.031. The RRLP protoco | Length Indicator The rest of the information element contains an emessage whose content and encoding are defined 3GPP TS 44.031. The RRLP protocol is not o | 121 |

11.3.50 LCS QoS

This information element provides the LCS QoS. The element coding is:

Table 11.3.50: LCS QOS IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----|----------|-----------|-----------|-----------|-----------|-----------|-----|
| octet 1 | | | | IE | ΞI | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |
| octet 3-n | | Rest of | element | coded as | the valu | ue part d | efined in | |
| | 3G | SPP TS 4 | l8.008, n | ot includ | ing 3GPI | P TS 48. | 008 IEI a | ınd |
| | | 30 | SPP TS | 48.008 o | ctet leng | th indica | tor | |

11.3.51 LCS Client Type

This information element provides the LCS Client Type. The element coding is:

Table 11.3.51: LCS Client Type IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|----|--|---------|----------|-----------|-----------|-----------|---|--|--|
| octet 1 | | | | II | ΞI | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3-n | | Rest of | element | coded as | the val | ue part d | efined in | | | |
| | 30 | 3GPP TS 49.031, not including 3GPP TS 49.031 IEI and | | | | | | | | |
| | | 30 | GPP TS | 49.031 o | ctet leng | th indica | tor | | | |

11.3.52 Requested GPS Assistance Data

This information element provides the information on which GPS Assistance Data has been requested. The element coding is:

Table 11.3.52: Requested GPS Assistance Data IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|----|--|--------|----------|-----------|------------|-----------|---|--|--|
| octet 1 | | | | IE | ΞΙ | | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | | |
| octet 3-n | | | | | | | efined in | | | |
| | 3G | 3GPP TS 49.031, not including 3GPP TS 49.031 IEI and | | | | | | | | |
| | | 30 | SPP TS | 49.031 o | ctet leng | th indicat | tor | | | |

11.3.53 Location Type

This information element provides the Location Type. The element coding is:

Table 11.3.53: Location Type IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | |
|-------------|----|---------------------------------------|-----------|-----------|----------|-----------|-----------|----|--|--|--|
| octet 1 | | | | IE | El | | | | | | |
| octet 2, 2a | | | | Length I | ndicator | | | | | | |
| octet 3-n | | Rest of | element | coded as | the valu | ie part d | efined in | | | | |
| | 3G | SPP TS 4 | l9.031, n | ot includ | ing 3GPI | P TS 49. | 031 IEI a | nd | | | |
| | | 3GPP TS 49.031 octet length indicator | | | | | | | | | |

11.3.54 Location Estimate

This information element provides the Location Estimate. The element coding is:

Table 11.3.54: Location Estimate IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----|---------|----------|-----------|-----------|-----------|-----------|-----|
| octet 1 | | | | IE | <u> </u> | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |
| octet 3-n | | Rest of | element | coded as | the valu | ue part d | efined in | |
| | 3G | PP TS 4 | 8.008, n | ot includ | ng 3GPI | P TS 48. | 008 IEI a | ind |
| | | 30 | SPP TS | 48.008 o | ctet leng | th indica | tor | |

11.3.55 Positioning Data

This information element provides Positioning Data. The element coding is:

Table 11.3.55: Positioning Data IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | |
|-------------|----|---------------------------------------|----------|-----------|----------|-----------|-----------|-----|--|--|--|
| octet 1 | | | | IE | ΞI | | | | | | |
| octet 2, 2a | | | | Length I | ndicator | • | | | | | |
| octet 3-n | | Rest of | element | coded as | the val | ue part d | efined in | | | | |
| | 3G | PP TS 4 | 9.031, n | ot includ | ing 3GP | P TS 49. | 031 IEI a | ınd | | | |
| | | 3GPP TS 49.031 octet length indicator | | | | | | | | | |

11.3.56 Deciphering Keys

This information element provides the Deciphering Keys. The element coding is:

Table 11.3.56: Deciphering Keys IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|-----|------------------|----------|----------|-----------|-----------|-----|-----|--|--|
| octet 1 | | | | IE | El | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3-n | 0.0 | | | | | ue part d | | | | |
| | 36 | | | | | P TS 49. | | ına | | |
| | | 30 | SPP TS 4 | 49.031 o | ctet leng | th indica | tor | | | |

11.3.57 LCS Priority

This information element provides the data/information on LCS Priority. The element coding is:

Table 11.3.57: LCS Priority IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|----|------------------|-----------|-----------|-----------|-----------|-----------|-----|--|--|
| octet 1 | | | | 16 | ΞI | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | | | |
| octet 3-n | | Rest of | element | coded as | s the val | ue part d | efined in | | | |
| | 3G | SPP TS 4 | 19.031, n | ot includ | ing 3GP | P TS 49. | 031 IEI a | ınd | | |
| | | 30 | SPP TS | 49.031 o | ctet leng | th indica | tor | | | |

11.3.58 LCS Cause

This information element provides the data/information on LCS Cause. The element coding is:

Table 11.3.58: LCS Cause IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----|----------|-----------|-----------|-----------|-----------|-----------|-----|
| octet 1 | | | | IE | ΞΙ | | | |
| octet 2, 2a | | | | Length I | ndicator | • | | |
| octet 3-n | | Rest of | element | coded as | the val | ue part d | efined in | |
| | 3G | SPP TS 4 | l9.031, n | ot includ | ng 3GP | P TS 49. | 031 IEI a | ınd |
| | | 30 | SPP TS | 49.031 o | ctet leng | th indica | tor | |

11.3.59 LCS Capability

This information element provides the data/information on LCS Capability. The element coding is:

Table 11.3.59.a: LCS Capability IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|---|---|---|----------|----------|---|---|---|
| octet 1 | | | | IE | El | | | |
| octet 2, 2a | | | | Length I | ndicator | | | |

| Rest of element coded as the value part of the PS LCS Capability IE defined in 3GPP TS 24.008, not including 3GPP TS 24.008 IEI |
|---|
| and length indicator |

11.3.60 RRLP Flags

This information element provides control information for the RRLP APDU. The element coding is:

Table 11.3.60: RRLP Flags IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|------------------|---|---|---|---|---|---|---|
| octet 1 | IEI | | | | | | | |
| octet 2, 2a | Length Indicator | | | | | | | |
| octet 3 | Spare Flag 1 | | | | | | | |

The fields are coded as follows:

Flag 1 (Octet 3, bit 1):

- 0 Position Command (BSS to SGSN) or final response (SGSN to BSS);
- 1 Not a Positioning Command or final response.

Spare These bits shall be ignored by the receiver and set to zero by the sender.

11.3.61 RIM Application Identity

This information element specifies the addressed application within the target BSS node. The element coding is:

Table 11.3.61.a: RIM Application Identity IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|--------------------------|---|---|---|---|---|---|---|
| Octet 1 | IEI | | | | | | | |
| Octet 2, 2a | Length Indicator | | | | | | | |
| Octet 3 | RIM Application Identity | | | | | | | |

RIM Application Identity is coded as shown below.

Table 11.3.61.b: RIM Application Identity coding

| Coding | Semantic |
|-----------------------|-------------------------------------|
| 0000 0000 | Reserved |
| 0000 0001 | Network Assisted Cell Change (NACC) |
| 0000 0010 – 1111 1111 | Reserved |

All values not allocated are reserved.

11.3.62 RIM Sequence Number

This information element defines the sequence number allocated a RIM PDU by the source node. The element coding is:

Table 11.3.62.a: RIM Sequence Number IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---|--|--------|--------|----------|-------------|--------|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3 | | RIM Sequence Number (Higher order octet) | | | | | | | | |
| Octet 4 | | RIM Sequence Number | | | | | | | | |
| Octet 5 | | RIM Sequence Number | | | | | | | | |
| Octet 6 | | RIM | Sequen | ce Num | ber (Lov | ver order o | octet) | | | |

11.3.62a RIM Container

11.3.62a.0 General

The coding of the *RIM Container* IE value part depends on the value of the PDU type according to the following subclauses:

11.3.62a.1 RAN-INFORMATION-REQUEST RIM Container

This information element defines the RIM container used in the RAN INFORMATION REQUEST PDU. The element coding is:

Table 11.3.62a.1a: RAN-INFORMATION-REQUEST RIM Container IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|-------|--|---------|-----------|-----------|----------|---|---|--|
| Octet 1 | | IEI | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | |
| Octet 3-? | RAN-I | RAN-INFORMATION-REQUEST RIM Container Contents coded | | | | | | | |
| | | | as defi | ined in t | table 11. | 3.62a.1b | | | |

Table 11.3.62a.1b: RAN-INFORMATION-REQUEST RIM Container Contents

| Information Elements | Type / Reference | Presence | Format | Length |
|---|--|-------------|-------------|--------|
| RIM Application Identity | RIM Application Identity/11.3.61 | М | TLV | 3 |
| RIM Sequence Number | RIM Sequence Number/11.3.62 | М | TLV | 6 |
| RIM PDU Indications | RIM PDU Indications/11.3.65 | М | TLV | 3 |
| RIM Protocol Version Number | RIM Protocol Version | 0 | TLV | 3 |
| | Number/11.3.67 | | | |
| Application Container (note 1) | RAN-INFORMATION-REQUEST | С | TLV | 4-? |
| | Application Container/11.3.63.1 | | | |
| NOTE 1: The presence of the Application Con | tainer depends on the value of the RIM | Application | Identity IE | |

11.3.62a.2 RAN-INFORMATION RIM Container

This information element defines the RIM container used in the RAN INFORMATION PDU. The element coding is:

Table 11.3.62a.2a: RAN-INFORMATION RIM Container IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|--------|--|---|---|-----|---|---|---|--|
| Octet 1 | | | | | IEI | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | |
| Octet 3-? | RAN-IN | RAN-INFORMATION RIM Container Contents coded as defined in | | | | | | | |
| | | table 11.3.62a.2b | | | | | | | |

Table 11.3.62a.2b: RAN-INFORMATION RIM Container Contents

| Information Elements | Type / Reference | Presence | Format | Length |
|--------------------------------------|---|------------|--------|--------|
| RIM Application Identity | RIM Application Identity / 11.3.61 | M | TLV | 3 |
| RIM Sequence Number | RIM Sequence Number / 11.3.62 | M | TLV | 6 |
| RIM PDU Indications | RIM PDU Indications / 11.3.65. | M | TLV | 3 |
| RIM Protocol Version Number | RIM Protocol Version Number / 11.3.67 | 0 | TLV | 3 |
| Application Container (note 1) | RAN-INFORMATION Application Container / 11.3.63.2 | C (Note 1) | TLV | 4-? |
| Application Error Container (Note 1) | Application Error Container /11.3.64 | C (Note 1) | TLV | n |

NOTE 1: The presence of application information depends on the value of the RIM Application Identity IE. If application information is mandatory either the Application Error Container IE or the Application Container IE is present.

11.3.62a.3 RAN-INFORMATION-ACK RIM Container

This information element defines the RIM container used in the RAN INFORMATION ACK PDU. The element coding is:

Table 11.3.62a.3a: RAN-INFORMATION-ACK RIM Container IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|-----|---|---|---|---|---|---|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-16 | RAN | RAN-INFORMATION-ACK RIM Container Contents coded as | | | | | | | | |
| | | defined in table 11.3.62a.3b | | | | | | | | |

Table 11.3.62a.3b: RAN-INFORMATION-ACK RIM Container Contents

| Information Elements | Type / Reference | Presence | Format | Length |
|-----------------------------|------------------------------------|----------|--------|--------|
| RIM Application Identity | RIM Application Identity / 11.3.61 | М | TLV | 3 |
| RIM Sequence Number | RIM Sequence Number / 11.3.62 | М | TLV | 6 |
| RIM Protocol Version Number | RIM Protocol Version Number / | 0 | TLV | 4 |
| | 11.3.67 | | | |

11.3.62a.4 RAN-INFORMATION-ERROR RIM Container

This information element defines the RIM container used in the RAN-INFORMATION-ERROR PDU. The element coding is:

Table 11.3.62a.4a: RAN-INFORMATION-ERROR RIM Container IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|-------|---|---|---|-----|---|---|---|--|--|
| Octet 1 | | | | | IEI | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-? | RAN-I | RAN-INFORMATION-ERROR RIM Container Contents coded as | | | | | | | | |
| | | defined in table 11.3.62a.4b | | | | | | | | |

Table 11.3.62a.4b: RAN-INFORMATION-ERROR RIM Container Contents

| Information Elements | Type / Reference | Presence | Format | Length |
|-----------------------------|------------------------------------|----------|--------|--------|
| RIM Application Identity | RIM Application Identity / 11.3.61 | М | TLV | 3 |
| RIM Cause | Cause / 11.3.8 | М | TLV | 3 |
| RIM Protocol Version Number | RIM Protocol Version Number / | 0 | TLV | 3 |
| | 11.3.67 | | | |
| PDU in Error | PDU in Error / 11.3.24 | М | TLV | 3-? |

11.3.62a.5 RAN-INFORMATION-APPLICATION-ERROR RIM Container

This information element defines the RIM container used in the RAN-INFORMATION-APPLICATION-ERROR PDU. The element coding is:

Table 11.3.62a.5a: RAN-INFORMATION-APPLICATION-ERROR RIM Container IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|-----|---|---|---|---|---|---|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-? | RAN | RAN-INFORMATION-APPLICATION-ERROR RIM Container | | | | | | | | |
| | | Contents coded as defined in table 11.3.62a.5b | | | | | | | | |

Table 11.3.62a.5b: RAN-INFORMATION-APPLICATION-ERROR RIM Container Contents

| Information Elements | Type Reference | Presence | Format | Length |
|-----------------------------|-------------------------------------|----------|--------|--------|
| RIM Application Identity | RIM Application Identity /11.3.61 | М | TLV | 3 |
| RIM Sequence Number | RIM Sequence Number /11.3.62 | М | TLV | 6 |
| RIM PDU Indications | RIM PDU Indications /11.3.65. | М | TLV | 3 |
| RIM Protocol Version Number | RIM Protocol Version Number/11.3.67 | 0 | TLV | 3 |
| Application Error Container | Application Error Container/11.3.64 | М | TLV | n |

11.3.63 Application Container

11.3.63.1 RAN-INFORMATION-REQUEST Application Container

11.3.63.1.0 General

The coding of the *Application Container* value part within the RAN-INFORMATION-REQUEST RIM container depends on the value of the *RIM Application Identity* IE included into the RIM container according to the following sub-clauses.

11.3.63.1.1 RAN-INFORMATION-REQUEST Application Container for the NACC Application

The coding of the *Application Container* IE within the RAN-INFORMATION-REQUEST RIM container for the NACC application is specified as follows:

Table 11.3.63.1.1: RAN-INFORMATION-REQUEST Application Container coding for NACC

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---|---------------------------|---|---|---|---|---|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-10 | | Reporting Cell Identifier | | | | | | | | |

Reporting Cell Identifier: This field is encoded as the Cell Identifier defined in sub-clause 11.3.9

11.3.63.2 RAN-INFORMATION Application Container Unit

11.3.63.2.0 General

The coding of the *Application Container* value part within the RAN-INFORMATION RIM container depends on the value of the *RIM Application Identity* IE included into the RIM container according to the following sub-clauses.

11.3.63.2.1 RAN-INFORMATION Application Container for the NACC Application

The coding of the *Application Container* IE within the RAN-INFORMATION RIM container for the NACC application is specified as follows:

Table 11.3.63.2.1a: RAN-INFORMATION Application Container coding for NACC

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|---------------------------|---|---|---|---|---|---|--|
| Octet 1 | | IEI | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | |
| Octet 3-10 | | Reporting Cell Identifier | | | | | | | |
| Octet 11 | | Number of SI/PSI Type | | | | | | | |
| Octet 12-n | | SI/PSI | | | | | | | |

Reporting Cell Identifier: This field is encoded as the Cell Identifier defined in sub-clause 11.3.9

Type: This field indicates the type of SI/PSI messages provided by the reporting cell. The *Type* field is coded as shown below:

Table 11.3.63.2.1b: Type coding

| Coding | Semantic |
|--------|---|
| 0 | SI messages as specified for BCCH (3GPP TS 44.018) follow |
| 1 | PSI messages as specified for PBCCH (3GPP TS 44.060) follow |

Number of SI/PSI: This field indicates the number of SI/PSI provided by the reporting cell contained in the *SI/PSI field*. This number may be zero. For system information messages with multiple instances, each instance is counted as one SI/PSI message. The *Number of SI/PSI* field is coded as shown below:

Table 11.3.63.2.1c: Number of SI/PSI coding

| Coding | Semantic |
|----------|---------------------|
| 000 0000 | 0 "SI/PSI" follows |
| 000 0001 | 1 "SI/PSI" follow |
| ' | "! |
| 111 1111 | 127 "SI/PSI" follow |

SI/PSI: This field contains a list of either system information or packet system information messages valid for the reporting cell. The number of (packet) system information messages is indicated in the *Number of SI/PSI* field specified above. Furthermore:

- If the *Type* field indicates that "SI messages as specified for BCCH (3GPP TS 44.018) follow" then the *SI/PSI* field contains System Information message instances encoded for BCCH as specified in 3GPP TS 44.018. Each System Information message contains the *Message type* octet followed by all the IEs composing the message payload. Each message is 21 octets long.
- If the *Type* field indicates that "PSI messages as specified for PBCCH (3GPP TS 44.060) follow" then the *SI/PSI* field contains Packet System Information message instances encoded for PBCCH as specified in 3GPP TS 44.060. Each Packet System Information message contains the *MESSAGE_TYPE* field followed by the PSI message content. Each message is 22 octets long.

11.3.63 Application Container

11.3.63.1 RAN-INFORMATION-REQUEST Application Container

11.3.63.1.0 General

The coding of the *Application Container* value part within the RAN-INFORMATION-REQUEST RIM container depends on the value of the *RIM Application Identity* IE included into the RIM container according to the following sub-clauses.

11.3.63.1.1 RAN-INFORMATION-REQUEST Application Container for the NACC Application

The coding of the *Application Container* IE within the RAN-INFORMATION-REQUEST RIM container for the NACC application is specified as follows:

Table 11.3.63.1.1: RAN-INFORMATION-REQUEST Application Container coding for NACC

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---|---------------------------|---|---|---|---|---|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-10 | | Reporting Cell Identifier | | | | | | | | |

Reporting Cell Identifier: This field is encoded as the Cell Identifier defined in sub-clause 11.3.9

11.3.63.2 RAN-INFORMATION Application Container Unit

11.3.63.2.0 General

The coding of the *Application Container* value part within the RAN-INFORMATION RIM container depends on the value of the *RIM Application Identity* IE included into the RIM container according to the following sub-clauses.

11.3.63.2.1 RAN-INFORMATION Application Container for the NACC Application

The coding of the *Application Container* IE within the RAN-INFORMATION RIM container for the NACC application is specified as follows:

Table 11.3.63.2.1a: RAN-INFORMATION Application Container coding for NACC

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | |
|-------------|---|---------------------------|---|---|---|---|---|---|--|--|
| Octet 1 | | IEI | | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | | |
| Octet 3-10 | | Reporting Cell Identifier | | | | | | | | |
| Octet 11 | | Number of SI/PSI Type | | | | | | | | |
| Octet 12-n | | SI/PSI | | | | | | | | |

Reporting Cell Identifier: This field is encoded as the Cell Identifier defined in sub-clause 11.3.9

Type: This field indicates the type of SI/PSI messages provided by the reporting cell. The *Type* field is coded as shown below:

Table 11.3.63.2.1b: Type coding

| Coding | Semantic | | | | | | | |
|--------|---|--|--|--|--|--|--|--|
| 0 | SI messages as specified for BCCH (3GPP TS 44.018) follow | | | | | | | |
| 1 | PSI messages as specified for PBCCH (3GPP TS 44.060) follow | | | | | | | |

Number of SI/PSI: This field indicates the number of SI/PSI provided by the reporting cell contained in the *SI/PSI field*. This number may be zero. For system information messages with multiple instances, each instance is counted as one SI/PSI message. The *Number of SI/PSI* field is coded as shown below:

Table 11.3.63.2.1c: Number of SI/PSI coding

| Coding | Semantic |
|----------|---------------------|
| 000 0000 | 0 "SI/PSI" follows |
| 000 0001 | 1 "SI/PSI" follow |
| ' | II |
| 111 1111 | 127 "SI/PSI" follow |

SI/PSI: This field contains a list of either system information or packet system information messages valid for the reporting cell. The number of (packet) system information messages is indicated in the *Number of SI/PSI* field specified above. Furthermore:

- If the *Type* field indicates that "SI messages as specified for BCCH (3GPP TS 44.018) follow" then the *SI/PSI* field contains System Information message instances encoded for BCCH as specified in 3GPP TS 44.018. Each System Information message contains the *Message type* octet followed by all the IEs composing the message payload. Each message is 21 octets long.
- If the *Type* field indicates that "PSI messages as specified for PBCCH (3GPP TS 44.060) follow" then the *SI/PSI* field contains Packet System Information message instances encoded for PBCCH as specified in 3GPP TS 44.060. Each Packet System Information message contains the *MESSAGE_TYPE* field followed by the PSI message content. Each message is 22 octets long.

11.3.65 RIM PDU Indications

11.3.65.0 General

This information element contains various indications related to a RAN-INFORMATION-REQUEST PDU, RAN-INFORMATION PDU or RAN-INFORMATION-APPLICATION-ERROR PDU.

The element coding is:

Table 11.3.65.a: RIM PDU Indications IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|-----------------------------|------------------|---|---|---|---|---|-----|--|
| Octet 1 | | IEI | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | |
| Octet 3 | Reserved PDU Type Extension | | | | | | | ACK | |

ACK: this field indicates whether the source side is requesting a RAN-INFORMATION-ACK PDU as response to a RAN-INFORMATION or to a RAN-INFORMATION-APPLICATION-ERROR PDU. This field is coded as shown below.

Table 11.3.65.b: ACK coding

| Coding | Semantic |
|--------|------------------|
| 0 | No ACK requested |
| 1 | ACK requested |

PDU Type Extension: This field specifies the type extension of the PDU. The defined values depend on the PDU type.

11.3.65.1 RAN-INFORMATION-REQUEST RIM PDU Indications

The *ACK* field is not used and shall be considered as spare.

The following values of the PDU Type Extension field are defined:

Table 11.3.65.1: RAN-INFORMATION-REQUEST PDU Type Extension coding

| Coding | Semantic | | | | | | |
|--------|---|--|--|--|--|--|--|
| 000 | RAN-INFORMATION-REQUEST/Stop PDU | | | | | | |
| 001 | RAN-INFORMATION-REQUEST/Single Report PDU | | | | | | |
| 010 | RAN-INFORMATION-REQUEST/Multiple Report PDU | | | | | | |
| 011 | Reserved | | | | | | |
| 100 | Reserved | | | | | | |
| 101 | Reserved | | | | | | |
| 110 | Reserved | | | | | | |
| 111 | Reserved | | | | | | |

11.3.65.2 RAN-INFORMATION RIM PDU Indications

The ACK field is defined as specified in sub-clause 11.3.65.0.

The following values of the PDU Type Extension field are defined:

Table 11.3.65.2: RAN-INFORMATION PDU Type Extension coding

| Coding | Semantic |
|--------|---|
| 000 | RAN-INFORMATION/Stop PDU |
| 001 | RAN-INFORMATION/Single Report PDU |
| 010 | RAN-INFORMATION/Initial Multiple Report PDU |
| 011 | RAN-INFORMATION/Multiple Report PDU |
| 100 | RAN-INFORMATION/End PDU |
| 101 | Reserved |
| 110 | Reserved |
| 111 | Reserved |

11.3.65.3 RAN-INFORMATION-APPLICATION-ERROR RIM PDU Indications

The ACK field is defined as specified in sub-clause 11.3.65.0.

The PDU Type Extension field is not used and shall be considered as spare.

11.3.66 (void)

11.3.67 RIM Protocol Version Number

This information element defines which version number of the RIM protocol is in use in the PDU. The element coding is:

Table 11.3.67a: RIM Protocol Version Number IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|-------------|---|-----------------------------|---|---|---|---|---|---|--|
| Octet 1 | | IEI | | | | | | | |
| Octet 2, 2a | | Length Indicator | | | | | | | |
| Octet 3 | | RIM Protocol Version Number | | | | | | | |

RIM Protocol Version Number is coded as follows:

Table 11.3.67b: RIM Protocol Version Number IE coding

| Coding | Semantic |
|--------------|-----------|
| 0000 0000 | Reserved |
| 0000 0001 | Version 1 |
| Other values | Reserved |

If this Information Element is omitted the value "Version 1" should be assumed.

11.3.68 PFC Flow Control parameters

This information element contains the flow control parameters for one or more PFC(s) of a certain MS. The element coding is:

Table 11.3.68: PFC Flow Control parameters IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|--------------|--------------|---|-----------|----------|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | | | Length Ir | ndicator | | | |
| octet 3 | | | ı | Number (| of PFCs | | | |
| Octet 4 | | | | PFI | (1) | | | |
| Octet 5-6 | | | | Bmax_F | PFC (1) | | | |
| Octet 7-8 | | | | R_PF | C (1) | | | |
| Octet 9 | | B_PFC (1) | | | | | | |
| Octet ? | | PFI (2) | | | | | | |
| Octet ?-? | | Bmax_PFC (2) | | | | | | |
| Octet ?-? | R_PFC (2) | | | | | | | |
| Octet ? | B_PFC (2) | | | | | | | |
| " | 11 | | | | | | | |
| Octet ? | PFI (n) | | | | | | | |
| Octet ?-? | Bmax_PFC (n) | | | | | | | |
| Octet ?-? | R_PFC (n) | | | | | | | |
| Octet ? | | • | | B_PF | C (n) | | | |

Number of PFCs: Number of PFCs for which flow control parameters are provided. For each of those PFCs follows its identifier and the value of the flow control parameters. The "Number of PFCs" parameter is coded as shown below:

Table 11.3.68a: Number of PFCs

| Coding | Semantic |
|-----------|----------|
| 0000 0000 | 0 PFC |
| 0000 0001 | 1 PFC |
| | |
| 0000 1011 | 11 PFCs |
| 0000 1100 | Reserved |
| ' | п |
| 1111 1111 | Reserved |

PFI: Packet Flow Identifier. Coded as the value part of the Packet Flow Identifier information element in 3GPP TS 24.008, not including 3GPP TS 24.008 IEI.

Bmax_PFC: Bucket size of the PFC. Coded like the value part of BVC Bucket Size, see sub-clause 11.3.5.

R_PFC: Bucket Leak Rate of the PFC. Coded as the value part of Bucket Leak Rate (R), see sub-clause 11.3.4.

B_PFC: Bucket Full Ratio of the PFC. This field is only present if the Current Bucket Level (CBL) feature is negotiated. Otherwise, the flow control parameters for the next PFC, if any, are provided instead. This field if coded as the value part of the Bucket Full Ratio, see sub-clause 11.3.46.

11.3.69 Global CN-Id

The Global CN-Id consists of a PLMN-Id and a CN-Id, see 3GPP TS 23.003. The value part of the Global CN-Id is coded as defined in 3GPP TS 29.018. The CN-Id is an integer defined by O&M. The element coding is:

Table 11.3.69: Global CN-Id IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----|---|---|---|---|---|---|---|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | | Length Indicator | | | | | | |
| octet 3-7 | Co | Coded as octets 3 to 7 of the Global CN-Id IE, defined in | | | | | | |
| | | 3GPP TS 29.018 | | | | | | |

11.3.70 RIM Routing Information

This information element uniquely identifies either a cell within a GERAN BSS or a UTRAN RNC. The element coding is:

Table 11.3.70.a: RIM Routing Information IE

| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|------------------|-----|---|-----------|----------|-----|---------------------|----|
| octet 1 | | IEI | | | | | | |
| octet 2, 2a | Length Indicator | | | | | | | |
| octet 3 | Spare | | | | R | | ng Addre ninator | ss |
| octet 4-n | | | R | IM Routir | ng Addre | :SS | | |

The coding of *RIM Routing Address discriminator* (bits 4 to 1 of octet 3) is a binary number indicating which type of address is provided in octet 4-n. The RIM *Routing Address discriminator* is coded as follows:

Bits

4321

0000 A Cell Identifier is used to identify a GERAN cell.0001 A Global RNC-ID is used to identify a UTRAN RNC.

All other values are reserved.

The coding of octet 4-n depends on the RIM Routing Address discriminator (octet 3) as it is specified below.

RIM Routing Address discriminator = 0000:

The *RIM Routing Address* field contains a Cell Identifier and is coded as the value part (octet 3 to octet 10) of the *Cell Identifier* information element specified in sub-clause 11.3.9.

RIM Routing Address discriminator = 0001:

The RIM Routing Address field contains a Global RNC-ID and is coded as follows:

| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|--------------------|-----|---------|---|---|---------|---------|---|---------|
| | MCC | digit 2 | | | MCC | digit 1 | | octet 4 |
| | MNC | digit 3 | | | octet 5 | | | |
| MNC digit 2 | | | | | octet 6 | | | |
| 0 0 0 0 | | | | | RNO | C-ID | | octet 7 |
| RNC-ID (continued) | | | | | | | | octet 8 |

The octets 4-6 (PLMN Identifier) are coded as the octets 2-3 of the *Location Area Identification* information element in 3GPP TS 24.008. The octet 5 bits 5-8 are filled with "1111" if 2 digits MNC is used.

The octets 7-8 contain the RNC-ID (3GPP TS 25.413). The least significant bit of RNC-ID is octet 8 bit 1 and most significant bit is octet 7 bit 4. In the octet 7 bits 5-8 are set to "0000".

12 List of system variables

12.1 General Variables

Table 12.1.a: Procedure timers

| Timer mnemonic | Value range | Notes | Relation to other timers |
|-------------------|---|---|---|
| T1 | 1 s < T1 < 30 s | Guards the (un)blocking procedures | none |
| T2 | 1 s < T2 < 120 s | Guards the reset procedure | none |
| T3 | 0.1 s < T3 < 10 s | Guards the suspend procedure | none |
| T4 | 0.1 s < T4 < 10 s | Guards the resume procedure | none |
| T5 | 1 s < T5 < 30 s | Guards the RA-CAPABILITY-UPDATE procedure | none |
| T6 | 0.1 s < T6 < 10 s | Guards the DOWNLOAD-BSS-PFC procedure | none |
| T7 | 0.1 s < T7 < 10 s | Guards the CREATE-BSS-PFC procedure | none |
| T8 | 0.1 s < T8 < 10 s | Guards the MODIFY-BSS-PFC procedure | none |
| Т9 | Same as T3314 READY timer in 3GPP TS 24.008. Minimum 6 s | holds the maximum time the BSS may | Cannot exceed the value of the READY timer for this MS unless READY timer is less than 6 s. |

Table 12.1.b: Procedure retry counters

| Retry mnemonic | Retry value | Notes |
|------------------------------|-------------|-------|
| BVC-BLOCK-RETRIES | 3 | none |
| BVC-UNBLOCK-RETRIES | 3 | none |
| BVC-RESET-RETRIES | 3 | none |
| SUSPEND-RETRIES | 3 | none |
| RESUME-RETRIES | 3 | none |
| RA-CAPABILITY-UPDATE-RETRIES | 3 | none |
| DOWNLOAD-BSS-PFC-RETRIES | 3 | none |
| CREATE-BSS-PFC-RETRIES | 3 | none |
| MODIFY-BSS-PFC-RETRIES | 3 | none |

12.2 Flow control variables

Table 12.2: Flow control variables

| Variable mnemonic | Value range | Notes | Relation to other variables |
|-------------------|-------------|---|-----------------------------|
| Th | | Interval after Flow-Control-MS before SGSN may use SGSN generated Bmax and R | none |
| С | | Minimum interval between sending of subsequent Flow Control PDUs for a given BVC or MS or PFC | C < Th |
| Tf | | Interval after Flow-Control-PFC before SGSN may use SGSN generated Bmax and R | Tf > C |

Annex A (informative): Change history

| Meeting | Tdoc | CR | REV | SUBJECT | NEW_VERS |
|------------|-----------|------|-----|---|----------|
| - | - | - | - | Creation of v5.0.0 based upon 4.3.0 | 5.0.0 |
| GP-05 | GP-011427 | 036 | 1 | BVC unblocking and BVC reset procedures interleaving. | 5.0.0 |
| GP-06 | GP-011843 | 046 | | Clarification of Packet Flow Timer (Rel-5) | 5.0.0 |
| GP-06 | GP-011775 | 043 | | SGSN behaviour during rerouting of DL LLC PDUs (Rel-5) | 5.0.0 |
| GP-06 | GP-011642 | 042 | | Inter-NSE rerouting of DL LLC PDUs (Rel-5) | 5.0.0 |
| GP-06 | GP-011959 | 037 | 5 | Introduction of LCS for GPRS to Release 5 (Rel-5) | 5.0.0 |
| GP-06 | - | - | - | Old mess in table numbering has been cleaned up. Sub-clause | 5.0.0 |
| | | | | based table numbering scheme introduced. | |
| GP-07 | GP-012172 | 055 | | Editorial Corrections | 5.1.0 |
| GP-07 | GP-012047 | 048 | | Correction of Feature Bitmap IE | 5.1.0 |
| GP-07 | GP-012304 | 056 | | LCS Capabilities refer to 24.008 | 5.1.0 |
| GP-07 | GP-012048 | 050 | | Clean-up CR for LCS for GPRS | 5.1.0 |
| GP-07 | GP-012802 | 047 | 3 | Inter NSE Cell Change for LCS for GPRS | 5.1.0 |
| GP-08 | GP-020428 | 057 | 4 | Introduction of RAN Information Management in 48.018 | 5.2.0 |
| GP-09 | GP-020620 | 067 | | Addition of PTP BVCI parameter for LCS PDUs on the Gb Interface | 5.3.0 |
| GP-09 | GP-020719 | 063 | 2 | [External NACC] Re-introduction of event-driven multiple reports | 5.3.0 |
| | | | | and other corrections | |
| GP-09 | GP-021248 | 066 | 3 | Correction to PFC transfer procedure upon cell change | 5.3.0 |
| GP-10 | GP-021723 | 058 | 3 | Introduction of Global CN-Id when CS paging is done via the PS | 5.4.0 |
| | | | | domain | |
| GP-10 | GP-021786 | 073 | 1 | Removal of an inconsistency in BVC Reset procedure description | 5.4.0 |
| GP-10 | GP-021836 | 061 | 4 | Introduction of flow control per PFC between the SGSN and BSS | 5.4.0 |
| GP-10 | GP-022054 | 072 | 2 | Removal of an inconsistency in LLC DISCARDED description | 5.4.0 |
| GP-10 | GP-022102 | 070 | 2 | SI/PSI coding in RAN-INFORMATION Container Unit | 5.4.0 |
| GP-11 | GP-022778 | 075 | 2 | Setting of RAI in Suspend and appropriate handling in SGSN | 5.5.0 |
| Dec. 2002 | - | - | - | Purely editorial update | 5.5.1 |
| GP-13 | GP-030097 | 078 | 1 | Correction to PDU Type IE | 5.6.0 |
| April 2003 | - | - | - | Editorial correction of reference in tables 10.2.1 and 10.2.2 | 5.6.1 |
| GP-15 | GP-031181 | 083 | 2 | Introduction of 'End Indication' for RAN Information multiple reports | 5.7.0 |
| GP-17 | GP-032692 | 091 | 1 | Gap in Numbering in the PFC Flow Control parameters IE | 5.8.0 |
| GP-17 | GP-032694 | 093 | 1 | Corrections to several inconsistencies. IMI Codepoint x51 correction | 5.8.0 |
| | | | | implemented differently than proposed in CR. | |
| GP-18 | GP-040120 | 095 | 1 | TOM PFI usage on Gb interface | 5.9.0 |
| GP-18 | GP-040530 | 097 | 3 | SGSN initiated deletion of BSS PFC during the modification | 5.9.0 |
| | | | | procedure | |
| GP-18 | GP-040113 | 104 | 1 | Removal of PFC Transfer Result indication | 5.9.0 |
| GP-19 | GP-041095 | 109 | 1 | Length of ABQP IE in BSSGP | 5.10.0 |
| GP-22 | GP-042695 | 118 | 1 | Overall restructuring of RIM procedures - application to inter-BSC / | 5.11.0 |
| | | | | inter-RAT NACC | |
| GP-25 | GP-051420 | 0134 | 1 | Making the RIM containers consistently specified | 5.12.0 |

History

| Document history | | | | |
|------------------|----------------|-------------------------|--|--|
| V5.3.0 | May 2002 | Publication | | |
| V5.4.0 | July 2002 | Publication | | |
| V5.5.0 | September 2002 | Publication (Withdrawn) | | |
| V5.5.1 | December 2002 | Publication | | |
| V5.6.0 | February 2003 | Publication (Withdrawn) | | |
| V5.6.1 | April 2003 | Publication | | |
| V5.7.0 | July 2003 | Publication | | |
| V5.8.0 | December 2003 | Publication | | |
| V5.9.0 | February 2004 | Publication | | |
| V5.10.0 | May 2004 | Publication | | |
| V5.11.0 | November 2004 | Publication | | |
| V5.12.0 | July 2005 | Publication | | |