# ETSI TS 125 101 V11.6.0 (2013-07)



Universal Mobile Telecommunications System (UMTS); User Equipment (UE) radio transmission and reception (FDD) (3GPP TS 25.101 version 11.6.0 Release 11)



Reference
RTS/TSGR-0425101vb60

Keywords
UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: <a href="http://www.etsi.org">http://www.etsi.org</a>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a>

#### **Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2013.
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup> and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**<sup>TM</sup> and **LTE**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

# Contents

Intelle	ectual Property Rights	2
Forev	word	2
Forev	word	13
1	Scope	14
2	References	14
3	Definitions, symbols and abbreviations	14
3.1	Definitions	
3.2	Abbreviations	16
4	General	
4.1	Relationship between Minimum Requirements and Test Requirements	
4.2	Power Classes	
4.3	Control and monitoring functions	
4.3.1	Minimum requirement	
4.4	RF requirements in later releases	
5	Frequency bands and channel arrangement	
5.1	General	
5.2	Frequency bands	
5.3 5.4	TX-RX frequency separation	
5.4 5.4.1	Channel spacing	
5.4.2	Channel raster	
5.4.3	Channel number	
5.4.4	UARFCN	
6	Transmitter characteristics	26
6.1	General	
6.2	Transmit power	
6.2.1	UE maximum output power	
6.2.1A		
6.2.1B		
6.2.10		
6.2.2	UE maximum output power with HS-DPCCH and E-DCH	
6.2.2 <i>A</i>	UE maximum output power for DC-HSUPA	31
6.2.2B		
6.2.2C	1 1	
6.2.2D	1 1	
6.2.3	UE Relative code domain power accuracy	33
6.2.3A	1	
6.2.3B	1	
6.2.3C 6.2.3E	*	
6.2.3L	Frequency Error	
6.3A	Frequency Error for DC-HSUPA	
6.3B	Frequency error for UL OLTD	
6.3C	Frequency error for UL CLTD	
6.3D	Frequency error for UL MIMO	
6.4	Output power dynamics	
6.4.1	Open loop power control	
6.4.1.1	1	
6.4.1.1	1	
6.4.2	Inner loop power control in the uplink	
6.4.2.1	1	
6.4.2.1	1.1 Minimum requirement	35

6.4.2.1.1 <i>A</i>	A Additional requirement for DC-HSUPA	36
6.4.2.1.1E	Additional requirement for UL OLTD	37
6.4.2.1.10	Additional requirement for UL CLTD	37
6.4.2.1.11		
6.4.3	Minimum output power	37
6.4.3.1	Minimum requirement	37
6.4.3.1A	Additional requirement for DC-HSUPA	37
6.4.3.1B	Additional requirement for UL OLTD	37
6.4.3.1C	Additional requirement for UL CLTD	37
6.4.3.1D	Additional requirement for UL MIMO	37
6.4.4	Out-of-synchronization handling of output power	37
6.4.4.1	Minimum requirement	
6.4.4.1A	Additional requirement for UL OLTD	38
6.4.4.1B	Additional requirement for UL CLTD	
6.4.4.1C	Additional requirement for UL MIMO	38
6.4.4.2	Test case	
6.4A	Output pattern dynamics	
6.4A.1	Out-of-quality handling of TPI applicability	
6.4A.1.1	Minimum requirement	
6.4A.1.2	Test case	
6.5	Transmit ON/OFF power	
6.5.1	Transmit OFF power	
6.5.1.1	Minimum requirement	
6.5.1.1A	Additional requirement for DC-HSUPA	
6.5.1.1B	Additional requirement for UL OLTD	
6.5.1.1C	Additional requirement for UL CLTD	
6.5.1.1D	Additional requirement for UL MIMO	
6.5.2	Transmit ON/OFF Time mask	
6.5.2.1	Minimum requirement	
6.5.2.1A	Additional requirement for UL OLTD	
6.5.2.1B	Additional requirement for UL CLTD	
6.5.2.1C	Additional requirement for UL MIMO	
6.5.3	Change of TFC	
6.5.3.1	Minimum requirement	
6.5.3.1A	Additional requirement for UL OLTD	
6.5.3.1B	Additional requirement for UL CLTD	
6.5.4	Power setting in uplink compressed mode	
6.5.4.1	Minimum requirement	
6.5.4.1A	Additional requirement for UL OLTDAdditional requirement for UL CLTD	
	•	
6.5.5 6.5.5.1	HS-DPCCH	
6.5.5.1A	Additional requirement for UL OLTD	
6.5.5.1B	Additional requirement for UL CLTD	
6.5.5.1C	Additional requirement for UL MIMO	
6.6	Output RF spectrum emissions.	
6.6.1	Occupied bandwidth	
6.6.1A	Occupied bandwidth for DC-HSUPA	
6.6.1B	Occupied bandwidth for UL OLTD	
6.6.1C	Occupied bandwidth for UL CLTD	
6.6.1D	Occupied bandwidth for UL MIMO	
6.6.2	Out of band emission	
6.6.2.1	Spectrum emission mask	
6.6.2.1.1	Minimum requirement	
6.6.2.1A	Additional Spectrum emission mask for DC-HSUPA	
6.6.2.1A.1		
6.6.2.1A.2	1	
6.6.2.1B	Additional requirement for UL OLTD	
6.6.2.1C	Additional requirement for UL CLTD	
6.6.2.1D	Additional requirement for UL MIMO	
6.6.2.2	Adjacent Channel Leakage power Ratio (ACLR)	
6.6.2.2.1	Minimum requirement	

6.6.2.2.1A	Additional requirement for DC-HSUPA	
6.6.2.2.1B	Additional requirement for UL OLTD	
6.6.2.2.1C	Additional requirement for UL CLTD	
6.6.2.2.1D	Additional requirement for UL MIMO	
6.6.3	Spurious emissions	
6.6.3.1	Minimum requirement	
6.6.3.1.1	Additional requirement with a guard band	
6.6.3.1A	Additional requirement for DC-HSUPA	
6.6.3.1A.1	Additional requirement with a guard band for DC-HSUPA	
6.6.3.1B	Additional requirement for UL OLTD	
6.6.3.1C	Additional requirement for UL CLTD	
6.6.3.1D	Additional requirement for UL MIMO	
	ransmit intermodulation	
6.7.1	Minimum requirement	
6.7.1A	Additional requirement for DC-HSUPA	
6.7.1B	Additional requirement for UL OLTD	
6.7.1C	Additional requirement for UL CLTD	
6.7.1D	Additional requirement for UL MIMO	
	Pransmit modulation	
6.8.1	Transmit pulse shape filter	
6.8.1A	Additional requirement for UL OLTD	
6.8.1B	Additional requirement for UL CLTD	
6.8.1C	Additional requirement for UL MIMO	
6.8.2	Error Vector Magnitude	
6.8.2.1	Minimum requirement	
6.8.2.1A 6.8.2.1B	Additional requirement for DC-HSUPA	
6.8.2.1 <b>G</b>	Additional requirement for UL OLTD	
6.8.2.1D	Additional requirement for UL MIMO	
6.8.3	Peak code domain error	
6.8.3.1	Minimum requirement	
6.8.3.1A	Additional requirement for UL OLTD	
6.8.3.1B	Additional requirement for UL CLTD	
6.8.3a	Relative code domain error	
6.8.3a.1	Relative Code Domain Error	
6.8.3a.1.1	Minimum requirement	
6.8.3a.1.1a	Additional requirement for DC-HSUPA	
6.8.3a.1.1b	Additional requirement for UL OLTD	75
6.8.3a.1.1c	Additional requirement for UL CLTD	75
6.8.3a.1.1d	Additional requirement for UL MIMO	75
6.8.3b	In-band emission for DC-HSUPA	
6.8.3b.1	Minimum requirement for DC-HSUPA	
6.8.4	Phase discontinuity for uplink DPCH	
6.8.4.1	Minimum requirement	
6.8.4.1A	Additional requirement for UL OLTD	
6.8.4.1B	Additional requirement for UL CLTD	
6.8.5	Phase discontinuity for HS-DPCCH	
6.8.5.1	Minimum requirement	
6.8.5.1A	Additional requirement for UL OLTD	
6.8.5.1B	Additional requirement for UL CLTD	
6.8.6	Phase discontinuity for E-DCH	
6.8.6.1	Minimum requirement	
6.8.6.1A	Additional requirement for UL OLTD	
6.8.6.1B	Additional requirement for UL CLTD	
6.8.7	Time alignment error for DC-HSUPA	
6.8.7.1	Minimum requirement	
6.8.7A 6.8.7A.1	Time alignment error for UL OLTD	
6.8.7B	Time alignment error for UL CLTD	
6.8.7В.1	Minimum requirement	
6.8.7C	Time alignment error for UL MIMO	
6.8.7C.1	Minimum requirement	
J. J		············· / /

7	Receiver characteristics	
7.1	General	79
7.2	Diversity characteristics	81
7.3	Reference sensitivity level	81
7.3.1	Minimum requirement	81
7.3.2	Additional requirement for DC-HSDPA	
7.3.3	Additional requirement for DB-DC-HSDPA	85
7.3.4	Additional requirement for single band 4C-HSDPA	
7.3.5	Additional requirement for dual band 4C-HSDPA	
7.3.6	Additional requirement for single band 8C-HSDPA	
7.3.7	Additional requirement for single band NC-4C-HSDPA	
7.4	Maximum input level	
7.4.1	Minimum requirement for DPCH reception	
7.4.2	Minimum requirement for HS-PDSCH reception	
7.4.2.1		
7.4.2.2	•	
7.4.3	Additional requirement for DC-HSDPA and DB-DC-HSDPA	
7.4.3.1	*	
7. <del>4</del> .3.1 7.4.3.2	•	
7.4.3.2 7.4.4	Additional requirement for single band/dual band 4C-HSDPA or single band 8C-HSDPA and single	
7.4.4	band NC-4C-HSDPAband NC-4C-HSDPA	
7.4.4.1		
7.4.4.2		
7.5	Adjacent Channel Selectivity (ACS)	
7.5.1	Minimum requirement	
7.5.2	Additional requirement for DC-HSDPA and DB-DC-HSDPA	
7.5.3	Additional requirement for single band/dual band 4C-HSDPA	
7.5.4	Additional requirement for single band 8C-HSDPA	
7.5.5	Additional requirement for single band NC-4C-HSDPA	
7.6	Blocking characteristics	
7.6.1	Minimum requirement (In-band blocking)	
7.6.1A		
7.6.1B		
7.6.1C	· · · · · · · · · · · · · · · · · · ·	
7.6.1C		
7.6.1C		
7.6.1D		
7.6.1D 7.6.1D		
7.6.1D 7.6.1E		
	1 6	
7.6.1E.		
7.6.1E.		
7.6.1F	Additional requirement for single band NC-4C-HSDPA (In-band blocking)	
7.6.1F.		
7.6.1F.		
7.6.2	Minimum requirement (Out-of-band blocking)	
7.6.2A	1	
7.6.2B	1	
7.6.2C	1 0	
7.6.2D	1	
7.6.2E	Additional requirement for single band 8C-HSDPA (Out-of-band blocking)	
7.6.2F	Additional requirement for single band NC-4C-HSDPA (Out-of-band blocking)	
7.6.3	Minimum requirement (Narrow band blocking)	
7.6.3A	1	
7.6.3B	1	
7.6.3C	1 0	
7.6.3C		
7.6.3C		
7.6.3D	Additional requirement for dual band 4C-HSDPA (Narrow band blocking)	124
7.6.3D	.1 Single uplink operation	124
7.6.3D	.2 Dual uplink operation	125
7.6.3E	Additional requirement for single band NC-4C-HSDPA (Narrow band blocking)	126

7.6.3E.1	Single uplink operation	
7.6.3E.2	Dual uplink operation	127
7.7	Spurious response	
7.7.1	Minimum requirement	128
7.7.2	Additional requirement for DC-HSDPA, DB-DC-HSDPA, single band/dual band 4C-HSDPA and	d
	single band 8C-HSDPA and single band NC-4C-HSDPA	
7.8	Intermodulation characteristics	129
7.8.1	Minimum requirement	
7.8.1A	Additional requirement for DC-HSDPA and DB-DC-HSDPA	130
7.8.1B	Additional requirement for DC-HSUPA	131
7.8.1C	Additional requirement for single band 4C-HSDPA	132
7.8.1C.1	Single uplink operation	132
7.8.1C.2	Dual uplink operation	133
7.8.1D	Additional requirement for dual band 4C-HSDPA	133
7.8.1D.1	Single uplink operation	133
7.8.1D.2	Dual uplink operation	134
7.8.1E	Additional requirement for single band 8C-HSDPA	136
7.8.1E.1	Single uplink operation	13 <i>6</i>
7.8.1C.2	Dual uplink operation	136
7.8.1F	Additional requirement for single band NC-4C-HSDPA	
7.8.1F.1	Single uplink operation	137
7.8.1F.2	Dual uplink operation	138
7.8.2	Minimum requirement (Narrow band)	138
7.8.2A	Additional requirement for DC-HSDPA and DB-DC-HSDPA (Narrow band)	139
7.8.2B	Additional requirement for DC-HSUPA (Narrow band)	139
7.8.2C	Additional requirement for single band 4C-HSDPA (Narrow band)	140
7.8.2C.1	Single uplink operation	140
7.8.2C.2	Dual uplink operation	
7.8.2D	Additional requirement for dual band 4C-HSDPA (Narrow band)	
7.8.2D.1	Single uplink operation	141
7.8.2D.2	Dual uplink operation	142
7.8.2E	Additional requirement for single band NC-4C-HSDPA (Narrow band)	144
7.8.2E.1	Single uplink operation	144
7.8.2E.2	Dual uplink operation	144
7.9	Spurious emissions	145
7.9.1	Minimum requirement	145
7.10	Reference input power adjustment for a dual band device	151
0 D		1.50
	erformance requirement	
8.1	General	
8.2	Demodulation in static propagation conditions	
8.2.1	(void)	
8.2.2	(void)	
8.2.3	Demodulation of Dedicated Channel (DCH)	
8.2.3.1	Minimum requirement	
8.3	Demodulation of DCH in multi-path fading propagation conditions	
8.3.1	Single Link Performance	
8.3.1.1	Minimum requirement	
8.4	Demodulation of DCH in moving propagation conditions	
8.4.1	Single link performance	
8.4.1.1	Minimum requirement	
8.5	Demodulation of DCH in birth-death propagation conditions	
8.5.1	Single link performance	
8.5.1.1	Minimum requirement	
8.5A	Demodulation of DCH in high speed train condition	
8.5A.1	General Minimum requirement	
8.5A.2	Minimum requirement	
8.6	Demodulation of DCH in downlink Transmit diversity modes	
8.6.1	Demodulation of DCH in open-loop transmit diversity mode	
8.6.1.1	Minimum requirement	
8.6.2 8.6.2.1	Demodulation of DCH in closed loop transmit diversity mode	159 159
a.p./. I	william redurement	1 <b>7</b> '

8.6.3	(void)	
8.7	Demodulation in Handover conditions	
8.7.1	Demodulation of DCH in Inter-Cell Soft Handover	
8.7.1.1	Minimum requirement	
8.7.2	Combining of TPC commands from radio links of different radio link sets	
8.7.2.1	Minimum requirement	
8.7.3	Combining of reliable TPC commands from radio links of different radio link sets	
8.7.3.1	Minimum requirement	
8.8	Power control in downlink	
8.8.1	Power control in the downlink, constant BLER target	
8.8.1.1	Minimum requirements	
8.8.2	Power control in the downlink, initial convergence	164
8.8.2.1	Minimum requirements	
8.8.3	Power control in downlink, wind up effects	165
8.8.3.1	Minimum requirements	
8.8.4	Power control in the downlink, different transport formats	166
8.8.4.1	Minimum requirements	
8.8.5	Power control in the downlink for F-DPCH	167
8.8.5.1	Minimum requirements	
8.9	Downlink compressed mode	
8.9.1	Single link performance	
8.9.1.1	Minimum requirements	
8.10	Blind transport format detection.	
8.10.1	Minimum requirement	
8.11	Detection of Broadcast channel (BCH)	
8.11.1	Minimum requirement without transmit diversity	
8.11.2	Minimum requirement with open loop transmit diversity	
8.12	Demodulation of Paging Channel (PCH)	
8.12.1	Minimum requirement	
8.13	Detection of Acquisition Indicator (AI)	
8.13.1	Minimum requirement	
8.13A	Detection of E-DCH Acquisition Indicator (E-AI)	
8.13A.1	Minimum requirement	
8.14	UE UL power control operation with discontinuous UL DPCCH transmission operation	
8.14.1	Minimum requirement	
8.15	(void)	
8.16	(void)	174
9 P	erformance requirement (HSDPA)	174
9.1	(void)	
9.2	Demodulation of HS-DSCH (Fixed Reference Channel)	
9.2.1	Single Link performance	
9.2.1.1	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E	
9.2.1.2	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3	
9.2.1.3	Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5	
9.2.1.4	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E	
9.2.1.5	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E	
9.2.1.6	Requirement 64QAM, Fixed Reference Channel (FRC) H-Set 8/8A/8B/8C/8E	
9.2.1.7	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E	
9.2.1.8	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E	
9.2.2	Open Loop Diversity performance	
9.2.2.1	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E	
9.2.2.2	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E	
9.2.2.3	Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5	
9.2.3	Closed Loop Diversity Performance	
9.2.3.1	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3	
9.2.3.2	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3	
9.2.3.3	Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5	
9.2.3.4	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 6	
9.2.3.5	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 6	
9.2.4	MIMO Performance	
9241	Requirement Fixed Reference Channel (FRC) H-Set 9/9A/9B/9C/9E	

9.2.4.2	Requirement Fixed Reference Channel (FRC) H-Set 11/11A/11B/11C/11E	209
9.2.4A	MIMO only with single-stream restriction Performance	211
9.2.4A.1	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E	211
9.2.4A.2	Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E	213
9.3	Reporting of Channel Quality Indicator	215
9.3.1	Single Link Performance	215
9.3.1.1	AWGN propagation conditions	215
9.3.1.1.1	Minimum Requirement – UE HS-DSCH categories 1-20	215
9.3.1.1.2	Minimum Requirement – UE HS-DSCH categories 13,14,17,18, 19 and 20	
9.3.1.1.3	Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30,	
	31, 32, 35 and 36	217
9.3.1.2	Fading propagation conditions	218
9.3.1.2.1	Minimum Requirement – UE HS-DSCH categories 1-20	218
9.3.1.2.2	Minimum Requirement – UE HS-DSCH categories 13,14,17,18, 19 and 20	219
9.3.1.2.3	Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30,	
	31, 32, 35 and 36	220
9.3.1.3	Periodically varying radio conditions	221
9.3.1.3.1	Minimum Requirement – UE HS-DSCH categories 1-20	221
9.3.2	Open Loop Diversity Performance	223
9.3.2.1	AWGN propagation conditions	223
9.3.2.1.1	Minimum Requirement – UE HS-DSCH categories 1-20	223
9.3.2.1.2	Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30,	
	31, 32, 35 and 36	223
9.3.2.2	Fading propagation conditions	224
9.3.2.2.1	Minimum Requirement – UE HS-DSCH categories 1-20	224
9.3.2.2.2	Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30,	
	31, 32, 35 and 36	225
9.3.2.3	Periodically varying radio conditions	225
9.3.2.3.1	Minimum Requirement – UE HS-DSCH categories 1-20	226
9.3.3	Closed Loop Diversity Performance	227
9.3.3.1	AWGN propagation conditions	227
9.3.3.1.1	Minimum Requirement – UE HS-DSCH categories 1-20	
9.3.3.2	Fading propagation conditions	228
9.3.3.2.1	Minimum Requirement – UE HS-DSCH categories 1-20	
9.3.3.3	Periodically varying radio conditions	
9.3.3.3.1	Minimum Requirement – UE HS-DSCH categories 1-20	
9.3.4	MIMO Performance	
9.3.4.1	MIMO Single Stream Fading Conditions	
9.3.4.1.1	Minimum Requirement - UE HS-DSCH categories 15-20	
9.3.4.1.2	Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36	
9.3.4.2	MIMO Dual Stream Fading Conditions	
9.3.4.2.1	Minimum Requirement – UE HS-DSCH categories 15-20	
9.3.4.2.2	Minimum Requirement – UE HS-DSCH categories 19-20	
9.3.4.2.3	Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36	
9.3.4.2.4	Additional Requirement – UE HS-DSCH categories 27, 28, 30, 32 and 36	
9.3.4.3	MIMO Dual Stream Static Orthogonal Conditions	
9.3.4.3.1	Minimum Requirement –UE HS-DSCH categories 15-20	
9.3.4.3.2	Minimum Requirement –UE HS-DSCH categories 19-20	
9.3.4.3.3	Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36	
9.3.4.3.4	Additional Requirement – UE HS-DSCH categories 27, 28, 30, 32 and 36	
9.3.5	MIMO only with single-stream restriction Performance	
9.3.5.1	MIMO only with single-stream restriction Fading Conditions	
9.3.5.1.1	Minimum Requirement	
9.4	HS-SCCH Detection Performance	
9.4.1	HS-SCCH Type 1 Single Link Performance	
9.4.2	HS-SCCH Type 1 Open Loop Diversity Performance	
9.4.3	HS-SCCH Type 3 Performance for MIMO only with single stream restriction	
9.4.4	HS-SCCH loss demodulation of HS DSCH (Fixed Reference Channel)	
9.5	HS-SCCH-less demodulation of HS-DSCH (Fixed Reference Channel)	
9.5.1	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 7	
9.6 9.6 1	Requirements for HS-DSCH and HS-SCCH reception in CELL_FACH state	251 251

9.6.2	Requirement QPSK, Fixed Reference Channel (FRC) H-Set 3	
7.0.2	HS-SCCH Detection Performance	
9.6.2.1	HS-SCCH Type 1 Single Link Performance	252
10	Performance requirement (E-DCH)	253
10.1	General	
10.1	Detection of E-DCH HARQ ACK Indicator Channel (E-HICH)	
10.2.1	Single link performance	
10.2.1.		
10.2.1.	Detection in Inter-Cell Handover conditions	
10.2.2.		
10.2.2.	·	
10.2.2.	Detection of E-DCH Relative Grant Channel (E-RGCH)	
10.3.1	Single link performance	
10.3.1.		
10.3.1.	Detection in Inter-Cell Handover conditions	
10.3.2.		
10.3.2. 10.4	Demodulation of E-DCH Absolute Grant Channel (E-AGCH)	
10.4.1	Single link performance	
10.4.1 10.4.1.	<u> </u>	
10.7.1.	1 CHOImance requirement	200
11	Performance requirement (MBMS)	260
11.1	Demodulation of MCCH	261
11.1.1	Minimum requirement	261
11.1.2	Minimum requirement for MBSFN	261
11.2	Demodulation of MTCH	261
11.2.1	Minimum requirement	262
11.2.2	Minimum requirement for MBSFN	
11.3	Demodulation of MTCH and cell identification	
11.3.1	Minimum requirement	
Annex	x A (normative): Measurement channels	264
A.1		
	General	264
	General	
A.2	UL reference measurement channel	264
A.2 A.2.1	UL reference measurement channel	264 264
A.2 A.2.1	UL reference measurement channel	264 264 265
	UL reference measurement channel	264 264 265
A.2 A.2.1 A.2.2	UL reference measurement channel	264 264 265 266
A.2 A.2.1 A.2.2 A.2.3	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.5	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1	UL reference measurement channel (12.2 kbps)  UL reference measurement channel (64 kbps)  UL reference measurement channel (144 kbps)  UL reference measurement channel (384 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation  UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation  Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel  DL reference measurement channel (0 kbps)  DL reference measurement channel (12.2 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3 A.3.0 A.3.1 A.3.2 A.3.3	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5	UL reference measurement channel (12.2 kbps)  UL reference measurement channel (64 kbps)  UL reference measurement channel (144 kbps)  UL reference measurement channel (384 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation  UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation.  Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel  DL reference measurement channel (0 kbps)  DL reference measurement channel (12.2 kbps)  DL reference measurement channel (144 kbps)  DL reference measurement channel (144 kbps)  DL reference measurement channel (384 kbps)  DL reference measurement channel (2 (64 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5	UL reference measurement channel UL reference measurement channel (12.2 kbps) UL reference measurement channel (64 kbps) UL reference measurement channel (144 kbps) UL reference measurement channel (384 kbps) UL reference measurement channel (768 kbps) UL reference measurement channel (768 kbps) UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation. Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel DL reference measurement channel (0 kbps) DL reference measurement channel (12.2 kbps) DL reference measurement channel (44 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel (2 (64 kbps)) DL reference measurement channel (64 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5	UL reference measurement channel (12.2 kbps)  UL reference measurement channel (64 kbps)  UL reference measurement channel (144 kbps)  UL reference measurement channel (384 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation  UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation.  Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel  DL reference measurement channel (0 kbps)  DL reference measurement channel (12.2 kbps)  DL reference measurement channel (144 kbps)  DL reference measurement channel (144 kbps)  DL reference measurement channel (384 kbps)  DL reference measurement channel (2 (64 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.4A	UL reference measurement channel UL reference measurement channel (12.2 kbps) UL reference measurement channel (64 kbps) UL reference measurement channel (144 kbps) UL reference measurement channel (768 kbps) UL reference measurement channel (768 kbps) UL reference measurement channel for DC-HSUPA using BPSK modulation UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel DL reference measurement channel (0 kbps) DL reference measurement channel (12.2 kbps) DL reference measurement channel (64 kbps) DL reference measurement channel (144 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel of BTFD performance requirements Reference parameters for discontinuous UL DPCCH transmission	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.4A	UL reference measurement channel (12.2 kbps)  UL reference measurement channel (64 kbps)  UL reference measurement channel (144 kbps)  UL reference measurement channel (384 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel (768 kbps)  UL reference measurement channel for DC-HSUPA using BPSK modulation  UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation  UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation  Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel  DL reference measurement channel (0 kbps)  DL reference measurement channel (12.2 kbps)  DL reference measurement channel (144 kbps)  DL reference measurement channel (384 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.4A	UL reference measurement channel UL reference measurement channel (12.2 kbps) UL reference measurement channel (64 kbps) UL reference measurement channel (144 kbps) UL reference measurement channel (768 kbps) UL reference measurement channel (768 kbps) UL reference measurement channel for DC-HSUPA using BPSK modulation UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests  DL reference measurement channel DL reference measurement channel (0 kbps) DL reference measurement channel (12.2 kbps) DL reference measurement channel (64 kbps) DL reference measurement channel (144 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel (384 kbps) DL reference measurement channel of BTFD performance requirements Reference parameters for discontinuous UL DPCCH transmission	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.3.4 A.3.5 A.4 A.4A	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.4A A.5 A.6 A.7	UL reference measurement channel	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.5 A.4 A.5 A.6 A.7	UL reference measurement channel (12.2 kbps)	
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6 A.2.7 A.2.8 A.3.0 A.3.1 A.3.2 A.3.3 A.3.4 A.3.5 A.4 A.4A A.5 A.6 A.7	UL reference measurement channel	

A.7.1.		
A.7.1.		
A.7.1.		
A.7.1. A.7.1.		
A.7.1. A.7.1.		
A.7.1.	Fixed Reference Channel Definition H-Set 12	295
A.8	DL reference parameters for MBMS tests	296
A.8.1	MCCH	
A.8.1	MTCH	296
A.9	DL reference parameters for combined MTCH demodulation and cell identification	297
Anne	ex B (normative): Propagation conditions	298
B.1	(void)	298
B.2	Propagation Conditions	298
B.2.1	Static propagation condition	
B.2.2	Multi-path fading propagation conditions	
B.2.3	Moving propagation conditions	
B.2.4	Birth-Death propagation conditions	
B.2.5	High speed train condition.	
B.2.6 B.2.6.	MIMO propagation conditions	
B.2.6.		
B.2.6.		
Anne	ex C (normative): Downlink Physical Channels	307
C.1	General	307
C.2	Connection Set-up	307
C.3	During connection	
C.3.1	Measurement of Rx Characteristics	
C.3.1	Measurement of Performance requirements	
C.3.3	Connection with open-loop transmit diversity mode	
C.3.4	Connection with closed loop transmit diversity mode	
C.3.5	(void)	310
C.4	W-CDMA Modulated Interferer	310
C.5	HSDPA DL Physical channels	311
C.5.1	Downlink Physical Channels connection set-up.	
C.5.2	OCNS Definition	
C.5.3	Test Definition for Enhanced Performance Type 3i	320
C.5.3.		
C.5.3.		
C.5.3.		
C.5.4	Simplified Multi Carrier HSDPA testing method	
C.6	MBMS DL Physical channels	
C.6.1		
	Downlink Physical Channels connection set-up	
C.6.2	Downlink Physical Channels connection set-up	324
C.6.2	Downlink Physical Channels connection set-up.  Downlink Physical Channels connection set-up for MBSFN	324
C.6.2	Downlink Physical Channels connection set-up	324
C.6.2	Downlink Physical Channels connection set-up.  Downlink Physical Channels connection set-up for MBSFN	324 325
C.6.2 <b>Anne</b> D.1	Downlink Physical Channels connection set-up.  Downlink Physical Channels connection set-up for MBSFN	324325325325

D.2.3	Vibration		326
Anno	ex E (informative):	UARFCN numbers	327
E.1	General		327
E.2	List of UARFCN use	d for UTRA FDD bands	327
Anno	ex F (informative):	Change history	331
Histo	ory		336

### **Foreword**

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

#### where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

# 1 Scope

The present document establishes the minimum RF characteristics of the FDD mode of UTRA for the User Equipment (UE).

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] (void) [2] ITU-R Recommendation SM.329: "Unwanted emissions in the spurious domain". [3] (void) [4] 3GPP TS 25.433: "UTRAN lub Interface NBAP Signalling". [5] ETSI ETR 273: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement of radiated methods of measurement (using test sites) and evaluation of the corresponding measurement uncertainties; Part 1: Uncertainties in the measurement of mobile radio equipment characteristics; Sub-part 2: Examples and annexes". [6] 3GPP TS 45.004: "Modulation". 3GPP TS 25.331: "Radio Resource Control (RRC); Protocol Specification". [7] [8] 3GPP TS25.214: "Physical layer procedures (FDD)". 3GPP TS 25.307: "Requirements on User Equipments (UEs) supporting a release-independent [9] frequency band". [10] 3GPP TS25.212:" Multiplexing and channel coding (FDD)". [11] 3GPP TS 36.101: "E-UTRA User Equipment (UE) radio transmission and reception".

# 3 Definitions, symbols and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the following definitions apply:

**Enhanced performance requirements type 1**: This defines performance requirements which are optional for the UE. The requirements are based on UEs which utilise receiver diversity.

**Enhanced performance requirements type 2**: This defines performance requirements which are optional for the UE, The requirements are based on UEs which utilise a chip equaliser receiver structure.

**Enhanced performance requirements type 3**: This defines performance requirements which are optional for the UE, The requirements are based on UEs which utilise a chip equaliser receiver structure with receiver diversity.

**Enhanced performance requirements type 3i**: This defines performance requirements which are optional for the UE, The requirements are based on UEs which utilise an interference-aware chip equaliser receiver structure with receiver diversity.

**Power Spectral Density:** The units of Power Spectral Density (PSD) are extensively used in this document. PSD is a function of power versus frequency and when integrated across a given bandwidth, the function represents the mean power in such a bandwidth. When the mean power is normalised to (divided by) the chip-rate it represents the mean energy per chip. Some signals are directly defined in terms of energy per chip, (DPCH\_E<sub>c</sub>, E<sub>c</sub>, OCNS\_E<sub>c</sub> and S-CCPCH\_E<sub>c</sub>) and others defined in terms of PSD ( $I_o$ ,  $I_{oc}$ ,  $I_{or}$  and  $\hat{I}_{or}$ ). There also exist quantities that are a ratio of energy per chip to PSD (DPCH\_E<sub>c</sub>/ $I_{or}$ , E<sub>c</sub>/ $I_{or}$  etc.). This is the common practice of relating energy magnitudes in communication systems.

It can be seen that if both energy magnitudes in the ratio are divided by time, the ratio is converted from an energy ratio to a power ratio, which is more useful from a measurement point of view. It follows that an energy per chip of X dBm/3.84 MHz can be expressed as a mean power per chip of X dBm. Similarly, a signal PSD of Y dBm/3.84 MHz can be expressed as a signal power of Y dBm.

**Maximum Output Power:** This s a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a bandwidth of at least  $(1+\alpha)$  times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot. For DC-HSUPA the maximum output power is defined by the sum of the broadband transmit power of each carrier in the UE.

**Mean power:** When applied to a W-CDMA modulated signal this is the power (transmitted or received) in a bandwidth of at least  $(1+\alpha)$  times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot unless otherwise stated.

Nominal Maximum Output Power: This is the nominal power defined by the UE power class.

**Primary uplink frequency**: If a single uplink frequency is configured for the UE, then it is the primary uplink frequency. In case more than one uplink frequency is configured for the UE, then the primary uplink frequency is the frequency on which the E-DCH corresponding to the serving E-DCH cell associated with the serving HS-DSCH cell is transmitted. The association between a pair of uplink and downlink frequencies is indicated by higher layers.

**RRC filtered mean power:** The mean power as measured through a root raised cosine filter with roll-off factor  $\alpha$  and a bandwidth equal to the chip rate of the radio access mode.

NOTE 1: The RRC filtered mean power of a perfectly modulated W-CDMA signal is 0.246 dB lower than the mean power of the same signal.

NOTE 2: The roll-off factor  $\alpha$  is defined in section 6.8.1.

**Secondary serving HS-DSCH cell(s)**: In addition to the serving HS-DSCH cell, the set of cells where the UE is configured to simultaneously monitor an HS-SCCH set and receive the HS-DSCH if it is scheduled in that cell. There can be up to 7 secondary serving HS-DSCH cells.

**Secondary uplink frequency**: A secondary uplink frequency is a frequency on which an E-DCH corresponding to a serving E-DCH cell associated with a secondary serving HS-DSCH cell is transmitted. The association between a pair of uplink and downlink frequencies is indicated by higher layers.

**Throughput:** Number of information bits per second excluding CRC bits successfully received on HS-DSCH by a HSDPA capable UE.

1<sup>st</sup> secondary serving HS-DSCH cell: If the UE is configured with two uplink frequencies, the 1<sup>st</sup> secondary serving HS-DSCH cell is the secondary serving HS-DSCH cell that is associated with the secondary uplink frequency. If the UE is configured with a single uplink frequency, the 1<sup>st</sup> secondary serving HS-DSCH cell is a secondary serving HS-DSCH cell whose index is indicated by higher layers.

#### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

4C-HSDPA Four-Carrier HSDPA. HSDPA operation configured on 3 or 4 DL carriers.

ACLR Adjacent Channel Leakage power Ratio

ACS Adjacent Channel Selectivity
AICH Acquisition Indication Channel

BER Bit Error Ratio
BLER Block Error Ratio
CQI Channel Quality Indicator

CW Continuous Wave (un-modulated signal)

DB-DC-HSDPA Dual Band Dual Cell HSDPA

DC-HSDPA Dual Cell HSDPA
DC-HSUPA Dual Cell HSUPA

DCH Dedicated Channel, which is mapped into Dedicated Physical Channel.

DIP Dominant Interferer Proportion ratio

DL Down Link (forward link)
DTX Discontinuous Transmission

DPCCH Dedicated Physical Control Channel

DPCH Dedicated Physical Channel

DPCH\_E<sub>c</sub> Average energy per PN chip for DPCH.

 $\underline{\underline{DPCH}_{\underline{E}_{\underline{c}}}}$  The ratio of the transmit energy per PN chip of the DPCH to the total transmit power spectral

density at the Node B antenna connector.

DPDCH Dedicated Physical Data Channel
E-AGCH E-DCH Absolute Grant Channel
E-DCH Enhanced Dedicated Channel

E-DPCCH E-DCH Dedicated Physical Control Channel
E-DPDCH E-DCH Dedicated Physical Data Channel
E-HICH E-DCH HARQ ACK Indicator Channel
E-RGCH E-DCH Relative Grant Channel
EIRP Effective Isotropic Radiated Power

E<sub>c</sub> Average energy per PN chip.

 $\frac{E_c}{I_{or}}$  The ratio of the average transmit energy per PN chip for different fields or physical channels to the

total transmit power spectral density.

FACH Forward Access Channel FDD Frequency Division Duplex

FDR False transmit format Detection Ratio. A false Transport Format detection occurs when the

receiver detects a different TF to that which was transmitted, and the decoded transport block(s)

for this incorrect TF passes the CRC check(s).

F-TPICH Fractional Transmitted Precoding Indicator Channel

Frequency of unwanted signal. This is specified in bracket in terms of an absolute frequency(s) or

a frequency offset from the assigned channel frequency. For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset

refers to the assigned channel frequencies of the individual cells.

HARQ Hybrid Automatic Repeat Request
HSDPA High Speed Downlink Packet Access
HSUPA High Speed Uplink Packet Access

HS-DPCCH Dedicated Physical Control Channel (uplink) for HS-DSCH

HS-DPCCH<sub>2</sub> Secondary Dedicated Physical Control Channel (uplink) for HS-DSCH, when

Secondary\_Cell\_Enabled is greater than 3

HS-DSCH High Speed Downlink Shared Channel HS-PDSCH High Speed Physical Downlink Shared Channel

**HS-SCCH** High Speed Shared Control Channel

Information Data Rate

 $I_{oc}$ 

Rate of the user information, which must be transmitted over the Air Interface. For example, output rate of the voice codec.

 $I_{o}$ The total received power spectral density, including signal and interference, as measured at the UE antenna connector.

The power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited white noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector. For DC-HSDPA and DB-DC-HSDPA,  $I_{oc}$  is defined for each of the cells individually and is assumed to be equal for

both cells unless explicitly stated per cell.

 $I_{oc}"$ The received power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of the summation of the received power spectral densities of the two strongest interfering cells plus  $I_{oc}$  as measured at the UE antenna connector. The respective power spectral density of each interfering cell relative to I<sub>oc</sub>" is defined by its associated DIP value.

 $I_{otx}$ The power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited white noise source (simulating Node B transmitter impairments) as measured at the Node B transmit antenna connector(s). For DC-HSDPA and DB-DC-HSDPA,  $I_{av}$  is defined for each of the cells individually and is assumed to be equal for both cells unless explicitly stated per cell.

 $I_{or}$ The total transmit power spectral density (integrated in a bandwidth of  $(1+\alpha)$  times the chip rate and normalized to the chip rate) of the downlink signal at the Node B antenna connector. For DC-HSDPA and DB-DC-HSDPA,  $I_{or}$  is defined for each of the cells individually and is assumed to be equal for both cells unless explicitly stated per cell.

 $\hat{I}_{or}$ The received power spectral density (integrated in a bandwidth of  $(1+\alpha)$  times the chip rate and normalized to the chip rate) of the downlink signal as measured at the UE antenna connector. For DC-HSDPA and DB-DC-HSDPA,  $\hat{\mathbf{I}}_{or}$  is defined for each of the cells individually and is assumed to be equal for both cells unless explicitly stated per cell.

**MBSFN** MBMS over a Single Frequency Network

**MER** Message Error Ratio

Multiple Input Multiple Output **MIMO** 

Non-Contiguous Four-Carrier HSDPA. HSDPA operation configured on 2, 3 or 4 DL carriers with NC-4C-HSDPA

two non contiguous subblocks of adjacent carriers.

Node B A logical node responsible for radio transmission / reception in one or more cells to/from the User

Equipment. Terminates the Iub interface towards the RNC

Orthogonal Channel Noise Simulator, a mechanism used to simulate the users or control signals on **OCNS** 

the other orthogonal channels of a downlink link.

Average energy per PN chip for the OCNS. OCNS\_E

The ratio of the average transmit energy per PN chip for the OCNS to the total transmit power

spectral density.

P-CCPCH Primary Common Control Physical Channel

Paging Channel PCH

 $P - CCPCH \frac{E_c}{r}$ The ratio of the received P-CCPCH energy per chip to the total received power spectral density at

the UE antenna connector.

 $P - CCPCH \_E_c$ The ratio of the average transmit energy per PN chip for the P-CCPCH to the total transmit power

spectral density.

P-CPICH Primary Common Pilot Channel **PICH Paging Indicator Channel PPM** Parts Per Million

Number of information bits per second excluding CRC bits successfully received on HS-DSCH by R

a HSDPA capable UE.

<REFSENS> Reference sensitivity

<REF  $\hat{I}_{or}$  > Reference  $\hat{I}_{or}$ 

RACH Random Access Channel

SCH Synchronization Channel consisting of Primary and Secondary synchronization channels

S-CCPCH Secondary Common Control Physical Channel.  $S-CCPCH_E_c$  Average energy per PN chip for S-CCPCH. S-DPCCH Secondary Dedicated Physical Control Channel

S-E-DPCCH Secondary Dedicated Physical Control Channel for E-DCH S-E-DPDCH Secondary Dedicated Physical Data Channel for E-DCH

SG Serving Grant

SIR Signal to Interference ratio

SML Soft Metric Location (Soft channel bit)
STTD Space Time Transmit Diversity
TDD Time Division Duplexing
TFC Transport Format Combination

TFCI Transport Format Combination Indicator

TPC Transmit Power Control

TPI Transmitted Precoding Indicator
TSTD Time Switched Transmit Diversity

UE User Equipment
UL Up Link (reverse link)

UL CLTD Up Link Closed-Loop Transmit Diversity
UL OLTD Up Link Open-Loop Transmit Diversity
UTRA UMTS Terrestrial Radio Access

#### 4 General

# 4.1 Relationship between Minimum Requirements and Test Requirements

The Minimum Requirements given in this specification make no allowance for measurement uncertainty. The test specification 34.121 Annex F defines Test Tolerances. These Test Tolerances are individually calculated for each test. The Test Tolerances are used to relax the Minimum Requirements in this specification to create Test Requirements.

The measurement results returned by the test system are compared - without any modification - against the Test Requirements as defined by the shared risk principle.

The Shared Risk principle is defined in ETR 273 Part 1 sub-part 2 section 6.5.

#### 4.2 Power Classes

For UE power classes 1 and 2, a number of RF parameter are not specified. It is intended that these are part of a later release.

## 4.3 Control and monitoring functions

This requirement verifies that the control and monitoring functions of the UE prevent it from transmitting if no acceptable cell can be found by the UE.

## 4.3.1 Minimum requirement

The power of the UE, as measured with a thermal detector, shall not exceed -30dBm if no acceptable cell can be found by the UE.

### 4.4 RF requirements in later releases

The standardisation of new frequency bands may be independent of a release. However, in order to implement a UE that conforms to a particular release but supports a band of operation that is specified in a later release, it is necessary to specify some extra requirements. TS 25.307 [9] specifies requirements on UEs supporting a frequency band that is independent of release.

NOTE: For terminals conforming to the 3GPP release of the present document, some RF requirements in later releases may be mandatory independent of whether the UE supports the bands specified in later releases or not. The set of requirements from later releases that is also mandatory for UEs conforming to the 3GPP release of the present document is determined by regional regulation.

# 5 Frequency bands and channel arrangement

#### 5.1 General

The information presented in this subclause is based on a chip rate of 3.84 Mcps.

NOTE: Other chip rates may be considered in future releases.

## 5.2 Frequency bands

a) UTRA/FDD is designed to operate in the following paired bands:

Operating **UL Frequencies DL** frequencies UE transmit, Node B receive UE receive, Node B transmit Band 1920 - 1980 MHz 2110 -2170 MHz 1850 -1910 MHz 1930 -1990 MHz Ш Ш 1710-1785 MHz 1805-1880 MHz IV 1710-1755 MHz 2110-2155 MHz 869-894 MHz 824 - 849 MHz ۷I 830-840 MHz 875-885 MHz VII 2500-2570 MHz 2620-2690 MHz 880 - 915 MHz VIII 925 - 960 MHz 1749.9-1784.9 MHz 1844.9-1879.9 MHz IX 2110-2170 MHz Χ 1710-1770 MHz ΧI 1427.9 - 1447.9 MHz 1475.9 - 1495.9 MHz 699 - 716 MHz 729 - 746 MHz XII XIII 777 - 787 MHz 746 - 756 MHz XIV 788 - 798 MHz 758 - 768 MHz XVReserved Reserved XVI Reserved Reserved XVII Reserved Reserved XVIII Reserved Reserved 830 - 845MHz 875 - 890 MHz XIX 791 – 821 MHz 832 - 862 MHz XX XXI 1447.9 - 1462.9 MHz 1495.9 - 1510.9 MHz 3510 - 3590 MHz XXII 3410 – 3490 MHz 1930 - 1995 MHz XXV1850 – 1915 MHz 814 – 849 MHz 859 – 894 MHz XXVI

Table 5.0: UTRA FDD frequency bands

c) DB-DC-HSDPA is designed to operate in the following configurations:

b) Deployment in other frequency bands is not precluded

Table 5.0aA DB-DC-HSDPA configurations

DB-DC-HSDPA	UL Band	DL	DL
Configuration		Band A	Band B
1	I or VIII	I	VIII
2	II or IV	II	IV
3	I or V	I	V
4	I or XI	Ī	XI
5	II or V	II	V

d) Single band 4C-HSDPA is designed to operate in the following configurations:

Table 5.0aB Single band 4C-HSDPA configurations

	band 4C-HSDPA Infiguration	Operating Band	Number of DL carriers
	I-3	I	3
	II-3	II	3
	II-4	II	4
NOTE: Single band 4C-HSDPA configuration is numbered as (X-M) where X denotes the operating band and M			

e) Dual band 4C-HSDPA is designed to operate in the following configurations:

Table 5.0aC Dual band 4C-HSDPA configurations

Table of day balla 10 11051 / Comigurations										
Dual band 4C-HSDPA Configuration	UL Band	DL Band A	Number of DL carriers in Band A	DL Band B	Number of DL carriers in Band B					
		Dalla A	III Balla A		III Balla B					
I-2-VIII-1	I or VIII		2	VIII	1					
I-2-VIII-2	I or VIII	I	2	VIII	2					
I-1-VIII-2	I or VIII	I	1	VIII	2					
I-3-VIII-1	I or VIII	I	3	VIII	1					
II-1-IV-2	II or IV	II	1	IV	2					
II-2-IV-1	II or IV	II	2	IV	1					
II-2-IV-2	II or IV	II	2	IV	2					
I-1-V-2	I or V	I	1	V	2					
I-2-V-1	I or V		2	V	1					
I-2-V-2	I or V		2	V	2					
II-1-V-2	II or V	II	1	V	2					

NOTE: Dual band 4C-HSDPA configuration is numbered as (X-M-Y-N) where X denotes the DL Band A, M denotes the number DL carriers in the DL Band A, Y denotes the DL Band B, and N denotes the number of DL carriers in the DL Band B

f) Single band 8C-HSDPA is designed to operate in the following configurations:

Table 5.0aD Single band 8C-HSDPA configurations

	oand 8C-HSDPA nfiguration	Operating Band	Number of DL carriers		
	I-8	I	8		
NOTE:	Single band 8C-HSDPA configuration is numbered as (X-M) where X denotes the operating band and M denotes the number of DL carriers.				

g) Single band NC-4C-HSDPA is designed to operate in the following configurations:

Table 5.0aE Single band NC-4C-HSDPA configurations

Single band NC-4C- HSDPA Configuration	Operating Band	Number of DL carriers in one subblock	Gap between subblocks [MHz]	Number of DL carriers in the other subblock
I-1-5-1	I	1	5	1
I-2-5-1	I	2	5	1
I-3-10-1	I	3	10	1
IV-1-5-1	IV	1	5	1
IV-2-10-1	IV	2	10	1
IV-2-15-2	IV	2	15	2
IV-2-20-1	IV	2	20	1
IV-2-25-2	IV	2	25	2

NOTE: Single band NC-4C-HSDPA configuration is numbered as (X-M-Y-N) where X denotes the operating band, M denotes the number of DL carriers in one subblock, Y denotes the gap between subblocks in MHz and N denotes the number of DL carriers in the other subblock. M and N can be switched

# 5.3 TX-RX frequency separation

a) UTRA/FDD is designed to operate with the following TX-RX frequency separation

Table 5.0A: TX-RX frequency separation

Operating Band	TX-RX frequency separation
I	190 MHz
II	80 MHz.
III	95 MHz.
IV	400 MHz
V	45 MHz
VI	45 MHz
VII	120 MHz
VIII	45 MHz
IX	95 MHz
X	400 MHz
XI	48 MHz
XII	30 MHz
XIII	31 MHz
XIV	30 MHz
XIX	45 MHz
XX	41 MHz
XXI	48 MHz
XXII	100 MHz
XXV	80 MHz
XXVI	45MHz

- b) UTRA/FDD can support both fixed and variable transmit to receive frequency separation.
- c) The use of other transmit to receive frequency separations in existing or other frequency bands shall not be precluded.
- d) When configured to operate on dual cells in the DL with a single UL frequency, the TX-RX frequency separation in Table 5.0A shall be applied for the serving HS-DSCH cell. For bands XII, XIII and XIV, the TX-RX frequency separation in Table 5.0A shall be the minimum spacing between the UL and either of the DL carriers.
- e) When configured to operate on dual cells in both the DL and UL, the TX-RX frequency separation in Table 5.0A shall be applied to the primary UL frequency and DL frequency of the serving HS-DSCH cell, and to the secondary UL frequency and the frequency of the secondary serving HS-DSCH cell respectively.
- f) When configured to operate on single/dual band 4C-HSDPA or single band 8C-HSDPA or single band NC-4C-HSDPA with a single UL frequency, the TX-RX frequency separation in Table 5.0A shall be applied for the DL frequency of the serving HS-DSCH cell. When configured to operate on single/dual band 4C-HSDPA or single

band 8C-HSDPA or single band NC-4C-HSDPA with dual UL frequencies, the TX-RX frequency separation in Table 5.0A shall be applied to the primary UL frequency and DL frequency of the serving HS-DSCH cell, and to the secondary UL frequency and the frequency of the 1<sup>st</sup> secondary serving HS-DSCH cell respectively.

g) For bands XII, XIII and XIV, all the requirements in TS 25.101 are applicable only for a single uplink carrier frequency, however dual cell uplink operation may be considered in future releases.

# 5.4 Channel arrangement

#### 5.4.1 Channel spacing

The nominal channel spacing is 5 MHz, but this can be adjusted to optimise performance in a particular deployment scenario. In DC-HSDPA and DB-DC-HSDPA mode, the UE receives two cells simultaneously. In context of DC-HSDPA and DB-DC-HSDPA, a cell is characterized by a combination of scrambling code and a carrier frequency, see [21.905].

#### 5.4.2 Channel raster

The channel raster is 200 kHz, for all bands which means that the centre frequency must be an integer multiple of 200 kHz. In addition a number of additional centre frequencies are specified according to table 5.1A, which means that the centre frequencies for these channels are shifted 100 kHz relative to the general raster.

#### 5.4.3 Channel number

The carrier frequency is designated by the UTRA Absolute Radio Frequency Channel Number (UARFCN). For each operating Band, the UARFCN values are defined as follows:

Uplink:  $N_U = 5 * (F_{UL} - F_{UL\_Offset})$ , for the carrier frequency range  $F_{UL\_low} \le F_{UL\_high}$ 

Downlink:  $N_D = 5 * (F_{DL} - F_{DL\_Offset})$ , for the carrier frequency range  $F_{DL\ low} \le F_{DL\ high}$ 

For each operating Band,  $F_{UL\_Offset}$ ,  $F_{UL\_low}$ ,  $F_{UL\_high}$ ,  $F_{DL\_Offset}$ ,  $F_{DL\_low}$  and  $F_{DL\_high}$  are defined in Table 5.1 for the general UARFCN. For the additional UARFCN,  $F_{UL\_Offset}$ ,  $F_{DL\_Offset}$  and the specific  $F_{UL}$  and  $F_{DL}$  are defined in Table 5.1A.

Table 5.1: UARFCN definition (general)

	UI	PLINK (UL)		DOWNLINK (DL)			
		nit, Node B red		UE receive, Node B transmit			
Band	UARFCN		uency (F <sub>∪L</sub> )	UARFCN		uency (F <sub>DL</sub> )	
	formula offset	range		formula offset		[MHz]	
	F <sub>UL_Offset</sub> [MHz]	F <sub>UL_low</sub>	F <sub>UL_high</sub>	F <sub>DL_Offset</sub> [MHz]	$F_{DL\_low}$	$F_{DL\_high}$	
I	0	1922.4	1977.6	0	2112.4	2167.6	
II	0	1852.4	1907.6	0	1932.4	1987.6	
III	1525	1712.4	1782.6	1575	1807.4	1877.6	
IV	1450	1712.4	1752.6	1805	2112.4	2152.6	
V	0	826.4	846.6	0	871.4	891.6	
VI	0	832.4	837.6	0	877.4	882.6	
VII	2100	2502.4	2567.6	2175	2622.4	2687.6	
VIII	340	882.4	912.6	340	927.4	957.6	
IX	0	1752.4	1782.4	0	1847.4	1877.4	
Х	1135	1712.4	1767.6	1490	2112.4	2167.6	
XI	733	1430.4	1445.4	736	1478.4	1493.4	
XII	-22	701.4	713.6	-37	731.4	743.6	
XIII	21	779.4	784.6	-55	748.4	753.6	
XIV	12	790.4	795.6	-63	760.4	765.6	
XIX	770	832.4	842.6	735	877.4	887.6	
XX	-23	834.4	859.6	-109	793.4	818.6	
XXI	1358	1450.4	1460.4	1326	1498.4	1508.4	
XXII	2525	3412.4	3487.6	2580	3512.4	3587.6	
XXV	875	1852.4	1912.6	910	1932.4	1992.6	
XXVI	-291	816.4	846.6	-291	861.4	891.6	

Table 5.1A: UARFCN definition (additional channels)

	U	PLINK (UL)	DO	WNLINK (DL)
	UE transi	mit, Node B receive	UE recei	ve, Node B transmit
Band	UARFCN	Carrier frequency [MHz]	UARFCN	Carrier frequency [MHz]
	formula offset	(F <sub>UL</sub> )	formula offset	(F <sub>DL</sub> )
	F <sub>UL_Offset</sub> [MHz]		F <sub>DL_Offset</sub> [MHz]	
I	-	-	-	-
	1850.1	1852.5, 1857.5, 1862.5,	1850.1	1932.5, 1937.5, 1942.5,
П		1867.5, 1872.5, 1877.5,		1947.5, 1952.5, 1957.5,
"		1882.5, 1887.5, 1892.5,		1962.5, 1967.5, 1972.5,
		1897.5, 1902.5, 1907.5		1977.5, 1982.5, 1987.5
III	-	-	-	-
IV	1380.1	1712.5, 1717.5, 1722.5,	1735.1	2112.5, 2117.5, 2122.5,
		1727.5, 1732.5, 1737.5		2127.5, 2132.5, 2137.5,
		1742.5, 1747.5, 1752.5		2142.5, 2147.5, 2152.5
V	670.1	826.5, 827.5, 831.5,	670.1	871.5, 872.5, 876.5,
		832.5, 837.5, 842.5		877.5, 882.5, 887.5
VI	670.1	832.5, 837.5	670.1	877.5, 882.5
VII	2030.1	2502.5, 2507.5, 2512.5,	2105.1	2622.5, 2627.5, 2632.5,
		2517.5, 2522.5, 2527.5,		2637.5, 2642.5, 2647.5,
		2532.5, 2537.5, 2542.5,		2652.5, 2657.5, 2662.5,
		2547.5, 2552.5, 2557.5,		2667.5, 2672.5, 2677.5,
		2562.5, 2567.5		2682.5, 2687.5
VIII	-	-	-	-
IX	-	-	-	-

		PLINK (UL)	DOWNLINK (DL)			
	UE transr	nit, Node B receive	UE recei	ve, Node B transmit		
Band	UARFCN	Carrier frequency [MHz]	UARFCN	Carrier frequency [MHz]		
	formula offset	(F <sub>UL</sub> )	formula offset	(F <sub>DL</sub> )		
	F <sub>UL_Offset</sub> [MHz]		F <sub>DL_Offset</sub> [MHz]			
l	-	-	-	-		
Χ	1075.1	1712.5, 1717.5, 1722.5,	1430.1	2112.5, 2117.5, 2122.5,		
		1727.5, 1732.5, 1737.5,		2127.5, 2132.5, 2137.5,		
		1742.5, 1747.5, 1752.5,		2142.5, 2147.5, 2152.5,		
		1757.5, 1762.5, 1767.5		2157.5, 2162.5, 2167.5		
XI	-	-	-	-		
XII	<b>-</b> 39.9	701.5, 706.5, 707.5,	<b>-</b> 54.9	731.5, 736.5, 737.5, 742.5,		
		712.5, 713.5		743.5		
XIII	11.1	779.5, 784.5	-64.9	748.5, 753.5		
XIV	2.1	790.5, 795.5	-72.9	760.5, 765.5		
XIX	755.1	832.5, 837.5, 842.5	720.1	877.5, 882.5, 887.5		
XX	-	-	-	-		
XXI	-	-	-	-		
XXII	-	-	-	-		
		1852.5, 1857.5,		1932.5, 1937.5, 1942.5,		
		1862.5,1867.5, 1872.5,		1947.5, 1952.5, 1957.5,		
XXV		1877.5, 1882.5, 1887.5,		1962.5, 1967.5, 1972.5,		
		1892.5, 1897.5, 1902.5,		1977.5, 1982.5, 1987.5,		
	639.1	1907.5, 1912.5	674.1	1992.5		
		816.5, 821.5, 826.5,				
XXVI	-325.9	827.5, 831.5, 832.5,		861.5, 866.5, 871.5, 872.5,		
7// 1	-020.0	836.5, 837.5, 841.5,		876.5, 877.5, 881.5, 882.5,		
		842.5, 846.5	-325.9	886,5, 887.5, 891.5		

#### **5.4.4 UARFCN**

The following UARFCN range shall be supported for each paired band

Table 5.2: UTRA Absolute Radio Frequency Channel Number

		plink (UL)		ink (DL)
Band		it, Node B receive		ode B transmit
	General	Additional	General	Additional
ı	9612 to 9888	-	10562 to 10838	-
	9262 to 9538	12, 37, 62,	9662 to 9938	412, 437, 462,
11		87, 112, 137,		487, 512, 537,
		162, 187, 212,		562, 587, 612,
		237, 262, 287		637, 662, 687
III	937 to 1288	-	1162 to 1513	-
IV	1312 to 1513	1662, 1687, 1712, 1737,	1537 to 1738	1887, 1912, 1937,
		1762, 1787, 1812, 1837,		1962, 1987, 2012,
		1862		2037, 2062, 2087
V	4132 to 4233	782, 787, 807,	4357 to 4458	1007, 1012, 1032,
		812, 837, 862		1037, 1062, 1087
VI	4162 to 4188	812, 837	4387 to 4413	1037, 1062
VII	2012 to 2338	2362, 2387, 2412, 2437,	2237 to 2563	2587, 2612, 2637,
		2462, 2487, 2512, 2537,		2662, 2687, 2712,
		2562, 2587, 2612, 2637,		2737, 2762, 2787,
		2662, 2687		2812, 2837, 2862,
	07101 0000			2887, 2912
VIII	2712 to 2863	-	2937 to 3088	-
IX	8762 to 8912	-	9237 to 9387	-
Х	2887 to 3163	3187, 3212, 3237, 3262,	3112 to 3388	3412, 3437, 3462,
		3287, 3312, 3337, 3362,		3487, 3512, 3537,
		3387, 3412, 3437, 3462		3562, 3587, 3612,
VI	2407 to 2502		2742 to 2707	3637, 3662, 3687
XI	3487 to 3562		3712 to 3787	2022 2057 2002
XII	3617 to 3678	3707, 3732, 3737, 3762, 3767	3842 to 3903	3932, 3957, 3962, 3987, 3992
	3792 to 3818	3842, 3867	4017 to 4043	4067, 4092
XIII	3792 10 3010	3642, 3667	4017 10 4043	4007, 4092
	3892 to 3918	3942, 3967	4117 to 4143	4167, 4192
XIV	0002 10 0010	3342, 3307	4117 10 4140	4107, 4132
XIX	312 to 363	387. 412. 437	712 to 763	787, 812, 837
XX	4287 to 4413	-	4512 to 4638	-
XXI	462 to 512	-	862 to 912	-
XXII	4437 to 4813	-	4662 to 5038	-
				6292, 6317, 6342,
		6067, 6092, 6117, 6142,		6367, 6392, 6417,
XXV		6167, 6192, 6217, 6242,		6442, 6467, 6492,
		6267, 6292, 6317, 6342,		6517, 6542, 6567,
	4887 to 5188	6367	5112 to 5413	6592
				5937, 5962, 5987,
XXVI	5537 to 5688	5712, 5737, 5762, 5767,		5992, 6012, 6017,
~~vi	5557 10 5066	5787, 5792, 5812, 5817,		6037, 6042, 6062,
		5837, 5842, 5862	5762 to 5913	6067, 6087

NOTE: If the UE is on a network with Mobile Country Code set to Japan then it may assume that any DL UARFCN sent by the network from the overlapping region of Band V and Band VI is from Band VI. If the UE is on a network with a Mobile Country Code other than Japan then it may assume that any DL UARFCN sent by the network from the overlapping region of Band V and Band VI is from Band V.

#### 6 Transmitter characteristics

#### 6.1 General

Unless otherwise stated, the transmitter characteristics are specified at the antenna connector of the UE. For UE with integral antenna only, a reference antenna with a gain of 0 dBi is assumed. Transmitter characteristics for UE(s) with multiple antennas/antenna connectors are FFS.

The UE antenna performance has a significant impact on system performance, and minimum requirements on the antenna efficiency are therefore intended to be included in future versions of the present document. It is recognised that different requirements and test methods are likely to be required for the different types of UE.

UEs supporting DC-HSUPA shall support both minimum requirements, as well as additional requirements for DC-HSUPA.

Unless otherwise stated, for the additional requirements for DC-HSUPA, all the parameters in clause 6 are defined using the UL E-DCH reference measurement channel, specified in subclause A.2.6. For the additional requirements for DC-HSUPA, the spacing of the carrier frequencies of the two cells shall be 5 MHz.

UEs supporting Open-Loop uplink Transmitter Diversity shall support both minimum requirements for one of transmit antenna connectors, which one to be tested shall be declared by the manufacturer, and additional requirements for UL OLTD. In addition, the additional requirements for UL OLTD are applicable only in the case when equal power is transmitted from two active antenna ports.

DC-HSUPA and UL OLTD do not operate simultaneously in the UE.

UEs supporting UL CLTD shall support both minimum requirements, as well as additional requirements for UL CLTD.

The requirements in clause 6 for UEs supporting UL CLTD are specified for UL CLTD activation states 1, 2, 3 which are defined in sub-clause 4.6C.2.2.3 in TS 25.212[10].

DC-HSUPA and UL CLTD do not operate simultaneously in the UE.

UEs supporting UL MIMO shall support both minimum requirements, as well as additional requirements for UL MIMO.

The requirements in clause 6 specified for UL MIMO are applicable for UL MIMO rank-2 transmission. The requirements for UL MIMO rank-1 transmission are covered by UL CLTD requirements. UL MIMO rank-1 and rank-2 transmissions are defined in clause 11 of TS25.214 [8].

DC-HSUPA and UL MIMO do not operate simultaneously in the UE.

# 6.2 Transmit power

## 6.2.1 UE maximum output power

The following Power Classes define the nominal maximum output power. The nominal power defined is the broadband transmit power of the UE, i.e. the power in a bandwidth of at least  $(1+\alpha)$  times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot. For DC-HSUPA, the nominal transmit power is defined by the sum of the broadband transmit power of each carrier in the UE.

**Table 6.1: UE Power Classes** 

Operating	Power	Class 1	Power	Class 2	Power	Class 3	Power C	lass 3bis	Power	Class 4
Band	Power	Tol	Power	Tol	Power	Tol	Power	Tol	Power	Tol
	(dBm)	(dB)	(dBm)	(dB)	(dBm)	(dB)	(dBm)	(dB)	(dBm)	(dB)

Band I	+33	+1/-3	+27	+1/-3	+24	+1/-3	23	+2/-2	+21	+2/-2
Band II	-	-	-	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band III	-	-	-	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band IV	-	-		-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band V	-	-	-	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band VI	-	-	-	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band VII	-	-	-	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band VIII	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band IX	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band X	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band XI	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band XII	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band XIII	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band IV	1	-	ı	-	+24	+1/-3	23	+2/-2	+21	+2/-2
Band XIX					+24	+1/-3	23	+2/-2	+21	+2/-2
Band XX					+24	+1/-3	23	+2/-2	+21	+2/-2
Band XXI					+24	+1/-3	23	+2/-2	+21	+2/-2
Band XXII	-	-	•	-	+24	+1/-4.5	23	+2/-3.5	+21	+2/-3.5
Band XXV					+24	+1/-4	23	+2/-3	+21	+2/-3
Band XXVI	-	-	-	-	+24	+1/-4	23	+2/-3	+21	+2/-3
(Note 1)										

NOTE 1 For the UE which supports both Band V and Band XXVI operating frequencies, the UE maximum output power of Band V shall apply for Band XXVI when the carrier frequency of the assigned UTRA channel is within 824-845 MHz.

NOTE: The tolerance allowed for the nominal maximum output power applies even for the multi-code DPDCH transmission mode.

For the UE which supports DB-DC-HSDPA configuration in Table 6.1aB, the lower side of the tolerance in Table 6.1 is allowed to be adjusted by the amount given in Table 6.1aB for the applicable bands.

Table 6.1aB Allowed adjustment in lower side of tolerance for UE which supports DB-DC-HSDPA

DB-DC-HSDPA Configuration	Maximum allowed adjustment in lower side of tolerance (dB)	Applicable bands					
1	-0.3	I, VIII					
2	-1	II, IV					
3	-0.3	I, V					
4	-1	I, XI					
5	-0.3	II, V					
NOTE: The requirements reflect what can be achieved with the present state of the art technology. They shall be reconsidered when the state of the art technology progresses.							

For the UE which supports dual band 4C-HSDPA configuration in Table 6.1aC, the lower side of the tolerance in Table 6.1 is allowed to be adjusted by the amount given in Table 6.1aC for the applicable bands.

Table 6.1aC Allowed adjustment in lower side of tolerance for UE which supports dual band 4C-HSDPA

Dual Band 4C-HSDPA Configuration	Maximum allowed adjustment in lower side of tolerance (dB)	Applicable bands				
I-2-VIII-1, I-3-VIII-1, I-2-VIII- 2, I-1-VIII-2	-0.3	I, VIII				
II-1-IV-2, II-2-IV-1, II-2-IV-2	-1	II, IV				
I-1-V-2, I-2-V-1, I-2-V-2	-0.3	I, V				
II-1-V-2	-0.3	II, V				
NOTE: The requirements reflect what can be achieved with the present state of the art technology. They shall be reconsidered when the state of the art technology						

For the UE which supports E-UTRA inter-band carrier aggregation, the lower side of the tolerance in Table 6.1 is allowed to be decreased by the amount given in Table 6.2.5A-3 of TS 36.101[11] for those UTRA operating bands

corresponding to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations. The tolerance in Table 6.2.5A-3 of TS 36.101[11] does not apply to supported UTRA operating bands with frequency range below 1 GHz that correspond to the E-UTRA operating bands that belong to the supported interband carrier aggregation configurations when such bands are belonging only to band combination(s) where one band is <1GHz and another band is >1.7GHz and there is no harmonic relationship between the low band UL and high band DL.

In case the UE supports DB-DC-HSDPA or dual band 4C-HSDPA configurations and one or more of the E-UTRA inter-band carrier aggregation configurations listed in Table 6.2.5A-3 of TS36.101[11] with a UTRA operating band that belongs to UTRA and E-UTRA carrier aggregation configurations, then

- When the UTRA operating band frequency range is ≤ 1GHz, the applicable additional tolerance shall be the average of the applicable tolerances, truncated to one decimal place for that operating band among the supported DB-DC-HSDPA, dual band 4C-HSDPA, and E-UTRA CA configurations, with the DB-DC-HSDPA, dual carrier 4C-HSDPA, and E-UTRA CA configurations counted separately. In case there is a harmonic relation between low band UL and high band DL, then the maximum tolerance among the different supported carrier aggregation configurations involving such band shall be applied
- When the UTRA operating band frequency range is >1GHz, the applicable additional tolerance shall be the maximum tolerance that applies for that operating band among the supported DB-DC-HSDPA, dual band 4C-HSDPA, and E-UTRA CA configurations.

#### 6.2.1A UE maximum output power for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the maximum output power is specified in Table 6.1aD. The nominal transmit power is defined by the sum of transmit power at each UE antenna connector.

Table 6.1aD: UE Power Classes for UL OLTD

Operating	Power Class 3		Power C	lass 3bis
Band	Power	Tol	Power	Tol
	(dBm)	(dB)	(dBm)	(dB)
Band I	+24	+1/-4	23	+2/-3
Band II	+24	+1/-4	23	+2/-3
Band III	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band V	+24	+1/-4	23	+2/-3
Band VI	+24	+1/-4	23	+2/-3
Band VII	+24	+1/-4	23	+2/-3
Band VIII	+24	+1/-4	23	+2/-3
Band IX	+24	+1/-4	23	+2/-3
Band X	+24	+1/-4	23	+2/-3
Band XI	+24	+1/-4	23	+2/-3
Band XII	+24	+1/-4	23	+2/-3
Band XIII	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band XIX	+24	+1/-4	23	+2/-3
Band XX	+24	+1/-4	23	+2/-3
Band XXI	+24	+1/-4	23	+2/-3
Band XXII	+24	+1/-5.5	23	+2/-4.5
Band XXV	+24	+1/-5	23	+2/-4
Band XXVI	+24	+1/-5	23	+2/-4
(Note 1)				
Note 1 For the UE which supports both Band V				

Note 1 For the UE which supports both Band V and Band XXVI operating frequencies, the UE maximum output power of Band V shall apply for Band XXVI when the carrier frequency of the assigned UTRA channel is within 824-845 MHz.

# 6.2.1B UE maximum output power for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the nominal maximum output power is specified in Table 6.1aE. The nominal transmit power is defined by the sum of transmit power at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the nominal maximum output power specified in sub-clause 6. 2.1 applies at the active transmit antenna connector.

Table 6.1aE: UE Power Classes for UL CLTD

Operating	Power Class 3		Power C	lass 3bis
Band	Power	Tol	Power	Tol
	(dBm)	(dB)	(dBm)	(dB)
Band I	+24	+1/-4	23	+2/-3
Band II	+24	+1/-4	23	+2/-3
Band III	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band V	+24	+1/-4	23	+2/-3
Band VI	+24	+1/-4	23	+2/-3
Band VII	+24	+1/-4	23	+2/-3
Band VIII	+24	+1/-4	23	+2/-3
Band IX	+24	+1/-4	23	+2/-3
Band X	+24	+1/-4	23	+2/-3
Band XI	+24	+1/-4	23	+2/-3
Band XII	+24	+1/-4	23	+2/-3
Band XIII	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band XIX	+24	+1/-4	23	+2/-3
Band XX	+24	+1/-4	23	+2/-3
Band XXI	+24	+1/-4	23	+2/-3
Band XXII	+24	+1/-5.5	23	+2/-4.5
Band XXV	+24	+1/-5	23	+2/-4
Band XXVI	+24	+1/-5	23	+2/-4
(Note 1)				
Note 1 For the UE which supports both Band V				
and Band XXVI operating frequencies, the				
UE maximum output power of Band V shall				
apply for Band XXVI when the carrier				
frequency of the assigned UTRA channel is				
within 824-845 MHz.				

# 6.2.1C UE maximum output power for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the nominal maximum output power is specified in Table 6.1aF. The nominal transmit power is defined by the sum of transmit power at each transmit antenna connector.

Table 6.1aF: UE Power Classes for UL MIMO

Operating	Power Class 3		Power Class 3bis	
Band	Power	Tol	Power	Tol
	(dBm)	(dB)	(dBm)	(dB)
Band I	+24	+1/-4	23	+2/-3
Band II	+24	+1/-4	23	+2/-3
Band III	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band V	+24	+1/-4	23	+2/-3
Band VI	+24	+1/-4	23	+2/-3
Band VII	+24	+1/-4	23	+2/-3
Band VIII	+24	+1/-4	23	+2/-3
Band IX	+24	+1/-4	23	+2/-3
Band X	+24	+1/-4	23	+2/-3
Band XI	+24	+1/-4	23	+2/-3
Band XII	+24	+1/-4	23	+2/-3
Band XIII	+24	+1/-4	23	+2/-3
Band IV	+24	+1/-4	23	+2/-3
Band XIX	+24	+1/-4	23	+2/-3
Band XX	+24	+1/-4	23	+2/-3
Band XXI	+24	+1/-4	23	+2/-3
Band XXII	+24	+1/-5.5	23	+2/-4.5
Band XXV	+24	+1/-5	23	+2/-4
Band XXVI	+24	+1/-5	23	+2/-4
(Note 1)				
Note 1 For the UE which supports both Band V				
and Band XXVI operating frequencies, the				
UE maximum output power of Band V shall				
apply for Band XXVI when the carrier				
frequency of the assigned UTRA channel is				

### 6.2.2 UE maximum output power with HS-DPCCH and E-DCH

within 824-845 MHz.

The Maximum Power Reduction (MPR) for the nominal maximum output power defined in 6.2.1 is specified in table 6.1A for the values of  $\beta_c$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  defined in [8] fully or partially transmitted during a DPCCH timeslot

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE transmit channel configuration	CM (dB)	MPR (dB)
For all combinations of; DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH	0 ≤ CM ≤ 4	MAX (CM-1, 0)
Note 1: CM = 1 for $\beta_c/\beta_d$ =12/15, $\beta_{hs}/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

Where Cubic Metric (CM) is based on the UE transmit channel configuration and is given by

$$CM = CEIL \; \{ \; [20*log10 \; ((v\_norm^3)_{rms}) - 20*log10 \; ((v\_norm\_ref^3)_{rms})] \; / \; k, \; 0.5 \; \} \; \}$$

#### Where

- CEIL { x, 0.5 } means rounding upwards to closest 0.5dB, i.e. CM □ [0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5]
- k is 1.85 for signals where all channelisations codes meet the following criteria CSF, N where N< SF/2
- k is 1.56 for signals were any channelisations codes meet the following criteria  $C_{SF, N}$  where  $N \ge SF/2$
- v\_norm is the normalized voltage waveform of the input signal
- v\_norm\_ref is the normalized voltage waveform of the reference signal (12.2 kbps AMR Speech) and

-  $20 * \log 10 ((v_norm_ref^3)_{rms}) = 1.52 dB$ 

#### 6.2.2A UE maximum output power for DC-HSUPA

The Maximum Power Reduction (MPR) for the nominal maximum output power defined in 6.2.1 is specified for the values of  $\beta_c$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  defined in [8] fully or partially transmitted during a DPCCH timeslot, and defined through calculation of the Raw Cubic Metric (Raw CM) which is based on the UE transmit channel configuration and is given by

Raw CM = 
$$20 * log10 ((v_norm^3)_{rms}) - 20 * log10 ((v_norm_ref^3)_{rms})$$

where

- v\_norm is the normalized voltage waveform of the input signal
- v\_norm\_ref is the normalized voltage waveform of the reference signal (12.2 kbps AMR Speech) and
- $20 * log 10 ((v_norm_ref^3)_{rms}) = 1.52 dB$

For any DC-HSUPA signal not employing 16QAM modulation on any of the carriers, and for any DC-HSUPA signal having Raw CM < [2.5], the MPR is specified in Table 6.1AA

Table 6.1AA: UE maximum output power for DC-HSUPA signals not employing 16QAM modulation, and DC-HSUPA signals having Raw CM < [2.5]

UE transmit channel configuration	CM (dB)	MPR (dB)
For all combinations of; DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH	$0.22 \le \text{CM} \le 3.72$	MAX (CM-0.72, 0)

where Cubic Metric (CM) is based on the Raw CM and is given by

$$CM = CEIL \{ Raw CM / k, 0.22 \}$$

where

- CEIL { x, 0.22 } means rounding upwards to closest 0.22dB with 0.5 dB granularity, i.e. CM = [0.22, 0.72, 1.22, 1.72, 2.22, 2.72, 3.22, 3.72]
- k is 1.66

For any DC-HSUPA signal employing 16QAM modulation on any of the carriers and having Raw CM  $\geq$  [2.5], the MPR is TBD.

The reference measurement channels for the requirements in subclause 6.2.2A are provided in subclause A.2.8.

# 6.2.2B UE maximum output power with HS-DPCCH and E-DCH for UL OLTD

For the UE with two active transmit antenna connectors in UL OLTD operation, the allowed Maximum Power Reduction (MPR) for the nominal maximum output power of each antenna is specified in Table 6.1A. The amount of applied power reduction on each antenna shall be the same.

NOTE: CM is measured at each transmit antenna connector.

# 6.2.2C UE maximum output power with HS-DPCCH and E-DCH for UL CLTD

The Maximum Power Reduction (MPR) for the nominal maximum output power defined in 6.2.1 is specified in table 6.1AB for the values of  $\beta_c$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$ ,  $\beta_{ed}$  and  $\beta_{sc}$  defined in [8] fully or partially transmitted during a DPCCH timeslot

Table 6.1AB: UE maximum output power with HS-DPCCH and E-DCH for UL CLTD

UE transmit channel configuration	CM (dB)	MPR (dB)
For all combinations of; DPDCH, DPCCH, HS- DPCCH, E-DPDCH, E-DPCCH and S-DPCCH	0 ≤ CM ≤ 4	MAX (CM-1, 0)

Where Cubic Metric (CM) is based on the UE transmit channel configuration and is given by

$$CM = CEIL \{ [20 * log10 ((v_norm^3)_{ms}) - 20 * log10 ((v_norm_ref^3)_{ms})] / k, 0.5 \}$$

#### Where

- CEIL  $\{x, 0.5\}$  means rounding upwards to closest 0.5dB, i.e. CM = [0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5]
- k is 1.85 for signals where all channelisations codes meet the following criteria C<sub>SF, N</sub> where N< SF/2
- k is 1.56 for signals were any channelisations codes meet the following criteria  $C_{SF,\,N}$  where  $N \ge SF/2$
- v\_norm is the normalized voltage waveform of the input signal
- v\_norm\_ref is the normalized voltage waveform of the reference signal (12.2 kbps AMR Speech) and
- $20 * log 10 ((v_norm_ref^3)_{rms}) = 1.52 dB$

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the allowed Maximum Power Reduction (MPR) for the nominal maximum output power of each antenna is specified in Table 6.1AA. The amount of applied power reduction on each antenna shall be the same.

NOTE: CM is measured at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the allowed Maximum Power Reduction (MPR) for the nominal maximum output power specified in sub-clause 6.2.2 applies at the active transmit antenna connector.

# 6.2.2D UE maximum output power with HS-DPCCH and E-DCH for UL MIMO

The Maximum Power Reduction (MPR) for the nominal maximum output power defined in 6.2.1 is specified in table 6.1AC for the values of  $\beta_c$ ,  $\beta_{hs}$ ,  $\beta_{ec}$ ,  $\beta_{sec}$   $\beta_{ed}$ ,  $\beta_{sed}$  and  $\beta_{sc}$  defined in [8] fully or partially transmitted during a DPCCH timeslot

Table 6.1AC: UE maximum output power with HS-DPCCH and E-DCH for UL MIMO

UE transmit channel configuration	CM (dB)	MPR (dB)
For all combinations of; DPCCH, HS-DPCCH, E-DPDCH, S-E-DPDCH E-DPCCH, S-E-DPCCH and	0 ≤ CM ≤ 4	MAX (CM-1, 0)
S-DPCCH		

Where Cubic Metric (CM) is based on the UE transmit channel configuration and is given by

$$CM = CEIL \{ [20 * log10 ((v_norm^3)_{rms}) - 20 * log10 ((v_norm_ref^3)_{rms})] / k, 0.5 \}$$

#### Where

- CEIL { x, 0.5 } means rounding upwards to closest 0.5dB, i.e. CM = [0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5]
- k is 1.85 for signals where all channelisations codes meet the following criteria C<sub>SF, N</sub> where N< SF/2
- k is 1.56 for signals were any channelisations codes meet the following criteria  $C_{SE,\,N}$  where  $N \ge SF/2$
- v\_norm is the normalized voltage waveform of the input signal
- v\_norm\_ref is the normalized voltage waveform of the reference signal (12.2 kbps AMR Speech) and
- $-20 * log 10 ((v_norm_ref^3)_{rms}) = 1.52 dB$

For UE with two active transmit antenna connectors in UL MIMO operation, the allowed Maximum Power Reduction (MPR) for the nominal maximum output power of each antenna is specified in Table 6.1AC. The amount of applied power reduction on each antenna shall be the same.

NOTE: CM is measured at each transmit antenna connector.

#### 6.2.3 UE Relative code domain power accuracy

The UE Relative code domain power accuracy is a measure of the ability of the UE to correctly set the level of individual code powers relative to the total power of all active codes. When the UE uses 16QAM modulation on any of the uplink code channels the IQ origin offset power shall be removed from the Measured CDP ratio; however, the removed relative IQ origin offset power (relative carrier leakage power) also has to satisfy the applicable requirement. The measure of accuracy is the difference between two dB ratios:

UE Relative CDP accuracy = (Measured CDP ratio) - (Nominal CDP ratio)

where

Measured CDP ratio = 10\*log((Measured code power) / (Measured total power of all active codes))

Nominal CDP ratio = 10\*log((Nominal CDP) / (Sum of all nominal CDPs))

The nominal CDP of a code is relative to the total of all codes and is derived from beta factors.

When the UE uses 16QAM modulation a correction factor shall be applied to the  $\beta_{ed}$  value used to compute the Nominal CDP equal to  $\{A_1*(0.4472)^2 + A_2*(1.3416)^2 + A_3*(-0.4472)^2 + A_4*(-1.3416)^2\}^{1/2}$  where  $A_1$ ,  $A_2$ ,  $A_3$  and  $A_4$  are the fractions of symbols (00, 01, 10, 11 respectively) transmitted during the test.

The sum of all nominal CDPs will equal 1 by definition.

NOTE: The above definition of UE relative CDP accuracy is independent of variations in the actual total power of the signal and of noise in the signal that falls on inactive codes.

The required accuracy of the UE relative CDP is given in table 6.1B. The UE relative CDP accuracy shall be maintained over the period during which the total of all active code powers remains unchanged or one timeslot, whichever is the longer.

 Nominal CDP ratio
 Accuracy (dB)

 ≥ -10 dB
 ±1.5

 -10 dB to ≥ -15 dB
 ±2.0

 -15 dB to ≥ -20 dB
 ±2.5

 -20 dB to ≥ -30 dB
 ±3.0

Table 6.1B: UE Relative CDP accuracy

## 6.2.3A UE Relative code domain power accuracy for DC-HSUPA

The requirement and corresponding measurements apply to each individual carrier when the total power in each of the assigned carriers is equal to each other

The UE Relative code domain power accuracy is a measure of the ability of the UE to correctly set the level of individual code powers in a carrier relative to the total power of all active codes in that carrier. When the UE uses 16QAM modulation on any of the uplink code channels in a carrier the IQ origin offset power measured in that carrier shall be removed from the Measured CDP ratio in that carrier; however, the removed relative IQ origin offset power (relative carrier leakage power) measured in that carrier also has to satisfy the applicable requirement in that carrier. The measure of accuracy is the difference between two dB ratios measured per carrier configured on the uplink:

UE Relative CDP accuracy = (Measured CDP ratio) - (Nominal CDP ratio)

where

Measured CDP ratio = 10\*log((Measured code power) / (Measured total power of all active codes))

Nominal CDP ratio = 10\*log((Nominal CDP) / (Sum of all nominal CDPs))

The nominal CDP of a code is relative to the total of all codes in each carrier and is derived from beta factors. The sum of all nominal CDPs will equal 1 by definition.

NOTE: The above definition of UE relative CDP accuracy is independent of variations in the actual total power of the signal in each carrier and of noise in the signal that falls on inactive codes.

The required accuracy of the UE relative CDP is given in table 6.1B. The UE relative CDP accuracy shall be maintained over the period during which the total of all active code powers remains unchanged or one timeslot, whichever is the longer.

The reference measurement channels for the requirements in subclause 6.2.3A are provided in subclause A.2.6 and A.2.7.

#### 6.2.3B UE Relative code domain power accuracy for UL OLTD

For the UE with two active transmit antenna connectors in UL OLTD operation, the relative code domain power accuracy specified in sub-clause 6.2.3 applies at each transmit antenna connector.

#### 6.2.3C UE Relative code domain power accuracy for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the relative code domain power accuracy specified in sub-clause 6.2.3 applies at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the relative code domain power accuracy specified in sub-clause 6.2.3 applies at the active transmit antenna connector.

#### 6.2.3D UE Relative code domain power accuracy for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the relative code domain power accuracy specified in sub-clause 6.2.3 applies at each transmit antenna connector.

## 6.3 Frequency Error

The UE modulated carrier frequency shall be accurate to within  $\pm 0.1$  PPM observed over a period of one timeslot compared to the carrier frequency received from the Node B. For the PRACH preambles the measurement interval is lengthened to 3904 chips (being the 4096 chip nominal preamble period less a 25  $\mu$ s transient period allowance at each end of the burst). These signals will have an apparent error due to Node B frequency error and Doppler shift. The signals from the Node B must be averaged over sufficient time that errors due to noise or interference are within the above  $\pm 0.1$ PPM figure. The UE shall use the same frequency source for both RF frequency generation and the chip clock.

## 6.3A Frequency Error for DC-HSUPA

The UE modulated carrier frequencies shall be accurate to within  $\pm 0.1$  PPM observed over a period of one timeslot compared to the average of the carrier frequencies received from the Node B. When the signal from one Node B cell is out-of-sync, the UE modulated carrier frequency shall be compared to the remaining carrier frequency received from the other Node B cell. These signals will have an apparent error due to Node B frequency error and Doppler shift. The signals from the Node B must be averaged over sufficient time such that errors due to noise or interference are within the above  $\pm 0.1$ PPM figure. The frequency error of the carrier frequencies received from the Node B shall be the same in average. The UE shall use the same frequency source for both RF frequency generation and the chip clock.

# 6.3B Frequency error for UL OLTD

The UE modulated carrier frequency at each transmit antenna connector shall be accurate to within  $\pm 0.1$  PPM observed over a period of one timeslot compared to the carrier frequency received from the Node B. These signals will have an apparent error due to Node B frequency error and Doppler shift. The signals from the Node B must be averaged over

sufficient time that errors due to noise or interference are within the above  $\pm 0.1$ PPM figure. The UE shall use the same frequency source for both RF frequency generation and the chip clock.

## 6.3C Frequency error for UL CLTD

The UE modulated carrier frequency at each transmit antenna connector shall be accurate to within  $\pm 0.1$  PPM observed over a period of one timeslot compared to the carrier frequency received from the Node B. These signals will have an apparent error due to Node B frequency error and Doppler shift. The signals from the Node B must be averaged over sufficient time that errors due to noise or interference are within the above  $\pm 0.1$ PPM figure. The UE shall use the same frequency source for both RF frequency generation and the chip clock.

### 6.3D Frequency error for UL MIMO

For UE supporting UL MIMO, the UE modulated carrier frequency at each transmit antenna connector shall be accurate to within  $\pm 0.1$  PPM observed over a period of one timeslot compared to the carrier frequency received from the Node B. These signals will have an apparent error due to Node B frequency error and Doppler shift. The signals from the Node B must be averaged over sufficient time that errors due to noise or interference are within the above  $\pm 0.1$ PPM figure. The UE shall use the same frequency source for both RF frequency generation and the chip clock.

## 6.4 Output power dynamics

Power control is used to limit the interference level.

#### 6.4.1 Open loop power control

Open loop power control is the ability of the UE transmitter to sets its output power to a specific value. The open loop power control tolerance is given in Table 6.3

#### 6.4.1.1 Minimum requirement

The UE open loop power is defined as the mean power in a timeslot or ON power duration, whichever is available.

Table 6.3: Open loop power control tolerance

Conditions	Tolerance
Normal conditions	± 9 dB
Extreme conditions	+ 12 dB

#### 6.4.1.1A Additional requirement for DC-HSUPA

The open loop power control tolerance per carrier is given in Table 6.3.

### 6.4.2 Inner loop power control in the uplink

Inner loop power control in the Uplink is the ability of the UE transmitter to adjust its output power in accordance with one or more TPC commands received in the downlink.

#### 6.4.2.1 Power control steps

The power control step is the change in the UE transmitter output power in response to a single TPC command, TPC\_cmd, derived at the UE.

#### 6.4.2.1.1 Minimum requirement

The UE transmitter shall have the capability of changing the output power with a step size of 1, 2 and 3 dB according to the value of  $\Delta_{TPC}$  or  $\Delta_{RP\text{-}TPC}$ , in the slot immediately after the TPC\_cmd as follows

- a) The transmitter output power step due to inner loop power control shall be within the range shown in Table 6.4.
- b) The transmitter average output power step due to inner loop power control shall be within the range shown in Table 6.5. Here a TPC\_cmd group is a set of TPC\_cmd values derived from a corresponding sequence of TPC commands of the same duration.

The inner loop power step is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, not including the transient duration. The transient duration is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

Transmitter power control range 1 dB step size 2 dB step size 3 dB step size TPC\_ cmd Lower Upper Lower Upper Lower Upper + 1 +0.5 dB +1.5 dB +1 dB +3 dB +1.5 dB +4.5 dB 0 -0.5 dB +0.5 dB -0.5 dB +0.5 dB -0.5 dB +0.5 dB -0.5 dB -1.5 dB -1 dB -3 dB -1.5 dB -4.5 dB

Table 6.4: Transmitter power control range

Table 6.5: Transmitter aggregate power control range

TPC_ cmd	Transmitter TPC_ cmd g	er power control range after 10 equal groups			Transmitter power control range after 7 equal TPC_ cmd groups	
3	1 dB sto	ep size 2 dB step size		3 dB step size		
	Lower	Upper	Lower	Upper	Lower	Upper
+1	+8 dB	+12 dB	+16 dB	+24 dB	+16 dB	+26 dB
0	-1 dB	+1 dB	-1 dB	+1 dB	-1 dB	+1 dB
-1	-8 dB	-12 dB	-16 dB	-24 dB	-16 dB	-26 dB
0,0,0,0,+1	+6 dB	+14 dB	N/A	N/A	N/A	N/A
0,0,0,0,-1	-6 dB	-14 dB	N/A	N/A	N/A	N/A

The UE shall meet the above requirements for inner loop power control over the power range bounded by the Minimum output power as defined in subclause 6.4.3, and the Maximum output power supported by the UE (i.e. the actual power as would be measured assuming no measurement error). This power shall be in the range specified for the power class of the UE in subclause 6.2.1.

### 6.4.2.1.1A Additional requirement for DC-HSUPA

The UE transmitter shall have the capability of changing the output power in each assigned carrier in the uplink with a step size of 1, 2 and 3 dB according to the value of  $\Delta_{TPC}$  or  $\Delta_{RP-TPC}$ , in the slot immediately after the TPC\_cmd for the corresponding carrier as follows

- a) The transmitter output power step due to inner loop power control in each assigned carrier in the uplink shall be within the range shown in Table 6.4, when the total transmit power in each of the assigned carriers is equal to each other.
- b) The transmitter average output power step due to inner loop power control in each assigned carrier in the uplink shall be within the range shown in Table 6.5, when the total transmit power in each of the assigned carriers is equal to each other. Here a TPC\_cmd group is a set of TPC\_cmd values derived from a corresponding sequence of TPC commands of the same duration.
- c) The requirements can be tested by sending the same TPC commands for each of the assigned carriers, assuming that the signal powers for the carriers (in terms of DPCCH code power and total power) have been aligned prior to the beginning of the test procedure.

The inner loop power step is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot in each carrier, not including the transient duration. The transient duration is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

### 6.4.2.1.1B Additional requirement for UL OLTD

For the UE with two active transmit antenna connectors in UL OLTD operation, the inner loop power control in the uplink specified in sub-clause 6.4.2.1.1 applies at each transmit antenna connector.

### 6.4.2.1.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the inner loop power control in the uplink specified in sub-clause 6.4.2.1.1 applies at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the inner loop power control in the uplink specified in sub-clause 6.4.2.1.1 applies at the active transmit antenna connector.

### 6.4.2.1.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the inner loop power control in the uplink specified in sub-clause 6.4.2.1.1 applies at each transmit antenna connector.

## 6.4.3 Minimum output power

The minimum controlled output power of the UE is when the power is set to a minimum value.

### 6.4.3.1 Minimum requirement

The minimum output power is defined as the mean power in one time slot. The minimum output power shall be less than -50 dBm.

## 6.4.3.1A Additional requirement for DC-HSUPA

The minimum output power is defined as the mean power in one time slot in each carrier. The minimum output power in each carrier shall be less than -50 dBm, when both carriers are set to minimum output power.

### 6.4.3.1B Additional requirement for UL OLTD

For the UE with two active transmit antenna connectors in UL OLTD operation, the minimum output power specified in sub-clause 6.4.3.1 applies at each transmit antenna connector, when the UE power is set to a minimum value.

### 6.4.3.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the minimum output power specified in sub-clause 6.4.3.1 applies at each transmit antenna connector, when the UE power is set to a minimum value.

For UE configured in UL CLTD activation state 2 or activation state 3, the minimum output power specified in subclause 6.4.3.1 applies at the active transmit antenna connector, when the UE power is set to a minimum value.

### 6.4.3.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the minimum output power specified in sub-clause 6.4.3.1 applies at each transmit antenna connector, when the UE power is set to a minimum value.

## 6.4.4 Out-of-synchronization handling of output power

The receiver characteristics in this section are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UEs with more than one receiver antenna connector the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in section 6.4.4.2 below.

The UE shall monitor the DPCCH quality in order to detect a loss of the signal on Layer 1, as specified in TS 25.214. The thresholds  $Q_{out}$  and  $Q_{in}$  specify at what DPCCH quality levels the UE shall shut its power off and when it shall turn its power on respectively. The thresholds are not defined explicitly, but are defined by the conditions under which the UE shall shut its transmitter off and turn it on, as stated in this subclause.

The DPCCH quality shall be monitored in the UE and compared to the thresholds  $Q_{out}$  and  $Q_{in}$  for the purpose of monitoring synchronization. The threshold  $Q_{out}$  should correspond to a level of DPCCH quality where no reliable detection of the TPC commands transmitted on the downlink DPCCH can be made. This can be at a TPC command error ratio level of e.g. 30%. The threshold  $Q_{in}$  should correspond to a level of DPCCH quality where detection of the TPC commands transmitted on the downlink DPCCH is significantly more reliable than at  $Q_{out}$ . This can be at a TPC command error ratio level of e.g. 20%.

### 6.4.4.1 Minimum requirement

When the UE estimates the DPCCH quality or the quality of the TPC fields of the F-DPCH frame received from the serving HS-DSCH cell over the last 160 ms period or quality of the TPC fields of the F-DPCH from the serving HS-DSCH cell over the previous 240 slots in which the TPC symbols are known to be present when the discontinuous uplink DPCCH transmission operation is enabled to be worse than a threshold  $Q_{out}$ , the UE shall shut its transmitter off within 40 ms. The UE shall not turn its transmitter on again until the DPCCH quality exceeds an acceptable level  $Q_{in}$ . When the UE estimates the DPCCH quality or the quality of the TPC fields of the F-DPCH frame received from the serving HS-DSCH cell over the last 160 ms period or quality of the TPC fields of the F-DPCH from the serving HS-DSCH cell over the previous 240 slots in which the TPC symbols are known to be present when the discontinuous uplink DPCCH transmission operation is enabled to be better than a threshold  $Q_{in}$ , the UE shall again turn its transmitter on within 40 ms.

The UE transmitter shall be considered "off" if the transmitted power is below the level defined in subclause 6.5.1 (Transmit off power). Otherwise the transmitter shall be considered as "on".

### 6.4.4.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the minimum requirements specified in sub-clause 6.4.4.1 apply at each transmit antenna connector.

### 6.4.4.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the minimum requirements specified in sub-clause 6.4.4.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the minimum requirements specified in subclause 6.4.4.1 apply at the active transmit antenna connector.

### 6.4.4.1C Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the minimum requirements specified in sub-clause 6.4.4.1 apply at each transmit antenna connector.

#### 6.4.4.2 Test case

This subclause specifies a test case, which provides additional information for how the minimum requirement should be interpreted for the purpose of conformance testing.

The quality levels at the thresholds  $Q_{out}$  and  $Q_{in}$  correspond to different signal levels depending on the downlink conditions DCH parameters. For the conditions in Table 6.6, a signal with the quality at the level  $Q_{out}$  can be generated by a DPCCH\_Ec/Ior ratio of -25 dB, and a signal with  $Q_{in}$  by a DPCCH\_Ec/Ior ratio of -21 dB. For a UE which supports the optional enhanced performance requirements type1 for DCH a signal with the quality at the level  $Q_{out}$  can be instead generated by a DPCCH\_Ec/Ior ratio of -28 dB, and a signal with  $Q_{in}$  by a DPCCH\_Ec/Ior ratio of -24 dB for the conditions in Table 6.6. The DL reference measurement channel (12.2) kbps specified in subclause A.3.1 and with static propagation conditions. The downlink physical channels, other than those specified in Table 6.6, are as specified in Table C.3 of Annex C.

Figure 6.1 shows an example scenario where the DPCCH\_Ec/Ior ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below  $Q_{out}$  where the UE shall shut its power off and then back up to a level above  $Q_{in}$  where the UE shall turn the power back on. Figure 6.1A shows an example scenario for a UE which supports the optional enhanced performance requirements type1 for DCH, where the DPCCH\_Ec/Ior ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below  $Q_{out}$  where the UE shall shut its power off and then back up to a level above  $Q_{in}$  where the UE shall turn the power back on.

Table 6.6: DCH parameters for the Out-of-synch handling test case

Parameter	Unit	Value	
$\hat{I}_{or}/I_{oc}$	dB	-1	
$I_{oc}$	dBm/3.84 MHz	-60	
$\frac{DPDCH\_E_c}{I_{or}}$	dB	See figure 6.1: Before point A -16.6 After point A Not defined	
$\frac{DPCCH\_E_c}{I_{or}}$	dB	See figure 6.1	
Information Data Rate	kbps	12.2	

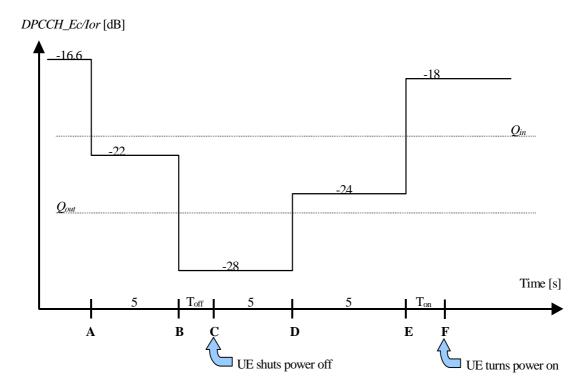


Figure 6.1: Test case for out-of-synch handling in the UE

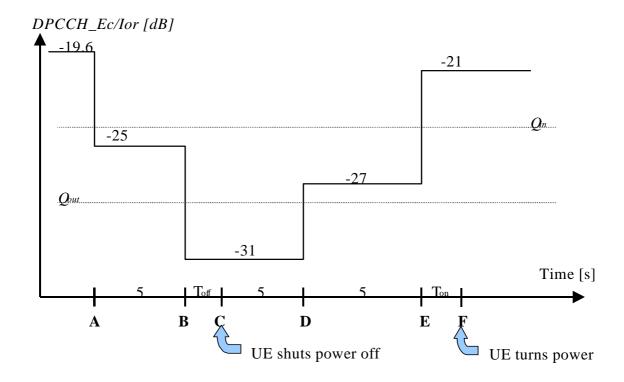


Figure 6.1A: Test case for out-of-synch handling in the UE supporting the enhanced performance requirements type1

In this test case, the requirements for the UE are that:

- 1. The UE shall not shut its transmitter off before point B.
- 2. The UE shall shut its transmitter off before point C, which is  $T_{\rm off} = 200$  ms after point B.
- 3. The UE shall not turn its transmitter on between points C and E.
- 4. The UE shall turn its transmitter on before point F, which is  $T_{on} = 200$  ms after point E.

# 6.4A Output pattern dynamics

An F-TPICH carries transmitted precoding indicator generated at layer 1 for UL CLTD operation.

# 6.4A.1 Out-of-quality handling of TPI applicability

The UE shall measure the reliability of the received TPI bits over the 3 slot period in which the TPI bit pattern corresponding to a precoding weight is received, as specified in TS 25.214 [8]. The received TPI bits are mapped to precoding weights and applied by the UE only if the estimated quality of the TPI bits is determined to be better than a threshold  $Q_{tpi}$ . Otherwise, the UE shall apply the precoding weights corresponding to the last reliably received TPI bit pattern. The threshold is not defined explicitly, but is defined by the conditions under which the UE shall apply the precoding weights corresponding to the received TPI bits and apply the precoding weights corresponding to the last reliably received TPI bits, as stated in this subclause.

The threshold  $Q_{tpi}$  should correspond to a level of F-TPICH quality below which no reliable detection of the TPI bits transmitted on the downlink DPCCH can be made.

### 6.4A.1.1 Minimum requirement

When the UE estimates the F-TPICH quality received over the 3 slot period to be worse than a threshold  $Q_{tpi}$ , the UE shall apply the precoding weights corresponding to the last reliably received TPI bit pattern. The UE shall not apply the precoding weights corresponding to the received TPI bits again until the F-TPICH quality exceeds a threshold  $Q_{tpi}$ .

When the estimated F-TPICH quality is better than a threshold  $Q_{tpi}$ , the UE shall again apply the precoding weights corresponding to the received TPI bits.

#### 6.4A.1.2 Test case

This subclause specifies a test case, which provides additional information for how the minimum requirement should be interpreted for the purpose of conformance testing.

The quality level at the threshold  $Q_{tpi}$  corresponds to a signal level depending on the downlink conditions F-TPICH parameters. For the conditions in Table 6.6A, a signal with the quality below the level  $Q_{tpi}$  can be generated by an F-TPICH\_Ec/Ior ratio of -26 dB, and a signal with the quality above the level  $Q_{tpi}$  can be generated by an F-TPICH\_Ec/Ior ratio of -12 dB. For a UE which supports the optional enhanced requirements type1 specified based on receiver diversity for F-TPICH a signal with the quality below the level  $Q_{tpi}$  can be instead generated by an F-TPICH\_Ec/Ior ratio of -29 dB for the conditions in Table 6.6A, and a signal with the quality above the level  $Q_{tpi}$  by an F-TPICH\_Ec/Ior ratio of -15 dB. The downlink physical channels, other than those specified in Table 6.6A, are as specified in Table C.3 of Annex C.

Figure 6.1B shows an example scenario where the F-TPICH\_Ec/Ior ratio varies from a level where the F-TPICH is demodulated under normal conditions, down to a level below  $Q_{tpi}$  where the UE shall apply the precoding weights corresponding to the last reliably received TPI bit pattern and then back up to a level above  $Q_{tpi}$  where the UE shall apply the precoding weights corresponding to the received TPI bit pattern. Figure 6.1C shows an example scenario for a UE which supports the optional enhanced requirements type1 for F-TPICH, where the F-TPICH\_Ec/Ior ratio varies from a level where the F-TPICH is demodulated under normal conditions, down to a level below  $Q_{tpi}$  where the UE shall apply the precoding weights corresponding to the last reliably received TPI bit pattern and then back up to a level above  $Q_{tpi}$  where the UE shall apply the precoding weights corresponding to the received TPI bit pattern. Point B shall be at least 10 ms after point A, and point D shall be at least 10 ms after point C.

For a UE which supports the optional enhanced requirements type 1 for F-TPICH, the UE shall not be tested according to the minimum requirements.

Parameter Unit		Value	
Propagation condition		Static	
$\hat{I}_{or}/I_{oc}$	dB	-1	
$I_{oc}$	dBm/3.84 MHz -60		
$\frac{\textit{F-TPICH\_E}_c}{\textit{I}_{or}}$	dB	See figure 6.1B or figure 6.1C	

Table 6.6A: parameters for the out-of-quality handling of F-TPICH test case

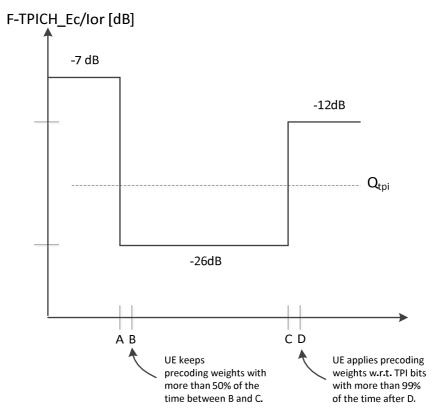


Figure 6.1B: Test case for F-TPICH out-of-quality handling in the UE supporting the minimum requirements for F-TPICH

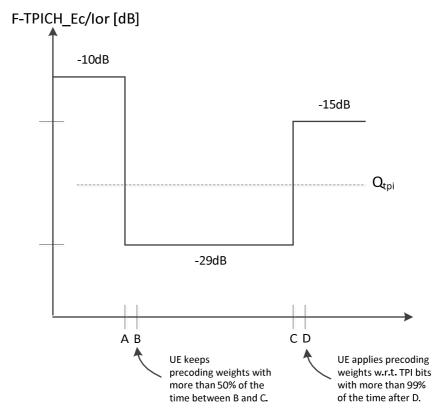


Figure 6.1C: Test case for F-TPICH out-of-quality handling in the UE supporting the optional enhanced requirements type1 for F-TPICH

In these test cases, the requirements for the UE are that:

- 1. The UE shall keep precoding weights with more than 50% of the time between point B and point C.
- 2. The UE apply precoding weights w.r.t. TPI bits with more than 99% of the time after point D.

## 6.5 Transmit ON/OFF power

## 6.5.1 Transmit OFF power

Transmit OFF power is defined as the RRC filtered mean power when the transmitter is off. The transmitter is considered to be off when the UE is not allowed to transmit or during periods when the UE is not transmitting DPCCH due to discontinuous uplink DPCCH transmission. During UL compressed mode gaps, the UE is not considered to be off.

### 6.5.1.1 Minimum requirement

The transmit OFF power is defined as the RRC filtered mean power in a duration of at least one timeslot excluding any transient periods. The requirement for the transmit OFF power shall be less than -56 dBm.

### 6.5.1.1A Additional requirement for DC-HSUPA

The transmit OFF power is defined per carrier as the RRC filtered mean power in a duration of at least one timeslot excluding any transient periods. The requirement for the transmit OFF power in each carrier shall be less than -56 dBm, when the transmitters in both carriers are turned off.

### 6.5.1.1B Additional requirement for UL OLTD

For the UE with two active transmit antenna connectors in UL OLTD operation, the transmit OFF power specified in sub-clause 6.5.1.1 applies at each transmit antenna connector, when the transmitter is OFF on both transmit connectors.

### 6.5.1.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the transmit OFF power specified in sub-clause 6.5.1.1 applies at each transmit antenna connector, when the transmitter is OFF on both transmit antenna connectors.

For UE configured in UL CLTD activation state 2 or activation state 3, the transmit OFF power specified in sub-clause 6.5.1.1 applies at the active transmit antenna connector, when the transmitter is OFF on both transmit antenna connectors.

### 6.5.1.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the transmit OFF power specified in subclause 6.5.1.1 applies at each transmit antenna connector, when the transmitter is OFF on both transmit antenna connectors.

### 6.5.2 Transmit ON/OFF Time mask

The time mask for transmit ON/OFF defines the transient period allowed for the UE between transmit OFF power and transmit ON power. During the transient period there are no additional requirements on UE transmit power beyond what is required in subclause 6.2 maximum output power observed over a period of at least one timeslot. ON/OFF scenarios include PRACH preamble bursts, the beginning or end of PRACH message parts, the beginning or end of each discontinuous uplink DPCCH transmission gap and the beginning or end of UL DPCH transmissions.

### 6.5.2.1 Minimum requirement

The transmit power levels versus time shall meet the requirements in figure 6.2 for PRACH preambles, the requirements in figure 6.2A for discontinuous uplink DPCCH transmission and the requirements in figure 6.3 for all other cases. The off power observation period is defined as the RRC filtered mean power in a duration of at least one timeslot excluding any transient periods. The on power observation period is defined as the mean power over one timeslot excluding any transient periods. For PRACH preambles, the on power observation period is 3904 chips (4096 chips less the transient periods).

The off power specification in figures 6.2 and 6.3 is as defined in 6.5.1.1.

The average on power specification in figures 6.2 and 6.3 depends on each possible case.

- First preamble of RACH: Open loop accuracy (Table 6.3).
- During preamble ramping of the RACH, and between final RACH preamble and RACH message part: Accuracy depending on size of the required power difference (Table 6.7). The step in total transmitted power between final RACH preamble and RACH message (control part + data part) shall be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude.
- After transmission gaps due to discontinuous uplink DPCCH transmission: Accuracy as defined in Table 6.7A. The uplink transmitter power difference tolerance after a transmission gap of up to 10 sub-frames shall be within the range as defined in Table 6.7A. The TPC\_cmd value shown in Table 6.7A corresponds to the last TPC\_cmd value received before the transmission gap and applied by the UE after the transmission gap when discontinuous uplink DPCCH transmission is activated.
- After transmission gaps in compressed mode: Accuracy as in Table 6.9.
- Power step to Maximum Power: Maximum power accuracy (Table 6.1).

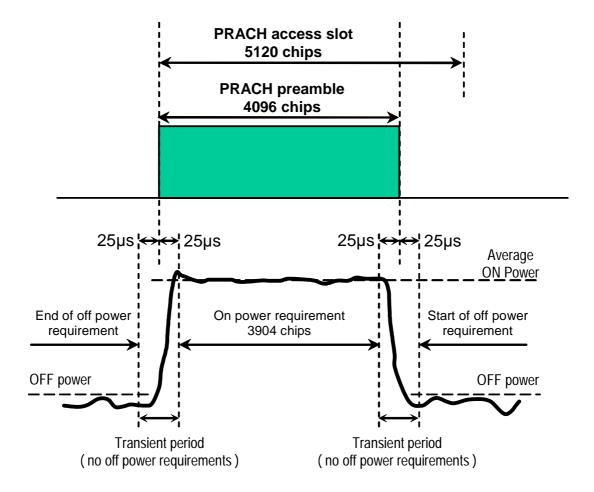


Figure 6.2: Transmit ON/OFF template for PRACH preambles

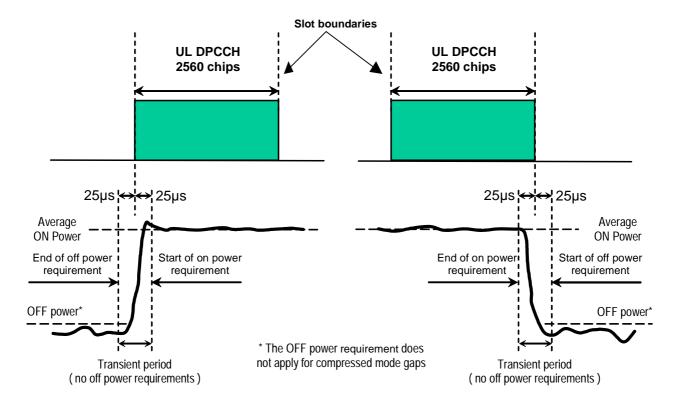


Figure 6.2A: Transmit ON/OFF template for discontinuous uplink DPCCH transmission

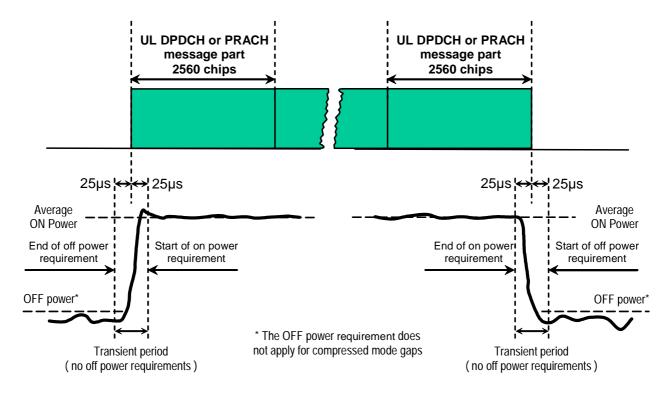


Figure 6.3: Transmit ON/OFF template for all other On/Off cases

Table 6.7: Transmitter power difference tolerance for RACH preamble ramping, and between final RACH preamble and RACH message part

Power step size (Up or down)* ΔP [dB]	Transmitter power difference tolerance [dB]
0	+/- 1
1	+/- 1
2	+/- 1.5
3	+/- 2
4 ≤ Δ P ≤10	+/- 2.5
11 ≤ Δ P ≤15	+/- 3.5
16 ≤ Δ P ≤20	+/- 4.5
21 ≤ Δ P	+/- 6.5

NOTE: Power step size for RACH preamble ramping is from 1 to 8 dB with 1 dB steps.

Table 6.7A: Transmitter power difference tolerance after a gap of up to 10 sub-frames due to discontinuous uplink DPCCH transmission

	Transmitter power step tolerance after discontinuous UL DPCCH transmission gap					
Last TPC_cmd	1 dB s	step size 2 dB step size		tep size	3 dB step size	
	Lower	Upper	Lower	Upper	Lower	Upper
+ 1	-2 dB	+4 dB	-1 dB	+5 dB	0 dB	+6 dB
0	-3 dB	+3 dB	-3 dB	+3 dB	-3 dB	+3 dB
-1	-4 dB	+2 dB	-5 dB	+1 dB	-6 dB	0 dB

### 6.5.2.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the minimum requirements except the requirement with PRACH specified in sub-clause 6.5.2.1 apply at each transmit antenna connector.

### 6.5.2.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the minimum requirements specified in sub-clause 6.5.2.1 except the requirement with PRACH apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the minimum requirements in sub-clause 6.5.2.1 except the requirement with PRACH apply at the active transmit antenna connector.

### 6.5.2.1C Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the minimum requirements specified in sub-clause 6.5.2.1, except the requirement with PRACH, apply at each transmit antenna connector.

## 6.5.3 Change of TFC

A change of TFC (Transport Format Combination) in uplink means that the power in the uplink varies according to the change in data rate. DTX, where the DPDCH is turned off, is a special case of variable data, which is used to minimise the interference between UE(s) by reducing the UE transmit power when voice, user or control information is not present.

### 6.5.3.1 Minimum requirement

A change of output power is required when the TFC, and thereby the data rate, is changed. The ratio of the amplitude between the DPDCH codes and the DPCCH code will vary. The power step due to a change in TFC shall be calculated in the UE so that the power transmitted on the DPCCH shall follow the inner loop power control. The step in total transmitted power (DPCCH + DPDCH) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude. The accuracy of the

power step, given the step size, is specified in Table 6.8. The power change due to a change in TFC is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, not including the transient duration. The transient duration is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

Table 6.8: Transmitter power step toleranc		
war atan aira (Un ar dawa)	Transmitter never et	

Power step size (Up or down) ΔP [dB]	Transmitter power step tolerance [dB]
0	+/- 0.5
1	+/- 0.5
2	+/- 1.0
3	+/- 1.5
4 ≤ Δ P ≤10	+/- 2.0
11 <u>≤</u> Δ P ≤15	+/- 3.0
16 ≤ Δ P ≤20	+/- 4.0
21 ≤ Δ P	+/- 6.0

The mean power of successive slots shall be calculated according to Figure 6.4.

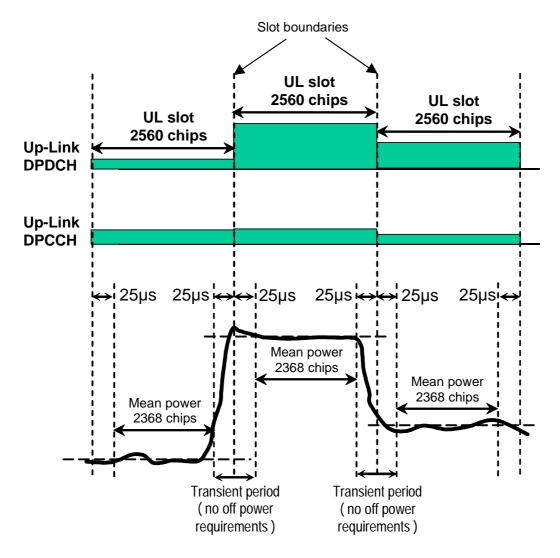


Figure 6.4: Transmit template during TFC change

## 6.5.3.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the minimum requirements specified in sub-clause 6.5.3.1 apply at each transmit antenna connector.

### 6.5.3.1B Additional requirement for UL CLTD

A change of output power is required when the TFC, and thereby the data rate, is changed. The ratio of the amplitude between the DPDCH codes and the DPCCH code will vary. The power step due to a change in TFC shall be calculated in the UE so that the power transmitted on the DPCCH shall follow the inner loop power control. The step in total transmitted power (DPCCH + S-DPCCH + DPDCH for UE configured in UL CLTD activation state 1, and DPCCH + DPDCH for UE configured in UL CLTD activation state 2 or activation state 3) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude. The accuracy of the power step, given the step size, is specified in Table 6.8 at each transmit antenna connector. The power change at each transmit antenna connector due to a change in TFC is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, not including the transient duration. The transient duration is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

## 6.5.4 Power setting in uplink compressed mode

Compressed mode in uplink means that the power in uplink is changed.

### 6.5.4.1 Minimum requirement

A change of output power is required during uplink compressed frames since the transmission of data is performed in a shorter interval. The ratio of the amplitude between the DPDCH codes and the DPCCH code will also vary. The power step due to compressed mode shall be calculated in the UE so that the energy transmitted on the pilot bits during each transmitted slot shall follow the inner loop power control.

Thereby, the power during compressed mode, and immediately afterwards, shall be such that the mean power of the DPCCH follows the steps due to inner loop power control combined with additional steps of  $10\text{Log}_{10}(N_{\text{pilot.prev}}/N_{\text{pilot.curr}})$  dB where  $N_{\text{pilot.curr}}$  is the number of pilot bits in the previously transmitted slot, and  $N_{\text{pilot.curr}}$  is the current number of pilot bits per slot.

The resulting step in total transmitted power (DPCCH +DPDCH) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the power step, given the step size, is specified in Table 6.8 in subclause 6.5.3.1. The power step is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, when neither the original timeslot nor the reference timeslot are in a transmission gap. The transient duration is not included, and is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

In addition to any power change due to the ratio  $N_{pilot,prev} / N_{pilot,curr}$ , the mean power of the DPCCH in the first slot after a compressed mode transmission gap shall differ from the mean power of the DPCCH in the last slot before the transmission gap by an amount  $\Delta_{RESUME}$ , where  $\Delta_{RESUME}$  is calculated as described in clause 5.1.2.3 of TS 25.214.

The resulting difference in the total transmitted power (DPCCH + DPDCH) shall then be rounded to the closest integer dB value. A power difference exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the resulting difference in the total transmitted power (DPCCH + DPDCH) after a transmission gap of up to 14 slots shall be as specified in Table 6.9.

Table 6.9: Transmitter power difference tolerance after a transmission gap of up to 14 slots

Power difference (Up or down) ΔP [dB]	Transmitter power step tolerance after a transmission gap [dB]
Δ P ≤ 2	+/- 3
3	+/- 3
4 ≤ Δ P ≤10	+/- 3.5
11 ≤ Δ P ≤15	+/- 4
16 ≤ Δ P ≤20	+/- 4.5
21 ≤ Δ P	+/- 6.5

The power difference is defined as the difference between the mean power of the original (reference) timeslot before the transmission gap and the mean power of the target timeslot after the transmission gap, not including the transient durations. The transient durations at the start and end of the transmission gaps are each from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

The mean power of successive slots shall be calculated according to figure 6.5.

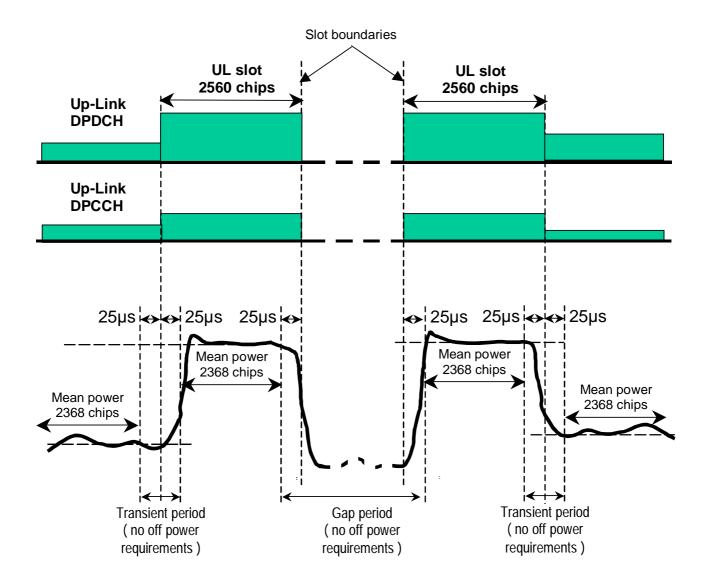


Figure 6.5: Transmit template during compressed mode

### 6.5.4.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the minimum requirements specified in sub-clause 6.5.4.1 apply at each UE antenna connector.

### 6.5.4.1B Additional requirement for UL CLTD

A change of output power is required during uplink compressed frames since the transmission of data is performed in a shorter interval. The ratio of the amplitude between the DPDCH codes and the DPCCH code will also vary. The power step due to compressed mode shall be calculated in the UE so that the energy transmitted on the pilot bits during each transmitted slot shall follow the inner loop power control.

Thereby, the power during compressed mode, and immediately afterwards, shall be such that the mean power of the DPCCH follows the steps due to inner loop power control combined with additional steps of  $10\text{Log}_{10}(N_{\text{pilot.prev}}/N_{\text{pilot.curr}})$  dB where  $N_{\text{pilot.prev}}$  is the number of pilot bits in the previously transmitted slot, and  $N_{\text{pilot.curr}}$  is the current number of pilot bits per slot.

The resulting step in total transmitted power (DPCCH + S-DPCCH +DPDCH for UE configured in UL CLTD activation state 1, and DPCCH + DPDCH for UE configured in UL CLTD activation state 2 or activation state 3) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the power step at each transmit antenna connector, given the step size, is specified in Table 6.8 in subclause 6.5.3.1. The power step is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, when neither the original timeslot nor the reference timeslot are in a transmission gap. The transient duration is not included, and is from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary.

In addition to any power change due to the ratio  $N_{pilot,prev} / N_{pilot,curr}$ , the mean power of the DPCCH in the first slot after a compressed mode transmission gap shall differ from the mean power of the DPCCH in the last slot before the transmission gap by an amount  $\Delta_{RESUME}$ , where  $\Delta_{RESUME}$  is calculated as described in clause 5.1.2.3 of TS 25.214.

The resulting difference in the total transmitted power (DPCCH + S-DPCCH + DPDCH for UE configured in UL CLTD activation state 1, and DPCCH + DPDCH for UE configured in UL CLTD activation state 2 or activation state 3) shall then be rounded to the closest integer dB value. A power difference exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the resulting difference in the total transmitted power (DPCCH + S-DPCCH + DPDCH for UE configured in UL CLTD activation state 1, and DPCCH + DPDCH for UE configured in UL CLTD activation state 2 or activation state 3) after a transmission gap of up to 14 slots shall be as specified in Table 6.9 at each transmit antenna connector.

The power difference at each transmit antenna connector is defined as the difference between the mean power of the original (reference) timeslot before the transmission gap and the mean power of the target timeslot after the transmission gap, not including the transient durations. The transient durations at the start and end of the transmission gaps are each from  $25\mu s$  before the slot boundary to  $25\mu s$  after the slot boundary. The mean power of successive slots shall be calculated according to figure 6.5.

#### 6.5.5 HS-DPCCH

The transmission of Ack/Nack or CQI over the HS-DPCCH may cause the transmission power in the uplink to vary. The ratio of the amplitude between the DPCCH and the Ack/Nack and CQI respectively is signalled by higher layers.


## 6.5.5.1 Minimum requirement

The nominal sum power on DPCCH+DPDCH is independent of the transmission of Ack/Nack and CQI unless the UE output power when Ack/Nack or CQI is transmitted would exceed the maximum value specified in Table 6.1A or fall below the value specified in 6.4.3.1, whereupon the UE shall apply additional scaling to the total transmit power as defined in section 5.1.2.6 of TS.25.214 [8].

The composite transmitted power (DPCCH + DPDCH+HS-DPCCH) may then also be rounded to the closest integer dB value. If rounding is done a power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude.

The nominal power step due to transmission of Ack/Nack or CQI is defined as the difference between the nominal mean powers of two power evaluation periods either side of an HS-DPCCH boundary. The first evaluation period starts  $25\mu s$ 

after a DPCCH slot boundary and ends  $25\mu s$  before the following HS-DPCCH slot boundary. The second evaluation period starts  $25\mu s$  after the same HS-DPCCH slot boundary and ends  $25\mu s$  before the following DPCCH slot boundary. This is described graphically in figure 6.6.

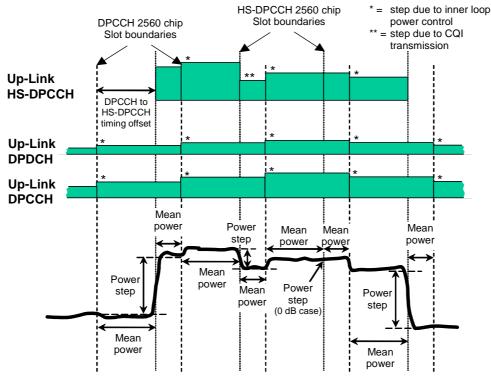

The power step due to HS-DPCCH transmission is the difference between the mean powers transmitted before and after an HS-DPCCH slot boundary. The mean power evaluation period excludes a 25µs period before and after any DPCCH or HS-DPCCH slot boundary.

Figure 6.6: Transmit power template during HS-DPCCH transmission

The tolerance of the power step due to transmission of the HS-DPCCH shall meet the requirements in table 6.9A.

Table 6.9A: Transmitter power step tolerance

## 6.5.5.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the minimum requirements specified in sub-clause 6.5.5.1 apply at each transmit antenna connector.

### 6.5.5.1B Additional requirement for UL CLTD

The nominal sum power on DPCCH+S-DPCCH+DPDCH is independent of the transmission of Ack/Nack and CQI unless the UE output power when Ack/Nack or CQI is transmitted would exceed the maximum value specified in Table

6.1A or fall below the value specified in 6.4.3.1, whereupon the UE shall apply additional scaling to the total transmit power as defined in section 5.1.2.6 of TS.25.214 [8].

The composite transmitted power (DPCCH + S-DPCCH + DPDCH+HS-DPCCH) may then also be rounded to the closest integer dB value. If rounding is done a power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude.

The nominal power step due to transmission of Ack/Nack or CQI is defined as the difference between the nominal mean powers of two power evaluation periods either side of an HS-DPCCH boundary. The first evaluation period starts 25µs after a DPCCH slot boundary and ends 25µs before the following HS-DPCCH slot boundary. The second evaluation period starts 25µs after the same HS-DPCCH slot boundary and ends 25µs before the following DPCCH slot boundary.

The tolerance of the power step due to transmission of the HS-DPCCH shall meet the requirements in table 6.9A at each transmit antenna connector.

### 6.5.5.1C Additional requirement for UL MIMO

The nominal sum power on DPCCH+S-DPCCH+E-DPDCH+S-E-DPDCH+S-E-DPCCH is independent of the transmission of Ack/Nack and CQI unless the UE output power when Ack/Nack or CQI is transmitted would exceed the maximum value specified in Table 6.1AC or fall below the value specified in 6.4.3.1D, whereupon the UE shall apply additional scaling to the total transmit power as defined in section 5.1.2.6 of TS.25.214 [8].

The composite transmitted power (DPCCH + S-DPCCH + E-DPDCH + S-E-DPDCH + E-DPCCH + S-E-DPCCH + HS-DPCCH) may then also be rounded to the closest integer dB value. If rounding is done a power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude.

The nominal power step due to transmission of Ack/Nack or CQI is defined as the difference between the nominal mean powers of two power evaluation periods either side of an HS-DPCCH boundary. The first evaluation period starts 25µs after a DPCCH slot boundary and ends 25µs before the following HS-DPCCH slot boundary. The second evaluation period starts 25µs after the same HS-DPCCH slot boundary and ends 25µs before the following DPCCH slot boundary.

The tolerance of the power step due to transmission of the HS-DPCCH shall meet the requirements in table 6.9A at each transmit antenna connector.

# 6.6 Output RF spectrum emissions

## 6.6.1 Occupied bandwidth

Occupied bandwidth is a measure of the bandwidth containing 99 % of the total integrated power of the transmitted spectrum, centered on the assigned channel frequency. The occupied channel bandwidth shall be less than 5 MHz based on a chip rate of 3.84 Mcps.

## 6.6.1A Occupied bandwidth for DC-HSUPA

In the case dual adjacent carriers are assigned in the uplink, occupied bandwidth is a measure of the bandwidth containing 99 % of the total integrated power of the transmitted spectrum, centered at the center of the assigned channel frequencies. The occupied channel bandwidth shall be less than 10 MHz on a chip rate of 3.84 Mcps.

## 6.6.1B Occupied bandwidth for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, occupied bandwidth requirement is defined per UE.

The occupied bandwidth of the UL OLTD UE is determined by the occupied bandwidth (defined in 6.6.1) measured at each active antenna port of the UE. The upper boundary of the UE occupied bandwidth is the highest boundary of the two measured occupied bandwidths. The lower boundary of the UE occupied bandwidth is the lowest boundary of the two measured occupied bandwidths. The occupied channel bandwidth for UE shall be less than 5 MHz based on a chip rate of 3.84 Mcps.

## 6.6.1C Occupied bandwidth for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, occupied bandwidth requirement is defined per UE.

The occupied bandwidth of the UL CLTD UE is determined by the occupied bandwidth (defined in 6.6.1) measured at each active antenna port of the UE. The upper boundary of the UE occupied bandwidth is the highest boundary of the two measured occupied bandwidths. The lower boundary of the UE occupied bandwidth is the lowest boundary of the two measured occupied bandwidths. The occupied channel bandwidth for UE shall be less than 5 MHz based on a chip rate of 3.84 Mcps.

For UE configured in UL CLTD activation state 2 or activation state 3, the requirement in sub-clause 6.6.1 apply at the active transmit antenna connector.

## 6.6.1D Occupied bandwidth for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, occupied bandwidth requirement is defined per UE.

The occupied bandwidth of the UL MIMO UE is determined by the occupied bandwidth (defined in 6.6.1) measured at each active antenna connector of the UE. The upper boundary of the UE occupied bandwidth is the higher upper boundary of the two measured occupied bandwidths. The lower boundary of the UE occupied bandwidth is the lower low boundary of the two measured occupied bandwidths. The occupied channel bandwidth for UE shall be less than 5 MHz based on a chip rate of 3.84 Mcps.

### 6.6.2 Out of band emission

Out of band emissions are unwanted emissions immediately outside the nominal channel resulting from the modulation process and non-linearity in the transmitter but excluding spurious emissions. This out of band emission limit is specified in terms of a spectrum emission mask and Adjacent Channel Leakage power Ratio.

#### 6.6.2.1 Spectrum emission mask

The spectrum emission mask of the UE applies to frequencies, which are between 2.5 MHz and 12.5 MHz away from the UE centre carrier frequency. The out of channel emission is specified relative to the RRC filtered mean power of the UE carrier.

#### 6.6.2.1.1 Minimum requirement

The power of any UE emission shall not exceed the levels specified in Table 6.10. The absolute requirement is based on a -50 dBm/3.84 MHz minimum power threshold for the UE. This limit is expressed for the narrower measurement bandwidths as -55.8 dBm/1 MHz and -71.1 dBm/30 kHz. The requirements are applicable for all values of  $\beta_c$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8].

**Table 6.10: Spectrum Emission Mask Requirement** 

Δf in MHz (Note 1)	Minimum requirement (No	Measurement bandwidth	
(Note 1)	Relative requirement	Absolute requirement	ballawiatii
2.5 - 3.5	$\left\{-35-15\cdot\left(\frac{\Delta f}{MHz}-2.5\right)\right\}dBc$	-71.1 dBm	30 kHz (Note 3)
3.5 - 7.5	$\left\{-35-1\cdot\left(\frac{\Delta f}{MHz}-3.5\right)\right\}dBc$	-55.8 dBm	1 MHz (Note 4)
7.5 - 8.5	$\left\{-39-10\cdot\left(\frac{\Delta f}{MHz}-7.5\right)\right\}dBc$	-55.8 dBm	1 MHz (Note 4)
8.5 - 12.5 MHz	-49 dBc	-55.8 dBm	1 MHz (Note 4)

Note 1:  $\Delta f$  is the separation between the carrier frequency and the centre of the measurement bandwidth.

Note 2: The minimum requirement is calculated from the relative requirement or the absolute requirement, whichever is the higher power.

Note 3: The first and last measurement position with a 30 kHz filter is at  $\Delta f$  equals to 2.515 MHz and 3.485 MHz.

Note 4: The first and last measurement position with a 1 MHz filter is at  $\Delta f$  equals to 4 MHz and 12 MHz.

For operation in band II, IV, V, X, XII, XIII, XIV, XXV and XXVI the minimum requirement is calculated from the minimum requirement in table 6.10 or the applicable additional requirement in Tables 6.10A, 6.10B or 6.10C, whichever is the tighter requirement.

Table 6.10A: Additional spectrum emission limits for Bands II, IV, X and XXV

Δf in MHz (Note 1)	Frequency offset of measurement filter centre frequency, f_offset	Additional requirements Band II, IV, X	Measurement bandwidth
$2.5 \text{ MHz} \leq \Delta f < 3.5 \text{ MHz}$	2.515MHz ≤ f_offset < 3.485MHz	-15 dBm	30 kHz
3.5 MHz ≤ Δf ≤ 12.5 MHz	4.0MHz ≤ f_offset < 12.0 MHz	-13 dBm	1 MHz

Note 1:  $\Delta f$  is the separation between the carrier frequency and the centre of the measurement bandwidth.

Table 6.10B: Additional spectrum emission limits for Band V and XXVI

Δf in MHz (Note 1)	Frequency offset of measurement filter centre frequency, f_offset	Additional requirements Band V	Measurement bandwidth
$2.5 \text{ MHz} \leq \Delta f < 3.5 \text{ MHz}$	2.515MHz ≤ f_offset < 3.485MHz	-15 dBm	30 kHz
$3.5 \text{ MHz} \leq \Delta f \leq 12.5 \text{ MHz}$	3.55MHz ≤ f_offset < 12.45 MHz	-13 dBm	100 kHz

Note 1:  $\Delta f$  is the separation between the carrier frequency and the centre of the measurement bandwidth.

Table 6.10C: Additional spectrum emission limits for Bands XII, XIII, XIV

Δf in MHz (Note 1)	Frequency offset of measurement filter centre frequency, f_offset	Additional requirements Band XII, XIII, XIV	Measurement bandwidth
$2.5 \text{ MHz} \leq \Delta f < 2.6 \text{ MHz}$	2.515MHz ≤ f_offset < 2.585MHz	-13 dBm	30 kHz
$2.6 \text{ MHz} \leq \Delta f \leq 12.45 \text{ MHz}$	2.65MHz ≤ f_offset < 12.45 MHz	-13 dBm	100 kHz
Note 1: $\Delta f$ is the separation between the carrier frequency and the centre of the measurement bandwidth.			

NOTE: As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth specified in tables 6.10, 6.10A, 6.10B and 6.10C. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

### 6.6.2.1A Additional Spectrum emission mask for DC-HSUPA

The spectrum emission mask of the UE applies to frequencies, which are between 5 MHz and 20 MHz away from the UE centre frequency of the two assigned channel frequencies. The requirements assume that the UE output power shall be maximum level. The reference measurement channels for the requirements in subclause 6.6.2.1A.1 and 6.6.2.1A.2 are provided in subclause A.2.8.

#### 6.6.2.1A.1 Minimum requirement

The power of any UE emission shall not exceed the levels specified in Table 6.10D for the specified channel bandwidth.

Table 6.10D: Spectrum emission mask for DC-HSUPA

measurement filter centre frequency, f_offset	limit (dBm)	bandwidth
5.015MHz ≤ f_offset < 5.985MHz	-18	30 kHz
6.5MHz ≤ f_offset < 10.0MHz	-10	1 MHz
10.0MHz ≤ f_offset < 19.0MHz	-13	1 MHz
19.0MHz ≤ f_offset < 19.5MHz	-25	1 MHz
	$\begin{array}{l} 5.015\text{MHz} \leq f\_\text{offset} < 5.985\text{MHz} \\ 6.5\text{MHz} \leq f\_\text{offset} < 10.0\text{MHz} \\ 10.0\text{MHz} \leq f\_\text{offset} < 19.0\text{MHz} \\ 19.0\text{MHz} \leq f\_\text{offset} < 19.5\text{MHz} \end{array}$	

Note:  $\Delta f$  is the separation between the center of two assigned channel frequencies and the centre of the measurement bandwidth.

#### 6.6.2.1A.2 Additional requirement for band II, IV, V, X, XXV and XXVI

The UE shall meet an additional requirement specified in Table 6.10E for band II, IV, V, X, XXV and XXVI.

Table 6.10E: Additional spectrum emission mask for DC-HSUPA in band II, IV, V, X, XXV and XXVI

	Δf (MHz)	Frequency offset of measurement filter centre frequency, f_offset	Spectrum emission limit (dBm)	Measurement bandwidth
	± 5-6	5.015MHz ≤ f_offset < 5.985MHz	-18	30 kHz
	± 6-19	6.5MHz ≤ f_offset < 19.0MHz	-13	1 MHz
	± 19-20	19.0MHz ≤ f_offset < 19.5MHz	-25	1 MHz
Note:	Af is the senaration between the center of two assigned channel frequencies and the centre of the			

ote: Δt is the separation between the center of two assigned channel frequencies and the centre of the measurement bandwidth.

## 6.6.2.1B Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the spectrum emission mask specified in sub-clause 6.6.2.1 applies at each transmit antenna connector.

### 6.6.2.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the spectrum emission mask specified in sub-clause 6.6.2.1 applies at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the requirements in sub-clause 6.6.2.1 apply at the active transmit antenna connector.

## 6.6.2.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the spectrum emission mask specified in sub-clause 6.6.2.1 applies at each transmit antenna connector.

### 6.6.2.2 Adjacent Channel Leakage power Ratio (ACLR)

In the case a single carrier is assigned on the uplink, Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the RRC filtered mean power centered on the assigned channel frequency to the RRC filtered mean power centered on an adjacent channel frequency.

In the case dual adjacent carriers are assigned on the uplink, ACLR is the ratio of the sum of the RRC filtered mean powers centered on each of the two assigned channel frequencies to the RRC filtered mean power centered on an adjacent channel frequency.

### 6.6.2.2.1 Minimum requirement

If the adjacent channel power is greater than -50dBm then the ACLR shall be higher than the value specified in Table 6.11. The requirements are applicable for all values of  $\beta_c$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8].

 Power Class
 Adjacent channel frequency relative to assigned channel frequency
 ACLR limit

 3
 + 5 MHz or - 5 MHz
 33 dB

 3
 + 10 MHz or - 10 MHz
 43 dB

 4
 + 5 MHz or - 5 MHz
 33 dB

 4
 + 10 MHz or -10 MHz
 43 dB

Table 6.11: UE ACLR

NOTE 1: The requirement shall still be met in the presence of switching transients.

NOTE 2: The ACLR requirements reflect what can be achieved with present state of the art technology.

NOTE 3: Requirement on the UE shall be reconsidered when the state of the art technology progresses.

#### 6.6.2.2.1A Additional requirement for DC-HSUPA

If the adjacent channel power is greater than -50dBm then the ACLR shall be higher than the value specified in Table 6.11A. The requirements are applicable for all values of  $\beta_c$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8]. The reference measurement channels for the requirements in subclause 6.6.2.2.1A are provided in subclause A.2.8.

Table 6.11A: UE ACLR for DC-HSUPA

Power Class	Adjacent channel frequency relative to the center of two assigned channel	ACLR limit
	frequencies	
3	+ 7.5 MHz or – 7.5 MHz	33 dB
3	+ 12.5 MHz or – 12.5 MHz	36 dB
4	+ 7.5 MHz or – 7.5 MHz	33 dB
4	+ 12.5 MHz or -12.5 MHz	36 dB

NOTE 1: The requirement shall still be met in the presence of switching transients.

NOTE 2: The ACLR requirements reflect what can be achieved with present state of the art technology.

NOTE 3: Requirement on the UE shall be reconsidered when the state of the art technology progresses.

### 6.6.2.2.1B Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the ACLR requirements specified in subclause 6.6.2.2.1 apply at each transmit antenna connector.

### 6.6.2.2.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the ACLR requirements specified in sub-clause 6.6.2.2.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the ACLR requirements specified in sub-clause 6.6.2.2.1 apply at the active transmit antenna connector.

#### 6.6.2.2.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the ACLR requirements specified in subclause 6.6.2.2.1 apply at each transmit antenna connector.

## 6.6.3 Spurious emissions

Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions.

The frequency boundary and the detailed transitions of the limits between the requirement for out band emissions and spectrum emissions are based on ITU-R Recommendations SM.329 [2].

### 6.6.3.1 Minimum requirement

These requirements are only applicable for frequencies, which are greater than 12.5 MHz away from the UE centre carrier frequency.

Table 6.12: General spurious emissions requirements

Frequency Bandwidth	Measurement Bandwidth	Minimum requirement	Note
9 kHz ≤ f < 150 kHz	1 kHz	-36 dBm	
150 kHz ≤ f < 30 MHz	10 kHz	-36 dBm	
30 MHz ≤ f < 1000 MHz	100 kHz	-36 dBm	
1 GHz ≤ f < 12.75 GHz	1 MHz	-30 dBm	
12.75 GHz ≤ f < 5 <sup>th</sup> harmonic of the upper frequency edge of the UL operating band in GHz	1 MHz	-30 dBm	Note 1
NOTE 1: Applies only for Band 2	XXII.		

Table 6.13: Additional spurious emissions requirements

	Frequency Bandwidth	Measurement Bandwidth	Minimum requirement
I	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
Ì	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
Ì	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
	020 Wii 12 3 1 3 000 Wii 12	3.84MHz	-60 dBm
Ì	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
}	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
Ì	1884.5 MHz <f< 1915.7="" mhz<="" td=""><td>300 kHz</td><td>-41 dBm</td></f<>	300 kHz	-41 dBm
	2110 MHz $\leq$ f $\leq$ 2170 MHz	3.84 MHz	-60 dBm
ł	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm
}	$2570 \text{ MHz} \le f \le 2570 \text{ MHz}$	3.84 MHz	-60 dBm
}			
}	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
11	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm
II	717 MHz $\leq$ f $\leq$ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
}	746 MHz ≤ f ≤ 758 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
Ì	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
Ì	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm**
III	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
ł	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
ł	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm *****
}	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
		100 kHz	-67 dBm *
	925 MHz ≤ f ≤ 935 MHz	3.84 MHz	- 60 dBm
ł	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
}		3.84 MHz	-60 dBm *****
-	1475.9 MHz ≤ f ≤ 1510.9 MHz		
}	1805 MHz ≤ f ≤ 1880 MHz	3.84 MHz	-60 dBm
}	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm *****
}	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
ļ	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm
	2570 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
ļ	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm **
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
IV	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
ſ	746 MHz $\leq$ f $\leq$ 756 MHz	3.84 MHz	-60 dBm
Ì	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
Ì	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
ļ	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
ł	$859 \text{ MHz} \le f \le 894 \text{ MHz}$	3.84 MHz	-60 dBm
}	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
Į.	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
		J.O 1 1VII 12	00 45111
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm

	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm**
V	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	729 MHz $\leq$ f $\leq$ 746 MHz	3.84 MHz	-60 dBm
	$746 \text{ MHz} \le f \le 756 \text{ MHz}$	3.84 MHz	-60 dBm
	$758 \text{ MHz} \le f \le 768 \text{ MHz}$	3.84 MHz	-60 dBm
	$859 \text{ MHz} \le f \le 869 \text{ MHz}$	1 MHz	-27 dBm
		3.84 MHz	-60 dBm
	869 MHz ≤ f ≤ 894 MHz		
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm**
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm
VI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f < 875 MHz	1 MHz	-37 dBm
	875 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
VII	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	758 MHz ≤ f ≤ 791 MHz	1 MHz	-50 dBm
	791 MHz $\leq$ f $\leq$ 821 MHz	3.84 MHz	-60 dBm
	$852 \text{ MHz} \le f \le 869 \text{ MHz}$	1 MHz	-50 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
		100 kHz	-67 dBm *
	925 MHz ≤ f ≤ 935 MHz	3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	$2110 \text{ MHz} \le f \le 2170 \text{ MHz}$	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	2590 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-50 dBm
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm
VIII		1 MHz	-50 dBm
VIII	703 MHz ≤ f ≤ 803 MHz		
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	860 MHz ≤ f ≤ 890 MHz	1 MHz	-37 dBm ****
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
	020 WH IZ = 1 = 000 WH IZ	3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	4475 0 1411 - 45 4 4540 0 1411	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm ****
	1805 MHz < f ≤ 1830 MHz	100 kHz 3.84 MHz	-71 dBm ** & * -60 dBm **
	1830 MHz < f ≤ 1880 MHz	100 kHz	-71 dBm *
	1000 IVII IZ < 1 ≥ 1000 IVII IZ	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤1915.7 MHz	300 kHz	-41 dBm ****
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm
	2570 MHz ≤ f ≤ 2640 MHz	3.84 MHz	-60 dBm
	2640 MHz < f ≤ 2690 MHz	3.84 MHz	-60 dBm **
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm **
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
IX	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
L	5 .5 <u></u>		

	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
Х	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	$859 \text{ MHz} \le f \le 894 \text{ MHz}$	3.84 MHz	-60 dBm
		1 MHz	-50 dBm
	1525 MHz ≤ f ≤ 1559 MHz	3.84 MHz	-60 dBm
	1930 MHz ≤ f ≤ 1995 MHz		
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm **
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
XI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
XII	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz $\leq$ f $\leq$ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
XIII	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
AIII		3.84 MHz	-60 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 756MHz		
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	763 MHz ≤ f ≤ 775 MHz	6.25 kHz	[TBD] dBm***
	793 MHz ≤ f ≤ 805 MHz	6.25 kHz	[TBD] dBm***
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm**
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
XIV	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	769 MHz ≤ f ≤ 775 MHz	6.25 kHz	[TBD] dBm ***
	799 MHz ≤ f ≤ 805 MHz	6.25 kHz	[TBD] dBm ***
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	LIVO IVII IL ZI Z LLUU IVII IL	1 1711 14	30 abiii

	_ <del>_</del>	<del>,</del>	<del>,</del>
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
XIX	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f < 875 MHz	1 MHz	-37 dBm
	875 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
XX	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
		3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm**
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
XXI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	1 MHz	-35 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤f ≤ 1915.7 MHz	300 kHz	-41 dBm
		3.84 MHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz		
VVII	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
XXII	758 MHz ≤ f ≤ 791 MHz	1 MHz	-50 dBm
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
		3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	1880 MHz ≤ f ≤ 1920 MHz	3.84 MHz	-60 dBm
	2010 MHz ≤ f ≤ 2025 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2300 MHz ≤ f ≤ 2400 MHz	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm
	3510 MHz ≤ f ≤ 3525 MHz	1 MHz	-40 dBm
	3525 MHz ≤ f ≤ 3590 MHz	1 MHz	-50 dBm
	3600 MHz ≤ f ≤ 3800 MHz	3.84 MHz	-50 dBm
XXV	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
7.0.1.	729 MHz $\leq$ f $\leq$ 746 MHz	3.84 MHz	-60 dBm
	$746 \text{ MHz} \le f \le 756 \text{ MHz}$	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
		1 MHz	-50 dBm
	852 MHz ≤ f ≤ 859 MHz		
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	3.84 MHz	-60 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
XXVI	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
-			

	768 MHz ≤ f ≤ 799 MHz	1 MHz	-50 dBm
	799 MHz ≤ f ≤ 803 MHz	1 MHz	-40 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2010 MHz ≤ f ≤ 2025 MHz	1 MHz	-50 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2300 MHz ≤ f ≤ 2400 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm **
	3400 MHz ≤ f ≤3800 MHz	1 MHz	-50 dBm
* * * * * * * * * * * * * * * * * * *			

- Note \* The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, up to five measurements with a level up to the applicable requirements defined in Table 6.12 are permitted for each UARFCN used in the measurement
- Note \*\* The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, measurements with a level up to the applicable requirements defined in Table 6.12 are permitted for each UARFCN used in the measurement due to 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> harmonic spurious emissions
- Note \*\*\* This requirement is applicable also for frequencies, which are between 2.5 MHz and 12.5 MHz away from the UE centre carrier frequency.
- Note \*\*\*\* This requirement is applicable only when transmission is made between 900MHz to 915MHz.
- Note \*\*\*\*\* This requirement is applicable only when transmission is made between 1744.9 MHz to 1784.9 MHz

### 6.6.3.1.1 Additional requirement with a guard band

These requirements are applicable only for frequencies which are greater than  $F_{\text{guard}}$  MHz away from the UE transmit carrier frequency.

Table 6.13a: Additional spurious emissions requirements with a guard band

Operating Band	Frequency Bandwidth	Measurement Bandwidth	Minimum requirement	Guard Band (F <sub>guard</sub> MHz)
XXVI	806 MHz ≤ f ≤ 813.5 MHz	6.25 kHz	-42 dBm	TBD
	806 MHz ≤ f ≤ 816 MHz	6.25 kHz	-42 dBm	TBD
	851 MHz ≤ f ≤ 859 MHz	1 MHz	-32 dBm	TBD
	851 MHz ≤ f ≤ 859 MHz	6.25 kHz	-53 dBm	TBD

### 6.6.3.1A Additional requirement for DC-HSUPA

The requirements in Table 6.12A are only applicable for frequencies, which are greater than 20 MHz away from the centre of the assigned carrier frequencies when dual adjacent carriers are assigned on the uplink.

Table 6.12A: General spurious emissions requirements for DC-HSUPA

Frequency Bandwidth	Measurement Bandwidth	Minimum requirement	Note
9 kHz ≤ f < 150 kHz	1 kHz	-36 dBm	
150 kHz ≤ f < 30 MHz	10 kHz	-36 dBm	
30 MHz ≤ f < 1000 MHz	100 kHz	-36 dBm	
1 GHz ≤ f < 12.75 GHz	1 MHz	-30 dBm	
12.75 GHz ≤ f < 5th harmonic of the upper frequency edge of the UL operating band in GHz	1 MHz	-30 dBm	Note 1
NOTE 1: Applies only for Band 2	KXII.		

The requirements in Table 6.13A are only applicable for frequencies, which are greater than 25 MHz away from the centre of the assigned frequencies when dual adjacent carriers are assigned on the uplink.

Table 6.13A: Additional spurious emissions requirements for DC-HSUPA

Operating Band	Frequency Bandwidth	Measurement Bandwidth	Minimum requirement
I	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
	0202 = 1 = 0002	3.84MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	1844.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-55 dBm
	1884.5 MHz <f< 1915.7="" mhz<="" td=""><td>300 kHz</td><td>-41 dBm</td></f<>	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm
	2570 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
ll l	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm
II	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 758 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2620 MHz	1 MHz	-50 dBm
III	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	852 MHz ≤ f ≤ 869 MHz	1 MHz	-50 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
	020 WH 12 21 2 000 WH 12	3.84 MHz	- 60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
		3.84 MHz	-60 dBm **
	$3510 \text{ MHz} \le f \le 3590 \text{ MHz}$	3.84 MHz	-50 dBm **
IV /	$3400 \text{ MHz} \le f \le 3800 \text{ MHz}$		
IV	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm
V	$717 \text{ MHz} \le f \le 728 \text{ MHz}$	1 MHz	-50 dBm
	, , , , , , , , , , , , , , , , , , ,		00 42111
V	703 MHz ≤ f ≤ 803 MHz	3.84 MHz	-50 dBm

		0.04.841.1	00 ID
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm
	859 MHz ≤ f ≤ 869 MHz	1 MHz	-27 dBm
	869 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
	-	3.84 MHz	-60 dBm
	1930 MHz ≤ f ≤ 1995 MHz		
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
	2496 MHz ≤ f ≤ 2620 MHz	1 MHz	-50 dBm **
VI	860 MHz ≤ f < 875 MHz	1 MHz	-37 dBm
	875 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1844.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
		300 kHz	-41 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz		
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
VII	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm
	758 MHz ≤ f ≤ 791 MHz	1 MHz	-50 dBm
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
	852 MHz ≤ f ≤ 869 MHz	1 MHz	-50 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	32   IVII 12 > 1 < 323   IVII 12		-67 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	
	205 MIL ( 1202 MIL	3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	2590 MHz ≤ f ≤ 2620 MHz	1 MHz	-37 dBm
VIII	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	7 00 1011 12 3 1 3 000 1011 12		
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm
		400 111	57 ID 4 444
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-57 dBm *, ***
	925 MHz ≤ f ≤ 935 MHz	3.84 MHz	-50 dBm
		3.84 MHz 100 kHz	-50 dBm -79 dBm *
	925 MHz ≤ f ≤ 935 MHz 935 MHz < f ≤ 960 MHz	3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm
	935 MHz < f ≤ 960 MHz	3.84 MHz 100 kHz 3.84 MHz 100 kHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & *
		3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm **
	935 MHz < f ≤ 960 MHz 1805 MHz < f ≤ 1830 MHz	3.84 MHz 100 kHz 3.84 MHz 100 kHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & *
	935 MHz < $f \le 960$ MHz 1805 MHz < $f \le 1830$ MHz 1830 MHz < $f \le 1880$ MHz	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -71 dBm *
	935 MHz < f ≤ 960 MHz 1805 MHz < f ≤ 1830 MHz	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm *
	935 MHz < $f \le 960$ MHz 1805 MHz < $f \le 1830$ MHz 1830 MHz < $f \le 1880$ MHz	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -71 dBm *
	$935 \text{ MHz} < f \le 960 \text{ MHz}$ $1805 \text{ MHz} < f \le 1830 \text{ MHz}$ $1830 \text{ MHz} < f \le 1880 \text{ MHz}$ $2110 \text{ MHz} \le f \le 2170 \text{ MHz}$ $2496 \text{ MHz} \le f \le 2570 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -71 dBm * -60 dBm -60 dBm
	$935 \text{ MHz} < f \le 960 \text{ MHz}$ $1805 \text{ MHz} < f \le 1830 \text{ MHz}$ $1830 \text{ MHz} < f \le 1880 \text{ MHz}$ $2110 \text{ MHz} \le f \le 2170 \text{ MHz}$ $2496 \text{ MHz} \le f \le 2570 \text{ MHz}$ $2570 \text{ MHz} \le f \le 2620 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm * -60 dBm -60 dBm -60 dBm -60 dBm
	$935 \text{ MHz} < f \le 960 \text{ MHz}$ $1805 \text{ MHz} < f \le 1830 \text{ MHz}$ $1830 \text{ MHz} < f \le 1880 \text{ MHz}$ $2110 \text{ MHz} \le f \le 2170 \text{ MHz}$ $2496 \text{ MHz} \le f \le 2570 \text{ MHz}$ $2570 \text{ MHz} \le f \le 2620 \text{ MHz}$ $2620 \text{ MHz} \le f \le 2640 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm
	$935 \text{ MHz} < f \le 960 \text{ MHz}$ $1805 \text{ MHz} < f \le 1830 \text{ MHz}$ $1830 \text{ MHz} < f \le 1880 \text{ MHz}$ $2110 \text{ MHz} \le f \le 2170 \text{ MHz}$ $2496 \text{ MHz} \le f \le 2570 \text{ MHz}$ $2570 \text{ MHz} \le f \le 2620 \text{ MHz}$ $2620 \text{ MHz} \le f \le 2640 \text{ MHz}$ $2640 \text{ MHz} < f \le 2690 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -60 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm
	$935 \text{ MHz} < f \le 960 \text{ MHz}$ $1805 \text{ MHz} < f \le 1830 \text{ MHz}$ $1830 \text{ MHz} < f \le 1880 \text{ MHz}$ $2110 \text{ MHz} \le f \le 2170 \text{ MHz}$ $2496 \text{ MHz} \le f \le 2570 \text{ MHz}$ $2570 \text{ MHz} \le f \le 2620 \text{ MHz}$ $2620 \text{ MHz} \le f \le 2640 \text{ MHz}$ $2640 \text{ MHz} < f \le 2690 \text{ MHz}$ $3510 \text{ MHz} \le f \le 3590 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -60 dBm **
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -50 dBm -60 dBm -50 dBm ** -50 dBm **
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -50 dBm -60 dBm -50 dBm ** -50 dBm **
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1884.5 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -41 dBm
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1884.5 \text{ MHz} \leq f \leq 2170 \text{ MHz}$	3.84 MHz  100 kHz 3.84 MHz  100 kHz 3.84 MHz  100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -60 dBm ** -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -60 dBm ** -60 dBm ** -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1884.5 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$	3.84 MHz  100 kHz 3.84 MHz  100 kHz 3.84 MHz  100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm ** -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -60 dBm
IX	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm ** -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2545 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 756 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1879.9 \text{ MHz}$ $1884.5 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2545 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 768 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 756 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2545 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $768 \text{ MHz} \leq f \leq 803 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $768 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $852 \text{ MHz} \leq f \leq 859 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm ** -50 dBm ** -50 dBm -60 dBm -50 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 890 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2545 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $768 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $852 \text{ MHz} \leq f \leq 859 \text{ MHz}$ $859 \text{ MHz} \leq f \leq 894 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -60 dBm ** -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$ $1805 \text{ MHz} < f \leq 1830 \text{ MHz}$ $1830 \text{ MHz} < f \leq 1880 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2496 \text{ MHz} \leq f \leq 2570 \text{ MHz}$ $2570 \text{ MHz} \leq f \leq 2620 \text{ MHz}$ $2620 \text{ MHz} \leq f \leq 2640 \text{ MHz}$ $2640 \text{ MHz} \leq f \leq 2690 \text{ MHz}$ $3510 \text{ MHz} \leq f \leq 3590 \text{ MHz}$ $3400 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $758 \text{ MHz} \leq f \leq 3800 \text{ MHz}$ $860 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1475.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1510.9 \text{ MHz}$ $1844.9 \text{ MHz} \leq f \leq 1915.7 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2170 \text{ MHz}$ $2110 \text{ MHz} \leq f \leq 2575 \text{ MHz}$ $717 \text{ MHz} \leq f \leq 728 \text{ MHz}$ $729 \text{ MHz} \leq f \leq 746 \text{ MHz}$ $746 \text{ MHz} \leq f \leq 768 \text{ MHz}$ $768 \text{ MHz} \leq f \leq 803 \text{ MHz}$ $852 \text{ MHz} \leq f \leq 859 \text{ MHz}$	3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 100 kHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz	-50 dBm -79 dBm * -60 dBm -71 dBm ** & * -60 dBm ** -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm ** -50 dBm ** -50 dBm ** -50 dBm -60 dBm -50 dBm -60 dBm -50 dBm -50 dBm

	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
XI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
	1844.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	$2545 \text{ MHz} \le f \le 2575 \text{ MHz}$	1 MHz	-50 dBm
XIX		1 MHz	-50 dBm
\\\	758 MHz ≤ f ≤ 803 MHz	1 MHz	-30 dBm
	860 MHz ≤ f < 875 MHz		
	875 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm
	$1475.9 \text{ MHz} \le f \le 1510.9 \text{ MHz}$	3.84 MHz	-60 dBm
	$1844.9 \text{ MHz} \le \text{f} \le 1879.9 \text{ MHz}$	3.84 MHz	-60 dBm
	1884.5 MHz ≤ f ≤ 1915.7 MHz	300 kHz	-41 dBm
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm
XX	811 MHz ≤ f ≤ 821 MHz	3.84 MHz	-50 dBm ***
	791 MHz ≤ f ≤ 811 MHz	3.84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
		100 kHz	-67 dBm *
	925 MHz ≤ f ≤ 935 MHz	3.84 MHz	-60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm **
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm **
XXII	$758 \text{ MHz} \le \text{f} \le 791 \text{ MHz}$	1 MHz	-50 dBm
AAII		3.84 MHz	-60 dBm
	791 MHz ≤ f ≤ 821 MHz	1 MHz	-50 dBm
	852 MHz ≤ f ≤ 869 MHz		
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm *
		100 kHz 3.84 MHz	-67 dBm * -60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz 3.84 MHz 100 kHz	-67 dBm * -60 dBm -79 dBm *
	935 MHz < f ≤ 960 MHz 1805 MHz ≤ f ≤ 1880 MHz	100 kHz 3.84 MHz 100 kHz 100 kHz	-67 dBm * -60 dBm -79 dBm * -71 dBm *
	935 MHz < f ≤ 960 MHz 1805 MHz ≤ f ≤ 1880 MHz 1880 MHz ≤ f ≤ 1920 MHz	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -40 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 1 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 766 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 1995 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 766 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 766 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 766 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 568 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 1995 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2180 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 766 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 1995 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2496 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 1995 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2180 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 3400 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -50 dBm -50 dBm
XXV	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2496 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 3400 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2496 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 3400 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz 1 MHz 3.84 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm
	$\begin{array}{c} 935 \text{ MHz} < f \leq 960 \text{ MHz} \\ 1805 \text{ MHz} \leq f \leq 1880 \text{ MHz} \\ 1880 \text{ MHz} \leq f \leq 1920 \text{ MHz} \\ 2010 \text{ MHz} \leq f \leq 2025 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2300 \text{ MHz} \leq f \leq 2400 \text{ MHz} \\ 2620 \text{ MHz} \leq f \leq 2690 \text{ MHz} \\ 2570 \text{ MHz} \leq f \leq 2620 \text{ MHz} \\ 3510 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3525 \text{ MHz} \leq f \leq 3525 \text{ MHz} \\ 3600 \text{ MHz} \leq f \leq 3590 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 729 \text{ MHz} \leq f \leq 746 \text{ MHz} \\ 746 \text{ MHz} \leq f \leq 756 \text{ MHz} \\ 758 \text{ MHz} \leq f \leq 768 \text{ MHz} \\ 852 \text{ MHz} \leq f \leq 859 \text{ MHz} \\ 859 \text{ MHz} \leq f \leq 894 \text{ MHz} \\ 1525 \text{ MHz} \leq f \leq 1559 \text{ MHz} \\ 1930 \text{ MHz} \leq f \leq 2170 \text{ MHz} \\ 2110 \text{ MHz} \leq f \leq 2200 \text{ MHz} \\ 2496 \text{ MHz} \leq f \leq 3800 \text{ MHz} \\ 3400 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ 717 \text{ MHz} \leq f \leq 728 \text{ MHz} \\ \end{array}$	100 kHz 3.84 MHz 100 kHz 100 kHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 1 MHz 3.84 MHz 3.84 MHz 1 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 3.84 MHz 1 MHz 1 MHz 3.84 MHz 1 MHz	-67 dBm * -60 dBm -79 dBm * -71 dBm * -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm -50 dBm -60 dBm -60 dBm -60 dBm -50 dBm -60 dBm -60 dBm -60 dBm -60 dBm -60 dBm -50 dBm -50 dBm -50 dBm -50 dBm

		859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm
		1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm
		1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm
		1844.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm
		1884.5 MHz ≤f ≤ 1915.7 MHz	300 kHz	-41 dBm
		1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm
		2010 MHz ≤ f ≤ 2025 MHz	1 MHz	-50 dBm
		2110 MHz $\leq$ f $\leq$ 2170 MHz	3.84 MHz	-60 dBm
		2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm
		2300 MHz ≤ f ≤ 2400 MHz	1 MHz	-50 dBm
		2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm **
		3400 MHz ≤ f ≤3800 MHz	1 MHz	-50 dBm
Note *				
	exceptions, up to five measurements with a level up to the applicable requirements			
	defined in Table 6.12 are permitted for each UARFCN used in the measurement			
Note **	- · · · · · · · · · · · · · · · · · · ·			
	exceptions, measurements with a level up to the applicable requirements defined in Table			
	6.12 are permitted for each UARFCN used in the measurement due to 2 <sup>nd</sup> , 3 <sup>rd</sup> and 4 <sup>th</sup>			
	harmonic spurious emissions			
Note ***	This requ	irement is applicable also for freque	encies, which are between	en 5 MHz and 25 MHz
	away from the UE centre carrier frequency.			

### 6.6.3.1A.1 Additional requirement with a guard band for DC-HSUPA

These requirements are applicable only for frequencies which are greater than  $F_{guard}$  MHz away from the UE transmit center carrier frequency.

Table 6.13B: Additional spurious emissions requirements with a guard band

Operating Band	Frequency Bandwidth	Measurement Bandwidth	Minimum requirement	Guard Band (F <sub>guard</sub> MHz)
XXVI	806 MHz ≤ f ≤ 813.5 MHz	6.25 kHz	-42 dBm	TBD
	806 MHz ≤ f ≤ 816 MHz	6.25 kHz	-42 dBm	TBD
	851 MHz ≤ f ≤ 859 MHz	1 MHz	-32 dBm	TBD
	851 MHz ≤ f ≤ 859 MHz	6.25 kHz	-53 dBm	TBD

### 6.6.3.1B Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the requirements specified in sub-clause 6.6.3.1 apply at each transmit antenna connector.

## 6.6.3.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the spectrum emission requirements specified in sub-clause 6.6.3.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the spectrum emission requirements in subclause 6.6.3.1 apply at the active transmit antenna connector.

### 6.6.3.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the spectrum emission requirements specified in sub-clause 6.6.3.1 apply at each transmit antenna connector.

## 6.7 Transmit intermodulation

The transmit intermodulation performance is a measure of the capability of the transmitter to inhibit the generation of signals in its non linear elements caused by presence of the wanted signal and an interfering signal reaching the transmitter via the antenna.

## 6.7.1 Minimum requirement

User Equipment(s) transmitting in close vicinity of each other can produce intermodulation products, which can fall into the UE, or Node B receive band as an unwanted interfering signal. The UE intermodulation attenuation is defined by the ratio of the RRC filtered mean power of the wanted signal to the RRC filtered mean power of the intermodulation product when an interfering CW signal is added at a level below the wanted signal.

The requirement of transmitting intermodulation for a carrier spacing of 5 MHz is prescribed in Table 6.14.

**Table 6.14: Transmit Intermodulation** 

Interference Signal Frequency Offset	5MHz	10MHz
Interference CW Signal Level	-4	0dBc
Intermodulation Product	-31dBc	-41dBc

## 6.7.1A Additional requirement for DC-HSUPA

The UE intermodulation attenuation is defined by the ratio of the sum of the RRC filtered mean powers of the wanted signal on the assigned carriers to the sum of the RRC filtered mean powers of the intermodulation product on two adjacent carriers when an interfering CW signal is added at a level below the wanted signal.

The requirement of transmitting intermodulation for a carrier spacing of 5 MHz is prescribed in Table 6.14A.

Table 6.14A: Transmit Intermodulation requirement for DC-HSUPA

Interference Signal Frequency Offset	10MHz	20MHz
Interference CW Signal Level	-4	0dBc
Intermodulation Product	-31dBc	-41dBc

## 6.7.1B Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the requirements specified in sub-clause 6.7.1 apply at each transmit antenna connector.

# 6.7.1C Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the requirements specified in subclause 6.7.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the requirements specified in sub-clause 6.7.1 apply at the active transmit antenna connector.

# 6.7.1D Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the requirements specified in sub-clause 6.7.1 apply at each transmit antenna connector.

### 6.8 Transmit modulation

Transmit modulation defines the modulation quality for expected in-channel RF transmissions from the UE. The requirements apply to all transmissions including the PRACH pre-amble and message parts and all other expected transmissions. In cases where the mean power of the RF signal is allowed to change versus time e.g. PRACH, DPCH in compressed mode, change of TFC, inner loop power control and for HSDPA transmissions with non-constant HS-DPCCH code power, the EVM, Peak Code Domain Error and E-DCH Code Domain Error requirements do not apply during the 25 us period before and after the nominal time when the mean power is expected to change.

## 6.8.1 Transmit pulse shape filter

The transmit pulse shaping filter is a root-raised cosine (RRC) with roll-off  $\alpha$  =0.22 in the frequency domain. The impulse response of the chip impulse filter  $RC_0(t)$  is:

$$RC_0(t) = \frac{\sin\left(\pi \frac{t}{T_c} (1 - \alpha)\right) + 4\alpha \frac{t}{T_c} \cos\left(\pi \frac{t}{T_c} (1 + \alpha)\right)}{\pi \frac{t}{T_c} \left(1 - \left(4\alpha \frac{t}{T_c}\right)^2\right)}$$

Where the roll-off factor  $\alpha = 0.22$  and the chip duration is

$$T = \frac{1}{chiprate} \approx 0.26042 \ \mu s$$

## 6.8.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the transmit pulse shape filter requirements specified in sub-clause 6.8.1 apply at each transmit antenna connector.

## 6.8.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the transmit pulse shape filter requirements specified in sub-clause 6.8.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the transmit pulse shape filter requirements specified in sub-clause 6.8.1 apply at the active transmit antenna connector.

## 6.8.1C Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the transmit pulse shape filter requirements specified in sub-clause 6.8.1 apply at each transmit antenna connector.

# 6.8.2 Error Vector Magnitude

The Error Vector Magnitude is a measure of the difference between the reference waveform and the measured waveform. This difference is called the error vector. Both waveforms pass through a matched Root Raised Cosine filter with bandwidth 3,84 MHz and roll-off  $\alpha$ =0,22. Both waveforms are then further modified by selecting the frequency, absolute phase, absolute amplitude and chip clock timing so as to minimise the error vector. The EVM result is defined as the square root of the ratio of the mean error vector power to the mean reference power expressed as a %. The measurement interval is one timeslot except when the mean power between slots is expected to change whereupon the measurement interval is reduced by 25  $\mu$ s at each end of the slot. For the PRACH preamble the measurement interval is 4096 chips less 25  $\mu$ s at each end of the burst (3904 chips).

When the UE uses 16QAM modulation on any of the uplink code channels in a carrier, the error minimization step also includes selecting an IQ origin offset besides selecting the frequency, absolute phase, absolute amplitude and chip clock timing to minimise the error vector. The IQ origin offset shall be removed from the evaluated signal before calculating the EVM; however, the removed relative IQ origin offset power (relative carrier leakage power) also has to satisfy the applicable requirement.

For signals containing more than one spreading code in a carrier where the slot alignment of the codes is not the same and the code power is varying, the period over which the nominal mean power in that carrier remains constant can be less than one timeslot. For such time-varying signals it is not possible to define EVM across one timeslot since this interval contains an expected change in mean power, and the exact timing and trajectory of the power change is not defined. For these signals, the EVM minimum requirements apply only for intervals of at least one half timeslot (less any 25 us transient periods) during which the nominal code power of each individual code is constant.

NOTE: The reason for setting a lower limit for the EVM measurement interval is that for any given impaired signal, the EVM would be expected to improve for measurement intervals less than one timeslot while the frequency error would be expected to degrade.

### 6.8.2.1 Minimum requirement

When 16QAM modulation is not used on any of the uplink code channels, the Error Vector Magnitude shall not exceed 17.5 % for the parameters specified in Table 6.15.

When 16QAM modulation is used on any of the uplink code channels, the modulation accuracy requirement shall meet one or both of the following requirements:

- 1. The Error Vector Magnitude does not exceed 14 % for the parameters specified in Table 6.15.
- 2. The Relative Code Domain Error requirements specified in 6.8.3a are met.

The requirements are applicable for all values of  $\beta_c$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8].

Table 6.15: Parameters for Error Vector Magnitude/Peak Code Domain Error

Par	ameter	Unit	Level
UE Output Power, no 16QAM		dBm	≥ -20
UE Output Power, 16QAM		dBm	≥ -30
Operating conditions			Normal conditions
Power control step size		dB	1
Measurement	PRACH		3904
period (Note 1)	Any DPCH	Chips	From 1280 to 2560 (Note 2)
Note 1: Less any 25µs transient periods			
Note 2: The longest period over which the nominal power remains constant			

When 16QAM modulation is used on any of the uplink code channels, the relative carrier leakage power (IQ origin offset power) shall not exceed the values specified in Table 6.15a

Table 6.15a: Relative Carrier Leakage Power

UE Transmitted Mean Power	Relative Carrier Leakage Power (dB)
P ≥ -30 dBm	< -17

## 6.8.2.1A Additional requirement for DC-HSUPA

When 16QAM modulation is not used on any of the uplink code channels in a carrier, the Error Vector Magnitude in that carrier shall not exceed 17.5 % for the parameters specified in Table 6.15AA.

When 16QAM modulation is used on any of the uplink code channels in a carrier, the modulation accuracy requirement shall meet one or both of the following requirements:

- 1. The Error Vector Magnitude does not exceed 14 % for the parameters specified in Table 6.15AA.
- 2. The Relative Code Domain Error requirements specified in 6.8.3a are met.

The requirements are applicable for all values of  $\beta_c$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8], when the total power in each of the assigned carriers is equal to each other. The reference measurement channels for the requirements in subclause 6.8.2.1A are provided in subclause A.2.6 and A.2.7.

Table 6.15AA: Parameters for Error Vector Magnitude for DC-HSUPA

Parameter	Unit	Level
UE Output Power, no 16QAM	dBm	≥ -20
UE Output Power, 16QAM	dBm	≥ -30
Operating conditions		Normal conditions
Power control step size	dB	1

## 6.8.2.1B Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the EVM requirements specified in subclause 6.8.2.1 except the requirement with PRACH apply at each transmit antenna connector.

#### 6.8.2.1C Additional requirement for UL CLTD

When 16QAM modulation is not used on any of the uplink code channels, the Error Vector Magnitude shall not exceed 17.5 % for the parameters specified in Table 6.15AB at each transmit antenna connector.

When 16QAM modulation is used on any of the uplink code channels, the modulation accuracy requirement shall meet one or both of the following requirements:

- 1. The Error Vector Magnitude does not exceed 14 % for the parameters specified in Table 6.15AB at each transmit antenna connector.
- 2. The Relative Code Domain Error requirements specified in 6.8.3a are met at each transmit antenna connector.

The requirements are applicable for all values of  $\beta_c$ ,  $\beta_{sc}$ ,  $\beta_d$ ,  $\beta_{hs}$ ,  $\beta_{ec}$  and  $\beta_{ed}$  as specified in [8].

Table 6.15AB: Parameters for Error Vector Magnitude for UL CLTD

Parame	ter	Unit	Level
UE Output Power, no	16QAM	dBm	≥ -20
UE Output Power, 16	QAM	dBm	≥ -30
Operating conditions			Normal conditions
Power control step size	ze	dB	1
Measurement period (Note 1)	Any DPCH	Chips From 1280 to 2560 (Note 2)	
Note 1: Less any 25µs transient periods Note 2: The longest period over which the nominal power remains constant			

When 16QAM modulation is used on any of the uplink code channels, the relative carrier leakage power (IQ origin offset power) shall not exceed the values specified in Table 6.15a at each transmit antenna connector

#### 6.8.2.1D Additional requirement for UL MIMO

When 16QAM modulation is not used on any of the uplink code channels, the Error Vector Magnitude shall not exceed 17.5 % for the parameters specified in Table 6.15AC at each transmit antenna connector.

When 16QAM modulation is used on any of the uplink code channels, the modulation accuracy requirement shall meet one or both of the following requirements:

- 1. The Error Vector Magnitude does not exceed 14 % for the parameters specified in Table 6.15AC.
- 2. The Relative Code Domain Error requirements specified in 6.8.3a are met.

The requirements are applicable for all values of  $\beta_c$ ,  $\beta_{sc}$ ,  $\beta_{hs}$ ,  $\beta_{ec}$ ,  $\beta_{sec}$ ,  $\beta_{ed}$  and  $\beta_{sed}$  as specified in [8].

Table 6.15AC: Parameters for Error Vector Magnitude for UL MIMO

Parameter	Unit	Level
UE Output Power, no 16QAM	dBm	≥ -20
UE Output Power, 16QAM	dBm	≥ -30
Operating conditions		Normal conditions
Power control step size	dB	1

When 16QAM modulation is used on any of the uplink code channels, the relative carrier leakage power (IQ origin offset power) shall not exceed the values specified in Table 6.15a at each transmit antenna connector.

#### 6.8.3 Peak code domain error

The Peak Code Domain Error is computed by projecting power of the error vector (as defined in 6.8.2) onto the code domain at a specific spreading factor. The Code Domain Error for every code in the domain is defined as the ratio of the mean power of the projection onto that code, to the mean power of the composite reference waveform. This ratio is expressed in dB. The Peak Code Domain Error is defined as the maximum value for the Code Domain Error for all codes. The measurement interval is one timeslot except when the mean power between slots is expected to change whereupon the measurement interval is reduced by  $25 \,\mu s$  at each end of the slot.

The requirement for peak code domain error is only applicable for multi-code DPDCH transmission and therefore does not apply for the PRACH preamble and message parts.

#### 6.8.3.1 Minimum requirement

The peak code domain error shall not exceed -15 dB at spreading factor 4 for the parameters specified in Table 6.15. The requirements are defined using the UL reference measurement channel specified in subclause A.2.5.

#### 6.8.3.1A Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the Peak code domain error requirements specified in sub-clause 6.8.3.1 apply at each transmit antenna connector.

### 6.8.3.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the peak code domain error shall not exceed -15 dB at spreading factor 4 for the parameters specified in Table 6.15. The requirements are defined using the UL reference measurement channel specified in subclause A.2.5A.

For UE configured in UL CLTD activation state 2 or activation state 3, the Peak code domain error requirements specified in sub-clause 6.8.3.1 apply at the active transmit antenna connector.

#### 6.8.3a Relative code domain error

#### 6.8.3a.1 Relative Code Domain Error

The Relative Code Domain Error is computed by projecting the error vector (as defined in 6.8.2) onto the code domain. Only the code channels with non-zero betas in the composite reference waveform are considered for this requirement. The Relative Code Domain Error for every non-zero beta code in the domain is defined as the ratio of the mean power of the projection onto that non-zero beta code, to the mean power of the non-zero beta code in the composite reference waveform. This ratio is expressed in dB. The measurement interval is one timeslot except when the mean power between slots is expected to change whereupon the measurement interval is reduced by 25  $\mu$ s at each end of the slot.

In the mode of DC-HSUPA, the requirement and corresponding measurements apply to each individual carrier when the total power in each of the assigned carriers is equal to each other.

The Relative Code Domain Error is affected by both the spreading factor and beta value of the various code channels in the domain. The Effective Code Domain Power (ECDP) is defined to capture both considerations into one parameter. It uses the Nominal CDP ratio (as defined in 6.2.3), and is defined as follows for each used code, k, in the domain:

 $ECDP_k = (Nominal\ CDP\ ratio)_k + 10*log10(SF_k/256)$ 

When 16QAM is not used on any of the UL code channels in a carrier, the requirements for Relative Code Domain Error are not applicable when either or both the following channel combinations occur:

- when the ECDP of any code channel is < -30dB
- when the nominal code domain power of any code channel is < -20 dB

When 16QAM is used on any of the UL code channels in a carrier, the requirements for Relative Code Domain Error are not applicable when either or both the following channel combinations occur:

- when the ECDP of any code channel is < -30dB
- when the nominal code domain power of any code channel is < -30 dB

The requirement for Relative Code Domain Error also does not apply for the PRACH preamble and message parts.

#### 6.8.3a.1.1 Minimum requirement

When 16QAM is not used on any of the UL code channels, the Relative Code Domain Error shall meet the requirements in Table 6.15B for the parameters specified in Table 6.15

Table 6.15B: Relative Code Domain Error minimum requirement

ECDP dB	Relative Code Domain Error dB
-21 < ECDP	≤ -16
-30 ≤ ECDP ≤ -21	≤ -37 – ECDP
ECDP < -30	No requirement

When 16QAM is used on any of the UL code channels, the Relative Code Domain Error of the codes not using 16QAM shall meet the requirements in Table 6.15C for the parameters specified in Table 6.15.

Table 6.15C: Relative Code Domain Error minimum requirement

ECDP dB	Relative Code Domain Error dB
-22 < ECDP	≤ -18
-30 ≤ ECDP ≤ -22	≤ -40 – ECDP
ECDP < -30	No requirement

When 16QAM is used on any of the UL code channels, the Nominal CDP Ratio-weighted average of the Relative Code Domain Errors measured individually on each of the codes using 16QAM shall meet the requirements in Table 6.15D for the parameters specified in Table 6.15. The Nominal CDP Ratio-weighted average of the Relative Code Domain Errors means the sum  $\sum_{k} 10^{(\text{Nominal CDP ratio})_k/10} \cdot 10^{(\text{Relative Code Domain Error})_k/10} \text{ over all code k that uses 16QAM}.$ 

For the purposes of evaluating the requirements specified in Table 6.15D, the ECDP value is determined as the minimum of the individual ECDP values corresponding to the codes using 16QAM.

Table 6.15D: Relative Code Domain Error minimum requirement

ECDP dBAverage Relative CodeDomain Error dB-25.5 < ECDP</td> $\leq$  -18-30  $\leq$  ECDP  $\leq$  -25.5 $\leq$  -43.5 - ECDPECDP < -30No requirement

#### 6.8.3a.1.1a Additional requirement for DC-HSUPA

When 16QAM is not used on any of the UL code channels in a carrier, the Relative Code Domain Error in that carrier shall meet the requirements in Table 6.15B for the parameters specified in Table 6.15AA.

When 16QAM is used on any of the UL code channels in a carrier, the Relative Code Domain Error of the codes not using 16QAM in that carrier shall meet the requirements in Table 6.15C for the parameters specified in Table 6.15AA.

When 16QAM is used on any of the UL code channels in a carrier, the Nominal CDP Ratio-weighted average of the Relative Code Domain Errors measured individually on each of the codes using 16QAM in that carrier shall meet the requirements in Table 6.15D for the parameters specified in Table 6.15AA.

For the purposes of evaluating the requirements specified in Table 6.15D, the ECDP value is determined as the minimum of the individual ECDP values corresponding to the codes using 16QAM.

The reference measurement channels for the requirements in subclause 6.8.3a.1.1a are provided in subclause A.2.6 and A.2.7.

#### 6.8.3a.1.1b Additional requirement for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the relative code domain error requirements specified in sub-clause 6.8.3a.1.1 apply at each transmit antenna connector.

#### 6.8.3a.1.1c Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the relative code domain error requirements specified in sub-clause 6.8.3a.1.1 apply at each transmit antenna connector.

For UE configured in UL CLTD activation state 2 or activation state 3, the relative code domain error requirements specified in sub-clause 6.8.3a.1.1 apply at the active transmit antenna connector.

#### 6.8.3a.1.1d Additional requirement for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the relative code domain error requirements specified in sub-clause 6.8.3a.1.1 apply at each transmit antenna connector.

### 6.8.3b In-band emission for DC-HSUPA

The in-band emission is measured as the ratio of the UE output power in one carrier in dual cells to the UE output power in the other carrier, where the power in the former carrier shall be set to the minimum output power and the power in the latter carrier to the maximum output power. The reference measurement channel for the requirements in subclause 6.8.3b.1 is provided in subclause A.2.6 with an adjusted power imbalance to set the power in one carrier to the minimum output power and the power in the other carrier to the maximum output power. The basic in-band emission measurement interval is defined over one slot in the time domain.

#### 6.8.3b.1 Minimum requirement for DC-HSUPA

The in-band emission shall not exceed the value specified in Table 6.15E.

Table 6.15E: In-band emission minimum requirements for DC-HSUPA

	Parameter Description	Unit	Limit
	In-band emission	dBc	-24
Note :	The measurement bandwidth is 3 and the limit is expressed as a ra transmitting at minimum output pother carrier, transmitting at maximum.	tio of RRC filtered mean ower, to the RRC filtered	power in one carrier,

## 6.8.4 Phase discontinuity for uplink DPCH

Phase discontinuity is the change in phase between any two adjacent timeslots. The EVM for each timeslot (excluding the transient periods of  $25~\mu s$  on either side of the nominal timeslot boundaries), shall be measured according to subclause 6.8.2. The frequency, absolute phase, absolute amplitude and chip clock timing used to minimise the error vector are chosen independently for each timeslot. The phase discontinuity result is defined as the difference between the absolute phase used to calculate EVM for the preceding timeslot, and the absolute phase used to calculate EVM for the succeeding timeslot.

#### 6.8.4.1 Minimum requirement

The rate of occurrence of any phase discontinuity on an uplink DPCH for the parameters specified in table 6.16 shall not exceed the values specified in table 6.17. Phase shifts that are caused by changes of the UL transport format combination (TFC), compressed mode and HS-DPCCH are not included. When calculating the phase discontinuity, the requirements for frequency error and EVM in subclauses 6.3 and 6.8.2 for each timeslot shall be met.

Table 6.16: Parameters for Phase discontinuity

Parameter	Unit	Level
Power control step size	dB	1

Table 6.17: Phase discontinuity minimum requirement

Phase discontinuity Δθ in degrees	Maximum allowed rate of occurrence in Hz
$\Delta\theta \leq 30$	1500
$30 < \Delta\theta \le 60$	300
Δθ > 60	0

## 6.8.4.1A Additional requirement for UL OLTD

For UE with two transmit antenna connectors in UL OLTD operation, the rate of occurrence of any phase discontinuity on an uplink DPCH for the parameters specified in table 6.16 shall not exceed the values specified in table 6.17 for each transmit antenna connector. In addition, the relative phase applied to the two transmit paths shall be fixed during the phase discontinuity test. Phase shifts that are caused by changes of the UL transport format combination (TFC), compressed mode and HS-DPCCH are not included. When calculating the phase discontinuity, the requirements for frequency error and EVM in subclauses 6.3B and 6.8.2 for each timeslot shall be met.

#### 6.8.4.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the rate of occurrence of any phase discontinuity on an uplink DPCH for the parameters specified in table 6.16 shall not exceed the values specified in table 6.17 for each transmit antenna connector. In addition, TPI applied to the two transmit paths shall be fixed during the phase discontinuity test. Phase shifts that are caused by changes of the UL transport format combination (TFC), compressed mode and HS-DPCCH are not included. When calculating the phase discontinuity, the requirements for frequency error and EVM in subclauses 6.3C and 6.8.2 for each timeslot shall be met.

For UE configured in UL CLTD activation state 2 or activation state 3, the phase discontinuity for Uplink DPCH specified in sub-clause 6.8.4.1 applies at the active transmit antenna connector.

# 6.8.5 Phase discontinuity for HS-DPCCH

Phase discontinuity for HS-DPCCH is the change in phase due to the transmission of the HS-DPCCH. In the case where the HS-DPCCH timeslot is offset from the DPCCH timeslot, the period of evaluation of the phase discontinuity shall be the DPCCH timeslot that contains the HS-DPCCH slot boundary. The phase discontinuity for HS-DPCCH result is defined as the difference between the absolute phase used to calculate the EVM for that part of the DPCCH timeslot prior to the HS-DPCCH slot boundary, and the absolute phase used to calculate the EVM for remaining part of the DPCCH timeslot following the HS-DPCCH slot boundary. In all cases the subslot EVM is measured excluding the transient periods of  $25~\mu s$ .

Since subslot EVM is only defined for intervals of at least one half timeslot, the phase discontinuity for HS-DPCCH is only defined for non-aligned timeslots when the offset is 0.5 slots.

#### 6.8.5.1 Minimum requirement

The phase discontinuity for HS-DPCCH shall not exceed the value specified in table 6.18 90% of the time. When calculating the phase discontinuity, the requirements for frequency error and EVM in sub clauses 6.3 and 6.8.2, respectively shall be met.

Table 6.18: Phase discontinuity minimum requirement for HS-DPCCH at HS-DPCCH slot boundary

Phase discontinuity for HS-DPCCH Δθ in	$\Delta\theta \le 30$
degrees	

## 6.8.5.1A Additional requirement for UL OLTD

For UE with two transmit antenna connectors in UL OLTD operation, the phase discontinuity for HS-DPCCH shall not exceed the value specified in table 6.18 90% of the time for each transmit antenna connector. In addition, the relative phase applied to the two transmit paths shall be fixed during the phase discontinuity test. When calculating the phase discontinuity, the requirements for frequency error and EVM in sub clauses 6.3B and 6.8.2, respectively shall be met.

#### 6.8.5.1B Additional requirement for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the phase discontinuity for HS-DPCCH shall not exceed the value specified in table 6.18 90% of the time for each transmit antenna connector. In addition, TPI applied to the two transmit paths shall be fixed during the phase discontinuity test. When calculating the phase discontinuity, the requirements for frequency error and EVM in sub clauses 6.3C and 6.8.2, respectively shall be met.

For UE configured in UL CLTD activation state 2 or activation state 3, the phase discontinuity for HS-DPCCH specified in sub-clause 6.8.5.1 applies at the active transmit antenna connector.

## 6.8.6 Phase discontinuity for E-DCH

Phase discontinuity for E-DCH is the change in phase due to the transmission of DPCCH, HS-DPCCH, E-DPCCH and E-DCH with the combined transmit power profile as defined in Table 6.19. The phase discontinuity for E-DCH result is defined as the difference between the absolute phase used to calculate the EVM for the preceding timeslot, and the absolute phase used to calculate the EVM for the succeeding timeslot.

Table 6.19 Transmit power profile for E-DCH phase discontinuity test

Slot Number	$\left(rac{oldsymbol{eta}_{ec}}{oldsymbol{eta}_c} ight)$	$\left(rac{oldsymbol{eta}_{ed}}{oldsymbol{eta}_c} ight)$	$\left(rac{oldsymbol{eta}_{hs}}{oldsymbol{eta}_c} ight)$
1	19/15	21/15	DTX
2	19/15	21/15	24/15
3	19/15	21/15	24/15
4	19/15	42/15	30/15
5	19/15	42/15	DTX
6	19/15	42/15	DTX
7	19/15	60/15	DTX
8	19/15	60/15	24/15
9	19/15	60/15	24/15
10	19/15	30/15	DTX
11	19/15	30/15	DTX
12	19/15	30/15	DTX
13	19/15	21/15	30/15
14	19/15	21/15	24/15
15	19/15	21/15	24/15
16	19/15	30/15	DTX
17	19/15	30/15	DTX
18	19/15	30/15	DTX
19	19/15	21/15	
20	19/15	21/15	
21	19/15	21/15	
22	19/15	42/15	
23	19/15	42/15	
24	19/15	42/15	

Note 1: E-DCH power profile has a period of 24 slots and will be repeated every 24 slots.

Note 2: HS-DPCCH power profile has a period of 18 slots and will be repeated every 18 slots.

Note 3: The total combined power profile has a period of 72 slots and will be repeated every 72 slots.

Note 4: Power control will be turned off so that DPCCH power is kept constant for a specific run of the test.

## 6.8.6.1 Minimum requirement

When transmitting according to the power profile specified in Table 6.19, the phase discontinuity for E-DCH shall not exceed the value specified in table 6.20 for the specified amount of time in table 6.20. The requirement applies for the range of DPCCH powers according to table 6.20. When calculating the phase discontinuity, the requirements for frequency error and EVM in sub clauses 6.3 and 6.8.2, respectively shall be met.

Table 6.20: Phase discontinuity minimum requirement for E-DCH

Phase discontinuity Δθ	Minimum allowed time	DPCCH power in dBm
in degrees	in percentage	
Δθ ≤ 15	80	
$\Delta\theta \leq 35$	90	-15 ≤ DPCCH power ≤ $(P_{max}$ -20)
$\Delta\theta \le 45$	100	

#### 6.8.6.1A Additional requirement for UL OLTD

For UE with two transmit antenna connectors in UL OLTD operation, when transmitting according to the power profile specified in Table 6.19, the phase discontinuity for E-DCH shall not exceed the value specified in table 6.20 for the specified amount of time in table 6.20 for each transmit antenna connector. The requirement applies for the range of DPCCH powers according to table 6.20. In addition, the relative phase applied to the two transmit paths shall be fixed

during the phase discontinuity test. When calculating the phase discontinuity, the requirements for frequency error and EVM in sub clauses 6.3B and 6.8.2, respectively shall be met.

#### 6.8.6.1B Additional requirement for UL CLTD

For UE configured in UL CLTD activation state 2 or activation state 3, the phase discontinuity for E-DCH specified in sub-clause 6.8.6.1 applies at the active transmit antenna connector.

## 6.8.7 Time alignment error for DC-HSUPA

In DC-HSUPA transmission, signals are transmitted for dual cells. These signals shall be aligned. The time alignment error in DC-HSUPA transmission is specified as the delay between the signals from primary and secondary uplink frequencies at the antenna port.

### 6.8.7.1 Minimum requirement

The time alignment error shall not exceed ¾ Tc.

## 6.8.7A Time alignment error for UL OLTD

For UE with two active transmit antenna connectors in UL OLTD operation, the signals transmitted in the two antenna connectors shall be aligned. The time alignment error in UL OLTD operation transmission is specified as the delay between the signals from two antenna connectors.

#### 6.8.7A.1 Minimum requirement

The time alignment error shall not exceed 0.4Tc.

## 6.8.7B Time alignment error for UL CLTD

For UE with two active transmit antenna connectors in UL CLTD activation state 1, the signals transmitted in the two antenna connectors shall be aligned. The time alignment error in UL CLTD activation state 1 transmission is specified as the delay between the signals from two antenna connectors.

#### 6.8.7B.1 Minimum requirement

The time alignment error shall not exceed 0.4Tc.

# 6.8.7C Time alignment error for UL MIMO

For UE with two active transmit antenna connectors in UL MIMO operation, the signals transmitted in the two antenna connectors shall be aligned. The time alignment error in UL MIMO transmission is specified as the delay between the signals from two antenna connectors.

#### 6.8.7C.1 Minimum requirement

The time alignment error shall not exceed 0.4Tc.

# 7 Receiver characteristics

## 7.1 General

Unless otherwise stated the receiver characteristics are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UEs

with more than one receiver antenna connector the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective sections below.

The UE antenna performance has a significant impact on system performance, and minimum requirements on the antenna efficiency are therefore intended to be included in future versions of the present document. It is recognised that different requirements and test methods are likely to be required for the different types of UE.

UEs supporting DC-HSDPA, regardless of MIMO configuration, shall support both minimum requirements, as well as additional requirements for DC-HSDPA.

UEs supporting DB-DC-HSDPA shall support both minimum requirements as well as additional requirements for DB-DC-HSDPA.

UEs supporting DC-HSUPA shall support both minimum requirements, as well as additional requirements for DC-HSUPA.

UEs supporting single band 4C-HSDPA shall support minimum requirements, additional requirements for DC-HSDPA as well as additional requirements for single band 4C-HSDPA.

UEs supporting dual band 4C-HSDPA shall support minimum requirements, additional requirements for DC-HSDPA, additional requirements for DB-DC-HSDPA as well as additional requirements for dual band 4C-HSDPA.

UEs supporting single band 8C-HSDPA shall support minimum requirements, additional requirements for DC-HSDPA and single band 4C-HSDPA as well as additional requirements for single band 8C-HSDPA.

UEs supporting single band NC-4C-HSDPA shall support minimum requirements, additional requirements for DC-HSDPA as well as additional requirements for NC-4C-HSDPA.

For minimum requirements, all the parameters in clause 7 are defined using the DL reference measurement channel (12.2 kbps) specified in subclause A.3.1 and unless otherwise stated with DL power control OFF.

For the additional requirements for DC-HSDPA, DB-DC-HSDPA, DC-HSUPA, single band/dual band 4C-HSDPA or single band 8C-HSDPA or single band NC-4C-HSDPA, all the parameters in clause 7 are defined using the DL reference measurement channel H-Set 12, specified in subclause A.7.1.12 and the downlink physical channel setup according to table C.12C.

For the additional requirements for DC-HSDPA, the spacing of the carrier frequencies of the two cells in downlink shall be 5 MHz, and it is assumed that the UE is configured with a single uplink carrier frequency.

For the additional requirements for DC-HSUPA, the spacing of the carrier frequencies of the two cells in both downlink and uplink shall be 5 MHz.

For the additional requirements for single band/dual band 4C-HSDPA or single band NC-4C-HSDPA, the spacing of the adjacent carrier frequencies in downlink and uplink shall be 5 MHz.

For the additional requirements for single 8C-HSDPA, the spacing of the adjacent carrier frequencies in downlink and uplink shall be 5 MHz.

For each single band/dual band 4C-HSDPA and single band 8C-HSDPA or single band NC-4C-HSDPA configuration, the UL-DL carrier separation is defined as minimum (maximum) when the UL carrier is placed at minimum (maximum) possible distance in frequency from the closest carrier in the corresponding DL band for which the requirement applies.

The requirements specified in Section 7 in general could be different for each single band/dual band 4C-HSDPA or single band NC-4C-HSDPA configuration within the same operating band(s).

For the additional requirements for single band NC-4C-HSDPA, in-gap test refers to the case when the interfering signal is located at a positive offset with respect to the the assigned channel frequency of the highest carrier frequency of the left end subblock; or located at a negative offset with respect to the assigned channel frequency of the lowest carrier frequency of the right end subblock.

For the additional requirements for single band NC-4C-HSDPA out-of-gap test refers to the case when the interfering signal(s) is (are) located at a positive offset with respect to the assigned channel frequency of the highest carrier frequency, or located at a negative offset with respect to the assigned channel frequency of the lowest carrier frequency.

For the additional requirements for single band NC-4C-HSDPA, existing blocking characteristics requirements shall be supported for in-gap tests only if the gap length satisfies the following condition so that the interferer position does not change the nature of the core requirement tested:

Gap length ≥ 2\*Interferer frequency offset –5MHz

# 7.2 Diversity characteristics

A suitable receiver structure using coherent reception in both channel impulse response estimation and code tracking procedures is assumed. Three forms of diversity are considered to be available in UTRA/FDD.

Table 7.1: Diversity characteristics for UTRA/FDD

Time diversity	Channel coding and interleaving in both up link and down link
Multi-path diversity	Rake receiver or other suitable receiver structure with maximum combining. Additional processing elements can increase the delay-spread performance due to increased capture of signal energy.
Antenna diversity	Antenna diversity with maximum ratio combing in the Node B and optionally in the UE. Possibility for downlink transmit diversity in the Node B.

# 7.3 Reference sensitivity level

The reference sensitivity level <REFSENS> is the minimum mean power received at the UE antenna port at which the specified minimum requirement shall be met.

## 7.3.1 Minimum requirement

The BER shall not exceed 0.001 for the parameters specified in Table 7.2.

Table 7.2: Test parameters for reference sensitivity, minimum requirement.

Operating Band	Unit	DPCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>			
I	dBm/3.84 MHz	-117	-106.7			
II	dBm/3.84 MHz	-115	-104.7			
III	dBm/3.84 MHz	-114	-103.7			
IV	dBm/3.84 MHz	-117	-106.7			
V	dBm/3.84 MHz	-115	-104.7			
VI	dBm/3.84 MHz	-117	-106.7			
VII	dBm/3.84 MHz	-115	-104.7			
VIII	dBm/3.84 MHz	-114	-103.7			
IX	dBm/3.84 MHz	-116	-105.7			
Х	dBm/3.84 MHz	-117	-106.7			
XI	dBm/3.84 MHz	-117	-106.7			
XII	dBm/3.84 MHz	-114	-103.7			
XIII	dBm/3.84 MHz -114 -103.7					
XIV	(IV dBm/3.84 MHz -114 -103.7					
XIX	dBm/3.84 MHz	-117	-106.7			
XX	dBm/3.84 MHz	-114	-103.7			
XXI	dBm/3.84 MHz	-117	-106.7			
XXII	dBm/3.84 MHz	-114	-103.7			
XXV	dBm/3.84 MHz	-113.5	-103.2			
XXVI	dBm/3.84 MHz	-113.5	-103.2			
		hall be at the maximum output	power			
		the maximum output power				
NOTE 3 For the UE	which supports both B	and III and Band IX operating	frequencies, the			
		5 dBm DPCH_Ec <refsens< td=""><td>&gt; shall apply for Band</td></refsens<>	> shall apply for Band			
	he corresponding <refî<sub>or&gt; is -104.2 dBm</refî<sub>					
	For the UE which supports both Band XI and Band XXI operating frequencies, the					
	reference sensitivity level is FFS.					
reference sensitivity level of -115 dBm DPCH_Ec <refsens> shall apply for Band</refsens>						
XXVI when the carrier frequency of the assigned UTRA channel is within 869-894						
MHz. The corresponding $\langle REF\hat{l}_{or} \rangle$ is -104.7 dBm.						

For the UE which supports DB-DC-HSDPA configuration in Table 7.2aA, the reference sensitivity level DPCH\_Ec <REFSENS> and corresponding <REFÎ $_{or}>$  in Table 7.2 are allowed to be increased by the amount given in Table 7.2aA for the applicable bands.

Table 7.2aA: Allowed de-sensitization relative to reference sensitivity for UE which supports DB-DC-HSDPA.

DB-DC-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
2	1	II, IV
4	1	I, XI

For the UE which supports dual band 4C-HSDPA configuration in Table 7.2aB, the reference sensitivity level DPCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2 are allowed to be increased by the amount given in Table 7.2aB for the applicable bands.

Table 7.2aB: Allowed de-sensitization relative to reference sensitivity for UE which supports dual band 4C-HSDPA.

Dual Band 4C-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands	
II-1-IV-2			
II-2-IV-1	1	II, IV	
II-2-IV-2			

For the UE which supports E-UTRA inter-band carrier aggregation the reference sensitivity level DPCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}>$  in Table 7.2 are allowed to be increased by the amount given in Table 7.3.1-

1A of TS 36.101[11] for those UTRA operating bands corresponding to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations. The tolerance in Table 7.3.1-1A of TS 36.101[11] does not apply to supported UTRA operating bands with frequency range below 1 GHz that correspond to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations when such bands are belonging only to band combination(s) where one band is <1GHz and another band is >1.7GHz and there is no harmonic relationship between the low band UL and high band DL.

In case the UE supports DB-DC-HSDPA or dual band 4C-HSDPA configurations and one or more of the E-UTRA inter-band carrier aggregation configurations listed in Table 7.3.1-1A of TS36.101[11] with a UTRA operating band that belongs to UTRA and E-UTRA carrier aggregation configurations, then

- When the UTRA operating band frequency range is ≤ 1GHz, the applicable additional tolerance shall be the average of the applicable tolerances, truncated to one decimal place for that operating band among the supported DB-DC-HSDPA, dual band 4C-HSDPA, and E-UTRA CA configurations, with the DB-DC-HSDPA, dual carrier 4C-HSDPA, and E-UTRA CA configurations counted separately. In case there is a harmonic relation between low band UL and high band DL, then the maximum tolerance among the different supported carrier aggregation configurations involving such band shall be applied
- When the UTRA operating band frequency range is >1GHz, the applicable additional tolerance shall be the maximum tolerance that applies for that operating band among the supported DB-DC-HSDPA, dual band HSDPA, and E-UTRA CA configurations.

## 7.3.2 Additional requirement for DC-HSDPA

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.2A.

Note: The reference sensitivity level <REFSENS> requirement for DC-HSDPA is not applicable for dual uplink operation. However, there might be a substantial Rx de-sensitization for the UE operating in bands which have less than 80 MHz Tx-Rx frequency separation, transmitting on more than one uplink frequency, at maximum power.

Table 7.2A: Test parameters for reference sensitivity, additional requirement for DC-HSDPA.

Operating Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>			
I	dBm/3.84 MHz	-113	-102.7			
II	dBm/3.84 MHz	-111	-100.7			
III	dBm/3.84 MHz	-110	-99.7			
IV	dBm/3.84 MHz	-113	-102.7			
V	dBm/3.84 MHz	-111	-100.7			
VI	dBm/3.84 MHz	-113	-102.7			
VII	dBm/3.84 MHz	-111	-100.7			
VIII	dBm/3.84 MHz	-110	-99.7			
IX	dBm/3.84 MHz	-112	-101.7			
X	dBm/3.84 MHz	-113	-102.7			
XI	dBm/3.84 MHz -113 -102.7					
XII	dBm/3.84 MHz -110 -99.7					
XIII	XIII dBm/3.84 MHz -110 -99.7					
XIV	dBm/3.84 MHz	-110	-99.7			
XIX	dBm/3.84 MHz	-113	-102.7			
XX	dBm/3.84 MHz	-110	-99.7			
XXI	dBm/3.84 MHz	-113	-102.7			
XXII	dBm/3.84 MHz	-110	-99.7			
XXV	dBm/3.84 MHz	-109.5	-99.2			
XXVI	dBm/3.84 MHz	-109.5	-99.2			
NOTE 1 For Power class 3 and 3bis this shall be at the maximum output power  NOTE 2 For Power class 4 this shall be at the maximum output power  NOTE 3 For the UE which supports both Band III and Band IX operating frequencies, the reference sensitivity level of -110.5 dBm HS-PDSCH_Ec <refsens> shall apply for</refsens>						
NOTE 4 For the UE reference : NOTE 5 For the UE reference :	Band IX. The corresponding <refî<sub>or&gt; is -100.2 dBm  For the UE which supports both Band XI and Band XXI operating frequencies, the reference sensitivity level is FFS.  For the UE which supports both Band V and Band XXVI operating frequencies, the reference sensitivity level of -111 dBm HS-PDSCH_Ec <refsens> shall apply for</refsens></refî<sub>					
Band XXVI when any of the carrier frequencies of the assigned UTRA channel is within 869-894 MHz. The corresponding <refî<sub>or&gt; is -100.7 dBm.</refî<sub>						

For the UE which supports DB-DC-HSDPA configuration in Table 7.2AA, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{\mathbf{I}}_{or}$ > in Table 7.2A are allowed to be increased by the amount given in Table 7.2AA for the applicable bands.

Table 7.2AA: Allowed de-sensitization relative to referenece sensitivity for UE which supports DB-DC-HSDPA.

DB-DC-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
2	1	II, IV
4	1	I, XI

For the UE which supports dual band 4C-HSDPA configuration in Table 7.2AB, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2A are allowed to be increased by the amount given in Table 7.2AB for the applicable bands.

Table 7.2AB: Allowed de-sensitization relative to reference sensitivity for UE which supports dual band 4C-HSDPA.

Dual Band 4C-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
II-1-IV-2		
II-2-IV-1	1	II, IV
II-2-IV-2		

For the UE which supports E-UTRA inter-band carrier aggregation the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2A are allowed to be increased by the amount given in Table 7.3.1-1A of TS 36.101[11] for those UTRA operating bands corresponding to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations. The tolerance in Table 7.3.1-1A of TS 36.101[11] does not apply to supported UTRA operating bands with frequency range below 1 GHz that correspond to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations when such bands are belonging only to band combination(s) where one band is <1GHz and another band is >1.7GHz and there is no harmonic relationship between the low band UL and high band DL.

In case the UE supports DB-DC-HSDPA or dual band 4C-HSDPA configurations and one or more of the E-UTRA inter-band carrier aggregation configurations listed in Table 7.3.1-1A of TS36.101[11] with a UTRA operating band that belongs to UTRA and E-UTRA carrier aggregation configurations, then

- When the UTRA operating band frequency range is ≤ 1GHz, the applicable additional tolerance shall be the average of the applicable tolerances, truncated to one decimal place for that operating band among the supported DB-DC-HSDPA, dual band 4C-HSDPA, and E-UTRA CA configurations, with the DB-DC-HSDPA, dual carrier 4C-HSDPA, and E-UTRA CA configurations counted separately. In case there is a harmonic relation between low band UL and high band DL, then the maximum tolerance among the different supported carrier aggregation configurations involving such band shall be applied
- When the UTRA operating band frequency range is >1GHz, the applicable additional tolerance shall be the
  maximum tolerance that applies for that operating band among the supported DB-DC-HSDPA, dual band 4CHSDPA, and E-UTRA CA configurations.

## 7.3.3 Additional requirement for DB-DC-HSDPA

For all requirements listed in Table 7.2.B, corresponding to the specific DB-DC-HSDPA configuration(s) supported by the UE, (see Table 5.0aA), the BLER measured on each individual cell shall not exceed 0.1.

Table 7.2B: Test parameters for reference sensitivity, additional requirement for DB-DC-HSDPA.

DB-DC- HSDPA configuration	DL Band	UL Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>			
			dBm/3.84 MHz	-113	-102.7			
1	VIII	ı	dBm/3.84 MHz	-110	-99.7			
ı.	-	VIII	dBm/3.84 MHz	-113	-102.7			
	VIII	VIII	dBm/3.84 MHz	-110	-99.7			
	II	П	dBm/3.84 MHz	-110	-99.7			
2	IV	11	dBm/3.84 MHz	-112	-101.7			
	II	IV	dBm/3.84 MHz	-110	-99.7			
	IV	IV	dBm/3.84 MHz	-112	-101.7			
	I	Ι	dBm/3.84 MHz	-113	-102.7			
3	V		dBm/3.84 MHz	-111	-100.7			
3	I	V	dBm/3.84 MHz	-113	-102.7			
	V		dBm/3.84 MHz	-111	-100.7			
	I	1	dBm/3.84 MHz	-112	-101.7			
4	XI	ı	dBm/3.84 MHz	-112	-101.7			
4	1	ΧI	dBm/3.84 MHz	-112	-101.7			
	XI	۸۱	dBm/3.84 MHz	-112	-101.7			
	II		dBm/3.84 MHz	-111	-100.7			
5	V	11	dBm/3.84 MHz	-111	-100.7			
	II	V	dBm/3.84 MHz	-111	-100.7			
	V dBm/3.84 MHz -111 -100.7							
NOTE 1 For Power class 3 and 3bis this shall be at the maximum output power								
NOTE 2 For Power class 4 this shall be at the maximum output power								

## 7.3.4 Additional requirement for single band 4C-HSDPA

For all requirements listed in Table 7.2C, corresponding to the specific single band 4C-HSDPA configuration(s) supported by the UE, (see Table 5.0aB), the BLER measured on each individual cell shall not exceed 0.1.

Note: The reference sensitivity level <REFSENS> requirement for single band 4C-HSDPA is not applicable for dual uplink operation. However, there might be a substantial Rx de-sensitization for the UE operating in bands which have less than 80 MHz Tx-Rx frequency separation, transmitting on more than one uplink frequency, at maximum power.

Table 7.2C: Test parameters for reference sensitivity, additional requirement for single band 4C-HSDPA.

Single band 4C-HSDPA configuration	DL Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>	UL-DL carrier separation		
I-3	I	dBm/3.84 MHz	-113	-102.7	Minimum		
II-3, II-4	II	dBm/3.84 MHz	-111	-100.7	Minimum		
NOTE 1 For P	NOTE 1 For Power class 3, 3bis and 4, this shall be at the maximum output power						

For the UE which supports DB-DC-HSDPA configuration in Table 7.2CA, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2C are allowed to be increased by the amount given in Table 7.2CA for the applicable bands.

Table 7.2CA: Allowed de-sensitization relative to reference sensitivity for UE which supports DB-DC-HSDPA.

DB-DC-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
2	1	II
4	1	

For the UE which supports dual band 4C-HSDPA configuration in Table 7.2CB, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{\mathbf{I}}_{or}$ > in Table 7.2C are allowed to be increased by the amount given in Table 7.2CB for the applicable bands.

Table 7.2CB: Allowed de-sensitization relative to reference sensitivity for UE which supports dual band 4C-HSDPA.

Dual Band 4C-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands	
II-1-IV-2			
II-2-IV-1	1	II	
II-2-IV-2			

For the UE which supports E-UTRA inter-band carrier aggregation the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2C are allowed to be increased by the amount given in Table 7.3.1-1A of TS 36.101[11] for those UTRA operating bands corresponding to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations. The tolerance in Table 7.3.1-1A of TS 36.101[11] does not apply to supported UTRA operating bands with frequency range below 1 GHz that correspond to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations when such bands are belonging only to band combination(s) where one band is <1GHz and another band is >1.7GHz and there is no harmonic relationship between the low band UL and high band DL.

In case the UE supports DB-DC-HSDPA configurations and one or more of the E-UTRA inter-band carrier aggregation configurations listed in Table 7.3.1-1A of TS36.101[11] with a UTRA operating band that belongs to UTRA and E-UTRA carrier aggregation configurations, then

- When the UTRA operating band frequency range is ≤ 1GHz, the applicable additional tolerance shall be the average of the applicable tolerances, truncated to one decimal place for that operating band among the supported DB-DC-HSDPA and E-UTRA CA configurations, with the DB-DC-HSDPA and E-UTRA CA configurations counted separately. In case there is a harmonic relation between low band UL and high band DL, then the maximum tolerance among the different supported carrier aggregation configurations involving such band shall be applied

- When the UTRA operating band frequency range is >1GHz, the applicable additional tolerance shall be the maximum tolerance that applies for that operating band among the supported DB-DC-HSDPA and E-UTRA CA configurations.

## 7.3.5 Additional requirement for dual band 4C-HSDPA

For all requirements listed in Table 7.2D, corresponding to the specific dual band 4C-HSDPA configuration(s) supported by the UE, (see Table 5.0aC), the BLER measured on each individual cell shall not exceed 0.1.

Note: The reference sensitivity level <REFSENS> requirement for dual band 4C-HSDPA is not applicable for dual uplink operation. However, there might be a substantial Rx de-sensitization for the UE operating in bands which have less than 80 MHz Tx-Rx frequency separation, transmitting on more than one uplink frequency, at maximum power.

Table 7.2D: Test parameters for reference sensitivity, additional requirement for dual band 4C-HSDPA.

Dual band 4C-HSDPA configuration	DL Band	UL Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>	UL-DL carrier separation
I-2-VIII-1	I	1	dBm/3.84 MHz	-113	-102.7	Minimum
I-3-VIII-1, I-2-	VIII	ı	dBm/3.84 MHz	-110	-99.7	Minimum
VIII-2, I-1-VIII-	I	VIII	dBm/3.84 MHz	-113	-102.7	Minimum
2	VIII	VIII	dBm/3.84 MHz	-110	-99.7	Minimum
II-1-IV-2	II	ll ll	dBm/3.84 MHz	-110	-99.7	Minimum
II-1-IV-2 II-2-IV-1	IV	11	dBm/3.84 MHz	-112	-101.7	Minimum
II-2-IV-1	II	IV	dBm/3.84 MHz	-110	-99.7	Minimum
11-2-17-2	IV	IV	dBm/3.84 MHz	-112	-101.7	Minimum
14.1/.0	I	1	dBm/3.84 MHz	-113	-102.7	Minimum
I-1-V-2 I-2-V-1	V	ı	dBm/3.84 MHz	-111	-100.7	Minimum
1-2-V-1 1-2-V-2	I	V	dBm/3.84 MHz	-113	-102.7	Minimum
1-Z-V-Z	V	V	dBm/3.84 MHz	-111	-100.7	Minimum
	II	П	dBm/3.84 MHz	-111	-100.7	Minimum
II-1-V-2	V	11	dBm/3.84 MHz	-111	-100.7	Minimum
	II	V	dBm/3.84 MHz	-111	-100.7	Minimum
	V	\ \ \	dBm/3.84 MHz	-111	-100.7	Minimum
NOTE 1 For P	ower class 3,	3bis and 4, t	his shall be at the r	maximum output po	wer	

# 7.3.6 Additional requirement for single band 8C-HSDPA

For all requirements listed in Table 7.2E, corresponding to the specific single band 8C-HSDPA configuration(s) supported by the UE, (see Table 5.0aD), the BLER measured on each individual cell shall not exceed 0.1.

Note: The reference sensitivity level <REFSENS> requirement for single band 8C-HSDPA is not applicable for dual uplink operation. However, there might be a substantial Rx de-sensitization for the UE operating in bands which have less than 80 MHz Tx-Rx frequency separation, transmitting on more than one uplink frequency, at maximum power.

Table 7.2E: Test parameters for reference sensitivity, additional requirement for single band 8C-HSDPA.

Single band 8C-HSDPA configuration	DL Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>	UL-DL carrier separation
I-8 I		dBm/3.84 MHz	-113	-102.7	Minimum
NOTE 1 For Power class 3, 3bis and 4, this shall be at the maximum output power					

# 7.3.7 Additional requirement for single band NC-4C-HSDPA

For all requirements listed in Table 7.2E, corresponding to the specific single band NC-4C-HSDPA configuration(s) supported by the UE, (see Table 5.0aE), the BLER measured on each individual cell shall not exceed 0.1.

Note: The reference sensitivity level <REFSENS> requirement for single band NC-4C-HSDPA is not applicable for dual uplink operation. However, there might be a substantial Rx de-sensitization for the UE operating in bands which have less than 80 MHz Tx-Rx frequency separation, transmitting on more than one uplink frequency, at maximum power.

Table 7.2E: Test parameters for reference sensitivity, additional requirement for single band NC-4C-HSDPA.

Single band NC-4C- HSDPA configuration	DL Band	Unit	HS-PDSCH_Ec <refsens></refsens>	<refî<sub>or&gt;</refî<sub>	UL-DL carrier separation
I-1-5-1, I-2-5-1, I-3-10-1	ı	dBm/3.84 MHz	-113	-102.7	Minimum
IV-1-5-1, IV-2-10-1, IV-2- 15-2, IV-2-20-1, IV-2-25-2	IV	dBm/3.84 MHz	-113	-102.7	Minimum
NOTE 1 For Power class 3, 3bis and 4, this shall be at the maximum output power					

For the UE which supports DB-DC-HSDPA configuration in Table 7.2F, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}>$  in Table 7.2E are allowed to be increased by the amount given in Table 7.2F for the applicable bands.

Table 7.2F: Allowed de-sensitization relative to reference sensitivity for UE which supports DB-DC-HSDPA.

DB-DC-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
2	1	IV
4	1	

For the UE which supports dual band 4C-HSDPA configuration in Table 7.2G, the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2E are allowed to be increased by the amount given in Table 7.2G for the applicable bands.

Table 7.2G: Allowed de-sensitization relative to reference sensitivity for UE which supports dual band 4C-HSDPA.

Dual Band 4C-HSDPA Configuration	Allowed de-sensitization (dB)	Applicable bands
II-1-IV-2		
II-2-IV-1	1	IV
II-2-IV-2		

For the UE which supports E-UTRA inter-band carrier aggregation the reference sensitivity level HS-PDSCH\_Ec <REFSENS> and corresponding <REF $\hat{I}_{or}$ > in Table 7.2E are allowed to be increased by the amount given in Table 7.3.1-1A of TS 36.101[11] for those UTRA operating bands corresponding to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations. The tolerance in Table 7.3.1-1A of TS 36.101[11] does not apply to supported UTRA operating bands with frequency range below 1 GHz that correspond to the E-UTRA operating bands that belong to the supported inter-band carrier aggregation configurations when such bands are belonging only to band combination(s) where one band is <1GHz and another band is >1.7GHz and there is no harmonic relationship between the low band UL and high band DL.

In case the UE supports DB-DC-HSDPA configurations and one or more of the E-UTRA inter-band carrier aggregation configurations listed in Table 7.3.1-1A of TS36.101[11] with a UTRA operating band that belongs to UTRA and E-UTRA carrier aggregation configurations, then

- When the UTRA operating band frequency range is  $\leq$  1GHz, the applicable additional tolerance shall be the average of the applicable tolerances, truncated to one decimal place for that operating band among the supported DB-DC-HSDPA and E-UTRA CA configurations, with the DB-DC-HSDPA and E-UTRA CA configurations counted separately. In case there is a harmonic relation between low band UL and high band DL, then the maximum tolerance among the different supported carrier aggregation configurations involving such band shall be applied

- When the UTRA operating band frequency range is >1GHz, the applicable additional tolerance shall be the maximum tolerance that applies for that operating band among the supported DB-DC-HSDPA and E-UTRA CA configurations.

# 7.4 Maximum input level

This is defined as the maximum mean power received at the UE antenna port, at which the specified BER performance shall be met.

## 7.4.1 Minimum requirement for DPCH reception

The BER shall not exceed 0.001 for the parameters specified in Table 7.3.

Table 7.3: Maximum input level

Parameter	Unit	Level
$\frac{DPCH\_Ec}{I_{or}}$	dB	-19
Î <sub>or</sub>	dBm/3.84 MHz	-25
UE transmitted mean power dBm		20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1
Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.		

NOTE: Since the spreading factor is large (10log(SF)=21dB), the majority of the total input signal consists of the OCNS interference. The structure of OCNS signal is defined in Annex C.3.2.

# 7.4.2 Minimum requirement for HS-PDSCH reception

## 7.4.2.1 Minimum requirement for 16QAM

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H-Set 1 (16QAM version) specified in Annex A.7.1.1 with the addition of the parameters in Table 7.3A and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3B.

Table 7.3A Test parameters for maximum input level

Parameter	Unit	Value
Phase reference		P-CPICH
Îor	dBm/3.84 MHz	-25
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 2
DPCH_Ec/lor	dB	-13
HS-SCCH_1_Ec/lor	dB	-13
Redundancy and constellation version		6
Maximum number of HARQ transmissions		1

Note 1: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE

under test every third TTI

Note 2: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating

in band XXII.

**Table 7.3B Minimum requirement** 

$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put R (kbps)
-3	700

## 7.4.2.2 Minimum requirement for 64QAM

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H-Set 8 specified in Annex A.7.1.8. with the addition of the parameters in Table 7.3C and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3D.

Table 7.3C Test parameters for maximum input level

Parameter	Unit	Value
Phase reference		P-CPICH
Î <sub>or</sub>	dBm/3.84 MHz	-25
UE transmitted mean power	dBm	0
DPCH_Ec/lor	dB	-13
HS-SCCH_1_Ec/lor	dB	-13
Redundancy and constellation version		6
Maximum number of HARQ transmissions		1

Note: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE under test every third TTI

**Table 7.3D Minimum requirement** 

$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put R (kbps)
-2	11800

## 7.4.3 Additional requirement for DC-HSDPA and DB-DC-HSDPA

## 7.4.3.1 Additional requirement for 16QAM

The additional requirements are specified in terms of a minimum information throughput per cell R with the DL reference channel H-Set 1 (16QAM version) specified in Annex A7.1.1, with the addition of the parameters in Table 7.3E, and the downlink physical channel setup according to table C.8, applied to both cells simultaneously. Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3F.

Table 7.3E Test parameters for maximum input level

Parameter	Unit	Value
Phase reference		P-CPICH
Î <sub>or</sub>	dBm/3.84 MHz	-25
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 2
DPCH_Ec/lor	dB	-13
HS-SCCH_1_Ec/lor	dB	-13
Redundancy and constellation version		6
Maximum number of HARQ transmissions		1

Note 1: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE

under test every third TTI

Note 2: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating

in band XXII.

**Table 7.3F Minimum requirement** 

$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put R (kbps)
-3	700

## 7.4.3.2 Additional requirement for 64QAM

The additional requirements are specified in terms of a minimum information throughput per cell R with the DL reference channel H-Set 8 specified in Annex A7.1.8, with the addition of the parameters in Table 7.3G, and the downlink physical channel setup according to table C.8, applied to both cells simultaneously. Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3H.

Table 7.3G Test parameters for maximum input level

Parameter	Unit	Value	
Phase reference		P-CPICH	
Î <sub>or</sub>	dBm/3.84 MHz	-25	
UE transmitted mean power	dBm	0	
DPCH_Ec/lor	dB	-13	
HS-SCCH_1_Ec/lor	dB	-13	
Redundancy and constellation version		6	
Maximum number of HARQ transmissions			
Note: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE under test every third TTI			

**Table 7.3H Minimum requirement** 

$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put R (kbps)
-2	11800

# 7.4.4 Additional requirement for single band/dual band 4C-HSDPA or single band 8C-HSDPA and single band NC-4C-HSDPA

## 7.4.4.1 Additional requirement for 16QAM

The additional requirements are specified in terms of a minimum information throughput per cell R with the DL reference channel H-Set 1 (16QAM version) specified in Annex A7.1.1, with the addition of the parameters in Table 7.3I, and the downlink physical channel setup according to table C.8, applied to all the cells simultaneously. Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3J.

Table 7.3I Test parameters for maximum input level

Parameter	Unit	Value
Phase reference		P-CPICH
Wanted signal mean power per band (dBm)	dBm/band	-22
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)
DPCH_Ec/lor	dB	-13
HS-SCCH_1_Ec/lor	dB	-13
Redundancy and constellation version		6
Maximum number of HARQ transmissions		1

Note 1: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE under test every thir TTI

Note 2: Wanted signal mean power per band is the sum of measured mean power on each carrier in a band over 3.84 MHz.

**Table 7.3J Minimum requirement** 

HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps)
-3	700

## 7.4.4.2 Additional requirement for 64QAM

The additional requirements are specified in terms of a minimum information throughput per cell R with the DL reference channel H-Set 8 specified in Annex A7.1.8, with the addition of the parameters in Table 7.3K, and the downlink physical channel setup according to table C.8, applied to all the cells simultaneously. Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 7.3L.

**Table 7.3K Parameters definition** 

Parameter	Unit	Value
Phase reference		P-CPICH
Wanted signal mean power per band (dBm)	dBm/band	-22
UE transmitted mean power	dBm	0
DPCH_Ec/lor	dB	-13
HS-SCCH_1_Ec/lor	dB	-13
Redundancy and constellation version		6
Maximum number of HARQ transmissions		1

Note 1: The HS-SCCH and corresponding HS-PDSCH shall be transmitted continuously with constant power but the HS-SCCH shall only use the identity of the UE under test every third TTI

Note 2: Wanted signal mean power per band is the sum of measured mean power on each carrier in a band over 3.84 MHz.

**Table 7.3L Minimum requirement** 

HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps)
-2	11800

# 7.5 Adjacent Channel Selectivity (ACS)

Adjacent Channel Selectivity (ACS) is a measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an adjacent channel signal at a given frequency offset from the centre frequency of

the assigned channel. ACS is the ratio of the receive filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channel(s).

## 7.5.1 Minimum requirement

The UE shall fulfill the minimum requirement specified in Table 7.4 for all values of an adjacent channel interferer up to -25 dBm.

However it is not possible to directly measure the ACS, instead the lower and upper range of test parameters are chosen in Table 7.5 where the BER shall not exceed 0.001.

**Table 7.4: Adjacent Channel Selectivity** 

Unit	ACS
dB	33

Table 7.5: Test parameters for Adjacent Channel Selectivity

Parameter	Unit	Case 1	Case 2		
DPCH_Ec	dBm/3.84 MHz	<refsens> + 14 dB</refsens>	<refsens> + 41 dB</refsens>		
Î <sub>or</sub>	dBm/3.84 MHz	<refî<sub>or&gt; + 14 dB</refî<sub>	REFÎ <sub>or</sub> > + 41 dB		
I <sub>oac</sub> mean power (modulated)	dBm	-52	-25		
F <sub>uw</sub> (offset)	MHz	+5 or -5	+5 or -5		
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1		
Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.					

NOTE 1: The I<sub>oac</sub> (modulated) signal consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2:  $\langle REFSENS \rangle$  and  $\langle REF\hat{I}_{or} \rangle$  refers to the DPCH\_Ec $\langle REFSENS \rangle$  and the DPCH $\langle REF\hat{I}_{or} \rangle$  as specified in Table 7.2.

# 7.5.2 Additional requirement for DC-HSDPA and DB-DC-HSDPA

The UE shall fulfill the additional requirement specified in Table 7.5A for all values of an adjacent channel interferer up to -25 dBm.

However it is not possible to directly measure the ACS, instead the lower and upper range of test parameters are chosen in Table 7.5B, where the HS-PDSCH BLER shall not exceed 0.1.

**Table 7.5A: Adjacent Channel Selectivity** 

Unit	ACS
dB	33

**Parameter** Unit Case 1 Case 2 HS-PDSCH\_Ec <REFSENS> + 14 dB <REFSENS> + 41 dB dBm/3.84 MHz dBm/3.84 MHz <REFÎ<sub>or</sub>> + 14 dB <REFÎ<sub>or</sub>> + 41 dB loac mean power (modulated) dBm F<sub>uw</sub> (offset) MHz +5 or -5 +5 or -5 (NOTE 2) 20 (for Power class 3 20 (for Power class 3 and 3bis) and 3bis) UE transmitted mean power dBm 18 (for Power class 4) 18 (for Power class 4) Note 1 Note 1 Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

Table 7.5B: Test parameters for Adjacent Channel Selectivity

- NOTE 1: The  $I_{\text{oac}}$  (modulated) signal consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset refers to the assigned channel frequencies of the individual cells.
- NOTE 3: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2A for DC-HSDPA and Table 7.2B for DB-DC-HSDPA.

## 7.5.3 Additional requirement for single band/dual band 4C-HSDPA

The UE shall fulfill the additional requirement specified in Table 7.5C for all values of an adjacent channel interferer up to -25 dBm.

However it is not possible to directly measure the ACS, instead the lower and upper range of test parameters are chosen in Table 7.5D and the requirements are given in Table 7.5E and Table 7.5EA for single band 4C-HSDPA and in 7.5F and 7.5G for dual band 4C-HSDPA, where the HS-PDSCH BLER shall not exceed 0.1.

The ACS requirement for single band/dual-band 4C-HSDPA is not applicable for dual uplink operation.

**Table 7.5C: Adjacent Channel Selectivity** 

١	Rx Parameter	Unit	Number of adjacent downlink carriers in a band			
			1	2	3	4
	ACS	dB	33	33	33	33

Table 7.5D: Test parameters for Adjacent Channel Selectivity

Parameter	Unit	Case 1	Case 2
I <sub>oac</sub> mean power (modulated)	dBm	-52	-25
F <sub>uw</sub> (offset) (NOTE 2)	MHz	+5 or -5	+5 or -5
UE transmitted mean power	dBm	20 (for Power class 3 and 3b 18 (for Power class 4)	

- NOTE 1: The  $I_{oac}$  (modulated) signal consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: Negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.5E: Single band 4C-HSDPA requirements for Adjacent Channel Selectivity, Case 1

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-3		<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
II-3, II-4	II	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

Table 7.5EA: Single band 4C-HSDPA requirements for Adjacent Channel Selectivity, Case 2

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-3		<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
II-3, II-4	ll	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

Table 7.5F: Dual band 4C-HSDPA requirements for Adjacent Channel Selectivity, Case 1

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1	I		<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
I-3-VIII-1, I-2-	VIII	I	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
VIII-2, I-1-VIII-	1	VIII	<refsens>+14 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +14 dB$	Minimum
2	VIII	VIII	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
11.4.11/.0	II	- 11	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
II-1-IV-2 II-2-IV-1	IV	II	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
II-2-IV-1 II-2-IV-2	II	IV	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
11-2-17-2	IV	IV	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
14.1/.0	I		<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
I-1-V-2	V	ı	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
I-2-V-1 I-2-V-2	ı	V	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
1-2-V-Z	V	\ \	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
	II	Ш	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
	\/	] !!	∠PEECENC>±14 dB	∠RFFÎ >±14 dB	Minimum

	=	ш	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
II-1-V-2	V	"	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
11-1-4-2	II	\/	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
	V	V	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2D for dual band 4C-HSDPA.

Table 7.5G: Dual band 4C-HSDPA requirements for Adjacent Channel Selectivity, Case 2

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1			<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
I-3-VIII-1, I-2-	VIII	·	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
VIII-2, I-1-VIII-		VIII	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
2	VIII	VIII	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
II-1-IV-2	=	Ш	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
II-1-IV-2 II-2-IV-1	IV		<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
II-2-IV-1	II	IV	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
11-2-17-2	IV	١V	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum

I-1-V-2	I		<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
I-1-V-2 I-2-V-1	V	ı	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
I-2-V-1	ı	W	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
1-Z-V-Z	1-2-V-2 V	V	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
	II		<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
II-1-V-2	V	Ш	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
11-1-4-2	II	W	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
	V	V	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2D for dual band 4C-HSDPA.

## 7.5.4 Additional requirement for single band 8C-HSDPA

The UE shall fulfill the additional requirement specified in Table 7.5H for all values of an adjacent channel interferer up to -25 dBm.

However it is not possible to directly measure the ACS, instead the lower and upper range of test parameters are chosen in Table 7.5I and the requirements are given in Table 7.5J and Table 7.5K where the HS-PDSCH BLER shall not exceed 0.1.

The ACS requirement for single band 8C-HSDPA is not applicable for dual uplink operation.

Table 7.5H: Adjacent Channel Selectivity

Rx Parameter	Unit	Number of adjacent downlink carriers in a band							
		1	2	3	4	5	6	7	8
ACS	dB	33	33	33	33	[TBD]	[TBD]	[TBD]	[33]

Table 7.51: Test parameters for Adjacent Channel Selectivity

Parameter	Unit	Case 1	Case 2
I <sub>oac</sub> mean power (modulated)	dBm	-52	-25
F <sub>uw</sub> (offset) (NOTE 2)	MHz	+5 or -5	+5 or -5
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis 18 (for Power class 4)	

NOTE 1: The  $I_{oac}$  (modulated) signal consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: Negative offset refers to the assigned channel frequency of the lowest carrier frequency in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequency in each band.

Table 7.5J: Single band 8C-HSDPA requirements for Adjacent Channel Selectivity, Case 1

Single band 8C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-8	I	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2E for single band 8C-HSDPA.

Table 7.5K: Single band 8C-HSDPA requirements for Adjacent Channel Selectivity, Case 2

Single band 8C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-8		<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2E for single band 8C-HSDPA.

## 7.5.5 Additional requirement for single band NC-4C-HSDPA

The UE shall fulfill the additional requirement specified in Table 7.5L for all values of an adjacent channel interferer up to -25 dBm.

However it is not possible to directly measure the ACS, instead the lower and upper range of test parameters are chosen in Table 7.5M and the requirements are given in Table 7.5N and Table 7.5P where the HS-PDSCH BLER shall not exceed 0.1.

The ACS requirement for single band NC-4C-HSDPA is not applicable for dual uplink operation.

**Table 7.5L: Adjacent Channel Selectivity** 

Rx Parameter	Unit	Number of adjacent downlink carriers in a band					
		1	2	3			
ACS	dB	33	33	33			

Table 7.5M: Test parameters for Adjacent Channel Selectivity

Parameter	Unit	Case 1	Case 2
I <sub>oac</sub> mean power (modulated)	dBm	-52	-25
F <sub>uw</sub> (offset) (NOTE 2,3)	MHz	+5 or -5	+5 or -5
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis 18 (for Power class 4)	

- NOTE 1: The  $I_{oac}$  (modulated) signal consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.
- NOTE 3: For single band NC-4C-HSPDA in-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the higher subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the lower subblock of carriers.

Table 7.5N: Single band NC-4C-HSDPA requirements for Adjacent Channel Selectivity, Case 1

Single band NC-4C- HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-1-5-1, I-2-5-1, I-3-10-1	In-gap	- 1	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
I-1-5-1, I-2-5-1, I-3-10-1	Out- of-gap	I	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-15- 2, IV-2-20-1, IV-2-25-2	In-gap	IV	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-15- 2, IV-2-20-1, IV-2-25-2	Out- of-gap	IV	<refsens>+14 dB</refsens>	<refî<sub>or&gt;+14 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E for single band NC-4C-HSDPA.

Table 7.5P: Single band NC-4C-HSDPA requirements for Adjacent Channel Selectivity, Case 2

Single band NC-4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-1-5-1, I-2-5-1, I-3-10-1	In-gap	I	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
I-1-5-1, I-2-5-1, I-3-10-1	Out-of- gap	I	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-15-2, IV-2-20-1, IV-2-25-2	In-gap	IV	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-15-2, IV-2-20-1, IV-2-25-2	Out-of- gap	IV	<refsens>+41 dB</refsens>	<refî<sub>or&gt;+41 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2E for single band NC-4C-HSDPA.

# 7.6 Blocking characteristics

The blocking characteristic is a measure of the receiver"s ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the spurious response or the adjacent channels, without this unwanted input signal causing a degradation of the performance of the receiver beyond a specified limit. The blocking performance shall apply at all frequencies except those at which a spurious response occur.

## 7.6.1 Minimum requirement (In-band blocking)

The BER shall not exceed 0.001 for the parameters specified in Table 7.6. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6: In-band blocking

Parameter	Unit	Lev	rel				
DPCH_Ec	dBm/3.84 MHz	<refsen< td=""><td></td></refsen<>					
Ī <sub>or</sub>	dBm/3.84 MHz	<refî<sub>or&gt;</refî<sub>	+ 3 dB				
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44				
			≤-15 MHz				
F <sub>uw</sub> offset		=±10 MHz	&				
			≥15 MHz				
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185				
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005				
F <sub>uw</sub> (Band III operation)	MHz	1797.4≤ f ≤1887.6	1790≤ f ≤1895				
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170				
F <sub>uw</sub> (Band V operation)	MHz	861.4≤ f ≤901.6	854≤ f ≤909				
F <sub>uw</sub> (Band VI operation)	MHz	867.4≤ f ≤892.6 (Note 2)	860≤ f ≤900 (Note 2)				
F <sub>uw</sub> (Band VII operation)	MHz	2612.4≤ f ≤2697.6	2605 ≤ f ≤ 2705				
Fuw (Band VIII operation)	MHz	917.4≤ f ≤967.6	910 ≤ f ≤ 975				
F <sub>uw</sub> (Band IX operation)	MHz	1837.4 ≤ f ≤ 1887.4	1829.9 ≤ f ≤ 1894.9				
F <sub>uw</sub> (Band X operation)	MHz	2102.4 ≤ f ≤ 2177.6	2095 ≤ f ≤ 2185				
F <sub>uw</sub> (Band XI operation)	MHz	1468.4 ≤ f ≤ 1503.4	1460.9 ≤ f ≤ 1510.9				
F <sub>uw</sub> (Band XII operation)	MHz	721.4 ≤ f ≤ 753.6	714 ≤ f ≤ 761				
F <sub>uw</sub> (Band XIII operation)	MHz	$738.4 \le f \le 763.6$	731 ≤ f ≤ 771				
F <sub>uw</sub> (Band XIV operation)	MHz	$750.4 \le f \le 775.6$	743 ≤ f ≤ 783				
F <sub>uw</sub> (Band XIX operation)	MHz	867.4≤ f ≤897.6	860≤ f ≤905 (Note 2)				
F <sub>uw</sub> (Band XX operation)	MHz	$783.4 \le f \le 828.6$	776 ≤ f ≤ 836				
F <sub>uw</sub> (Band XXI operation)	MHz	1488.4≤ f ≤1518.4	1480.9≤ f ≤1525.9 (Note 2)				
F <sub>uw</sub> (Band XXII operation)	MHz	3502.4≤ f ≤3597.6	3495≤ f ≤3605				
F <sub>uw</sub> (Band XXV operation)	MHz	1922.4≤ f ≤2002.6	1915≤ f ≤2010				
F <sub>uw</sub> (Band XXVI operation)	MHz	851.4≤ f ≤901.6	844≤ f ≤909				
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1					
Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.							

Note 1. The OE transmitted mean power shall be reduced by 0.50b for a OE operating in band XXII

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For Band VI, Band XIX and Band XXI, the unwanted interfering signal does not fall inside the UE receive band, but within the first 15 MHz below or above the UE receive band.

NOTE 3: <REFSENS> and <REF $\hat{I}_{or}$ > refer to the DPCH\_Ec<REFSENS> and the DPCH<REF $\hat{I}_{or}$ > as specified in Table 7.2.

# 7.6.1A Additional requirement for DC-HSDPA and DB-DC-HSDPA (In-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6A. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6A: In-band blocking for DC-HSDPA and DB-DC-HSDPA

Parameter	Unit	Lev	
HS-PDSCH_Ec	dBm/3.84 MHz	<refsen< th=""><th></th></refsen<>	
lor	dBm/3.84 MHz	<refî<sub>or&gt;</refî<sub>	> + 3 dB
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset			≤-15 MHz
(NOTE 3)		=±10 MHz	& . 45 MH
F <sub>uw</sub>	MHz	2102.4≤ f ≤2177.6	≥15 MHz 2095≤ f ≤2185
(Band I operation) F <sub>uw</sub>			
(Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005
F <sub>uw</sub> (Band III operation)	MHz	1797.4≤ f ≤1887.6	1790≤ f ≤1895
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170
F <sub>uw</sub> (Band V operation)	MHz	861.4≤ f ≤901.6	854≤ f ≤909
F <sub>uw</sub> (Band VI operation)	MHz	867.4≤ f ≤892.6 (Note 2)	860≤ f ≤900 (Note 2)
F <sub>uw</sub> (Band VII operation)	MHz	2612.4≤ f ≤2697.6	2605 ≤ f ≤ 2705
Fuw (Band VIII operation)	MHz	917.4≤ f ≤967.6	910 ≤ f ≤ 975
F <sub>uw</sub> (Band IX operation)	MHz	1837.4 ≤ f ≤ 1887.4	1829.9 ≤ f ≤ 1894.9
F <sub>uw</sub> (Band X operation)	MHz	2102.4 ≤ f ≤ 2177.6	2095 ≤ f ≤ 2185
F <sub>uw</sub> (Band XI operation)	MHz	1468.4 ≤ f ≤ 1503.4	1460.9 ≤ f ≤ 1510.9
F <sub>uw</sub> (Band XII operation)	MHz	$721.4 \le f \le 753.6$	714 ≤ f ≤ 761
F <sub>uw</sub> (Band XIII operation)	MHz	$738.4 \le f \le 763.6$	731 ≤ f ≤ 771
F <sub>uw</sub> (Band XIV operation)	MHz	$750.4 \le f \le 775.6$	743 ≤ f ≤ 783
F <sub>uw</sub> (Band XIX operation)	MHz	867.4≤ f ≤897.6	860≤ f ≤905 (Note 2)
F <sub>uw</sub> (Band XX operation)	MHz	$783.4 \le f \le 828.6$	776 ≤ f ≤ 836
F <sub>uw</sub> (Band XXI operation)	MHz	1488.4≤ f ≤1518.4	1480.9≤ f ≤1525.9 (Note 2)
F <sub>uw</sub> (Band XXII operation)	MHz	3502.4≤ f ≤3597.6	3495≤ f ≤3605
F <sub>uw</sub> (Band XXV operation)	MHz	1922.4≤ f ≤2002.6	1915≤ f ≤2010
F <sub>uw</sub> (Band XXVI operation)	MHz	851.4≤ f ≤901.6	844≤ f ≤909
UE transmitted mean power	dBm	20 (for Power cl 18 (for Pow Note	er class 4)

- NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: For Band VI, Band XIX and Band XXI, the unwanted interfering signal does not fall inside the UE receive band, but within the first 15 MHz below or above the UE receive band.
- NOTE 3: For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset refers to the assigned channel frequencies of the individual cells.
- NOTE 4:  $\langle REFSENS \rangle$  and  $\langle REF\hat{I}_{or} \rangle$  refer to the HS-PDSCH\_Ec $\langle REFSENS \rangle$  and the HS-PDSCH $\langle REF\hat{I}_{or} \rangle$  as specified in Table 7.2A for DC-HSDPA and Table 7.2B for DB-DC-HSDPA.

## 7.6.1B Additional requirement for DC-HSUPA (In-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6B and Table 7.6C. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6B: In-band blocking for DC-HSUPA

Parameter	Unit	Lev	rel
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset (NOTE 3)		=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005
F <sub>uw</sub> (Band III operation)	MHz	1797.4≤ f ≤1887.6	1790≤ f ≤1895
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170
F <sub>uw</sub> (Band V operation)	MHz	861.4≤ f ≤901.6	854≤ f ≤909
F <sub>uw</sub> (Band VI operation)	MHz	867.4≤ f ≤892.6 (Note 2)	860≤ f ≤900 (Note 2)
F <sub>uw</sub> (Band VII operation)	MHz	2612.4≤ f ≤2697.6	2605 ≤ f ≤ 2705
Fuw (Band VIII operation)	MHz	917.4≤ f ≤967.6	910 ≤ f ≤ 975
F <sub>uw</sub> (Band IX operation)	MHz	1837.4 ≤ f ≤ 1887.4	1829.9 ≤ f ≤ 1894.9
F <sub>uw</sub> (Band X operation)	MHz	2102.4 ≤ f ≤ 2177.6	2095 ≤ f ≤ 2185
F <sub>uw</sub> (Band XI operation)	MHz	1468.4 ≤ f ≤ 1503.4	1460.9 ≤ f ≤ 1510.9
F <sub>uw</sub> (Band XII operation)	MHz	721.4 ≤ f ≤ 753.6	714 ≤ f ≤ 761
F <sub>uw</sub> (Band XIII operation)	MHz	738.4 ≤ f ≤ 763.6	731 ≤ f ≤ 771
F <sub>uw</sub> (Band XIV operation)	MHz	750.4 ≤ f ≤ 775.6	743 ≤ f ≤ 783
F <sub>uw</sub> (Band XIX operation)	MHz	867.4≤ f ≤897.6	860≤ f ≤905 (Note 2)
F <sub>uw</sub> (Band XX operation)	MHz	783.4≤ f ≤828.6	776≤ f ≤836 (Note 2)
F <sub>uw</sub> (Band XXI operation)	MHz	1488.4≤ f ≤1518.4	1480.9≤ f ≤1525.9 (Note 2)
F <sub>uw</sub> (Band XXII operation)	MHz	3502.4≤ f ≤3597.6	3495≤ f ≤3605
F <sub>uw</sub> (Band XXV operation)	MHz	1922.4≤ f ≤2002.6	1915≤ f ≤2010
F <sub>uw</sub> (Band XXVI operation)	MHz	851.4≤ f ≤901.6	844≤ f ≤909
UE transmitted mean power	dBm	20 (for Power cla 18 (for Pow Note	er class 4) e 1
Note 1: The UE transmitted	d mean power shall I	be reduced by 0.5dB for a UE	operating in band XXII.

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For Band VI, Band XIX and Band XXI, the unwanted interfering signal does not fall inside the UE receive band, but within the first 15 MHz below or above the UE receive band.

NOTE 3: For DC-HSUPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used.

Table 7.6C: Reference input powers for in-band blocking, DC-HSUPA.

Operating	Band	Unit	HS-PDSCH_Ec	Îor			
1		dBm/3.84 MHz	-110	-99.7			
II		dBm/3.84 MHz	-108	-97.7			
III		dBm/3.84 MHz	-107	-96.7			
IV		dBm/3.84 MHz	-110	-99.7			
V		dBm/3.84 MHz	-104.3	-94			
VI		dBm/3.84 MHz	-104.7	-94.4			
VII		dBm/3.84 MHz	-108	-97.7			
VIII		dBm/3.84 MHz	-101.1	-90.8			
IX		dBm/3.84 MHz	-109	-98.7			
Х		dBm/3.84 MHz	-110	-99.7			
XI		dBm/3.84 MHz	-101.4	-91.1			
XII		dBm/3.84 MHz	N/A	N/A			
XIII		dBm/3.84 MHz	N/A	N/A			
XIV		dBm/3.84 MHz	N/A	N/A			
XIX		dBm/3.84 MHz	-104.7	-94.4			
XX		dBm/3.84 MHz	TBD	TBD			
XXI		dBm/3.84 MHz	-101.4	-91.1			
XXII		dBm/3.84 MHz	dBm/3.84 MHz -107				
XXV	′	dBm/3.84 MHz	-106.5	-96.2			
XXV	I	dBm/3.84 MHz	-101.1	-90.8			
re							
NOTE 2 F	or the UE	UE which supports both Band XI and Band XXI operating frequencies, the ce input power level is FFS.					
NOTE 3 F	or the UE	e UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-H_Ec > and < $\hat{l}_{or}$ > are allowed to be increased by an amount defined in Table					
NOTE 4 F	or the UE	H_Ec > and < Î <sub>or</sub> > are a	which supports dual band 4C-HSDPA configuration in Table 5.0aC the $<$ H_Ec $>$ and $<$ $\hat{l}_{or}$ $>$ are allowed to be increased by an amount defined in				

# 7.6.1C Additional requirement for single band 4C-HSDPA (In-band blocking)

## 7.6.1C.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6D and Table 7.6E. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6D: Test parameters for in-band blocking, single band 4C-HSDPA, single uplink operation

Parameter	Unit	Lev	rel
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)	

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.6E: In-band blocking requirements, single band 4C-HSDPA, single uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-3		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-3, II-4	II	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

## 7.6.1C.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6F and Table 7.6G. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6F: Test parameters for in-band blocking, single band 4C-HSDPA, dual uplink operation

Parameter	Unit	Level		
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44	
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz	
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185	
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005	

NOTE 1: I<sub>blocking</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.6G: In-band blocking requirements, single band 4C-HSDPA, dual uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
I-3	I	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-3, II-4	II	-108	-97.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.12. NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-

PDSCH\_Ec > and  $<\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

## 7.6.1D Additional requirement for dual band 4C-HSDPA (In-band blocking)

## 7.6.1D.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6H and Table 7.6I. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6H: Test parameters for in-band blocking, dual band 4C-HSDPA, single uplink operation

Parameter	Unit	Lev	el
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170
F <sub>uw</sub> (Band V operation)	MHz	861.4≤ f ≤901.6	854≤ f ≤909
Fuw (Band VIII operation)	MHz	917.4≤ f ≤967.6	910 ≤ f ≤ 975
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)	

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.61: In-band blocking requirements, dual band 4C-HSDPA, single uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1	ı		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-3-VIII-1 I-2-	VIII	'	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
VIII-2, I-1-VIII-	ı	VIII	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
2	VIII	VIII	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
11.4.11/.0	II	Ш	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-1-IV-2 II-2-IV-1	IV		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-2-IV-1	II	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
11-2-10-2	IV	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-1-V-2	ı		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-1-V-2 I-2-V-1	V	·	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-2-V-1	ı	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
1-2- V -2	V	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
	II	Ш	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-1-V-2	V	11	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
11-1-V-Z	II	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2D for dual band 4C-HSDPA.

<REFSENS>+3 dB

<REFÎ<sub>or</sub>>+3 dB

## 7.6.1D.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6K. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6J: Test parameters for in-band blocking, dual band 4C-HSDPA, dual uplink operation

Parameter	Unit	Lev	rel
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170
F <sub>uw</sub> (Band V operation)	MHz	861.4≤ f ≤901.6	854≤ f ≤909
Fuw (Band VIII operation)	MHz	917.4≤ f ≤967.6	910 ≤ f ≤ 975

NOTE 1: I<sub>blocking</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.6K: In-band blocking requirements, dual band 4C-HSDPA, dual uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation	
I-2-VIII-1	I		-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-3-VIII-1	VIII .	1	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	I		-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-2-VIII-2	VIII	•	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-Z-V111-Z	I	VIII	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	VIII	VIII	-99.7	-89.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-VIII-2	I	VIII	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-VIII-Z	VIII	VIII	-99.7	-89.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-1-IV-2	II	IV	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
11-1-10-2	IV	IV	-109	-98.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-2-IV-1	II	II	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
11-2-17-1	IV	"	-109	-98.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	II	II	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-2-IV-2	IV	11	-109	-98.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
11-2-17-2	II		IV	-107	-96.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	IV	IV	-109	-98.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-V-2	I	V	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-1-4-2	V	V	-103.2	-92.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-2-V-1	I	,	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-2-0-1	V	1	-108	-97.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	I		-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-2-V-2	V	<u>'</u>	-108	-97.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-Z-V-Z	I	V	-110	-99.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	V	v .	-103.2	-92.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
11.4.1/.0	Ш	V	-108	-97.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-1-V-2	V	V	-103.1	-92.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	

# 7.6.1E Additional requirement for single band 8C-HSDPA (In-band blocking)

#### 7.6.1E.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6L and Table 7.6M. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6L: Test parameters for in-band blocking, single band 8C-HSDPA, single uplink operation

Parameter	Unit	Lev	el	
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44	
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz	
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185	
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005	
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 8C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency, and positive offset refers to the assigned channel frequency of the highest carrier frequency.

Table 7.6M: In-band blocking requirements, single band 8C-HSDPA, single uplink operation

Single band 8C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-8	ı	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E for single band 8C-HSDPA.

#### 7.6.1E.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6N and Table 7.6O. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6N: Test parameters for in-band blocking, single band 8C-HSDPA, dual uplink operation

Parameter	Unit	Lev	el
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44
F <sub>uw</sub> offset (NOTE 2)		=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band II operation)	MHz	1922.4≤ f ≤1997.6	1915≤ f ≤2005

NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 8C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency, and positive offset refers to the assigned channel frequency of the highest carrier frequency.

Table 7.60: In-band blocking requirements, single band 8C-HSDPA, dual uplink operation

Single band 8C-HSDPA Configuration	8C-HSDPA Band (dBm/3.84MHz) (dBm/3.84MHz) (dBm/3.84MHz) (dBm) carrier separation					
I-8	I-8 I -110 -99.7 20 (for Power class 3 and 3bis) Minimum 18 (for Power class 4)					
NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH_Ec > and < Î <sub>or</sub> > are allowed to be increased by an amount defined in Table 7.12.  NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH_Ec > and < Î <sub>or</sub> > are allowed to be increased by an amount defined in Table 7.13.						

# 7.6.1F Additional requirement for single band NC-4C-HSDPA (In-band blocking)

#### 7.6.1F.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6P and Table 7.6Q. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6P: Test parameters for in-band blocking, single band NC-4C-HSDPA, single uplink operation

Parameter	Unit	Lev	el
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44 (NOTE 4)
F <sub>uw</sub> offset (NOTE 2,3)	MHz	=±10 MHz	≤-15 MHz & ≥15 MHz
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170
UE transmitted mean power dBm		20 (for Power class 3 and 3bis) 18 (for Power class 4)	

- NOTE 1:  $I_{blocking}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.
- NOTE 3: For single band NC-4C-HSPDA in-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the higher subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the lower subblock of carriers.
- NOTE 4: The  $I_{blocking}$  (modulated) interferer with mean power equals to -44dBm is only applicable for scenario with gap length  $\geq 25 MHz$ .

Table 7.6Q: In-band blocking requirements, single band NC-4C-HSDPA, single uplink operation

Single band NC-4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-1-5-1, I-2-5-1, I-3-10-1	Out-of-gap	I	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
IV-2-15-2, IV-2-20-1, IV-2- 25-2	In-gap	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-15- 2, IV-2-20-1, IV-2-25-2	Out-of-gap	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E for single band NC-4C-HSDPA.

#### 7.6.1F.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.6R and Table 7.6S. In-band blocking is defined for an unwanted interfering signal falling into the UE receive band or into the first 15 MHz below or above the UE receive band.

Table 7.6R: Test parameters for in-band blocking, single band NC-4C-HSDPA, dual uplink operation

Parameter	Unit	Lev	el	
I <sub>blocking</sub> mean power (modulated)	dBm	-56	-44 (NOTE 4)	
F <sub>uw</sub> offset (NOTE 2,3)	MHz	=±10 MHz	≤-15 MHz & ≥15 MHz	
F <sub>uw</sub> (Band I operation)	MHz	2102.4≤ f ≤2177.6	2095≤ f ≤2185	
F <sub>uw</sub> (Band IV operation)	MHz	2102.4≤ f ≤2162.6	2095≤ f ≤2170	
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

- NOTE 1: I<sub>blocking</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.
- NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowerst carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.
- NOTE 3: For single band NC-4C-HSPDA in-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the higher subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the lower subblock of carriers.
- NOTE 4: The  $I_{blocking}$  (modulated) interferer with mean power equals to -44dBm is only applicable for scenario with gap length  $\geq 25 MHz$ .

Table 7.6S: In-band blocking requirements, single band NC-4C-HSDPA, dual uplink operation

Single band NC-4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-5-1, I-3-10-1	Out-of-gap	ı	-110	-99.7	Minimum
IV-2-15-2, IV-2-20-1, IV-2- 25-2	In-gap	IV	-110	-99.7	Minimum
IV-2-10-1, IV-2-15-2, IV-2- 20-1, IV-2-25-2	Out-of-gap	IV	-110	-99.7	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and <  $\hat{I}_{or}$  > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

## 7.6.2 Minimum requirement (Out-of-band blocking)

The BER shall not exceed 0.001 for the parameters specified in Table 7.7. Out-of-band blocking is defined for an unwanted interfering signal falling more than 15 MHz below or above the UE receive band.

For Table 7.7 in frequency range 1, 2 and 3, up to 24 exceptions are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7 in frequency range 4, up to 8 exceptions are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable

Table 7.7: Out of band blocking

DPCH_Ec								
Sab MHz								
Bubocking, (CW)   dBm	+ 3 dB							
Five   Band I operation   Canada   C	5							
F <sub>IW</sub> (Band III operation)								
F <sub>IW</sub>								
Band II operation   2005     2050     ≤ 2075     2075≤     12750	< 1910							
Fuw (Band III operation)	_ 1010							
Band III operation   1895<1 < 1940   1940≤1 < 1965   1965≤1<12750   1 <								
Fuw (Band IV operation)								
Band IV operation   2170< f < 2215   2215 ≤ f < 2240   2240 ≤ f < 2275								
F <sub>LW</sub> (Band V operation)								
Band V operation   909 < f < 954   954 ≤ f < 979   979 ≤ f < 12750								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	≤ 849							
Band VI operation   900 < f < 945   945 ≤ f < 970   970 ≤ f < 12750								
Fuw (Band VII operation)								
Fuw (Band VII operation)								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
F <sub>uw</sub> (Band IX operation)								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{ c c c c c } \hline (Band XII operation) & 761 < f < 806 & 806 \le f < 831 & 831 \le f < 12750 \\ \hline F_{uw} & MHz & 686 < f < 731 & 61 < f \le 686 & 1 < f \le 661 & 776 \le f \\ \hline (Band XIII operation) & 771 < f < 816 & 816 \le f < 841 & 841 \le f < 12750 \\ \hline F_{uw} & MHz & 698 < f < 743 & 673 < f \le 698 & 1 < f \le 673 & 788 \le f \\ \hline (Band XIV operation) & 783 < f < 828 & 828 \le f < 853 & 853 \le f < 12750 \\ \hline F_{uw} & MHz & 815 < f < 860 & 790 < f \le 815 & 1 < f \le 790 & - \\ \hline (Band XIX operation) & 905 < f < 950 & 950 \le f < 975 & 975 \le f < 12750 \\ \hline F_{uw} & MHz & 731 < f < 776 & 706 < f \le 731 & 1 < f \le 706 & - \\ \hline (Band XX operation) & 836 < f < 881 & 881 \le f < 906 & 906 \le f < 12750 \\ \hline F_{uw} & MHz & 1435.9 < f < 1480.9 & 1410.9 < f \le 1435.9 & 1 < f \le 1410.9 & - \\ \hline (Band XXI operation) & 1525.9 < f < 1570.9 & 1570.9 \le f < 1595.9 & 1595.9 \le f < 12750 \\ \hline F_{uw} & MHz & 3450 < f < 3495 & 3425 < f \le 3450 & 1 < f \le 3425 & - \\ \hline (Band XXV operation) & 3605 < f < 915 & 2055  \le f < 2080 & 2080  \le f < 12750 \\ \hline F_{uw} & MHz & 1870 < f < 1915 & 1845 < f \le 1870 & 1 < f \le 1845 & 1850 \le f \\ \hline (Band XXV operation) & 2010 < f < 2055 & 2055  \le f < 2080 & 2080  \le f < 12750 \\ \hline F_{uw} & MHz & 799 < f < 844 & 774 < f < 799 & 979  \le f < 12750 \\ \hline UE transmitted mean & dBm & 20 (for Power class 3 and 3bis) \\ \hline \end{array}$	< 716							
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	_ 7.10							
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	≥ / 00							
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	. 700							
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	≤ 798							
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	< 1015							
	<u> </u>							
(Band XXVI operation) $909 < f < 954$ $954 \le f < 979$ $979 \le f < 12750$ UE transmitted meandBm20 (for Power class 3 and 3bis)	< 0.40							
UE transmitted mean dBm 20 (for Power class 3 and 3bis)	≤ 849							
10 /fair Danier alace 4)								
power 18 (for Power class 4)								
	Note 2							
	For 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent channel selectivity in							
subclause 7.5.1 and subclause 7.6.1 shall be applied.								
Band II operation For 1915≤f ≤2005 MHz, the appropriate in-band blocking or adjacent channel selectivity in								
subclause 7.5.1 and subclause 7.6.1 shall be applied	subclause 7.5.1 and subclause 7.6.1 shall be applied							
Band III operation For 1790≤f ≤1895 MHz, the appropriate in-band blocking or adjacent channel selectivity in								
subclause 7.5.1 and subclause 7.6.1 shall be applied.								
Band IV operation For 2095≤f≤2170 MHz, the appropriate in-band blocking or adjacent channel selectivity in s								
	upciaust							
7.5.1 and subclause 7.6.1 shall be applied.	olo::==							
Band V operation For 854≤f≤909 MHz, the appropriate in-band blocking or adjacent channel selectivity in sub	ciause							
7.5.1 and subclause 7.6.1 shall be applied.								
Band VI operation For 860≤f≤900 MHz, the appropriate in-band blocking or adjacent channel selectivity in sub	clause							
7.5.1 and subclause 7.6.1 shall be applied.								

Band VII operation	For 2605 ≤ f ≤ 2705 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band VIII operation	For $910 \le f \le 975$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band IX operation	For 1829.9≤f≤ 1894.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band X operation	For 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XI operation	For 1460.9≤f≤ 1510.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XII operation	For $714 \le f \le 761$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XIII operation	For $731 \le f \le 771$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XIV operation	For $743 \le f \le 783$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XIX operation	For 860≤f≤905 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XX operation	For 776≤f≤836 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XXI operation	For 1480.9≤f ≤1525.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
Band XXII operation	For 3495≤ f ≤3605 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied. Note 2
Band XXV operation	For 1915≤f ≤2010 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied
Band XXVI operation	For 844≤f≤909 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied.
NOTE	For the UE which supports both Band XI and Band XXI operating frequencies, the Out of band blocking is FFS.
NOTE 2	The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refer to the DPCH\_Ec<REFSENS> and the DPCH<REFÎ<sub>or</sub>> as specified in Table 7.2.

## 7.6.2A Additional requirement for DC-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AA. Out-of-band band blocking is defined for an unwanted interfering signal falling more than 15 MHz below or above the UE receive band.

For Table 7.7AA in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7AA in frequency range 4, up to 8 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

Table 7.7AA: Out of band blocking for DC-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4			
HS-PDSCH_Ec	dBm /	<refsens>+3 dB</refsens>	<refsens>+3 dB</refsens>	<refsens>+3 dB</refsens>	<refsens> +3 dB</refsens>			
110 1 20011_20	3.84 MHz	CINET OLIVOZIO GB	VIVEI OLIVOZIO GB	THE OLIVONIO GD	CITET OF 10 0P			
Îor	dBm /	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>			
-	3.84 MHz			2.				
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15	-15			
Fuw	MHz	2050 <f <2095<="" td=""><td>2025 <f td="" ≤2050<=""><td>1&lt; f ≤2025</td><td>-</td></f></td></f>	2025 <f td="" ≤2050<=""><td>1&lt; f ≤2025</td><td>-</td></f>	1< f ≤2025	-			
(Band I operation)		2185 <f <2230<="" td=""><td>2230 ≤f &lt;2255</td><td>2255≤f&lt;12750</td><td></td></f>	2230 ≤f <2255	2255≤f<12750				
F <sub>uw</sub>	MHz	1870 <f <1915<="" td=""><td>1845 <f td="" ≤1870<=""><td>1&lt; f ≤1845</td><td>1850 ≤ f ≤ 1910</td></f></td></f>	1845 <f td="" ≤1870<=""><td>1&lt; f ≤1845</td><td>1850 ≤ f ≤ 1910</td></f>	1< f ≤1845	1850 ≤ f ≤ 1910			
(Band II operation)		2005 <f 2050="" 2075≤f<12750<="" <2050="" <2075="" td="" ≤f=""></f>						
F <sub>uw</sub>	MHz	1745 <f <1790<="" td=""><td>1720 <f 1745<="" td="" ≤=""><td>1&lt; f ≤1720</td><td>-</td></f></td></f>	1720 <f 1745<="" td="" ≤=""><td>1&lt; f ≤1720</td><td>-</td></f>	1< f ≤1720	-			
(Band III operation)		1895 <f <1940<="" td=""><td>1940≤f &lt; 1965</td><td>1965≤f&lt;12750</td><td></td></f>	1940≤f < 1965	1965≤f<12750				
F <sub>uw</sub>	MHz	2050< f <2095	2025< f ≤2050	1< f ≤2025	-			
(Band IV operation)		2170< f <2215	2215≤ f < 2240	2240≤f<12750				
F <sub>uw</sub>	MHz	809< f <854	784< f ≤809	1< f ≤784	824 ≤ f ≤ 849			
(Band V operation)		909< f <954	954≤ f < 979	979≤f<12750				
F <sub>uw</sub>	MHz	815 < f < 860	790 < f ≤ 815	1 < f ≤ 790	-			
(Band VI operation)		900 < f < 945	945 ≤ f < 970	970 ≤ f < 12750				
F <sub>uw</sub>	MHz	2570 < f < 2605	na	1 < f ≤ 2570	-			
(Band VII operation)		2705 < f < 2750	2750 ≤ f < 2775	2775 ≤ f < 12750				
Fuw	MHz	865 < f < 910	840 < f ≤ 865	1 < f ≤ 840	-			
(Band VIII operation)		975 < f < 1020	1020 ≤ f < 1045	1045 ≤ f < 12750				
Fuw	MHz	1784.9 < f < 1829.9	1759.9 < f ≤ 1784.9	1 < f ≤ 1759.9	-			
(Band IX operation)		1894.9 < f < 1939.9	1939.9 ≤ f < 1964.9	1964.9 ≤ f < 12750				
Fuw	MHz	2050 < f < 2095	2025 < f ≤ 2050	1 < f ≤ 2025	-			
(Band X operation)		2185 < f < 2230	2230 ≤ f < 2255	2255 ≤f< 12750				
F <sub>uw</sub>	MHz	1415.9 < f < 1460.9	1390.9 < f ≤ 1415.9	1 < f ≤ 1390.9	-			
(Band XI operation)		1510.9 < f < 1555.9	1555.9 ≤ f < 1580.9	1580.9 ≤ f < 12750				
F <sub>uw</sub>	MHz	669 < f < 714	643 < f ≤ 669	1 < f ≤ 644	699 ≤ f ≤ 716			
(Band XII operation)		761 < f < 806 806 ≤ f < 831 831 ≤f< 12750						
F <sub>uw</sub>	MHz	686 < f < 731	61 < f ≤ 686	1 < f ≤ 661	776 ≤ f ≤ 788			
(Band XIII operation)		771 < f < 816	816 ≤ f < 841	841 ≤f< 12750				
Fuw	MHz	698 < f < 743	673 < f ≤ 698	1 < f ≤ 673	788 ≤ f ≤ 798			
(Band XIV operation)		783 < f < 828	828 ≤ f < 853	853 ≤f< 12750				
Fuw	MHz	815 < f < 860	790 < f ≤ 815	1 < f ≤ 790	-			
(Band XIX operation)		905 < f < 950	950 ≤ f < 975	975 ≤ f < 12750				
F <sub>uw</sub>	MHz	731< f <776	706 < f ≤ 731	1 < f ≤ 706	-			
(Band XX operation)		836< f <881	881 ≤ f < 906	906 ≤ f < 12750				
F <sub>uw</sub>	MHz	1435.9 < f < 1480.9	1410.9 < f ≤ 1435.9	1 < f ≤ 1410.9	-			
(Band XXI operation)		1525.9 < f < 1570.9	1570.9 ≤ f < 1595.9	1595.9 ≤ f < 12750				
F <sub>uw</sub>	MHz	3450 <f <3495<="" td=""><td>3425 <f 3450<="" td="" ≤=""><td>1&lt; f ≤3425</td><td>-</td></f></td></f>	3425 <f 3450<="" td="" ≤=""><td>1&lt; f ≤3425</td><td>-</td></f>	1< f ≤3425	-			
(Band XXII operation)		3605 <f <3650<="" td=""><td>3650≤f &lt; 3675</td><td>3675≤f&lt;12750</td><td></td></f>	3650≤f < 3675	3675≤f<12750				
F <sub>uw</sub>	MHz	1870 <f <1915<="" td=""><td>1845 <f td="" ≤1870<=""><td>1&lt; f ≤1845</td><td>1850 ≤ f ≤ 1915</td></f></td></f>	1845 <f td="" ≤1870<=""><td>1&lt; f ≤1845</td><td>1850 ≤ f ≤ 1915</td></f>	1< f ≤1845	1850 ≤ f ≤ 1915			
(Band XXV operation)		2010 <f <2055<="" td=""><td>2055 ≤f &lt;2080</td><td>2080≤f&lt;12750</td><td></td></f>	2055 ≤f <2080	2080≤f<12750				
F <sub>uw</sub>	MHz	799< f <844	774 < f ≤799	1< f ≤774	814 ≤ f ≤ 849			
(Band XXVI operation)		909< f <954	954 ≤ f < 979	979 ≤ f < 12750				
UE transmitted mean	dBm			lass 3 and 3bis)				
power			18 (for Pov	ver class 4)				
	Note 2							
Band I operation			opriate in-band blocking	g or adjacent channel s	electivity in			
			.6.1A shall be applied.					
Band II operation	For 1915≤f ≤2005 MHz, the appropriate in-band blocking or adjacent channel selectivity in							
			.6.1A shall be applied					
Band III operation	For 1790≤f ≤1895 MHz, the appropriate in-band blocking or adjacent channel selectivity in							
D 107	subclause 7.5.2 and subclause 7.6.1A shall be applied.							
Band IV operation	For 2095≤f≤2170 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause							
D 11/ "		ubclause 7.6.1A shall						
Band V operation			iate in-band blocking or	r adjacent channel sele	ctivity in subclause			
Dend \/I ====+'		ubclause 7.6.1A shall		di	ations to 1			
Band VI operation			iate in-band blocking of	r adjacent channel sele	ctivity in subclause			
	7.5.2 and subclause 7.6.1A shall be applied.							

Band VII operation	For 2605 ≤ f ≤ 2705 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band VIII operation	For $910 \le f \le 975$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band IX operation	For 1829.9≤f≤ 1894.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band X operation	For 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XI operation	For 1460.9≤f≤ 1510.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XII operation	For $714 \le f \le 761$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XIII operation	For $731 \le f \le 771$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XIV operation	For $743 \le f \le 783$ MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XIX operation	For 860≤f≤905 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XX operation	For 776≤f≤836 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XXI operation	For 1480.9≤f ≤1525.9 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
Band XXII operation	For 3495≤ f ≤3605 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied. Note 2
Band XXV operation	For 1915≤f ≤2010 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.1 and subclause 7.6.1 shall be applied
Band XXVI operation	For 844≤f≤909 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1A shall be applied.
NOTE	For the UE which supports both Band XI and Band XXI operating frequencies, the Out of band blocking is FFS.
NOTE 2	The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2A.

## 7.6.2B Additional requirement for DB-DC-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AB. Out-of-band blocking is defined for an unwanted interfering signal falling at frequencies outside of frequency regions defined as the UE receive bands extended by 15 MHz at their lower and upper ends. For Table 7.7AB in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7AB in frequency range 4, up to 8 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

Table 7.7AB: Out of band blocking for DB-DC-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4		
HS-PDSCH_Ec	dBm / 3.84 MHz	<refsens>+3 dB</refsens>	<refsens>+3 dB</refsens>	<refsens>+3 dB</refsens>	<refsens> +3 dB</refsens>		
Îor	dBm / 3.84 MHz	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>		
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15	-15		
Fuw	MHz	865< f <910	840< f ≤865	1< f ≤840	-		
(DB-DC-HSDPA		975< f <1020	1020≤ f <1045	1045≤ f <2025			
Configuration 1)		2050< f <2095	2025< f ≤2050	2255< f ≤ 12750			
		2185< f <2230	2230≤ f <2255				
Fuw	MHz	1870< f <1915	1845< f ≤1870	1< f ≤1845	1850≤ f ≤1910		
(DB-DC-HSDPA		2005< f <2095	2215≤ f <2240	2240≤ f <12750			
Configuration 2)		2170< f <2215					
F <sub>uw</sub>	MHz	809< f <854	784< f ≤809	1< f ≤784	824 ≤ f ≤ 849		
(DB-DC-HSDPA		909< f <954	954≤ f < 979	979≤ f <2025			
Configuration 3)		2050< f <2095	2025< f ≤2050	2255< f ≤12750			
		2185< f <2230	2230≤ f <2255				
Fuw	MHz	1415.9 < f < 1460.9	1390.9 < f ≤ 1415.9	1 < f ≤ 1390.9	-		
(DB-DC-HSDPA		1510.9 < f < 1555.9	1555.9 ≤ f < 1580.9	1580.9 ≤ f < 2025			
Configuration 4)		2050 <f <2095<="" td=""><td>2025 <f td="" ≤2050<=""><td>2255≤f&lt;12750</td><td></td></f></td></f>	2025 <f td="" ≤2050<=""><td>2255≤f&lt;12750</td><td></td></f>	2255≤f<12750			
		2185 <f <2230<="" td=""><td>2230 ≤f &lt;2255</td><td></td><td></td></f>	2230 ≤f <2255				
Fuw	MHz	809< f <854	784< f ≤809	1< f ≤784	824 ≤ f ≤ 849		
(DB-DC-HSDPA		909< f <954	954≤ f < 979	979< f ≤1845	1850 ≤ f ≤ 1910		
Configuration 5)		1870 <f <1915<="" td=""><td>1845 <f td="" ≤1870<=""><td>2075≤f&lt;12750</td><td></td></f></td></f>	1845 <f td="" ≤1870<=""><td>2075≤f&lt;12750</td><td></td></f>	2075≤f<12750			
		2005 <f <2050<="" td=""><td>2050 ≤f &lt;2075</td><td></td><td></td></f>	2050 ≤f <2075				
UE transmitted	dBm		20 (for Power c	lass 3 and 3bis)			
mean power			18 (for Pov	ver class 4)			
DB-DC-HSDPA				priate in-band blocking	or adjacent channel		
Configuration 1	selectivity in	n subclause 7.5.2 and	subclause 7.6.1A shal	l be applied.			
DB-DC-HSDPA				ropriate in-band blockii	ng or adjacent		
Configuration 2			7.5.2 and subclause 7.6				
DB-DC-HSDPA				riate in-band blocking	or adjacent channel		
Configuration 3			subclause 7.6.1A shal				
DB-DC-HSDPA	For 1460.9≤f≤ 1510.9 MHz and 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent						
Configuration 4	channel sel	lectivity in subclause 7	7.5.2 and subclause 7.6	6.1A shall be applied.			
DB-DC-HSDPA							
Configuration 5	selectivity in		subclause 7.6.1A shal		Dagu Perî		

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2B.

# 7.6.2C Additional requirement for single band 4C-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AC and Table 7.7AD. Out-of-band band blocking is defined for an unwanted interfering signal falling more than 15 MHz below or above the UE receive band. The requirement is not applicable for dual uplink operation.

For Table 7.7AC in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7AC in frequency range 4, up to 8 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

Table 7.7AC: Test parameters for out of band blocking, single band 4C-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15	-15
F <sub>uw</sub> (Single band 4C-HSDPA Configuration I-3)	MHz	2050 <f <2095<br="">2185<f <2230<="" td=""><td>2025 <f ≤2050<br="">2230 ≤f &lt;2255</f></td><td>1&lt; f ≤2025 2255≤f&lt;12750</td><td>-</td></f></f>	2025 <f ≤2050<br="">2230 ≤f &lt;2255</f>	1< f ≤2025 2255≤f<12750	-
F <sub>uw</sub> (Single band 4C-HSDPA Configuration II-3, II-4)	MHz	1870 <f <1915<br="">2005<f <2050<="" td=""><td>1845 <f ≤1870<br="">2050 ≤f &lt;2075</f></td><td>1&lt; f ≤1845 2075≤f&lt;12750</td><td>1850 ≤ f ≤ 1910</td></f></f>	1845 <f ≤1870<br="">2050 ≤f &lt;2075</f>	1< f ≤1845 2075≤f<12750	1850 ≤ f ≤ 1910
UE transmitted mean power	dBm		20 (for Power cla 18 (for Pow	,	
Single band 4C-HSDPA Configuration I-3	For 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.3 and subclause 7.6.1C.1 shall be applied.				
Single band 4C-HSDPA Configuration II-3, II-4				d blocking or adja 6.1C.1 shall be ap	

Table 7.7AD: Out of band blocking requirements, single band 4C-HSDPA

Single band 4C-HSDPA Configuration	Parameter	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4	UL-DL carrier separation
I-3	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
1-3	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	Wilhimum			
11.2.11.4	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
II-3, II-4	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	iviii iimum			

NOTE: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C.

# 7.6.2D Additional requirement for dual band 4C-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AE and Table 7.7AF. Out-of-band blocking is defined for an unwanted interfering signal falling at frequencies outside of frequency regions defined as the UE receive bands extended by 15 MHz at their lower and upper ends. The requirement is not applicable for dual uplink operation.

For Table 7.7AF in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7AF in frequency range 4, up to 8 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

Table 7.7AE: Test parameters for out of band blocking, dual band 4C-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15	-15
F <sub>uw</sub> (Dual band 4C-HSDPA Configuration I-2-VIII-1, I-3-VIII-1, I- 2-VIII-2, I-1-VIII-2)	MHz	865< f <910 975< f <1020 2050< f <2095 2185< f <2230	840< f ≤865 1020≤ f <1045 2025< f ≤2050 2230≤ f <2255	1< f ≤840 1045≤ f <2025 2255< f ≤ 12750	-
F <sub>uw</sub> (Dual band 4C-HSDPA Configuration II-1-IV-2, II-2-IV-1, II-2-IV-2)	MHz	1870< f <1915 2005< f <2095 2170< f <2215	1845< f ≤1870 2215≤ f <2240	1< f ≤1845 2240≤ f <12750	1850≤ f ≤1910
F <sub>uw</sub> (Dual band 4C-HSDPA Configuration I-1-V-2, I-2-V-1, I-2-V-2)	MHz	809< f <854 909< f <954 2050< f <2095 2185< f <2230	784< f ≤809 954≤ f < 979 2025< f ≤2050 2230≤ f <2255	1< f ≤784 979≤ f <2025 2255< f ≤12750	824 ≤ f ≤ 849
F <sub>uw</sub> (Dual band 4C-HSDPA Configuration II-1-V-2)	MHz	809< f <854 909< f <954 1870< f <1915 2005< f <2050	784< f≤809 954≤ f < 979 1845< f ≤1870 2050≤ f <2075	1< f ≤784 979≤ f <1845 2075< f ≤12750	824 ≤ f ≤ 849, 1850 ≤ f ≤1910
UE transmitted mean power	dBm		20 (for Power cla 18 (for Power		
Dual band 4C-HSDPA Configuration I-2-VIII-1, I-3-VIII-1, I- 2-VIII-2, I-1-VIII-2		975 MHz and 2095 annel selectivity in			
Dual band 4C-HSDPA Configuration II-1-IV-2, II-2-IV-1, II-2-IV-2	For 1915≤f ≤2005 MHz and 2095≤f ≤2070 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1D.1 shall be applied.				
Dual band 4C-HSDPA Configuration I-1-V-2, I-2-V-1, I-2-V-2	For 854≤f≤909 MHz and 2095≤f ≤2185 MHz, the appropriate in-band blocking or adjacent channel selectivity in subclause 7.5.2 and subclause 7.6.1D.1 shall be applied.				
Dual band 4C-HSDPA Configuration II-1-V-2		909 MHz and 1915 annel selectivity in			

Table 7.7AF: Out of band blocking requirements, dual band 4C-HSDPA

Dual band 4C-HSDPA Configuration	DL Band	UL Band	Parameter	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4	UL-DL carrier separation
	I	ı	HS-PDSCH_Ec (dBm/3.84MHz)	+3 dB	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
I-2-VIII-1 I-3-VIII-1, I-2-	VIII	'	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
VIII-2, I-1-VIII- 2	Ι	VIII	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
	VIII	VIII	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
	П	П	HS-PDSCH_Ec (dBm/3.84MHz)	+3 dB	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
II-1-IV-2 II-2-IV-1	IV	"	Î <sub>or</sub> (dBm/3.84MHz)		<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
II-2-IV-2	П	IV	HS-PDSCH_Ec (dBm/3.84MHz)		<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
	IV	IV	Î <sub>or</sub> (dBm/3.84MHz)		<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
	I	ı	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
I-1-V-2 I-2-V-1	٧	'	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
I-2-V-1	Ι	<b>V</b>	HS-PDSCH_Ec (dBm/3.84MHz)		<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
	V	V	Î <sub>or</sub> (dBm/3.84MHz)		<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
	II	П	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
II-1-V-2	٧	=	Î <sub>or</sub> (dBm/3.84MHz)		<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
	II	<b>V</b>	HS-PDSCH_Ec (dBm/3.84MHz)	+3 dB	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
	٧	V	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2D.

# 7.6.2E Additional requirement for single band 8C-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AG and Table 7.7AH. Out-of-band band blocking is defined for an unwanted interfering signal falling more than 15 MHz below or above the UE receive band. The requirement is not applicable for dual uplink operation.

For Table 7.7AG in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

For Table 7.7AG in frequency range 4, up to 8 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 Spurious response are applicable.

Table 7.7AG: Test parameters for out of band blocking, single band 8C-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15	-15
F <sub>uw</sub> (Single band 8C-HSDPA Configuration I-8)	MHz	2050 <f <2095<br="">2185<f <2230<="" td=""><td>2025 <f ≤2050<br="">2230 ≤f &lt;2255</f></td><td>1&lt; f ≤2025 2255≤f&lt;12750</td><td>-</td></f></f>	2025 <f ≤2050<br="">2230 ≤f &lt;2255</f>	1< f ≤2025 2255≤f<12750	-
UE transmitted mean power	dBm	dBm 20 (for Power class 3 and 3bis) 18 (for Power class 4)			
Single band 8C-HSDPA Configuration I-8			appropriate in-ban and subclause 7.		

Table 7.7AH: Out of band blocking requirements, single band 8C-HSDPA

Singe band 8C-HSDPA Configuration	Parameter	Frequency range 1	Frequency range 2	Frequency range 3	Frequency range 4	UL-DL carrier separation
I-8	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
1-0	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum			

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E.

# 7.6.2F Additional requirement for single band NC-4C-HSDPA (Out-of-band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7AI and Table 7.7AJ. Out-of-band band blocking is defined for an unwanted interfering signal falling more than 15 MHz below or above the UE receive band. The requirement is not applicable for dual uplink operation.

For Table 7.7AI in frequency range 1, 2 and 3, up to 24 exceptions per received cell are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size. For these exceptions the requirements of clause 7.7 spurious response are applicable.

Table 7.7AI: Test parameters for out of band blocking, single band NC-4C-HSDPA

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3
I <sub>blocking</sub> (CW)	dBm	-44	-30	-15
F <sub>uw</sub> (Single band NC-4C-HSDPA Configuration I-1-5-1, I-2-5-1, I-3-10-1)	MHz	2050 <f <2095<br="">2185<f <2230<="" td=""><td>2025 <f ≤2050<br="">2230 ≤f &lt;2255</f></td><td>1&lt; f ≤2025 2255≤f&lt;12750</td></f></f>	2025 <f ≤2050<br="">2230 ≤f &lt;2255</f>	1< f ≤2025 2255≤f<12750
F <sub>uw</sub> (Single band NC-4C-HSDPA Configuration IV-1-5-1, IV-2-10-1, IV-2-15-2, IV-2-20-1, IV-2-25-2)	MHz	2050< f <2095 2170< f <2215	2025< f ≤2050 2215≤ f < 2240	1< f ≤2025 2240≤f<12750
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

Table 7.7AJ: Out of band blocking requirements, single band NC-4C-HSDPA

Single band NC-4C- HSDPA Configuration	Parameter	Frequency range 1	Frequency range 2	Frequency range 3	UL-DL carrier separation
1454125412404	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
I-1-5-1, I-2-5-1, I-3-10-1	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2-	HS-PDSCH_Ec (dBm/3.84MHz)	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	<refsens> +3 dB</refsens>	Minimum
15-2, IV-2-20-1, IV-2-25-2	Î <sub>or</sub> (dBm/3.84MHz)	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	<refî<sub>or&gt; + 3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E.

#### 7.6.3 Minimum requirement (Narrow band blocking)

The BER shall not exceed 0.001 for the parameters specified in Table 7.7A. This requirement is measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

Table 7.7A: Narrow band blocking characteristics

Parameter	Unit	Band II, IV, V, X, XXV,	Band III, VIII, XII, XIII,	
		XXVI	XIV	
DPCH_Ec	dBm/3.84 MHz	<refsens> + 10 dB</refsens>	<refsens> + 10 dB</refsens>	
Î <sub>or</sub>	dBm/3.84 MHz	<refî<sub>or&gt; + 10 dB</refî<sub>	<refî<sub>or&gt; + 10 dB</refî<sub>	
I <sub>blocking</sub> (GMSK)	dBm	-57	-56	
F <sub>uw</sub> (offset)	MHz	2.7	2.8	
UE transmitted mean	dBm	20 (for Power class 3 and 3bis)		
power	иын	18 (for Power class 4)		

NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the DPCH\_Ec<REFSENS> and the DPCH<REF $\hat{I}_{or}>$  as specified in Table 7.2.

# 7.6.3A Additional requirement for DC-HSDPA and DB-DC-HSDPA (Narrow band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7B. This requirement is measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

Table 7.7B: Narrow band blocking characteristics for DC-HSDPA

Parameter	Unit	Band II, IV, V, X, XXV,	Band III, VIII, XII, XIII,	
		XXVI	XIV	
HS-PDSCH_Ec	dBm/3.84 MHz	<refsens> + 10 dB</refsens>	<refsens> + 10 dB</refsens>	
Îor	dBm/3.84 MHz	<refî<sub>or&gt; + 10 dB</refî<sub>	<refî<sub>or&gt; + 10 dB</refî<sub>	
I <sub>blocking</sub> (GMSK)	dBm	-57	-56	
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7	±2.8	
UE transmitted mean	dBm	20 (for Power class 3 and 3bis)		
power	UDIII	18 (for Power class 4)		

NOTE 1:  $I_{blocking}(GMSK)$  is an interfering signal as defined in TS 45.004 [6]

- NOTE 2: For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset refers to the assigned channel frequencies of the individual cells.
- NOTE 3: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2A for DC-HSDPA and Table 7.2B for DB-DC-HSDPA.

## 7.6.3B Additional requirement for DC-HSUPA (Narrow band blocking)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7C and Table 7.7D. This requirement is measure of a receiver's ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

Table 7.7C: Narrow band blocking characteristics for DC-HSUPA

Parameter	Unit	Band II, IV, V, X, XXV, XXVI	Band III, VIII, XII, XIII, XIV
I <sub>blocking</sub> (GMSK)	dBm	-57	-56
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7	±2.8
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)	

- NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]
- NOTE 2: For DC-HSUPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used.

Table 7.7D: Reference input powers for narrow-band blocking, DC-HSUPA.

Operating Band	Unit	HS-PDSCH_Ec	Î <sub>or</sub>
II	dBm/3.84 MHz	-101	-90.7
III	dBm/3.84 MHz	-100	-89.7
IV	dBm/3.84 MHz	-102.8	-92.5
V	dBm/3.84 MHz	-100.9	-90.6
VIII	dBm/3.84 MHz	-98.5	-88.2
X	dBm/3.84 MHz	-102.8	-92.5
XII	dBm/3.84 MHz	N/A	N/A
XIII	dBm/3.84 MHz	N/A	N/A
XIV	dBm/3.84 MHz	N/A	N/A
XXV	dBm/3.84 MHz	-99.5	-89.2
XXVI	dBm/3.84 MHz	-98.5	-88.2

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and <  $\hat{I}_{or}$  > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

# 7.6.3C Additional requirement for single band 4C-HSDPA (Narrow band blocking)

This requirement is measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

#### 7.6.3C.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7DA and Table 7.7DB.

Table 7.7DA: Test parameters for narrow band blocking characteristics, single band 4C-HSDPA, single uplink operation

Parameter	Unit	Band II
I <sub>blocking</sub> (GMSK)	dBm	-57
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)

NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.7DB: Narrow band blocking requirements, single band 4C-HSDPA, single uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
II-3, II-4	II	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

#### 7.6.3C.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7DC and Table 7.7DD.

Table 7.7DC: Test parameters for narrow band blocking characteristics for single band 4C-HSDPA, dual uplink operation

Parameter	Unit	Band II
Iblocking (GMSK)	dBm	-57
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7

NOTE 1:  $I_{blocking}(GMSK)$  is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.7DD: Narrow band blocking requirements, single band 4C-HSDPA, dual uplink operation

Single ba 4C-HSDI Configura	PA	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
II-3, II-4	1	II	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

# 7.6.3D Additional requirement for dual band 4C-HSDPA (Narrow band blocking)

This requirement is measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

#### 7.6.3D.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7E and Table 7.7F.

Table 7.7E: Test parameters for narrow band blocking characteristics, dual band 4C-HSDPA, single uplink operation

Parameter	Unit	Band II, IV, V	Band VIII
I <sub>blocking</sub> (GMSK)	dBm	-57	-56
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7	±2.8
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)	

NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.7F: Narrow band blocking requirements, dual band 4C-HSDPA, single uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1	VIII	ı	<refsens>+10 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +10 dB$	Minimum
I-3-VIII-1, I-2- VIII-2, I-1-VIII- 2	VIII	VIII	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum
II-1-IV-2	II	Ш	<refsens>+10 dB</refsens>	<REFÎ <sub>or</sub> $>+10$ dB	Minimum
II-1-IV-2 II-2-IV-1	IV	Ш	<refsens>+10 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +10 dB$	Minimum
II-2-IV-1	II	IV	<refsens>+10 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +10 dB$	Minimum
11-2-1 V -2	IV	IV	<refsens>+10 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +10 dB$	Minimum
I-1-V-2	V	I	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum
I-2-V-1 I-2-V-2	V	V	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum
	II	Ш	<refsens>+10 dB</refsens>	<REFÎ <sub>or</sub> $>+10$ dB	Minimum
II-1-V-2	V	l II	<refsens>+10 dB</refsens>	<REFÎ <sub>or</sub> $>+10$ dB	Minimum
11-1-4-2	II	V	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum
	V	V	<refsens>+10 dB</refsens>	$\langle REF\hat{I}_{or}\rangle +10 dB$	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2D for dual band 4C-HSDPA.

#### 7.6.3D.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7G and Table 7.7H.

Table 7.7G: Test parameters for narrow band blocking characteristics for dual band 4C-HSDPA, dual uplink operation

Parameter	Unit	Band II, IV, V	Band VIII
Iblocking (GMSK)	dBm	-57	-56
F <sub>uw</sub> (offset) (NOTE 2)	MHz	±2.7	±2.8

NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.7H: Narrow band blocking requirements, dual band 4C-HSDPA, dual uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
I-2-VIII-1 I-3-VIII-1	VIII	I	-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-VIIII-2	VIII	I	-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
1-2-1111-2	VIII	VIII	-97.4	-87.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-1-VIIII-2	VIIII	VIII	-97.4	-87.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-1-IV-2	II	IV	-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11-1-10-2	IV	IV	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-2-IV-1	II	II	-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11-2-10-1	IV	11	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	II		-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-2-IV-2	IV	"	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11-2-10-2	II	IV	-100	-89.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	IV	IV	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-1-V-2	V	V	-99.8	-89.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-V-1	V	I	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-V-2	V	I	-101	-90.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-Z-V-Z	V	V	-99.8	-89.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11.4.1/.0	II	V	-100.3	-90	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-1-V-2	V	V	-99.8	-89.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

# 7.6.3E Additional requirement for single band NC-4C-HSDPA (Narrow band blocking)

This requirement is measure of a receiver"s ability to receive a W-CDMA signal at its assigned channel frequency in the presence of an unwanted narrow band interferer at a frequency, which is less than the nominal channel spacing.

#### 7.6.3E.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7I and Table 7.7J.

Table 7.7I: Test parameters for narrow band blocking characteristics, single band NC-4C-HSDPA, single uplink operation

Parameter	Unit	Band IV
Iblocking (GMSK)	dBm	-57
F <sub>uw</sub> (offset) (NOTE 2, 3)	MHz	±2.7
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)

NOTE 1: I<sub>blocking</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

NOTE 3: For single band NC-4C-HSPDA in-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the higher subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the lower subblock of carriers.

Table 7.7J: Narrow band blocking requirements, single band NC-4C-HSDPA, single uplink operation

Single band NC- 4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
IV-1-5-1, IV-2-10- 1, IV-2-15-2, IV-2- 20-1, IV-2-25-2	In- gap	IV	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10- 1, IV-2-15-2, IV-2- 20-1, IV-2-25-2	Out- of- gap	IV	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2E for single band NC-4C-HSDPA.

#### 7.6.3E.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.7K and Table 7.7L.

Table 7.7KTest parameters for narrow band blocking characteristics for single band NC-4C-HSDPA, dual uplink operation

Parameter	Unit	Band IV
I <sub>blocking</sub> (GMSK)	dBm	-57
F <sub>uw</sub> (offset) (NOTE 2, 3)	MHz	±2.7

NOTE 1:  $I_{blocking}$  (GMSK) is an interfering signal as defined in TS 45.004 [6]

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

NOTE 3: For single band NC-4C-HSPDA in-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the higher subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the lower subblock of carriers.

Table 7.7L: Narrow band blocking requirements, single band NC-4C-HSDPA, dual uplink operation

Single band NC-4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
IV-2-10-1, IV-2- 15-2, IV-2-20-1, IV-2-25-2	In- gap	IV	-102.8	-92.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
IV-2-10-1, IV-2- 15-2, IV-2-20-1, IV-2-25-2	Out- of- gap	IV	-102.8	-92.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.13.

## 7.7 Spurious response

## 7.7.1 Minimum requirement

Spurious response is a measure of the receiver"s ability to receive a wanted signal on its assigned channel frequency without exceeding a given degradation due to the presence of an unwanted CW interfering signal at any other frequency at which a response is obtained i.e. for which the out of band blocking limit as specified in subclause 7.6.2 is not met.

The BER shall not exceed 0.001 for the parameters specified in Table 7.8.

**Table 7.8: Spurious Response** 

Parameter	Unit	Level
DPCH_Ec	dBm/3.84 MHz	<refsens> +3 dB</refsens>
Î <sub>or</sub>	dBm/3.84 MHz	<refî<sub>or&gt; +3 dB</refî<sub>
I <sub>blocking</sub> (CW)	dBm	-44
Fuw	MHz	Spurious response frequencies
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note

Note: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE 1: <REFSENS> and <REF $\hat{I}_{or}$ > refer to the DPCH\_Ec<REFSENS> and the DPCH<REF $\hat{I}_{or}$ > as specified in Table 7.2.

# 7.7.2 Additional requirement for DC-HSDPA, DB-DC-HSDPA, single band/dual band 4C-HSDPA and single band 8C-HSDPA and single band NC-4C-HSDPA

Spurious response is a measure of the receiver"s ability to receive a wanted signal on its assigned channel frequency without exceeding a given degradation due to the presence of an unwanted CW interfering signal at any other frequency at which a response is obtained i.e. for which the out of band blocking limit as specified in subclause 7.6.2A, 7.6.2B, 7.6.2C, 7.6.2D or 7.6.2E or 7.6.2F is not met.

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.8A. The requirement is not applicable for dual uplink operation.

**Parameter** Unit Level HS-PDSCH\_Ec <REFSENS> +3 dB dBm/3.84 MHz dBm/3.84 MHz <REFÎ<sub>or</sub>> +3 dB -44 Iblocking (CW) dBm MHz Spurious response frequencies 20 (for Power class 3 and 3bis) UE transmitted mean dBm 18 (for Power class 4) power Note 1

**Table 7.8A: Spurious Response** 

Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE 1: <REFSENS> and <REFÎ<sub>or</sub>> refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2A for DC-HSDPA, Table 7.2B for DB-DC-HSDPA, Table 7.2C for single band 4C-HSDPA, Table 7.2D for dual band 4C-HSDPA and Table 7.2E for single band 8C-HSDPA and 7.2F for single band NC-4C-HSDPA.

#### 7.8 Intermodulation characteristics

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receiver a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

#### 7.8.1 Minimum requirement

The BER shall not exceed 0.001 for the parameters specified in Table 7.9.

**Table 7.9: Receive intermodulation characteristics** 

Parameter	Unit	Level				
DPCH_Ec	dBm/3.84 MHz	<refsens> +3 dB</refsens>				
Î <sub>or</sub>	dBm/3.84 MHz	<refî<sub>or</refî<sub>	> +3 dB			
I <sub>ouw1</sub> (CW)	dBm	-4	<b>l</b> 6			
I <sub>ouw2</sub> mean power (modulated)	dBm	-46				
F <sub>uw1</sub> (offset)	MHz	10	-10			
F <sub>uw2</sub> (offset)	MHz	20	-20			
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1				
Note 1: The LIF transmitted	Note 1: The LIE transmitted mean power shall be reduced by 0.5dB for a LIE					

Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the DPCH\_Ec<REFSENS> and the DPCH<REF $\hat{I}_{or}>$  as specified in Table 7.2.

#### 7.8.1A Additional requirement for DC-HSDPA and DB-DC-HSDPA

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AA.

Table 7.9AA: Receive intermodulation characteristics

Parameter	Unit	Level	
HS-PDSCH_Ec	dBm/3.84 MHz	<refsens> +3 dB</refsens>	
Îor	dBm/3.84 MHz	<refî<sub>or</refî<sub>	> +3 dB
I <sub>ouw1</sub> (CW)	dBm	-4	16
I <sub>ouw2</sub> mean power (modulated)	dBm	-46	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20 -20	
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1	

Note 1: The UE transmitted mean power shall be reduced by 0.5dB for a UE operating in band XXII.

NOTE 1:  $I_{ouw2}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset refers to the assigned channel frequencies of the individual cells.

NOTE 3: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2A.

#### Additional requirement for DC-HSUPA 7.8.1B

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AB and Table 7.9AC.

Table 7.9AB: Receive intermodulation characteristics

Parameter	Unit	Level		
I <sub>ouw1</sub> (CW)	dBm	-46		
I <sub>ouw2</sub> mean power (modulated)	dBm	-46		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20	
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4) Note 1		
Note: The UE transmitted n	nean power shall be reduced	by 0.5dB for a UE	operating in	

band XXII.

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For DC-HSUPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used.

Table 7.9AC: Reference input powers for intermod, DC-HSUPA.

Operati	ng Band	Unit	HS-PDSCH_Ec	Îor		
	1	dBm/3.84 MHz	-105	-94.7		
II		dBm/3.84 MHz	-105.3	-95		
	II	dBm/3.84 MHz	-104.1	-93.8		
I	V	dBm/3.84 MHz	-105	-94.7		
,	V	dBm/3.84 MHz	-102	-91.7		
\	/I	dBm/3.84 MHz	-102.2	-91.9		
١	/II	dBm/3.84 MHz	-105.3	-95		
V	<b>/</b>	dBm/3.84 MHz	-99.8	-89.5		
I	X	dBm/3.84 MHz	-104.6	-94.3		
	X	dBm/3.84 MHz	-105	-94.7		
	ΧI	dBm/3.84 MHz	-100	-89.7		
>	(II	dBm/3.84 MHz	N/A	N/A		
X	(111	dBm/3.84 MHz	N/A	N/A		
X	IV	dBm/3.84 MHz	N/A	N/A		
X	ΊΧ	dBm/3.84 MHz	-102.2	-91.9		
>	(Χ	dBm/3.84 MHz	TBD	TBD		
X	ΧI	dBm/3.84 MHz	-100	-89.7		
X	XII	dBm/3.84 MHz	-104.1	-93.8		
X	XV	dBm/3.84 MHz	-103.5	-93.2		
X	ΧVI	dBm/3.84 MHz	-99.8	-89.5		
NOTE 1			and III and Band IX operating			
	reference	sensitivity level of TBD	dBm <ref_ec,intermod> shall ap</ref_ec,intermod>	oply for Band IX. The		
	corresponding <refî<sub>or,intermod&gt; is TBD dBm</refî<sub>					
NOTE 2						
	reference input power level is FFS.					
NOTE 3						
		c > and < I <sub>or</sub> > are allow	ved to be increased by an amo	unt defined in Table		
	7.12.					
NOTE 4	For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the <					

## 7.8.1C Additional requirement for single band 4C-HSDPA

#### 7.8.1C.1 Single uplink operation

Table 7.13.

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AD and Table 7.9AE.

HS-PDSCH\_Ec > and  $< \hat{l}_{or} >$  are allowed to be increased by an amount defined in

Table 7.9AD: Test parameters for receive intermodulation characteristics, single band 4C-HSDPA, single uplink operation

Parameter	Unit	Level		
I <sub>ouw1</sub> (CW)	dBm	-46		
l <sub>ouw2</sub> mean power (modulated)	dBm	-46		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10 -10		
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20 -20		
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.9AE: Intermodulation requirements, single band 4C-HSDPA, single uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-3		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-3, II-4	II	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

#### 7.8.1C.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AF and Table 7.9AG.

Table 7.9AF: Receive intermodulation characteristics for single band 4C-HSDPA, dual uplink operation

Parameter	Unit	Level	
I <sub>ouw1</sub> (CW)	dBm	-46	
I <sub>ouw2</sub> mean power (modulated)	dBm	-4	6
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20

NOTE 1:  $I_{ouw2}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.9AG: Intermodulation requirements, single band 4C-HSDPA, dual uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
I-3	I	-105	-94.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-3, II-4	Ш	-105.3	-95.0	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

## 7.8.1D Additional requirement for dual band 4C-HSDPA

#### 7.8.1D.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AH and Table 7.9AI.

Table 7.9AH: Test parameters for receive intermodulation characteristics, dual band 4C-HSDPA, single uplink operation

Parameter	Unit	Level		
I <sub>ouw1</sub> (CW)	dBm	-46		
I <sub>ouw2</sub> mean power (modulated)	dBm	-46		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20 -20		
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

NOTE 1:  $I_{ouw2}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.9Al: Intermodulation requirements, dual band 4C-HSDPA, single uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1	ı	1	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-3-VIII-1, I-2-	VIII	ı	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
VIII-2, I-1-VIII-	ı	VIII	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
2	VIII	VIII	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
11.4.11/.0	II	Ш	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-1-IV-2 II-2-IV-1	IV	Ш	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-2-IV-1	II	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
11-2-1 V -2	IV	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-1-V-2	ı		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-1-V-2	V	Į.	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
I-2-V-1	ı	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
1-Z-V-Z	V	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
	II		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
II-1-V-2	V	l	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
	II	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
	V	V	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2D for dual band 4C-HSDPA.

#### 7.8.1D.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AJ and Table 7.9AK.

Table 7.9AJ: Receive intermodulation characteristics for dual band 4C-HSDPA, dual uplink operation

Parameter	Unit	Lev	⁄el
I <sub>ouw1</sub> (CW)	dBm	-4	6
I <sub>ouw2</sub> mean power (modulated)	dBm	-46	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20
UE transmitted mean power	dBm	20 (for Power cla 18 (for Pow	

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.9AK: Intermodulation requirements, dual band 4C-HSDPA, dual uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation	
I-2-VIII-1	I	ı	-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-3-VIII-1	VIII	] !	-103.6	-93.3	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	I		-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-2-VIII-2	VIII	'	-103.6	-93.3	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-2-111-2	I	VIII	-104.8	-94.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	VIII	VIII	-98.7	-88.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-VIII-2	I	VIII	-104.8	-94.5	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-1-1111-2	VIII	VIII	-98.7	-88.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	II	IV	-103.1	-92.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-1-IV-2	IV	IV	-103.4	-93.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-2-IV-1	II	п		-103.1	-92.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11-2-17-1	IV		-103.4	-93.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	II	II	-103.1	-92.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
II-2-IV-2	IV		-103.4	-93.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
11-2-14-2	II	IV	-103.1	-92.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	IV	10	-103.4	-93.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-\/-2	I	V	-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-1-V-2	V	V	-101.1	-90.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
I-2-V-1	I	ı	-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
1-Z-V-1	V	'	-103.9	-93.6	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	

	1	-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
101/0	V	'	-103.9	-93.6	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-V-2	I	I V	-104.2	-93.9	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	V		V	-101.1	-90.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)
II-1-V-2 V	V	-104.4	-94.1	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum	
	V	V	-101.1	-90.8	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

### 7.8.1E Additional requirement for single band 8C-HSDPA

#### 7.8.1E.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AL and Table 7.9AM.

Table 7.9AL: Test parameters for receive intermodulation characteristics, single band 8C-HSDPA, single uplink operation

Parameter	Unit	Le	vel
I <sub>ouw1</sub> (CW)	dBm	-46	
I <sub>ouw2</sub> mean power (modulated)	dBm	-46	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis 18 (for Power class 4)	

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 8C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency, and positive offset refers to the assigned channel frequency of the highest carrier frequency.

Table 7.9AM: Intermodulation requirements, single band 8C-HSDPA, single uplink operation

Single band 8C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-8		<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}>$  as specified in Table 7.2E for single band 8C-HSDPA.

#### 7.8.1C.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AN and Table 7.9AO.

Table 7.9AN: Receive intermodulation characteristics for single band 8C-HSDPA, dual uplink operation

Parameter	Unit	Lev	/el	
I <sub>ouw1</sub> (CW)	dBm	-46		
I <sub>ouw2</sub> mean power (modulated)	dBm	-46		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20	

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band 8C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency, and positive offset refers to the assigned channel frequency of the highest carrier frequency.

Table 7.9AO: Intermodulation requirements, single band 8C-HSDPA, dual uplink operation

	Single band 8C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation		
	I-8	1	-105	-94.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum		
Ī	NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH_Ec >							
	and < Î <sub>or</sub> > are allowed to be increased by an amount defined in Table 7.12.  NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-							

PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.13.

## 7.8.1F Additional requirement for single band NC-4C-HSDPA

#### 7.8.1F.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AP and Table 7.9AQ.

Table 7.9AP: Test parameters for receive intermodulation characteristics, single band NC-4C-HSDPA, single uplink operation

Parameter	Unit	Le	vel
I <sub>ouw1</sub> (CW)	dBm	-46	
I <sub>ouw2</sub> mean power (modulated)	dBm	dBm -46	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis 18 (for Power class 4)	

NOTE 1:  $I_{ouw2}$  (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

Table 7.9AQ: Intermodulation requirements, single band NC-4C-HSDPA, single uplink operation

Single band NC-4C- HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-1-5-1, I-2-5-1, I-3-10-1	Out-of- gap	1	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum
IV-1-5-1, IV-2-10-1, IV-2- 15-2, IV-2-20-1, IV-2-25-2	Out-of- gap	IV	<refsens>+3 dB</refsens>	<refî<sub>or&gt;+3 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ<sub>or</sub>> refer to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ<sub>or</sub>> as specified in Table 7.2E for single band NC-4C-HSDPA.

#### 7.8.1F.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9AR and Table 7.9AS.

Table 7.9AR: Receive intermodulation characteristics for single band NC-4C-HSDPA, dual uplink operation

Parameter	Unit	Level		
I <sub>ouw1</sub> (CW)	dBm	-46		
I <sub>ouw2</sub> mean power (modulated)	dBm	-46		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	10	-10	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	20	-20	

NOTE 1: I<sub>ouw2</sub> (modulated) consists of the common channels needed for tests as specified in Table C.7 and 16 dedicated data channels as specified in Table C.6.

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

Table 7.9AS: Intermodulation requirements, single band NC-4C-HSDPA, dual uplink operation

Single band NC- 4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
I-2-5-1, I-3-10-1	Out-of- gap	ı	-105	-94.7	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
IV-2-10-1, IV-2- 15-2, IV-2-20-1, IV-2-25-2	Out-of- gap	IV	-104.7	-94.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and <  $\hat{I}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

## 7.8.2 Minimum requirement (Narrow band)

The BER shall not exceed 0.001 for the parameters specified in Table 7.9A.

Parameter Band III. VIII. XII. XIII. Unit Band II, IV, V, X, XXV, XXVI XIV DPCH Ec dBm/3.84 MHz <REFSENS>+ 10 dB <REFSENS>+ 10 dB <REFÎ $_{or}>$  + 10 dB dBm/3.84 MHz <REFÎ<sub>or</sub>> +10 dB I<sub>ouw1</sub> (CW) dBm -44 -43 I<sub>ouw2</sub> (GMSK) dBm -44 -43 F<sub>uw1</sub> (offset) 3.5 3.6 MHz -3.5 -3.6 F<sub>uw2</sub> (offset) -5.9 6.0 MHz 5.9 -6.0 UE transmitted mean 20 (for Power class 3 and 3bis) dBm 18 (for Power class 4) power

Table 7.9A: Receive intermodulation characteristics

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: <REFSENS> and <REF $\hat{I}_{or}>$  refer to the DPCH\_Ec<REFSENS> and the DPCH<REF $\hat{I}_{or}>$  as specified in Table 7.2.

# 7.8.2A Additional requirement for DC-HSDPA and DB-DC-HSDPA (Narrow band)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9B.

Parameter Unit Band II, IV, V, X, Band III, VIII, XII, XIII, XXV, XXVI XIV HS-PDSCH\_Ec dBm/3.84 MHz <REFSENS>+ 10 dB <REFSENS>+ 10 dB <REFÎ<sub>or</sub>> +10 dB dBm/3.84 MHz <REFÎor> + 10 dB I<sub>ouw1</sub> (CW) dBm -44 -43 Iouw2 (GMSK) -44 -43 dBm F<sub>uw1</sub> (offset) -3.5 MHz 3.5 3.6 -3.6 (NOTE 2) F<sub>uw2</sub> (offset) MHz 5.9 -5.9 6.0 -6.0 (NOTE 2) UE transmitted mean 20 (for Power class 3 and 3bis) dBm 18 (for Power class 4) power

Table 7.9B: Receive intermodulation characteristics

NOTE 1:  $I_{ouw2}$  (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For DC-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used. For DB-DC-HSDPA, offset refers to the assigned channel frequencies of the individual cells.

NOTE3: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2A for DC-HSDPA and Table 7.2B for DB-DC-HSDPA.

## 7.8.2B Additional requirement for DC-HSUPA (Narrow band)

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9C and Table 7.9D.

Table 7.9C: Receive intermodulation characteristics

Parameter	Unit	Band II, IV, V, X,XXV, XXVI		Band III, VIII, XII, XIII, XIV	
I <sub>ouw1</sub> (CW)	dBm	-44	4	-43	
I <sub>ouw2</sub> (GMSK)	dBm	-44		-43	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	3.6	-3.6
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	6.0	-6.0
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)			

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For DC-HSUPA, negative offset refers to the assigned channel frequency of the lowest carrier frequency used and positive offset refers to the assigned channel frequency of the highest carrier frequency used.

Table 7.9D: Reference input powers for intermodulation, narrow-band, DC-HSUPA.

Operating Band	Unit	HS-PDSCH_Ec	Î <sub>or</sub>
II	dBm/3.84 MHz	-86.9	-76.6
III	dBm/3.84 MHz	-85.7	-75.4
IV	dBm/3.84 MHz	-86.9	-76.6
V	dBm/3.84 MHz	-86.9	-76.6
VIII	dBm/3.84 MHz	-85.6	-75.3
X	dBm/3.84 MHz	-86.9	-76.6
XII	dBm/3.84 MHz	N/A	N/A
XIII	dBm/3.84 MHz	N/A	N/A
XIV	dBm/3.84 MHz	N/A	N/A
XXV	dBm/3.84 MHz	-84.7	-74.4
XXVI	dBm/3.84 MHz	-85.6	-75.3

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.12.

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and <  $\hat{l}_{or}$  > are allowed to be increased by an amount defined in Table 7.13.

## 7.8.2C Additional requirement for single band 4C-HSDPA (Narrow band)

#### 7.8.2C.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9DA and Table 7.9DB.

Table 7.9DA: Test parameters for receive narrow-band intermodulation characteristics, single band 4C-HSDPA, single uplink operation

Parameter	Unit	Band II		
I <sub>ouw1</sub> (CW)	dBm	-44		
I <sub>ouw2</sub> (GMSK)	dBm	-44		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5 -3.5		
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9 -5.9		
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

NOTE 1: I<sub>ouw</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.9DB: Narrow-band intermodulation requirements, single band 4C-HSDPA, single uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
II-3, II-4	Ш	<refsens>+15.5 dB</refsens>	<refî<sub>or&gt;+15.5 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REFÎ $_{or}>$  refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REFÎ $_{or}>$  as specified in Table 7.2C for single band 4C-HSDPA.

#### 7.8.2C.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9DC and Table 7.9DD.

Table 7.9DC: Test parameters for receive narrow-band intermodulation characteristics, single band 4C-HSDPA, dual uplink operation

Parameter	Unit	Band II		
I <sub>ouw1</sub> (CW)	dBm	-44		
I <sub>ouw2</sub> (GMSK)	dBm	-44		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For single band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequencies, and positive offset refers to the assigned channel frequency of the highest carrier frequencies.

Table 7.9DD: Narrow-band intermodulation requirements, single band 4C-HSDPA, dual uplink operation

Single band 4C-HSDPA Configuration	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
II-3, II-4	II	-86.9	-76.6	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

## 7.8.2D Additional requirement for dual band 4C-HSDPA (Narrow band)

#### 7.8.2D.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9E and Table 7.9F.

Table 7.9E: Test parameters for receive narrow-band intermodulation characteristics, dual band 4C-HSDPA, single uplink operation

Parameter	Unit	Band II, IV, V		Band VIII	
I <sub>ouw1</sub> (CW)	dBm	-44	1	-43	
I <sub>ouw2</sub> (GMSK)	dBm	-44	1	-43	
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	3.6	-3.6
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	6.0	-6.0
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)			

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.9F: Narrow-band intermodulation requirements, dual band 4C-HSDPA, single uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
I-2-VIII-1 I-3-VIII-1, I-2-	VIII	1	<refsens>+16.6 dB</refsens>	<refî<sub>or&gt;+16.6 dB</refî<sub>	Minimum
VIII-2, I-1-VIII- 2	VIII	VIII	<refsens>+16.6 dB</refsens>	<refî<sub>or&gt;+16.6 dB</refî<sub>	Minimum
11.4.11/.0	II	Ш	<refsens>+17 dB</refsens>	<refî<sub>or&gt;+17 dB</refî<sub>	Minimum
II-1-IV-2 II-2-IV-1	IV	11	<refsens>+18.9 dB</refsens>	<refî<sub>or&gt;+18.9 dB</refî<sub>	Minimum
II-2-IV-1	II	IV	<refsens>+17 dB</refsens>	<refî<sub>or&gt;+17 dB</refî<sub>	Minimum
11-2-1 V -2	IV	IV	<refsens>+18.9 dB</refsens>	<refî<sub>or&gt;+18.9 dB</refî<sub>	carrier separation  Minimum  Minimum  Minimum  Minimum
I-1-V-2 I-2-V-1	V	I	<refsens>+17 dB</refsens>	<refî<sub>or&gt;+17 dB</refî<sub>	Minimum
I-2-V-2	V	V	<refsens>+17 dB</refsens>	<refî<sub>or&gt;+17 dB</refî<sub>	Minimum
	II	li li	<refsens>+16.5 dB</refsens>	<refî<sub>or&gt;+16.5dB</refî<sub>	Minimum
II-1-V-2	V	"	<refsens>+16.5 dB</refsens>	<refî<sub>or&gt;+16.5dB</refî<sub>	Minimum
	II	V	<refsens>+16.5dB</refsens>	<refî<sub>or&gt;+16.5 dB</refî<sub>	Minimum
	V	V	<refsens>+16.5dB</refsens>	<refî<sub>or&gt;+16.5dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}$ > refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}$ > as specified in Table 7.2D for dual band 4C-HSDPA.

#### 7.8.2D.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9G and Table 7.9H.

Table 7.9G: Test parameters for receive narrow-band intermodulation characteristics, dual band 4C-HSDPA, dual uplink operation

Parameter	Unit	Band II, IV, V		Ban	d VIII
I <sub>ouw1</sub> (CW)	dBm	-44		-4	43
I <sub>ouw2</sub> (GMSK)	dBm	-44		-4	43
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	3.6	-3.6
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	6.0	-6.0

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For dual band 4C-HSDPA, negative offset refers to the assigned channel frequency of the lowest carrier frequenc(ies) in each band, and positive offset refers to the assigned channel frequency of the highest carrier frequenc(ies) in each band.

Table 7.9H: Narrow-band intermodulation requirements, dual band 4C-HSDPA, dual uplink operation

Dual band 4C-HSDPA Configuration	DL Band	UL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
I-2-VIII-1 I-3-VIII-1	VIII	1	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
10.7/11.0	VIII	ı	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-VIII-2	VIII	VIII	-84.6	-74.3	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-1-VIII-2	VIII	VIII	-84.6	-74.3	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II 4 IV 0	II	D./	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-1-IV-2	IV	IV	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11.0.11/.4	II		-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-Z-IV-1	II-2-IV-1	II	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	II		-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-2-IV-2	IV	II	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11-2-17-2	II	D./	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
	IV	IV	-84.7	-74.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-1-V-2	V	V	-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-V-1	V	I	-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
10.7/ 0	V	I	-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
I-2-V-2	V	V	-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
11.4.1/2	II		-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum
II-1-V-2	V	V	-85.7	-75.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

# 7.8.2E Additional requirement for single band NC-4C-HSDPA (Narrow band)

#### 7.8.2E.1 Single uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9I and Table 7.9J.

Table 7.9I: Test parameters for receive narrow-band intermodulation characteristics, single band NC-4C-HSDPA, single uplink operation

Parameter	Unit	Band IV		
I <sub>ouw1</sub> (CW)	dBm	-44		
I <sub>ouw2</sub> (GMSK)	dBm	-44		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	
UE transmitted mean power	dBm	20 (for Power class 3 and 3bis) 18 (for Power class 4)		

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

Table 7.9J: Narrow-band intermodulation requirements, single band NC-4C-HSDPA, single uplink operation

Single band NC- 4C-HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UL-DL carrier separation
IV-1-5-1, IV-2-10-1, IV-2-15-2, IV-2-20-1, IV-2-25-2	Out-of- gap	IV	<refsens>+10 dB</refsens>	<refî<sub>or&gt;+10 dB</refî<sub>	Minimum

NOTE: <REFSENS> and <REF $\hat{I}_{or}$ > refers to the HS-PDSCH\_Ec<REFSENS> and the HS-PDSCH<REF $\hat{I}_{or}$ > as specified in Table 7.2E for single band NC-4C-HSDPA.

#### 7.8.2E.2 Dual uplink operation

The BLER measured on each individual cell shall not exceed 0.1 for the parameters specified in Table 7.9K and Table 7.9L.

Table 7.9DC: Test parameters for receive narrow-band intermodulation characteristics, single band NC-4C-HSDPA, dual uplink operation

Parameter	Unit	Band IV		
I <sub>ouw1</sub> (CW)	dBm	-44		
I <sub>ouw2</sub> (GMSK)	dBm	-44		
F <sub>uw1</sub> (offset) (NOTE 2)	MHz	3.5	-3.5	
F <sub>uw2</sub> (offset) (NOTE 2)	MHz	5.9	-5.9	

NOTE 1: I<sub>ouw2</sub> (GMSK) is an interfering signal as defined in TS 45.004 [6].

NOTE 2: For single band NC-4C-HSPDA out-of-gap, negative offset refers to the assigned channel frequency of the lowest carrier belonging to the lower subblock of carriers, and positive offset refers to the assigned channel frequency of the highest carrier belonging to the higher subblock of carriers.

Table 7.9L: Narrow-band intermodulation requirements, single band NC-4C-HSDPA, dual uplink operation

Single band NC-4C- HSDPA Configuration	Test type	DL Band	HS-PDSCH_Ec (dBm/3.84MHz)	Î <sub>or</sub> (dBm/3.84MHz)	UE transmitted mean power (dBm)	UL-DL carrier separation
IV-2-10-1, IV- 2-15-2, IV-2- 20-1, IV-2-25-2	Out-of- gap	IV	-86.7	-76.4	20 (for Power class 3 and 3bis) 18 (for Power class 4)	Minimum

NOTE 1 For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA the < HS-PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.12.

## 7.9 Spurious emissions

The spurious emissions power is the power of emissions generated or amplified in a receiver that appear at the UE antenna connector. The spurious emission is verified per antenna connector with the other(s) terminated.

### 7.9.1 Minimum requirement

The power of any narrow band CW spurious emission shall not exceed the maximum level specified in Table 7.10 and Table 7.11

Table 7.10: General receiver spurious emission requirements

Frequency Band	Measurement Bandwidth	Maximum level	Note
30MHz ≤ f < 1GHz	100 kHz	-57 dBm	
1GHz ≤ f ≤ 12.75 GHz	1 MHz	-47 dBm	
12.75GHz $\leq$ f $\leq$ 5 <sup>th</sup> harmonic of the upper frequency edge of the DL operating band in GHz	1 MHz	-47 dBm	Note 1
NOTE 1: Applies only for Bar	nd XXII.		

NOTE 2 For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC the < HS-PDSCH\_Ec > and < Î<sub>or</sub> > are allowed to be increased by an amount defined in Table 7.13.

Table 7.11: Additional receiver spurious emission requirements

Band	Frequency Band	Measurement Bandwidth	Maximum level	Note
I	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm	
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm	
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *	
	925 MHz ≤ f ≤ 935 MHz	100 kHz 3.84MHz	-67 dBm * -60 dBm	
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *	
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *	
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	
	1920 MHz ≤ f ≤ 1980 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	UE receive band
	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm	
	2570 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm	
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm	
II	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm	
	1850 MHz ≤ f ≤ 1915 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	1930 MHz ≤ f ≤ 1990 MHz	3.84 MHz	-60 dBm	UE receive band
	1990 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm	
Ш	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	791 MHz ≤ f ≤ 821 MHz	3.84 MHz	-60 dBm	
	852 MHz ≤ f ≤ 869 MHz	1 MHz	-50 dBm	
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm*	
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm*	
		3.84 MHz	-60 dBm	
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm*	
	1475.9 MHz $\leq$ f $\leq$ 1510.9 MHz 1710 MHz $\leq$ f $\leq$ 1785 MHz	3.84 MHz 3.84 MHz	-60 dBm -60 dBm	UE transmit band in URA_PCH,
		0.5.1.1.1	00.15	Cell_PCH and idle state
	1805 MHz ≤ f ≤ 1880 MHz	3.84 MHz	-60 dBm	UE receive band
	1884.5 MHz ≤ f ≤ 1915.7 MHz	3.84 MHz	-41 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2570 MHz	1 MHz	-50 dBm	
	2570 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm	
1\ /	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm	
IV	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	LIE transmit has 11 LIBA BOLL
	1710 MHz ≤ f < 1755 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	

	2110 MHz≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	UE receive band
	$2496 \text{ MHz} \le f \le 2690 \text{ MHz}$	1 MHz	-50 dBm	OL receive band
V	$717 \text{ MHz} \le f \le 728 \text{ MHz}$	1 MHz	-50 dBm	
•	$703 \text{ MHz} \le f \le 803 \text{ MHz}$	1 MHz	-50 dBm	
	$703 \text{ WHz} \le 1 \le 803 \text{ WHz}$ $729 \text{ MHz} \le \text{f} \le 746 \text{ MHz}$	3.84 MHz	-60 dBm	
	$746 \text{ MHz} \le f \le 756 \text{ MHz}$	3.84 MHz	-60 dBm	
	$758 \text{ MHz} \le f \le 768 \text{ MHz}$	3.84 MHz	-60 dBm	
	$824 \text{ MHz} \le f \le 849 \text{ MHz}$	3.84 MHz	-60 dBm	UE transmit band in URA_PCH,
				Cell_PCH and idle state
	859 MHz ≤ f ≤ 869 MHz	1 MHz	-27 dBm	
	869 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	UE receive band
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
\ /I	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm	
VI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	815 MHz ≤ f ≤ 830 MHz	3.84 MHz	-60 dBm	115 11. 1154 5011
	830 MHz ≤ f ≤ 840 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	840 MHz ≤ f ≤ 845 MHz	3.84 MHz	-60 dBm	
	860 MHz ≤ f ≤ 875 MHz	3.84 MHz	-60 dBm	
	875 MHz ≤ f ≤ 885 MHz	3.84 MHz	-60 dBm	UE receive band
	885 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm	
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm	
VII	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	758 MHz ≤ f ≤ 791 MHz	1 MHz	-50 dBm	
	791 MHz ≤ f < 821 MHz	3.84 MHz	-60 dBm	
	852 MHz ≤ f ≤ 869 MHz	1 MHz	-50 dBm	
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *	
	925 MHz ≤ f ≤ 935 MHz	100 kHz -3.84 MHz	-67 dBm * -60 dBm	
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *	
	1805 MHz ≤ f ≤ 1880 MHz	100 kHz	-71 dBm *	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2500 MHz ≤ f ≤ 2570 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH,
				Cell_PCH and idle state
	2570 MHz ≤ f ≤ 2620 MHz	1 MHz	-60 dBm	
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	UE receive band
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm	
\ ///·	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm	
VIII	703 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	791 MHz ≤ f < 821 MHz	3.84 MHz	-60 dBm	
	860 MHz ≤ f < 890 MHz	3.84 MHz	-60 dBm	HE in HDA DOU Call DOU said
	880 MHz ≤ f ≤ 915 MHz	3.84 MHz	-60 dBm	UE in URA_PCH, Cell_PCH and idle state
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm *	
	925 MHz ≤ f ≤ 935 MHz	100 kHz 3.84 MHz	-67 dBm * -60 dBm	UE receive band
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm *	UE receive band
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
	1805 MHz < f ≤ 1880 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2570MHz	1 MHz	-50 dBm	
	2570 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm	
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	-50 dBm	
IX	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm	

1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
1749.9 MHz ≤ f ≤ 1784.9 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	UE receive band
2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm	

			1	
X	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	
	768 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	
	1710 MHz ≤ f < 1770 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	UE receive band
ΧI	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm	
	1427.9 MHz ≤ f ≤ 1447.9 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	1447.9 MHz ≤ f ≤ 1462.9 MHz	3.84 MHz	-60 dBm	
	1475.9 MHz ≤ f ≤ 1495.9 MHz	3.84 MHz	-60 dBm	UE receive band
	1495.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm	
	699 MHz ≤ f ≤ 716 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	728 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	UE receive band
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	
XII	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	
ΛII	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm	
	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	UE receive band
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	
XIII	776 MHz ≤ f ≤ 788 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm	
	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	-60 dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	-60 dBm	
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	-60 dBm	UE receive band
XIV	788 MHz ≤ f ≤ 798 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
	859 MHz ≤ f < 894 MHz	3.84 MHz	-60 dBm	
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm	
	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	815 MHz ≤ f ≤ 830 MHz	3.84 MHz	-60 dBm	
VIV	830 MHz ≤ f ≤ 845 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
XIX	860 MHz ≤ f ≤ 875 MHz	3.84 MHz	-60 dBm	
	875 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	UE receive band
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm	
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm	
•				•

	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	
	$2110 \text{ MHz} \le f \le 2170 \text{ MHz}$	3.84 MHz	-60 dBm	
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm	
XX	791 MHz ≤ f < 821 MHz	3.84 MHz	-60 dBm	UE receive band
	832 MHz < f < 862 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH,
				Cell_PCH and idle state
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm*	
	925 MHz $\leq$ f $\leq$ 935 MHz	100 kHz 3.84 MHz	-67 dBm* -60 dBm	
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm*	
	1805 MHz ≤ f ≤ 1880 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm	
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	
	3400 MHz ≤ f ≤ 3800 MHz	3.84 MHz	-60 dBm	
	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	860 MHz ≤ f ≤ 890 MHz	3.84 MHz	-60 dBm	
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm	
	1427.9 MHz ≤ f ≤ 1447.9 MHz	3.84 MHz	-60 dBm	
XXI	1447.9 MHz ≤ f ≤ 1462.9 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell PCH and idle state
^^1	1475.9 MHz ≤ f ≤ 1495.9 MHz	3.84 MHz	-60 dBm	Gen_i Ori and idle state
	$1495.9 \text{ MHz} \le f \le 1510.9 \text{ MHz}$	3.84 MHz	-60 dBm	UE receive band
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm	02.000.00.00
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2545 MHz ≤ f ≤ 2575 MHz	1 MHz	-50 dBm	
	758 MHz ≤ f ≤ 803 MHz	1 MHz	-50 dBm	
	791 MHz ≤ f < 821 MHz	3.84 MHz	-60 dBm	
	852 MHz ≤ f ≤ 869 MHz	1 MHz	-50 dBm	
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm*	
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm*	
	923 WII IZ S I S 939 WII IZ	3.84 MHz	-60 dBm	
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm*	
	1805 MHz ≤ f ≤ 1880 MHz	3.84 MHz	-60 dBm	
XXII	1880 MHz ≤ f ≤ 1920 MHz	3.84 MHz	-60 dBm	
7.5.11	2010 MHz ≤ f ≤ 2025 MHz	3.84 MHz	-60 dBm	
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm	
	2300 MHz ≤ f ≤ 2400 MHz	3.84 MHz	-60 dBm	
	2570 MHz ≤ f ≤ 2620 MHz	3.84 MHz	-60 dBm	
	2620 MHz ≤ f ≤ 2690 MHz	3.84 MHz	-60 dBm	LIE : III LIBA BOLL
	3410 MHz ≤ f ≤ 3490 MHz	3.84 MHz	-60 dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	3510 MHz ≤ f ≤ 3590 MHz	3.84 MHz	-60 dBm	UE receive band
	3600 MHz ≤ f ≤ 3800 MHz	3.84 MHz	-50 dBm	
	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
	729 MHz ≤ f ≤ 746 MHz	3.84 MHz	[-60] dBm	
	746 MHz ≤ f ≤ 756 MHz	3.84 MHz	[-60] dBm	
	758 MHz ≤ f ≤ 768 MHz	3.84 MHz	[-60] dBm	
	852 MHz ≤ f ≤ 859 MHz	1 MHz	-50 dBm	
VVV	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	[-60] dBm	HE top again here to the A. B.C.
XXV	1850 MHz ≤ f ≤ 1915 MHz	3.84 MHz	[-60] dBm	UE transmit band in URA_PCH, Cell_PCH and idle state
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	[-60] dBm	UE receive band
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	[-60] dBm	
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	[-50] dBm	
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	[-50] dBm	
	3400 MHz ≤ f ≤ 3800 MHz	1 MHz	[-50] dBm	
	717 MHz ≤ f ≤ 728 MHz	1 MHz	-50 dBm	
VV\/I	758 MHz ≤ f ≤ 799 MHz	1 MHz	-50 dBm	
XXVI	799 MHz ≤ f ≤ 803 MHz	1 MHz 3.84 MHz	-40 dBm -60 dBm	
1	729 MHz $\leq$ f $\leq$ 756 MHz 758 MHz $\leq$ f $\leq$ 768 MHz	3.84 MHz	-60 dBm	
	1 00 IVII 12 2 1 2 1 00 IVII 12	O.OT IVII IZ	OU GEITI	

	859 MHz ≤ f ≤ 894 MHz	3.84 MHz	-60 dBm		
	945 MHz ≤ f ≤ 960 MHz	3.84 MHz	-60 dBm		
	1475.9 MHz ≤ f ≤ 1510.9 MHz	3.84 MHz	-60 dBm		
	1525 MHz ≤ f ≤ 1559 MHz	1 MHz	-50 dBm		
	1839.9 MHz ≤ f ≤ 1879.9 MHz	3.84 MHz	-60 dBm		
	1884.5 MHz ≤ f ≤1919.6 MHz	300 kHz	-41 dBm		
	1930 MHz ≤ f ≤ 1995 MHz	3.84 MHz	-60 dBm		
	2010 MHz ≤ f ≤ 2025 MHz	1 MHz	-50 dBm		
	2110 MHz ≤ f ≤ 2170 MHz	3.84 MHz	-60 dBm		
	2180 MHz ≤ f ≤ 2200 MHz	1 MHz	-50 dBm		
	2300 MHz ≤ f ≤ 2400 MHz	1 MHz	-50 dBm		
	2496 MHz ≤ f ≤ 2690 MHz	1 MHz	-50 dBm **		
	3400 MHz ≤ f ≤3800 MHz	1 MHz	-50 dBm		
Note *	The measurements are made on frequencies which are integer multiples of 200 kHz. As				
	exceptions, up to five measurements with a level up to the applicable requirements defined in				
	Table 7.10 are permitted for each UARFCN used in the measurement				

# 7.10 Reference input power adjustment for a dual band device

For the UE which supports DB-DC-HSDPA configuration in Table 5.0aA, the reference input powers (HS-PDSCH\_Ec and  $\hat{l}_{or}$ ) of core requirements specified in subclause 7.6.1B, 7.6.1C.2, 7.6.3B, 7.8.1B, 7.8.1C.2, and 7.8.2B are allowed to be increased by the amount given in Table 7.12 for the applicable bands.

Table 7.12: Allowed increase of HS-PDSCH Ec and Î<sub>or</sub> for UE which supports DB-DC-HSDPA.

DB-DC-HSDPA Configuration	Allowed increase of HS-PDSCH Ec and $\hat{I}_{or}$ (dB)	Applicable bands
1	0.5	I, VIII
2	1	II, IV
3	0.5	I, V

For the UE which supports dual band 4C-HSDPA configuration in Table 5.0aC, the reference input powers (HS-PDSCH\_Ec and  $\hat{l}_{or}$ ) of core requirements specified in subclause 7.6.1B, 7.6.1C.2, 7.6.3B, 7.8.1B, 7.8.1C.2, and 7.8.2B are allowed to be increased by the amount given in Table 7.13 for the applicable bands.

Table 7.13: Allowed increase of HS-PDSCH Ec and Î<sub>or</sub> for UE which supports dual band 4C-HSDPA.

Dual Band 4C-HSDPA Configuration	Allowed increase of HS-PDSCH Ec and $\hat{I}_{or}$ (dB)	Applicable bands
I-2-VIII-1		
I-3-VIII-1	0.5	I, VIII
I-1-VIII-2	0.5	1, VIII
I-2-VIII-2		
II-1-IV-2		
II-2-IV-1	1	II, IV
II-2-IV-2		
I-1-V-2		
I-2-V-1	0.5	I, V
I-2-V-2		
II-1-V-2	0.5	II, V

# 8 Performance requirement

#### 8.1 General

The performance requirements for the UE in this subclause are specified for the measurement channels specified in Annex A, the propagation conditions specified in Annex B and the Down link Physical channels specified in Annex C. Unless stated DL power control is OFF. Unless otherwise stated the performance requirements are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UE(s) with more than one receiver antenna connector the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective sections below.

For a UE which supports optional enhanced performance requirements type1 for DCH and an alternative requirement is specified, the UE shall meet only the enhanced performance requirement type1. For those cases where the enhanced performance requirements type1 are not specified, the minimum performance requirements shall apply.

# 8.2 Demodulation in static propagation conditions

- 8.2.1 (void)
- 8.2.2 (void)

### 8.2.3 Demodulation of Dedicated Channel (DCH)

The receive characteristic of the Dedicated Channel (DCH) in the static environment is determined by the Block Error Ratio (BLER). BLER is specified for each individual data rate of the DCH. DCH is mapped into the Dedicated Physical Channel (DPCH).

#### 8.2.3.1 Minimum requirement

For the parameters specified in Table 8.5 the average downlink  $\frac{DPCH - E_c}{I_{or}}$  power ratio shall be below the specified

value for the BLER shown in Table 8.6. These requirements are applicable for TFCS size 16.

Table 8.5: DCH parameters in static propagation conditions

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference		P-CPICH			
$\hat{I}_{or}/I_{oc}$	dB	-1			
$I_{oc}$	dBm/3.84 MHz	-60			
Information Data Rate	kbps	12.2	64	144	384

Table 8.6: DCH requirements in static propagation conditions

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1	-16.6 dB	10 <sup>-2</sup>
2	-13.1 dB	10 <sup>-1</sup>
2	-12.8 dB	10 <sup>-2</sup>
2	-9.9 dB	10 <sup>-1</sup>
3	-9.8 dB	10 <sup>-2</sup>
4	-5.6 dB	10 <sup>-1</sup>
	-5.5 dB	10 <sup>-2</sup>

# 8.3 Demodulation of DCH in multi-path fading propagation conditions

### 8.3.1 Single Link Performance

The receive characteristics of the Dedicated Channel (DCH) in different multi-path fading environments are determined by the Block Error Ratio (BLER) values. BLER is measured for the each of the individual data rate specified for the DPCH. DCH is mapped into in Dedicated Physical Channel (DPCH).

#### 8.3.1.1 Minimum requirement

For the parameters specified in Table 8.7, 8.9 , 8.11, 8.13 and 8.14A the average downlink  $\frac{DPCH\_E_c}{I_{or}}$  power ratio shall

be below the specified value for the BLER shown in Table 8.8, 8.10, 8.12, 8.14 and 8.14B. If the UE supports optional enhanced performance requirements type1 for DCH then for the parameters specified in Table 8.10A the average downlink  $\underline{PPCH_{-}E_{c}}$  power ratio shall be below the specified value for the BLER shown in 8.10B, and Test 5, Test 6

and Test 8 shall be replaced by Test 5a, Test 6a and Test 8a. These requirements are applicable for TFCS size 16.

Table 8.7: Test Parameters for DCH in multi-path fading propagation conditions (Case 1)

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference		P-CPICH			
$\hat{I}_{or}/I_{oc}$	dB	9			
$I_{oc}$	dBm/3.84 MHz	-60			
Information Data Rate	kbps	12.2	64	144	384

Table 8.8: Test requirements for DCH in multi-path fading propagation conditions (Case 1)

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1	-15.0 dB	10 <sup>-2</sup>
2	-13.9 dB	10 <sup>-1</sup>
	-10.0 dB	10 <sup>-2</sup>
3	-10.6 dB	10 <sup>-1</sup>
3	-6.8 dB	10 <sup>-2</sup>
1	-6.3 dB	10 <sup>-1</sup>
4	-2.2 dB	10 <sup>-2</sup>

Table 8.9: DCH parameters in multi-path fading propagation conditions (Case 2)

Parameter	Unit	Test 5	Test 6	Test 7	Test 8
Phase reference		P-CPICH			
$\hat{I}_{or}/I_{oc}$	dB	-3	-3	3	6
$I_{oc}$	dBm/3.84 MHz	-60			
Information Data Rate	kbps	12.2	64	144	384

Table 8.10: DCH requirements in multi-path fading propagation (Case 2)

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
5	-7.7 dB	10 <sup>-2</sup>
6	-6.4 dB	10 <sup>-1</sup>
O	-2.7 dB	10 <sup>-2</sup>
7	-8.1 dB	10 <sup>-1</sup>
1	-5.1 dB	10 <sup>-2</sup>
8	-5.5 dB	10 <sup>-1</sup>
	-3.2 dB	10 <sup>-2</sup>

Table 8.10A: DCH parameters in multi-path fading propagation conditions (VA30) for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 5a	Test 6a	Test 8a
Phase reference		P-CPICH		
$\hat{I}_{or}/I_{oc}$	dB	-3	-3	6
$I_{oc}$	dBm/3.84 MHz	-60		
Information Data Rate	kbps	12.2	64	384

Table 8.10B: DCH requirements in multi-path fading propagation (VA30) for UE supporting the enhanced performance requirements type1 for DCH

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
5a	-14.4 dB	10 <sup>-2</sup>
6a	-11.4 dB	10 <sup>-1</sup>
0a	-10.0 dB	10 <sup>-2</sup>
8a	-9.3 dB	10 <sup>-1</sup>
oa	-8.0 dB	10 <sup>-2</sup>

Table 8.11: DCH parameters in multi-path fading propagation conditions (Case 3)

Parameter	Unit	Test 9	Test 10	Test 11	Test 12
Phase reference		P-CPICH			
$\hat{I}_{or}/I_{oc}$	dB	-3	-3	3	6
$I_{oc}$	dBm/3.84 MHz		-	60	
Information Data Rate	kbps	12.2	64	144	384

Table 8.12: DCH requirements in multi-path fading propagation conditions (Case 3)

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
9	-11.8 dB	10 <sup>-2</sup>
	-8.1 dB	10 <sup>-1</sup>
10	-7.4 dB	10 <sup>-2</sup>
	-6.8 dB	10 <sup>-3</sup>
	-9.0 dB	10 <sup>-1</sup>
11	-8.5 dB	10 <sup>-2</sup>
	-8.0 dB	10 <sup>-3</sup>
	-5.9 dB	10 <sup>-1</sup>
12	-5.1 dB	10 <sup>-2</sup>
	-4.4 dB	10 <sup>-3</sup>

Table 8.13: DCH parameters in multi-path fading propagation conditions (Case 1) with S-CPICH

Parameter	Unit	Test 13	Test 14	Test 15	Test 16
Phase reference		S-CPICH			
$\hat{I}_{or}/I_{oc}$	dB	9			
$I_{oc}$	dBm/3.84 MHz	-60			
Information Data Rate	kbps	12.2	64	144	384

Table 8.14: DCH requirements in multi-path fading propagation conditions (Case 1) with S-CPICH

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
13	-15.0 dB	10 <sup>-2</sup>
14	-13.9 dB	10 <sup>-1</sup>
14	-10.0 dB	10 <sup>-2</sup>
15	-10.6 dB	10 <sup>-1</sup>
15	-6.8 dB	10 <sup>-2</sup>
16	-6.3 dB	10 <sup>-1</sup>
10	-2.2 dB	10 <sup>-2</sup>

Table 8.14A: DCH parameters in multi-path fading propagation conditions (Case 6)

Parameter	Unit	Test 17	Test 18	Test 19	Test 20
Phase reference	P-CPICH				
$\hat{I}_{or}/I_{oc}$	dB	-3	-3	3	6
$I_{oc}$	dBm/3.84 MHz	-60			
Information Data Rate	kbps	12.2	64	144	384

Table 8.14B: DCH requirements in multi-path fading propagation conditions (Case 6)

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
17	-8.8 dB	10 <sup>-2</sup>
	-5.1 dB	10 <sup>-1</sup>
18	-4.4 dB	10 <sup>-2</sup>
	-3.8 dB	10 <sup>-3</sup>
	-6.0 dB	10 <sup>-1</sup>
19	-5.5 dB	10 <sup>-2</sup>
	-5.0 dB	10 <sup>-3</sup>
	-2.9 dB	10 <sup>-1</sup>
20	-2.1 dB	10 <sup>-2</sup>
	-1.4 dB	10 <sup>-3</sup>

Table 8.14C: (void)

Table 8.14D: (void)

Table 8.14E: (void)

Table 8.14F: (void)

# 8.4 Demodulation of DCH in moving propagation conditions

### 8.4.1 Single link performance

The receive single link performance of the Dedicated Channel (DCH) in dynamic moving propagation conditions are determined by the Block Error Ratio (BLER) values. BLER is measured for the each of the individual data rate specified for the DPCH. DCH is mapped into Dedicated Physical Channel (DPCH).

#### 8.4.1.1 Minimum requirement

For the parameters specified in Table 8.15 the average downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio shall be below the specified value for the BLER shown in Table 8.16.

Table 8.15: DCH parameters in moving propagation conditions

Parameter	Unit	Test 1	Test 2
Phase reference		P-CPICH	
$\hat{I}_{or}/I_{oc}$	dB	-1	
$I_{oc}$	dBm/3.84 MHz	-60	
Information Data Rate	kbps	12.2	64

Table 8.16: DCH requirements in moving propagation conditions

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1	-14.5 dB	10 <sup>-2</sup>
2	-10.9 dB	10 <sup>-2</sup>

## 8.5 Demodulation of DCH in birth-death propagation conditions

#### 8.5.1 Single link performance

The receive single link performance of the Dedicated Channel (DCH) in dynamic birth-death propagation conditions are determined by the Block Error Ratio (BLER) values. BER is measured for the each of the individual data rate specified for the DPCH. DCH is mapped into Dedicated Physical Channel (DPCH).

#### 8.5.1.1 Minimum requirement

For the parameters specified in Table 8.17 the average downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio shall be below the specified value for the BLER shown in Table 8.18.

Table 8.17: DCH parameters in birth-death propagation conditions

Parameter	Unit	Test 1	Test 2
Phase reference		P-CPICH	
$\hat{I}_{or}/I_{oc}$	dB	-1	
$I_{oc}$	dBm/3.84 MHz	-60	
Information Data Rate	kbps	12.2	64

Table 8.18: DCH requirements in birth-death propagation conditions

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1	-12.6 dB	10 <sup>-2</sup>
2	-8.7 dB	10 <sup>-2</sup>

# 8.5A Demodulation of DCH in high speed train condition

#### 8.5A.1 General

The receiver performance of the DCH in high speed train condition is determined by the BLER values. BLER is measured for the individual data rate specified for the DPCH. DCH is mapped into DPCH.

## 8.5A.2 Minimum requirement

For the parameters specified in Table 8.18A the average downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio shall be below the specified value for the BLER shown in Table 8.18B.

Table 8.18A: DCH parameters in high speed train condition

Parameter	Unit	Test 1
Phase reference		P-CPICH
$\hat{I}_{or}/I_{oc}$	dB	5
$I_{oc}$	dBm/3.84 MHz	-60
Information Data Rate	kbps	12.2

Table 8.18B: DCH requirements in high speed train condition

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1	-21.8	10 <sup>-2</sup>

# 8.6 Demodulation of DCH in downlink Transmit diversity modes

### 8.6.1 Demodulation of DCH in open-loop transmit diversity mode

The receive characteristic of the Dedicated Channel (DCH) in open loop transmit diversity mode is determined by the Block Error Ratio (BLER). DCH is mapped into in Dedicated Physical Channel (DPCH).

#### 8.6.1.1 Minimum requirement

For the parameters specified in Table 8.19 the average downlink  $\underline{DPCH}_{\underline{E}_{c}}$  power ratio shall be below the specified

value for the BLER shown in Table 8.20.If the UE supports optional enhanced performance requirements type1 for DCH then for the parameters specified in Table 8.20A the average downlink  $\frac{DPCH_{-}E_{c}}{I}$  power ratio shall be below the

specified value for the BLER shown in Table 8.20B and Test 1 shall be replaced by Test 1a.

Table 8.19: Test parameters for DCH reception in an open loop transmit diversity scheme. (Propagation condition: Case 1)

Parameter	Unit	Test 1
Phase reference		P-CPICH
$\hat{I}_{or}/I_{oc}$	dB	9
$I_{oc}$	dBm/3.84 MHz	-60
Information data rate	kbps	12.2

Table 8.20: Test requirements for DCH reception in open loop transmit diversity scheme

Test Number	$\frac{DPCH\_E_c}{I_{or}}$ (antenna 1/2)	BLER
1	-16.8 dB	10 <sup>-2</sup>

Table 8.20A: Test parameters for DCH reception in an open loop transmit diversity scheme for UE supporting the enhanced performance requirements type1 for DCH (Propagation condition: PA3)

Parameter	Unit	Test 1a
Phase reference		P-CPICH
$\hat{I}_{or}/I_{oc}$	dB	9
$I_{oc}$	dBm/3.84 MHz	-60
Information	data	rate kbps 12.2

Table 8.20B: Test requirements for DCH reception in open loop transmit diversity scheme for UE supporting the enhanced performance requirements type1 for DCH

Test Number	$\frac{DPCH\_E_c}{I_{or}}$ (antenna 1/2)	BLER
	(antenna 1/2)	
1a	-22.7 dB	10 <sup>-2</sup>

### 8.6.2 Demodulation of DCH in closed loop transmit diversity mode

The receive characteristic of the dedicated channel (DCH) in closed loop transmit diversity mode is determined by the Block Error Ratio (BLER). DCH is mapped into in Dedicated Physical Channel (DPCH).

#### 8.6.2.1 Minimum requirement

For the parameters specified in Table 8.21 the average downlink  $\frac{DPCH_{-}E_{c}}{I}$  power ratio shall be below the specified

value for the BLER shown in Table 8.22. If the UE supports optional enhanced performance requirements type 1 for DCH then for the parameters specified in Table 8.22A the average downlink  $\frac{DPCH_E_c}{I_{or}}$  power ratio shall be below the

specified value for the BLER shown in Table 8.22B and Test 1 shall be replaced by Test 1a.

Table 8.21: Test Parameters for DCH Reception in closed loop transmit diversity mode (Propagation condition: Case 1)

Parameter	Unit	Test 1 (Mode 1)
$\hat{I}_{or}/I_{oc}$	dB	9
$I_{oc}$	dBm/3.84 MHz	-60
Information data rate	kbps	12.2
Feedback error rate	%	4
Closed loop timing adjustment mode	-	1

Table 8.22: Test requirements for DCH reception in closed loop transmit diversity mode

Test Nu	mber	$\frac{DPCH_{-}E_{c}}{I_{or}}$ (see note)	BLER
1		-18.0 dB	10 <sup>-2</sup>
NOTE:	sharin	s the total power from both a g between antennas are fee dent as specified in TS25.2	edback mode

Table 8.22A: Test Parameters for DCH Reception in closed loop transmit diversity mode for UE supporting the enhanced performance requirements type1 for DCH (Propagation condition: PA3)

Parameter	Unit	Test 1a (Mode 1)
$\hat{I}_{or}/I_{oc}$	dB	9
$I_{oc}$	dBm/3.84 MHz	-60
Information data rate	kbps	12.2
Feedback error rate	%	4
Closed loop timing adjustment mode	-	1

Table 8.22B: Test requirements for DCH reception in closed loop transmit diversity mode for UE supporting the enhanced performance requirements type1 for DCH

Test Numb	$\frac{DPCH\_E_c}{I_{or}}$ (see note	e) BLER
1a	-23.3 dB	10 <sup>-2</sup>
NOTE: Th	s is the total power from bo	th antennas.

#### 8.6.3 (void)

**Table 8.23: (void)** 

**Table 8.24: (void)** 

#### 8.7 Demodulation in Handover conditions

#### 8.7.1 Demodulation of DCH in Inter-Cell Soft Handover

The bit error rate characteristics of UE is determined during an inter-cell soft handover. During the soft handover a UE receives signals from different cells. A UE has to be able to demodulate two PCCPCH channels and to combine the energy of DCH channels. Delay profiles of signals received from different cells are assumed to be the same but time shifted by 10 chips.

The receive characteristics of the different channels during inter-cell handover are determined by the average Block Error Ratio (BLER) values.

#### 8.7.1.1 Minimum requirement

For the parameters specified in Table 8.25 the average downlink  $\underline{DPCH_{-}E_{c}}$  power ratio shall be below the specified  $\underline{I}_{-}$ 

value for the BLER shown in Table 8.26. If the UE supports optional enhanced performance requirements type1 for DCH then for the parameters specified in Table 8.26A the average downlink  $\underline{DPCH_{-}E_{c}}$  power ratio shall be below the

specified value for the BLER shown in Table 8.26B and Test 1 shall be replaced by Test 1a.

Table 8.25: DCH parameters in multi-path propagation conditions during Soft Handoff (Case 3)

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference			P-(	CPICH	
$\hat{I}_{or1}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$	dB	0	0	3	6
$I_{oc}$	dBm/3.84 MHz			-60	
Information data Rate	kbps	12.2	64	144	384

Table 8.26: DCH requirements in multi-path propagation conditions during Soft Handoff (Case 3)

Test Number	$DPCH_{-}E_{c}$	BLER
	$I_{or}$	
1	-15.2 dB	10 <sup>-2</sup>
2	-11.8 dB	10 <sup>-1</sup>
	-11.3 dB	10 <sup>-2</sup>
3	-9.9 dB	10 <sup>-1</sup>
	-9.5 dB	10 <sup>-2</sup>
4	-6.3 dB	10 <sup>-1</sup>
	-5.8 dB	10 <sup>-2</sup>

Table 8.26A: DCH parameters in multi-path propagation conditions during Soft Handoff (VA120) for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 1a
Phase	reference P-CPICH	Phase
$\hat{I}_{or1}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$	dB	0
$I_{oc}$	dBm/3.84 MHz	-60
Information data Rate	kbps	12.2

Table 8.26B: DCH requirements in multi-path propagation conditions during Soft Handoff (VA120) for UE supporting the enhanced performance requirements type1 for DCH

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER
1a	-18.5 dB	10 <sup>-2</sup>

# 8.7.2 Combining of TPC commands from radio links of different radio link sets

#### 8.7.2.1 Minimum requirement

Test parameters are specified in Table 8.27. The delay profiles of the signals received from the different cells are the same but time-shifted by 10 chips.

For Test 1, the sequence of uplink power changes between adjacent slots shall be as shown in Table 8.28 over the 4 consecutive slots more than 99% of the time. Note that this case is without an additional noise source  $I_{oc}$ .

For Test 2, the Cell1 and Cell2 TPC patterns are repeated a number of times. If the transmitted power of a given slot is increased compared to the previous slot, then a variable "Transmitted power UP" is increased by one, otherwise a variable "Transmitted power DOWN" is increased by one. The requirements for "Transmitted power UP" and "Transmitted power DOWN" are shown in Table 8.28A.

Table 8.27: Parameters for TPC command combining

Parameter	Unit	Test 1	Test 2
Phase reference	-		
DPCH_Ec/lor	dB	-	12
$\hat{I}_{or1}$ and $\hat{I}_{or2}$	dBm/3.84 MHz	-	60
$I_{oc}$	dBm/3.84 MHz	-	-60
Power-Control-Algorith	-	Algorithm 1	
Cell 1 TPC commands	-	{0,0,1,1}	
over 4 slots			
Cell 2 TPC commands	-	{0,1,0,1}	
over 4 slots			
Information data Rate	kbps	12.2	
Propagation condition	-	Static without	Multi-path fading
		AWGN source $I_{oc}$	case 3

Table 8.28: Test requirements for Test 1

Test Number	Required power changes over the 4 consecutive slots
1	Down, Down, Down, Up

Table 8.28A: Requirements for Test 2

	Test Number	Ratio (Transmitted power UP) / (Total number of slots)	Ratio (Transmitted power DOWN) / (Total number of slots)
ĺ	2	≥0.25	≥0.5

# 8.7.3 Combining of reliable TPC commands from radio links of different radio link sets

#### 8.7.3.1 Minimum requirement

Test 1 verifies that the UE follows only the reliable TPC commands in soft handover. Test 2 verifies that the UE follows all the reliable TPC commands in soft handover.

Test parameters are specified in Table 8.28B. Before the start of the tests, the UE transmit power shall be initialised to -15 dBm. An actual UE transmit power may vary from the target level of -15 dBm due to inaccurate UE output power step.

During tests 1 and 2 the UE transmit power samples, which are defined as the mean power over one timeslot, shall stay 90% of the time within the range defined in Table 8.28C.

Table 8.28B: Parameters for reliable TPC command combining

Parameter	Unit	Test 1	Test 2
Phase reference	-	P-CF	PICH
DPCH_Ec/lor1	dB	Note 1	Note 1 & Note 3
DPCH_Ec/lor2	dB	DPCH_Ec/lor1 - 10	DPCH_Ec/lor1 + 6
DPCH_Ec/lor3	dB	DPCH_Ec/lor1 - 10	-
$\hat{I}_{or1}/I_{oc}$	dB	-1	-1
$\hat{I}_{or2}\!/I_{oc}$	dB	-1	-1
$\hat{I}_{or3}/I_{oc}$	dB	-1	-
$I_{oc}$	dBm/3.84 MHz	-60	
Power-Control-Algorithm	-	Algori	thm 1
UL Power Control step	٩D		1
size, $\Delta_{TPC}$	dB		
Cell 1 TPC commands	-	Note 2	Note 2
Cell 2 TPC commands	-	"1"	"1"
Cell 3 TPC commands	-	"1"	-
Information data Rate	kbps	12.2	
Propagation condition	-	Static	

Note 1: The DPCH\_Ec/lor1 is set at the level corresponding to 5% TPC error rate.

Note 2: The uplink power control from cell1 shall be such that the UE transmit power would stay at -15 dBm.

Note 3: The maximum DPCH\_Ec/lor1 level in cell1 is -9 dB.

Table 8.28C: Test requirements for reliable TPC command combining

Parameter	Unit	Test 1	Test 2
UE output power	dBm	$-15 \pm 5  dB$	-15 ± 3 dB

#### 8.8 Power control in downlink

Power control in the downlink is the ability of the UE receiver to converge to required link quality set by the network while using as low power as possible in downlink . If a BLER target has been assigned to a DCCH (See Annex A.3), then it has to be such that outer loop is based on DTCH and not on DCCH.

The requirements in this subclause were derived with the assumption that the UTRAN responds immediately to the uplink TPC commands by adjusting the power of the first pilot field of the DL DPCCH that commences after end of the received TPC command.

#### 8.8.1 Power control in the downlink, constant BLER target

#### 8.8.1.1 Minimum requirements

For the parameters specified in Table 8.29 the downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio measured values, which are averaged

over one slot, shall be below the specified value in Table 8.30 more than 90% of the time. BLER shall be as shown in Table 8.30. If the UE supports optional enhanced performance requirements type1 for DCH then for the parameters specified in Table 8.30A the downlink  $\underline{PPCH_{-}E_{c}}$  power ratio measured values, which are averaged over one slot, shall  $I_{or}$ 

be below the specified value in Table 8.30B more than 90% of the time. BLER shall be as shown in Table 8.30B and Test 2 shall be replaced by Test 2a. Power control in downlink is ON during the test.

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
$\hat{I}_{or}/I_{oc}$	dB	9	-1	4	9
$I_{oc}$	dBm/3.84 MHz	-60	Ö	-6	0
Information Data Rate	kbps	12.	2	64	
Reference channel in Annex A		A.3.1		A.3.5	
Target quality value on DTCH	BLER	0.0	1	0.1	0.001
Target quality value on DCCH	BLER	-		0.1	0.1
Propagation condition		Case 4			
Maximum_DL_Power *	dB	7			
Minimum_DL_Power *	dB	-18			
DL Power Control step size, □ <sub>TPC</sub>	dB	1			
Limited Power Increase	-		"Not us	ed"	

Table 8.29: Test parameter for downlink power control

NOTE: Power is compared to P-CPICH as specified in [4].

Table 8.30: Requirements in downlink power control

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
$DPCH _E_c$	dB	-16.0	-9.0	-9.0	-10.3
$I_{or}$					
Measured quality on DTCH	BLER	0.01±30%	0.01±30%	0.1±30%	0.001±30%

Table 8.30A: Test parameter for downlink power control for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 2a
$\hat{I}_{or}/I_{oc}$	dB	-1
$I_{oc}$	dBm/3.84 MHz	-60
Information Data Rate	kbps	12.2
Reference channel in Annex A		A.3.1
Target quality value on DTCH	BLER	0.01
Target quality value on DCCH	BLER	-
Propagation condition		PA3
Maximum_DL_Power *	dB	7
Minimum_DL_Power *	dB	-18
DL Power Control step size, $\Delta_{TPC}$	dB	1
Limited Power Increase	-	"Not used"

NOTE: Power is compared to P-CPICH as specified in [4].

Table 8.30B: Requirements in downlink power control for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 2a
$\frac{DPCH\_E_c}{I_{or}}$	dB	-12.2
Measured quality on DTCH	BLER	0.01±30%

#### 8.8.2 Power control in the downlink, initial convergence

This requirement verifies that DL power control works properly during the first seconds after DPCH connection is established

#### 8.8.2.1 Minimum requirements

For the parameters specified in Table 8.31 the downlink DPCH\_Ec/Ior power ratio measured values, which are averaged over 50 ms, shall be within the range specified in Table 8.32 more than 90% of the time. For UE supporting the enhanced performance requirements type1 for DCH with the parameters specified in Table 8.32A the downlink DPCH\_Ec/Ior power ratio measured values, which are averaged over 50 ms, shall be within the range specified in Table 8.32B more than 90% of the time. T1 equals to 500 ms and it starts 10 ms after the DPDCH physical channel is considered established and the first uplink frame is transmitted. T2 equals to 500 ms and it starts when T1 has expired. Power control is ON during the test. If the UE supports optional enhanced performance requirements type1 for DCH, Test 1, Test 2, Test 3 and Test 4 shall be replaced by Test 1a, Test 2a, Test 3a and Test 4a.

The first 10 ms shall not be used for averaging, ie the first sample to be input to the averaging filter is at the beginning of T1. The averaging shall be performed with a sliding rectangular window averaging filter. The window size of the averaging filter is linearly increased from 0 up to 50 ms during the first 50 ms of T1, and then kept equal to 50ms.

Table 8.31: Test parameters for downlink power control

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Target quality value on DTCH	BLER	0.01	0.01	0.1	0.1
Initial DPCH_Ec/lor	dB	-5.9	-25.9	-3	-22.8
Information Data Rate	kbps	12.2	12.2	64	64
$\hat{I}_{or}/I_{oc}$	dB	-1			
$I_{oc}$	dBm/3.84 MHz	-60			
Propagation condition		Static			
Maximum_DL_Power	dB	7			
Minimum_DL_Power	dB	-18			
DL Power Control step size, Δ <sub>TPC</sub>	dB	1			
Limited Power Increase	-	"Not used"			

Table 8.32: Requirements in downlink power control

Parameter	Unit	Test 1 and Test 2	Test 3 and Test 4
$\frac{DPCH_{-}E_{c}}{I_{or}}$ during T1	dB	-18.9 ≤ DPCH_Ec/lor ≤ -11.9	-15.1 ≤ DPCH_Ec/lor ≤ -8.1
$\frac{DPCH_{-}E_{c}}{I_{or}}$ during T2	dB	-18.9 ≤ DPCH_Ec/lor ≤ -14.9	-15.1 ≤ DPCH_Ec/lor ≤ -11.1
Note: The lower limit is decreased by 3 dB for a UE with more than one antenna connector.			

Table 8.32A: Test parameters for downlink power control for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 1a	Test 2a	Test 3a	Test 4a
Target quality value on DTCH	BLER	0.01	0.01	0.1	0.1
Initial DPCH_Ec/lor	dB	-8.9	-28	-6	-25.8
Information Data Rate	kbps	12.2	12.2	64	64
$\hat{I}_{or}/I_{oc}$	dB	-1			
$I_{oc}$	dBm/3.84 MHz	-60			
Propagation condition		Static			
Maximum_DL_Power	dB	7			
Minimum_DL_Power	dB	-18			
DL Power Control	dB	4			
step size, $\Delta_{TPC}$	иБ	1			
Limited Power Increase	-	"Not used"			

Table 8.32B: Requirements in downlink power control for UE supporting the enhanced performance requirements type1 for DCH

Parameter	Unit	Test 1a and Test 2a	Test 3a and Test 4a
$\frac{DPCH\_E_c}{I_{or}}$ during T1	dB	-21.9 ≤ DPCH_Ec/lor ≤ -14.9	-18.1 ≤ DPCH_Ec/lor ≤ -11.1
$\frac{DPCH\_E_c}{I_{or}} \text{ during T2}$	dB	-21.9 ≤ DPCH_Ec/lor ≤ -17.9	-18.1 ≤ DPCH_Ec/lor ≤ -14.1

# 8.8.3 Power control in downlink, wind up effects

#### 8.8.3.1 Minimum requirements

This test is run in three stages where stage 1 is for convergence of the power control loop. In stage two the maximum downlink power for the dedicated channel is limited not to be higher than the value specified in Table 8.33. All parameters used in the three stages are specified in Table 8.33. The downlink  $\underline{DPCH_{\underline{E}_c}}$  power ratio measured values,

which are averaged over one slot, during stage 3 shall be lower than the value specified in Table 8.34 more than 90% of the time.

Power control of the UE is ON during the test.

Table 8.33: Test parameter for downlink power control, wind-up effects

Parameter	Unit		Test 1	
Parameter	Unit	Stage 1	Stage 2	Stage 3
Time in each stage	S	5	5	0.5
$\hat{I}_{or}/I_{oc}$	dB	5		
$I_{oc}$	dBm/3.84 MHz	-60		
Information Data Rate	kbps	12.2		
Quality target on DTCH	BLER	0.01		
Propagation condition			Case 4	
Maximum_DL_Power	dB	7	min(-6.2,P). Note 1	7
Minimum_DL_Power	dB	-18		
DL Power Control step size, $\Delta_{TPC}$	dB	1		
Limited Power Increase	-		"Not used"	

*P* is the level corresponding to the average  $\frac{DPCH - E_c}{I_{or}}$  power ratio - 2 dB compared to the P-Note 1:

 $I_{or}$  CPICH level. The average  $\frac{DPCH_{-}E_{c}}{I}$  power ratio is measured during the initialisation stage

after the power control loop has converged before the actual test starts.

Table 8.34: Requirements in downlink power control, wind-up effects

Parameter	Unit	Test 1, stage 3
$\frac{DPCH\_E_c}{I_{or}}$	dB	-13.3

#### 8.8.4 Power control in the downlink, different transport formats

#### 8.8.4.1 Minimum requirements

Test 1 verifies that UE outer loop power control has proper behaviour with different transport formats.

The downlink reference measurement channel used in this subclause shall have two different transport formats. The different transport formats of the downlink reference measurement channel used shall correspond to the measurement channels specified in Annex A.3.0 and A.3.1. The transport format used in downlink reference measurement channel during different stages of the test shall be set according to the information data rates specified in Table 8.34A. During stage 1 a downlink transport format combination using the 12.2kbps information data rate DTCH shall be used, and during stage 2 the downlink transport format combination shall be changed such that a 0kbps information data rate transport format combination is then used.

For the parameters specified in Table 8.34A the downlink  $DPCH_{-}E_{c}$  power ratio measured values, which are averaged

over one slot, shall be below the specified value in Table 8.34B more than 90% of the time. BLER shall be as shown in Table 8.34B. Power control in downlink is ON during the test.

Table 8.34A: Parameters for downlink power control in case of different transport formats

Parameter	Unit	Test 1		
Parameter	Offic	Stage 1	Stage 2	
Time in each stage	S	Note 1	Note 1	
$\hat{I}_{or}/I_{oc}$	dB	Ş	)	
$I_{oc}$	dBm/3.84 MHz	-6	0	
Information Data Rate	kbps	12.2	0	
Quality target on DTCH	BLER	0.01		
Quality target on DCCH	BLER	1		
Propagation condition		Cas	se4	
Maximum_DL_Power	dB	7	7	
Minimum_DL_Power	dB	-1	8	
DL Power Control step	dB	1		
size, $\Delta_{TPC}$	ub I			
Limited Power Increase	-	- "Not used"		
Note 1: The stage lasts until the DTCH quality has converged to the				

quality target

NOTE: Power is compared to P-CPICH as specified in [4].

Table 8.34B: Requirements in downlink power control in case of different transport formats

Parameter	Unit	Test 1, stage 1	Test 1, stage 2
$\frac{DPCH _E_c}{I_{or}}$	dB	-16.0	-18.0
Measured quality on DTCH	BLER	0.01±30%	0.01±30%

#### 8.8.5 Power control in the downlink for F-DPCH

#### 8.8.5.1 Minimum requirements

For the parameters specified in Table 8.34C the downlink  $\frac{F - DPCH_{-}E_{c}}{I_{or}}$  power ratio measured values, which are

averaged over TPC symbols of the F-DPCH frame, shall be below the specified value in Table 8.34D more than 90% of the time. TPC command error ratio shall be in the limits given by Table 8.34D. Power control in downlink is ON during the tests.

Table 8.34C: Test parameters for Fractional downlink power control

Parameter	Unit	Test 1	Test 2	
$\hat{I}_{or}/I_{oc}$	dB	9	-1	
$I_{oc}$	dBm/3.84 MHz	-60		
SF		256		
Target quality value on F DPCH	%	0.01 0.05		
Propagation condition		Case 4		
Maximum_DL_Power *	dB	7		
Minimum_DL_Power *	dB	-18		
DL Power Control step size, $\Delta_{TPC}$	dB	1		
Limited Power Increase	-	"Not used"		
Power-Control-Algorithm	-	Algor	ithm 1	

Table 8.34D: Requirements in Fractional downlink power control

Parameter	Unit	Test 1	Test 2
$\frac{F - DPCH _E_c}{I_{or}}$	dB	-15.9	-12.0
TPC command Error Ratio high	-	0.015	0.065
TPC command Error Ratio low	-	0.005	0.035

# 8.9 Downlink compressed mode

Downlink compressed mode is used to create gaps in the downlink transmission, to allow the UE to make measurements on other frequencies.

The requirements in this subclause were derived with the assumption that the UTRAN responds immediately to the uplink TPC commands by adjusting the power of the first pilot field of the DL DPCCH that commences after end of the received TPC command.

### 8.9.1 Single link performance

The receiver single link performance of the Dedicated Traffic Channel (DCH) in compressed mode is determined by the Block Error Ratio (BLER) and transmitted DPCH\_Ec/Ior power ratio in the downlink.

The compressed mode parameters are given in clause A.5.

#### 8.9.1.1 Minimum requirements

For the parameters specified in Table 8.35 the downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio measured values, which are averaged

over one slot, shall be below the specified value in Table 8.36 more than 90% of the time. The measured quality on DTCH shall be as required in Table 8.36.

Downlink power control is ON during the test. Uplink TPC commands shall be error free.

Table 8.35: Test parameter for downlink compressed mode

Parameter	Unit	Test 1	Test 2	
Delta SIR1	dB	0	3	
Delta SIR after1	dB	0	3	
Delta SIR2	dB	0	0	
Delta SIR after2	dB	0	0	
Compressed mode patterns	-	Set 2 in table A.21 in Set 1 in table A.2 clause A.5 of TS 25.101 clause A.5 of TS 2		
$\hat{I}_{or}/I_{oc}$	dB	9		
$I_{oc}$	dBm/3.84 MHz	-60		
Information Data Rate	kbps	12	2.2	
Propagation condition		Case 3	Case 2	
Target quality value on DTCH	BLER	0.	01	
Maximum_DL_Power	dB	7		
Minimum_DL_Power	dB	-18		
DL Power Control step size, $\Delta_{\mathrm{TPC}}$	dB	1		
Limited Power Increase	-	"Not	used"	

Table 8.36: Requirements in downlink compressed mode

Parameter	Unit	Test 1	Test 2
$\frac{DPCH _E_c}{I_{or}}$	dB	-13.7	No requirements
Measured quality of compressed and recovery frames	BLER	No requirements	<0.001
Measured quality on DTCH	BLER	0.01 ± 30 %	

# 8.10 Blind transport format detection

Performance of Blind transport format detection is determined by the Block Error Ratio (BLER) values and by the measured average transmitted DPCH\_Ec/Ior value.

#### 8.10.1 Minimum requirement

For the parameters specified in Table 8.37 the average downlink  $\frac{DPCH_{-}E_{c}}{I_{or}}$  power ratio shall be below the specified value for the BLER shown in Table 8.38.

Table 8.37: Test parameters for Blind transport format detection

Parameter	Unit	Test 1	Test 2	Test 3	Test 4	Test 5	Test 6
$\hat{I}_{or}/I_{oc}$	dB	-1				-3	
$I_{oc}$	dBm/3.84 MHz	-60					
Information Data Rate	kbps	12.2 7.95 1.95 12.2 7.95 (rate 1) (rate 2) (rate 3) (rate 1) (rate 2)			1.95 (rate 3)		
propagation condition	-	static multi-path fading case 3			case 3		
TFCI	-	off					

Table 8.38: The Requirements for DCH reception in Blind transport format detection

Test Number	$\frac{DPCH\_E_c}{I_{or}}$	BLER	FDR
1	-17.7 dB	10 <sup>-2</sup>	10 <sup>-4</sup>
2	-17.8 dB	10 <sup>-2</sup>	10 <sup>-4</sup>
3	-18.4 dB	10 <sup>-2</sup>	10 <sup>-4</sup>
4	-13.0 dB	10 <sup>-2</sup>	10 <sup>-4</sup>
5	-13.2 dB	10 <sup>-2</sup>	10 <sup>-4</sup>
6	-13.8 dB	10 <sup>-2</sup>	10 <sup>-4</sup>

NOTE 1: The value of DPCH\_Ec/Ior, Ioc, and Ior/Ioc are defined in case of DPCH is transmitted

NOTE 2: In this test, 9 different Transport Format Combinations (Table 8.39) are sent during the call set up procedure, so that the UE has to detect the correct transport format from these 9 candidates.

Table 8.39: Transport format combinations informed during the call set up procedure in the test

		1	2	3	4	5	6	7	8	9
DTO	CH	12.2k	10.2k	7.95k	7.4k	6.7k	5.9k	5.15k	4.75k	1.95k
DC	CH	2.4k								

## 8.11 Detection of Broadcast channel (BCH)

The receiver characteristics of Broadcast Channel (BCH) are determined by the Block Error Ratio (BLER) values. BCH is mapped into the primary common control physical channel (P-CCPCH).

#### 8.11.1 Minimum requirement without transmit diversity

For the parameters specified in Table 8.40 the average downlink power P-CCPCH\_Ec/Ior shall be below the specified value for the BLER shown in Table 8.41. (The Down link Physical channels are specified in Annex C).

This requirement doesn"t need to be tested.

Table 8.40: Parameters for BCH detection

Parameter	Unit	Test 1 Test 2		
Phase reference	-	P-CPICH		
$I_{oc}$	dBm/3.84 MHz	-60		
$\hat{I}_{or}/I_{oc}$	dB	-1 -3		
Propagation condition		Static	Case 3	

Table 8.41: Test requirements for BCH detection

Test Number	P-CCPCH_Ec/lor	BLER
1	-18.5 dB	0.01
2	-12.8 dB	0.01

#### 8.11.2 Minimum requirement with open loop transmit diversity

For the parameters specified in Table 8.41A the average downlink power P-CCPCH\_Ec/Ior shall be below the specified value for the BLER shown in Table 8.41B. (The Down link Physical channels are specified in Annex C).

This requirement doesn"t need to be tested.

Table 8.41A: Test parameters for BCH detection in an open loop transmit diversity scheme (STTD). (Propagation condition: Case 1)

Parameter	Unit	Test 3
Phase reference	-	P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
$\hat{I}_{or}/I_{oc}$	dB	9

Table 8.41B: Test requirements for BCH detection in open loop transmit diversity scheme

Test Number	P-CCPCH_Ec/lor (Total power from antenna 1 and 2)	BLER
3	-18.5	0.01

# 8.12 Demodulation of Paging Channel (PCH)

The receiver characteristics of paging channel are determined by the probability of missed paging message (Pm-p). PCH is mapped into the S-CCPCH and it is associated with the transmission of Paging Indicators (PI) to support efficient sleep-mode procedures.

#### 8.12.1 Minimum requirement

For the parameters specified in Table 8.42 the average probability of missed paging (Pm-p) shall be below the specified value in Table 8.43. Power of downlink channels other than S-CCPCH and PICH are as defined in Table C.3 of Annex C. S-CCPCH structure is as defined in Annex A.6.

Table 8.42: Parameters for PCH detection

Parameter	Unit	Test 1	Test 2
Number of paging	_	72	
indicators per frame (Np)		72	
Phase reference	-	P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60	
$\hat{I}_{or}/I_{oc}$	dB	-1	-3
Propagation condition		Static	Case 3

Table 8.43: Test requirements for PCH detection

Test Number	S-CCPCH_Ec/lor	PICH_Ec/lor	Pm-p
1	-14.8	-19	0.01
2	-9.8	-12	0.01

# 8.13 Detection of Acquisition Indicator (AI)

The receiver characteristics of Acquisition Indicator (AI) are determined by the probability of false alarm Pfa and probability of correct detection Pd. Pfa is defined as a conditional probability of detection of AI signature given that a AI signature was not transmitted. Pd is defined as a conditional probability of correct detection of AI signature given that the AI signature is transmitted.

### 8.13.1 Minimum requirement

For the parameters specified in Table 8.44 the Pfa and 1-Pd shall not the exceed the specified values in Table 8.45. Power of downlink channels other than AICH is as defined in Table C.3 of Annex C.

Table 8.44: Parameters for Al detection

Parameter	Unit	Test 1
Phase reference	-	P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
Number of other transmitted AI signatures on AICH	-	0
$\hat{I}_{or}/I_{oc}$	dB	-1
AICH_Ec/lor	dB	-22.0
AICH Power Offset	dB	-12.0
Propagation condition	-	Static

Note that AICH\_Ec/Ior can not be set. Its value is calculated from other parameters and it is given for information only. (AICH\_Ec/Ior = AICH Power Offset + CPICH\_Ec/Ior)

Table 8.45: Test requirements for Al detection

Test Number	Pfa	1-Pd
1	0.01	0.01

# 8.13A Detection of E-DCH Acquisition Indicator (E-AI)

The receiver characteristics of E-DCH Acquisition Indicator (E-AI) are determined by the probability of correct detection Pde. Pde is defined as a conditional probability of correct detection of E-AI signature given that the E-AI signature is transmitted and AI signature was correctly received.

### 8.13A.1 Minimum requirement

For the parameters specified in Table 8.45C the 1-Pde shall not exceed the specified value in Table 8.45D. The power settings for downlink channels other than AICH and E-AICH are set as defined in Table C.3 of Annex C.

**Parameter** Unit Test 1 Phase reference \_ P-CPICH  $I_{oc}$ dBm/3.84 MHz -60 Number of other transmitted AI 0 signatures on AICH Number of resources assumed 32 for E-DCH random access  $\hat{I}_{or}/I_{oc}$ -1 dB AICH\_Ec/lor dB -22.0 AICH Power Offset dB -12.0 E-AICH\_Ec/lor dΒ -22.0 E-AICH Power dB -12.0 Offset Propagation Static condition

Table 8.45C: Parameters for E-Al detection

Note that AICH\_Ec/Ior and E-AICH\_Ec/Ior can not be set, their values are calculated from other parameters and are given for information only.

Table 8.45D: Test requirements for E-Al detection

Test Number	1- Pde	
1	0.005	

# 8.14 UE UL power control operation with discontinuous UL DPCCH transmission operation

#### 8.14.1 Minimum requirement

This test verifies that the UE follows only those TPC commands that correspond to the UL DPCCH slots which are transmitted.

Test parameters are specified in Table 8.45A. The discontinuous UL DPCCH transmission is enabled during the test. The parameters for discontinuous UL DPCCH transmission operation are as specified in Table A.20A. Before the start of the tests, the UE transmit power shall be initialised to -15 dBm. An actual UE transmit power may vary from the target level of -15 dBm due to inaccurate UE output power step.

After transmission gaps due to discontinuous uplink DPCCH transmission the uplink transmitter power difference shall be within the range as defined in Table 8.45B. The transmit power difference is defined as the difference between the power of the last slot transmitted before the gap and the power of first slot transmitted after the gap. The on power observation period is defined as the mean power over one timeslot excluding any transient periods.

Table 8.45A: Parameters for UE UL power control operation with discontinuous UL DPCCH transmission

Parameter	Unit	Test 1
Phase reference	=	P-CPICH
$HS$ -SCCH_1 $E_c/I_{or}$	dB	-10
F-DPCH $E_c/I_{or}$	dB	-10
F-DPCH slot format	=	0
$\hat{I}_{or1}$	dBm/3.84 MHz	-60
Power-Control-Algorithm	-	Algorithm 1
UL Power Control step size, $\Delta_{TPC}$	dB	1
Uplink TPC commands corresponding to the UL DPCCH slots which are transmitted	-	{0,1,0,1,0,1 } Note 1
Propagation condition	-	Static without AWGN source $I_{oc}$

Note 1: The sequence of uplink TPC commands corresponds to the UL DPCCH slots that are transmitted. During those slots which correspond to UL DPCCH slots that are not transmitted, UP-commands shall be transmitted.

Table 8.45B: Test requirements for UE UL power control operation with discontinuous UL DPCCH transmission

Parameter	Unit	Test 1	
Farameter	Onit	Lower	Upper
UE output power difference tolerance	dB	-2	+4

8.15 (void)

8.16 (void)

**Table 8.46: (void)** 

**Table 8.47: (void)** 

**Table 8.48: (void)** 

**Table 8.49: (void)** 

**Table 8.50: (void)** 

**Table 8.51: (void)** 

**Table 8.52: (void)** 

# 9 Performance requirement (HSDPA)

The performance requirements for the UE in this clause apply for the reference measurement channels specified in Annex A.7, the propagation conditions specified in Annex B.2.2 and the Down link Physical channels specified in Annex C.5. The specific references are provided separately for each requirement.

Unless otherwise stated the performance requirements are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UEs with more than one antenna connector testing the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective sections below.

# 9.1 (void)

# 9.2 Demodulation of HS-DSCH (Fixed Reference Channel)

The minimum performance requirement for a particular UE supporting one of the HS-DSCH categories 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 or 12 are determined according to Table 9.1.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 1, 2, 3, 4, 5, 6, 7, 8, 9 or 10 and supporting the optional enhanced performance requirements type 1 are determined according to Table 9.1AA.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 7, 8, 9 or 10 and supporting the optional enhanced performance requirements type 2 are determined according to Table 9.1AB.

The minimum performance requirements for a particular UE supporting HS-DSCH category 13 or 14 are determined according to Table 9.1AB.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 7, 8, 9, 10, 13 or 14 and supporting the optional enhanced performance requirements type 3 are determined according to Table 9.1AC.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 15, 16, 17, 18, 19 or 20 are determined according to Table 9.1AC.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 7, 8, 9, 10, 13, 14, 15, 16, 17, 18, 19 or 20 and supporting the optional enhanced performance requirements type 3i are determined according to Table 9.1AD.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 21, 22, 23 and 24 are determined according to Table 9.1 AE.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 21, 22, 23, 24, 25, 26, 27 or 28 and supporting the optional enhanced performance requirements type 3 are determined according to Table 9.1 AF.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 21, 22, 23, 24, 25, 26, 27 or 28 and supporting the optional enhanced performance requirements type 3i are determined according to Table 9.1 AG.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 29 and 31 are determined according to Table 9.1AH.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 29, 30, 31 and 32 and supporting the optional enhanced performance requirements type 3 are determined according to Table 9.1AI.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 29, 30, 31 and 32 and supporting the optional enhanced performance requirements type 3i are determined according to Table 9.1AJ.

The minimum performance requirements for a particular UE supporting HS-DSCH category 35 are determined according to Table 9.1AK.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 35 and 36 and supporting the optional enhanced performance requirements type 3 are determined according to Table 9.1AL.

The minimum performance requirements for a particular UE supporting one of the HS-DSCH categories 35 and 36 and supporting the optional enhanced performance requirements type 3i are determined according to Table 9.1AM.

A UE supporting one of categories 21, 22 23, 24, 29, 31 or 35 shall support either enhanced receiver type 2 requirements, or enhanced receiver type 3 requirements, or enhanced receiver type 3i requirements applicable for the other categories supported by this UE.

A UE supporting one of categories 21, 22 23, 24, 29, 31 or 35 supporting enhanced receiver type 3 requirements shall support either enhanced receiver type 3 requirements, or enhanced receiver type 3i requirements applicable for the other categories supported by this UE.

A UE supporting one of categories 21, 22 23, 24, 29, 31 or 35 supporting enhanced receiver type 3i requirements shall support enhanced receiver type 3i requirements applicable for the other categories supported by this UE.

The additional minimum performance requirements for UE supporting one of the HS-DSCH categories 7, 8, 9, 10, 13, 14, 21, 22, 23, 24, 29, 31 or 35 and the MIMO only with single-stream restriction are indicated in Table 9.1AB, Table 9.1AC, 9.1AD, Table 9.1AE, Table 9.1AF, Table 9.1AG, Table 9.1AH, Table 9.1AI, Table 9.1AJ, Table 9.1AK, Table 9.1AL and Table 9.1AM.

The minimum performance requirements for a particular UE supporting the optional non-contiguous multi-cell operation are determined according to Table 9.1AN.

For the requirements for UEs supporting HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 or 36, when the carriers are located in the same frequency band, the spacing of the carrier frequencies of the two cells shall be 5 MHz.

For the requirements for UEs supporting HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31 or 32 and supporting NC-4C-HSDPA, the spacing of the carrier frequencies belonging to the same subblock of carriers shall be 5MHz. The spacing of the highest carrier frequency of the lowest subblock of carriers and the lowest carrier frequency

of the highest subblock of carriers depends on the configuration as indicated in Table 5.0aE and on the UE capability as indicated in the Information Element 'Gap size', [7].

For single link performance with a UE supporting one of the categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 or 36, and supporting enhanced receiver type 3i, the simplified testing method in Annex C.5.4 can be applied.

For open loop diversity performance with a UE supporting one of the categories 29, 30, 31, 32, 35 or 36, and supporting enhanced receiver type 1, type 3 or type 3i, the simplified testing method in Annex C.5.4 can be applied.

For MIMO performance with a UE supporting one of the categories 30 or 32, and supporting enhanced receiver type 3 or type 3i, the simplified testing method in Annex C.5.4 can be applied.

All aforementioned requirements are applicable to the UE when in CELL\_DCH state. Minimum performance requirements for UE being able to receive HS-DSCH and HS-SCCH in CELL\_FACH state are given in Section 9.6.

The propagation conditions for this subclause are defined in table B.1B.

Table 9.1: FRC for minimum performance requirements for different HS-DSCH categories

HS-DSCH category		Corresponding requirement		
	Single Link (Note 1)	Open Loop Diversity	Closed Loop Diversity	
Category 1	H-Set 1	H-Set 1	H-Set 1	
Category 2	H-Set 1	H-Set 1	H-Set 1	
Category 3	H-Set 2	H-Set 2	H-Set 2	
Category 4	H-Set 2	H-Set 2	H-Set 2	
Category 5	H-Set 3	H-Set 3	H-Set 3	
Category 6	H-Set 3	H-Set 3	H-Set 3	
Category 7 (Note 1)	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 8 (Note 1)	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 9	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 10	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 11	H-Set 4	H-Set 4	H-Set 4	
Category 12	H-Set 5	H-Set 5	H-Set 5	

Note 1: Single link minimum performance requirements for Categories 7-10 in Pedestrian A with  $\hat{I}_{or}/I_{oc}$ =10dB are set according to H-Set 6. Requirements in other conditions are according to H-Set 3.

Note 2: For UE supporting the minimum performance requirements for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51 and for open loop transmit diversity in Table 9.53.

Table 9.1AA: FRC for enhanced performance requirements type 1 for different HS-DSCH categories

HS-DSCH category	Corresponding requirement			
	Single Link (Note 1)	Open Loop Diversity	Closed Loop Diversity	
Category 1	H-Set 1	H-Set 1	H-Set 1	
Category 2	H-Set 1	H-Set 1	H-Set 1	
Category 3	H-Set 2	H-Set 2	H-Set 2	
Category 4	H-Set 2	H-Set 2	H-Set 2	
Category 5	H-Set 3	H-Set 3	H-Set 3	
Category 6	H-Set 3	H-Set 3	H-Set 3	
Category 7 (Note 1)	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 8 (Note 1)	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 9	H-Set 6, H-Set 3	H-Set 3	H-Set 3	
Category 10	H-Set 6, H-Set 3	H-Set 3	H-Set 3	

Note 1: Single link enhanced performance requirements type 1 for Categories 7 - 10 in Pedestrian A with  $\hat{I}_{cc}/I_{cc}$  =10dB are set according to H-Set 6. Requirements in other conditions are according to H-Set 3.

Note 2: For UE supporting the enhanced performance requirements type 1 for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.

Table 9.1AB: FRC for enhanced performance requirements type 2 for different HS-DSCH categories

HS-DSCH category	Corresponding requirement		
	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity (Note 3)
Category 7	H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3
Category 8	H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3
Category 9	H-Set 10, H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3
Category 10	H-Set 10, H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3
Category 13	H-Set-10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3
Category 14	H-Set-10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-set 6, H-Set 3

- Note 1: Single link enhanced performance requirements type 2 for Categories 9, 10, 13 and 14 with  $\hat{I}_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10. Single link enhanced performance requirements type 2 for Categories 13 and 14 with  $\hat{I}_{or}/I_{oc}$  = 15 and 18 dB are set according to H-Set 8. Single link enhanced performance requirements type 2 for Categories 7, 8, 9, 10, 13 and 14 with  $\hat{I}_{or}/I_{oc}$  =10dB are set according to H-Set 6. Requirements in other conditions are according to H-Set 3 minimum performance requirements.
- Note 2: Open loop transmit diversity requirements are set according to H-Set 3 minimum performance requirements.
- Note 3: Closed loop transmit diversity enhanced performance requirements type 2 for Categories 7, 8, 9, 10, 13 and 14 in Pedestrian B 3km/h with  $\hat{I}_{or}/I_{oc}$ =10dB and  $E_c/I_{or}$ =-3dB are set according to H-Set 6. Requirements in other conditions are set according to H-Set 3 minimum performance requirements
- Note 4: For UE supporting the enhanced performance requirements type 2 for HS-DSCH the minimum requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51 and for open loop transmit diversity in Table 9.53.
- Note 5: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G2, 9.22G2A, 9.22H2 and 9.22H2A and for HS-SCCH type 3 in Table 9.57A2, 9.57A4 and 9.57A6.

Table 9.1AC: FRC for enhanced performance requirements type 3 for different HS-DSCH categories

HS-DSCH		Corre	sponding requiremen	nt
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity (Note 3)	MIMO (Note 4)
Category 7	H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 8	H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 9	H-Set 10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 10	H-Set10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 13	H-Set 10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 14	H-Set10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 15	H-Set 10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 16	H-Set 10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 17	H-Set 10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 18	H-Set 10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 19	H-Set-10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 11, H-Set 9
Category 20	H-Set 10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 11, H-Set 9

Note 1: Single link enhanced performance requirements type 3 for Categories 9, 10, 13, 14, 15, 16, 17, 18, 19 and 20 with  $\hat{I}_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10. Single link enhanced performance requirements type 3 for Categories 13, 14, 17, 18, 19 and 20 with  $\hat{I}_{or}/I_{oc}$  = 15 dB and 18 dB are set according to H-Set 8. Single link enhanced performance requirements type 3 for Categories 7, 8, 9, 10, 13, 14, 15, 16, 17, 18, 19 and 20 with  $\hat{I}_{or}/I_{oc}$  =10dB and  $\hat{I}_{or}/I_{oc}$  =5dB are set according to H-Set 6. Requirements in other conditions are according to H-Set 3 type1 enhanced performance requirements.

- Note 2: Open loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 3: Closed loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 4: MIMO requirements for categories 15-20, with  $\hat{I}_{or}/I_{oc} = 6$  and 10 dB are set according to H-Set 9. MIMO requirements for categories 19-20, with  $\hat{I}_{or}/I_{oc} = 18$  dB are set according to H-Set 11.
- Note 5: For UE supporting the enhanced performance requirements type 3 for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.
- Note 6: For UEs supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d.
- Note 7: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.

Table 9.1AD: FRC for enhanced performance requirements type 3i for different HS-DSCH categories

HS-DSCH	Corresponding requirement			
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity (Note 3)	MIMO (Note 4)
Category 7	H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 8	H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 9	H-Set10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 10	H-Set10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 13	H-Set10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 14	H-Set10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	N/A
Category 15	H-Set10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 16	H-Set10, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 17	H-Set10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 18	H-Set10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 9
Category 19	H-Set-10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 11, H-Set 9
Category 20	H-Set-10, H-Set 8, H-Set 6, H-Set 3	H-Set 3	H-Set 3	H-Set 11, H-Set 9

- Note 1: Single link enhanced performance requirements type 3i for Categories 7-20 with  $\hat{I}_{or}/I_{oc}$ ' = 0dB are set according to H-Set 6. Requirements in other conditions are according to type 3 enhanced performance requirements.
- Note 2: Open loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 3: Closed loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 4: MIMO requirements for categories 15-20, with  $\hat{I}_{or}/I_{oc} = 6$  and 10 dB are set according to H-Set 9. MIMO requirements for categories 19-20, with  $\hat{I}_{or}/I_{oc} = 18$  dB are set according to H-Set 11.
- Note 5: For UE supporting the enhanced performance requirements type 3i for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.
- Note 6: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d.
- Note 7: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.

Table 9.1AE: FRC for enhanced performance requirements type 2 for different DC-HSDPA and DB-DC-HSDPA categories

HS-DSCH category	Corresponding requirement				
	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity		
Category 21	H-Set-10A, H-Set 6A, H- Set 3A	H-Set 3A	N/A		
Category 22	H-Set-10A, H-Set 6A, H- Set 3A	H-Set 3A	N/A		
Category 23 H-Set-10A, H-Set 8A, H Set 6A, H-Set 3A		H-Set 3A	N/A		
Category 24	H-Set-10A, H-Set 8A, H- Set 6A, H-Set 3A	H-Set 3A	N/A		

Note 1: Single link enhanced performance requirements type 2 for categories 21, 22, 23 and 24 with  $\hat{I}_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10A.

Single link enhanced performance requirements type 2 for categories 23 and 24 with  $I_{or}/I_{oc}$  = 15 and 18 dB are set according to H-Set 8A.

Single link enhanced performance requirements type 2 for categories 21, 22, 23 and 24 with  $\hat{I}_{or}/I_{oc}$  =10dB are set according to H-Set 6A.

Single link requirements for categories 21, 22, 23 and 24 in other conditions are according to H-Set 3A minimum performance requirements.

- Note 2: Open loop transmit diversity requirements are set according to H-Set 3A minimum performance requirements.
- Note 3: For UE supporting the enhanced performance requirements type 2 for HS-DSCH the minimum requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51 and for open loop transmit diversity in Table 9.53.
- Note 4: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G2, 9.22G2A, 9.22H2 and 9.22H2A and for HS-SCCH type 3 in Table 9.57A2, 9.57A4 and 9.57A6.

Table 9.1AF: FRC for enhanced performance requirements type 3 for different DC-HSDPA and DB-DC-HSDPA categories

HS-DSCH		Corresponding requirement					
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	МІМО			
Category 21	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	N/A			
Category 22	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	N/A			
Category 23	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	N/A			
Category 24	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	N/A			
Category 25	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	H-Set 9A			
Category 26	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	H-Set 9A			
Category 27	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	H-Set 11A, H-Set 9A			
Category 28	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	H-Set 11A, H-Set 9A			

Note 1: Single link enhanced performance requirements type 3 for categories 21, 22, 23, 24, 25, 26, 27 and 28 with  $\hat{I}_{or}/I_{oc} = 4$  dB and 8 dB are set according to H-Set 10A.

Single link enhanced performance requirements type 3 for categories 23, 24, 27 and 28 with  $I_{or}/I_{oc}$  = 15 dB and 18 dB are set according to H-Set 8A.

Single link enhanced performance requirements type 3 for categories 21, 22, 23, 24, 25, 26, 27 and 28 with  $\hat{I}_{or}/I_{oc}$  =10dB and  $\hat{I}_{or}/I_{oc}$  =5dB are set according to H-Set 6A.

Single link minimum requirements for categories 21, 22, 23, 24, 25, 26, 27 and 28 in other conditions are according to H-Set 3A type 1 enhanced performance requirements.

- Note 2: Open loop transmit diversity requirements are set according to H-Set 3A type 1 enhanced performance requirements.
- Note 3: MIMO requirements for categories 25-26, with  $\hat{I}_{or}/I_{oc} = 6$  and 10 dB are set according to H-Set 9A. MIMO requirements for categories 27-28, with  $\hat{I}_{or}/I_{oc} = 18$  dB are set according to H-Set 11A.
- Note 4: For UE supporting the enhanced performance requirements type 3 for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.
- Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d.
- Note 6: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H1 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5, and 9.57A7.

Table 9.1AG: FRC for enhanced performance requirements type 3i for different DC-HSDPA and DB-DC-HSDPA categories

HS-DSCH		Corre	esponding requiremen	nt
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	МІМО
Category 21	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	N/A
Category 22	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	N/A
Category 23	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	N/A
Category 24	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	N/A
Category 25	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	H-Set 9A
Category 26	H-Set-10A, H-Set 6A, H-Set 3A	H-Set 3A	N/A	H-Set 9A
Category 27	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	H-Set 11A, H-Set 9A
Category 28	H-Set-10A, H-Set 8A, H-Set 6A, H- Set 3A	H-Set 3A	N/A	H-Set 11A, H-Set 9A

- Note 1: Single link enhanced performance requirements type 3i for Categories 21, 22, 23, 24, 25, 26, 27 and 28 with  $\hat{I}_{or}/I_{oc}$ ' = 0dB are set according to H-Set 6A. Requirements in other conditions are according to type 3 enhanced performance requirements.
- Note 2: Open loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 3: For UE supporting the enhanced performance requirements type 3i for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54
- Note 4: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5, 9.57A7.
- Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, 9.57, 9.57a, 9.57b, 9.57c and 9.57d.

Table 9.1AH: FRC for enhanced performance requirements type 2 for different 4C-HSDPA categories

HS-DS	CH category		Corresponding requirement			
		Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity		
Ca	tegory 29	H-Set-10B, H-Set 8B, H- Set 6B, H-Set 3B		N/A		
Ca	tegory 31	H-Set-10C, H-Set 8C, H- Set 6C, H-Set 3C		N/A		
Note 1:	$\hat{I}_{-}/I_{-}$					

Single link enhanced performance requirements type 2 for categories 29 and 31 with  $\hat{I}_{or}/I_{oc}$  =10dB are set according to H-Set 6B and H-Set 6C respectively.

Single link requirements for categories 29 and 31 in other conditions are according to H-Set 3B minimum performance requirements and H-Set 3C minimum performance requirements respectively.

- Note 2: Open loop transmit diversity requirements are set according to H-Set 3B minimum performance requirements and H-Set 3C minimum performance requirements.
- Note 3: For UE supporting the enhanced performance requirements type 2 for HS-DSCH the minimum requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51 and for open loop transmit diversity in Table 9.53.
- Note 4: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G2, 9.22G2A, 9.22H2 and 9.22H2A and for HS-SCCH type 3 in Table 9.57A2, 9.57A4 and 9.57A6.

Table 9.1AI: FRC for enhanced performance requirements type 3 for different 4C-HSDPA categories

HS-DSCH		Corre	sponding requireme	ent
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	MIMO
Category 29	H-Set 10B, H-Set 6B, H-Set 8B, H- Set 3B	H-Set 3B	N/A	N/B
Category 30	H-Set-10B, H-Set 6B, H-Set 8B, H- Set 3B	H-Set 3B	N/A	H-Set 11B, H-Set 9B
Category 31	H-Set 10C, H-Set 8C, H-Set 6C, H- Set 3C	H-Set 3C	N/A	N/A
Category 32	H-Set 10C, H-Set 8C, H-Set 6C, H- Set 3C	H-Set 3C	N/A	H-Set 11C, H-Set 9C

Note 1: Single link enhanced performance requirements type 3 for categories 29, 30 with  $I_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10B.

Single link enhanced performance requirements type 3 for categories 31, 32 with  $\hat{I}_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10C.

Single link enhanced performance requirements type 3 for categories 29, 30 with  $\hat{I}_{or}/I_{oc}$  = 15 dB and 18 dB are set according to H-Set 8B.

Single link enhanced performance requirements type 3 for categories 31, 32 with  $I_{or}/I_{oc}$  = 15 dB and 18 dB are set according to H-Set 8C.

Single link enhanced performance requirements type 3 for categories 29, 30 with  $I_{or}/I_{oc}$  =10dB and  $\hat{I}_{or}/I_{oc}$  =5dB are set according to H-Set 6B.

Single link enhanced performance requirements type 3 for categories 31, 32 with  $\hat{I}_{or}/I_{oc}$  =10dB and  $\hat{I}_{or}/I_{oc}$  =5dB are set according to H-Set 6C.

Single link minimum requirements for categories 29, 30 in other conditions are according to H-Set 3B type 1 enhanced performance requirements.

Single link minimum requirements for categories 31, 32 in other conditions are according to H-Set 3C type 1 enhanced performance requirements.

- Note 2: Open loop transmit diversity requirements are set according to H-Set 3B type 1 enhanced performance requirements and H-Set 3C type 1 enhanced performance requirements.
- Note 3: MIMO requirements for categories 30 and 32, with  $I_{or}/I_{oc}$  = 6 and 10 dB are set according to H-Set 9B and H-Set 9C respectively. MIMO requirements for categories 30 and 32, with  $\hat{I}_{or}/I_{oc}$  = 18 dB are set according to H-Set 11B and H-set 11C respectively.
- Note 4: For UE supporting the enhanced performance requirements type 3 for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.
- Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d,
- Note 6: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.

Table 9.1AJ: FRC for enhanced performance requirements type 3i for different 4C-HSDPA categories

HS-DSCH		Corresponding requirement					
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	MIMO			
Category 29	H-Set-10B, H-Set 6B, H-Set 8B, H- Set 3B	H-Set 3B	N/A	N/B			
Category 30	H-Set-10B, H-Set 6B, H-Set 8B, H- Set 3B	H-Set 3B	N/A	H-Set 11B, H-Set 9B			
Category 31	H-Set 10C, H-Set 8C, H-Set 6C, H- Set 3C	H-Set 3C	N/A	N/A			
Category 32	H-Set 10C, H-Set 8C, H-Set 6C, H- Set 3C	H-Set 3C	N/A	H-Set 11C, H-Set 9C			

- Note 1: Single link enhanced performance requirements type 3i for Categories 29, 30 with  $\hat{I}_{or}/I_{oc}$  '= 0dB are set according to H-Set 6B. Single link enhanced performance requirements type 3i for Categories 31, 32 with  $\hat{I}_{or}/I_{oc}$  '= 0dB are set according to H-Set 6C. Requirements in other conditions are according to type 3 enhanced performance requirements.
- Note 2: Open loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.
- Note 3: For UE supporting the enhanced performance requirements type 3i for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54
- Note 4: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.
- Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d,

Table 9.1AK: FRC for enhanced performance requirements type 2 for the 8C-HSDPA category

HS-DS	SCH category	Corresponding requirement				
		Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity		
Ca	tegory 35	H-Set-10E, H-Set 8E, H- Set 6E, H-Set 3E	H-Set 3E	N/A		
Note 1:	Single link enha		nts type 2 for category 35 with	n $\hat{I}_{or}/I_{oc}$ = 4 dB and 8 dB are		
	Single link enha		nts type 2 for category 35 with	$\hat{I}_{or}/I_{oc}$ = 15 and 18 dB are		
	Single link enha		nts type 2 for category 35 with	$\hat{I}_{or}/I_{oc}$ =10dB are set		
	Single link requi		ner conditions are according to	o H-Set 3E minimum		
Note 2:						
Note 3:	·					
Note 4:	for HS-DSCH at		-stream restriction the addition 2G2A, 9.22H2 and 9.22H2A a			

Table 9.1AL: FRC for enhanced performance requirements type 3 for different 8C-HSDPA categories

HS-DSCH	Corresponding requirement				
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	MIMO	
Category 35	H-Set 10E, H-Set 6E, H-Set 8E, H- Set 3E	H-Set 3E	N/A	N/B	
Category 36	H-Set-10E, H-Set 6E, H-Set 8E, H- Set 3E	H-Set 3E	N/A	H-Set 11E, H-Set 9E	

Note 1: Single link enhanced performance requirements type 3 for categories 35, 36 with  $\hat{I}_{or}/I_{oc}$  = 4 dB and 8 dB are set according to H-Set 10E.

Single link enhanced performance requirements type 3 for categories 35, 36 with  $I_{or}/I_{oc}$  = 15 dB and 18 dB are set according to H-Set 8E.

Single link enhanced performance requirements type 3 for categories 35, 36 with  $I_{or}/I_{oc}$  = 10 dB and  $I_{or}/I_{oc}$  =5dB are set according to H-Set 6E.

Single link minimum requirements for categories 35, 36 in other conditions are according to H-Set 3E type 1 enhanced performance requirements.

Note 2: Open loop transmit diversity requirements are set according to H-Set 3E type 1 enhanced performance requirements.

Note 3: MIMO requirements for category 36, with  $\hat{I}_{or}/I_{oc} = 6$  and 10 dB are set according to H-Set 9E. MIMO

requirements for category 36, with  $\hat{I}_{or}/I_{oc}$  = 18 dB are set according to H-Set 11E. Note 4: For UE supporting the enhanced performance requirements type 3 for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54.

Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d,

Note 6: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.

Table 9.1AM: FRC for enhanced performance requirements type 3i for different 8C-HSDPA categories

HS-DSCH	Corresponding requirement				
category	Single Link (Note 1)	Open Loop Diversity (Note 2)	Closed Loop Diversity	МІМО	
Category 35	H-Set-10E, H-Set 6E, H-Set 8E, H- Set 3E	H-Set 3E	N/A	N/B	
Category 36	H-Set-10E, H-Set 6E, H-Set 8E, H- Set 3E	H-Set 3E	N/A	H-Set 11E, H-Set 9E	

Note 1: Single link enhanced performance requirements type 3i for Categories 35, 36 with  $\hat{I}_{or}/I_{oc}$  '= 0dB are set according to H-Set 6E. Requirements in other conditions are according to type 3 enhanced performance requirements.

Note 2: Open loop transmit diversity requirements are set according to H-Set 3 type1 enhanced performance requirements.

Note 3: For UE supporting the enhanced performance requirements type 3i for HS-DSCH the requirements for HS-SCCH Type 1 detection for single link are determined in Table 9.51A and for open loop transmit diversity in Table 9.54

Note 4: For UE supporting the MIMO only with single-stream restriction the additional minimum requirements for HS-DSCH are given in Table 9.22G3, 9.22G4, 9.22H3 and 9.22H4 and for HS-SCCH type 3 in Table 9.57A3, 9.57A5 and 9.57A7.

Note 5: For UE supporting MIMO for HS-DSCH the requirements for HS-SCCH Type 3 detection are determined in Tables 9.56, Table 9.57, 9.57a, 9.57b, 9.57c and 9.57d,

Table 9.1AN: Applicability of the requirements for UE supporting NC-4C-HSDPA

			A	oplicable requireme	ents
HS-DSCH categories supported by the UE	NC-4C-HSDPA configurations	tions performance performance requirement requirement type 2		FRC for enhanced performance requirements type 3	FRC for enhanced performance requirements type 3i
21, 22, 23, 24,		21, 22, 23, 24,	Table 9.1AE	Table 9.1AF	Table 9.1AG
25, 26, 27, 28	I-1-5-1, IV-1-5-1	25, 26, 27, 28	NA	Table 9.1AF	Table 9.1AG
29, 31	1-1-5-1, 10-1-5-1	24	Table 9.1AE	Table 9.1AF	Table 9.1AG
30, 32		28	Table 9.1AE	Table 9.1AF	Table 9.1AG
29, 31	I-2-5-1, IV-2-10-1,	29	Table 9.1AH	Table 9.1Al	Table 9.1AJ
30, 32	IV-2-20-1	30	NA	Table 9.1Al	Table 9.1AJ
31	IV-2-15-2, IV-2-25-	31	Table 9.1AH	Table 9.1Al	Table 9.1AJ
32	2, I-3-10-1	32	NA	Table 9.1Al	Table 9.1AJ

During the Fixed Reference Channel tests the behaviour of the Node-B emulator in response to the ACK/NACK signalling field of the HS-DPCCH is specified in Table 9.1A:

Table 9.1A: Node-B Emulator Behaviour in response to ACK/NACK/DTX

HS-DPCCH ACK/NACK Field State	Node-B Emulator Behaviour
ACK	ACK: new transmission using 1 <sup>st</sup>
	redundancy and constellation version (RV)
NACK	NACK: retransmission using the next RV (up
	to the maximum permitted number or RV"s)
DTX	DTX: retransmission using the RV
	previously transmitted to the same H-ARQ
	process

NOTE: Performance requirements in this section assume a sufficient power allocation to HS-SCCH\_1 so that probability of reporting DTX is very low.

### 9.2.1 Single Link performance

The receiver single link performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) in different multi-path fading environments are determined by the information bit throughput R

# 9.2.1.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 1/2/3/3A/3B/3E (QPSK version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.2 and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.3. Enhanced performance requirements type 1 specified in Table 9.3A are based on receiver diversity.

Table 9.2: Test Parameters for Testing QPSK FRCs H-Set 1/H-Set 2/H-Set 3/H-Set 3A/H-Set 3B/H-Set 3C/3E

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference			P-CI	PICH	
$I_{oc}$	dBm/3.84 MHz		-6	60	
Redundancy and					
constellation version		{0,2,5,6}			
coding sequence					
Maximum number of				4	
HARQ transmission		4			
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with					
constant now	er HS-SCCH-1 shall o	nly use the	identity of t	he LIF jinde	r test for

Table 9.3: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation	Reference value			
Number	Conditions	HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 0 dB	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB	
4	DAG	-6	65	309	
1	PA3	-3	N/A	423	
2	PB3	-6	23	181	
2	PD3	-3	138	287	
3	VA30	-6	22	190	
3	VA30	-3	142	295	
4	VA120	-6	13	181	
4	VA120	-3	140	275	

\* Notes: 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.

those TTI intended for the UE.

- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24) .

Table 9.3A: Enhanced requirement type 1 QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation		Reference value	
Number	Conditions	HS-PDSCH	T-put $R$ (kbps) *	T-put R (kbps) *
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}$ / $I_{oc}$ = 10 dB
		-12	N/A	247
1	DAG	-9	N/A	379
1	PA3	-6	195	N/A
		-3	329	N/A
		-9	N/A	195
2	PB3	-6	156	316
		-3	263	N/A
		-9	N/A	212
3	VA30	-6	171	329
		-3	273	N/A
		-9	N/A	191
4	VA120	-6	168	293
		-3	263	N/A

1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1. \* Notes:

- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24).

#### 9.2.1.2 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels Hset 1/2/3 (16QAM version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.4 and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.5. Enhanced performance requirements type 1 specified in Table 9.5A are based on receiver diversity.

Table 9.4: Test Parameters for Testing 16QAM FRCs H-Set 1/H-Set 2/H-Set 3

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference			P-CF	PICH	
$I_{oc}$	dBm/3.84 MHz		-6	60	
Redundancy and constellation version coding sequence			{6,2	,1,5}	
Maximum number of HARQ transmission			4	4	

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.5: Minimum requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB	
1	DAG	-6	198	
1	PA3	-3	368	
2	PB3	-6	34	
		-3	219	
2	\/A20	-6	47	
3	VA30	-3	214	
4	\/\120	-6	28	
4	VA120	-3	167	

1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 1. Notes: 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer). 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R

should be scaled (multiplied by 3).

**ETSI** 

Table 9.5A: Enhanced requirement type 1 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

Test	Propagation	Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps) *	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB	
1	DAG	-9	312	
ı	PA3	-6	487	
2	PB3	-6	275	
2	PDS	-3	408	
3	1/420	-6	296	
3	VA30	-3	430	
4	1/4400	-6	271	
4	VA120	-3	392	

\* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.
2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in

#### 9.2.1.3 Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 4/5 specified in Annex A.7.1.4 and A.7.1.5 respectively, with the addition of the parameters in Table 9.6 and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.7 for H-Set 4 and table 9.8 for H-Set 5.

Table 9.6: Test Parameters for Testing QPSK FRCs H-Set 4/H-Set 5

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference			P-CI	PICH	
$I_{oc}$	dBm/3.84 MHz		-6	00	
Redundancy and constellation version coding sequence		{0,2,5,6}			
Maximum number of HARQ transmission				1	

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for

those TTI intended for the UE.

Table 9.7: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put $R$ (kbps) $\hat{I}_{or}/I_{oc}$ = 0 dB	T-put $R$ (kbps) $\hat{I}_{or}/I_{oc}$ = 10 dB
4	PA3	-6	72	340
1	PAS	-3	N/A	439
2	PB3	-6	24	186
2	FDS	-3	142	299
3	VA30	-6	19	183
3	VASU	-3	148	306
4	\/\120	-6	11	170
4	VA120	-3	144	284

kbps, where values of i+1/2 are rounded up to i+1, i integer).

3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R

should be scaled (multiplied by 3).

413

Test **Propagation** Reference value Conditions Number T-put R (kbps) T-put R (kbps) **HS-PDSCH**  $\hat{I}_{or}/I_{oc} = 0 \text{ dB}$  $\hat{I}_{or}/I_{oc} = 10 \text{ dB}$  $E_c/I_{or}$  (dB) 464 -6 98 PA3 1 -3 N/A 635 -6 35 272 PB3 2 -3 207 431 -6 33 285 3 VA<sub>30</sub> 213 443 -3 272 -6 20 4 VA120

Table 9.8: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 5

### 9.2.1.4 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

210

-3

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H-Set 6/6A/6B/6C/6E specified in Annex A.7.1.6 with the addition of the parameters in Table 9.8A and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.8B. Enhanced performance requirements type 1 as specified in Table 9.8B1 are based on receiver diversity. Enhanced performance requirements type 2 as specified in Table 9.8B2 are based on chip level equaliser. Enhanced performance requirements type 3 as specified in Table 9.8B3 and in Table 9.8B4 are based on receiver diversity and chip level equaliser. Enhanced performance requirements type 3i as specified in Table 9.8B5 are based on receiver diversity and interference-aware chip level equaliser.

Table 9.8A: Test Parameters for Testing QPSK FRCs H-Set 6/6A/6B/6C/6E

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference		P-CPICH			
$I_{oc}$	dBm/3.84 MHz	-60			
Redundancy and constellation version coding sequence			{0,2	,5,6}	
Maximum number of HARQ transmission		4			
Note: The HS-SCCH	-1 and HS-PDSCH sh	all be trans	mitted cont	inuously wit	h constant

e: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.8B: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put $R$ (kbps) $\hat{I}_{or}/I_{oc}$ = 10 dB	
1	PA3	-6	1407	
'	PAS	-3	2090	

Table 9.8B1: Enhanced requirements type 1 QPSK, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation	Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB	
1	PA3	-12	672	
1	FAS	-9	1305	

Table 9.8B2: Enhanced requirement type 2 QPSK, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB	
4	PA3	-6	1494	
ı		-3	2153	
2	DDO	-6	1038	
2	PB3	-3	1744	
2	1/420	-6	1142	
3	VA30	-3	1782	
4	\/\\120	-6	909	
4	VA120	-3	1467	

\* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 6.

- 2) For Fixed Reference Channel (FRC) H-Set 6A the reference values for R should be scaled (multiplied by 2).
- 3) For Fixed Reference Channel (FRC) H-Set 6B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 6C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 6E the reference values for R should be scaled (multiplied by 8).

Table 9.8B3: Enhanced requirement type 3 QPSK at  $\hat{I}_{or}/I_{oc}$  = 10 dB, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{c} {\sf HS\text{-}PDSCH} \\ E_c/I_{or} \ \ ({\sf dB}) \end{array}$	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB	
4	DAG	-9	1554	
ı	1 PA3	-6	2495	
2	PB3	-9	1190	
	FDS	-6	2098	
3	VA30	-9	1229	
3	VASU	-6	2013	
4	VA120	-9	1060	
4	VA120	-6	1674	

\* Notes: 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 6.

- 2) For Fixed Reference Channel (FRC) H-Set 6A the reference values for R should be scaled (multiplied by 2).
- 3) For Fixed Reference Channel (FRC) H-Set 6B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 6C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 6E the reference values for R should be scaled (multiplied by 8).

**Test** 

Propagation

Table 9.8B4: Enhanced requirement type 3 QPSK at  $\hat{I}_{or}/I_{oc}$  = 5 dB, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test Propagation		Reference value	
Number	Conditions	HS-PDSCH	T-put R (kbps) *
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 5 dB
5	DD2	-6	1248
5	PB3	-3	2044
33 33 44 55 55 55 55 55 55 55 55 55 55 55 55			

Table 9.8B5: Enhanced requirement type 3i QPSK at  $\hat{I}_{or}/I_{oc}$ '= 0 dB, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Reference value

Number	Conditions		T-put R (kbps) *
		HS-PDSCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB DIP1 = -2.75 dB DIP2 = -7.64 dB (Note 1)
1	PB3	-6	691
!	FB3	-3	1359
2	VA30	-6	661
		-3	1327
	l <sub>oc</sub> /l <sub>oc</sub> " = -5.27 dB 2) The reference 3) For Fixed Refe should be scaled 4) For Fixed Refe should be scaled 5) For Fixed Refe should be scaled 6) For Fixed Refe	). value R is for the Fixed erence Channel (FRC) H (multiplied by 2). erence Channel (FRC) H (multiplied by 3). erence Channel (FRC) H (multiplied by 4).	Reference Channel (FRC) H-Set 6. I-Set 6A the reference values for R I-Set 6B the reference values for R I-Set 6C the reference values for R I-Set 6E the reference values for R

#### 9.2.1.5 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H Set-6/6A/6B/6C/6E specified in Annex A.7.1.6 with the addition of the parameters in Table 9.8C and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.8D. Enhanced performance requirements type 1 as specified in Table 9.8D1 are based on receiver diversity. Enhanced performance requirements type 2 as specified in Table 9.8D2 are based on chip level equaliser. Enhanced performance requirements type 3 as specified in Table 9.8D3 and in Table 9.8D4 are based on receiver diversity and chip level equaliser.

Table 9.8C: Test Parameters for Testing 16-QAM FRCs H-Set 6/6A/6B/6C/6E

Parameter	Unit	Test 1	Test 2	Test 3	Test 4	Test 5
Phase reference				P-CPICH		
$I_{oc}$	dBm/3.84 MHz			-60		
Redundancy and constellation version coding sequence				{6,2,1,5}		
Maximum number of HARQ transmission				4		

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.8D: Minimum requirement 16QAM, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation		Reference value
Number	Conditions	HS-PDSCH T-put R (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}$ / $I_{oc}$ = 10 dB
1	1 PA3	-6	887
ı	PAS	-3	1664

Table 9.8D1: Enhanced requirements type 1 16QAM, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation		Reference value
Number	Conditions	HS-PDSCH T-put R (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB
4	PA3	-9	912
ı	PAS	-6	1730

Table 9.8D2: Enhanced requirement type 2 16QAM, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test Number	Propagation	Reference value	
	Conditions	HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB
4 500	DAG	-6	991
1	PA3	-3	1808
2	DDO	-6	465
2   F	PB3	-3	1370
3	VA30	-6	587
		-3	1488
4	\/\\100	-6	386
4	VA120	-3	1291

 $^{\star}$  Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 6

- 3) For Fixed Reference Channel (FRC) H-Set 6B the reference values for R should be scaled (multiplied by 3)
- 4) For Fixed Reference Channel (FRC) H-Set 6C the reference values for R should be scaled (multiplied by 4)
- 5) For Fixed Reference Channel (FRC) H-Set 6E the reference values for R should be scaled (multiplied by 8)

<sup>2)</sup> For Fixed Reference Channel (FRC) H-Set 6A the reference values for R should be scaled (multiplied by 2)

Table 9.8D3: Enhanced requirement type 3 16QAM at  $\hat{I}_{or}/I_{oc}$  = 10 dB, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test Number	Propagation	Reference value	
	Conditions	$HS ext{-PDSCH} \ E_c/I_{or} \  ext{(dB)}$	T-put $R$ (kbps) * $\hat{I}_{or}$ / $I_{oc}$ = 10 dB
4	DAG	-6	1979
1	PA3	-3	3032
2	DDO	-6	1619
2	PB3	-3	2464
2	\/^20	-6	1710
3	VA30	-3	2490
4	\/\\100	-6	1437
	VA120	-3	2148

\* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 6

- 2) For Fixed Reference Channel (FRC) H-Set 6A the reference values for R should be scaled (multiplied by 2)
- 3) For Fixed Reference Channel (FRC) H-Set 6B the reference values for R should be scaled (multiplied by 3)
- 4) For Fixed Reference Channel (FRC) H-Set 6C the reference values for R should be scaled (multiplied by 4)
- 5) For Fixed Reference Channel (FRC) H-Set 6E the reference values for R should be scaled (multiplied by 8)

Table 9.8D4: Enhanced requirement type 3 16QAM at  $\hat{I}_{or}/I_{oc}$  = 5 dB, Fixed Reference Channel (FRC) H-Set 6/6A/6B/6C/6E

Test	Propagation		Reference value
Number	Conditions	HS-PDSCH	T-put $R$ (kbps) *
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 5 dB
5	PB3	-6	779
3	PD3	-3	1688
	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled 4) For Fixed Refeshould be scaled	erence Channel (FRC) H (multiplied by 2) erence Channel (FRC) H (multiplied by 3) erence Channel (FRC) H (multiplied by 4)	Reference Channel (FRC) H-Set 6 -Set 6A the reference values for R -Set 6B the reference values for R -Set 6C the reference values for R -Set 6E the reference values for R

#### 9.2.1.6 Requirement 64QAM, Fixed Reference Channel (FRC) H-Set 8/8A/8B/8C/8E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H Set-8/8A/8B/8C/8E specified in Annex A.7.1.7 with the addition of the parameters in Table 9.8E and the downlink physical channel setup according to table C.8.

should be scaled (multiplied by 8)

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.8F2 and 9.8F3. Enhanced performance requirements type 2 as specified in Table 9.8F2 are based on chip level equaliser. Enhanced performance requirements type 3 as specified in Table 9.8F3 are based on receiver diversity and chip level equaliser.

Table 9.8F1: Test Parameters for Testing 64QAM FRCs H-Set 8/8A/8B/8C/8E

Parameter	Unit	Test 1
Phase reference		P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
$I_{otx}/I_{or}$	dB	-24.4
Redundancy and constellation version coding sequence		{6,2,1,5}
Maximum number of HARQ transmission		4

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.8F2: Enhanced requirement type 2 64QAM, Fixed Reference Channel (FRC) H-Set 8/8A/8B/8C/8E

Test	Propagation		Reference value
Number	Conditions		T-put $R$ (kbps) * HS-PDSCH
		$\hat{I}_{or}$ / $I_{oc}$ (dB)	$E_c/I_{or}$ = -2 dB
1	PA3	15	4507
Į.	FAS	18	5736
	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled 4) For Fixed Refeshould be scaled 5) For Fixed Refeshould be scaled should be scaled	value R is for the Fixed Reference Channel (FRC) H-Set 8. erence Channel (FRC) H-Set 8A the reference values for R d (multiplied by 2). erence Channel (FRC) H-Set 8B the reference values for R d (multiplied by 3). erence Channel (FRC) H-Set 8C the reference values for R d (multiplied by 4). erence Channel (FRC) H-Set 8E the reference values for R d (multiplied by 8). ining lor/loc, the contribution from $I_{or}$ is not included.	

Table 9.8F3: Enhanced requirement type 3 64QAM, Fixed Reference Channel (FRC) H-Set 8/8A/8B/8C/8E

Test	Propagation	Reference value		
Number	Conditions		T-put $R$ (kbps) * HS-PDSCH	
		$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -2 dB	
1	PA3	15	6412	
!	FAS	18	7638	
	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled 4) For Fixed Refeshould be scaled 5) For Fixed Refeshould be scaled	value R is for the Fixed Reference Channel (FRC) H-Set 8. erence Channel (FRC) H-Set 8A the reference values for R d (multiplied by 2). erence Channel (FRC) H-Set 8B the reference values for R d (multiplied by 3). erence Channel (FRC) H-Set 8C the reference values for R d (multiplied by 4). erence Channel (FRC) H-Set 8E the reference values for R d (multiplied by 8). ining lor/loc, the contribution from $I_{cr}$ is not included.		

# 9.2.1.7 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H Set-10/10A/10B/10C/10E specified in Annex A.7.1.10 with the addition of the parameters in Table 9.8G and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum performance requirements as specified in table 9.8H and table 9.8H1. Enhanced performance requirements type 2 as specified in Table 9.8H are based on chip level equaliser. Enhanced performance requirements type 3 as specified in Table 9.8H1 are based on receiver diversity and chip level equaliser.

Table 9.8G: Test Parameters for Testing QPSK FRCs H-Set 10/10A/10B/10C/10E

Parameter	Unit	Test 1	
Phase reference		P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60	
Redundancy and constellation version coding sequence		{0,2, 5, 6}	
Maximum number of HARQ transmission		4	
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.			

Table 9.8H: Enhanced requirement type 2 QPSK, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

Test	Propagation	Reference value				
Number	Conditions	HS-PDSCH	T-put R (kbps) *			
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 4 dB			
1	VA3	-2	1397			
	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled 4) For Fixed Refeshould be scaled 5) For Fixed Refeshould Refesh	erence Channel (FRC) H (multiplied by 2). erence Channel (FRC) H (multiplied by 3). erence Channel (FRC) H (multiplied by 4).	Reference Channel (FRC) H-Set 10. I-Set 10A the reference values for R I-Set 10B the reference values for R I-Set 10C the reference values for R I-Set 10E the reference values for R			

Table 9.8H1: Enhanced requirement type 3 QPSK, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

Test	Propagation	Reference value				
Number	Conditions	HS-PDSCH	T-put R (kbps) *			
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 4 dB			
1	VA3	-2	2621			
	<ul> <li>1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 10.</li> <li>2) For Fixed Reference Channel (FRC) H-Set 10A the reference values for should be scaled (multiplied by 2).</li> <li>3) For Fixed Reference Channel (FRC) H-Set 10B the reference values for R should be scaled (multiplied by 3).</li> </ul>					
	should be scaled 5) For Fixed Refe	(multiplied by 4).	I-Set 10C the reference values for R I-Set 10E the reference values for R			

# 9.2.1.8 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H Set-10/10A/10B/10C/10E specified in Annex A.7.1.10 with the addition of the parameters in Table 9.8I and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum performance requirements as specified in table 9.8J and table 9.8J1. Enhanced performance requirements type 2 as specified in Table 9.8J are based on chip level equaliser. Enhanced performance requirements type 3 as specified in Table 9.8J1 are based on receiver diversity and chip level equaliser.

Table 9.8I: Test Parameters for Testing 16-QAM FRCs H-Set 10/10A/10B/10C/10E

Parameter	Unit	Test 1	
Phase reference		P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60	
Redundancy and constellation version coding sequence		{6, 2, 1, 5}	
Maximum number of HARQ transmission		4	
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.			

Table 9.8J: Enhanced requirement type 2 16QAM, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

Test	Propagation	Reference value				
Number	Conditions	HS-PDSCH	T-put $R$ (kbps) *			
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 8 dB			
1	VA3	-2	1726			
	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled 4) For Fixed Refeshould be scaled 5) For Fixed Refeshould Refesh	erence Channel (FRC) H (multiplied by 2). erence Channel (FRC) H (multiplied by 3). erence Channel (FRC) H (multiplied by 4).	Reference Channel (FRC) H-Set 10. I-Set 10A the reference values for R I-Set 10B the reference values for R I-Set 10C the reference values for R I-Set 10E the reference values for R			

Table 9.8J1: Enhanced requirement type 3 16QAM, Fixed Reference Channel (FRC) H-Set 10/10A/10B/10C/10E

Test	Propagation					
Number	Conditions	HS-PDSCH	T-put R (kbps) *			
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 8 dB			
1	VA3	-2	3396			
* Notes:	2) For Fixed Refeshould be scaled 3) For Fixed Refeshould be scaled	erence Channel (FRC) H (multiplied by 2). erence Channel (FRC) H (multiplied by 3).	Reference Channel (FRC) H-Set 10. I-Set 10A the reference values for I-Set 10B the reference values for R I-Set 10C the reference values for R			
	should be scaled 5) For Fixed Refe	(multiplied by 4).	I-Set 10E the reference values for R			

#### 9.2.2 Open Loop Diversity performance

The receiver single open loop transmit diversity performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) in multi-path fading environments are determined by the information bit throughput R.

# 9.2.2.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 1/2/3/3A/3B/3C/3E (QPSK version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.9 and the downlink physical channel setup according to table C.9.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.10. Enhanced performance requirements type 1 specified in Table 9.10A are based on receiver diversity.

Table 9.9: Test Parameters for Testing QPSK FRCs H-Set 1/2/3/3A/3B/3C/3E

Parameter	Unit	Test 1	Test 2	Test 3
Phase reference		P-CPICH		
$I_{oc}$	dBm/3.84 MHz	-60		
Redundancy and constellation version coding sequence			{0,2,5,6}	
Maximum number of HARQ transmission			4	
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with				

constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.10: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation			
Number	Conditions	HS-PDSCH	T-put R (kbps) *	T-put R (kbps) *
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}/I_{oc}$ = 10 dB
1	PA3	-6	77	375
	FAS	-3	180	475
2	PB3	-6	20	183
	FDS	-3	154	274
3	VA30	-6	15	187
3	VA30	-3	162	284

Notes: 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.

- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24).

Table 9.10A: Enhanced requirement type 1 QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation		Reference value			
Number	Conditions	HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 0 dB	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB		
		-12	N/A	268		
1	DA2	-9	N/A	407		
1	PA3	-6	197	N/A		
		-3	333	N/A		
		-9	N/A	183		
2	PB3	-6	152	288		
		-3	251	N/A		
		-9	N/A	197		
3	VA30	-6	164	307		
		-3	261	N/A		

\* Notes:

- 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.
- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24).

# 9.2.2.2 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 1/2/3/3A/3B/3C/3E (16QAM version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.11 and the downlink physical channel setup according to table C.9.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.12. Enhanced performance requirements type 1 specified in Table 9.12A are based on receiver diversity.

Table 9.11: Test Parameters for Testing 16QAM FRCs H-Set 1/2/3/3A/3B/3C/3E

Parameter	Unit	Test 1	Test 2	Test 3
Phase reference			P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60		
Redundancy and constellation version coding sequence			{6,2,1,5}	
Maximum number of HARQ transmission			4	

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for

those TTI intended for the UE.

Table 9.12: Minimum requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation	Reference value			
Number	Conditions	HS-PDSCH T-put R (kbps) *			
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB		
1	PA3	-6	295		
ı	PAS	-3	463		
2	PB3	-6	24		
2	FDS	-3	243		
3	VA30	-6	35		
3		-3	251		

\* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.

- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24).

Table 9.12A: Enhanced requirement type 1 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3/3A/3B/3C/3E

Test	Propagation	R	eference value
Number	Conditions	HS-PDSCH	T-put R (kbps) *
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}$ / $I_{oc}$ = 10 dB
1	PA3	-9	340
'	PAS	-6	513
2	PB3	-6	251
	FDS	-3	374
3	1/420	-6	280
3	VA30	-3	398

Notes:

- 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.
- 2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).
- 3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 3A the reference values for R should be scaled (multiplied by 6).
- 5) For Fixed Reference Channel (FRC) H-Set 3B the reference values for R should be scaled (multiplied by 9).
- 6) For Fixed Reference Channel (FRC) H-Set 3C the reference values for R should be scaled (multiplied by 12).
- 7) For Fixed Reference Channel (FRC) H-Set 3E the reference values for R should be scaled (multiplied by 24).

#### 9.2.2.3 Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 4/5 specified in Annex A.7.1.4 and A.7.1.5 respectively, with the addition of the parameters in Table 9.13 and the downlink physical channel setup according to table C.9.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.14 for H-Set 4 and table 9.15 for H-Set 5.

Table 9.13: Test Parameters for Testing QPSK FRCs H-Set 4/H-Set 5

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
Phase reference		P-CPICH			
$I_{oc}$	dBm/3.84 MHz	-60			
Redundancy and constellation version coding sequence			{0,2	,5,6}	
Maximum number of HARQ transmission			4	4	
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for					

constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.14: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4

Test	Propagation		Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps) *	T-put R (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}/I_{oc}$ = 10 dB	
1	PA3	-6	70	369	
!	PAS	-3	171	471	
2	PB3	-6	14	180	
2   PB3	-3	150	276		
3	VA30	-6	11	184	
3	VA30	-3	156	285	

Table 9.15: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 5

Test	Propagation		Reference value	e value	
Number Conditions		HS-PDSCH	T-put R (kbps) *	T-put $R$ (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}/I_{oc}$ = 10 dB	
	4	-6	116	563	
1	PA3	-3	270	713	
2	DD2	-6	30	275	
2	PB3	-3	231	411	
2	\/^20	-6	23	281	
3	VA30	-3	243	426	

### 9.2.3 Closed Loop Diversity Performance

The closed loop transmit diversity (Mode 1) performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) in multi-path fading environments are determined by the information bit throughput R.

#### 9.2.3.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 1/2/3 (QPSK version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.16 and the downlink physical channel setup according to table C.10.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.17. Enhanced performance requirements type 1 specified in Table 9.17A are based on receiver diversity.

Table 9.16: Test Parameters for Testing QPSK FRCs H-Set 1/H-Set 2/H-Set 3

Bm/3.84 MHz		P-CPICH -60	
Bm/3.84 MHz		60	
		-00	
Chip	0		
	{0,2,5,6}		
	4		
%	4		
	1		
	%	%	{0,2,5,6}

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.17: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3

Test	Propagation		Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps) *	T-put $R$ (kbps) *	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}/I_{oc}$ = 10 dB	
1	DAG	-6	118	399	
1	PA3	-3	225	458	
2	DDO	-6	50	199	
2	PB3	-3	173	301	
2	\/^20	-6	47	204	
3	VA30	-3	172	305	

\* Notes: 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.

2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).

3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).

Table 9.17A: Enhanced requirement type 1 QPSK, Fixed Reference Channel (FRC) H-Set 1/2/3

Test	Propagation		Reference value	
Number	Conditions	HS-PDSCH $E_c/I_{or}$ (dB)	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 0 dB	T-put $R$ (kbps) * $\hat{I}_{or}/I_{oc}$ = 10 dB
		-12	N/A	297
1	PA3	-9	N/A	410
!	FAS	-6	242	N/A
		-3	369	N/A
		-9	N/A	194
2	PB3	-6	170	308
		-3	272	N/A
		-9	N/A	204
3	VA30	-6	172	315
		-3	270	N/A

\* Notes: 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.

2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, i integer).

3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3).

#### 9.2.3.2 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set  $\frac{1}{2}$  (16QAM version) specified in Annex A.7.1.1, A.7.1.2 and A.7.1.3 respectively, with the addition of the parameters in Table 9.18 and the downlink physical channel setup according to table C.10.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.19. Enhanced performance requirements type 1 specified in Table 9.19A are based on receiver diversity.

Table 9.18: Test Parameters for Testing 16-QAM FRCs H-Set 1/H-Set 2/H-Set 3

Parameter	Unit	Test 1	Test 2	Test 3
Phase reference			P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60		
DPCH frame offset	Chin		0	
$( au_{DPCH,n})$	Chip		0	
Redundancy and				
constellation version		{6,2,1,5}		
coding sequence				
Maximum number of			4	
HARQ transmission			<del></del>	
Feedback Error Rate	%		4	
Closed loop timing			1	
adjustment mode			ı	
Note: The HS-SCCH	Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with			ly with
constant powe	constant power. HS-SCCH-1 shall only use the identity of the UE under test for			under test for

Table 9.19: Minimum requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

those TTI intended for the UE.

Test	Propagation		Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps) *		
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB		
1	PA3	-6	361		
ı		-3	500		
2	PB3	-6	74		
	PDS	-3	255		
3	1/420	-6	84		
	VA30	-3	254		

\* Notes:

1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 1

2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, I integer)

3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R should be scaled (multiplied by 3 and rounding to the nearest integer t-put in kbps, where values of i+1/2 are rounded up to i+1, I integer)

Table 9.19A: Enhanced requirement type 1 16QAM, Fixed Reference Channel (FRC) H-Set 1/2/3

Test	Propagation	on Reference value			
Number	Conditions	HS-PDSCH	T-put R (kbps) *		
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 10 dB		
1	PA3	-9	376		
!	FAS	-6	532		
2	PB3	-6	267		
	2   PB3	-3	393		
3	VA30	-6	279		
3	VASU	-3	404		
* Notes:	1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.				
	2) For Fixed Reference Channel (FRC) H-Set 2 the reference values for R				
	should be scaled (multiplied by 1.5 and rounding to the nearest integer t-put in				
	kbps, where values of i+1/2 are rounded up to i+1, I integer).				
	3) For Fixed Reference Channel (FRC) H-Set 3 the reference values for R				

### 9.2.3.3 Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4/5

should be scaled (multiplied by 3).

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 4/5 specified in Annex A.7.1.4 and A.7.1.5 respectively, with the addition of the parameters in Table 9.20 and the downlink physical channel setup according to table C.10.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.21 for H-Set 4 and table 9.22 for H-Set 5.

Table 9.20: Test Parameters for Testing QPSK FRCs H-Set 4/H-Set 5

Parameter	Unit	Test 1	Test 2	Test 3
Phase reference			P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60		
DPCH frame offset	Chip		0	
$( au_{DPCH,n})$	Onip		O	
Redundancy and constellation version coding sequence		{0,2,5,6}		
Maximum number of HARQ transmission		4		
Feedback Error Rate	%	4		
Closed loop timing adjustment mode		1		
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with				

Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.21: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 4

Test	Propagation		Reference value			
Number	Conditions	HS-PDSCH	T-put $R$ (kbps)	T-put $R$ (kbps)		
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}/I_{oc}$ = 10 dB		
1	PA3	-6	114	398		
1	PAS	-3	223	457		
2	PB3	-6	43	196		
	PD3	-3	167	292		
3	VA30	-6	40	199		
3	VA30	-3	170	305		

Table 9.22: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 5

Test	Propagation	n Reference value		
Number	Conditions	HS-PDSCH	T-put $R$ (kbps)	T-put $R$ (kbps)
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	$\hat{I}_{or}$ / $I_{oc}$ = 10 dB
1	PA3	-6	177	599
ı	FAS	-3	338	687
2	PB3	-6	75	299
	FB3	-3	260	452
3	VA30	-6	71	306
3	VA30	-3	258	458

#### 9.2.3.4 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 6

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H-Set 6 specified in Annex A.7.1.6 with the addition of the parameters in Table 9.22A and the downlink physical channel setup according to table C.10.

Using this configuration the throughput shall meet or exceed the requirements specified in table 9.22B. Enhanced performance requirements type 2 as specified in Table 9.22B are based on chip level equaliser.

Table 9.22A: Test Parameters for Testing QPSK FRCs H-Set 6

Unit	Test 1
	P-CPICH
dBm/3.84 MHz	-60
Oh:n	0
Chip	0
	{0,2,5,6}
	4
%	4
	1
	dBm/3.84 MHz Chip

Iote: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.

Table 9.22B: Enhanced requirement type 2 QPSK, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation	Reference value			
Number	Conditions	$\begin{array}{c} {\sf HS\text{-}PDSCH} \\ E_c/I_{or} \ \ ({\sf dB}) \end{array}$	T-put $R$ (kbps) $\hat{I}_{or}/I_{oc}$ = 10 dB		
1	PB3	-3	1536		

#### 9.2.3.5 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 6

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channel H Set-6 specified in Annex A.7.1.6 with the addition of the parameters in Table 9.22C and the downlink physical channel setup according to table C.10.

Using this configuration the throughput shall meet or exceed the requirements specified in table 9.22D. Enhanced performance requirements type 2 specified in Table 9.22D are based on chip level equaliser.

Table 9.22C: Test Parameters for Testing 16-QAM FRCs H-Set 6

Parameter	Unit	Test 1		
Phase reference		P-CPICH		
$I_{oc}$	dBm/3.84 MHz	-60		
DPCH frame offset	Chip	0		
$( au_{DPCH,n})$	Chip	O		
Redundancy and				
constellation version		{6,2,1,5}		
coding sequence				
Maximum number of		4		
HARQ transmission		4		
Feedback Error Rate	%	4		
Closed loop timing		1		
adjustment mode		l l		
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with				
constant power. HS-SCCH-1 shall only use the identity of the UE under test for				
those TTI intended for the UE.				

Table 9.22D: Enhanced requirement type 2 16QAM, Fixed Reference Channel (FRC) H-Set 6

Test	Propagation	Reference value		
Number	Conditions	HS-PDSCH	T-put R (kbps)	
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}$ / $I_{oc}$ = 10 dB	
1	PB3	-3	1154	

#### 9.2.4 MIMO Performance

The MIMO performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) in multi-path fading environments is determined by the information bit throughput R.

#### 9.2.4.1 Requirement Fixed Reference Channel (FRC) H-Set 9/9A/9B/9C/9E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 9/9A/9B/9C/9E specified in Annex A.7.1.9, with the addition of the parameters in Table 9.22E1 and the downlink physical channel setup according to Table C.9 and Table C.12D. Precoding weight set restriction shall not be enabled.

The primary precoding vector signalled on the HS-SCCH and applied on the associated HS-DSCH subframe shall correspond to the preferred primary precoding vector reported immediately before the start of the HS-SCCH subframe.

The determination of applied precoding vector for single transport block transmission shall be as follows: the reported preferred primary precoding vector shall be applied to the primary transport block.

The determination of applied precoding vector for two transport block transmission shall be as follows: If the CQI reported by the UE indicates a preference for a single transport block, the preferred primary precoding vector shall be applied to the primary transport block. If the CQI reported by the UE indicates a preference for two transport blocks, and the preferred primary precoding vector corresponds to the highest reported CQI value, the preferred primary precoding vector shall be applied to the primary precoding vector does not correspond to the highest reported CQI value, the preferred primary precoding vector shall be applied to the secondary transport block.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in Table 9.22E2 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22E3 with the downlink physical channel setup in Table C.12D.

Table 9.22E1: Test Parameters for Testing MIMO FRC H-Set 9/9A/9B/9C/9E

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
$I_{oc}$	dBm/3.84 MHz		-(	60	
DPCH frame offset $(\tau_{DPCH,n})$	Chip	0			
Redundancy and constellation version coding sequence		{0,3,2,1} for 16-QAM and QPSK		PSK	
Maximum number of HARQ transmission		4			
MIMO N_cqi_typeA/M_cqi ratio		1.	/1	1.	/2
PCI/CQI reporting Error Rate	%	(	)	(	)
Number of transport blocks		2	2		1
Modulation		Block: Secondary	Transport 16QAM Transport QPSK	Block: Secondary	Transport 16QAM Transport not used.

Table 9.22E2: Minimum requirement MIMO, Fixed Reference Channel (FRC) H-Set 9/9A/9B/9C/9E with downlink physical channel setup in Table C.9

Test	Propagation	Reference value			
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	T-put $R$ (kbps) * HS-PDSCH $E_c/I_{or}$ = -2 dB		
1	PA3	10	5563		
2	VA3	10	4347		
3	PA3	6	3933		
4	VA3	6	3011		
* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-Set 9.					
<ul><li>2) For Fixed Reference Channel (FRC) H-Set 9A the reference values for R should be scaled (multiplied by 2).</li><li>3) For Fixed Reference Channel (FRC) H-Set 9B the reference values for R should be scaled (multiplied by 3).</li></ul>					
		rence Channel (FRC) H-Se	et 9C the reference values		

for R should be scaled (multiplied by 4). 5) For Fixed Reference Channel (FRC) H-Set 9E the reference values

for R should be scaled (multiplied by 8).

Table 9.22E3: Minimum requirement MIMO, Fixed Reference Channel (FRC) H-Set 9/9A/9B/9C/9E with downlink physical channel setup in Table C.12D

Test	Propagation	Reference value				
Number	Conditions		T-put $R$ (kbps) * HS-PDSCH			
		$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -2 dB			
1	PA3	10	5394			
2	VA3	10	4344			
3	PA3	6	3742			
4	VA3	6	2926			
* Notes:	* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H-					
Set 9.						
	<ol><li>For Fixed Reference Channel (FRC) H-Set 9A the reference values</li></ol>					
	for R should be scaled (multiplied by 2).					
	<ol><li>For Fixed Refe</li></ol>	rence Channel (FRC) H-Se	et 9B the reference values			
f	for R should be scaled (multiplied by 3).					
	4) For Fixed Reference Channel (FRC) H-Set 9C the reference values					
f	for R should be scaled (multiplied by 4).					
	5) For Fixed Refe	rence Channel (FRC) H-Se	et 9E the reference values			
f	for R should be so	caled (multiplied by 8).				

#### 9.2.4.2 Requirement Fixed Reference Channel (FRC) H-Set 11/11A/11B/11C/11E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-Set 11/11A/11B/11C/11E specified in Annex A.7.1.11, with the addition of the parameters in Table 9.22F1 and the downlink physical channel setup according to Table C.9 and Table C.12D. Precoding weight set restriction shall not be enabled.

The primary precoding vector signalled on the HS-SCCH and applied on the associated HS-DSCH subframe shall correspond to the preferred primary precoding vector reported immediately before the start of the HS-SCCH subframe.

The determination of applied precoding vector for two transport block transmission shall be as follows: If the CQI reported by the UE indicates a preference for a single transport block, the preferred primary precoding vector shall be applied to the primary transport block. If the CQI reported by the UE indicates a preference for two transport blocks, and the preferred primary precoding vector corresponds to the highest reported CQI value, the preferred primary precoding vector shall be applied to the primary precoding vector does not correspond to the highest reported CQI value, the preferred primary precoding vector shall be applied to the secondary transport block.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in Table 9.22F2 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22F3 with the downlink physical channel setup in Table C.12D.

Table 9.22F1: Test Parameters for Testing MIMO FRC H-Set 11/11A/11B/11C/11E

Parameter	Unit	Test 1
$I_{oc}$	dBm/3.84 MHz	-60
DPCH frame offset (τ <sub>DPCH,n</sub> )	Chip	0
Redundancy and constellation version coding sequence		{0,3,2,1} for 16QAM and 64QAM
Maximum number of HARQ transmission		4
MIMO N_cqi_typeA/M_cqi ratio		1/1
PCI/CQI reporting Error Rate	%	0
Number of transport blocks		2
Modulation		Primary Transport Block: 64QAM Secondary Transport Block: 16QAM

Table 9.22F2: Minimum requirement MIMO, Fixed Reference Channel (FRC) H-Set 11/11A/11B/11C/11E with downlink physical channel setup in Table C.9

Test	Propagation	Refere	nce value			
Number	Conditions		T-put $R$ (kbps) * HS-PDSCH			
		$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -1.5 dB			
1	PA3	18	9980			
* Notes: 1)The reference value R is for the Fixed Reference Channel (FRC) H- Set 11.						
:	2) For Fixed Reference Channel (FRC) H-Set 11A the reference values for R should be scaled (multiplied by 2).					
	3) For Fixed Reference Channel (FRC) H-Set 11B the reference values for R should be scaled (multiplied by 3).					
	4) For Fixed Reference Channel (FRC) H-Set 11C the reference values for R should be scaled (multiplied by 4).					
	5) For Fixed Refe		et 11E the reference values			

Table 9.22F3: Minimum requirement MIMO, Fixed Reference Channel (FRC) H-Set 11/11A/11B/11C/11E with downlink physical channel setup in Table C.12D

Test	Propagation	nce value	
Number	Conditions		T-put R (kbps) * HS-PDSCH
		$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -1.5 dB
1	PA3	18	9880
	Set 11. 2) For Fixed Refelor R should be so 3) For Fixed Refelor R should be so 4) For Fixed Refelor R should be so 5) For Fixed Refelor R should Refelor R should Refelor R should Refelor R	caled (multiplied by 2). rence Channel (FRC) H-Secaled (multiplied by 3). rence Channel (FRC) H-Secaled (multiplied by 4).	et 11A the reference values et 11B the reference values et 11C the reference values et 11E the reference values

#### 9.2.4A MIMO only with single-stream restriction Performance

The MIMO only with single-stream performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) in multi-path fading environments are determined by the information bit throughput R.

#### 9.2.4A.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 1/1A/1B/1C/1E (QPSK version) specified in Annex A.7.1.1, with the addition of the parameters in Table 9.22G1 and the downlink physical channel setup according to Table C.9 and Table C.12D. Precoding weight set restriction shall be enabled for the tests with the downlink physical channel setup according to Table C.12D, defined in Table 9.22G2A and Table 9.22G4. Precoding weight set restriction shall not be enabled for the tests with the downlink physical channel setup according to Table C.9, defined in Table 9.22G2 and Table 9.22G3.

The primary precoding vector signalled on the HS-SCCH and applied on the associated HS-DSCH subframe shall correspond to the preferred primary precoding vector reported immediately before the start of the HS-SCCH subframe.

The determination of applied precoding vector for single transport block transmission shall be as follows: the reported preferred primary precoding vector shall be applied to the primary transport block.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in Table 9.22G2 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22G2A with the downlink physical channel setup in Table C.12D. If UE supports enhanced performance requirements type 3, the throughput shall meet or exceed the minimum requirements specified in Table 9.22G3 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22G4 with the downlink physical channel setup in Table C.12D. The performance requirements specified in Table 9.22G2 and Table 9.22G2A are based on chip level equaliser and the performance requirements specified in Table 9.22G3 and Table 9.22G4 are based on chip level equaliser with receiver diversity.

Table 9.22G1: Test Parameters for Testing QPSK FRCs H-Set 1/1A/1B/1C/1E

Pa	arameter	Unit	Test 1	Test 2
$I_{oc}$		dBm/3.84 MHz	-60	
Redundancy and constellation version coding sequence			{0,3,2,1}	
Maximum number of HARQ transmission			4	4
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.				

Table 9.22G2: Enhanced requirement type 2 QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.9

Test	Propagation	Reference value				
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	T-put $R$ (kbps)* HS-PDSCH $E_c/I_{or}$ = -3 dB			
1	PA3	0	305			
2	VA3	3	357			
*Notes:	2) For Fixed Refe (multiplied by 2).	e reference value R is for the Fixed Reference Channel (FRC) H-Set 1.  Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled blied by 2).  Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled.				

- 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).

Table 9.22G2A: Enhanced requirement type 2 QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.12D

Conditions			
	<i>Î /I (</i> dB)	T-put $R$ (kbps)* HS-PDSCH $E_c/I_{or}$ = -3 dB	
	or oc Co-7	Z <sub>c</sub> · z <sub>or</sub>	
PA3	0	279	
VA3	3	345	
For Fixed Referoultiplied by 2). For Fixed Referoultiplied by 3). For Fixed Referoultiplied by 4).	erence Channel (FRC) H-Set 1B the reference values for R should be scaled erence Channel (FRC) H-Set 1C the reference values for R should be scaled		
1	VA3 The reference of For Fixed Reference of Prixed Reference of Pr	VA3  The reference value R is for the Fixed Reference Channel (FRC) H-S ultiplied by 2). For Fixed Reference Channel (FRC) H-S ultiplied by 3). For Fixed Reference Channel (FRC) H-S ultiplied by 4). For Fixed Reference Channel (FRC) H-S refixed Reference Channel (FRC) H-S	

Table 9.22G3: Enhanced requirement type 3 QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.9

Test	Propagation	Reference value		
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	T-put $R$ (kbps)* HS-PDSCH $E_c/I_{or}$ = -6 dB	
		or oc C	306	
1	PA3	0		
2	VA3	0	236	
	1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.			

- 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2).
- 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).

Table 9.22G4: Enhanced requirement type 3 QPSK, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.12D

Test	Propagation	Reference value			Reference value	
Number	Conditions	T-put R (kbps)* HS-PDSCH				
		$\hat{I}_{or}/I_{oc}$ (dB)	$E_c/I_{or}$ = -6 dB			
1	PA3	0	285			
2	VA3	0	230			
	1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1. 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2). 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3). 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4). 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).					

#### 9.2.4A.2 Requirement 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 1/1A/1B/1C/1E (16QAM version) specified in Annex A.7.1.1, with the addition of the parameters in Table 9.22H1 and the downlink physical channel setup according to Table C.12D. Precoding weight set restriction shall be enabled for the tests with the downlink physical channel setup according to Table C.12D, defined in Table 9.22H2A and 9.22H4. Precoding weight set restriction shall not be enabled for the tests with the downlink physical channel setup according to Table C.9, defined in Table 9.22H2 and Table 9.22H3.

The primary precoding vector signalled on the HS-SCCH and applied on the associated HS-DSCH subframe shall correspond to the preferred primary precoding vector reported immediately before the start of the HS-SCCH subframe.

The determination of applied precoding vector for single transport block transmission shall be as follows: the reported preferred primary precoding vector shall be applied to the primary transport block.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in Table 9.22H2 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22H2A with the downlink physical channel setup in Table C.12D. If UE supports enhanced performance requirements type 3, the throughput shall meet or exceed the minimum requirements specified in Table 9.22H3 with the downlink physical channel setup in Table C.9, and the minimum requirements specified in Table 9.22H4 with the downlink physical channel setup in Table C.12D. The performance requirements specified in Table 9.22H2 and Table 9.22H2A are based on chip level equaliser and the performance requirements specified in Table 9.22H3 and Table 9.22H4 are based on chip level equaliser with receiver diversity.

Table 9.22H1: Test Parameters for Testing 16QAM FRCs H-Set 1/1A/1B/1C/1E

Parameter	Unit	Test 1	Test 2
$I_{oc}$	dBm/3.84 MHz	-6	60
Redundancy and constellation version coding sequence		{0,3	,2,1}
Maximum number of HARQ transmission			4
Note: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for those TTI intended for the UE.			

Table 9.22H2: Enhanced requirement type 2 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.9

Test	Propagation	Reference value		
Number	Conditions	T-put R (kbps)* HS-PDSCH		
		$\hat{I}_{or}$ / $I_{oc}$ (dB)	$E_c/I_{or}$ = -3 dB	
1	PA3	3	394	
2	VA3	6	388	

\*Notes:

- 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.
- 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2).
- 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).

Table 9.22H2A: Enhanced requirement type 2 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.12D

Propagation	Reference value		
Conditions	T-put R (kbps)* HS-PDSCH		
	$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -3 dB	
PA3	3	363	
VA3	6	380	
1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1. 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2). 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 2).			
	PA3 VA3  1) The reference 2) For Fixed Refe (multiplied by 2).	Conditions $\hat{I}_{or}/I_{oc} \text{ (dB)}$ PA3 $3$ VA3 $6$ 1) The reference value R is for the Fixed Reference Channel (FRC) H-S (multiplied by 2). 3) For Fixed Reference Channel (FRC) H-S	

- 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).

Table 9.22H3: Enhanced requirement type 3 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.9

Test	Propagation	Reference value		
Number	Conditions	T-put R (kbps)* HS-PDSCH		
		$\hat{I}_{or}^{}$ $/$ $I_{oc}^{}$ (dB)	$E_c/I_{or}$ = -3 dB	
1	PA3	0	385	
2	VA3	3	437	

\*Notes:

- 1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1.
- 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2).
- 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3).
- 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4).
- 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).

Table 9.22H4: Enhanced requirement type 3 16QAM, Fixed Reference Channel (FRC) H-Set 1/1A/1B/1C/1E with downlink physical channel setup in Table C.12D

Test	Propagation	Reference value		
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	T-put $R$ (kbps)* HS-PDSCH $E_c/I_{or}$ = -3 dB	
1	PA3	0	365	
2	VA3	3	433	
	1) The reference value R is for the Fixed Reference Channel (FRC) H-Set 1. 2) For Fixed Reference Channel (FRC) H-Set 1A the reference values for R should be scaled (multiplied by 2). 3) For Fixed Reference Channel (FRC) H-Set 1B the reference values for R should be scaled (multiplied by 3). 4) For Fixed Reference Channel (FRC) H-Set 1C the reference values for R should be scaled (multiplied by 4). 5) For Fixed Reference Channel (FRC) H-Set 1E the reference values for R should be scaled (multiplied by 8).			

## 9.3 Reporting of Channel Quality Indicator

The propagation conditions for this subclause are defined in table B.1C for non-MIMO operation under fading conditions, in subclause B.2.6.1 for MIMO operation under single stream conditions, and in subclause B.2.6.2 for MIMO operation under dual stream conditions.

For the cases in this subclause where CQI reporting is evaluated under fading conditions or under MIMO single/dual stream conditions it is expected that the UE will not always detect the HS-SCCH, resulting in a DTX for the uplink ACK/NACK transmission. The downlink configuration for evaluating CQI performance does not use retransmission. Therefore any BLER calculations must exclude any packets where the UE may have attempted to combine data from more than one transmission due to having missed one or more new data indicators or initial transmissions in MIMO operation from lost HS-SCCH transmissions.

For the requirements for UEs supporting HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 and 36, when the carriers are located in the same frequency band, the spacing of the carrier frequencies of the two cells shall be 5 MHz.

### 9.3.1 Single Link Performance

#### 9.3.1.1 AWGN propagation conditions

The reporting accuracy of channel quality indicator (CQI) under AWGN environments is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median.

#### 9.3.1.1.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.23, and using the downlink physical channels specified in table C.8, the reported CQI value shall be in the range of  $\pm$ 0 fthe reported median more than 90% of the time. If the HS-PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, the BLER using the transport format indicated by the (median CQI  $\pm$ 2) shall be greater than 0.1. If the HS-PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, the BLER using transport format indicated by (median CQI  $\pm$ 1) shall be less than or equal to 0.1.

Table 9.23: Test Parameter for CQI test in AWGN - single link

Parameter	Unit	Test 1	Test 2	Test 3
$\hat{I}_{or}$ / $I_{oc}$	dB	0	5	10
$I_{oc}$	dBm/3.84 MHz		-60	
Phase reference	-		P-CPICH	
$HS ext{-}PDSCHE_c/I_{or}$	dB		-3	
HS-SCCH_1 $E_c/I_{or}$	dB		-10	
DPCH $E_c/I_{or}$	dB		-10	
Maximum number of H-ARQ transmission	-		1	
Number of HS-SCCH set to be monitored	-		1	
CQI feedback cycle	ms	2		
CQI repetition factor	-	1		
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.		
Note 1: Measurement poin [7].	wer offset 'Γ' is cor	nfigured by RI	RC accordingly a	and as defined
Note 2: TF for HS-PDSC based on median	CH is configured according to the reported CQI statistics. TF an CQI, median CQI -1, median CQI+2 are used. Other physical eters are configured according to the CQI mapping table 325.214.			Other physical
	/lor is decreased according to reference power adjustment Δ			justment Δ
Note 4: For any given tra	ransport format the power of the HS-SCCH and HS-PDSCH shal continuously with constant power.			S-PDSCH shall
Note 5: UEs from capabi	lity categories 13-2	3-20 shall be configured in non-64QAM/non- e CQI tables according to TS 25.214.		

### 9.3.1.1.2 Minimum Requirement – UE HS-DSCH categories 13,14,17,18, 19 and 20

For the parameters specified in Table 9.24, and using the downlink physical channels specified in table C.8, the reported CQI value shall be in the range of  $\pm$ 0 fthe reported median more than 90% of the time. If the HS-PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, the BLER using the transport format indicated by the (median CQI + 2) shall be greater than 0.1. If the HS-PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, the BLER using transport format indicated by (median CQI -1) shall be less than or equal to 0.1.

Table 9.24: Test Parameter for CQI test in AWGN - single link

Parameter		Unit	Test 1
$\hat{I}_{or}$ / $I_{oc}$		dB	15
$I_{oc}$		dBm/3.84 MHz	-60
Phase reference		-	P-CPICH
$HS ext{-}PDSCHE_c/I_o$	r	dB	-2
HS-SCCH_1 $E_c/I$	or	dB	-12
$DPCH\ E_c/I_{or}$		dB	-12
Maximum number H-ARQ transmission	on	-	1
Number of HS-SCCH to be monitored	l set	-	1
CQI feedback cyc	CQI feedback cycle		2
CQI repetition fact	CQI repetition factor		1
HS-SCCH-1 signall pattern	HS-SCCH-1 signalling pattern  frame HS-SCCH-1 signalling be 'XOOXOO', where in which the HS-SCCH-1 u of the UE under test, and 'u in which the HS-SCCH-1 u		To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.
	ent po	wer offset ' $\Gamma$ ' is cor	nfigured by RRC accordingly and as defined
based on r	nediar tramet	CH is configured according to the reported CQI statistics. TF an CQI, median CQI -1, median CQI+2 are used. Other physical eters are configured according to the CQI mapping table 25.214.	
Note 3: HS-PDSCI described			cording to reference power adjustment $\Delta$
Note 4: For any given	en tra	nsport format the p	power of the HS-SCCH and HS-PDSCH shall
be transmitted continuously with constant power.  Note 5: The UE shall be configured in 64QAM/non-MIMO mode and use appropriate CQI tables according to TS 25.214.		M/non-MIMO mode and use appropriate	

# 9.3.1.1.3 Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 and 36

For the parameters specified in Table 9.25, and using the downlink physical channels specified in table C.8, with a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, for each of the serving cells, the reported CQI value for the cell shall be in the range of +/-2 of the cell-specific reported median more than 90% of the time. If the HS-PDSCH BLER, for any of the cells, using the transport format indicated by cell-specific median CQI is less than or equal to 0.1, the BLER for this cell using the transport format indicated by the (cell-specific median CQI +2) shall be greater than 0.1. If the HS-PDSCH BLER, for any of the cells, using the transport format indicated by the cell-specific median CQI is greater than 0.1, the BLER using transport format indicated by (cell-specific median CQI -1) shall be less than or equal to 0.1.

Table 9.25: Test Parameter for CQI test in AWGN - single link

Parameter	Unit	Test 1	
$\hat{I}_{or1}/I_{oc}$	dB	0	
$\hat{I}_{or2}/I_{oc}$	dB	10	
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH	
$HS\text{-PDSCH}E_c/I_{or}$	dB	-3	
HS-SCCH_1 $E_c/I_{or}$	dB	-10	
$DPCH\ E_c/I_{or}$	dB	-10	
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
•	ower offset ' $\Gamma$ ' is con	nfigured by RRC accordingly and as defined	
based on media	CH is configured according to the reported CQI statistics. TF an CQI, median CQI -1, median CQI+2 are used. Other physical eters are configured according to the CQI mapping table 325.214.		
	DSCH Ec/lor is decreased according to reference power adjustment Δ		
Note 4: For any given tr	ansport format the p	ower of the HS-SCCH and HS-PDSCH shall	
Note 5: The UE shall be	tted continuously with constant power.  all be configured in non 64QAM/MIMO mode and use appropriate CQI  ording to TS 25.214.		

#### 9.3.1.2 Fading propagation conditions

The reporting accuracy of the channel quality indicator (CQI) under fading environments is determined by the BLER performance using the transport format indicated by the reported CQI median.

The specified requirements may be subject to further simulations to verify assumptions.

#### 9.3.1.2.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.26, and using the downlink physical channels specified in table C.8, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.27. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

Table 9.26: Test Parameters for CQI test in fading – single link

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-8	-4
$\hat{I}_{or}$ / $I_{oc}$	dB	0	5
$I_{oc}$	dBm/3.84 MHz	-6	60
Phase reference	-	P-CF	PICH
HS-SCCH_1 $E_c/I_{or}$	dB	-8	.5
DPCH $E_c/I_{or}$	dB	-(	6
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TT which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		Cas	se 8
Note 1: Measurement power offset 'I' is configured by RRC accordingly and as defined in [7].  Note 2: TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI is used. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214.			ed CQI statistics. el parameters are
Note 3: HS-PDSCH Ec/l Δ described in Ti Note 4: For any given tra	<ul> <li>HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.</li> <li>For any given transport format the power of the HS-SCCH and HS-</li> </ul>		
PDSCH shall be transmitted continuously with constant power.  Note 5: The UE shall be configured in non-64QAM/non-MIMO mode and use			

Table 9.27: Minimum requirement for CQI test in fading – single link

appropriate CQI tables according to TS 25.214.

Popertod COI	Maximum BLER		
Reported CQI	Test 1	Test2	
CQI median	60%	60%	
CQI median + 3	15%	15%	

## 9.3.1.2.2 Minimum Requirement – UE HS-DSCH categories 13,14,17,18, 19 and 20

For the parameters specified in Table 9.27A, and using the downlink physical channels specified in table C.8, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.27B. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

Table 9.27A: Test Parameters for CQI test in fading - single link

Parameter	Unit	Test 1	
$HS ext{-}PDSCHE_c/I_{\mathit{or}}$	dB	-2	
$\hat{I}_{or}$ / $I_{oc}$	dB	15	
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH	
HS-SCCH_1 $E_c/I_{or}$	dB	-12	
DPCH $E_c/I_{or}$	dB	-12	
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		Case 8	
Note 1: Measurement power offset 'I' is configured by RRC accordingly and as defined in [7].  Note 2: TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI is used. Other physical channel parameters are			
configured according to the CQI mapping table described in TS25.214.			

Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment

Δ described in TS 25.214.

Note 4: For any given transport format the power of the HS-SCCH and HS-

PDSCH shall be transmitted continuously with constant power.

Note 5: The UE shall be configured in 64QAM/non-MIMO mode and use

appropriate CQI tables according to TS 25.214.

Table 9.27B: Minimum requirement for CQI test in fading - single link

Reported CQI	Maximum BLER
	Test 1
CQI median	60%
CQI median + 3	15%

# 9.3.1.2.3 Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 and 36

For the parameters specified in Table 9.26, and using the downlink physical channels specified in table C.8, with a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, for each of the serving cells, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each serving cell when transmitting with a cell-specific fixed transport format given by the cell-specific CQI median as shown in Table 9.27. The BLER at a particular reported CQI for a specific serving cell is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe transmitted from this serving cell overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

#### 9.3.1.3 Periodically varying radio conditions.

The reporting accuracy of the channel quality indicator (CQI) when subject to AWGN propagation conditions with periodically varying  $\hat{I}_{or}/I_{oc}$ , is determined by the reporting variance as measured during selected parts of a predetermined  $\hat{I}_{or}/I_{oc}$  pattern, as depicted in Figure 9.1.

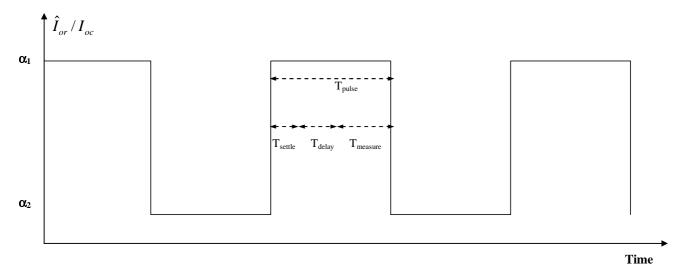


Figure 9.1 Test scenario for CQI reporting test under varying interference conditions.  $\hat{I}_{\sigma'}/I_{\sigma c}$  is varied between  $\alpha$ 1 and  $\alpha$ 2 according to a predetermined square wave pattern.

#### 9.3.1.3.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.27C, and using the downlink physical channels specified in table C.8, let  $M_1$  be defined as the median CQI that the UE reports in static propagation conditions, with Ior/Ioc set to  $\alpha_1$ , and  $M_2$  be the median CQI that the UE reports in static propagation conditions, with  $\hat{I}_{or}/I_{oc}$  set to  $\alpha_2$ . The minimum difference between  $M_1$  and  $M_2$  is required to be larger than 6.

For the parameters specified in Table 9.27C, and using the downlink physical channels specified in table C.8, 90% of the reported CQI values, during  $T_{measure}$  as depicted in Figure 9.1, shall be in the range of +/-3 of M1, for the cases when  $T_{measure}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_1$ , and in the range of +/-3 of M2, for the cases when  $T_{measure}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_2$ .

The measurement equipment is allowed to start the ramping of  $\hat{I}_{or}/I_{oc}$  13 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{measure}$ .

The measurement equipment shall have settled  $\hat{I}_{or}/I_{oc}$  to its nominal value 10 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{\text{measure}}$ .

An illustration of these timing relations is provided in Figure 9.2.

Table 9.27C: Test Parameter for CQI test in periodically varying radio conditions – single link

Parameter	Unit	Test 1
$\alpha_1$	dB	10
$\alpha_2$	dB	0
I <sub>oc1</sub>	dBm/3.84 MHz	-60
I <sub>oc2</sub>	dBm/3.84 MHz	-50
Phase reference	-	P-CPICH
T <sub>measure</sub>	TTI	8
T <sub>delay</sub>	TTI	3
T <sub>settle</sub>	TTI	1
T <sub>pulse</sub>	TTI	12
$HS\text{-PDSCH}E_c/I_{or}$	dB	-2
HS-SCCH_1 $E_c/I_{or}$	dB	-10
DPCH $E_c/I_{or}$	dB	-10
Maximum number of H-ARQ transmission	-	1
Number of HS-SCCH set to be monitored	-	1
CQI feedback cycle	ms	2
CQI repetition factor	-	1
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.

Note 2: The UE shall be configured in non-64QAM/non-MIMO mode and use appropriate CQI tables according to TS 25.214.

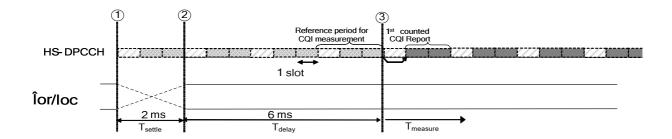


Figure 9.2 Timing relation between HS-DPCCH, DPCCH/DPDCH and  $\hat{I}_{or}/I_{oc}$  ramping. The measurement equipment starts ramping the  $\hat{I}_{or}/I_{oc}$  at point 1. The  $\hat{I}_{or}/I_{oc}$  should be settled to its nominal value at point 2. The first CQI report that is counted in the statistics of the requirement is transmitted in the uplink at point 3.

### 9.3.2 Open Loop Diversity Performance

#### 9.3.2.1 AWGN propagation conditions

The reporting accuracy of channel quality indicator (CQI) under AWGN environments is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median.

#### 9.3.2.1.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.32, and using the downlink physical channels specified in table C.9, the reported CQI value shall be in the range of  $\pm$ 0 fthe reported median more than 90% of the time. If the HS-PDSCH (BLER) using the transport format indicated by median CQI is less than or equal to 0.1, the BLER using the transport format indicated by the (median CQI  $\pm$ 2) shall be greater than 0.1. If the HS-PDSCH (BLER) using the transport format indicated by the median CQI is greater than 0.1, the BLER using transport format indicated by (median CQI  $\pm$ 1) shall be less than or equal to 0.1.

Table 9.32: Test Parameter for CQI test in AWGN - open loop diversity

Parameter		Unit	Test 1	Test 2	Test 3
	$\hat{I}_{or}/I_{oc}$	dB	0	5	10
	$I_{oc}$	dBm/3.84 MHz		-60	
Pha	se reference	-		P-CPICH	
HS-P	${\sf PDSCH}E_c/I_{or}$	dB		-3	
HS-S	CCH _1 $E_c/I_{or}$	dB		-10	
DF	PCH $E_c/I_{or}$	dB		-10	
H-AR	num number of Q transmission	-		1	
	of HS-SCCH set e monitored	-		1	
CQI f	eedback cycle	ms	2		
CQI re	epetition factor	-	1		
HS-SC	CH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.		g pattern shall '' indicates TTI es the identity ' indicates TTI
Note 1:		wer offset ' $\Gamma$ ' is cor		RC accordingly a	and as defined
Note 2:	based on median	SCH is configured according to the reported CQI statistics. TF ian CQI, median CQI -1, median CQI+2 are used. Other physical neters are configured according to the CQI mapping table S25.214.			
Note 3:	HS-PDSCH Ec/lo	c/lor is decreased according to reference power adjustment Δ			justment Δ
Note 4:	For any given tra	given transport format the power of the HS-SCCH and HS-PDSCH shall smitted continuously with constant power.		S-PDSCH shall	
Note 5:	The UE shall be		n-64QAM/non-MIMO mode and use		

## 9.3.2.1.2 Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 and 36

For the parameters specified in Table 9.33, and using the downlink physical channels specified in table C.9, with a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, for each of the serving cells, the reported CQI value for the cell shall be in the range of +/-2 of the cell-specific reported median more than 90% of the time. If the

HS-PDSCH BLER, for any of the cells, using the transport format indicated by cell-specific median CQI is less than or equal to 0.1, the BLER for this cell using the transport format indicated by the (cell-specific median CQI +2) shall be greater than 0.1. If the HS-PDSCH BLER, for any of the cells, using the transport format indicated by the cell-specific median CQI is greater than 0.1, the BLER using transport format indicated by (cell-specific median CQI -1) shall be less than or equal to 0.1.

Table 9.33: Test Parameter for CQI test in AWGN – open loop diversity

Parameter	Unit	Test 1	
$\hat{I}_{or1}/I_{oc}$	dB	0	
$\hat{I}_{or2}/I_{oc}$	dB	10	
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH	
$HS ext{-}PDSCHE_c/I_{\mathit{or}}$	dB	-3	
HS-SCCH_1 $E_c/I_{or}$	dB	-10	
$DPCH\ E_c/I_{or}$	dB	-10	
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
in [7].	ower offset $\Gamma$ is configured by RRC accordingly and as defined		
based on media	SCH is configured according to the reported CQI statistics. TF ian CQI, median CQI -1, median CQI+2 are used. Other physical neters are configured according to the CQI mapping table S25.214.		
Note 3: HS-PDSCH Ec/l described in TS	/lor is decreased according to reference power adjustment Δ		
Note 4: For any given tra	on transport format the power of the HS-SCCH and HS-PDSCH shall ed continuously with constant power.		
	JE shall be configured in non-64QAM/non-MIMO mode and use		

#### 9.3.2.2 Fading propagation conditions

The reporting accuracy of the channel quality indicator (CQI) under fading environments is determined by the BLER performance using the transport format indicated by the reported CQI median.

The specified requirements may be subject to further simulations to verify assumptions.

appropriate CQI tables according to TS 25.214.

#### 9.3.2.2.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.35, and using the downlink physical channels specified in table C.9, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.36. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

Table 9.35: Test Parameters for CQI test in fading - open loop diversity

P	arameter	Unit	Test 1	Test 2
HS-P	$DSCHE_c/I_{or}$	dB	-8	-4
	$\hat{I}_{or}$ / $I_{oc}$	dB	0	5
	$I_{oc}$	dBm/3.84 MHz	-6	60
Phas	se reference	-	P-CF	PICH
HS-SC	$CCH_1 E_c/I_{or}$	dB	-8	.5
	${ m CH}~E_c/I_{or}$	dB	-(	6
	num number of Q transmission	-	1	
	of HS-SCCH set e monitored	-	1	
	eedback cycle	ms	2	
CQI re	epetition factor	-	1	
HS-SC	CH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates T which the HS-SCCH-1 uses a different UE identity.	
Propag	gation Channel		Cas	se 8
Note 1: Note 2:	defined in [7].			ed CQI statistics. el parameters are
Note 3:	HS-PDSCH Ec/Id Δ described in TS	S-PDSCH Ec/lor is decreased according to reference power adjustment described in TS 25.214.		
Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.			power.	
Note 5:	Note 5: The UE shall be configured in non-64QAM/non-MIMO mode and use			

Table 9.36: Minimum requirement for CQI test in fading – open loop diversity

appropriate CQI tables according to TS 25.214.

Paparted COI	Maximum BLER		
Reported CQI	Test 1	Test2	
CQI median	60%	60%	
CQI median + 3	15%	15%	

## 9.3.2.2.2 Additional Requirements – UE HS-DSCH categories 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 35 and 36

For the parameters specified in Table 9.35 and using the downlink physical channels specified in table C.9, with a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, for each of the serving cells, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each serving cell when transmitting with a cell-specific fixed transport format given by the cell-specific CQI median as shown in Table 9.36. The BLER at a particular reported CQI for a specific serving cell is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe transmitted from this serving cell overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

#### 9.3.2.3 Periodically varying radio conditions.

The reporting accuracy of the channel quality indicator (CQI) when subject to AWGN propagation conditions with periodically varying  $\hat{I}_{or}/I_{oc}$ , is determined by the reporting variance as measured during selected parts of a predetermined  $\hat{I}_{or}/I_{oc}$  pattern, as depicted in Figure 9.1.

#### 9.3.2.3.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.37, and using the downlink physical channels specified in table C.9, let  $M_1$  be defined as the median CQI that the UE reports in static propagation conditions, with Ior/Ioc set to  $\alpha_1$ , and  $M_2$  be the median CQI that the UE reports in static propagation conditions, with  $\hat{I}_{or}/I_{oc}$  set to  $\alpha_2$ . The minimum difference between  $M_1$  and  $M_2$  is required to be larger than 6.

For the parameters specified in Table 9.37, and using the downlink physical channels specified in table C.9, 90% of the reported CQI values, during  $T_{measure}$  as depicted in Figure 9.1, shall be in the range of +/-3 of M1, for the cases when  $T_{measure}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_1$ , and in the range of +/-3 of M2, for the cases when  $T_{measure}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_2$ .

The measurement equipment is allowed to start the ramping of  $\hat{I}_{or}/I_{oc}$  13 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{measure}$ .

The measurement equipment shall have settled  $\hat{I}_{or}/I_{oc}$  to its nominal value 10 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{measure}$ .

An illustration of these timing relations is provided in Figure 9.2.

Table 9.37: Test Parameter for CQI test in periodically varying radio conditions – open loop diversity

Parameter	Unit	Test 1
$\alpha_1$	dB	10
$\alpha_2$	dB	0
I <sub>oc1</sub>	dBm/3.84 MHz	-60
I <sub>oc2</sub>	dBm/3.84 MHz	-50
Phase reference	-	P-CPICH
T <sub>measure</sub>	TTI	8
T <sub>delay</sub>	TTI	3
T <sub>settle</sub>	TTI	1
T <sub>pulse</sub>	TTI	12
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2
HS-SCCH_1 $E_c/I_{or}$	dB	-10
$DPCH\ E_c/I_{or}$	dB	-10
Maximum number of H-ARQ transmission	-	1
Number of HS-SCCH set to be monitored	-	1
CQI feedback cycle	ms	2
CQI repetition factor	-	1
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.

ement power offset ' $\Gamma$ ' is configured by RRC accordingly and as defined

in [7]. The UE shall be configured in non 64QAM/non-MIMO mode and use Note 2:

appropriate CQI tables according to TS 25.214.

#### 9.3.3 Closed Loop Diversity Performance

#### 9.3.3.1 AWGN propagation conditions

The reporting accuracy of channel quality indicator (CQI) under AWGN environments is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median.

#### 9.3.3.1.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.41, and using the downlink physical channels specified in table C.10, the reported CQI value shall be in the range of +/-2 of the reported median more than 90% of the time. If the HS-PDSCH (BLER) using the transport format indicated by median CQI is less than or equal to 0.1, the BLER using the transport format indicated by the (median CQI +2) shall be greater than 0.1. If the HS-PDSCH (BLER) using transport format indicated by the median CQI is greater than 0.1, the BLER using the transport format indicated by (median CQI -1) shall be less than or equal to 0.1.

Table 9.41: Test Parameters for CQI in AWGN - closed loop diversity

Р	arameter	Unit	Test 1 Test 2 Test		Test 3	
	$\hat{I}_{or}$ / $I_{oc}$	dB	0 5 10		10	
	$I_{oc}$	dBm/3.84 MHz		-60		
Pha	se reference	-		P-CPICH		
HS-P	${\sf PDSCH}E_c/I_{or}$	dB		-3		
HS-SCCH _1 $E_c/I_{or}$		dB		-10		
<u></u>	PCH $E_c/I_{or}$	dB		-10		
	num number of Q transmission	-		1		
	of HS-SCCH set e monitored	-		1		
CQI fe	eedback cycle	ms		2		
CQI re	epetition factor	-		1		
Feedb	ack Error Rate	%		0		
	ed loop timing stment mode			1		
	CH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TT in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TT in which the HS-SCCH-1 uses a different UE identity.			
Note 1: Note 2:	e 1: Measurement power offset $\Gamma$ is configured by RRC accordingly and as defined in [7].					
Note 3: Note 4:	described in TS2 HS-PDSCH Ec/lo described in TS 2 For any given tra	S25.214. /lor is decreased according to reference power adjustment Δ S 25.214. ransport format the power of the HS-SCCH and HS-PDSCH shall				
Note 5:	The UE shall be	ed continuously with constant power.  I be configured in non.64QAM/non-MIMO mode and use				

### 9.3.3.2 Fading propagation conditions

The reporting accuracy of the channel quality indicator (CQI) under fading environments is determined by the BLER performance using the transport format indicated by the reported CQI median.

The specified requirements may be subject to further simulations to verify assumptions.

appropriate CQI tables according to TS 25.214.

#### 9.3.3.2.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.44, and using the downlink physical channels specified in table C.10, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.45. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period with the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes.

Table 9.44: Test Parameters for CQI test in fading- closed loop diversity

Parameter	Unit	Test 1	Test 2	
$HS ext{-}PDSCHE_c/I_{or}$	dB	-8	-4	
$\hat{I}_{or}$ / $I_{oc}$	dB	0	5	
$I_{oc}$	dBm/3.84 MHz	-6	60	
Phase reference	-	P-CF	PICH	
HS-SCCH_1 $E_c/I_{or}$	dB	-8	5.5	
DPCH $E_c/I_{or}$	dB	-	6	
Maximum number of H-ARQ transmission	-		1	
Number of HS-SCCH set to be monitored	-		1	
CQI feedback cycle	ms	2	2	
CQI repetition factor	-	•	1	
Feedback Error Rate	ror Rate % 0		)	
Closed loop timing adjustment mode			1	
HS-SCCH-1 signalling pattern	-	To incorporate inte sub-frame HS-SCC pattern shall be ' where 'X' indicates HS-SCCH-1 uses t UE under test, and which the HS-SCC different UE identity	CH-1 signalling XOOXOO', TTI in which the he identity of the 'O' indicates TTI in H-1 uses a	
Propagation Channel		Cas	se 8	
Note 1: Measurement power offset 'Γ' is configured by RRC accordingly and as defined in [7].  Note 2: TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI is used. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214.				
Note 3: HS-PDSCH Ec/l Δ described in T Note 4: For any given tra PDSCH shall be	<ul> <li>Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.</li> <li>Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.</li> </ul>			
	lote 5: The UE shall be configured in non-64QAM/non-MIMO mode and use appropriate CQI tables according to TS 25.214.			

Table 9.45: Minimum requirement for CQI test in fading – closed loop diversity

Reported CQI	Maximi	Maximum BLER		
Reported CQI	Test 1	Test2		
CQI median	60%	60%		
CQI median + 3	15%	15%		

#### 9.3.3.3 Periodically varying radio conditions.

The reporting accuracy of the channel quality indicator (CQI) when subject to AWGN propagation conditions with periodically varying  $\hat{I}_{or}/I_{oc}$ , is determined by the reporting variance as measured during selected parts of a predetermined  $\hat{I}_{or}/I_{oc}$  pattern, as depicted in Figure 9.1.

#### 9.3.3.3.1 Minimum Requirement – UE HS-DSCH categories 1-20

For the parameters specified in Table 9.45A, and using the downlink physical channels specified in table C.10, let  $M_1$  be defined as the median CQI that the UE reports in static propagation conditions, with Ior/Ioc set to  $\alpha_1$ , and  $M_2$  be the median CQI that the UE reports in static propagation conditions, with  $\hat{I}_{or}/I_{oc}$  set to  $\alpha_2$ . The minimum difference between  $M_1$  and  $M_2$  is required to be larger than 6.

For the parameters specified in Table 9.45A, and using the downlink physical channels specified in table C.10, 90% of the reported CQI values, during  $T_{\text{measure}}$  as depicted in Figure 9.1, shall be in the range of +/-3 of M1, for the cases when  $T_{\text{measure}}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_1$ , and in the range of +/-3 of M2, for the cases when  $T_{\text{measure}}$  occurs during time-periods where  $\hat{I}_{or}/I_{oc}$  is set to  $\alpha_2$ .

The measurement equipment is allowed to start the ramping of  $\hat{I}_{or}/I_{oc}$  13 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{measure}$ .

The measurement equipment shall have settled  $\hat{I}_{or}/I_{oc}$  to its nominal value 10 slots before the start of the HS-DPCCH slot that contains the first CQI report in  $T_{\text{measure}}$ .

An illustration of these timing relations is provided in Figure 9.2.

Table 9.45A: Test Parameter for CQI test in periodically varying radio conditions – closed loop diversity

Parameter	Unit	Test 1
α <sub>1</sub>	dB	10
$\alpha_2$	dB	0
I <sub>oc1</sub>	dBm/3.84 MHz	-60
I <sub>oc2</sub>	dBm/3.84 MHz	-50
Phase reference	-	P-CPICH
T <sub>measure</sub>	TTI	8
T <sub>delay</sub>	TTI	3
T <sub>settle</sub>	TTI	1
T <sub>pulse</sub>	TTI	12
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2
HS-SCCH_1 $E_c/I_{or}$	dB	-10
DPCH $E_c/I_{or}$	dB	-10
Maximum number of H-ARQ transmission	-	1
Number of HS-SCCH set to be monitored	-	1
CQI feedback cycle	ms	2
CQI repetition factor	-	1
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub- frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.

Note 1: Measurement power offset 'Γ' is configured by RRC accordingly and as defined in [7].

Note 2: The UE shall be configured in non-64QAM/non-MIMO mode and use appropriate CQI tables according to TS 25.214.

#### 9.3.4 MIMO Performance

#### 9.3.4.1 MIMO Single Stream Fading Conditions

The minimum performance requirements of channel quality indicator (CQI) reporting under MIMO single stream conditions are defined based on a CQI Type A versus Type B reporting ratio of 1/2, i.e. the parameters  $N_{\text{cqi\_typeA}}$  and  $M_{\text{cqi}}$  (see [8]) are assumed to be set to 1 and 2, respectively. The propagation conditions assumed for minimum performance requirements of CQI reporting under MIMO single stream conditions are defined in subclause B.2.6.1. The precoding used at the transmitter is one randomly picked but fixed precoding vector for single transport block transmission out of the set of possible precoding vectors as defined in [8]. The same precoding vector shall be used to generate the resulting channel coefficients as described for MIMO single stream conditions in subclause B.2.6.1.

The reporting accuracy of CQI under MIMO single stream conditions is determined by the BLER performance when transmitting with a transport format indicated by the reported CQI median determined over all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1.

#### 9.3.4.1.1 Minimum Requirement - UE HS-DSCH categories 15-20

For the parameters specified in Table 9.46, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.47. The CQI median shall be determined over all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1with the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes to which the same CQI value was associated.

Table 9.46: Test Parameters for CQI test in MIMO single stream fading conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23 dB
$\hat{I}_{or}$ / $I_{oc}$	dB		6
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO single stream fading conditions	

Note 1: Measurement power offset '\Gamma' is configured by RRC accordingly and as defined in [7].

Note 2: TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI over all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1 is used. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding vector for single transport block transmission out of the set of possible precoding vectors as defined in [8]. The same precoding vector shall be used to generate the resulting channel coefficients as described for MIMO single stream conditions in subclause B.2.6.1.

- Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.
- Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.
- Note 5: The UE shall be configured in non-64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.47: Minimum requirement for CQI test in MIMO single stream conditions

Reported CQI	Maximum BLER		
Reported CQI	Test 1	Test 2	
CQI median	60%	60%	
CQI median + 3	15%	15%	

### 9.3.4.1.2 Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36

With a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, using the parameters specified in Table 9.47A, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the cell-specific CQI median as shown in Table 9.47B. The requirement is applicable for each cell individually, that is the median reported CQI, as well as corresponding BLERs, are to be separately determined for each cell and independently verified against the requirement in Table 9.47B. The cell-specific CQI median shall be determined over all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1. The cell-specific BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the cell-specific precoding vector embedded in the propagation channel as defined in subclause B.2.6.1 with

the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes to which the same CQI value was associated.

Table 9.47A: Test Parameters for CQI test in MIMO single stream fading conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or1}/I_{oc}$	dB		6
$\hat{I}_{or2}/I_{oc}$	dB		6
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	=	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO single stream fading conditions	

Note 1: Measurement power offset '\Gamma' is configured by RRC accordingly and as defined in [7].

Note 2: TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI over all single transport block Type A CQI reports and all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1 is used. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding vector for single transport block transmission out of the set of possible precoding vectors as defined in [8]. The same precoding vector shall be used to generate the resulting channel coefficients as described for MIMO single stream conditions in subclause B.2.6.1.

Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment  $\Delta$  described in TS 25.214.

Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.

Note 5: The UE shall be configured in non-64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.47B: Minimum requirement for CQI test in MIMO single stream conditions

Reported CQI	Maximum BLER		
Reported CQI	Test 1	Test 2	
CQI median	60%	60%	
CQI median + 3	15%	15%	

#### 9.3.4.2 MIMO Dual Stream Fading Conditions

The minimum performance requirements of channel quality indicator (CQI) reporting under MIMO dual stream conditions are defined based on a Type A reporting fraction of 100%, i.e. the parameters  $N_{\text{cqi_typeA}}$  and  $M_{\text{cqi}}$  (see [8]) are assumed to be both set to 1. The propagation conditions assumed for minimum performance requirements of CQI reporting under MIMO dual stream conditions are defined in subclause B.2.6.2. The precoding used at the transmitter is one randomly picked but fixed precoding matrix for dual transport block transmission out of the set of

possible precoding matrices as defined in [8]. The same precoding matrix shall be used to generate the resulting channel coefficients as described for MIMO dual stream conditions in subclause B.2.6.2.

The reporting accuracy of CQI under MIMO dual stream conditions is determined by the BLER performance of two streams of transport blocks using the transport formats indicated by the respective stream specific reported CQI median over all dual transport block CQI reports for each stream that were reported together with PCI reports matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2.

#### 9.3.4.2.1 Minimum Requirement – UE HS-DSCH categories 15-20

For the parameters specified in Table 9.48, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each stream when transmitting a fixed transport format per stream given by the stream specific CQI median as shown in Table 9.49. The stream specific CQI median shall be determined over all dual transport block CQI reports that were reported together with PCI reports matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the first column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used respectively to determine the median CQI values for stream #1 and stream #2 as depicted in Figure B.5 in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the second column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values COI<sub>1</sub> and COI<sub>2</sub> shall be used to determine the median CQI values for stream #2 and stream #1, respectively. The stream specific BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all dual transport block CQI reports that were reported together with a PCI report that was matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2 with the two transport blocks of the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fractions of erroneous HS-PDSCH subframes to which the same CQI values were associated.

Table 9.48: Test Parameters for CQI test in MIMO dual stream fading conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or}$ / $I_{oc}$	dB		10
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO dual stream fading conditions	
Note 1: Measurement power offset 'I' is configured by RRC accordingly and as defined in [7]			

Note 1: Measurement power offset  $\Gamma$  is configured by RRC accordingly and as defined in [7].

Note 2: TF for HS-PDSCH is configured for each stream according to the reported CQI statistics. TF for each stream is based on median CQI over all dual transport block CQI reports that are reported together with a PCI report that is matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding matrix for dual transport block transmission out of the set of possible precoding matrices as defined in [8]. The same precoding matrix shall be used to generate the resulting channel coefficients as described for MIMO dual stream conditions in subclause

Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.

Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted

continuously with constant power.

Note 5: The UE shall be configured in non-64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.49: Minimum requirement for CQI test in MIMO dual stream conditions

Parastad COI	Maximum BLER		
Reported CQI	Test 1	Test 2	
CQI median	60%	60%	
CQI median + 2	15%	15%	

### 9.3.4.2.2 Minimum Requirement – UE HS-DSCH categories 19-20

For the parameters specified in Table 9.49A, and using the downlink physical channels specified in table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each stream when transmitting a fixed transport format per stream given by the stream specific CQI median as shown in Table 9.49B. The stream specific CQI median shall be determined over all dual transport block CQI reports that were reported together with PCI reports matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the first column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used respectively to determine the median CQI values for stream #1 and stream #2 as depicted in Figure B.5 in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the second column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used to determine the median CQI values for stream #2 and stream #1, respectively. The stream specific BLER at a

particular reported CQI is obtained by associating a particular CQI reference measurement period for all dual transport block CQI reports that were reported together with a PCI report that was matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2 with the two transport blocks of the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fractions of erroneous HS-PDSCH subframes to which the same CQI values were associated.

Table 9.49A: Test Parameters for CQI test in MIMO dual stream conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_{c}/I_{or}$	dB	-2	-2.23
$\hat{I}_{or}$ / $I_{oc}$	dB		15
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
$DPCH\ E_{c}/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-	1	
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO dual stream conditions	

- Note 1: Measurement power offset ' $\Gamma$ ' is configured by RRC accordingly and as defined in [7].
- Note 2: TF for HS-PDSCH is configured for each stream according to the reported CQI statistics. TF for each stream is based on median CQI over all dual transport block CQI reports that are reported together with a PCI report that is matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding matrix for dual transport block transmission out of the set of possible precoding matrices as defined in [8]. The same precoding matrix shall be used to generate the resulting channel coefficients as described for MIMO dual stream conditions in subclause B.2.6.2.
- Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment  $\Delta$  described in TS 25.214.
- Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.
- Note 5: The UE shall be configured in 64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.49B: Minimum requirement for CQI test in MIMO dual stream conditions

Papartad COI	Maximu	m BLER
Reported CQI	Test 1	Test 2
CQI median	60%	60%
CQI median + 2	15%	15%

#### 9.3.4.2.3 Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36

With a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, using the parameters specified in Table 9.49BA, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each stream when transmitting a fixed transport format per stream given by the stream specific CQI median as shown in Table 9.49BB. The requirement is applicable for each cell and stream individually, that is the median reported CQI, as well as corresponding BLERs, are to be

separately determined for each cell and stream, and independently verified against the requirement in Table 9.49BB. The stream and cell-specific CQI median shall be determined over all dual transport block CQI reports that were reported together with PCI reports matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the first column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used respectively to determine the median CQI values for stream #1 and stream #2 as depicted in Figure B.5 in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the second column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used to determine the median CQI values for stream #2 and stream #1, respectively. The stream and cell-specific BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all dual transport block CQI reports that were reported together with a PCI report that was matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2 with the two transport blocks of the HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fractions of erroneous HS-PDSCH subframes to which the same CQI values were associated.

Table 9.49BA: Test Parameters for CQI test in MIMO dual stream conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or1}/I_{oc}$	dB	10	
$\hat{I}_{or2}/I_{oc}$	dB	10	
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
$DPCH\ E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms		2
CQI repetition factor	-		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO du	al stream conditions

- Note 1: Measurement power offset  $\Gamma$  is configured by RRC accordingly and as defined in [7].
- Note 2: TF for HS-PDSCH is configured for each stream according to the reported CQI statistics. TF for each stream is based on median CQI over all dual transport block CQI reports that are reported together with a PCI report that is matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding matrix for dual transport block transmission out of the set of possible precoding matrices as defined in [8]. The same precoding matrix shall be used to generate the resulting channel coefficients as described for MIMO dual stream conditions in subclause B.2.6.2.
- Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.
- Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.
- Note 5: The UE shall be configured in non-64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.49BB: Minimum requirement for CQI test in MIMO dual stream conditions

Reported CQI	Maximum BLER		
Reported CQ1	Test 1	Test 2	
CQI median	60%	60%	
CQI median + 2	15%	15%	

#### 9.3.4.2.4 Additional Requirement – UE HS-DSCH categories 27, 28, 30, 32 and 36

With a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, using the parameters specified in Table 9.49BC, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs for each stream when transmitting a fixed transport format per stream given by the stream specific CQI median as shown in Table 9.49BD. The requirement is applicable for each cell and stream individually, that is the median reported CQI, as well as corresponding BLERs, are to be separately determined for each cell and stream, and independently verified against the requirement in Table 9.49BB. The stream and cell-specific CQI median shall be determined over all dual transport block CQI reports that were reported together with PCI reports matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the first column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used respectively to determine the median CQI values for stream #1 and stream #2 as depicted in Figure B.5 in subclause B.2.6.2. When the reported preferred primary precoding vector is matching with the second column of the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2, the reported values CQI<sub>1</sub> and CQI<sub>2</sub> shall be used to determine the median CQI values for stream #2 and stream #1, respectively. The stream and cell-specific BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all dual transport block CQI reports that were reported together with a PCI report that was matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2 with the two transport blocks of the HS-PDSCH subframe overlapping with the end of this COI reference measurement period and calculating the fractions of erroneous HS-PDSCH subframes to which the same CQI values were associated.

Table 9.49BC: Test Parameters for CQI test in MIMO dual stream conditions

Parameter	Unit	Test 1	Test 2	
$HS\text{-PDSCH}E_c/I_{\mathit{or}}$	dB	-2	-2.23	
$\hat{I}_{or1}$ / $I_{oc}$	dB	15		
$\hat{I}_{or2}$ / $I_{oc}$	dB	15		
$I_{oc}$	dBm/3.84 MHz		-60	
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)	
$HS ext{-SCCH\_1}\ E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)	
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)	
Precoding weight set restriction	-	Disabled	Enabled	
Maximum number of H-ARQ transmission	-	1		
Number of HS-SCCH set to be monitored	-	1		
CQI feedback cycle	ms	2		
CQI repetition factor	-		1	
PCI/CQI reporting Error Rate	%	0		
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.		
Propagation Channel		MIMO dual stream conditions		
		nfigured by RRC accordingly	and as defined in [7].	

Note 2: TF for HS-PDSCH is configured for each stream according to the reported CQI statistics. TF for each stream is based on median CQI over all dual transport block CQI reports that are reported together with a PCI report that is matching the precoding matrix embedded in the propagation channel as defined in subclause B.2.6.2. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding matrix for dual transport block transmission out of the set of possible precoding matrices as defined in [8]. The same precoding matrix shall be used to generate the resulting channel coefficients as described for MIMO dual stream conditions in subclause B.2.6.2.

Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment  $\Delta$  described in TS 25.214

Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted

continuously with constant power.

Note 5: The UE shall be configured in 64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

Table 9.49BD: Minimum requirement for CQI test in MIMO dual stream conditions

Papartod COI	Maximu	m BLER
Reported CQI	Test 1	Test 2
CQI median	60%	60%
CQI median + 2	15%	15%

#### 9.3.4.3 MIMO Dual Stream Static Orthogonal Conditions

The minimum performance requirements of channel quality indicator (CQI) reporting under MIMO dual stream conditions are defined based on a Type A reporting fraction of 100%, i.e. the parameters  $N_{\text{cqi_typeA}}$  and  $M_{\text{cqi}}$  (see [8]) are assumed to be both set to 1. The propagation conditions assumed for minimum performance requirements of CQI reporting under MIMO dual stream static orthogonal conditions are defined in subclause B.2.6.3.

The precoding matrix used in the transmitter shall be one randomly picked but fixed precoding matrix  $\mathbf{W}$  out of the set defined in equation EQ.B.2.6.2.

#### 9.3.4.3.1 Minimum Requirement –UE HS-DSCH categories 15-20

For the parameters specified in Table 9.49C, and using the downlink physical channels specified in Table C.9 and Table C.12D, the reported CQI value, for each of the streams, shall be in the range of +/-2 of the reported stream specific CQI median more than 90% of the time. The stream specific CQI median shall be determined over all dual transport block CQI reports.

For each of the streams, if the HS-PDSCH BLER using the transport format indicated by the stream specific CQI median is less than or equal to 0.1, the BLER using the transport format indicated by the (stream specific CQI median + 2) shall be greater than 0.1. For each of the streams, if the HS-PDSCH BLER using the transport format indicated by the stream specific CQI median is greater than 0.1, the BLER using transport format indicated by (stream specific CQI median -1) shall be less than or equal to 0.1. The requirements are applicable to Test 1 and Test 2.

Table 9.49C: Test Parameters for CQI test in MIMO dual stream static orthogonal conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or}$ / $I_{oc}$	dB		10
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
$DPCH\ E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	1		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel			static orthogonal conditions

Note 1: Measurement power offset 'I' is configured by RRC accordingly and as defined in [7].

Note 2: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214

Note 3: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted

continuously with constant power.

Note 4: The UE shall be configured in non-64QAM/MIMO mode and use appropriate CQI tables according to

TS 25.214.

#### 9.3.4.3.2 Minimum Requirement –UE HS-DSCH categories 19-20

For the parameters specified in Table 9.49D, and using the downlink physical channels specified in Table C.9 and Table C.12D, the reported CQI value, for each of the streams, shall be in the range of +/-2 of the reported stream specific CQI median more than 90% of the time. The stream specific CQI median shall be determined over all dual transport block CQI reports.

For each of the streams, if the HS-PDSCH BLER using the transport format indicated by the stream specific CQI median is less than or equal to 0.1, the BLER using the transport format indicated by the (stream specific CQI median + 2) shall be greater than 0.1. For each of the streams, if the HS-PDSCH BLER using the transport format indicated by the stream specific CQI median is greater than 0.1, the BLER using transport format indicated by (stream specific CQI median -1) shall be less than or equal to 0.1. The requirements are applicable to Test 1 and Test 2.

Table 9.49D: Test Parameters for CQI test in MIMO dual stream static orthogonal conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or}$ / $I_{oc}$	dB	15	
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO dual stream static orthogonal conditions	
Note 1: Measurement power offset 'T' is configured by RRC accordingly and as defined in [7].			

Note 2: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214

Note 3: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted

continuously with constant power.

Note 4: The UE shall be configured in 64QAM/MIMO mode and use appropriate CQI tables according to TS 25.214.

#### 9.3.4.3.3 Additional Requirement – UE HS-DSCH categories 25-28, 30, 32 and 36

With a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, using the parameters specified in Table 9.49E, and using the downlink physical channels specified in Table C.9 and Table C.12D, the reported CQI value, for each of the streams, and cells shall be in the range of +/-2 of the reported stream specific CQI median more than 90% of the time. The requirement is applicable for each cell and stream individually, that is the median reported CQI, as well as corresponding BLERs, are to be separately determined for each cell and stream, and independently verified to fulfil the requirement. The stream and cell-specific CQI median shall be determined over all dual transport block CQI reports.

For each of the streams and cells, if the HS-PDSCH BLER using the transport format indicated by the stream and cell-specific CQI median is less than or equal to 0.1, the BLER using the transport format indicated by the (stream and cell-specific CQI median + 2) shall be greater than 0.1. For each of the streams and cells, if the HS-PDSCH BLER using the transport format indicated by the stream and cell-specific CQI median is greater than 0.1, the BLER using transport format indicated by (stream and cell-specific CQI median -1) shall be less than or equal to 0.1. The requirements are applicable to Test 1 and Test 2.

Table 9.49E: Test Parameters for CQI test in MIMO dual stream static orthogonal conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or1}/I_{oc}$	dB		10
$\hat{I}_{or2}$ / $I_{oc}$	dB	10	
$I_{oc}$	dBm/3.84 MHz		-60
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms	2	
CQI repetition factor	-		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO dual stream	static orthogonal conditions

Note 1: Measurement power offset ' $\Gamma$ ' is configured by RRC accordingly and as defined in [7].

Note 2: Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.

Note 3: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.

Note 4: UEs from HS-DSCH categories 27-28 shall be configured in non-64QAM/MIMO and use appropriate CQI tables according to TS 25.214.

#### 9.3.4.3.4 Additional Requirement – UE HS-DSCH categories 27, 28, 30, 32 and 36

With a serving HS-DSCH cell and secondary serving HS-DSCH cell(s) configured, using the parameters specified in Table 9.49F, and using the downlink physical channels specified in Table C.9 and Table C.12D, the reported CQI value, for each of the streams, and cells shall be in the range of +/-2 of the reported stream specific CQI median more than 90% of the time. The requirement is applicable for each cell and stream individually, that is the median reported CQI, as well as corresponding BLERs, are to be separately determined for each cell and stream, and independently verified to fulfil the requirement. The stream and cell-specific CQI median shall be determined over all dual transport block CQI reports.

For each of the streams and cells, if the HS-PDSCH BLER using the transport format indicated by the stream and cell-specific CQI median is less than or equal to 0.1, the BLER using the transport format indicated by the (stream and cell-specific CQI median + 2) shall be greater than 0.1. For each of the streams and cells, if the HS-PDSCH BLER using the transport format indicated by the stream and cell-specific CQI median is greater than 0.1, the BLER using transport format indicated by (stream and cell-specific CQI median -1) shall be less than or equal to 0.1. The requirements are applicable to Test 1 and Test 2.

Table 9.49EF: Test Parameters for CQI test in MIMO dual stream static orthogonal conditions

Parameter	Unit	Test 1	Test 2	
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23	
$\hat{I}_{or1}/I_{oc}$	dB	15		
$\hat{I}_{or2}/I_{oc}$	dB	15		
$I_{oc}$	dBm/3.84 MHz		-60	
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)	
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)	
$DPCH\ E_{c}/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)	
Precoding weight set restriction	-	Disabled	Enabled	
Maximum number of H-ARQ transmission	-	1		
Number of HS-SCCH set to be monitored	-	1		
CQI feedback cycle	ms	2		
CQI repetition factor	-		1	
PCI/CQI reporting Error Rate	%	0		
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.		
Propagation Channel		MIMO dual stream static orthogonal conditions		
Note 1: Measurement power offset 'Γ' is configured by RRC accordingly and as defined in [7].  Note 2: Note 3: HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214.				
Note 3: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.				
Note 4: The UE shall be configured in 64QAM/MIMO mode and use appropriate CQI tables according to TS				

## 9.3.5 MIMO only with single-stream restriction Performance

#### 9.3.5.1 MIMO only with single-stream restriction Fading Conditions

The propagation conditions assumed for minimum performance requirements of CQI reporting under MIMO single stream conditions are defined in subclause B.2.6.1. The precoding used at the transmitter is one randomly picked but fixed precoding vector for single transport block transmission out of the set of possible precoding vectors as defined in [8]. The same precoding vector shall be used to generate the resulting channel coefficients as described for MIMO single stream conditions in subclause B.2.6.1.

The reporting accuracy of CQI under MIMO with single-stream restriction is determined by the BLER performance when transmitting with a transport format indicated by the reported CQI median determined over all CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1.

#### 9.3.5.1.1 Minimum Requirement

For the parameters specified in Table 9.49E1, and using the downlink physical channels specified in Table C.9 and Table C.12D, the requirements are specified in terms of maximum BLERs at particular reported CQIs when transmitting a fixed transport format given by the CQI median as shown in Table 9.4E2. The CQI median shall be determined over all CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1. The BLER at a particular reported CQI is obtained by associating a particular CQI reference measurement period for all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1with the

HS-PDSCH subframe overlapping with the end of this CQI reference measurement period and calculating the fraction of erroneous HS-PDSCH subframes to which the same CQI value was associated.

Table 9.49E1: Test Parameters for CQI test in MIMO single stream fading conditions

Parameter	Unit	Test 1	Test 2
$HS ext{-}PDSCHE_c/I_{or}$	dB	-2	-2.23
$\hat{I}_{or}/I_{oc}$	dB		6
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH (Table C.9)	P-CPICH/S-CPICH (Table C.12D)
HS-SCCH_1 $E_c/I_{or}$	dB	-15 (using STTD)	-15 (without STTD)
DPCH $E_c/I_{or}$	dB	-10 (using STTD)	-10 (without STTD)
Precoding weight set restriction	-	Disabled	Enabled
Maximum number of H-ARQ transmission	-	1	
Number of HS-SCCH set to be monitored	-	1	
CQI feedback cycle	ms		2
CQI repetition factor	-		1
PCI/CQI reporting Error Rate	%	0	
HS-SCCH-1 signalling pattern	-	To incorporate inter-TTI=3 the six sub-frame HS-SCCH-1 signalling pattern shall be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.	
Propagation Channel		MIMO single s	stream fading conditions
Note 1: Measurement po	wer offset 'Γ' is cor	nfigured by RRC accordingly	and as defined in [7].

TF for HS-PDSCH is configured according to the reported CQI statistics. TF based on median CQI Note 2: over all Type B CQI reports that were reported together with PCI reports matching the precoding vector embedded in the propagation channel as defined in subclause B.2.6.1is used. Other physical channel parameters are configured according to the CQI mapping table described in TS25.214. The precoding that shall be used in the transmitter is one randomly picked but fixed precoding vector for single transport block transmission out of the set of possible precoding vectors as defined in [8]. The same precoding vector shall be used to generate the resulting channel coefficients as described for MIMO single stream conditions in subclause B.2.6.1.

HS-PDSCH Ec/lor is decreased according to reference power adjustment Δ described in TS 25.214. Note 3: Note 4: For any given transport format the power of the HS-SCCH and HS-PDSCH shall be transmitted continuously with constant power.

Table 9.49E2: Minimum requirement for CQI test in MIMO single stream conditions

Reported CQI	Maximum BLER	
Reported CQI	Test 1	Test 2
CQI median	60%	60%
CQI median + 3	15%	15%

#### 9.4 **HS-SCCH** Detection Performance

The detection performance of the HS-SCCH is determined by the probability of event  $E_{\rm m}$ , which is declared when the UE is signaled on HS-SCCH-1, but DTX is observed in the corresponding HS-DPCCH ACK/NACK field. The probability of event  $E_{\rm m}$  is denoted  $P(E_{\rm m})$ .

#### 9.4.1 HS-SCCH Type 1 Single Link Performance

For the test parameters specified in Table 9.50, for each value of HS-SCCH-1 E<sub>c</sub>/I<sub>or</sub> specified in Table 9.51 and Table 9.51A the measured  $P(E_m)$  shall be less than or equal to the corresponding specified value of  $P(E_m)$ . Enhanced performance requirements type 1 specified in Table 9.51A are based on receiver diversity.

Table 9.50: Test parameters for HS-SCCH detection – single link

Parameter	Unit	Test 1	Test 2	Test 3	
$I_{oc}$	dBm/3.84 MHz		-60		
Phase reference	-		P-CPICH		
P-CPICH $E_c/I_{or}$	dB		-10		
HS-SCCH UE Identity		HS-SCCH	-1: 101010101010	01010	
$(x_{ue,1}, x_{ue,2},, x_{ue,16})$		(every third TTI only	, UE under test a	ddressed solely	
			a HS-SCCH-1)		
			-2: 000100101010		
		HS-SCCH-3: 0001101010101010			
		HS-SCCH-4: 0001111110101010			
HS-DSCH TF of UE1		TF cor	responding to CQ	l1	
HS-SCCH-1 transmission		The HS-SCCH-1 shall	I be transmitted co	ontinuously with	
pattern		constant power.			
HS-PDSCH transmission		The HS-PDSCH shall	be transmitted co	ontinuously with	
pattern		constant power.			
HS-SCCH-1 TTI Signalling	-	The six sub-frame HS-SCCH-1 signalling pattern shall			
Pattern		be 'XOOXOO', where 'X' indicates TTI in which the			
		HS-SCCH-1 uses the identity of the UE under test, and			
		'O' indicates TTI in which the HS-SCCH-1 uses a			
		different UE identity.			

Table 9.51: Minimum requirement for HS-SCCH detection - single link

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-9	0	0.05
2	PA3	-9.9	5	0.01
3	VA30	-10	0	0.01

Table 9.51A: Enhanced requirement type 1 for HS-SCCH detection – single link

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-12.0	0	0.01
2	VA30	-15.6	0	0.01

## 9.4.2 HS-SCCH Type 1 Open Loop Diversity Performance

For the test parameters specified in Table 9.52, for each value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.53 and Table 9.54 the measured  $P(E_m)$  shall be less than or equal to the corresponding specified value of  $P(E_m)$ . Enhanced performance requirements type 1 specified in Table 9.54 are based on receiver diversity.

**Parameter** Unit Test 1 Test 2 Test 3 dBm/3.84 -60  $I_{oc}$ MHz Phase reference P-CPICH dB -10 P-CPICH  $E_c/I_{or}$ **HS-SCCH UE Identity** HS-SCCH-1: 1010101010101010 (every third TTI only,UE under test addressed solely via  $(x_{ue,1}, x_{ue,2}, ..., x_{ue,16})$ HS-SCCH-1) HS-SCCH-2: 0001001010101010 HS-SCCH-3: 0001101010101010 HS-SCCH-4: 0001111110101010 HS-DSCH TF of UE1 TF corresponding to CQI1 The HS-SCCH-1 shall be transmitted continuously with HS-SCCH-1 transmission constant power. pattern **HS-PDSCH** transmission The HS-PDSCH shall be transmitted continuously with pattern constant power. HS-SCCH-1 TTI Signalling The six sub-frame HS-SCCH-1 signalling pattern shall Pattern be '...XOOXOO...', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and 'O' indicates TTI in which the HS-SCCH-1 uses a different UE identity.

Table 9.52: Test parameters for HS-SCCH detection – open loop diversity

Table 9.53: Minimum requirement for HS-SCCH detection - open loop diversity

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-11.6	0	0.05
2	PA3	-13.4	5	0.01
3	VA30	-11.5	0	0.01

Table 9.54: Enhanced requirement type 1 for HS-SCCH detection – open loop diversity

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-15.2	0	0.01
2	VA30	-16.4	0	0.01

## 9.4.3 HS-SCCH Type 3 Performance

For the test parameters specified in Table 9.55 with the downlink physical channel setup in Table C.12, for each value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.56 and Table 9.57 the measured  $P(E_m)$  shall be less than or equal to the corresponding specified value of  $P(E_m)$ . The requirements in Table 9.56 and Table 9.57 assume STTD is enabled on HS-SCCH and DPCH. The requirements in Table 9.56 assume HS-SCCH Type 3 coding associated with single stream transmission on HS-DSCH. The requirements in Table 9.57 assume HS-SCCH Type 3 coding associated with dual stream transmission on HS-DSCH.

For the test parameters specified in Table 9.55 with the downlink physical channel setup in Table C.12E, for each value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.57a, Table 9.57b, Table 9.57c and Table 9.57d, the measured  $P(E_{\rm m})$  shall be less than or equal to the corresponding specified value of  $P(E_{\rm m})$ . The requirements in Table 9.57a and Table 9.57b assume STTD is disabled on HS-SCCH and DPCH. The requirements in Table 9.57c and Table 9.57d assume STTD is enabled on HS-SCCH and DPCH. The requirements in Table 9.57c assume HS-SCCH Type 3 coding associated with single stream transmission on HS-DSCH. The requirements in Table 9.57b and Table 9.57d assume HS-SCCH Type 3 coding associated with dual stream transmission on HS-DSCH.

Minimum performance requirements specified in Table 9.56, 9.57, 9.57a, 9.57b, 9.57c and 9.57d are based on receiver diversity.

Table 9.55: Test parameters for HS-SCCH Type 3 detection

Parameter	Unit	Test 1	Test 2	Test 3	Test 4
$I_{oc}$	dBm/3.84 MHz		-6	60	
HS-SCCH UE Identity		HS	S-SCCH-1: 10 <sup>2</sup>	01010101010	10
$(x_{ue,1}, x_{ue,2},, x_{ue,16})$		(every third TTI only,UE under test addressed solely via			
ue,1 · ue,2 · · ue,10 ·				CH-1)	
				010010101010	-
				011010101010	_
				0111111101010	
HS-DSCH TF of UE1				<u>is signalled or</u>	
				TF correspondi	
				to HS-PDSCH	
		th	rough the four	possible option	IS.
		In case tw	o transport blo	cks are signall	ed on HS-
			SC	_	
		Two transp	ort blocks with	the same size	and same
				s as used in the	
				ne transport bl	
		_	• •	to HS-PDSCH	•
				possible option	
HS-SCCH-1 transmission				ansmitted conti	nuously with
pattern		constant pow			
HS-PDSCH transmission				nsmitted contir	nuously with
pattern		constant power.			
HS-SCCH-1 TTI Signalling	-	The six sub-frame HS-SCCH-1 signalling pattern shall			
Pattern		be 'XOOXOO', where 'X' indicates TTI in which the HS-SCCH-1 uses the identity of the UE under test, and			
				e HS-SCCH-1 i	uses a
		different UE id	dentity.		

Table 9.56: Minimum requirement for HS-SCCH Type 3 detection, single transport block case with downlink physical channel setup in Table C.12

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-15.6	0	0.01
2	VA3	-16.8	0	0.01

Table 9.57: Minimum requirement for HS-SCCH Type 3 detection, dual transport block case with downlink physical channel setup in Table C.12

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}^{}/I_{oc}^{}$ (dB)	$P(E_m)$
3	PA3	-14.7	0	0.01
4	VA3	-16.0	0	0.01

Table 9.57a: Minimum requirement for HS-SCCH Type 3 detection, STTD disabled, single transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-12.3	0	0.01
2	VA3	-14.9	0	0.01

Table 9.57b: Minimum requirement for HS-SCCH Type 3 detection, STTD disabled, dual transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
3	PA3	-11.4	0	0.01
4	VA3	-14.2	0	0.01

Table 9.57c: Minimum requirement for HS-SCCH Type 3 detection, STTD enabled, single transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
1	PA3	-15.3	0	0.01
2	VA3	-16.7	0	0.01

Table 9.57d: Minimum requirement for HS-SCCH Type 3 detection, STTD enabled, dual transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	$P(E_m)$
3	PA3	-14.4	0	0.01
4	VA3	-15.8	0	0.01

# 9.4.4 HS-SCCH Type 3 Performance for MIMO only with single-stream restriction

For the test parameters specified in Table 9.57A1 with the downlink physical channel setup in Table C.12, for each value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.57A2 and Table 9.57A3 the measured  $P(E_m)$  shall be less than or equal to the corresponding specified value of  $P(E_m)$ . The requirements in Table 9.57A2 and Table 9.57A3 assume STTD is enabled on HS-SCCH and DPCH. The requirements in Table 9.57A2 and Table 9.57A3 assume HS-SCCH Type 3 coding associated with single stream transmission on HS-DSCH. Performance requirements specified in Table 9.57A3 are based on receiver diversity.

For the test parameters specified in Table 9.57A1 with the downlink physical channel setup in Table C.12E, for each value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.57A4, Table 9.57A5, Table 9.57A6 and Table 9.57A7, the measured  $P(E_m)$  shall be less than or equal to the corresponding specified value of  $P(E_m)$ . The requirements in Table 9.57A4 and Table 9.57A5 assume STTD is disabled on HS-SCCH and DPCH. The requirements in Table 9.57A6 and Table 9.57A6, Table 9.57A6 and Table 9.57A7 assume HS-SCCH Type 3 coding associated with single stream transmission on HS-DSCH. Performance requirements specified in Table 9.57A5 and Table 9.57A7 are based on receiver diversity.

Table 9.57A1: Test parameters for HS-SCCH Type 3 detection

Parameter	Unit	Test 1	Test 2
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	1	P-CPICH	
P-CPICH $E_c/I_{or}$	dB	-1	0
HS-SCCH UE Identity		HS-SCCH-1: 101	101010101010
$(x_{ue,1}, x_{ue,2},, x_{ue,16})$		` ,	der test addressed solely via CCH-1)
			01001010101010
		HS-SCCH-3: 0001101010101010	
			01111110101010
HS-DSCH TF of UE1		One transport block with	
			to HS-PDSCH shall cycle
		through the four	
HS-SCCH-1 transmission		The HS-SCCH-1 shall be tra	ansmitted continuously with
pattern		constant power.	
HS-PDSCH transmission		The HS-PDSCH shall be tra	nsmitted continuously with
pattern		constant power.	
HS-SCCH-1 TTI Signalling	-	The six sub-frame HS-SCCH-1 signalling pattern shall	
Pattern		be 'XOOXOO', where 'X' indicates TTI in which the	
		HS-SCCH-1 uses the identit	
		'O' indicates TTI in which the	e HS-SCCH-1 uses a
		different UE identity.	

Table 9.57A2: Minimum requirement for HS-SCCH Type 3 detection, single transport block case with downlink physical channel setup in Table C.12

Test	Propagation	$\begin{array}{c c} & & & & \\ \textbf{HS-SCCH-1} & & & & \hat{I}_{or}/I_{oc} \text{ (dB)} & & P(E_m) \\ \hline E_c/I_{or} \text{ (dB)} & & & \hat{I}_{or}/I_{oc} \text{ (dB)} & & \\ \end{array}$		
Number	Conditions			
1	PA3	-8.9	0	0.01
2	VA3	-11.0	0	0.01

Table 9.57A3: Enhanced requirement type 1 for HS-SCCH Type 3 detection, single transport block case with downlink physical channel setup in Table C.12

Test	Propagation			
Number	Conditions	HS-SCCH-1 $\hat{I}_{or}/I_{oc}$ (dB) $\hat{I}_{or}/I_{oc}$ (dB) $P(E_m)$		$P(E_m)$
1	PA3	-15.6	0	0.01
2	VA3	-16.8	0	0.01

Table 9.57A4: Minimum requirement for HS-SCCH Type 3 detection, STTD disabled, single transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $E_c/I_{or}$ (dB) $\hat{I}_{or}/I_{oc}$ (dB) $P(E_n)$		$P(E_m)$
1	PA3	-11.0	3	0.05
2	VA3	-8.7	0	0.01

Table 9.57A5: Enhanced requirement type 1 for HS-SCCH Type 3 detection, STTD disabled, single transport block case with downlink physical channel setup in Table C.12E

Test Propagation Reference value					
Number	Conditions	HS-SCCH-1 $\hat{I}_{or}/I_{oc}$ (dB) $\hat{I}_{or}/I_{oc}$ (dB) $P(E_m)$			
1	PA3	-12.3	0	0.01	
2	VA3	-14.9	0	0.01	

Table 9.57A6: Minimum requirement for HS-SCCH Type 3 detection, STTD enabled, single transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	$\begin{array}{ c c c c c c }\hline \textbf{HS-SCCH-1} & & & & & \hat{I}_{or}/I_{oc} \ \textbf{(dB)} & & & & P(E_m) \\\hline & E_c/I_{or} \ \textbf{(dB)} & & & & & \end{array}$		$P(E_m)$
1	PA3	-8.4	0	0.01
2	VA3	-11.1	0	0.01

Table 9.57A7: Enhanced requirement type 1 for HS-SCCH Type 3 detection, STTD enabled, single transport block case with downlink physical channel setup in Table C.12E

Test	Propagation	Reference value		
Number	Conditions	HS-SCCH-1 $\hat{I}_{or}/I_{oc}$ (dB) $\hat{I}_{or}/I_{oc}$ (dB)		$P(E_m)$
1	PA3	-15.3	0	0.01
2	VA3	-16.7	0	0.01

# 9.5 HS-SCCH-less demodulation of HS-DSCH (Fixed Reference Channel)

The receiver performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) with HS-SCCH-less operation in multi-path fading environment is determined by the information bit throughput R.

The propagation conditions for this subclause are defined in table B.1C.

During the Fixed Reference Channel tests the behaviour of the Node-B emulator in response to the ACK/NACK signalling field of the HS-DPCCH is specified in Table 9.1A.

Performance requirements in this section assume sufficient power allocation to HS-SCCH\_1, so that the probability of detection failure, when the HS-SCCH-1 uses the identity of the UE under test, is very low.

## 9.5.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 7

The requirements are specified in terms of a minimum information bit throughput R for the DL reference channels H-set 7 specified in Annex A.7.1.7, with the addition of the parameters in Table 9.58 and the downlink physical channel setup according to table C.8.

Using this configuration the throughput shall meet or exceed the minimum requirements specified in table 9.59. Enhanced performance requirements type 1 specified in Table 9.60 are based on receiver diversity.

Table 9.58: Test Parameters for Testing QPSK FRCs H-Set 7

Parameter	Unit	Test 1	
Phase reference	-	P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-60	
Redundancy and			
constellation version	-	{0,3}	
coding sequence			
Maximum number of		_	
HARQ transmission	-	2	
NOTE: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with constant power. HS-SCCH-1 shall only use the identity of the UE under test for redundancy version 3 transmissions intended for the UE.			

redundancy version 3 transmissions intended for the UE.

Table 9.59: Minimum requirement, Fixed Reference Channel (FRC) H-Set 7

Test	Propagation	R	Reference value		
Number	Conditions	$\begin{array}{c} \textbf{HS-PDSCH} \\ E_c/I_{or} \ \ \textbf{(dB)} \end{array}$	$\hat{I}_{or}/I_{oc}$ (dB)	T-put <i>R</i> (kbps)	
1	Case 8	-6	0	19.9	

Table 9.60: Enhanced requirement type 1, Fixed Reference Channel (FRC) H-Set 7

Test	Propagation	Reference value			
Number	Conditions	HS-PDSCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	T-put <i>R</i> (kbps)	
1	Case 8	-9	0	23.5	

#### Requirements for HS-DSCH and HS-SCCH reception in 9.6 **CELL FACH state**

The requirements determined in this section apply for UE being able to receive HS-DSCH and HS-SCCH in CELL\_FACH state.

#### 9.6.1 HS-DSCH demodulation requirements (Single Link)

The receiver single link performance of the High Speed Physical Downlink Shared Channel (HS-DSCH) is determined by the RLC SDU error rate (RLC SDU ER).

#### 9.6.1.1 Requirement QPSK, Fixed Reference Channel (FRC) H-Set 3

The requirements are specified in terms of a minimum RLC SDU error rate (RLC SDU ER) for the DL reference channel H-Set 3 (QPSK version) specified in A.7.1.3, with the addition of the parameters in Table 9.61 and the downlink physical channel setup according to Table C.12A. For the test parameters specified in Table 9.61, for the value of HS-DSCH-1  $E_c/I_{or}$  specified in Table 9.62 the measured RLC SDU ER shall be less than or equal to the corresponding specified value of RLC SDU ER.

Table 9.61: Test Parameters for Testing QPSK FRCs H-Set 3

Parameter	Unit	Test 1
Phase reference		P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
Redundancy and constellation version coding sequence		{0,2,5,6}
Number of HARQ transmission		4

NOTE: The HS-SCCH-1 and HS-PDSCH shall be transmitted continuously with

constant power. HS-SCCH-1 shall only use the identity of the UE under test for

those TTI intended for the UE.

NOTE: The HS-PDSCH is transmitted using all four HARQ transmissions cycling

through the different redundancy and constellation versions.

Table 9.62: Minimum requirement QPSK, Fixed Reference Channel (FRC) H-Set 3

Test	Propagation	Reference value		
Number	Conditions	HS-PDSCH RLC SDU ER		
		$E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ = 0 dB	
1	VA30	-6	0.82	

#### 9.6.2 HS-SCCH Detection Performance

The detection performance of the HS-SCCH is determined by RLC SDU error rate (RLC SDU ER).

#### 9.6.2.1 HS-SCCH Type 1 Single Link Performance

For the test parameters specified in Table 9.63, for the value of HS-SCCH-1  $E_c/I_{or}$  specified in Table 9.64 the measured RLC SDU ER shall be less than or equal to the corresponding specified value of RLC SDU ER. The downlink physical channel setup according to Table C.12B.

Table 9.63: Test parameters for HS-SCCH detection – single link

Parameter	Unit	Test 1	Test 2	Test 3
$I_{oc}$	dBm/3.84 MHz	-60		
Phase reference	-		P-CPICH	
P-CPICH $E_c/I_{or}$	dB		-10	
HS-SCCH UE Identity			I-1: 1010101010101	
$(x_{ue,1}, x_{ue,2},, x_{ue,16})$		(UE under test addressed solely via HS-SCCH-1) HS-SCCH-2: 0001001010101010		
HS-DSCH TF of UE1		TF coi	responding to CQ	l1
HS-SCCH-1 transmission pattern		The HS-SCCH-1 shall be transmitted continuously with constant power.		
HS-PDSCH transmission pattern		The HS-PDSCH shall be transmitted continuously with constant power, without re-transmissions.		
HS-SCCH-1 TTI Signalling Pattern	-	The identity of the UE fourth TTI.	under test shall b	e used on every

Table 9.64: Minimum requirement for HS-SCCH detection - single link

Test	Propagation	Reference value			
Number	Conditions	$\begin{array}{c c} \textbf{HS-SCCH-1} & & \hat{I}_{or}/I_{oc} \ \textbf{(dB)} & & \textbf{RLC SDU ER} \end{array}$			
3	VA30	-10	0	0.01	

## 10 Performance requirement (E-DCH)

#### 10.1 General

The performance requirements for the UE in this subclause are specified for the propagation conditions specified in Annex B.2.2 and the Downlink Physical channels specified in Annex C.3.2.

Unless otherwise stated the receiver characteristics are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UEs with more than one receiver antenna connector the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective sections below. Enhanced performance requirements Type 1 are based on receiver diversity.

# 10.2 Detection of E-DCH HARQ ACK Indicator Channel (E-HICH)

### 10.2.1 Single link performance

The receive characteristics of the E-DCH HARQ ACK Indicator Channel (E-HICH) in different multi-path fading environments are determined by the missed ACK and false ACK values.

#### 10.2.1.1 Performance requirement

For the parameters specified in Table 10.1 the average downlink E-HICH  $E_c/I_{or}$  power ratio shall be below the specified value for the missed ACK probabilities in Table 10.2 and 10.3 for minimum performance requirements and Table 10.2A and 10.3A for enhanced performance requirements Type 1. For the parameters specified in Table 10.1 the false ACK probability shall be below the specified value in Table 10.4 and 10.5.

Table 10.1: Requirement scenario parameters for E-HICH – RLS containing the Serving E-DCH cell

Parameter	Unit	Missed ACK	False ACK
$I_{oc}$	dBm/3.84	-60	
06	MHz		
Phase reference	-	P-CPICH	
P-CPICH $E_c/I_{or}$	dB	-10	
E-HICH signalling pattern	-	100% ACK	100% DTX

Table 10.2: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-28.3	0	0.01

Table 10.2A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-31.7	0	0.01

Table 10.3: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed ACK probability
2	VA30	-35.1	0	0.01

Table 10.3A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed ACK probability
2	VA30	-38.3	0	0.01

Table 10.4: Rinimum requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value			
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	False ACK probability		
3	VA30	0	0.5		

Table 10.5: Rinimum requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value			
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	False ACK probability		
4	VA30	0	0.5		

#### 10.2.2 Detection in Inter-Cell Handover conditions

The receive characteristics of the E-DCH HARQ ACK Indicator Channel (E-HICH) is determined during an inter-cell soft handover by the missed ACK and false ACK error probabilities. During the soft handover a UE receives signals from different cells. A UE has to be able to detect E-HICH signalling from different cells belonging to different RLS, containing and not containing the Serving E-DCH cell.

#### 10.2.2.1 Performance requirement for RLS not containing the Serving E-DCH cell

For the parameters specified in Table 10.6 the average downlink E-HICH  $E_c/I_{or}$  power ratio of cell belonging to RLS not containing the Serving E-DCH cell shall be below the specified value for the missed ACK probabilities in Table 10.7 and 10.8 for minimum performance requirements and Table 10.7A and 10.8A for enhanced performance requirements Type 1. For the parameters specified in Table 10.6 the false ACK probability shall be below the specified value in Table 10.9 and 10.10.

Table 10.6: Requirement scenario parameters for E-HICH – cell belonging to RLS not containing the Serving E-DCH cell

Parameter	Unit	Missed ACK	False ACK	
$I_{oc}$	dBm/3.84 MHz	-60		
Phase reference	-	P-C	PICH	
P-CPICH $E_c/I_{or}$	dB	-10		
E-HICH signalling pattern for the Serving E-DCH cell	-	100% NACK (-1) <sup>1</sup>	100% NACK (-1) <sup>1</sup>	
E-HICH signalling pattern for cell belonging to RLS not containing the Serving E- DCH cell		100% ACK (+1)	100% NACK (0)	
Note 1 The Serving E-DCH cell E-HICH $E_c/I_{or}$ power level is set to -16 dB when hybrid ARQ				
acknowledgement indicator is transmitted using 3 consecutive slots and to -23 dB when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots.				

Table 10.7: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{or1}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-16.3	0	0.05

Table 10.7A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-20.6	0	0.05

Table 10.8: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
2	VA30	-23.6	0	0.05

Table 10.8A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
2	VA30	-27.8	0	0.05

Table 10.9: Requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	False ACK probability	
3	VA30	0	2E-4	

Table 10.10: Requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – cell belonging to RLS not containing the Serving E-DCH cell

Test	Propagation	Reference value	
Number	Conditions	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	False ACK probability
4	VA30	0	2E-4

#### 10.2.2.2 Performance requirement for RLS containing the serving E-DCH cell

For the parameters specified in Table 10.11 the average downlink E-HICH  $E_{c}/I_{or}$  power ratio of cell belonging to RLS containing the serving E-DCH cell shall be below the specified value for the missed ACK probabilities in Table 10.12 and 10.13 for minimum performance requirements and Table 10.12A and 10.13A for enhanced performance requirements Type 1. For the parameters specified in Table 10.11 the false ACK probability shall be below the specified value in Table 10.14 and 10.15.

Table 10.11: Requirement scenario parameters for E-HICH - RLS containing the serving cell in SHO

Parameter	Unit	Missed ACK	False ACK
$I_{oc}$	dBm/3.84	-6	60
00	MHz		
Phase reference	-	P-CF	PICH
P-CPICH $E_c/I_{or}$	dB	-10	
E-HICH signalling pattern for	-	100% ACK (+1)	100% DTX (0)
Serving E-DCH cell			
E-HICH signalling pattern for cell		100% NACK (0)	100% NACK (0)
belonging to RLS not containing			
the Serving E-DCH cell			

Table 10.12: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB) for Serving E-DCH cell (ACK)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-23.2	0	0.05

Table 10.12A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB) for Serving E-DCH cell (ACK)	$\hat{I}_{or1}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
1	VA30	-27.1	0	0.05

Table 10.13: Minimum requirement for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB) for Serving E-DCH cell (ACK)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
2	VA30	-29.7	0	0.05

Table 10.13A: Enhanced performance requirement Type 1 for Missed ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	E-HICH $E_c/I_{or}$ (dB) for Serving E-DCH cell (ACK)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed ACK probability
		(ACK)		
2	VA30	-33.4	0	0.05

Table 10.14: Requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 3 consecutive slots – RLS containing the Serving E-DCH cell

	Test	Propagation	Reference value		
1	Number	Conditions	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	False ACK probability	
	3	PA3	0	0.1	
	4	VA120	0	0.1	

Table 10.15: Requirement for False ACK when hybrid ARQ acknowledgement indicator is transmitted using 12 consecutive slots – RLS containing the Serving E-DCH cell

Test	Propagation	Reference value		
Number	Conditions	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	False ACK probability	
5	PA3	0	0.1	
6	VA120	0	0.1	

## 10.3 Detection of E-DCH Relative Grant Channel (E-RGCH)

## 10.3.1 Single link performance

The receive characteristics of the E-DCH Relative Grant Channel (E-RGCH) in multi-path fading environment is determined by the missed UP/DOWN and missed HOLD.

#### 10.3.1.1 Performance requirement

For the parameters specified in Table 10.16 the average downlink E-RGCH  $E_{\rm c}/I_{\rm or}$  power ratio shall be below the specified value for the missed UP/DOWN probabilities in Table 10.17 and 10.18 for minimum performance requirements and Table 10.17A and 10.18A for enhanced performance requirements Type 1. For the parameters specified in Table 10.16 the missed HOLD probability shall be below the specified value in Table 10.19 and 10.20.

Table 10.16: Requirement scenario parameters for E-RGCH – Serving E-DCH RLS

Parameter	Unit	Missed UP/DOWN	Missed HOLD
$I_{oc}$	dBm/3.84 MHz	-60	
Phase reference	-	P-CPICH	
P-CPICH $E_c/I_{or}$	dB	-10	
E-RGCH signalling pattern	-	50% UP 50% DOWN	100% HOLD

Table 10.17: Minimum requirement for Missed UP/DOWN when relative scheduling grant is transmitted using 3 consecutive slots – Serving E-DCH RLS

Test	Propagation	Reference value		
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed UP/DOWN probability
1	VA30	-24.4	0	0.05/0.05

Table 10.17A: Enhanced performance requirement Type 1 for Missed UP/DOWN when relative scheduling grant is transmitted using 3 consecutive slots – Serving E-DCH RLS

Test	Propagation		Reference value	
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed UP/DOWN probability
1	VA30	-28.6	0	0.05/0.05

Table 10.18: Minimum requirement for Missed UP/DOWN when relative scheduling grant is transmitted using 12 consecutive slots – Serving E-DCH RLS

Test	Propagation		Reference value		
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed UP/DOWN probability	
2	VA30	-31	0	0.05/0.05	

Table 10.18A: Enhanced performance requirement Type 1 for Missed UP/DOWN when relative scheduling grant is transmitted using 12 consecutive slots – Serving E-DCH RLS

Test	Propagation	Reference value		
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Missed UP/DOWN probability
2	VA30	-35.0	0	0.05/0.05

Table 10.19: Requirement for Missed HOLD when relative scheduling grant is transmitted using 3 consecutive slots – Serving E-DCH RLS

Test	Propagation	Referen	ce value
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	Missed HOLD probability
3	VA30	0	0.1

Table 10.20: Requirement for Missed HOLD when relative scheduling grant is transmitted using 12 consecutive slots – Serving E-DCH RLS

Test	Propagation	Reference value		
Number	Conditions	$\hat{I}_{or}/I_{oc}$ (dB)	Missed HOLD probability	
4	VA30	0	0.1	

#### 10.3.2 Detection in Inter-Cell Handover conditions

The receive characteristics of the E-DCH Relative Grant Channel (E-RGCH) is determined during an inter-cell soft handover by the missed UP/DOWN and missed HOLD error probabilities. During the soft handover a UE receives signals from different cells. A UE has to be able to detect E-RGCH signalling from different cells, Serving E-DCH cell and Non-serving E-DCH RL.

#### 10.3.2.1 Performance requirement for Non-serving E-DCH RL

For the parameters specified in Table 10.21 the missed HOLD probability shall be below the specified value in Table 10.22. For the parameters specified in Table 10.21 the average downlink E-RGCH  $E_c/I_{or}$  power ratio shall be below the specified value for the missed DOWN probabilities in Table 10.23 for minimum performance requirements and Table 10.23A for enhanced performance requirements Type 1.

Table 10.21: Requirement scenario parameters for E-RGCH – Non-serving E-DCH RL

	Parameter	Unit	Missed HOLD	Missed DOWN
$I_{oc}$		dBm/3.84 MHz	-60	
Ph	ase reference	ı	P-CF	PICH
P-(	CPICH $E_c/I_{or}$	dB	-10	
E-RGCH signalling pattern for Serving E-DCH cell		1	100% UP <sup>1</sup>	100% UP <sup>1</sup>
E-AG	GCH information		Fixed SG <sup>2</sup>	Fixed SG <sup>2</sup>
	H signalling pattern -serving E-DCH RL		100% HOLD	100% DOWN
Note 1	Serving E-DCH cell	E-RGCH $E_c$	$I_{or}$ power level is set to -22 d	B and relative scheduling
grant is transmitted using 12 consecutive slots.  Note 2 Serving E-DCH cell E-AGCH $E_c/I_{or}$ power level is set to -15 dB and E-AGCH TTI length is 10ms.			B and E-AGCH TTI length	

Table 10.22: Requirement for Missed HOLD when relative scheduling grant is transmitted using 15 consecutive slots – Non-serving E-DCH RL

Ī	Test	Propagation	Reference v	alue
	Number	Conditions	$\hat{I}_{or1}\!/I_{oc}$ and $\hat{I}_{or2}\!/I_{oc}$ (dB)	Missed HOLD probability
	1	VA30	0	0.005

Table 10.23: Minimum requirement for Missed DOWN when relative scheduling grant is transmitted using 15 consecutive slots – Non-serving E-DCH RL

Test	Propagation	n Reference value		
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or1}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed DOWN probability
2	VA30	-27.3	0	0.05

Table 10.23A: Enhanced performance requirement Type 1 for Missed DOWN when relative scheduling grant is transmitted using 15 consecutive slots – Non-serving E-DCH RL

Test	Propagation	Reference value		
Number	Conditions	E-RGCH $E_c/I_{or}$ (dB)	$\hat{I}_{orI}/I_{oc}$ and $\hat{I}_{or2}/I_{oc}$ (dB)	Missed DOWN probability
2	VA30	-31.2	0	0.05

## 10.4 Demodulation of E-DCH Absolute Grant Channel (E-AGCH)

## 10.4.1 Single link performance

The receive characteristics of the E-DCH Absolute Grant Channel (E-AGCH) in multi-path fading environment is determined by the missed detection probability.

#### 10.4.1.1 Performance requirement

For the parameters specified in Table 10.24 the average downlink E-AGCH  $E_c/I_{or}$  power ratio shall be below the specified value for the missed detection probability in Table 10.25 for minimum performance requirements and Table 10.25A for enhanced performance requirements Type 1.

Table 10.24: Test parameters for E-AGCH detection – single link

Parameter	Unit	Missed detection
$I_{oc}$	dBm/3.84	-60
00	MHz	
Phase reference	-	P-CPICH
P-CPICH $E_c/I_{or}$	dB	-10
E-AGCH information	-	Varying SG
E-AGCH TTI length	ms	10

Table 10.25: Minimum requirement for E-AGCH detection – single link

Test	Propagation	Reference value		
Number	Conditions	E-AGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Miss detection probability
1	VA30	-23.2	0	0.01

Table 10.25A: Enhanced performance requirement Type 1 for E-AGCH detection – single link

Test	Propagation	Reference value		
Number	Conditions	E-AGCH $E_c/I_{or}$ (dB)	$\hat{I}_{or}/I_{oc}$ (dB)	Miss detection probability
1	VA30	-26.8	0	0.01

## 11 Performance requirement (MBMS)

Unless otherwise stated the receiver characteristics are specified at the antenna connector of the UE. For UE(s) with an integral antenna only, a reference antenna with a gain of 0 dBi is assumed. UE with an integral antenna may be taken into account by converting these power levels into field strength requirements, assuming a 0 dBi gain antenna. For UEs with more than one receiver antenna connector the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective sections below.

## 11.1 Demodulation of MCCH

The receive characteristic of the MCCH is determined by the RLC SDU error rate (RLC SDU ER). The requirement is valid for all RRC states for which the UE has capabilities for MBMS.

### 11.1.1 Minimum requirement

For the parameters specified in Table 11.1 the average downlink S-CCPCH $\_E_c/I_{or}$  power ratio shall be below the specified value for the RLC SDU ER shown in Table 11.2.

ParameterUnitTest 1Phase reference-P-CPICH $I_{oc}$ dBm/3.84 MHz-60 $\hat{I}_{or}/I_{oc}$ dB-3MCCH Data Rate7.6 kbps

Table 11.1: Parameters for MCCH detection

Table 11.2: Test requirements for MCCH detection

VA3

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-11.6	0.01

## 11.1.2 Minimum requirement for MBSFN

Propagation condition

Requirement in this subclause is applicable to UEs that are capable of receiving MBSFN with at least two receive antenna connectors.

For the parameters specified in Table 11.1a the average downlink S-CCPCH\_ $E_c/I_{or}$  power ratio shall be below the specified value for the RLC SDU ER shown in Table 11.2a.

Table 11.1a: Parameters for MCCH detection

Parameter	Unit	Test 1
Phase reference	-	P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
$\hat{I}_{or}/I_{oc}$	dB	12
MCCH data rate	kbps	7.6
Propagation condition		MBSFN channel model ( see Appendix B)

Table 11.2a: Test requirements for MCCH detection

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-24.9	0.01

#### 11.2 Demodulation of MTCH

The receive characteristic of the MTCH is determined by RLC SDU error rate (RLC SDU ER). RLC SDU ER is specified for each individual data rate of the MTCH. The requirement is valid for all RRC states for which the UE has capabilities for MBMS.

### 11.2.1 Minimum requirement

For the parameters specified in Table 11.3 the average downlink S-CCPCH\_ $E_c$  / $I_{or}$  power ratio shall be below the specified value for the RLC SDU ER shown in Table 11.4. If the UE supports optional enhanced performance requirements type1 for MBMS then for the parameters specified in Table 11.3 the average downlink S-CCPCH\_ $E_c$  / $I_{or}$  power ratio shall be below the specified value for the RLC SDU ER shown in Table 11.4a.

Parameter Unit Test 1 Test 2 Test 3 Phase reference P-CPICH dBm/3.84 MHz  $I_{oc}$ -60  $\hat{I}_{or}/I_{oc}$ dΒ -3 -3 -3 MTCH Data Rate 128 kbps 128 kbps 256 kbps Transmission Time Interval 40 40 80 Propagation condition VA3 Number of Radio Links p 3 3 3 Delay of Radio Link 2 160ms 20 ms 20 ms compared with Radio Link 1 Delay of Radio Link 3 40.67 ms 80.67 ms 1240ms compared with Radio Link 1 (1 TTI + 1 slot)(1 TTI + 1 slot)

**Table 11.3: Parameters for MTCH detection** 

Table 11.4: Test requirements for MTCH detection

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-4.9	0.1
2	-5.6	0.1
3	-8.5	0.1

Table 11.4a: Test requirements for MTCH detection for UE supporting the enhanced performance requirements type1

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-7.7	0.1
2	-8.7	0.1
3	-11.5	0.1

## 11.2.2 Minimum requirement for MBSFN

Requirement in this subclause is applicable to UEs that are capable of receiving MBSFN with at least two receive antenna connectors.

For the parameters specified in Table 11.3a the average downlink S-CCPCH\_E<sub>c</sub>/I<sub>or</sub> power ratio shall be below the specified value for the RLC SDU ER shown in Table 11.4a.

Table 11.3a: Parameters for MTCH detection

Parameter	Unit	Test 1
Phase reference	-	P-CPICH
$I_{oc}$	dBm/3.84 MHz	-60
$\hat{I}_{or}/I_{oc}$	dB	12
MTCH Data Rate	kbps	512
Transmission Time Interval	ms	40
Propagation condition		MBSFN channel model (see Appendix B)

Table 11.4a: Test requirements for MTCH detection

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-5.8	0.1

## 11.3 Demodulation of MTCH and cell identification

MBMS combining is not controlled by a network but instead it is autonomously handled by a terminal. UE has to be able to receive MTCH and identify intra-frequency neighbour cells according to the requirements. The receive characteristic of the MTCH combined with cell identification is determined by RLC SDU error rate (RLC SDU ER).

### 11.3.1 Minimum requirement

For the parameters specified in Table 11.5 the average downlink S-CCPCH $_{\text{C}}/I_{\text{or}}$  power ratio shall be below the specified value for the RLC SDU error rate shown in Table 11.6. The cell reselection parameters are given in clause A.9 in Table A.34. The different cells are assumed to be time aligned.

Table 11.5: Parameters for MTCH demodulation requirements with cell identification

Doromotor	Parameter Unit Test 1			
Parameter	Unit	Stage 1	Stage 2	Stage 2
Time in each stage	S	2	0.8	3
Phase reference	-		P-CPICH	
$I_{oc}$	dBm/3.84 MHz	-70	-73	-70
Cell1 $\hat{I}_{or1}/I_{oc}$	dB	-3	0	-3
Cell2 $\hat{I}_{or2}/I_{oc}$	dB	-3	0	-infinity
Cell3 $\hat{I}_{or3}/I_{oc}$	dB	-infinity	0	-3
Propagation condition			Case1	
MTCH Data Rate	Kbps		128	•
Number of Radio Links		2	3	2

Table 11.6: Requirements for MTCH detection

Test Number	S-CCPCH_Ec/lor (dB)	RLC SDU ER
1	-5.6	0.05

# Annex A (normative): Measurement channels

### A.1 General

The measurement channels in this annex are defined to derive the requirements in clauses 6, 7 and 8. The measurement channels represent example configuration of radio access bearers for different data rates.

The measurement channel for 12.2 kbps shall be supported by any UE both in up- and downlink. Support for other measurement channels is depending on the UE Radio Access capabilities.

## A.2 UL reference measurement channel

## A.2.1 UL reference measurement channel (12.2 kbps)

The parameters for the 12.2 kbps UL reference measurement channel are specified in Table A.1 and Table A.2. The channel coding for information is shown in figure A.1.

Table A.1: UL reference measurement channel physical parameters (12.2 kbps)

Parameter	Unit	Level
Information bit rate	kbps	12.2
DPDCH	kbps	60
DPCCH	kbps	15
DPCCH Slot Format #i	-	0
DPCCH/DPDCH power ratio	dB	-5.46
TFCI	-	On
Repetition	% 23	
Note: Slot Format #2 is used for closed loop tests in subclause 8.6.2.		
Slot Format #2 and #5 are used for site selection diversity transmission		
tests in subclause 8.6.3		

Table A.2: UL reference measurement channel, transport channel parameters (12.2 kbps)

Parameters	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	244	100
Transport Block Set Size	244	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Convolution Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

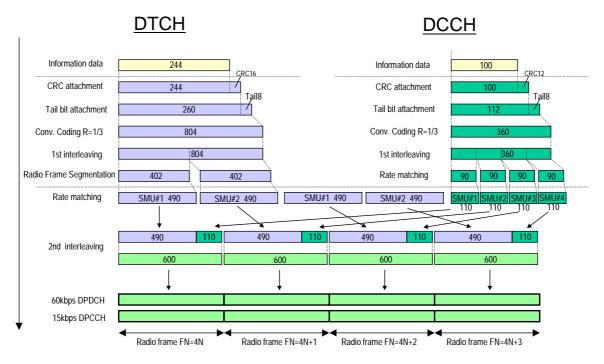


Figure A.1 (Informative): Channel coding of UL reference measurement channel (12.2 kbps)

## A.2.2 UL reference measurement channel (64 kbps)

The parameters for the 64 kbps UL reference measurement channel are specified in Table A.3 and Table A.4. The channel coding for information is shown in figure A.2. This measurement channel is not currently used in TS 25.101 but can be used for future requirements.

Table A.3: UL reference measurement channel (64 kbps)

Parameter	Unit	Level
Information bit rate	kbps	64
DPDCH	kbps	240
DPCCH	kbps	15
DPCCH Slot Format #i	-	0
DPCCH/DPDCH power ratio	dB	-9.54
TFCI	-	On
Repetition	%	18

Table A.4: UL reference measurement channel, transport channel parameters (64 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	1280	100
Transport Block Set Size	1280	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

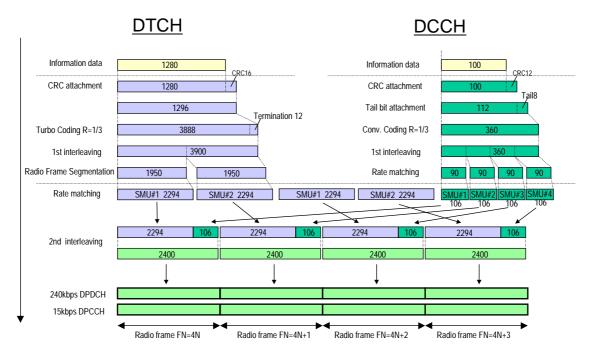


Figure A.2 (Informative): Channel coding of UL reference measurement channel (64 kbps)

## A.2.3 UL reference measurement channel (144 kbps)

The parameters for the 144 kbps UL reference measurement channel are specified in Table A.5 and Table A.6. The channel coding for information is shown in Figure A.3. This measurement channel is not currently used in the present document but can be used for future requirements.

Table A.5: UL reference measurement channel (144 kbps)

Parameter	Unit	Level
Information bit rate	kbps	144
DPDCH	kbps	480
DPCCH	kbps	15
DPCCH Slot Format #i	-	0
DPCCH/DPDCH power ratio	dB	-11.48
TFCI	-	On
Repetition	%	8

Table A.6: UL reference measurement channel, transport channel parameters (144kbps)

Parameters	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	2880	100
Transport Block Set Size	2880	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

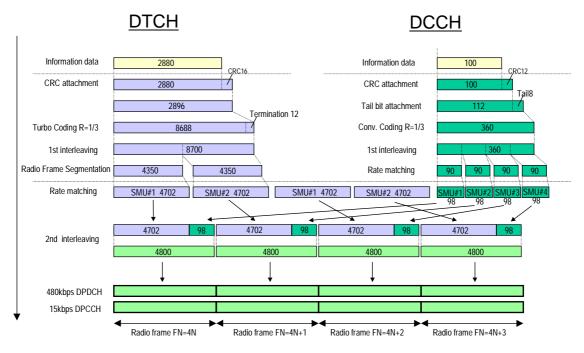


Figure A.3 (Informative): Channel coding of UL reference measurement channel (144 kbps)

## A.2.4 UL reference measurement channel (384 kbps)

The parameters for the 384 kbps UL reference measurement channel are specified in Table A.7 and Table A.8. The channel coding for information is shown in Figure A.4. This measurement channel is not currently used in TS 25.101 but can be used for future requirements.

Table A.7: UL reference measurement channel (384 kbps)

Parameter	Unit	Level
Information bit rate	kbps	384
DPDCH	kbps	960
DPCCH	kbps	15
DPCCH Slot Format #I	-	0
DPCCH/DPDCH power ratio	dB	-11.48
TFCI	-	On
Puncturing	%	18

Table A.8: UL reference measurement channel, transport channel parameters (384 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	3840	100
Transport Block Set Size	3840	100
Transmission Time Interval	10 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

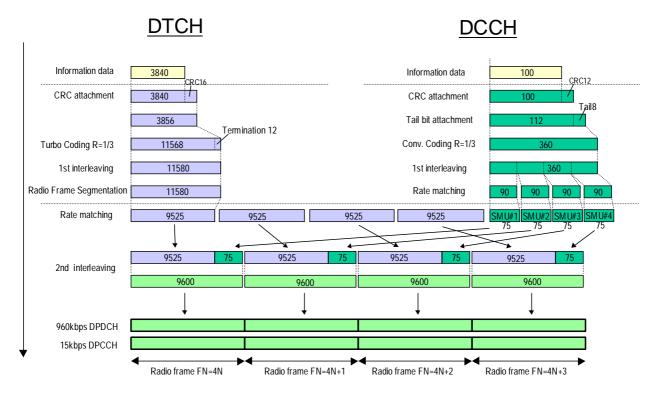


Figure A.4 (Informative): Channel coding of UL reference measurement channel (384 kbps)

## A.2.5 UL reference measurement channel (768 kbps)

The parameters for the UL measurement channel for 768 kbps are specified in Table A.9 and Table A.10.

Table A.9: UL reference measurement channel, physical parameters (768 kbps)

Parameter	Unit	Level
Information bit rate	kbps	2*384
DPDCH₁	kbps	960
DPDCH <sub>2</sub>	kbps	960
DPCCH	kbps	15
DPCCH Slot Format #i	-	0
DPCCH/DPDCH power ratio	dB	-11.48
TFCI	-	On
Puncturing	%	18

Table A.10: UL reference measurement channel, transport channel parameters (768 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	3840	100
Transport Block Set Size	7680	100
Transmission Time Interval	10 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

## A.2.5A UL reference measurement channel (768 kbps)

The parameters for the UL measurement channel for 768 kbps are specified in Table A.9A and Table A.10A.

Table A.9A: UL reference measurement channel, physical parameters (768 kbps)

Parameter	Unit	Level
Information bit rate	kbps	2*384
DPDCH₁	kbps	960
DPDCH <sub>2</sub>	kbps	960
DPCCH	kbps	15
DPCCH Slot Format #i	-	0
S-DPCCH	kbps	15
S-DPCCH Slot Format #i	-	1
DPCCH/DPDCH power ratio	dB	-11.48
TFCI	=	On
Puncturing	%	18

Table A.10A: UL reference measurement channel, transport channel parameters (768 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	3840	100
Transport Block Set Size	7680	100
Transmission Time Interval	10 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12

# A.2.6 UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation

The parameters for the UL measurement channel for UE transmitter characteristics for DC-HSUPA are specified in Table A.10AA and Figure A.4AA. The power imbalance in Table A.10AA refers to the ratio of the DPCCH power of the primary uplink frequency to the DPCCH power of the secondary uplink frequency, expressed in dB.

Table A.10AA: Settings for DC-HSUPA reference measurement channel using BPSK modulation

Parameter	Unit	Value
Modulation		BPSK
Maximum. Inf. Bit Rate	kbps	60
TTI	ms	2
Number of HARQ Processes	Processes	8
Information Bit Payload (N <sub>INF</sub> )	Bits	120
Binary Channel Bits per TTI (N <sub>BIN</sub> ) (3840 / SF x TTI sum for all channels)	Bits	480
Coding Rate (N <sub>INF</sub> / N <sub>BIN</sub> )		0.25
Physical Channel Codes	SF for each	{16}

	physical channel	
E-DPDCH/DPCCH power ratio E-DPCCH/DPCCH power ratio HS-DPCCH/DPCCH power ratio	dB dB dB	4.08 -9.54 -9.54
Power imbalance	dB	0
Note: HS-DPCCH is applicable only for the primary uplink frequency.		

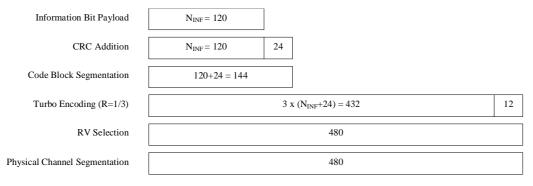


Figure A.4AA: E-DPDCH coding rate for DC-HSUPA reference measurement channel using BPSK modulation

# A.2.7 UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation

The parameters for the UL measurement channel for UE transmitter characteristics for DC-HSUPA using 16QAM modulation are specified in Table A.10AB and Figure A.4AB. The power imbalance in Table A.11 refers to the ratio of the DPCCH power of the primary uplink frequency to the DPCCH power of the secondary uplink frequency, expressed in dB.

Table A.10AB: Settings for DC-HSUPA reference measurement channel using 16QAM modulation

Parameter	Unit	Value
Modulation		16QAM
Maximum. Inf. Bit Rate	Kbps	4227.0
TTI	ms	2
Number of HARQ Processes	Processes	8
Information Bit Payload (N <sub>INF</sub> )	Bits	8454
Binary Channel Bits per TTI (N <sub>BIN</sub> )	Bits	23040
(3840 / SF x TTI sum for all channels)		
Coding Rate (N <sub>INF</sub> / N <sub>BIN</sub> )		0.367
Physical Channel Codes	SF for each	{2,2,4,4}
	physical channel	
E-DPDCH/DPCCH power ratio, SF4 codes	dB	16.03
E-DPDCH/DPCCH power ratio, SF2 codes	dB	19.02
E-DPCCH/DPCCH power ratio	dB	8.07
HS-DPCCH/DPCCH power ratio	dB	2.05
Power imbalance	dB	0
Note: HS-DPCCH is applicable only for	the primary uplink frequ	iency

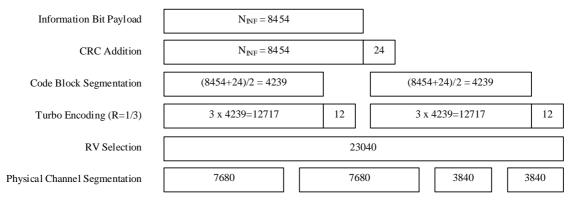


Figure A.4AB: E-DPDCH coding rate for DC-HSUPA reference measurement channel using 16QAM modulation

# A.2.8 Combinations of UL E-DCH reference measurement channel for DC-HSUPA tests

The combinations of BPSK and 16QAM reference measurement channels in Table A.10AC shall be used for verifying the UE maximum output power for DC-HSUPA, additional Spectrum emission mask for DC-HSUPA, and additional ACLR requirement for DC-HSUPA. The entry BPSK in Table A.10AC refers to the UL E-DCH reference measurement channel for DC-HSUPA using BPSK modulation, specified in subclause A.2.6, and the entry 16QAM refers to the UL E-DCH reference measurement channel for DC-HSUPA using 16QAM modulation, specified in subclause A.2.7. The power imbalance in subclause A.2.6 and A.2.7 have been adjusted as shown in Table A.10AC.

Table A.10AC: Settings for DC-HSUPA reference measurement channels for UE maximum output power, spectrum emission mask and ACLR requirements

Config #	Primary carrier	Secondar y carrier	Power imbalance [dB]	Allowed MPR [dB]
1	BPSK	BPSK	-10	[0.5]
2	BPSK	BPSK	8	[1.0]
3	BPSK	BPSK	0	[1.5]
4	16QAM	16QAM	0	[TBD]

## A.3 DL reference measurement channel

## A.3.0 DL reference measurement channel (0 kbps)

The parameters for the 0 kbps DL reference measurement channel are specified in Table A.10A and Table A.10B. The channel coding is shown for information in figure A.4A.

Table A.10A: DL reference measurement channel physical parameters (0 kbps)

Parameter	Unit	Level
Information bit rate	kbps	0
DPCH	ksps	30
Slot Format #I	-	11
TFCI	-	On
Power offsets PO1, PO2 and PO3	dB	0
Puncturing	%	13.9

Table A.10B: DL reference measurement channel, transport channel parameters (0 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	0	100
Transport Block Set Size	0	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Convolution Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12
Position of TrCH in radio frame	fixed	fixed

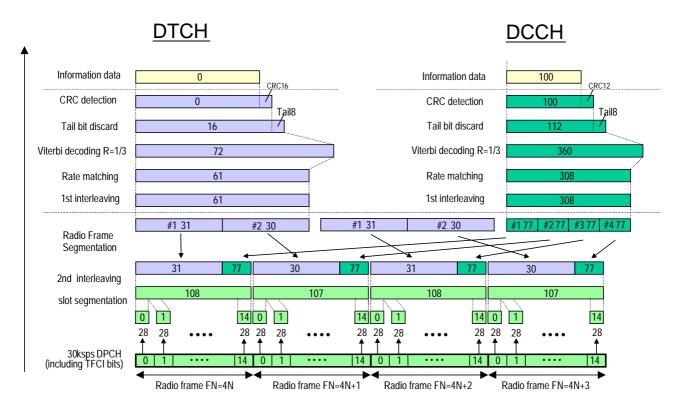


Figure A.4A (Informative): Channel coding of DL reference measurement channel (0 kbps)

## A.3.1 DL reference measurement channel (12.2 kbps)

The parameters for the 12.2 Kbps DL reference measurement channel are specified in Table A.11 and Table A.12. The channel coding is shown for information in figure A.5.

Table A.11: DL reference measurement channel physical parameters (12.2 kbps)

Parameter	Unit	Level
Information bit rate	kbps	12.2
DPCH	ksps	30
Slot Format #i	-	11
TFCI	-	On
Power offsets PO1, PO2 and PO3	dB	0
Puncturing	%	14.7

Table A.12: DL reference measurement channel, transport channel parameters (12.2 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	244	100
Transport Block Set Size	244	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Convolution Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12
Position of TrCH in radio frame	fixed	fixed

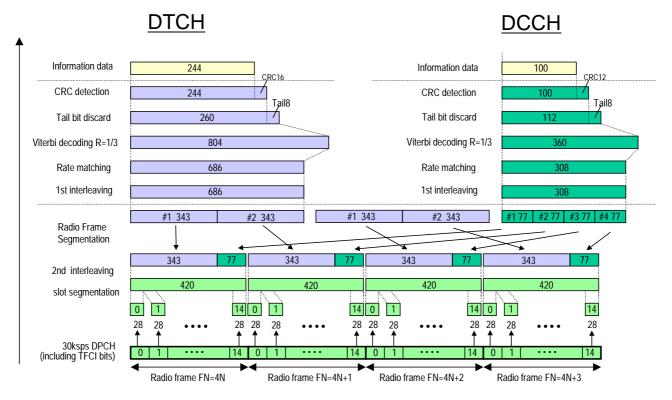


Figure A.5 (Informative): Channel coding of DL reference measurement channel (12.2 kbps)

## A.3.2 DL reference measurement channel (64 kbps)

The parameters for the DL reference measurement channel for 64 kbps are specified in Table A.13 and Table A.14. The channel coding is shown for information in Figure A.6.

Table A.13: DL reference measurement channel physical parameters (64 kbps)

Parameter	Unit	Level
Information bit rate	kbps	64
DPCH	ksps	120
Slot Format #i	-	13
TFCI	-	On
Power offsets PO1, PO2 and PO3	dB	0
Repetition	%	2.9

Table A.14: DL reference measurement channel, transport channel parameters (64 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	1280	100
Transport Block Set Size	1280	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12
Position of TrCH in radio frame	fixed	fixed

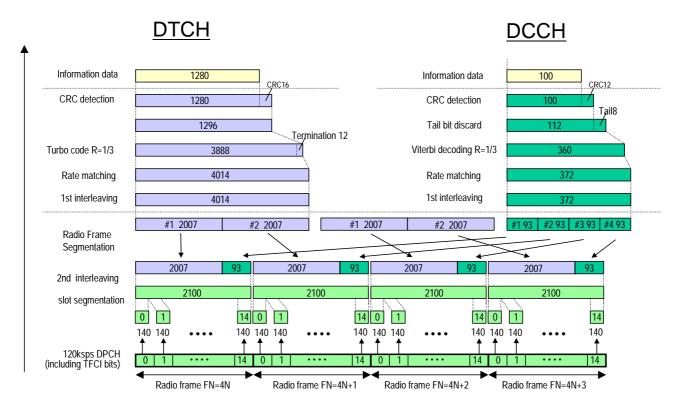


Figure A.6 (Informative): Channel coding of DL reference measurement channel (64 kbps)

## A.3.3 DL reference measurement channel (144 kbps)

The parameters for the DL measurement channel for 144 kbps are specified in Table A.15 and Table A.16. The channel coding is shown for information in Figure A.7.

Table A.15: DL reference measurement channel physical parameters (144 kbps)

Parameter	Unit	Level
Information bit rate	kbps	144
DPCH	ksps	240
Slot Format #i	-	14
TFCI	-	On
Power offsets PO1, PO2 and PO3	dB	0
Puncturing	%	2.7

Table A.16: DL reference measurement channel, transport channel parameters (144 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	2880	100
Transport Block Set Size	2880	100
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12
Position of TrCH in radio frame	fixed	fixed

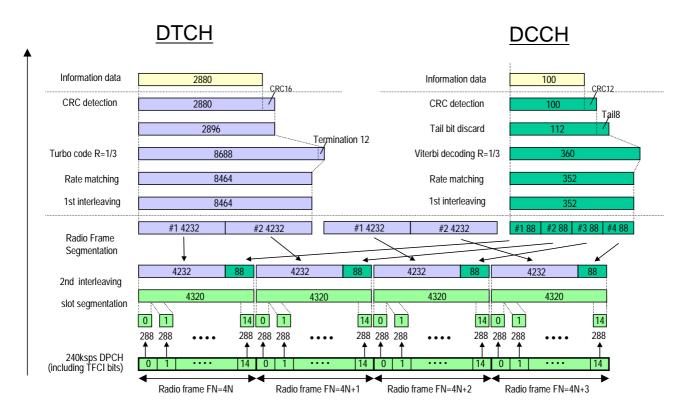


Figure A.7 (Informative): Channel coding of DL reference measurement channel (144 kbps)

## A.3.4 DL reference measurement channel (384 kbps)

The parameters for the DL measurement channel for 384~kbps are specified in Table A.17 and Table A.18. The channel coding is shown for information in Figure A.8

Table A.17: DL reference measurement channel, physical parameters (384 kbps)

Parameter	Unit	Level
Information bit rate	kbps	384
DPCH	ksps	480
Slot Format # i	-	15
TFCI		On
Power offsets PO1, PO2 and PO3	dB	0
Puncturing	%	22

Table A.18: DL reference measurement channel, transport channel parameters (384 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	3840	100
Transport Block Set Size	3840	100
Transmission Time Interval	10 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	16	12
Position of TrCH in radio frame	fixed	Fixed

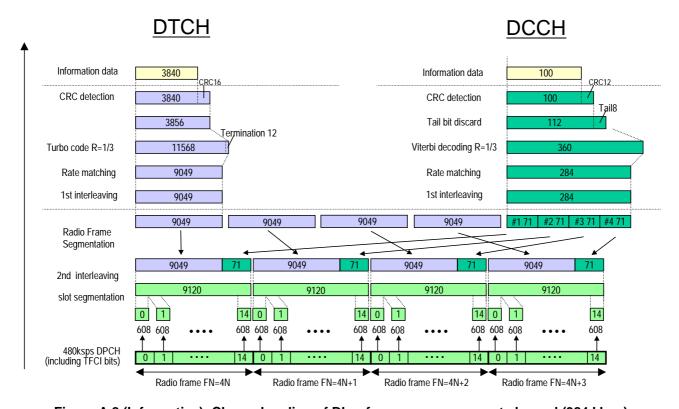


Figure A.8 (Informative): Channel coding of DL reference measurement channel (384 kbps)

## A.3.5 DL reference measurement channel 2 (64 kbps)

The parameters for the DL reference measurement channel for 64 kbps are specified in Table A.18A and Table A.18B. The channel coding is shown for information in Figure A.8A.

Table A.18A: DL reference measurement channel physical parameters (64 kbps)

Parameter	Unit	Level
Information bit rate (DTCH)	kbps	64
Information bit rate (DCCH)	kbps	3.4
DPCH	ksps	120
Slot Format #i	-	13
TFCI	-	On
Puncturing (DTCH)	%	8.6
Repetition (DCCH)	%	27.9

Table A.18B: DL reference measurement channel, transport channel parameters (64 kbps)

Parameter	DTCH	DCCH
Transport Channel Number	1	2
Transport Block Size	336	148
Transport Block Set Size	1344	148
Transport blocks per TTI	4	1
Transmission Time Interval	20 ms	40 ms
Type of Error Protection	Turbo Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	143	200
Size of CRC	16	16
Position of TrCH in radio frame	fixed	fixed

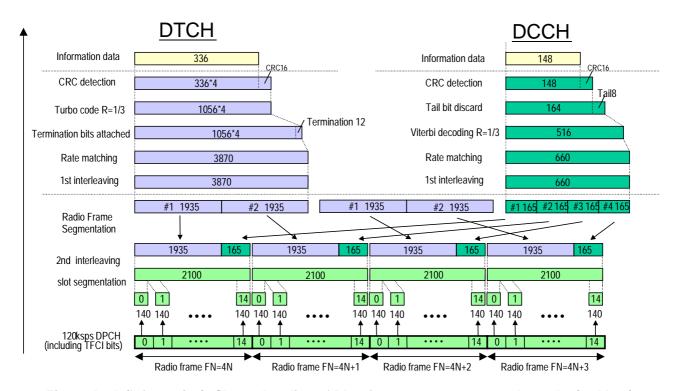


Figure A.8A (Informative): Channel coding of DL reference measurement channel 2 (64 kbps)

# A.4 DL reference measurement channel for BTFD performance requirements

The parameters for DL reference measurement channel for BTFD are specified in Table A.19 and Table A.20. The channel coding for information is shown in figures A.9, A.10, and A11.

Table A.19: DL reference measurement channel physical parameters for BTFD

Parameter	Unit	Rate 1	Rate 2	Rate 3
Information bit rate	kbps	12.2	7.95	1.95
DPCH	ksps	30		
Slot Format # i	-	8		
TFCI	-	Off		
Power offsets PO1, PO2 and PO3	dB	0		
Repetition	%	5		

Table A.20: DL reference measurement channel, transport channel parameters for BTFD

Dorometer	DTCH			DCCH	
Parameter	Rate 1	Rate 2	Rate 3	рссп	
Transport Channel Number	1			2	
Transport Block Size	244	159	39	100	
Transport Block Set Size	244	159	39	100	
Transmission Time Interval		20 ms	40 ms		
Type of Error Protection	Con	volution Co	Convolution Coding		
Coding Rate	1/3			1/3	
Rate Matching attribute	256			256	
Size of CRC	12			12	
Position of TrCH in radio frame		fixed		fixed	

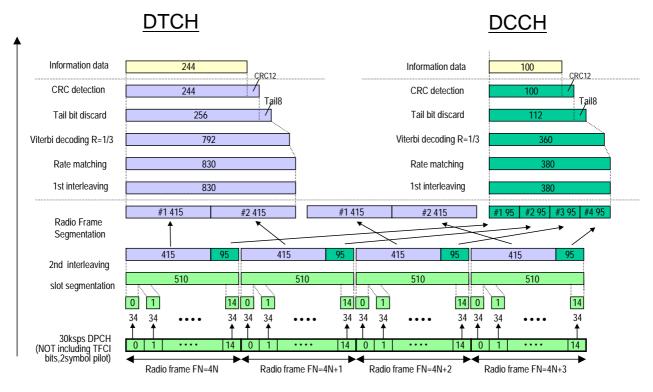


Figure A.9 (Informative): Channel coding of DL reference measurement channel for BTFD (Rate 1)

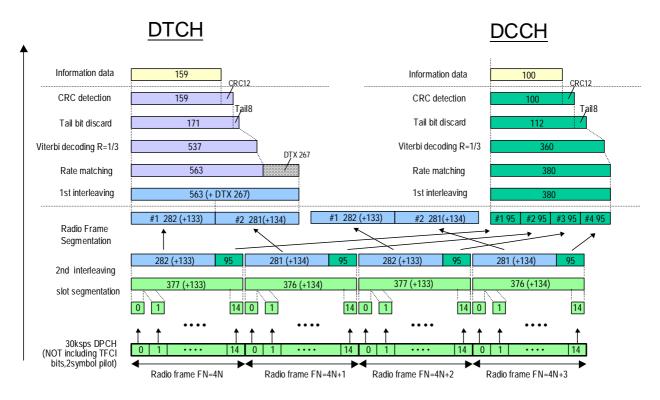


Figure A.10 (Informative): Channel coding of DL reference measurement channel for BTFD (Rate 2)

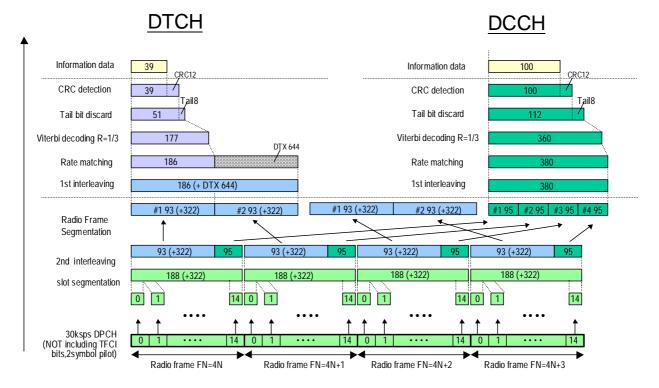


Figure A.11 (Informative): Channel coding of DL reference measurement channel for BTFD (Rate 3)

# A.4A Reference parameters for discontinuous UL DPCCH transmission

The parameters for the UE UL power control operation with discontinuous UL DPCCH transmission test is specified in Table A.20A. Same parameter values are used for 2ms and 10ms E-DCH TTI.

Table A.20A: Parameters for the discontinuous UL DPCCH transmission

Parameter	Unit	Level
Enabling_Delay	Radio frames	0
UE_DTX_cycle_1	Subframes	10
UE_DTX_cycle_2	Subframes	10
UE_DTX_DRX_offset	Subframes	0
Inactivity_threshold_for_UE_DTX_cycle2	E-DCH TTI	1
UE_DPCCH_burst_1	Subframes	1
UE_DPCCH_burst_2	Subframes	1
UE_DTX_long_preamble_length	Slots	2
CQI Feedback cycle, k	Milliseconds	0
CQI_DTX_TIMER	Subframes	0

Table A.20B: (void)

Figure A.11A (void)

## A.5 DL reference compressed mode parameters

Parameters described in Table A.21 are used in some test specified in TS 25.101 while parameters described in Table A.22 and Table A.22A are used in some tests specified in TS 25.133.

Parameters in Table A.21 are applicable when compressed mode by spreading factor reduction is used in downlink.

Table A.21: Compressed mode reference pattern 1 parameters

Parameter	Set 1	Set 2	Note
TGSN (Transmission Gap Starting Slot Number)	11	4	
TGL1 (Transmission Gap Length 1)	7	7	
TGL2 (Transmission Gap Length 2)	-	7	Only one gap in use.
TGD (Transmission Gap Distance)	0	15	Only one gap in use.
TGPL1 (Transmission Gap Pattern Length)	4	4	
TGPRC (Transmission Gap Pattern Repetition	NA	NA	Defined by higher layers
Count)			
TGCFN (Transmission Gap Connection Frame	NA	0	Defined by higher layers
Number):			
UL/DL compressed mode selection	DL & UL	DL & UL	2 configurations possible
			DL &UL / DL
UL compressed mode method	SF/2	SF/2	
DL compressed mode method	SF/2	SF/2	
Downlink frame type and Slot format	11B	11B	
Scrambling code change	No	No	
RPP (Recovery period power control mode)	0	0	
ITP (Initial transmission power control mode)	0	0	

Table A.22: Compressed mode reference pattern 2 parameters

Parameter	Set 1	Set 2	Set 4	Set 5	Note
TGSN (Transmission Gap Starting Slot Number)	4	4	8	10	
TGL1 (Transmission Gap Length 1)	7	7	14	10	
TGL2 (Transmission Gap Length 2)	-	-	-	•	Only one gap in use.
TGD (Transmission Gap Distance)	0	0	0	0	
TGPL1 (Transmission Gap Pattern Length)	3	12	4	8	
TGPRC (Transmission Gap Pattern Repetition Count)	NA	NA	NA	NA	Defined by higher layers
TGCFN (Transmission Gap Connection Frame Number):	NA	NA	NA	NA	Defined by higher layers
UL/DL compressed mode selection	DL & UL	DL & UL	DL & UL	DL & UL	2 configurations possible. DL & UL / DL
UL compressed mode method	SF/2	SF/2	SF/2	SF/2	
DL compressed mode method	SF/2	SF/2	SF/2	SF/2	
Downlink frame type and Slot format	11B	11B	11B	11B	
Scrambling code change	No	No	No	No	
RPP (Recovery period power control mode)	0	0	0	0	
ITP (Initial transmission power control mode)	0	0	0	0	

Table A.22A: Compressed mode reference pattern 3 parameters

Parameter	Set 1	Set 2	Set 3	Set 4	Note
TGSN (Transmission Gap Starting Slot	8	8	8	8	
Number)					
TGL1 (Transmission Gap Length 1)	14	14	14	14	
TGL2 (Transmission Gap Length 2)	-	-	-	-	Only one gap in use.
TGD (Transmission Gap Distance)	0	0	0	0	
TGPL1 (Transmission Gap Pattern Length)	8	24	24	24	
TGPRC (Transmission Gap Pattern	NA	NA	NA	NA	Defined by higher
Repetition Count)					layers
TGCFN (Transmission Gap Connection	0	4	12	20	
Frame Number):					
UL/DL compressed mode selection	DL & UL	DL & UL	DL & UL	DL & UL	2 configurations
					possible. DL & UL / DL
UL compressed mode method	SF/2	SF/2	SF/2	SF/2	
DL compressed mode method	SF/2	SF/2	SF/2	SF/2	
Downlink frame type and Slot format	11B	11B	11B	11B	
Scrambling code change	No	No	No	No	
RPP (Recovery period power control mode)	0	0	0	0	
ITP (Initial transmission power control mode)	0	0	0	0	

## A.6 DL reference parameters for PCH tests

The parameters for the PCH demodulation tests are specified in Table A.23 and Table A.24.

Table A.23: Physical channel parameters for S-CCPCH

Parameter	Unit	Level
Channel bit rate	kbps	60
Channel symbol rate	ksps	30
Slot Format #i	-	4
TFCI	-	OFF
Power offsets of TFCI and Pilot	dB	0
fields relative to data field		

Table A.24: Transport channel parameters for S-CCPCH

Parameter	PCH
Transport Channel Number	1
Transport Block Size	240
Transport Block Set Size	240
Transmission Time Interval	10 ms
Type of Error Protection	Convolution Coding
Coding Rate	1/2
Rate Matching attribute	256
Size of CRC	16
Position of TrCH in radio frame	fixed

## A.7 DL reference channel parameters for HSDPA tests

## A.7.1 Fixed Reference Channel (FRC)

#### A.7.1.1 Fixed Reference Channel Definition H-Set 1/1A/1B/1C/1E

Table A.25: Fixed Reference Channel H-Set 1/1A/1B/1C/1E

Parameter		Unit	Value	
Nomina	l Avg. Inf. Bit Rate	kbps	534	777
Inter-TT	T Distance	TTI"s	3	3
Number	of HARQ Processes	Proces	2	2
		ses	2	2
Informa	tion Bit Payload ( $N_{{\scriptscriptstyle INF}}$ )	Bits	3202	4664
Number	Code Blocks	Blocks	1	1
Binary (	Channel Bits Per TTI	Bits	4800	7680
Total Av	ailable SML"s in UE	SML"s	19200	19200
Number	of SML"s per HARQ Proc.	SML"s	9600	9600
Coding	Coding Rate		0.67	0.61
Number of Physical Channel Codes		Codes	5	4
Modulation			QPSK	16QAM
Note:	The HS-DSCH shall be transmitte	tted continuously with constant		
	power but only every third TTI shall be allocated to the UE			
under test. The values in the table defines H-Set 1. H-Set 1A for				
DC-HSDPA and DB-DC-HSDPA is formed by applying H-Set 1				
to each of the carriers available in DC-HSDPA and DB-DC-				
HSDPA mode. H-Set 1B and H-Set 1C for 4C-HSDPA are				
formed by applying H-Set 1 to each of the carriers available in				
The state of the s				

Inf. Bit Payload 3202 **CRC** Addition 24 CRC 3202 Code Block 3226 Segmentation Turbo-Encoding 9678 12 Tail Bits (R=1/3)1st Rate Matching 9600 **RV** Selection 4800 Physical Channel Segmentation

4C-HSDPA mode (3 carriers for H-Set 1B and 4 carriers for H-Set 1C). H-Set 1E for 8C-HSDPA is formed by applying H-Set 1

to each of the carriers available in 8C-HSDPA mode.

Figure A.12: Coding rate for Fixed reference Channel H-Set 1 (QPSK)

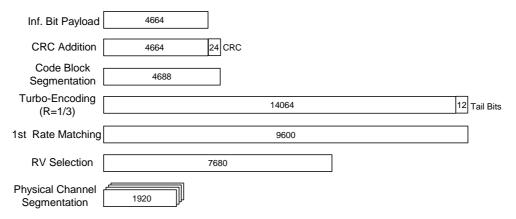


Figure A.13: Coding rate for Fixed reference Channel H-Set 1 (16 QAM)

#### A.7.1.2 Fixed Reference Channel Definition H-Set 2

Table A.26: Fixed Reference Channel H-Set 2

Parameter	Unit	Va	lue
Nominal Avg. Inf. Bit Rate	kbps	801	1166
Inter-TTI Distance	TTI"s	2	2
Number of HARQ Processes	Processes	3	3
Information Bit Payload ( $N_{{\it INF}}$ )	Bits	3202	4664
Number Code Blocks	Blocks	1	1
Binary Channel Bits Per TTI	Bits	4800	7680
Total Available SML"s in UE	SML"s	28800	28800
Number of SML"s per HARQ Proc.	SML"s	9600	9600
Coding Rate		0.67	0.61
Number of Physical Channel Codes	Codes	5	4
Modulation		QPSK	16QAM
Note: The HS-DSCH shall be transmitted continuously with constant			
power but only every second TTI shall be allocated to the UE			he UE
under test.			

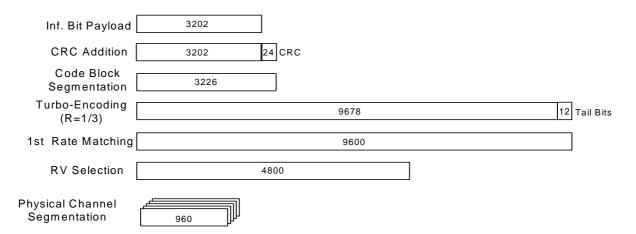


Figure A.14: Coding rate for Fixed Reference Channel H-Set 2 (QPSK)

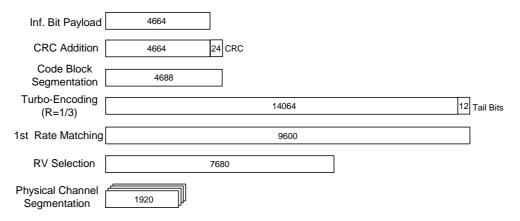


Figure A.15: Coding rate for Fixed Reference Channel H-Set 2 (16QAM)

### A.7.1.3 Fixed Reference Channel Definition H-Set 3/3A/3B/3C/3E

Table A.27: Fixed Reference Channel H-Set 3/3A/3B/3C/3E

Parameter	Unit	Va	lue
Nominal Avg. Inf. Bit Rate	kbps	1601	2332
Inter-TTI Distance	TTI"s	1	1
Number of HARQ Processes	Processes	6	6
Information Bit Payload ( $N_{{\scriptscriptstyle I\!N\!F}}$ )	Bits	3202	4664
Number Code Blocks	Blocks	1	1
Binary Channel Bits Per TTI	Bits	4800	7680
Total Available SML"s,in UE	SML"s	57600	57600
Number of SML"s per HARQ Proc.	SML"s	9600	9600
Coding Rate		0.67	0.61
Number of Physical Channel Codes	Codes	5	4
Modulation		QPSK	16QAM
Note: The values in the table define H-Set 3. H-Set 3A for DC-HSDPA and DB-DC-HSDPA is formed by applying H-Set 3 to each of the carriers available in DC-HSDPA and DB-DC-HSDPA mode. H-Set 3B and H-Set 3C for4C-HSDPA are formed by applying H-Set 3 to each of the carriers available in 4C-HSDPA mode (3 carriers for H-Set 3B and 4 carriers for H-Set 3C). H-Set 3E for 8C-HSDPA is formed by applying H-Set 3 to each of the carriers available in 8C-HSDPA mode.			

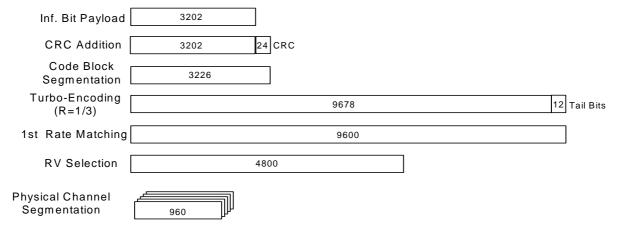


Figure A.16: Coding rate for Fixed reference Channel H-Set 3 (QPSK)

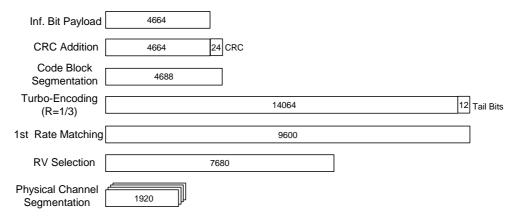


Figure A.17: Coding rate for Fixed reference Channel H-Set 3 (16QAM)

## A.7.1.4 Fixed Reference Channel Definition H-Set 4

Table A.28: Fixed Reference Channel H-Set 4

Parameter	Unit	Value	
Nominal Avg. Inf. Bit Rate	kbps	534	
Inter-TTI Distance	TTI"s	2	
Number of HARQ Processes	Processes	2	
Information Bit Payload ( $N_{{\it INF}}$ )	Bits	3202	
Number Code Blocks	Blocks	1	
Binary Channel Bits Per TTI	Bits	4800	
Total Available SML"s in UE	SML"s	14400	
Number of SML"s per HARQ Proc.	SML"s	7200	
Coding Rate		0.67	
Number of Physical Channel Codes	Codes	5	
Modulation		QPSK	
Note: This FRC is used to verify the minimum inter-TTI distance for UE category 11. The HS-PDSCH shall be transmitted continuously with constant power. The six sub-frame HS-SCCH signalling pattern shall repeat as follows: OOXOXOOOXOXO, where "X" marks TTI in which HS-SCCH uses the identity of the UE under test and "O" marks TTI, in which HS-SCCH uses a different identity.			

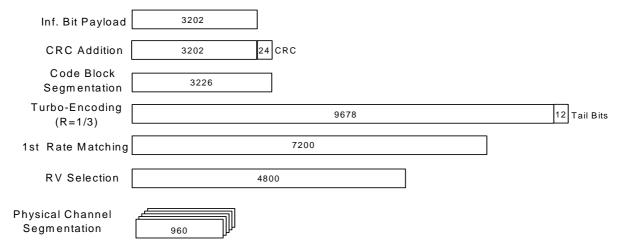


Figure A.18: Coding rate for Fixed Reference Channel H-Set 4

#### A.7.1.5 Fixed Reference Channel Definition H-Set 5

Table A.29: Fixed Reference Channel H-Set 5

	Parameter	Unit	Value
Nominal	Avg. Inf. Bit Rate	kbps	801
Inter-TT	I Distance	TTI"s	1
Number	of HARQ Processes	Processes	3
Informat	ion Bit Payload ( $N_{{\it INF}}$ )	Bits	3202
Number	Code Blocks	Blocks	1
Binary C	Channel Bits Per TTI	Bits	
Total Available SML"s in UE SML"s		SML"s	28800
Number	Number of SML"s per HARQ Proc. SML"s		9600
Coding I	ig Rate		0.67
Number	of Physical Channel Codes	Codes 5	
Modulati			QPSK
Note: This FRC is used to verify the minimum inter-TTI distance for UE category 12. The HS-PDSCH shall be transmitted continuously with constant power. The six sub-frame HS-SCCH signalling pattern shall repeat as			

follows: ...OOXXXOOOXXXO...,

where "X" marks TTI in which HS-SCCH uses the identity of the UE under test and "O" marks TTI, in which HS-SCCH uses a different identity.

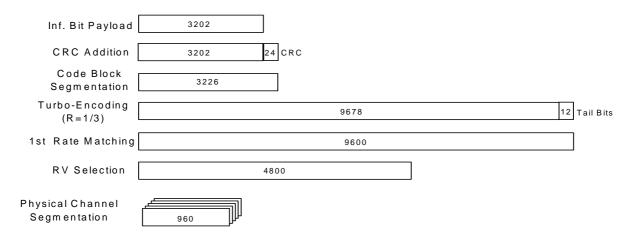


Figure A.19: Coding rate for Fixed Reference Channel H-Set 5

#### A.7.1.6 Fixed Reference Channel Definition H-Set 6/6A/6B/6C/6E

available in 8C-HSDPA mode.

Table A.29A: Fixed Reference Channel H-Set 6/6A/6B/6C/6E

Parameter	Unit	Va	lue	
Nominal Avg. Inf. Bit Rate	kbps	3219	4689	
Inter-TTI Distance	TTI"s	1	1	
Number of HARQ Processes	Proces	6	6	
	ses	O	O	
Information Bit Payload ( $N_{\mathit{INF}}$ )	Bits	6438	9377	
Number Code Blocks	Blocks	2	2	
Binary Channel Bits Per TTI	Bits	9600	15360	
Total Available SML"s in UE	SML"s	115200	115200	
Number of SML"s per HARQ Proc.	SML"s	19200	19200	
Coding Rate		0.67	0.61	
Number of Physical Channel Codes	Codes	10	8	
Modulation		QPSK	16QAM	
Note: The values in the table define H-Set 6. H-Set 6A for DC-HSDPA				
and DB-DC-HSDPA is formed by applying H-Set 6 to each of				
the carriers available in DC-HSDPA and DB-DC-HSDPA mode.				
H-Set 6B and H-Set 6C for 4C-HSDPA are formed by applying				

H-Set 6 to each of the carriers available in 4C-HSDPA mode (3 carriers for H-Set 6B and 4 carriers for H-Set 6C). H-Set 6E for 8C-HSDPA is formed by applying H-Set 6 to each of the carriers

Inf. Bit Payload 6438 **CRC** Addition 24 CRC 6438 Code Block 3231 Segmentation Turbo-Encoding 9693 12 Tail Bits (R=1/3)1st Rate Matching 9600 **RV Selection** 4800 Physical Channel Segmentation 960

Figure A.20: Coding rate for Fixed reference Channel H-Set 6 (QPSK)

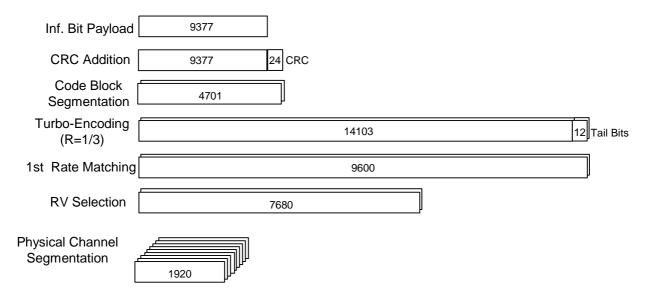


Figure A.21: Coding rate for Fixed reference Channel H-Set 6 (16 QAM)

#### A.7.1.7 Fixed Reference Channel Definition H-Set 7

Table A.29B: Fixed Reference Channel H-Set 7

Parameter	Unit	Value			
Nominal Avg. Inf. Bit Rate	kbps	37.8			
Inter-TTI Distance	TTI"s	8			
Information Bit Payload ( $N_{{\scriptscriptstyle I\!N\!F}}$ )	Bits	605			
Number Code Blocks	Blocks	1			
Binary Channel Bits Per TTI	Bits	960			
Coding Rate		0.66			
Number of Physical Channel Codes	Codes	1			
Modulation		QPSK			
Note: This FRC is used to verify CPC operation. The HS-DSCH shall					
be transmitted continuously with constant power but only every 8 <sup>th</sup> TTI shall be allocated to the UE under test.					

Inf. Bit Payload	605				
CRC Addition	605	24 CRC			
Code Block Segmentation	629				
Turbo-Encoding (R=1/3)		18	387	12 T	ail Bits
1st Rate Matching		1	899		
RV Selection [	9	60			
Physical Channel Segmentation	9	60			

Figure A.22: Coding rate for Fixed Reference Channel H-Set 7 (QPSK)

#### A.7.1.8 Fixed Reference Channel Definition H-Set 8/8A/8B/8C/8E

Table A.29C: Fixed Reference Channel H-Set 8/8A/8B/8C/8E

Parameter	Unit	Va	lue	
Nominal Avg. Inf. Bit Rate	kbps			
		132	252	
Inter-TTI Distance	TTI"s	,	1	
Number of HARQ Processes	Proces	6	3	
	ses			
Information Bit Payload ( $N_{\it INF}$ )	Bits	26	504	
Number Code Blocks	Blocks	(	3	
Binary Channel Bits Per TTI	Bits	432	200	
Total Available SML"s in UE	SML"s	259200	264000	
Number of SML"s per HARQ Proc.	SML"s	43200 44000		
Coding Rate		0.61	0.60	
Number of Physical Channel Codes	Codes	1	5	
Modulation		64QAM		
Note 1: The values in the table define H-Set 8. H-Set 8A for DC-HSDPA and DB-DC-HSDPA is formed by applying H-Set 8 to each of the carriers available in DC-HSDPA and DB-DC-HSDPA mode. H-Set 8B and H-Set 8C for 4C-HSDPA are formed by applying H-Set 8 to each of the carriers available in 4C-HSDPA mode (3 carriers for H-Set 8B and 4 carriers for H-Set 8C). H-Set 8E for 8C-HSDPA is formed by applying H-Set 8 to each of the carriers available in 8C-HSDPA mode.  Note 2: For H-Set 8, if 'Total number of soft channel bits' as per HS-DSCH categories is equal to 259200, set 'Number of SML"s per HARQ Proc.' as 43200 using an implicit UE IR Buffer Size				

Allocation.

For H-Set 8, if 'Total number of soft channel bits' is larger than or equal to 264000, set 'Number of SML"s per HARQ Proc.' as 44000 using an explicit UE IR Buffer Size Allocation.

For H-Set 8A/8B/8C/8E, set 'Number of SML"s per HARQ Proc.' Note 3: as 43200 using an implicit UE IR Buffer Size Allocation.

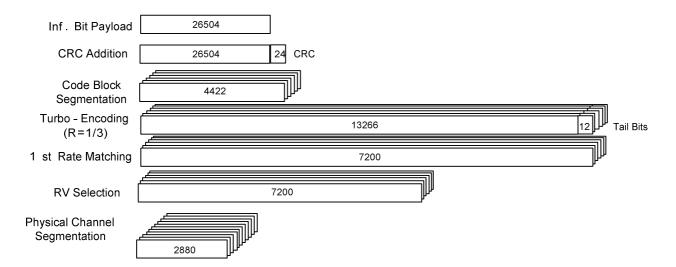


Figure A.23: Coding rate for Fixed reference Channel H-Set 8 (64 QAM)

#### A.7.1.9 Fixed Reference Channel Definition H-Set 9/9A/9B/9C/9E

Table A.29D: Fixed Reference Channel H-Set 9/9A/9B/9C/9E

Parameter	Unit	Value	
Transport block		Primary	Secondary
Combined Nominal Avg. Inf. Bit Rate		13652	
Nominal Avg. Inf. Bit Rate	kbps	8784	4868
Inter-TTI Distance	TTI"s	1	1
Number of HARQ Processes	Proces ses	6	6
Information Bit Payload ( $N_{\mathit{INF}}$ )	Bits	17568	9736
Number Code Blocks	Blocks	4	2
Binary Channel Bits Per TTI	Bits	28800	14400
Total available SML"s in UE	Bits	345600	
Number of SML"s per HARQ Proc.	SML"s	28800	28800
Coding Rate		0.61	0.68
Number of Physical Channel Codes	Codes	15	15
Modulation		16QAM	QPSK

Note: The values in the table define H-Set 9. H-Set 9A for DC-HSDPA and DB-DC-HSDPA is formed by applying H-Set 9 to each of the carriers available in DC-HSDPA and DB-DC-HSDPA mode. H-Set 9B and H-Set 9C for 4C-HSDPA are formed by applying H-Set 9 to each of the carriers available in 4C-HSDPA mode (3 carriers for H-Set 9B and 4 carriers for H-Set 9C). H-Set 9E for 8C-HSDPA is formed by applying H-Set 9 to each of the carriers available in 8C-HSDPA mode.

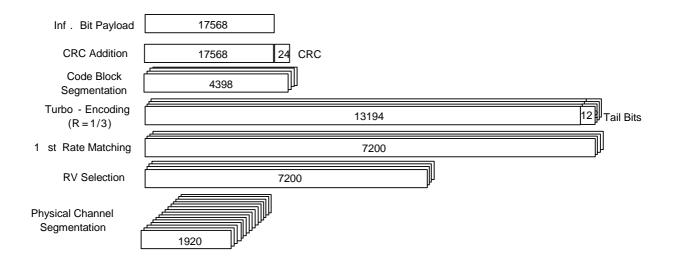


Figure A.24: Coding rate for Fixed Reference Channel H-Set 9 Primary Transport Block

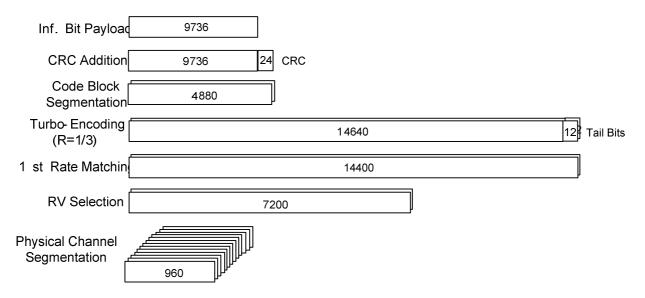


Figure A.25: Coding rate for Fixed Reference Channel H-Set 9 Secondary Transport Block

#### A.7.1.10 Fixed Reference Channel Definition H-Set 10/10A/10B/10C/10E

Table A.29E: Fixed Reference Channel H-Set 10/10A/10B/10C/10E

Parameter	Unit	٧	alue	
Nominal Avg. Inf. Bit Rate	Kbps	8774	4860	
Inter-TTI Distance	TTI"s	1	1	
Number of HARQ Processes	Proces	6	6	
	ses			
Information Bit Payload	Bits	17548	9719	
Number Code Blocks	Blocks	4	2	
Binary Channel Bits Per TTI	Bits	28800	14400	
Number of SML"s per HARQ Proc.	SML"s	28800	28800	
Coding Rate		0.6	0.67	
Number of Physical Channel Codes	Codes	15	15	
Modulation		16QAM	QPSK	
Note: The values in the table define H-S				
and DB-DC-HSDPA is formed by a	applying H	Set 10 to 6	each of the	
carriers available in DC-HSDPA at	nd DB-DC-	HSDPA m	ode. H-Set	
10B and H-Set 10C for 4C-HSDP				
10 to each of the carriers available in 4C-HSDPA mode (3 carriers				
for H-Set 10B and 4 carriers for H-Set 10C). H-Set 10E for 8C-				
HSDPA is formed by applying H-Set 10 to each of the carriers				
available in 8C-HSDPA mode.				

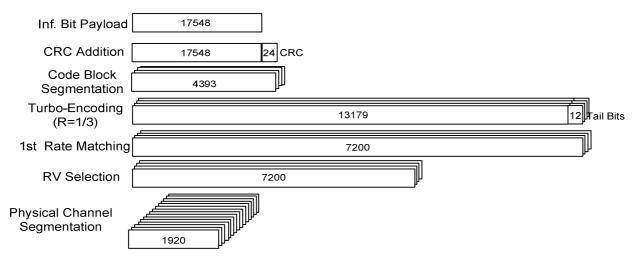


Figure A.24: Coding rate for Fixed Reference Channel H-Set 10 (16QAM)

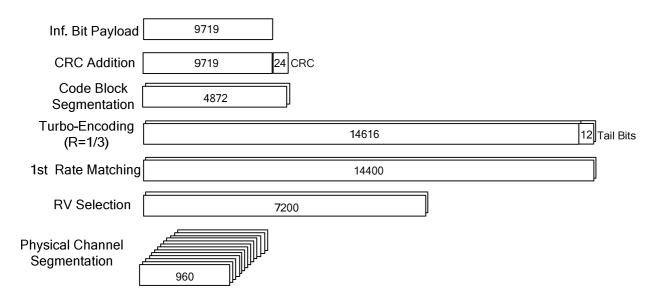


Figure A.25: Coding rate for Fixed Reference Channel H-Set 10 (QPSK)

#### A.7.1.11 Fixed Reference Channel Definition H-Set 11/11A/11B/11C/11E

Table A.29F: Fixed Reference Channel H-Set 11/11A/11B/11C/11E

Unit	Value	
	Primary	Secondary
	2:	2074
kbps	13300	8774
TTI"s	1	1
Proces	6	6
ses	U	O
Bits	26504	17568
Blocks	6	4
Bits	43200	28800
Bits	51	8400
SML"s	43200	43200
	0.61	0.6
Codes	15	15
	64QAM	16QAM
	kbps TTI"s Proces ses Bits Blocks Bits Bits SML"s	Primary   22

Note: The values in the table define H-Set 11. H-Set 11A for DC-HSDPA and DB-DC-HSDPA is formed by applying H-Set 11 to each of the carriers available in DC-HSDPA and DB-DC-HSDPA mode. H-Set 11B and H-Set 11C for 4C-HSDPA are formed by applying H-Set 11 and H-Set 11C to each of the carriers available in 4C-HSDPA mode (3 carriers for H-Set 11B and 4 carriers for H-Set 11C). H-Set 11E for 8C-HSDPA is formed by applying H-Set 11 to each of the carriers available in 8C-HSDPA mode.

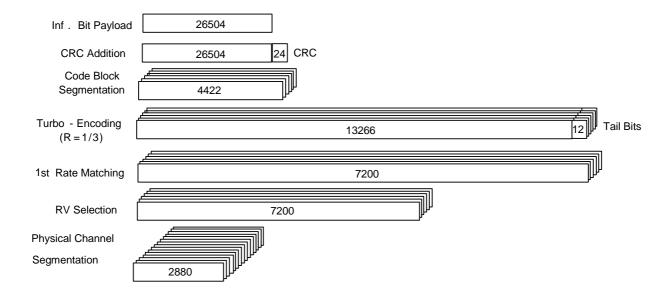


Figure A.26: Coding rate for Fixed Reference Channel H-Set 11 Primary Transport Block

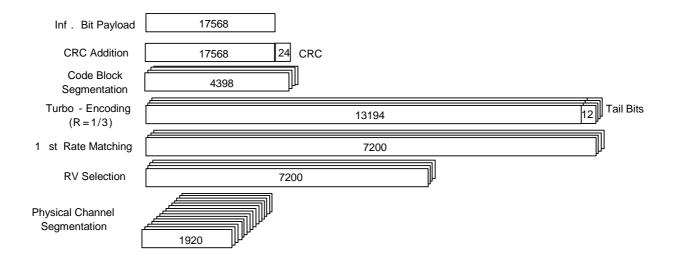


Figure A.27: Coding rate for Fixed Reference Channel H-Set 11 Secondary Transport Block

#### A.7.1.12 Fixed Reference Channel Definition H-Set 12

Table A.29G: Fixed Reference Channel H-Set 12

	Parameter	Unit	Value		
Nominal .	Avg. Inf. Bit Rate	kbps	60		
Inter-TTI	Distance	TTI"s	1		
Number of	of HARQ Processes	Proces	6		
		ses	O		
Information	on Bit Payload ( $N_{{\scriptscriptstyle INF}}$ )	Bits	120		
Number (	Code Blocks	Blocks	1		
Binary Cl	nannel Bits Per TTI	Bits	960		
Total Ava	ailable SML"s in UE	SML"s	19200		
Number of	of SML"s per HARQ Proc.	SML"s	3200		
Coding R	ate		0.15		
Number of	of Physical Channel Codes	Codes	1		
Modulation	Modulation QPSi				
Note 1:	The RMC is intended to be used for				
	mode and both cells shall transmit with identical				
	parameters as listed in the table.				
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.					

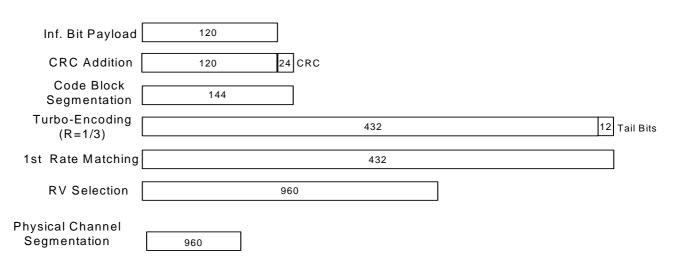


Figure A.28: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

# A.8 DL reference parameters for MBMS tests

#### A.8.1 MCCH

The parameters for the MCCH demodulation tests are specified in Table A.30 and Table A.31.

Table A.30: Physical channel parameters for S-CCPCH

Parameter	Unit	Level
Channel bit rate	kbps	30
Channel symbol rate	ksps	15
Slot Format #i	-	2
TFCI	-	ON
Power offsets of TFCI and Pilot fields relative to data field	dB	0

Table A.31: Transport channel parameters for S-CCPCH

Parameter	MCCH
User Data Rate	7.6 kbps
Transport Channel Number	1
Transport Block Size	72
Transport Block Set Size	72
RLC SDU block size	4088
Transmission Time Interval	10 ms
Repetition period	640 ms
Modification period	1280 ms
Type of Error Protection	Convolution Coding
Coding Rate	1/3
Rate Matching attribute	256
Size of CRC	16
Position of TrCH in radio frame	Flexible

#### A.8.1 MTCH

The parameters for the MTCH demodulation tests are specified in Table A.32 and Table A.33.

Table A.32: Physical channel parameters for S-CCPCH

Parameter	Unit	Level	Level	Level
User Data Rate	kpbs	512	256	128
Channel bit rate	kbps	1920	960	480
Channel symbol rate	ksps	480	480	240
Slot Format #i	-	23	14	12
TFCI	-	ON	ON	ON
Power offsets of TFCI and Pilot fields relative to data field	dB	0	0	0

Table A.33: Transport channel parameters for S-CCPCH

Parameter	MTCH				
User Data Rate	512 kbps MBSFN	256 kbps	128 kbps 40 ms TTI	128 kbps, 80 ms TTI	
Transport Channel Number	1	1	1	1	
Transport Block Size	2560	2536	2536	2536	
Transport Block Set Size	20480	10144	5072	10144	
Nr of transport blocks/TTI	8	4	2	4	
RLC SDU block size	20336	10080	5024	10080	
Transmission Time Interval	40 ms	40 ms	40 ms	80 ms	
Minimum inter-TTI interval	1	1	1	1	
Type of Error Protection	Turbo	Turbo	Turbo	Turbo	
Rate Matching attribute	256	256	256	256	
Size of CRC	16	16	16	16	
Position of TrCH in radio frame	Flexible	Flexible	Flexible	Flexible	

# A.9 DL reference parameters for combined MTCH demodulation and cell identification

Parameters for combined MTCH demodulation and cell identification requirements are defined in Table A.34.

**Table A.34: Cell reselection parameters** 

Parameter	Unit	Value
Serving cell in the initial condition		Cell1
Neighbour cells		32 intra-frequency neighbour cells are indicated including Cell2 and Cell3
Cell_selection_and_ reselection_quality_ measure		CPICH E₀/N₀
Qqualmin	dB	-20
Qrxlevmin	dBm	-115
UE_TXPWR_MAX_ RACH	dB	21
Qhyst2	dB	20 dB
Treselection	seconds	4
Sintrasearch	dB	not sent
IE 'FACH Measurement		not sent
occasion info'		not som

# Annex B (normative): Propagation conditions

# B.1 (void)

# **B.2** Propagation Conditions

## B.2.1 Static propagation condition

The propagation for the static performance measurement is an Additive White Gaussian Noise (AWGN) environment. No fading and multi-paths exist for this propagation model.

## B.2.2 Multi-path fading propagation conditions

Table B1 shows propagation conditions that are used for the performance measurements in multi-path fading environment. All taps have classical Doppler spectrum.

Table B.1: Propagation Conditions for Multi path Fading Environments (Cases 1 to 6)

Cas	se 1	Cas	se 2	Cas	se 3	Cas	se 4	Case 5	(Note 1)	Cas	se 6
Speed for	r Band I,	Speed for	r Band I,	Speed for Band I,		Speed for	or Band I,	Speed for	or Band I,	Speed for	r Band I,
II, III, IV,	IX, X and	II, III, IV,	IX, X and	II, III, IV, IX, X and		II, III, IV, IX, X and II, III, IV, IX, X ar		IX, X and	II, III, IV,	IX, X and	
XX	(V:	XX	(V:	XXV:		XXV:		XXV:		XX	ίV:
3 k	m/h	3 kı	m/h	120 km/h		3 km/h 50 km/h		(m/h	250	km/h	
Speed fo	r Band V,	Speed for Band V,		Speed fo	r Band V,	Speed for Band V,		Speed for Band V,		Speed fo	r Band V,
VI, VIII,	XIX, XX	VI, VIII,	XIX, XX	VI, VIII,	XIX, XX	VI, VIII,	XIX, XX	VI, VIII,	XIX, XX	VI, VIII,	XIX, XX
and 2	XXVI:	and )	XXVI:	and 2	XXVI:	and 2	XXVI:	and 2	XXVI:	and )	⟨XVI:
7 k	m/h	7 kı	m/h	282	km/h	7 k	m/h	118	km/h	583	km/h
				(Not	te 2)					(Not	e 2)
Speed for	Band VII:	Speed for	Band VII:	Speed for	Band VII:	Speed for	Band VII:	Speed for	Band VII:	Speed for	Band VII:
2.3 l	km/h	2.3	km/h	92 k	m/h	2.3	km/h	38 k	m/h	192	km/h
Speed for	Band XI,	Speed for	Band XI,	, Speed for Band XI,		Speed for Band XI, Speed for Band		r Band XI,	Speed for	Band XI,	
XX	XI:	XXI: XXI:		XI:	XXI: XXI:		XX	<i:< td=""></i:<>			
4.1 km/h 4.1 km/h		166	km/h	4.1	km/h	69 k	(m/h	345	km/h		
										(Not	e 2)
Speed for	Band XII,	Speed for	Band XII,	Speed for	Band XII,	Speed for	Band XII,	Speed for	Band XII,	Speed for	Band XII,
XIII,	XIV	XIII,	XIV	XIII,	XIV	XIII,	XIV	XIII,	XIV	XIII,	XIV
8 k	8 km/h 8 km/h		320	km/h	8 k	m/h	133	km/h	668	km/h	
Speed f	Speed for Band Speed for Band Speed for Band		or Band	Speed f	or Band	Speed f	or Band	Speed f	or Band		
XX	(II:	XX	(II:	XX	(II:	XΣ	(II:	XΣ	(II:	XX	(II:
1.7	km/h	1.7 k	km/h	69 k	m/h	1.7	km/h	29 k	m/h	143	km/h
Relative	Relative	Relative	Relative	Relative	Relative	Relative	Relative	Relative	Relative	Relative	Relative
Delay	mean	Delay	mean	Delay	mean	Delay	mean	Delay	mean	Delay	mean
[ns]	Power	[ns]	Power	[ns]	Power	[ns]	Power	[ns]	Power	[ns]	Power
	[dB]		[dB]		[dB]		[dB]		[dB]		[dB]
0	0	0	0	0	0	0	0	0	0	0	0
976	-10	976	0	260	-3	976	0	976	-10	260	-3
		20000	0	521	-6					521	-6
				781	-9					781	-9

NOTE 1: Case 5 is only used in TS25.133.

NOTE 2: Speed above 250km/h is applicable to demodulation performance requirements only.

#### Table B.1A (void)

Table B.1B shows propagation conditions that are used for HSDPA performance measurements in multi-path fading environment. For HSDPA and DCH enhanced performance requirements, the fading of the signals and the AWGN signals provided in each receiver antenna port shall be independent. For DC-HSDPA requirements, the fading of the signals for each cell shall be independent.

Table B.1B: Propagation Conditions for Multi-Path Fading Environments for HSDPA Performance Requirements

Spee	destrian A ed 3km/h PA3)	ITU Pedestrian B Speed 3km/h (PB3)		ITU vehicular A Speed 30km/h (VA30)		ITU vehicular A Speed 120km/h (VA120)		
Speed for B	Band I, II, III, IV,	Speed for Band I, II, III, IV,		Speed for Bar	Speed for Band I, II, III, IV, IX,		Speed for Band I, II, III, IV,	
IX, X	and XXV	IX, X	and XXV	X ar	id XXV	,	and XXV	
	km/h	•	km/h	30 km/h		120 km/h		
•	Band V, VI, VIII,	•	Band V, VI, VIII,		and V, VI, VIII,		Band V, VI, VIII,	
· · · · · · · · · · · · · · · · · · ·	( and XXVI	,	X and XXVI	,	and XXVI		X and XXVI	
	km/h		′ km/h	71	km/h		n/h (Note 1)	
	or Band VII		for Band VII	- 1	or Band VII		for Band VII	
	3 km/h		3 km/h	_	km/h		2 km/h	
	Band XI, XXI:		Band XI, XXI:		Band XI, XXI:	Speed for Band XI, XXI:		
	l km/h		1 km/h	41 km/h		166 km/h (Note 1)		
	Band XII, XIII,	Speed for Band XII, XIII,		Speed for Band XII, XIII, XIV		Speed for Band XII, XIII,		
XIV XIV			80 km/h		XIV			
	km/h						0 km/h	
	r Band XXII:				Band XXII:		or Band XXII:	
	7 km/h		7 km/h	17 km/h			9 km/h	
Relative	Relative	Relative	Relative Mean	Relative	Relative	Relative	Relative	
Delay	Mean Power	Delay	Power	Delay	Mean Power	Delay	Mean Power	
[ns]	[dB]	[ns]	[dB]	[ns]	[dB]	[ns]	[dB]	
0	0	0	0	0	0	0	0	
110	-9.7	200	-0.9	310	-1.0	310	-1.0	
190	-19.2	800	-4.9	710	-9.0	710	-9.0	
410	-22.8	1200	-8.0	1090	-10.0	1090	-10.0	
		2300	-7.8	1730	-15.0	1730	-15.0	
		3700	-23.9	2510	-20.0	2510	-20.0	

NOTE 1: Speed above 120km/h is applicable to demodulation performance requirements only.

Table B.1C shows propagation conditions that are used for CQI test in multi-path fading and HS-SCCH-less demodulation of HS-DSCH. For HSDPA enhanced performance requirements, the fading of the signals and the AWGN signals provided in each receiver antenna port shall be independent. For DC-HSDPA requirements, the fading of the signals for each cell shall be independent.

Table B.1C: Propagation Conditions for CQI test in multi-path fading and HS-SCCH-less demodulation of HS-DSCH

Coco 9			
	Case 8,		
Speed for Band I, II, III, IV	/, IX, X and XXV: 30km/h		
Speed for Band V, VI, VIII,	XIX, XX and XXVI: 71km/h		
Speed for Bar	nd VII: 23km/h		
Speed for Band XI, XXI: 41km/h			
Speed for Band XII, XIII, XIV: 80 km/h			
Speed for Band XXII: 17 km/h			
Relative Delay [ns]	Relative mean Power [dB]		
0	0		
976	-10		

Table B.1D shows propagation conditions that are used for MBMS demodulation performance measurements in multipath fading environment.

Table B.1D: Propagation Conditions for Multi-Path Fading Environments for MBMS Performance Requirements

Speed 3km/h		
Speed 3km/h		
(VA 3)		
Speed for Band I, II, III, IV	,	
IX, X and XXV		
3 km/h		
Speed for Band V, VI, VIII	,	
XIX, XX and XXVI:		
7 km/h		
Speed for Band VII:		
2.3 km/h		
Speed for Band XI, XXI:		
4.1 km/h		
Speed for Band XII, XIII,		
XIV:		
8 km/h		
Speed for Band XXII:		
1.7 km/h		
Relative Relative		
Delay Mean Power		
[ns] [dB]		
0 0		
310 -1.0		
710 -9.0		
1090 -10.0		
1730 -15.0		
2510 -20.0		

Table B.1E shows propagation conditions that are used for MBSFN demodulation performance measurements in multipath fading environment. All taps have classical Doppler spectrum.

The fading of the signals and the AWGN signals provided in each receiver antenna port shall be independent.

Table B.1E: Propagation Conditions for Multi-Path Fading Environments for MBSFN Demodulation Performance Requirements

MBSFN channel model				
Speed for Band I, II, III, IV, IX, X and XXV				
3 km/h Speed for Band V, VI, VIII, XIX, XX and XXVI:				
Speed for Band V, VI, VIII, XIX, XX and XXVI:  7 km/h				
	or Band VII:			
	3 km/h			
	Band XI, XXI: km/h			
	d XII, XIII and XIV			
8	km/h			
	r Band XXII:			
	/ km/h			
Relative Delay [ns]	Relative Mean Power [dB]			
0	0			
310	-1			
710	-9			
1090	-10			
1730	-15			
2510	-20			
12490	-10			
12800	-11			
13200	-19			
13580	-20			
14220	-25			
15000	-30			
27490	-20			
27800	-21			
28200	-29			
28580	-30			
29220	-35			
30000	-40			

# B.2.3 Moving propagation conditions

The dynamic propagation conditions for the test of the baseband performance are non fading channel models with two taps. The moving propagation condition has two tap, one static, Path0, and one moving, Path1. The time difference between the two paths is according Equation (B.1). The taps have equal strengths and equal phases.

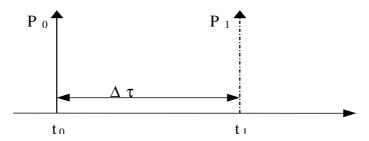


Figure B.1: The moving propagation conditions

$$\Delta \tau = B + \frac{A}{2} \left( 1 + \sin(\Delta \omega \cdot t) \right)$$
 (B.1)

The parameters in the equation are shown in the following table.

Table B.2

Parameter	Value
Α	5 μs
В	1 μs
Δω	40*10 <sup>-3</sup> s <sup>-1</sup>

### B.2.4 Birth-Death propagation conditions

The dynamic propagation conditions for the test of the base band performance is a non fading propagation channel with two taps. The moving propagation condition has two taps, Path1 and Path2 which alternate between "birth" and "death". The positions the paths appear are randomly selected with an equal probability rate and is shown in Figure B.2.

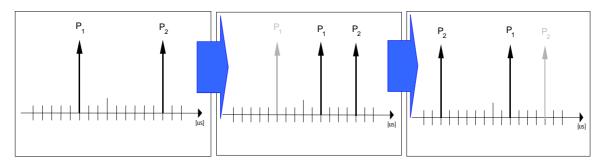


Figure B.2: Birth death propagation sequence

- 1. Two paths, Path1 and Path2 are randomly selected from the group[-5,-4,-3,-2,-1,0,1,2,3,4,5]  $\mu$ s. The paths have equal magnitudes and equal phases.
- 2. After 191 ms, Path1 vanishes and reappears immediately at a new location randomly selected from the group [-5,-4,-3,-2,-1,0,1,2,3,4,5] µs but excludes the point Path 2. The magnitudes and the phases of the tap coefficients of Path 1 and Path 2 shall remain unaltered.
- 3. After an additional 191 ms, Path2 vanishes and reappears immediately at a new location randomly selected from the group [-5,-4,-3,-2,-1,0,1,2,3,4,5] µs but excludes the point Path 1. The magnitudes and the phases of the tap coefficients of Path 1 and Path 2 shall remain unaltered.

The sequence in 2) and 3) is repeated.

## B.2.5 High speed train condition

The high speed train condition for the test of the baseband performance is a non fading propagation channel with one tap. Doppler shift is given by

$$f_s(t) = f_d \cos \theta(t) \tag{B.2}$$

where  $f_s(t)$  is the Doppler shift and  $f_d$  is the maximum Doppler frequency. The cosine of angle  $\theta(t)$  is given by

$$\cos\theta(t) = \frac{D_s/2 - vt}{\sqrt{D_{\min}^2 + (D_s/2 - vt)^2}}, \ 0 \le t \le D_s/v$$
(B.3)

$$\cos \theta(t) = \frac{-1.5D_s + vt}{\sqrt{D_{\min}^2 + (-1.5D_s + vt)^2}}, \ D_s/v < t \le 2D_s/v$$
(B.4)

$$\cos\theta(t) = \cos\theta(t \mod (2D_s/v)), \ t > 2D_s/v \tag{B.5}$$

where  $D_s/2$  is the initial distance of the train from BS, and  $D_{\min}$  is BS-Railway track distance, both in meters; v is the velocity of the train in m/s, t is time in seconds.

Doppler shift and cosine angle is given by equation B.2 and B.3-B.5 respectively, where the required input parameters listed in table B.3 and the resulting Doppler shift shown in Figure B.3 are applied for all frequency bands.

Table B.3

Parameter	Value
$D_s$	300 m
$D_{ m min}$	2 m
ν	300 km/h
$f_d$	600 Hz

NOTE1: Parameters for HST conditions in table B.3 including  $f_d$  and Doppler shift trajectories presented on figure B.3 were derived for Band1.

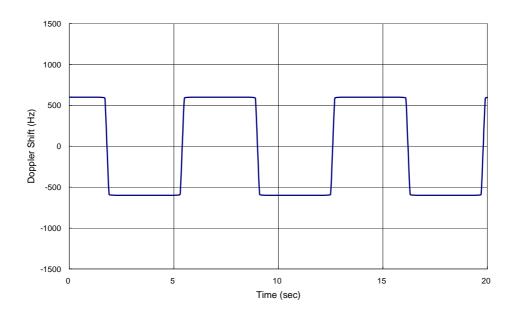


Figure B.3: Doppler shift trajectory

## B.2.6 MIMO propagation conditions

MIMO propagation conditions are defined for a 2x2 antenna configuration. The resulting propagation channel shall be characterized by a complex 2x2 matrix termed

$$\mathbf{H} = \begin{pmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{pmatrix}.$$

The channel coefficients of **H** shall be defined as a function of the possible precoding vectors or matrices. The possible precoding vectors for MIMO operation according to [8] shall be termed

$$\mathbf{w}^{(1)} = \begin{pmatrix} \frac{1}{\sqrt{2}} \\ \frac{1+j}{2} \end{pmatrix}, \quad \mathbf{w}^{(2)} = \begin{pmatrix} \frac{1}{\sqrt{2}} \\ \frac{1-j}{2} \end{pmatrix}, \quad \mathbf{w}^{(3)} = \begin{pmatrix} \frac{1}{\sqrt{2}} \\ \frac{-1+j}{2} \end{pmatrix}, \quad \mathbf{w}^{(4)} = \begin{pmatrix} \frac{1}{\sqrt{2}} \\ \frac{-1-j}{2} \end{pmatrix}$$
 (EQ.B.2.6.1)

In what follows. Furthermore the following possible precoding matrices shall be defined:

$$\mathbf{W}^{(1)} = \begin{pmatrix} \mathbf{w}^{(1)} & \mathbf{w}^{(4)} \end{pmatrix}, \quad \mathbf{W}^{(2)} = \begin{pmatrix} \mathbf{w}^{(2)} & \mathbf{w}^{(3)} \end{pmatrix}, \quad \mathbf{W}^{(3)} = \begin{pmatrix} \mathbf{w}^{(3)} & \mathbf{w}^{(2)} \end{pmatrix}, \quad \mathbf{W}^{(4)} = \begin{pmatrix} \mathbf{w}^{(4)} & \mathbf{w}^{(1)} \end{pmatrix}$$
(EQ.B.2.6.2)

#### B.2.6.1 MIMO Single Stream Fading Conditions

For MIMO single stream conditions, the resulting propagation channel shall be generated using two independent fading processes with classical Doppler and one randomly picked but fixed precoding vector **w** out of the set defined in equation EQ.B.2.6.1. The two fading processes shall be generated according to the parameters in Table B.4

Table B.4

MIMO Single Stream Conditions,					
Speed for	Speed for Band I, II, III, IV, IX, X and XXV: 3km/h				
Speed for Ba	and V, VI, VIII, XIX, XX a	and XXVI: 7.1km/h			
·	Speed for Band VII: 2.3	ßkm/h			
S	peed for Band XI, XXI: 4	1.1km/h			
Speed	Speed for Band XII, XIII and XIV: 8 km/h				
	Speed for Band XXII: 1.7 km/h				
Relative Delay	(Amplitude, phase)				
[ns]	Power [dB]	symbols			
0	0	$(a_1, \varphi_1)$			
0	0	$(a_2^{}, \varphi_2^{})$			

NOTE: The amplitude  $a_2$  is not used in tests under MIMO single stream conditions, only the phase  $\varphi_2$  will be used.

The channel coefficients of the resulting propagation channel under MIMO single stream condiitons shall be given by

$$\mathbf{H} = \begin{pmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{pmatrix} = a_1 \cdot \begin{pmatrix} \exp(\mathbf{j} \cdot \boldsymbol{\varphi}_1) \\ \exp(-\mathbf{j} \cdot \boldsymbol{\varphi}_2) \end{pmatrix} \cdot \mathbf{w}^{\mathrm{H}}$$

The generation of the resulting channel coefficients for MIMO single stream conditions and the association with the transmitter and receiver ports are depicted Figure B.4. Figure B.4 does not restrict test system implementation.

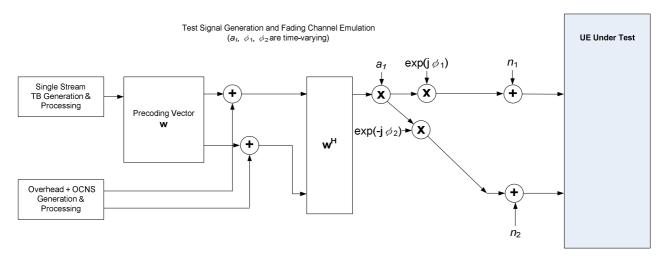


Figure B.4: Test setup under MIMO Single Stream Fading Conditions

#### B.2.6.2 MIMO Dual Stream Fading Conditions

For MIMO dual stream conditions, the resulting propagation channel shall be generated using two independent fading processes with classical Doppler and one randomly picked but fixed precoding matrix  $\mathbf{W}$  out of the set defined in equation EQ.B.2.6.2. The two fading processes shall be generated according to the parameters in Table B.5

Table B.5

MIMO Dual Stream Conditions,					
Speed for	Speed for Band I, II, III, IV, IX, X and XXV: 3km/h				
	and V, VI, VIII, XIX, XX a				
	Speed for Band VII: 2.3	km/h			
S	peed for Band XI, XXI: 4				
Speed	Speed for Band XII, XIII and XIV: 8 km/h				
	Speed for Band XXII: 1.7 km/h				
Relative Delay Relative Mean (Amplitude, phase					
[ns] Power [dB] symbols					
$0$ $0$ $(a_1, \varphi_1)$					
0 -3 $(a_2, \varphi_2)$					

The channel coefficients of the resulting propagation channnel under MIMO dual stream condiitons shall be given by

$$\mathbf{H} = \begin{pmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{pmatrix} = \sqrt{\frac{2}{3}} \begin{pmatrix} \exp(\mathbf{j} \cdot \boldsymbol{\varphi}_1) & \exp(\mathbf{j} \cdot \boldsymbol{\varphi}_2) \\ \exp(-\mathbf{j} \cdot \boldsymbol{\varphi}_2) & -\exp(-\mathbf{j} \cdot \boldsymbol{\varphi}_1) \end{pmatrix} \cdot \begin{pmatrix} a_1 & 0 \\ 0 & a_2 \end{pmatrix} \cdot \mathbf{W}^{\mathrm{H}}$$

The generation of the resulting channel coefficients for MIMO dual stream conditions and the association with the transmitter and receiver ports are depicted Figure B.5. Figure B.5 does not restrict test system implementation.

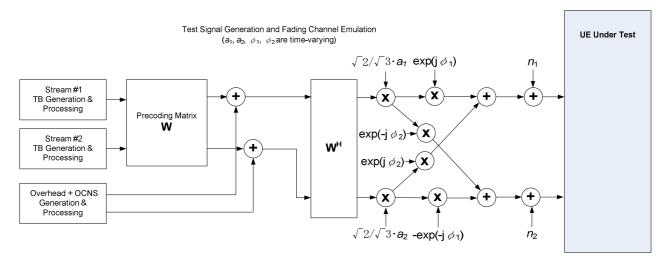


Figure B.5: Test setup under MIMO Dual Stream Fading Conditions

#### B.2.6.3 MIMO Dual Stream Static Orthogonal Conditions

The channel coefficients of the resulting propagation channnel under MIMO dual stream condiitons shall be given by

$$\mathbf{H} = \begin{pmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{pmatrix} = \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$$

The generation of the resulting channel coefficients for MIMO dual stream conditions and the association with the transmitter and receiver ports are depicted Figure B.6. Figure B.6 does not restrict test system implementation.

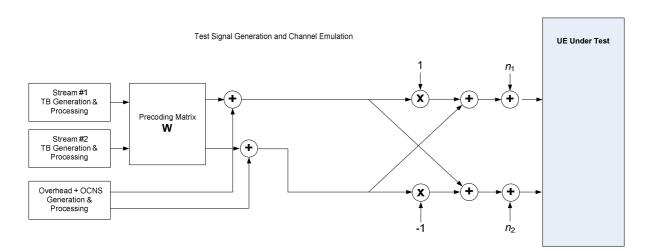


Figure B.6: Test setup under MIMO Dual Stream Static Orthogonal Conditions

# Annex C (normative): Downlink Physical Channels

#### C.1 General

This annex specifies the downlink physical channels that are needed for setting a connection and channels that are needed during a connection.

# C.2 Connection Set-up

Table C.1 describes the downlink Physical Channels that are required for connection set up.

Table C.1: Downlink Physical Channels required for connection set-up

Physical Channel
P-CPICH
P-CCPCH
SCH
S-CCPCH
PICH
AICH
DPCH

# C.3 During connection

The following clauses, describes the downlink Physical Channels that are transmitted during a connection i.e., when measurements are done. For these measurements the offset between DPCH and SCH shall be zero chips at Node B meaning that SCH is overlapping with the first symbols in DPCH in the beginning of DPCH slot structure.

#### C.3.1 Measurement of Rx Characteristics

Table C.2 is applicable for measurements on the Receiver Characteristics (clause 7) with the exception of subclause 7.4 (Maximum input level).

Table C.2: Downlink Physical Channels transmitted during a connection

Physical Channel	Power ratio
P-CPICH	P-CPICH_Ec / DPCH_Ec = 7 dB
P-CCPCH	P-CCPCH_Ec / DPCH_Ec = 5 dB
SCH	SCH_Ec / DPCH_Ec = 5 dB
PICH	PICH_Ec / DPCH_Ec = 2 dB
DPCH	Test dependent power

## C.3.2 Measurement of Performance requirements

Table C.3 is applicable for measurements on the Performance requirements (clause 8), including subclause 7.4 (Maximum input level) and subclause 6.4.4 (Out-of-synchronization handling of output power).

Table C.3: Downlink Physical Channels transmitted during a connection<sup>1</sup>

Physical Channel	Power ratio	NOTE
P-CPICH	P-CPICH_Ec/lor = -10 dB	Use of P-CPICH or S-CPICH as phase reference is specified for each requirement and is also set by higher layer signalling.
S-CPICH	S-CPICH_Ec/lor = -10 dB	When S-CPICH is the phase reference in a test condition, the phase of S-CPICH shall be 180 degrees offset from the phase of P-CPICH. When S-CPICH is not the phase reference, it is not transmitted.
P-CCPCH	P-CCPCH_Ec/lor = -12 dB	When BCH performance is tested the P- CCPCH_Ec/lor is test dependent
SCH	SCH_Ec/lor = -12 dB	This power shall be divided equally between Primary and Secondary Synchronous channels
PICH	PICH_Ec/lor = -15 dB	
DPCH	Test dependent power	When S-CPICH is the phase reference in a test condition, the phase of DPCH shall be 180 degrees offset from the phase of P-CPICH.  When BCH performance is tested the DPCH is not transmitted.
OCNS	Necessary power so that total transmit power spectral density of Node B (lor) adds to one <sup>1</sup>	OCNS interference consists of 16 dedicated data channels as specified in table C.6.

NOTE 1 For dynamic power correction required to compensate for the presence of transient channels, e.g. control channels, a subset of the DPCH channels may be used.

## C.3.3 Connection with open-loop transmit diversity mode

Table C.4 is applicable for measurements for subclause 8.6.1 (Demodulation of DCH in open loop transmit diversity mode).

Table C.4: Downlink Physical Channels transmitted during a connection<sup>1</sup>

Physical Channel	Power ratio	NOTE
P-CPICH (antenna 1)	P-CPICH_Ec1/lor = -13 dB	1. Total P-CPICH_Ec/lor = -10 dB
P-CPICH (antenna 2)	P-CPICH_Ec2/lor = -13 dB	
P-CCPCH (antenna 1)	P-CCPCH_Ec1/lor = -15 dB	STTD applied
P-CCPCH (antenna 2)	P-CCPCH_Ec2/lor = -15 dB	2. Total P-CCPCH_Ec/lor = -12 dB
SCH (antenna 1 / 2)	SCH_Ec/lor = -12 dB	<ol> <li>TSTD applied.</li> <li>This power shall be divided equally between Primary and Secondary Synchronous channels</li> <li>When BCH performance is tested the P-CCPCH_Ec/lor is test dependent</li> </ol>
PICH (antenna 1)	PICH_Ec1/lor = -18 dB	STTD applied
PICH (antenna 2)	PICH_Ec2/lor = -18 dB	2. Total PICH_Ec/lor = -15 dB
DPCH	Test dependent power	STTD applied     Total power from both antennas
OCNS	Necessary power so that total transmit power spectral density of Node B (lor) adds to one <sup>1</sup>	<ol> <li>This power shall be divided equally between antennas</li> <li>OCNS interference consists of 16 dedicated data channels as specified in Table C.6.</li> </ol>

Note 1: For dynamic power correction required to compensate for the presence of transient channels, e.g. control channels, a subset of the DPCH channels may be used.

## C.3.4 Connection with closed loop transmit diversity mode

Table C.5 is applicable for measurements for subclause 8.6.2 (Demodulation of DCH in closed loop transmit diversity mode).

Table C.5: Downlink Physical Channels transmitted during a connection<sup>1</sup>

Physical Channel	Power ratio	NOTE			
P-CPICH (antenna 1)	P-CPICH_Ec1/lor = -13 dB	1. Total P-CPICH Ec/lor = -10 dB			
P-CPICH (antenna 2)	P-CPICH_Ec2/lor = -13 dB	1: Total 1 -CI TCT1_EC/TOI = -10 dB			
P-CCPCH (antenna 1)	P-CCPCH_Ec1/lor = -15 dB	STTD applied			
P-CCPCH (antenna 2)	P-CCPCH_Ec2/lor = -15 dB	<ol> <li>STTD applied,</li> <li>total P-CCPCH_Ec/lor = -12 dB</li> </ol>			
SCH (antenna 1 / 2)	SCH_Ec/lor = -12 dB	TSTD applied			
PICH (antenna 1)	PICH_Ec1/lor = -18 dB	STTD applied			
PICH (antenna 2)	PICH_Ec2/lor = -18 dB	2. STTD applied, total PICH_Ec/lor = -15 dB			
DPCH	Test dependent power	Total power from both antennas			
OCNS	Necessary power so that total transmit power spectral density of Node B (lor) adds to one (Notes 1 & 2)  1. This power shall be divided equally between antennas 2. OCNS interference consists o dedicated data channels. As specified in Table C.6.				
Note 1: For dynamic power correction required to compensate for the presence of transient channels, e.g. control channels, a subset of the DPCH channels may be used.  Note 2: For the case of DPCH with transmit diversity, the OCNS power calculation shall be based on the addition of the power from Antenna 1 and Antenna 2, i.e. disregarding any phase relationship between the antennas.					

Table C.6: DPCH Channelization Code and relative level settings for OCNS signal

Channelization Code at SF=128	Relative Level setting (dB) (Note 1)	DPCH Data (see NOTE 3)				
2	-1	The DPCH data for each channelization code				
11	-3	shall be uncorrelated with each other and with				
17	-3	any wanted signal over the period of any				
23	-5	measurement. For OCNS with transmit				
31	-2	diversity the DPCH data sent to each antenna				
38	-4	shall be either STTD encoded or generated				
47	-8	from uncorrelated sources.				
55	-7					
62	-4					
69	-6					
78	-5					
85	-9					
94	-10					
125	-8					
113	-6					
119	0					
OCNS char signal is a f	OCNS channels. The level of the OCNS channels relative to the lor of the complete signal is a function of the power of the other channels in the signal with the intention that the power of the group of OCNS channels is used to make the total signal add up					
	DPCH Channelization Codes and relative level settings are chosen to simulate a					
Note 3: For MBSFN	I, the group of OCNS chann	ealistic Peak to Average Ratio. , the group of OCNS channels represent orthogonal S-CCPCH channels PCH. Transmit diversity is not applicable to MBSFN which excludes STTD.				

# C.3.5 (void)

Table C.6A: (void)

# C.4 W-CDMA Modulated Interferer

Table C.7 describes the downlink Channels that are transmitted as part of the W-CDMA modulated interferer.

Table C.7: Spreading Code, Timing offsets and relative level settings for W-CDMA Modulated Interferer signal channels

Channel Type	Spreading Factor	Channelization Code	Timing offset (x256T <sub>chip</sub> )	Power	NOTE
P-CCPCH	256	1	0	P-CCPCH_Ec/lor = -10 dB	
SCH	256	-	0	SCH_Ec/lor = -10 dB	The SCH power shall be divided equally between Primary and Secondary Synchronous channels
P-CPICH	256	0	0	P-CPICH_Ec/lor = -10 dB	
PICH	256	16	16	PICH_Ec/lor = -15 dB	
OCNS		See table C.6		Necessary power so that total transmit power spectral density of Node B (lor) adds to one	OCNS interference consists of the dedicated data channels. As specified in Table C.6.

# C.5 HSDPA DL Physical channels

# C.5.1 Downlink Physical Channels connection set-up

Table C.8 is applicable for the measurements for tests in subclause 7.4.2, 9.2.1 and 9.3. Table C.9 is applicable for the measurements for tests in subclause 9.2.2 and 9.2.4. Table C.10 is applicable for the measurements for tests in subclause 9.4.1. Table C.12 is applicable for the measurements in subclause 9.4.2. Table C.12A and C.12B are applicable to requirements in subclause 9.6.

Table C.8: Downlink physical channels for HSDPA/DC-HSDPA/DB-DC-HSDPA/4C-HSDPA receiver testing for Single Link performance.

Physical Channel	Parameter	Value	Note
P-CPICH	P-CPICH_Ec/lor	-10dB	
P-CCPCH	P-CCPCH_Ec/lor	-12dB	Mean power level is shared with SCH.
SCH	SCH_Ec/lor	-12dB	Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both. P-SCH code is S_dl,0 as per TS25.213 S-SCH pattern is scrambling code group 0
PICH	PICH_Ec/lor	-15dB	
DPCH	DPCH_Ec/lor	Test-specific only for serving HS-DSCH cell, omitted otherwise	12.2 kbps DL reference measurement channel as defined in Annex A.3.1
HS-SCCH-1	HS-SCCH_Ec/lor	Test-specific	Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	As HS-SCCH-2.
HS-SCCH-4	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present in HSDPA configuration.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	
OCNS		Necessary power so that total transmit power spectral density of Node B (lor) adds to one	OCNS interference consists of a number of dedicated data channels as specified in table C.13 and C. 13A. Table C.13 specifies the OCNS setup for H-Set 1 to H-Set 6. Table C.13A specifies the OCNS setup for H-Set 8 and H-set 10.

Table C.9: Downlink physical channels for HSDPA/DC-HSDPA/DB-DC-HSDPA/4C-HSDPA receiver testing for Open Loop Transmit Diversity and MIMO performance.

Physical Channel	Parameter	Value	Note
P-CPICH (antenna 1)	P-CPICH_Ec1/lor	-13dB	1. Total P-CPICH_Ec/lor = -10dB
P-CPICH (antenna 2)	P-CPICH_Ec2/lor	-13dB	
P-CCPCH (antenna 1)	P-CCPCH_Ec1/lor	-15dB	1. STTD applied.
P-CCPCH (antenna 2)	P-CCPCH_Ec2/lor	-15dB	2. Total P-CCPCH Ec/lor is -12dB.
SCH (antenna ½)	SCH_Ec/lor	-12dB	TSTD applied.     Power divided equally between primary and secondary SCH.
PICH (antenna 1)	PICH_Ec1/lor	-18dB	1. STTD applied.
PICH (antenna 2)	PICH_Ec2/lor	-18dB	2. Total PICH Ec/lor is -15dB.
DPCH	DPCH_Ec/lor	Test-specific only for serving HS- DSCH cell, omitted otherwise	1. STTD applied.
HS-SCCH-1	HS-SCCH_Ec/lor	Test-specific	STTD applied.     Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	UE assumes STTD applied.     No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	1. As HS-SCCH-2.
HS-SCCH-4	HS-SCCH_Ec/lor	DTX"d	UE assumes STTD applied.     No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present in HSDPA configuration.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	STTD applied for open loop transmit diversity tests, precoding used for MIMO tests
OCNS		Necessary	1. Balance of power $I_{or}$ of the Node-B is
		power so that total transmit power spectral density of Node B (Ior) adds to one (Note 1)	assigned to OCNS.  2. Power divided equally between antennas.  3. OCNS interference consists of a number of dedicated data channels as specified in table C.13 and C.13A.Table C.13 specifies the OCNS setup for H-Set 1 to H-set 6.  Table C.13A specifies the OCNS setup for H-Set 9 and H-Set 11.

Note 1: For the case of DPCH with transmit diversity, the OCNS power calculation shall be based on the addition of the power from Antenna 1 and Antenna 2, i.e. disregarding any phase relationship between the antennas.

Table C.10: Downlink physical channels for HSDPA receiver testing for Closed Loop.

Transmit Diversity (Mode-1) performance.

Physical Channel	Parameter	Value	Note
P-CPICH (antenna 1)	P-CPICH_Ec1/lor	-13dB	1. Total P-CPICH_Ec/lor = -10dB
P-CPICH (antenna 2)	P-CPICH_Ec2/lor	-13dB	
P-CCPCH (antenna 1)	P-CCPCH_Ec1/lor	-15dB	1. STTD applied.
P-CCPCH (antenna 2)	P-CCPCH_Ec2/lor	-15dB	2. Total P-CCPCH Ec/lor is -12dB.
SCH (antenna ½)	SCH_Ec/lor	-12dB	TSTD applied.     Power divided equally between primary and secondary SCH.
PICH (antenna 1)	PICH_Ec1/lor	-18dB	1. STTD applied.
PICH (antenna 2)	PICH_Ec2/lor	-18dB	2. Total PICH Ec/lor is -15dB.
DPCH	DPCH_Ec/lor	Test-specific	1. CL1 applied.
HS-SCCH-1	HS-SCCH_Ec/lor	Test-specific	STTD applied.     Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	UE assumes STDD] applied.     No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	1. As HS-SCCH-2.
HS-SCCH-4	HS-SCCH_Ec/lor	DTX"d	2. As HS-SCCH-2.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	1. CL1 applied.
OCNS		Necessary power so that total transmit power spectral density of Node B (Ior) adds to one (Note 1)	1. Balance of power $I_{or}$ of the Node-B is assigned to OCNS. 2. Power divided equally between antennas. 3. OCNS interference consists of 6 dedicated data channels as specified in table C.13.

Note 1: For the case of DPCH with transmit diversity, the OCNS power calculation shall be based on the addition of the power from Antenna 1 and Antenna 2, i.e. disregarding any phase relationship between the antennas.

Table C.11: Downlink physical channels for HSDPA receiver testing for HS-SCCH detection performance

Parameter	Units	Value	Comment
CPICH $E_c/I_{or}$	dB	-10	
P-CCPCH $E_c/I_{or}$	dB	-12	Mean power level is shared with SCH.
SCH $E_c/I_{or}$	dB	-12	Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both. P-SCH code is S_dl,0 as per TS25.213 S-SCH pattern is scrambling code group 0
PICH $E_c/I_{or}$	dB	-15	
HS-PDSCH-1 $E_c  / I_{or}$	dB	-10	HS-PDSCH associated with HS-SCCH-  1. The HS-PDSCH shall be transmitted continuously with constant power.
HS-PDSCH-2 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-2
HS-PDSCH-3 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-3
HS-PDSCH-4 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-4
DPCH $E_c/I_{or}$	dB	-8	12.2 kbps DL reference measurement channel as defined in Annex A.3.1
HS-SCCH-1 $E_c  /  I_{or}$	dB	Test Specific	All HS-SCCH"s allocated equal $\left.E_{c}\left/I_{or}\right.\right.$
HS-SCCH-2 $E_c/I_{or}$	dB		Specifies $E_c/I_{or}$ when TTI is active.
HS-SCCH-3 $E_c/I_{or}$	dB		
HS-SCCH-4 $E_c/I_{or}$	dB		
OCNS $E_c/I_{or}$	dB	Necessary power so that total transmit power spectral density of Node B (lor) adds to one (Note 1)	1. Balance of power $I_{or}$ of the Node-B is assigned to OCNS. 2. OCNS interference consists of 6 dedicated data channels as specified in table C.13.

Note 1: For the case of DPCH with transmit diversity, the OCNS power calculation shall be based on the addition of the power from Antenna 1 and Antenna 2, i.e. disregarding any phase relationship between the antennas.

Table C.12: Downlink physical channels for HSDPA receiver testing for HS-SCCH detection performance in Open Loop Diversity

Parameter	Units	Value	Comment
P-CPICH $E_c/I_{or}$ (antenna 1)	dB	-13	1. Total P-CPICH $E_c/I_{or}$ = -10dB
P-CPICH $E_c/I_{or}$ (antenna 2)	dB	-13	1. Total 1 -Of ICH $E_c/T_{or} = -100B$
P-CCPCH $E_c/I_{or}$ (antenna 1)	dB	-15	1. STTD applied
P-CCPCH $E_c/I_{or}$ (antenna 2)	dB	-15	2. Total P-CCPCH $E_c/I_{or}$ = -12dB
SCH $E_c/I_{or}$ (antenna ½)	dB	-12	TSTD applied     Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both.     P-SCH code is S_dl,0 as per TS25.213     S-SCH pattern is scrambling code group 0
PICH $E_c/I_{or}$ (antenna 1)	dB	-15	1. STTD applied
PICH $E_c/I_{or}$ (antenna 2)	dB	-15	2. Total PICH $E_c/I_{or}$ = -12dB
HS-PDSCH-1 $E_c/I_{or}$	dB	-10	STTD applied     HS-PDSCH assoc. with HS-SCCH-1
HS-PDSCH-2 $E_c/I_{or}$	dB	DTX	STTD applied     HS-PDSCH assoc. with HS-SCCH-2
HS-PDSCH-3 $E_c/I_{or}$	dB	DTX	STTD applied     HS-PDSCH assoc. with HS-SCCH-3
HS-PDSCH-4 $E_c/I_{or}$	dB	DTX	STTD applied     SHS-PDSCH assoc. with HS-SCCH-4
$DPCH\ E_c/I_{or}$	dB	-8	STTD applied     12.2 kbps DL reference measurement channel as defined in Annex A.3.1
HS-SCCH-1 $E_c$ / $I_{or}$	dB		4 CTTD and lind
HS-SCCH-2 $E_c/I_{or}$	dB	Took Coocidio	1. STTD applied 2. All HS-SCCH"s allocated equal $E_c/I_{ar}$ .
HS-SCCH-3 $E_c/I_{or}$	dB	Test Specific	3. Specifies $E_c/I_{or}$ when TTI is active.
HS-SCCH-4 $E_c/I_{or}$	dB		
OCNS $E_c/I_{or}$	dB	Remaining power at Node-B (including HS- SCCH power allocation when HS- SCCH"s inactive).	STTD applied     CONS interference consists of 6 dedicated data channels as specified in table C.13.     Power divided equally between antennas

Table C.12A: Downlink physical channels for HSDPA receiver testing for HS-DSCH reception in CELL\_FACH state.

Physical Channel	Parameter	Value	Note
P-CPICH	P-CPICH_Ec/lor	-10dB	
P-CCPCH	P-CCPCH_Ec/lor	-12dB	Mean power level is shared with SCH.
SCH	SCH_Ec/lor	-12dB	Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both. P-SCH code is S_dl,0 as per TS25.213 S-SCH pattern is scrambling code group 0
PICH	PICH_Ec/lor	-15dB	
HS-SCCH-1	HS-SCCH_Ec/lor	Test-specific	Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	As HS-SCCH-2.
HS-SCCH-4	HS-SCCH_Ec/lor	DTX"d	As HS-SCCH-2.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	
OCNS		Necessary power so that total transmit power spectral density of Node B (lor) adds to one	OCNS interference consists of a number of dedicated data channels as specified in table C.13.

Table C.12B: Downlink physical channels for HSDPA receiver testing for HS-SCCH reception in CELL\_FACH state.

Parameter	Units	Value	Comment
CPICH $E_c/I_{or}$	dB	-10	
P-CCPCH $E_c/I_{or}$	dB	-12	Mean power level is shared with SCH.
SCH $E_c/I_{or}$	dB	-12	Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both. P-SCH code is S_dl,0 as per TS25.213 S-SCH pattern is scrambling code group 0
PICH $E_c/I_{or}$	dB	-15	
HS-PDSCH-1 $E_c/I_{or}$	dB	-3	HS-PDSCH associated with HS-SCCH-  1. The HS-PDSCH shall be transmitted continuously with constant power.
HS-PDSCH-2 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-2
HS-PDSCH-3 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-3
HS-PDSCH-4 $E_c/I_{or}$	dB	DTX	HS-PDSCH associated with HS-SCCH-4
HS-SCCH-1 $E_c/I_{or}$	dB	Test Specific	All HS-SCCH"s allocated equal $\left.E_{c}\left/I_{or}\right.\right.$
HS-SCCH-2 $E_c/I_{or}$	dB		Specifies $E_{c}/I_{\it or}$ when TTI is active.
HS-SCCH-3 $E_c/I_{or}$	dB	DTX	No signalling scheduled, or power
HS-SCCH-4 $E_c  / I_{or}$	dB		radiated, on this HS-SCCH, but signalled to the UE as present.
OCNS $E_c/I_{or}$	dB	Necessary power so that	1. Balance of power $I_{or}$ of the Node-B is
		total transmit power spectral density of Node B (Ior) adds to one (Note 1)	assigned to OCNS.  2. OCNS interference consists of 6 dedicated data channels as specified in table C.13.

Table C.12C: Downlink physical channels for DC-HSDPA/DB-DC-HSDPA/4C-HSDPA Reference Measurement Channel testing

Physical Channel	Parameter	Value	Note
P-CPICH	P-CPICH_Ec/lor	-10dB	
P-CCPCH	P-CCPCH_Ec/lor	-12dB	Mean power level is shared with SCH.
SCH	SCH_Ec/lor	-12dB	Mean power level is shared with P-CCPCH – SCH includes P- and S-SCH, with power split between both. P-SCH code is S_dl,0 as per TS25.213 S-SCH pattern is scrambling code group 0
PICH	PICH_Ec/lor	-15dB	
DPCH	DPCH_Ec/lor	- 5 dB unless test-specific value is specified, only for serving HS-DSCH cell, omitted otherwise	12.2 kbps DL reference measurement channel as defined in Annex A.3.1
HS-SCCH-1	HS-SCCH_Ec/lor	-9dB unless test-specific value is specified	Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	As HS-SCCH-2.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	
OCNS		Necessary power so that total transmit power spectral density of Node B (lor) adds to one	OCNS interference consists of a number of dedicated data channels as specified in table C.13 and C. 13A. Table C.13 specifies the OCNS setup for H-Set 1 to H-Set 6 and H-Set 12. Table C.13A specifies the OCNS setup for H-Set 8 and H-set 10.

Table C.12D: Downlink physical channels for HSDPA/DC-HSDPA/DB-DC-HSDPA/4C-HSDPA receiver testing for MIMO performance with asymmetric P-CPICH/S-CPICH power settings.

Physical Channel	Parameter	Value	Note
P-CPICH (antenna 1)	P-CPICH_Ec/lor	-10dB	Phase reference
S-CPICH (antenna 2)	S-CPICH Ec/lor	-13dB	Phase reference
P-CCPCH	P-CCPCH_Ec/lor	-12dB	
SCH	SCH_Ec/lor	-12dB	
PICH	PICH_Ec/lor	-15dB	
DPCH	DPCH_Ec/lor	Test-specific	
HS-SCCH-1	HS-SCCH_Ec/lor	Test-specific	Specifies fraction of Node-B radiated power transmitted when TTI is active (i.e. due to minimum inter-TTI interval).
HS-SCCH-2	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present.
HS-SCCH-3	HS-SCCH_Ec/lor	DTX"d	As HS-SCCH-2.
HS-SCCH-4	HS-SCCH_Ec/lor	DTX"d	No signalling scheduled, or power radiated, on this HS-SCCH, but signalled to the UE as present in HSDPA configuration.
HS-PDSCH	HS-PDSCH_Ec/lor	Test-specific	Precoding used.
OCNS		Necessary power so that total transmit power spectral density of Node B (lor) adds to one	1. Balance of power $I_{or}$ of the Node-B is assigned to OCNS. 2. OCNS interference consists of a number of dedicated data channels as specified in Table C.13 and C.13A.Table C.13 specifies the OCNS setup for H-Set 1 to H-set 6. Table C.13A specifies the OCNS setup for H-Set 9 and H-Set 11. 3. OCNS transmitted only on antenna 1.
Note: Transmit diversity (STTD or TSTD) is disabled on the associated physical channels (P-CPICH, PICH, SCH, HS-SCCH, DPCH).			

Table C.12E: Downlink physical channels for HSDPA receiver testing for HS-SCCH detection performance with asymmetric P-CPICH/S-CPICH power settings.

Parameter	Value	Note
P-CPICH_Ec/lor	-10dB	Phase reference
S-CPICH Ec/lor	-13dB	Phase reference
P-CCPCH_Ec/lor	-12dB	
SCH_Ec/lor	-12dB	
PICH_Ec/lor	-15dB	
DPCH_Ec/lor	-8dB	STTD applicability is test-specific.     12.2 kbps DL reference     measurement channel as defined in     Annex A.3.1
HS-SCCH_Ec/lor		STTD applicability is test specific.     Specifies fraction of Node-B
HS-SCCH_Ec/lor	Tast-specific	radiated power transmitted when TTI is active (i.e. due to minimum inter- TTI interval).
HS-SCCH_Ec/lor	r est-specific	2. All HS-SCCH"s allocated equal $E_c/I_{\it or}$ .
HS-SCCH_Ec/lor		3. Specifies $E_c/I_{or}$ when TTI is active.
HS-PDSCH_Ec/lor	Necessary power so that total transmit power spectral density of Node B (Ior) adds to one	1. Precoding used. 2. Balance of power $I_{or}$ of the Node-B is assigned to HS-PDSCH.
HS-PDSCH_Ec/lor	DTX	
HS-PDSCH_Ec/lor	DTX	
HS-PDSCH_Ec/lor	DTX	
	DTX	
	P-CPICH_Ec/lor S-CPICH Ec/lor P-CCPCH_Ec/lor SCH_Ec/lor PICH_Ec/lor  DPCH_Ec/lor  HS-SCCH_Ec/lor  HS-SCCH_Ec/lor  HS-SCCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor	P-CPICH_Ec/lor -10dB S-CPICH Ec/lor -13dB P-CCPCH_Ec/lor -12dB SCH_Ec/lor -12dB PICH_Ec/lor -15dB  PPCH_Ec/lor -8dB  DPCH_Ec/lor -8dB  HS-SCCH_Ec/lor HS-SCCH_Ec/lor  HS-SCCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor  HS-PDSCH_Ec/lor  DTX  HS-PDSCH_Ec/lor DTX  HS-PDSCH_Ec/lor DTX

Note 1: Transmit diversity (STTD or TSTD) is disabled on P-CCPCH, PICH and SCH.

Note 2: OCNS is not present for this test. HS-PDSCH is used in order to model other UE MIMO traffic.

#### C.5.2 OCNS Definition

The selected channelization codes and relative power levels for OCNS transmission during for HSDPA performance assessment for other than enhanced performance type 3i are defined in Table C.13. The selected codes are designed to have a single length-16 parent code. The test definition for the enhanced performance type 3i is defined in section C.5.3.

Table C.13: OCNS definition for HSDPA receiver testing.

Channelization Code at SF=128	Relative Level setting (dB) (Note 1)	DPCH Data
122	0	The DPCH data for each channelization code
123	-2	shall be uncorrelated with each other and with
124	-2	any wanted signal over the period of any
125	-4	measurement. For OCNS with transmit
126	-1	diversity the DPCH data sent to each antenna
127	-3	shall be either STTD encoded or generated from uncorrelated sources.

Channelization Code at SF=128	Relative Level setting (dB) (Note 1)	DPCH Data
4	0	The DPCH data for each channelization code shall be uncorrelated with each other and with any wanted signal over the period of any
5	-2	measurement. For OCNS with transmit divers the DPCH data sent to each antenna shall be
6	-4	<ul> <li>either STTD encoded or generated from uncorrelated sources.</li> </ul>
7	-1	

Table C.13A: OCNS definition for HSDPA receiver testing, FRC H-Set 8, H-Set 9, H-Set 10 and H-Set 11.

Note 1: The relative level setting specified in dB refers only to the relationship between the OCNS channels. The level of the OCNS channels relative to the Ior of the complete signal is a function of the power of the other channels in the signal with the intention that the power of the group of OCNS channels is used to make the total signal add up to 1.

## C.5.3 Test Definition for Enhanced Performance Type 3i

This section defines additional test definition for enhanced performance type 3i including: number of interfering cells and their respective powers; transmitted code and power characteristics (OCNS) for serving and interfering cells; and frame offsets for interfering cells. For DC-HSDPA, DB-DC-HSDPA and 4C-HSDPA requirements, the number of interfering cells and their respective powers; transmitted code and power characteristics (OCNS) for serving and interfering cells; and frame offsets for interfering cells shall be the same for each carrier frequency. The transmitted OCNS and data signals shall be independent for each cell.

## consistent with the definition provided in section 3.2.

## C.5.3.1 Transmitted code and power characteristics for serving cell

The downlink physical channel code allocations for the serving cell are specified in Table C.14. Ten HS-PDSCH codes have been reserved for the user of interest, based upon the use of QPSK with FRC H-Set 6. The other user codes are selected from 46 possible SF = 128 codes. Note not all 46 of these codes are used, and in addition only 16 codes are used at a given instance in time. Table C.15 summarizes the power allocations of different channels for the serving cell for 50% and 25% HS-PDSCH power allocation. Note the power allocations in the last row of Table C.15 are to be split between the HS-SCCH and the other users" channels in order to ensure proper operation of the HS-SCCH during testing.

Table C.16 summarizes the channelization codes to be used for the other users channels (OCNS) along with their respective relative power allocations in dB when HS-PDSCH is allocated 25% or 50% of the total power. As shown in Table C.16, there are two groups of 16 codes, which are randomly selected with equal probability on a symbol-by-symbol basis. This random selection is done per code pair, where a code pair occupies the same row, as opposed to selecting all of the codes within group 1 or group 2. This random selection between these two groups is for purposes of modelling a simplified form of DTX. Note that the switching time for the symbols with SF = 64 would be the symbol timing associated with an SF = 64 channel, and the switching time for the symbols with SF = 128 would be the symbol timing for SF = 128 channel. Thus, there would be two different symbol times dependent upon the SF. For SF = 64,

symbol time  $\sim$  16.67 microseconds, and for SF = 128, symbol time  $\sim$  33.33 microseconds. Each of these users is also power controlled as described in section C.5.3.3.

The scrambling code of the serving cell is set to 0.

Table C.14. Downlink physical channel code allocation.

Channelization Code at SF=128	Note
0	P-CPICH, P-CCPCH and PICH on SF=256
1	1 01 1011,1 001 011 4114 1 1011 011 01 -200
27	6 SF=128 codes free for OCNS
887	10 HS-PDSCH codes at SF=16
88127	40 SF=128 codes free for OCNS

Table C.15. Summary of modelling approach for the serving cell.

	Serving cell	
Common channels	0.195 (-7.1dB)	
	As specified in Table C.8	
HS-PDSCH transport format	H-Set 6	
HS-PDSCH power	0.5	0.25
allocation [E <sub>√</sub> I <sub>or</sub> ]	(-3 dB)	(-6 dB)
HS-SCCH + Other users"	0.3049	0.5551
channels (OCNS)	(-5.16 dB)	(-2.56 dB)
	Other users"	Other users"
	channels set	channels set
	according to Table	according to Table
	C.16	C.16

Note: The values given in decibel are only for information.

Table C.16. Channelization codes and relative power levels for 25% and 50% HS-PDSCH power allocations.

Group 1 Channelization Code, Cch, SF,k	Group 2 Channelization Code, Cch, SF, k	Relative level setting for 25% and 50%
C <sub>ch,128,2</sub>	C <sub>ch,128,108</sub>	-1.7
C <sub>ch,128,3</sub>	C <sub>ch,128,103</sub>	-2.7
C <sub>ch,128,5</sub>	C <sub>ch,128,109</sub>	-3.5
C <sub>ch,128,6</sub>	C <sub>ch,128,118</sub>	-0.8
C <sub>ch,128,90</sub>	C <sub>ch,128,4</sub>	-6.2
C <sub>ch,128,94</sub>	C <sub>ch,128,123</sub>	-4.6
C <sub>ch,128,96</sub>	C <sub>ch,128,111</sub>	-2.3
C <sub>ch,128,98</sub>	C <sub>ch,128,106</sub>	-4.1
C <sub>ch,128,99</sub>	C <sub>ch,128,100</sub>	-3.1
C <sub>ch,128,101</sub>	C <sub>ch,128,113</sub>	-5.1
C <sub>ch,64,52</sub>	C <sub>ch,64,44</sub>	0.0
C <sub>ch,128,110</sub>	C <sub>ch,128,124</sub>	-4.6
C <sub>ch,128,114</sub>	C <sub>ch,128,115</sub>	-4.8
C <sub>ch,128,116</sub>	C <sub>ch,128,126</sub>	-4.8
C <sub>ch,64,60</sub>	C <sub>ch,64,46</sub>	-1.1
C <sub>ch,128,125</sub>	C <sub>ch,128,95</sub>	-4.1

Note:

The relative level settings specified in dB refer only to the relationship between the OCNS channels. For the serving cell, the sum of the powers of the OCNS channels plus the power allocated to the HS-SCCH must add up to the values specified in the last row of Table C.15. For the interfering cells, the sum of the powers of the OCNS channels must add up to the value shown in the last row of Table C.17.

#### C.5.3.2 Transmitted code and power characteristics for interfering cells

The downlink physical channel code allocations for the interfering cells are same as for the serving cell as given in Table C.14. The modelling approach for the interfering cells is summarized in Table C.17. The modelling of the other users" dedicated channels is done in the same way as in the case of the serving cell except that the HSDPA power allocation is fixed at 50% and the total power allocated is not shared with the HS-SCCH. Thus, the two groups of channelization codes defined in Table C.16 apply, along with the specified relative power levels.

Table C.17. Summary of modelling approach for the interfering cells.

	Interfering cell(s)
Common channels	0.195 (-7.1dB)
	As specified in Table C.8
HS-PDSCH transport	Selected randomly from Table C.18
format	Independent for each interferer.
HS-PDSCH power	0.5
allocation [E₀/l₀r]	(-3 dB)
Other users" channels	0.3049
	(-5.16 dB)
	Set according to Table C.16 for 50%
	HS-PDSCH power allocation

Note: The values given in decibel are only for information.

The HS-PDSCH transmission for interfering cells is modelled to have randomly varying modulation and number of codes. The predefined modulation and number of codes are given in Table C.18, with the actual codes selected per the code allocation given in Table C.14. The transmission from each interfering cell is randomly and independently selected every HSDPA TTI among the four options given in Table C.18.

The scrambling codes of the interfering cells are set to 16 and 32, respectively. The frame offsets for the interfering cells are set to 1296 and 2576 chips relative to the serving cell. The scrambling code value of 16 and the frame offset value of 2576 corresponds to the first interfering cell.

Table C.18. Predefined interferer transmission.

#	Used modulation and number of HS-PDSCH codes
1	QPSK with 5 codes
2	16QAM with 5 codes
3	QPSK with 10 codes
4	16QAM, with 10 codes

### C.5.3.3 Model for power control sequence generation

In this section the modelling of power control for the other users" channels is described. There are two powers that are calculated for each user, I at each slot, n. The first is an interim power calculation, which develops a power  $P_n^i$  in dB.

The second is the actual applied transmit power,  $\hat{P}_n^i$  in the linear domain, which is normalized such that the total power for all users remains the same as that originally allocated. The interim power calculation is described first followed by the applied, normalized power calculation.

The interim power is varied randomly, either by increasing or decreasing it by 1 dB steps in each slot, i.e.

$$P_n^i = P_{n-1}^i + \Delta$$
, where  $\Delta \in \{-1,+1\}$  (EQ.C.5.3.3.1)

The probability of  $\Delta$  having a value of +1 for the  $i^{th}$  user at time instant n can be determined as

$$\Pr_{n}^{i}(\Delta = +1) = 0.5 - (P_{n-1}^{i} - P_{0}^{i})\frac{0.5}{L}$$
 (EQ.C.5.3.3.2)

where,  $P_{n-1}^{i}$  is the interim power at time instant n-1 and  $P_{0}^{i}$  is the initial value given in Table C.16 after conversion to dB for each of the two possible HS-PDSCH power allocations. L is a scaling factor which can be used to determine the range to which the variation of power is confined. The value of L is set to 10, leading to a variance of ~5 dB.

The applied, normalized power is given by

$$\hat{P}_{n}^{i} = \frac{P_{lin,n}^{i}}{\sum_{i} P_{lin,n}^{i}} \sum_{i} P_{lin,0}^{i}$$
 (EQ.C.5.3.3.3)

where  $P^i_{lin,n}$  is the interim power of the user I at time instant n in the linear domain, and  $P^i_{lin,0}$  is the initial value of the i<sup>th</sup> user"s power also in the linear domain. Each summation is over all 16 possible values for  $P^i_{lin,n}$  and  $P^i_{lin,0}$  where the latter summation is equal to either 0.5551 or 0.3049 for HS-PDSCH allocations of 25% and 50%, respectively, see Table C.16. The total instantaneous output power of the OCNS is now always equal to its allocated power. One other subtle point to note is that at each iteration of interim power generation using (EQ.C.5.3.3.1) that the value of  $P^i_{n-1}$  is set to  $P^i_n$  of the previous iteration as opposed to  $\hat{P}^i_n$  of the previous iteration. In summary, two sets of power control sequences are developed using (EQ.C.5.3.3.1) and (EQ.C.5.3.3.3), respectively, where the interim outputs developed by (C.1) are used to develop the applied, normalized values described by (EQ.C.5.3.3.3) and to which the actual channel powers are set.

## C.5.4 Simplified Multi Carrier HSDPA testing method

For DC-HSDPA, DB-DC-HSDPA or 4C-HSDPA tests which require more than 8 independent faders, the resulting propagation channel(s) shall be generated by considering a number of independent faders needed for one carrier and connecting them to the signal of randomly chosen carrier(s). The maximum number of channel faders on the test will be less than or equal to 8. The remaining carrier(s) shall be connected without a channel fader but with AWGN. The throughput shall be collected only for the carrier(s) connected to channel faders.

The test shall be repeated by choosing carrier(s) excluding already chosen carrier(s) until all the carrier(s) are tested under fading conditions. The sum of all the collected throughputs from each carrier shall be compared against the reference value in the requirements.

All supported carriers shall be configured and activated during the test.

## C.6 MBMS DL Physical channels

#### C.6.1 Downlink Physical Channels connection set-up

Table C.14 is applicable for measurements on the Performance requirements in Clause 11.

Table C.14: Downlink Physical Channels on each radiolink

Physical Channel	Power ratio	NOTE
P-CPICH	P-CPICH_Ec/lor = -10 dB	Only P-CPICH is used as phase reference for S-CCPCH carrying MCCH or MTCH.
P-CCPCH	P-CCPCH_Ec/lor = -12 dB	
SCH	SCH_Ec/lor = -12 dB	This power shall be divided equally between Primary and Secondary Synchronous channels
PICH	PICH_Ec/lor = -15 dB	
S-CCPCH	S-CCPCH_Ec/lor = test dependent	
DPCH	TBD	DPCH is enable only when UE has capability to receive MBMS in CELL_DCH state
OCNS	Necessary power so that total transmit power spectral density of Node B (lor) adds to one	OCNS interference consists of 16 dedicated data channels as specified in table C.6.

#### C.6.2 Downlink Physical Channels connection set-up for MBSFN

Table C.14a: Downlink Physical Channels for performance requirements

Physical Channel	Power ratio	NOTE
P-CPICH	P-CPICH_Ec/lor = -10 dB	Only P-CPICH is used as phase reference for S-CCPCH carrying MCCH or MTCH.
P-CCPCH	P-CCPCH_Ec/lor = -12 dB	
SCH	SCH_Ec/lor = -12 dB	This power shall be divided equally between Primary and Secondary Synchronous channels
S-CCPCH	S-CCPCH_Ec/lor = test dependent	
OCNS	Necessary power so that total transmit power spectral density of Node B (lor) adds to one	Same code channels as used for DPCH, see table C.6

# Annex D (normative): Environmental conditions

#### D.1 General

This normative annex specifies the environmental requirements of the UE. Within these limits the requirements of the present documents shall be fulfilled.

### D.2 Environmental requirements

The requirements in this clause apply to all types of UE(s).

#### D.2.1 Temperature

The UE shall fulfil all the requirements in the full temperature range of:

#### Table D.1

+15°C to +35°C	for normal conditions (with relative humidity of 25 % to 75 %)
-10°C to +55°C	for extreme conditions (see IEC publications 68-2-1 and 68-2-2)

Outside this temperature range the UE, if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the UE exceed the transmitted levels as defined in TS 25.101 for extreme operation.

#### D.2.2 Voltage

The UE shall fulfil all the requirements in the full voltage range, i.e. the voltage range between the extreme voltages.

The manufacturer shall declare the lower and higher extreme voltages and the approximate shutdown voltage. For the equipment that can be operated from one or more of the power sources listed below, the lower extreme voltage shall not be higher, and the higher extreme voltage shall not be lower than that specified below.

Table D.2

Power source	Lower extreme voltage	Higher extreme voltage	Normal conditions voltage
AC mains	0,9 * nominal	1,1 * nominal	nominal
Regulated lead acid battery	0,9 * nominal	1,3 * nominal	1,1 * nominal
Non regulated batteries:			
Leclanché	0,85 * nominal	Nominal	Nominal
Lithium	0.95 * nominal	1,1 * nominal	1,1 * nominal
Mercury/nickel & cadmium	0.90 * nominal	Nominal	Nominal

Outside this voltage range the UE if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the UE exceed the transmitted levels as defined in TS 25.101 for extreme operation. In particular, the UE shall inhibit all RF transmissions when the power supply voltage is below the manufacturer declared shutdown voltage.

#### D.2.3 Vibration

The UE shall fulfil all the requirements when vibrated at the following frequency/amplitudes.

Table D.3

Frequency	ASD (Acceleration Spectral Density) random vibration
5 Hz to 20 Hz	$0.96 \text{ m}^2/\text{s}^3$
20 Hz to 500 Hz	0,96 m <sup>2</sup> /s <sup>3</sup> at 20 Hz, thereafter -3 dB/Octave

Outside the specified frequency range the UE, if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the UE exceed the transmitted levels as defined in TS 25.101 for extreme operation

# Annex E (informative): UARFCN numbers

#### E.1 General

This Annex lists the UARFCN numbers used for the frequency bands implemented in the current specification.

#### E.2 List of UARFCN used for UTRA FDD bands

The UARFCN numbering scheme detailed in clauses 5.4.3 and 5.4.4 of this specification is summarized for information in Table E.1. The table shows the UARFCN assigned to all UTRA FDD operating bands, starting with the lowest UARFCN and continuing up to the highest one assigned.

Each band may have two table entries, one for the 'general' numbers and one for the 'additional' ones, as specified in Table 5.2. The entries in Table E.1 are explained as follows:

Band range: The size of the frequency range for the UTRA FDD band specified in Table 5.0.

**Range res.:** The size of the frequency range corresponding to the UARFCN range that has been 'reserved' in 3GPP for possible future extensions of the band.

**Formula offset:** The offset parameter ( $F_{UL\_Offset}$  or  $F_{DL\_Offset}$ ) in the formula, used to calculate the UARFCN as specified in Clause 5.4.3.

Assigned/reserved: Indicates the significance of the UARFCN and corresponding frequencies listed as follows:

**Start res**. Start of the UARFCN range reserved for the band.

**Min.** The lowest UARFCN assigned to the band.

**Max.** The highest UARFCN assigned to the band.

**End res.** End of the UARFCN range reserved for the band.

 $N_U$ ,  $N_D$ : Uplink and downlink UARFCN.

 $F_{UL}$ ,  $F_{DL}$ : Corresponding uplink and downlink frequencies.

(Add.): Refers to the additional UARFCN (on the 100 kHz raster) as specified in Table 5.1A.

Note that bands V and VI are shown with common entries in Table E.1, since their UARFCN ranges are completely overlapping.

Table E.1: UARFCN used for the UTRA FDD bands

				Uplink UAR	RFCN			Downlink U	ARFCN	
UTRA FDD Band	Band range [MHz]	Range res. [MHz]	Formula offset F <sub>UL_Offset</sub> [MHz]	Assigned/ Reserved	Nu	F <sub>UL</sub> [MHz]	Formula offset FDL_Offset [MHz]	Assigned/ Reserved	N <sub>D</sub>	F <sub>DL</sub> [MHz]
				Start res.	0	1850.1		Start res.	400	1930.1
(4 -1 -1 )	2x60	2x60	1850.1	Min.	12	1852.5	1850.1	Min.	412	1932.5
(Add.)				Max. End res.	287	1907.5		Max.	687	1987.5
				Start res.	299 300	1909.9 830.0		End res. Start res.	699 700	1989.9 875.0
				Min.	312	832.4		Min.	712	877.4
XIX	2x15	2x15	770	Max.	363	842.6	735	Max.	763	887.6
				End res.	374	844.8		End res.	774	889.8
				Start res.	375	830.1		Start res.	775	875.1
XIX	2x15	2x15	755.1	Min.	387	832.5	720.1	Min.	787	877.5
(Add.)	ZXIO	ZXIO	700.1	Max.	437	842.5	720.1	Max.	837	887.5
				End res.	449	844.9		End res.	849	889.9
				Start res. Min.	450 <b>462</b>	1448.0 <b>1450.4</b>		Start res. Min.	850 <b>862</b>	1496.0 <b>1498.4</b>
XXI	2x15	2x15	1358	Max.	512	1460.4	1326	Max.	912	1508.4
				End res.	524	1462.8		End res.	924	1510.8
				Start res.	770	824.1		Start res.	995	869.1
V	2x25			Min. (V)	782	826.5		Min. (V)	1007	871.5
and	(V)	2x25	670.1	Min. (VI)	812	832.5	670.1	Min. (VI)	1037	877.5
VI	2x10	2,25	070.1	Max. (VI)	837	837.5	670.1	Max. (VI)	1062	882.5
(Add.)	(VI)			Max. (V)	862	842.5		Max. (V)	1087	887.5
				End res.	894	848.9		End res.	1119	893.9
				Start res. Min.	925 <b>937</b>	1710.0 <b>1712.4</b>		Start res. Min.	1150 <b>1162</b>	1805.0 <b>1807.4</b>
III	<b>III</b> 2x75	2x75	1525	Max.	1288	1712.4	1575	Max.	1513	1877.6
				End res.	1299	1784.8		End res.	1524	1879.8
				Start res.	1300	1710.0		Start res.	1525	2110.0
15.7	0.45	0.45	4.450	Min.	1312	1712.4	4005	Min.	1537	2112.4
IV	2x45	2x45	1450	Max.	1513	1752.6	1805	Max.	1738	2152.6
				End res.	1524	1754.8		End res.	1749	2154.8
				Start res.	1650	1710.1	1735.1	Start res.	1875	2110.1
IV	2x45	2x45	1380.1	Min.	1662	1712.5		Min.	1887	2112.5
(Add.)				Max.	1862	1752.5		Max.	2087	2152.5
				End res.	1874 2000	1754.9 2500.0		End res.	2099 2225	2154.9 2620.0
				Start res. Min.	<b>2000</b>	<b>2502.4</b>		Start res. Min.	2223 2237	<b>2622.4</b>
VII	2x70	2x70	2100	Max.	2338	2567.6	2175	Max.	2563	2687.6
				End res.	2349	2569.8		End res.	2574	2689.8
				Start res.	2350	2500.1		Start res.	2575	2620.1
VII	2x70	2x70	2030.1	Min.	2362	2502.5	2105.1	Min.	2587	2622.5
(Add.)	2010	2010	2000.1	Max.	2687	2567.5	2100.1	Max.	2912	2687.5
				End res.	2699	2569.9		End res.	2924	2689.9
				Start res.	2700	880.0		Start res.	2925 <b>2937</b>	925.0
VIII	2x35	2x35	340	Min. Max.	2712 2863	882.4 912.6	340	Min. Max.	3088	927.4 957.6
				End res.	2874	914.8		End res.	3099	959.8
				Start res.	2875	1710.0		Start res.	3100	2110.0
v	000	000	4405	Min.	2887	1712.4	4.400	Min.	3112	2112.4
Х	2x60	2x60	1135	Max.	3163	1767.6	1490	Max.	3388	2167.6
				End res.	3174	1769.8		End res.	3399	2169.8
				Start res.	3175	1710.1		Start res.	3400	2110.1
(A -1-1)	2x60	2x60	1075.1	Min.	3187	1712.5	1430.1	Min.	3412	2112.5
(Add.)	l.)   2,000   2,000			Max.	3462	1767.5		Max.	3687	2167.5
				End res.	3474	1769.9		End res.	3699	2169.9
				Start res. Min.	3475 <b>3487</b>	1428.0 <b>1430.4</b>		Start res. Min.	3700 3712	1476.0 1478.4
ΧI	2x20	2x20	733	Max.	3562	1445.4	736	Max.	3712	1478.4
				End res.	3574	1447.8		End res.	3799	1495.8
XII	2x17	2x17	-22	Start res.	3605	699.0	-37	Start res.	3830	729.0
		<u> </u>	·							

				Min.	3617	701.4		Min.	3842	731.4
				Max.	3678	713.6		Max.	3903	743.6
				End res.	3689	715.8		End res.	3914	745.8
				Start res.	3695	699.1		Start res.	3920	729.1
XII	047	047	00.0	Min.	3707	701.5	540	Min.	3932	731.5
(Add.)	2x17	2x17	-39.9	Max.	3767	713.5	-54.9	Max.	3992	743.5
				End res.	3779	715.9		End res.	4004	745.9
				Start res.	3780	777.0		Start res.	4005	746.0
XIII	2x10	2x10	21	Min.	3792	779.4	-55	Min.	4017	748.4
7	2,10	2010		Max.	3818	784.6	33	Max.	4043	753.6
				End res.	3829	786.8		End res.	4054	755.8
				Start res.	3830	777.1		Start res.	4055	746.1
XIII	2x10	2x10	11.1	Min.	3842	779.5	-64.9	Min.	4067	748.5
(Add.)				Max.	3867	784.5		Max.	4092	753.5
				End res. Start res.	3879 3880	786.9 788.0		End res.	4104 4105	755.9 758.0
				Min.	<b>3892</b>	<b>790.4</b>		Start res. Min.	4103	<b>760.4</b>
XIV	2x10	2x10	12	Max.	3918	795.6	-63	Max.	4143	765.6
				End res.	3929	797.8		End res.	4154	767.8
				Start res.	3930	788.1		Start res.	4155	758.1
XIV	o			Min.	3942	790.5		Min.	4167	760.5
(Add.)	2x10	2x10	2.1	Max.	3967	795.5	-72.9	Max.	4192	765.5
`	` '	1		End res.	3979	797.9		End res.	4204	767.9
				Start res.	4120	824.0		Start res.	4345	869.0
v	2x25			Min. (V)	4132	826.4		Min. (V)	4357	871.4
and	(V)	2x25	0	Min. (VI)	4162	832.4	0	Min. (VI)	4387	877.4
VI	2x10	2,23		Max. (VI)	4188	837.6	O	Max. (VI)	4413	882.6
	(VI)			Max. (V)	4233	846.6		Max. (V)	4458	891.6
				End res.	4244	848.8		End res.	4469	893.8
				Start res.	4275	832.0		Start res.	4500	791.0
XX	2x30	2x30	-23	Min.	4287	834.4	-109	Min.	4512	793.4
				Max.	<b>4413</b> 4424	<b>859.6</b> 861.8		Max.	<b>4638</b> 4649	818.6
XXII	80	80	2525	End res. Start res.	4424		2580	End res. Start res.		820.8
AAII	80	80	2525	Min.	4425	3410.0 <b>3412.4</b>	2360	Min.	4650 <b>4662</b>	3510.0 <b>3512.4</b>
				Max.	4813	3487.6		Max.	5038	3587.6
				Stop res.	4824	3489.8		Stop res.	5049	3589.8
				Start res.	4875	1850	910	Start res.	5100	1930
VVV	0,,05	0,,05	075	Min.	4887	1852.4		Min.	5112	1932.4
XXV	2x65	2x65	875	Max.	5188	1912.6		Max.	5413	1992.6
				End res.	5199	1914.8		End res.	5424	1994.8
				Start res.	6055	1850.1	674.1	Start res.	6280	1930.1
XXV	2x65	2x65	639.1	Min.	6067	1852.5		Min.	6292	1932.5
(Add.)	2,00	2,00	000.1	Max.	6367	1912.5		Max.	6592	1992.5
				End res.	6379	1914.9	004	End res.	6604	1994.9
				Start res.	5525	814.0	-291	Start res.	5750	859.0
XXVI	2x35	2x35	-291	Min. Max.	5537 5688	816.4		Min. Max.	5762 5913	861.4
				End res.	5699	846.6 848.8		End res.	5924	891.6 893.8
				Start res	5700	814.1	-325.9	Start res	5925	859.1
XXVI				Min.	5712	816.5	-323.9	Min.	5937	861.5
(Add.)	2x35	2x35	-325.9	Max.	5862	846.5		Max.	6087	891.5
(,				End res.	5874	848.9		End res.	6099	893.9
				Start res.	8750	1750.0		Start res.	9225	1845.0
IX	2425	2725	0	Min.	8762	1752.4	0	Min.	9237	1847.4
ı^	2x35	2x35	0	Max.	8912	1782.4	U	Max.	9387	1877.4
				End res.	8924	1784.8		End res.	9399	1879.8
	_			Start res.	9250	1850.0		Start res.	9650	1930.0
II	2x60	2x60	0	Min.	9262	1852.4	0	Min.	9662	1932.4
"	2,00	2,00		Max.	9538	1907.6	J	Max.	9938	1987.6
		ļ		End res.	9549	1909.8		End res.	9949	1989.8
		1		Start res.	9600	1920.0		Start res.	10550	2110.0
ı	2x60	2x60	0	Min.	9612	1922.4	0	Min.	10562	2112.4
			]	Max.	9888	1977.6		Max.	10838	2167.6
				End res.	9899	1979.8		End res.	10849	2169.8

# Annex F (informative): Change history

TSG	Doc	CR	R	Title	Cat	Curr	New	WI
RP-37				Rel-7 version created based on v7.9.0			8.0.0	
RP-37	RP-070658	0567		Introduction of UMTS1500 requirements (Rel-8)	В	7.9.0	8.0.0	RinImp8- UMTS1500
RP-37	RP-070654	0571	1	MBSFN FDD UE dem req	В	7.9.0	8.0.0	MBMSE- RANPhysFD D
RP-38	RP-070934	0578		Correction to UE Relative code domain power accuracy	Α	8.0.0	8.1.0	RANimp- 16QamUplin k
RP-38	RP-070934	0580	1	Introduction of requirements for UE capable of receiving HS-DSCH and HS-SCCH in CELL_FACH state	A	8.0.0	8.1.0	RANImp- Enhstate
RP-38	RP-070936	0576		Editorial correction to the RV sequence of the MIMO FRC	Α	8.0.0	8.1.0	MIMO-RF
RP-38	RP-070937	0575		Correction to extreme condition voltages for Lithium batteries in table D.2.2	Α	8.0.0	8.1.0	TEI7
RP-39	RP-080121			Correct reference to MIMO dual-stream channel model for MIMO CQI dual-stream requirements	Α	8.1.0	8.2.0	MIMO-RF
RP-39	RP-080121			HS-SCCH Type nominator	Α	8.1.0	8.2.0	MIMO-RF
RP-39	RP-080121	0592	1	Nominal Peak Data Rate and redundancy versions in MIMO FRC Tests	Α	8.1.0	8.2.0	MIMO-RF
RP-39	RP-080124	0583	2	Introduction of UMTS700EMC requirements	В	8.1.0	8.2.0	RinImp8- UMTS700
RP-39	RP-080165	0598		Addition of 15 code HSDPA demodulation requirements for 16QAM and QPSK	В	8.1.0	8.2.0	RinImp8- Hsdpa15cod es
RP-39	RP-080166	0582	1	Specification of enhanced performance requirements type 3i for HSDPA based on receiver diversity and interference-aware chip level equaliser	В	8.1.0	8.2.0	RinImp8- 2BIC
RP-39	RP-080167	0595		Correct reference to H-Set for 64-QAM max input test	Α	8.1.0	8.2.0	RinImp
RP-40	RP-080326	0606		Correction of UMTS700 UE blocking and intermodulation values	F	8.2.0	8.3.0	RinImp8- UMTS700
RP-40	RP-080328	0608	2	Introduction of Cat 19-20 demodulation requirement and cleanup of HS-DSCH requirement applicability.	В	8.2.0	8.3.0	RANimp- 64QamMim oHsdpa
RP-40	RP-080323	0600		Correction to MIMO propagation conditions	Α	8.2.0	8.3.0	MIMO-RF
RP-40	RP-080323	0611		HS-DSCH transport Format used for HS-SCCH type 3 requirements	Α	8.2.0	8.3.0	MIMO-RF
RP-40	RP-080321			Correction to Rx Spurious Emissions	Α	8.2.0	8.3.0	TEI6
RP-40	RP-080321	0601		Correction to Annex A.8.1	Α	8.2.0	8.3.0	TEI6
RP-41	RP-080629			Correction to F-DPCH TPC error rate requirement	Α	8.3.0	8.4.0	TEI6
RP-41	RP-080629		1	TS25.101: UTRA UE Power Class	Α	8.3.0	8.4.0	TEI6
RP-41	RP-080631			CQI reporting test for single link with varying lor/loc	F	8.3.0	8.4.0	TEI8
RP-41	RP-080631	0626	1	MIMO CQI reporting bias tests	F	8.3.0	8.4.0	TEI8
RP-41	RP-080631	0627		Clarification of HSDPA performance requirement applicability	F	8.3.0	8.4.0	TEI8
RP-41	RP-080625		1	CQI reporting test in fading conditions for 64QAM+MIMO	F	8.3.0	8.4.0	RANimp- 64QamMimo Hsdpa
RP-42	RP-080898	635	1	Introduction of fading CQI requirement at higher geometry for 64QAM operation	Α	8.4.0	8.5.0	TEI7

			1	T				
RP-42	RP-080927	631	1	Clarification of HST propagation conditions	Α	8.4.0	8.5.0	TEI7
RP-42	RP-080947	640	1	Introduction of E-Al requirements	В	8.4.0	8.5.0	RANImp- UplinkEnhStat e
RP-42	RP-080948	641		Introduction of CQI reporting test requirements for DC-HSDPA	В	8.4.0	8.5.0	RANimp- DCHSDPA
RP-42	RP-080948	639	3	Introduction of DC-HSDPA requirements	В	8.4.0	8.5.0	RANimp- DCHSDPA
RP-42	RP-080948	638	4	Introduction of FRC requirements for Dual cell HSDPA operation	В	8.4.0	8.5.0	RANimp- DCHSDPA
RP-42	RP-080942	636		CQI reporting test for STTD and CL1 with varying lor/loc	F	8.4.0	8.5.0	TEI8
				Correction to version number shown in title line		8.5.0	8.5.1	
RP-043	RP-090168	644	1	Correction to requirement tables for 9.2.1 and 9.2.4.	Α	8.5.1	8.6.0	TEI7
RP-043	RP-090168	648	1	Dual Cell HSDPA CQI Requirements in AWGN	F	8.5.1	8.6.0	RANimp- DCHSDPA
RP-043	RP-090168	658		Correction of HS-SCCH power in CQI tests	Α	8.5.1	8.6.0	TEI7
RP-043	RP-090168	649	1	Correction to FRC requirements for DC HSDPA	F	8.5.1	8.6.0	RANimp- DCHSDPA
RP-043	RP-090168	651		25.101 CR Tx-Rx frequency separation for DC-HSDPA	F	8.5.1	8.6.0	RANimp- DCHSDPA
RP-043	RP-090168	653		25.101 CR clarification of CQI reporting requirement for DC-HSDPA	F	8.5.1	8.6.0	RANimp- DCHSDPA
RP-043	RP-090196	650	1	25.101 CR E-DCH phase discontinuity test requirement	F	8.5.1	8.6.0	TEI8
RP-043	RP-090196	654	1	Corrections of out of band blocking	F	8.5.1	8.6.0	TEI8
RP-044	RP-090539	660		Clarifications for CQI Reporting Requirements of HSDPA. (Technically Endorsed CR in R4-50bis - R4-091235)	Α	8.6.0	8.7.0	TEI7
RP-044	RP-090539	662		Correction to MIMO Propagation Conditions. (Technically Endorsed CR in R4-50bis - R4-091433)	F	8.6.0	8.7.0	TEI7
RP-044	RP-090539	666	1	Correction to FRC H-Set 8 definition	Α	8.6.0	8.7.0	TEI7
RP-044			-	Introduction of a new Compressed Mode pattern for E-	F	8.6.0	8.7.0	LTE-RF
RP-044	RP-090555			UTRAN measurements Removal of square brackets for DC-HSDPA Type 3i	F	8.6.0	8.7.0	TEI8
				demodulation tests				
RP-044	RP-090559	661		L. L. C. (5.4. L.	В	8.7.0	9.0.0	RInImp9- UMTSLTE8
DD 45	DD 000000	070	4	Introduction of Extended UMTS800 requirements	۸	0.00	0.4.0	00
RP-45	RP-090820		1	Update of DC HSDPA CQI requirements Introduction of Extended UMTS1500 requirements for	A	9.0.0	9.1.0	TEI8
RP-46	RP-091286	676	1	TS25.101 (Technically endorsed at RAN 4 52bis in R4- 093624)	В	9.1.0	9.2.0	UMTSLTE1 500
RP-46	RP-091290	679	1	Combination of DC-HSDPA and MIMO, CQI requirements (Technically endorsed at RAN 4 52bis in R4-093831)	В	9.1.0	9.2.0	RANimp- DC_MIMO
RP-46	RP-091290	680	2	Combination of DC-HSDPA and MIMO, FRC requirements (Technically endorsed at RAN 4 52bis in R4-093832)	В	9.1.0	9.2.0	RANimp- DC_MIMO
RP-46	RP-091290	681	1	Combination of DC-HSDPA and MIMO, RF requirements (Technically endorsed at RAN 4 52bis in R4-093833)	В	9.1.0	9.2.0	RANimp- DC_MIMO
RP-46	RP-091288	682	1	RF transmitter requirements for DC-HSUPA (Technically endorsed at RAN 4 52bis in R4-094072)	В	9.1.0	9.2.0	RANimp- DC_HSUPA
RP-46	RP-091289	683		25.101 CR introduction of Dual Band DC-HSDPA (Technically Endorsed in R4-52, R4-093464)	В	9.1.0	9.2.0	RANimp- MultiBand_ DC_HSDPA
RP-46	RP-091291	689	2	Introduction of requirements for TxAA falback mode	В	9.1.0	9.2.0	RANimp- TxAA_nonM IMO
RP-46	RP-091296	690		Clarification of CQI reporting requirement applicability	Α	9.1.0	9.2.0	TEI8
RP-46	RP-091372			RAN5 related changes to enhanced CELL_FACH test case	A	9.1.0	9.2.0	TEI7
i\i - <del>T</del> U	11 001012	00 <del>1</del>	1	Trans Totaled Changes to chinanced OLLL_I ACIT test case		5.1.0	0.2.0	1 - 17

RP-47	RP-100248	702		Correction of H-Set 11 requirement for type 3 and type 3i receivers	Α	9.2.0	9.3.0	TEI8
RP-47	RP-100270	697		Correction of CQI requirements for DC_MIMO	F	9.2.0	9.3.0	RANimp- DC_MIMO
RP-47	RP-100271	703	1	HS-SCCH requirements for TxAA fallback extension	F	9.2.0	9.3.0	RANimp- TxAA_nonMI MO
RP-47	RP-100263	696		Introduction of UMTS in 800 MHz for Europe requirements in TS 25.101	В	9.2.0	9.3.0	UMTSLTE800 EU
RP-47	RP-100267	699	1	Tx-Rx frequency separation for DC-HSUPA	В	9.2.0	9.3.0	RANimp- DC_HSUPA
RP-47	RP-100267	698	2	Introduction of Rx core requirements for DC-HSUPA	В	9.2.0	9.3.0	RANimp- DC HSUPA
RP-48	RP-100624	712		Editorial correction of note in varying geometry testcases	Α	9.3.0	9.4.0	TEI8 RInImp9-
RP-48	RP-100626	704	1	25.101 CR spurious emission requirements for DC-HSUPA in band XX	F	9.3.0	9.4.0	UMTSLTE800 EU
RP-48	RP-100631	714	1	Small correction to parameters for testing MIMO FRC H- Set11/11A	F	9.3.0	9.4.0	TEI9
				DC-MIMO-HSDPA; Removal of brackets from CQI				
RP-48 RP-49	RP-100631 RP-100918	713 725		Requirements  Corrections to CQI reporting requirements	F A	9.3.0	9.4.0	TEI9 TEI8
RP-49	RP-100921	728		Correction to Rx core requirements for DC-HSUPA	F	9.4.0	9.5.0	RANimp- DC_HSUPA
RP-49	RP-100921	722		Clarification of primary uplink frequency and secondary uplink frequency	F	9.4.0	9.5.0	4C_HSDPA- Core
RP-50	RP-101334	745		Correction to Band XII frequency range	Α	9.5.0	9.6.0	TEI8
RP-50	RP-101339	742	1	Correction to Downlink Physical Channels in DC-HSDPA Tests	Α	9.5.0	9.6.0	RANimp- DCHSDPA
RP-50	RP-101348	751	1	Correction to core requirements for DB-DC-HSDPA with bands II/IV combination	F	9.5.0	9.6.0	RANimp- MultiBand_D C_HSDPA
RP-50	RP-101348	747	2	Clarification on carrier spacing for DC-HSDPA with MIMO	F	9.5.0	9.6.0	RANimp- DC_MIMO
RP-50	RP-101353	733	2	Introduction of frequency bands for 4C-HSDPA	В	9.6.0	10.0.0	4C_HSDPA- Core
RP-50	RP-101353	750	1	25.101 CR Introduction of Tx Core Requirements for DB- DC-HSDPA and dual band 4C-HSDPA with bands II/IV combination	В	9.6.0	10.0.0	4C_HSDPA- Core
RP-50	RP-101353	737	1	25.101 CR introduction of Rx core requirements for 4C-HSDPA	В	9.6.0	10.0.0	4C_HSDPA- Core
RP-50	RP-101361	748		Protection of E-UTRA Band 24	В	9.6.0	10.0.0	L_Band_LTE _ATC_MSS- Core
				Correction of reference to table 7.1aB in section 7.3.1		10.0.0	10.0.1	
RP-51	RP-110354	0754	1	Introduction of Rx core requirements for DB-DC-HSDPA and dual band 4C-HSDPA	F	10.0.1	10.1.0	4C_HSDPA- Core
RP-51	RP-110345	0765	1	Correction to Downlink Physical Channels in DC-HSDPA receiver sensitivity	A	10.0.1	10.1.0	RANimp- DCHSDPA
RP-51				Introduction of Tx core requirements for DB-DC-HSDPA and dual band 4C-HSDPA for I/VIII and I/V band		10.0.1	10.1.0	4C_HSDPA-
RP-51	RP-110354	0766	1	Combinations HSDPA MIMO demodulation performance requirements	F	10.0.1	10.1.0	Core MIMO_HSDP
RP-51	RP-110407	0768	1	due to asymmetric P-CPICH/S-CPICH power settings	В	10.0.1	10.1.0	A-Perf RANimp-
RP-51	RP-110345 RP-110341	0771 0776	-	DC-HSUPA Rx core requirements for band XI and band XXI Correction of UARFCN range for Band XII	A A	10.0.1	10.1.0	DC_HSUPA TEI8
RP-51	RP-110336	0779	_	Correction of OOBB interferer frequency ranges for Band XII	A	10.0.1	10.1.0	LTE-RF
RP-51	RP-110355	0783		25.101 CR: Correction of out of band blocking for DB-DC-HSDPA configuration 3 (Rel-10)	A	10.0.1	10.1.0	DB_DC_HSD PA-Core
RP-51	141 -110300	0100		Tiobi A configuration 3 (Nor-10)		10.0.1	10.1.0	TEI9,
	RP-110346	0785	2	25.101 CR Introduction of demodulation performance for DB-DC-HSDPA (rel-10)	F			RANimp- MultiBand_D C_HSDPA
RP-51	RP-110355	0788	3	CR for the addition of the new band combinations and the TX core requirements for band I-XI and II-V	В	10.0.1	10.1.0	DB_DC_HSD PA-Core
RP-51	RP-110355	0789	3	CR for RX core requirements for band I-XI and II-V	В	10.0.1	10.1.0	DB_DC_HSD PA-Core
RP-51	RP-110341	0793	1	CR for the modification of the UE relative code domain power accuracy	A	10.0.1	10.1.0	TEI8
RP-52	RP-110341 RP-110798	797	1	CR for the introduction of TX core requirements for band I-XI and II-V	В	10.1.0	10.2.0	DB_DC_HSD PA-Core
RP-52	RP-110798	798		25.101 CR Introduction of Rx core requirements for Band combinations II-V and I-XI	В	10.1.0	10.2.0	DB_DC_HSD PA-Core

RP-52	RP-110801	799		HSDPA MIMO CQI reporting requirements due to	В	10.1.0	10.2.0	MIMO_HSDP
RP-52	RP-110801	811		asymmetric P-CPICH/S-CPICH power settings HSDPA MIMO CQI reporting requirements due to	В	10.1.0	10.2.0	A-Perf MIMO_HSDP
				asymmetric P-CPICH/S-CPICH power settings				A-Perf
RP-52	RP-110812	812		UTRAN UE spurious emission requirements to protect E- UTRA band 23	В	10.1.0	10.2.0	S_Band_LTE _ATC_MSS- Core
RP-52	RP-110795	813		UTRAN UE spurious emission requirements to protect E- UTRA band 24	F	10.1.0	10.2.0	L_Band_LTE _ATC_MSS- Core
RP-52	RP-110796	816		Additional Spurious requirement extension due to EN spec change	F	10.1.0	10.2.0	TEI10
RP-52	RP-110801	807	1	Clarification on retransmission for MIMO workaround	В	10.1.0	10.2.0	MIMO_HSDP A-Perf
RP-52	RP-110804	805	3	Expanded 1900 MHz addition to 25.101	В	10.1.0	10.2.0	E1900-Core
RP-53	RP-111252	846		Correction of UE Relative code domain power accuracy requirements for TS 25.101 REL-10	Α	10.2.0	10.3.0	TEI9
RP-53	RP-111253	843		Clarification of spectrum emission mask requirements	Α	10.2.0	10.3.0	TEI9 RANimp-
RP-53	RP-111254	829		Clarification of ACLR requirements for DC-HSUPA	A	10.2.0	10.3.0	DC_HSUPA RInImp8-
RP-53	RP-111255	838	1	Add Band XXII for LTE/UMTS 3500 (FDD) to TS 25.101	В	10.2.0	10.3.0	UMTSLTE350
RP-53	RP-111262	837	1	Fixing UARFCN numbers in 25.101	F	10.2.0	10.3.0	TEI10
RP-53	RP-111264	830	1	UE core requirements for Band XXV	F	10.2.0	10.3.0	E1900
RP-53	RP-111270	818		Completion of UE demodulation performance requirements for 4C-HSDPA  Introduction of UE CQI reporting requirements for 4C-	В	10.2.0	10.3.0	4C_HSDPA- Perf
RP-53	RP-111270	819	1	HSDPA	В	10.2.0	10.3.0	4C_HSDPA- Perf
RP-54	RP-111690			Non applicable UARFCN numbers	F	10.3.0	10.4.0	
RP-54	RP-111735	850		Alignment with TS 36.101 on 3500MHz	F	10.3.0	10.4.0	TEI10
RP-54	RP-111686	851		Introduction of missing ACS case 2 requirement for	F		10.4.0	
RP-54	RP-111696	849		single band 4C-HSDPA Introduction of single band 4C-HSDPA II-4	В	10.4.0	11.0.0	4C_HSDPA_ Config-Core
RP-55	RP-120306	860	1	Introduction of Band 26/XXVI to TS 25.101	В	11.0.0	11.1.0	
RP-55	RP-120297	862		Correction of frequency range for spurious emission	Α	11.0.0	11.1.0	RInImp8-
				requirements				UMTSLTE3 500
RP-56	RP-120775	866	-	Correction to H-Set 8	Α	11.1.0	11.2.0	4C_HSDPA- Perf
RP-56	RP-120771	874	1	Introduction of Japanese Regulatory Requirements to W-CDMA Band VIII (R11)	Α	11.1.0	11.2.0	TEI9
RP-56	RP-120786	876	2	Introduction of 8C-HSDPA operation in 25.101 and rx core requirements	В	11.1.0	11.2.0	8C-HSDPA- Core
RP-56	RP-120793	881	-	Introduction of Band 28	В	11.1.0	11.2.0	LTE_APAC7 00-Core
RP-56	RP-120779	883	-	Correction of TX power step size tolerance for HS-DPCCH	Α	11.1.0	11.2.0	
RP-56	RP-120793	884	1	Introduction of Band 44	В	11.1.0	11.2.0	LTE_APAC7 00-Core
RP-56	RP-120763	888	-	Correction to numbers of HS-SCCH for DC-HSDPA	Α	11.1.0	11.2.0	RANimp- DCHSDPA
RP-56	RP-120791	889	2	Introduction of E850_LB (Band 27) to TS 25.101	В	11.1.0	11.2.0	LTE_e850_ LB-Core
RP-56	RP-120766	895	-	Correction of PHS protection requirements for TS 25.101	Α	11.1.0	11.2.0	
RP-56	RP-120610	899	2	Introduction of non contiguous 4C-HSDPA core requirements definition	В	11.1.0	11.2.0	NC_4C_HS DPA-Core
RP-57	RP-121300	892a	-	Corrections of spurious emission band UE co- existence applicable in Japan	A	11.2.0	11.3.0	RInImp9- UMTSLTE8
RP-57	RP-121309	899a	1	Missing allowed de-sensitization for single band 4C-HSDPA	F	11.2.0	11.3.0	
RP-57	RP-121299	905	1	Correction of DC-HSUPA core requirements	Α	11.2.0	11.3.0	RANimp- DC_HSUPA
RP-57	RP-121314	906	1	Removal of [] in NC-4C-HSDPA core requirements	F	11.2.0	11.3.0	NC_4C_HS DPA-Core
RP-57	RP-121318	907	1	Performance requirements for 8C-HSDPA	В	11.2.0	11.3.0	8C_HSDPA- Perf

RP-57	RP-121312	909	-	DC-HSUPA for Band XXII	Α	11.2.0	11.3.0	RInImp8- UMTSLTE3
RP-57	RP-121317	910	-	Modification of the MPR/CM for 8C-HSDPA	В	11.2.0	11.3.0	500 8C_HSDPA- Core
RP-57	RP-121340	011		Correction of the HS-DPCCH power step range	F	11 2 0	11.3.0	
RP-57	RP-121340		-	Tx requirements for I-2-VIII-2 and II-1-V-2	В			HSDPA_DB
KF-31	KP-121320	912	-	1x requirements for 1-2-viii-2 and ii-1-v-2	Ь	11.2.0	11.3.0	
RP-57	RP-121320	913	1	Missing requirements for I-2-VIII-2 and II-1-V-2	В	11.2.0	11.3.0	_MC-Core HSDPA_DB _MC-Core
RP-58	RP-121867	027		Japanese regulatory requirements for DC-HSUPA	Α	11 2 0	11.4.0	
RP-58	RP-121856			spurious emissions Alignment of inconsistent Rx core requirements with	Α			RANimp-
KF-36	KF-121000	931		dual uplinks	A	11.3.0	11.4.0	DC_HSUPA
RP-58	RP-121908	933	1	Introduction of UL MIMO to TS 25.101	В	11 3 0	11 4 0	MIMO_64Q
141 00	121000	000		THE COUNTY OF SE WHIM O TO 20.101		11.0.0	11.1.0	AM_HSUPA -Core
RP-58	RP-121876	934	1	CR to TS 25.101 due to introduction of CLTD	В	11 3 0	11 4 0	HSPA_UL_
141 00	121070	001		ercto re 20.101 due te miroducion er 62.15		11.0.0	11.1.0	TxDiv-CL- Core
RP-58	RP-121901	935		Introduction of Band 29	В	11.3.0	11.4.0	
								D700-Core
RP-58	RP-121876	937		F-TPICH out of quality handling for UL CLTD and UL	В	11.3.0	11.4.0	HSPA_UL_
				MIMO				TxDiv-CL-
								Core,
								MIMO_64Q
								AM_HSUPA
								-Core
RP-58	RP-121877	918	1	CR to TS 25.101 due to introduction of OLTD	В	11.3.0	11.4.0	
								TxDiv-OL-
								Core
RP-58	RP-121848	923		Introducing the additional frequency bands of 5 MHz	Α	11.3.0	11.4.0	RInImp-
				x 2 in 1.7 GHz in Japan to Band III				UMTS1700
RP-58	RP-121867	925		Cleaning of 25.101 Performance sections Rel-11	Α	11.3.0	11.4.0	TEI10
				The CR was not implemented as it was not based				
				on the latest version of the spec	_			
RP-59	RP-130287		1	CR for Cleaning of 25.101 Rel-11	F		11.5.0	
RP-59	RP-130287	942	1	Band 41 requirements for operation in China and	F	11.4.0	11.5.0	I EI11
DD 50	DD 420204	0.40	4	Japan	D	44.40	44.50	NC 4C LIC
RP-59	RP-130281	940	1	CR for Non contiguous Carrier aggregation UE	В	11.4.0	11.5.0	NC_4C_HS
DD 50	DD 400074	000		demodulation performance	F	44 4 0	44.5.0	DPA-Perf
RP-59	RP-130271	939		Some corrections on requirements of ULTD for TS	F	11.4.0	11.5.0	HSPA_UL_ TxDiv-OL-
				25.101				
RP-59	RP-130270	<b>038</b>	1	Removal of bracket from CR F-TPICH out of quality	F	11 / 0	11.5.0	Core HSPA_UL_
111 -09	131 - 130210	300	'	handling for UL CLTD and UL MIMO	[	11.4.0	11.5.0	TxDiv-CL-
				Thanking for SE SETB and SE Minio				Core,
								MIMO_64Q
								AM_HSUPA
								-Core
RP-60	RP-130762	948		Adding definition of UE maximum output power for	Α	11.5.0	11.6.0	
		_		DC-HSUPA				DC_HSUPA
RP-60	RP-130762	951		Correction to center frequency offset for additional	Α	11.5.0	11.6.0	RANimp-
				spectrum emissions mask				DC_HSUPA
RP-60	RP-130768	952		Correction to Definitions list	F	11.5.0	11.6.0	8C_HSDPA- Core
RP-60	RP-130768	955	1	Co-existence with 2.6GHz bands	F	11 5 0	11.6.0	
RP-60	RP-130768		1	Introduction of F-TPICH demodulation performance	F			HSPA_UL_
IVE -00	176-190/00	JU4		requirements in F-TPICH out-of-quality handling	F	11.5.0	11.0.0	TxDiv-CL-
				requirements				Core
RP-60	RP-130766	967		Carrier aggregation in multi-RAT UTRA and E-UTRA	Δ	11 5 0	11 6 0	LTE_CA-
VL-00	176-190/00	<i>301</i>		terminals	^	11.5.0	11.0.0	Core
RP-60	RP-130764	973		Editorial CR for 25.101 rel-11	Α	11 5 0	11.6.0	
1/L -00	117-130/04	313		Luitoriai CN 101 25.101 Tel-11	Λ	11.5.0	11.0.0	TETTO

## History

Document history		
V11.3.0	November 2012	Publication
V11.4.0	February 2013	Publication
V11.5.0	April 2013	Publication
V11.6.0	July 2013	Publication