

ETSI TS 125 123 V3.9.0 (2002-02)

Technical Specification

Universal Mobile Telecommunications System (UMTS); Requirements for support of radio resource management (TDD) (3GPP TS 25.123 version 3.9.0 Release 1999)



Reference

RTS/TSGR-0425123UR9

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions, symbols and abbreviations	11
3.1 Definitions	11
3.2 Symbols.....	11
3.3 Abbreviations	12
3.4 Test tolerances.....	12
4 Idle Mode	12
4.1 Cell Selection	12
4.1.1 Introduction.....	12
4.2 Cell Re-selection	13
4.2.1 Introduction.....	13
4.2.2 Requirements	13
4.2.2.1 Measurement and evaluation of cell selection criteria S of serving cell.....	13
4.2.2.2 Measurement of intra-frequency cells.....	13
4.2.2.3 Measurement of inter-frequency TDD cells.....	13
4.2.2.4 Measurement of inter-frequency FDD cells.....	14
4.2.2.5 Measurement of inter-RAT GSM cells	14
4.2.2.6 Evaluation of cell reselection criteria.....	14
4.2.2.7 Maximum interruption time in paging reception.....	14
4.2.2.8 Number of cells in cell lists.....	15
5 UTRAN Connected Mode Mobility.....	15
5.1 TDD/TDD Handover.....	16
5.1.1 Introduction.....	16
5.1.2 Requirements	16
5.1.2.1 TDD/TDD Handover delay.....	16
5.1.2.2 Interruption time	16
5.2 TDD/FDD Handover.....	17
5.2.1 Introduction.....	17
5.2.2 Requirements	17
5.2.2.1 Handover delay	17
5.2.2.2 Interruption time	17
5.3 TDD/GSM Handover	18
5.3.1 Introduction.....	18
5.3.2 Requirements	18
5.3.2.1 Handover delay	18
5.3.2.2 Interruption time	18
5.4 Cell Re-selection in Cell_FACH	19
5.4.1 Introduction.....	19
5.4.2 Requirements	19
5.4.2.1 Measurements	19
5.4.2.2 Cell re-selection delay.....	19
5.4.2.2.1 Intra-frequency cell re-selection.....	19
5.4.2.2.2 Inter-frequency TDD cell re-selection.....	19
5.4.2.2.3 Inter-frequency FDD cell re-selection	19
5.4.2.2.4 Inter-RAT cell re-selection.....	20
5.4.2.3 Maximum interruption in FACH message reception	20
5.5 Cell Re-selection in Cell_PCH.....	20
5.5.1 Introduction.....	20

5.5.2	Requirements	21
5.6	Cell Re-selection in URA_PCH	21
5.6.1	Introduction.....	21
5.6.2	Requirements	21
6	void.....	21
6A	RRC Connection Control	21
6A.1	RRC Connection re-establishment	21
6A.1.1	Introduction.....	21
6A.1.2	Requirements	21
6A.2	Transport format combination selection in UE	22
6A.2.1	Introduction.....	22
6A.2.2	Requirements	22
6A.3	Maximum allowed UL TX Power.....	23
6A.3.1	Introduction.....	23
6A.3.2	Requirements	23
7	Timing characteristics	23
7.1	Timing Advance (TA) requirements	23
7.1.1	Introduction.....	23
7.1.2	Requirements	23
7.1.2.1	Timing Advance adjustment accuracy	23
7.1.2.2	Timing Advance adjustment delay.....	24
7.2	Cell synchronization accuracy.....	24
7.2.1	Definition.....	24
7.2.2	Minimum requirements.....	24
7.3	UE Transmit Timing	24
7.3.1	Definition.....	24
7.3.2	Minimum Requirement.....	24
8	UE Measurements Procedures.....	24
8.1	Measurements in CELL_DCH State	24
8.1.1	Introduction.....	24
8.1.2	Requirements	24
8.1.2.1	UE Measurement Capability	24
8.1.2.2	TDD intra frequency measurements.....	25
8.1.2.2.1	Identification of a new cell	25
8.1.2.2.2	UE P-CCPCH RSCP measurement capability.....	25
8.1.2.2.2A	Timeslot ISCP measurement capability.....	25
8.1.2.2.3	Periodic Reporting.....	26
8.1.2.2.4	Event-triggered Periodic Reporting.....	26
8.1.2.2.5	Event Triggered Reporting	26
8.1.2.3	TDD inter frequency measurements.....	26
8.1.2.3.1	Identification of a new cell	27
8.1.2.3.2	P-CCPCH RSCP measurement period	27
8.1.2.3.3	Periodic Reporting.....	27
8.1.2.3.4	Event Triggered Reporting	27
8.1.2.4	FDD measurements	28
8.1.2.4.1	Identification of a new cell	28
8.1.2.4.2	Measurement period	28
8.1.2.4.3	Periodic Reporting.....	28
8.1.2.4.4	Event Triggered Reporting	28
8.1.2.5	GSM measurements	29
8.1.2.5.1	GSM carrier RSSI.....	29
8.1.2.5.2	BSIC verification.....	29
8.1.2.5.2.1	Initial BSIC identification.....	30
8.1.2.5.2.2	BSIC re-confirmation.....	30
8.1.2.6	TDD Synchronisation to new cells.....	31
8.2	Parallel Measurements in CELL_DCH State	31
8.2.1	Introduction.....	31
8.2.2	Requirements	31
8.3	Capabilities for Support of Event Triggering and Reporting Criteria	32

8.3.1	Introduction.....	32
8.3.2	Requirements	32
8.4	Measurements in CELL_FACH State	32
8.4.1	Introduction.....	32
8.4.2	Requirements	33
8.4.2.1	UE Measurement Capability	33
8.4.2.2	TDD intra frequency measurements.....	33
8.4.2.2.1	Identification of a new cell	33
8.4.2.2.2	UE P-CCPCH RSCP measurement capability.....	34
8.4.2.2.3	void.....	34
8.4.2.2.4	void.....	34
8.4.2.2.5	Timeslot ISCP measurement capability.....	34
8.4.2.2.6	RACH reporting	34
8.4.2.3	TDD inter frequency measurements.....	35
8.4.2.3.1	Identification of a new cell	35
8.4.2.3.2	P-CCPCH RSCP measurement period	35
8.4.2.3.3	Periodic Reporting.....	35
8.4.2.3.4	Event Triggered Reporting	35
8.4.2.4	FDD measurements	35
8.4.2.4.1	Identification of a new cell	36
8.4.2.4.2	Measurement period	36
8.4.2.4.3	Periodic Reporting.....	36
8.4.2.4.4	Event Triggered Reporting	36
8.4.2.5	GSM measurements	36
8.4.2.5.1	GSM carrier RSSI.....	37
8.4.2.5.2	BSIC verification.....	37
8.4.2.5.2.1	Initial BSIC identification.....	38
8.4.2.5.2.2	BSIC re-confirmation.....	38
9	Measurements performance requirements.....	38
9.1	Measurements performance for UE.....	39
9.1.1	Performance for UE measurements in downlink (RX)	39
9.1.1.1	P-CCPCH RSCP (TDD).....	39
9.1.1.1.1	Absolute accuracy requirements.....	39
9.1.1.1.2	Relative accuracy requirements	39
9.1.1.1.3	Range/mapping.....	40
9.1.1.2	CPICH measurements (FDD).....	41
9.1.1.2.1	CPICH RSCP	41
9.1.1.2.2	CPICH Ec/Io.....	41
9.1.1.3	Timeslot ISCP	42
9.1.1.3.1	Absolute accuracy requirements.....	42
9.1.1.3.2	Range/mapping.....	42
9.1.1.4	UTRA carrier RSSI.....	43
9.1.1.4.1	Absolute accuracy requirement	43
9.1.1.4.2	Relative accuracy requirement	43
9.1.1.4.3	Range/mapping.....	43
9.1.1.5	GSM carrier RSSI.....	44
9.1.1.6	SIR	44
9.1.1.6.1	Absolute accuracy requirements.....	44
9.1.1.6.2	Range/mapping.....	44
9.1.1.7	Transport channel BLER.....	45
9.1.1.7.1	BLER measurement requirement	45
9.1.1.7.2	Range/mapping.....	45
9.1.1.8	SFN-SFN observed time difference	45
9.1.1.8.1	Accuracy requirements.....	45
9.1.1.8.2	Range/mapping.....	46
9.1.1.9	Observed time difference to GSM cell.....	46
9.1.1.9.1	Accuracy requirements.....	46
9.1.1.9.2	Range/mapping.....	47
9.1.1.10	UE GPS Timing of Cell Frames for UP.....	47
9.1.1.10.1	Accuracy requirement	47
9.1.1.10.2	UE GPS timing of Cell Frames for UP measurement report mapping	47

9.1.1.11	SFN-CFN observed time difference.....	48
9.1.1.11.1	Accuracy requirements.....	48
9.1.1.11.2	Range/mapping.....	48
9.1.2	Performance for UE Measurements in Uplink (TX).....	49
9.1.2.1	UE transmitted power.....	49
9.1.2.1.1	Absolute accuracy requirements.....	49
9.1.2.1.2	Range/mapping.....	49
9.2	Measurements Performance for UTRAN.....	50
9.2.1	Performance for UTRAN Measurements in Uplink (RX).....	50
9.2.1.1	RSCP.....	50
9.2.1.1.1	Absolute accuracy requirements.....	50
9.2.1.1.2	Relative accuracy requirements.....	50
9.2.1.1.3	Range/mapping.....	50
9.2.1.2	Timeslot ISCP.....	51
9.2.1.2.1	Absolute accuracy requirements.....	51
9.2.1.2.2	Range/mapping.....	51
9.2.1.3	Received Total Wideband Power.....	51
9.2.1.3.1	Absolute accuracy requirements.....	51
9.2.1.3.2	Range/mapping.....	51
9.2.1.4	SIR.....	52
9.2.1.4.1	Absolute accuracy requirements.....	52
9.2.1.4.2	Range/mapping.....	52
9.2.1.5	Transport Channel BER.....	52
9.2.1.5.1	Accuracy requirement.....	53
9.2.1.5.2	Range/mapping.....	53
9.2.1.6	RX Timing Deviation.....	53
9.2.1.6.1	Accuracy requirements.....	53
9.2.1.6.2	Range/mapping.....	53
9.2.1.7	(void).....	54
9.2.1.8	(void).....	54
9.2.1.9	UTRAN GPS Timing of Cell Frames for UP.....	54
9.2.1.9.1	Accuracy requirement.....	54
9.2.1.9.2	Range/mapping.....	54
9.2.2	Performance for UTRAN measurements in downlink (TX).....	55
9.2.2.1	Transmitted carrier power.....	55
9.2.2.1.1	Accuracy requirements.....	55
9.2.2.1.2	Range/mapping.....	55
9.2.2.2	Transmitted code power.....	55
9.2.2.2.1	Absolute accuracy requirements.....	55
9.2.2.2.2	Relative accuracy requirements.....	55
9.2.2.2.3	Range/mapping.....	56

Annex A (normative): Test Cases.....57

A.1	Purpose of Annex.....	57
A.2	Requirement classification for statistical testing.....	57
A.2.1	Types of requirements in TS 25.123.....	57
A.2.1.1	Time and delay requirements on UE higher layer actions.....	57
A.2.1.2	Measurements of power levels, relative powers and time.....	58
A.2.1.3	Implementation requirements.....	58
A.2.1.4	Physical layer timing requirements.....	58
A.2.1.5	BER and BLER requirements.....	58
A.3	Reserved for Future Use.....	58
A.4	Idle Mode.....	58
A.4.1	Cell selection.....	58
A.4.2	Cell Re-Selection.....	58
A.4.2.1	Scenario 1: TDD/TDD cell re-selection single carrier case.....	58
A.4.2.1.1	Test Purpose and Environment.....	58
A.4.2.1.2	Test Requirements.....	60
A.4.2.2	Scenario 2: TDD/TDD cell re-selection multi carrier case.....	60

A.4.2.2.1	Test Purpose and Environment.....	60
A.4.2.2.2	Test Requirements.....	61
A.4.2.3	Scenario 3: TDD/FDD cell re-selection.....	62
A.4.2.3.1	Test Purpose and Environment	62
A.4.2.3.2	Test Requirements.....	63
A.4.2.4	Scenario 4: inter RAT cell re-selection.....	63
A.4.2.4.1	Test Purpose and Environment	63
A.4.2.4.2	Test Requirements.....	64
A.5	UTRAN Connected Mode Mobility.....	65
A.5.1	TDD/TDD Handover.....	65
A.5.1.1	Handover to intra-frequency cell	65
A.5.1.1.1	Test Purpose and Environment	65
A.5.1.1.2	Test Requirements.....	66
A.5.1.2	Handover to inter-frequency cell	66
A.5.1.2.1	Test Purpose and Environment	66
A.5.1.2.2	Test Requirements.....	67
A.5.2	TDD/FDD Handover.....	68
A.5.2.1	Test purpose and Environment	68
A.5.2.2	Test Requirements	69
A.5.3	TDD/GSM Handover	69
A.5.4	Cell Re-selection in CELL_FACH.....	70
A.5.4.1	Scenario 1: TDD/TDD cell re-selection single carrier case.....	70
A.5.4.1.1	Test Purpose and Environment	70
A.5.4.1.2	Test Requirements.....	71
A.5.4.2	Scenario 2: TDD/TDD cell re-selection multi carrier case.....	72
A.5.4.2.1	Test Purpose and Environment	72
A.5.4.2.2	Test Requirements.....	73
A.5.5	Cell Re-selection in CELL_PCH.....	74
A.5.5.1	Scenario 1: TDD/TDD cell re-selection single carrier case.....	74
A.5.5.1.1	Test Purpose and Environment	74
A.5.5.1.2	Test Requirements.....	75
A.5.5.2	Scenario 2: TDD/TDD cell re-selection multi carrier case.....	76
A.5.5.2.1	Test Purpose and Environment	76
A.5.5.2.2	Test Requirements.....	77
A.5.6	Cell Re-selection in URA_PCH	78
A.5.6.1	Scenario 1: TDD/TDD cell re-selection single carrier case.....	78
A.5.6.1.1	Test Purpose and Environment	78
A.5.6.1.2	Test Requirements.....	79
A.5.6.2	Scenario 2: TDD/TDD cell re-selection multi carrier case.....	80
A.5.6.2.1	Test Purpose and Environment.....	80
A.5.6.2.2	Test Requirements.....	81
A.6	void.....	82
A.6A	RRC Connection Control	82
A.6A.1	RRC connection re-establishment delay.....	82
A.6A.1.1	Test Purpose and Environment	82
A.6A.1.2	Test Requirements	83
A.6A.1.2.1	Test 1.....	83
A.6A.1.2.2	Test 2.....	84
A.7	Timing characteristics	84
A.7.1	Timing Advance	84
A.7.1.1	Test Purpose and Environment	84
A.7.1.2	Test Requirements	85
A.7.2	Cell synchronization accuracy.....	85
A.7.3	UE Transmit Timing	85
A.8	UE Measurements Procedures.....	86
A.8.1	TDD intra frequency measurements.....	86
A.8.1.1	Event triggered reporting in AWGN propagation conditions	86
A.8.1.1.1	Test Purpose and Environment	86
A.8.1.1.2	Test Requirements.....	87

A.8.1.2	Event 1H and 1I triggered reporting in AWGN propagation conditions	88
A.8.1.2.1	Test Purpose and Environment	88
A.8.1.2.2	Test Requirements.....	90
A.8.2	TDD inter frequency measurements	90
A.8.2.1	Correct reporting of neighbours in AWGN propagation condition	90
A.8.2.1.1	Test Purpose and Environment	90
A.8.2.1.2	Test Requirements.....	91
A.8.3	FDD measurements	91
A.8.3.1	Correct reporting of FDD neighbours in AWGN propagation condition.....	91
A.8.3.1.1	Test Purpose and Environment	91
A.8.3.1.2	Test Requirements.....	92
A.9	Measurement Performance Requirements.....	92
A.9.1	Measurement Performance for UE	93
A.9.1.1	TDD intra frequency measurements	93
A.9.1.2	TDD inter frequency measurements	93
A.9.1.3	FDD inter frequency measurements	94
A.9.1.4	UTRA carrier RSSI inter frequency measurements.....	95
Annex B (informative): Change History.....		96
History		99

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

This Technical Specification specifies requirements for support of Radio Resource Management for TDD. These requirements include requirements on measurements in UTRAN and the UE as well as requirements on node dynamic behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] (void)
- [2] (void)
- [3] 3GPP TS 25.101: "UE Radio transmission and reception (FDD)".
- [4] 3GPP TS 25.104: "UTRAN(BS) FDD; Radio transmission and reception".
- [5] 3GPP TS 25.102: "UTRAN (UE) TDD; Radio transmission and reception".
- [6] 3GPP TS 25.105: "UTRAN (BS) TDD; Radio transmission and reception".
- [7] 3GPP TS 25.303: "Interlayer Procedures in Connected Mode".
- [8] (void)
- [9] 3GPP TS 25.142: "Base station conformance testing (TDD)".
- [10] (void)
- [11] (void)
- [12] 3GPP TR 25.922: "RRM Strategies".
- [13] (void)
- [14] 3GPP TS 25.225: "Physical layer measurements (TDD)".
- [15] 3GPP TS 25.302: "Services provided by physical layer".
- [16] 3GPP TS 25.331: "RRC protocol specification".
- [17] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [18] 3GPP TS 25.304: "UE procedures in idle mode".
- [19] ETSI ETR 273-1-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement of radiated methods of measurement (using test sites) and evaluation of the corresponding measurement uncertainties; Part 1: Uncertainties in the measurement of mobile radio equipment characteristics; Sub-part 2: Examples and annexes".
- [20] 3GPP TS 05.05: "Radio transmission and reception".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purpose of the present document the following definitions apply.

The main general definitions strictly related to the transmission and reception characteristics but important also for this specification can be found in [3] for UE FDD, in [4] for BS FDD, in [5] for UE TDD, in [6] for BS TDD.

Node B A logical node responsible for radio transmission / reception in one or more cells to/from the User Equipment. Terminates the Iub interface towards the RNC

3.2 Symbols

For the purposes of the present document, the following symbols apply:

[...] Values included in square bracket must be considered for further studies, because it means that a decision about that value was not taken.

$\frac{DPCH_E_c}{I_{or}}$	The ratio of the transmit energy per PN chip of the DPCH to the total transmit power spectral density at the Node B antenna connector.
E_c	Average energy per PN chip.
$\frac{E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for different fields or physical channels to the total transmit power spectral density at the Node B antenna connector.
I_o	The total received power density, including signal and interference, as measured at the UE antenna connector.
I_{oc}	The power spectral density of a band limited white noise source (simulating interference from other cells) as measured at the UE antenna connector.
I_{or}	The total transmit power spectral density of the down link at the Node B antenna connector.
\hat{I}_{or}	The received power spectral density of the down link as measured at the UE antenna connector.
$\frac{OCNS_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the OCNS to the total transmit power spectral density at the Node B antenna connector.
$\frac{PICH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the PICH to the total transmit power spectral density at the Node B antenna connector.
$\frac{PCCPCH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the PCCPCH to the total transmit power spectral density at the Node B antenna connector.
$\frac{SCH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the SCH to the total transmit power spectral density at the Node B antenna connector. The transmit energy per PN chip for the SCH is averaged over the 256 chip duration when the SCH is present in the time slot.

PENALTY_TIME	Defined in TS 25.304
Qhyst	Defined in TS 25.304
Qoffset _{s,n}	Defined in TS 25.304
Qqualmin	Defined in TS 25.304
Qrxlevmin	Defined in TS 25.304
Sintersearch	Defined in TS 25.304
Sintrasearch	Defined in TS 25.304
SsearchRAT	Defined in TS 25.304
T1	Time period 1
T2	Time period 2
TEMP_OFFSET	Defined in TS 25.304
Treselection	Defined in TS 25.304
UE_TXPWR_MAX_RACH	Defined in TS 25.304

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACPR	Adjacent Channel Power Ratio
BER	Bit Error Ratio
BLER	Block Error Ratio
BS	Base Station
CW	Continuous wave (unmodulated signal)
CFN	Connection Frame Number
CPICH	Common Pilot Channel
DL	Downlink (forward link)
DPCH	Dedicated Physical Channel
DRX	Discontinuous Reception
EIRP	Equivalent Isotropic Radiated Power
FDD	Frequency Division Duplex
OCNS	Orthogonal Channel Noise Simulator, a mechanism used to simulate the users or control signals on the other orthogonal channels of a Forward link.
P-CCPCH	Primary Common Control Physical Channel
PICH	Paging Indicator Channel
PIN	Personal Identification Number
PLMN	Public Land Mobile Network
PPM	Parts Per Million
RRM	Radio Resource Management
RRC	Radio Resource Control
RSCP	Received Signal Code Power
RSSI	Received Signal Strength Indicator
SCH	Synchronization Channel consisting of Primary and Secondary synchronization channels
SFN	System Frame Number
SIR	Signal to Interference ratio
TDD	Time Division Duplex
TPC	Transmit Power Control
UE	User Equipment
UL	Uplink (reverse link)
UTRA	UMTS Terrestrial Radio Access

3.4 Test tolerances

The requirements given in the present document make no allowance for measurement uncertainty. The test specification 34.122 and 25.142 define test tolerances. These test tolerances are individually calculated for each test. The test tolerances are then added to the limits in this specification to create test limits. The measurement results are compared against the test limits as defined by the shared risk principle.

Shared Risk is defined in ETR 273 Part 1 sub-part 2 section 6.5.

4 Idle Mode

4.1 Cell Selection

4.1.1 Introduction

After a UE has switched on and a PLMN has been selected, the Cell selection process takes place, as described in TS25.304. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a TDD cell, the UE shall attempt to detect, synchronise and monitor intra-frequency, inter-frequency and inter-RAT cells indicated in the measurement control system information of the serving cell. UE measurement activity is also controlled by measurement rules defined in TS25.304, allowing the UE to limit its measurement activity if certain conditions are fulfilled.

4.2.2 Requirements

4.2.2.1 Measurement and evaluation of cell selection criteria S of serving cell

The UE shall measure the PCCPCH RSCP level of the serving cell and evaluate the cell selection criterion S defined in TS25.304 for the serving cell at least every DRX cycle. The UE shall filter the PCCPCH RSCP measurement of the serving cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureTDD}}/2$ (see table 4.1).

If the UE has evaluated in N_{serv} successive measurements that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated in the measurement control system information, regardless of the measurement rules currently limiting UE measurement activities.

If the UE has not found any new suitable cell based on searches and measurements of the neighbour cells indicated in the measurement control system information for 12 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS25.304.

4.2.2.2 Measurement of intra-frequency cells

The UE shall measure PCCPCH RSCP at least every $T_{\text{measureTDD}}$ (see table 4.1) for intra-frequency cells that are identified and measured according to the measurement rules. $T_{\text{measureTDD}}$ is defined in Table 4.1. The UE shall filter PCCPCH RSCP measurements of each measured intra-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureTDD}}/2$.

The filtering shall be such that the UE shall be capable of evaluating that an intra-frequency cell has become better ranked than the serving cell within $T_{\text{evaluateTDD}}$ (see table 4.1), from the moment the intra-frequency cell became at least 2 dB better ranked than the current serving cell, provided that Treselection timer is set to zero.

If Treselection timer has a non zero value and the intra frequency cell is better ranked than the serving cell, the UE shall evaluate this intra frequency cell for the Treselection time. If this cell remains better ranked within this duration, then the UE shall reselect that cell.

4.2.2.3 Measurement of inter-frequency TDD cells

The UE shall measure PCCPCH RSCP at least every $(N_{\text{carrier}}-1) * T_{\text{measureTDD}}$ (see table 4.1) for inter-frequency cells that are identified and measured according to the measurement rules. The parameter N_{carrier} is the number of carriers used for TDD cells. The UE shall filter PCCPCH RSCP measurements of each measured inter-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureTDD}}/2$.

The filtering of PCCPCH RSCP shall be such that the UE shall be capable of evaluating that an already identified inter-frequency cell has become better ranked than the serving cell within $(N_{\text{carrier}}-1) * T_{\text{evaluateTDD}}$ from the moment the inter-frequency cell became at least 3 dB better than the current serving cell provided that Treselection timer is set to zero. For non-identified inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least 3 dB better than the current serving cell provided that Treselection timer is set to zero.

If Treselection timer has a non zero value and the inter-frequency cell is better ranked than the serving cell, the UE shall evaluate this inter-frequency cell for the Treselection time. If this cell remains better ranked within this duration, then the UE shall reselect that cell.

4.2.2.4 Measurement of inter-frequency FDD cells

The UE shall measure the CPICH RSCP and CPICH Ec/Io of each FDD neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureFDD}}$ (see table 4.1). The UE shall filter CPICH RSCP measurements of each measured inter-frequency cell using at least 2 measurements which are taken so that the time difference between the measurements is at least $T_{\text{measureFDD}}/2$.

The filtering of CPICH RSCP shall be such that the UE shall be capable of evaluating that an already identified inter-frequency cell has become better ranked than the serving cell within $N_{\text{carrierFDD}} * T_{\text{evaluateFDD}}$ from the moment the inter-frequency cell became at least 5 dB better than the current serving cell provided that Treselection timer is set to zero. For non-identified inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least 5 dB better than the current serving cell provided that Treselection timer is set to zero. The parameter $N_{\text{carrierFDD}}$ is the number of carriers used for FDD cells.

If Treselection timer has a non zero value and the inter-frequency cell is better ranked than the serving cell, the UE shall evaluate this inter-frequency cell for the Treselection time. If this cell remains better ranked within this duration, then the UE shall reselect that cell.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304. If FDD cell has been ranked as the best cell and IE cell_selection_and_reselection-quality_measure is set to CPICH Ec/No, then UE shall perform a second ranking of the FDD cells using CPICH Ec/Io as the measurement quantity, before performing cell re-selection..

4.2.2.5 Measurement of inter-RAT GSM cells

The UE shall measure the signal level of the GSM BCCH carrier of each GSM neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureGSM}}$ (see table 4.1). The UE shall maintain a running average of 4 measurements for each cell. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

If GSM measurements are required by the measurement rules in TS25.304, the UE shall attempt to verify the BSIC at least every 30 seconds for each of the 4 strongest GSM BCCH carriers and rank the verified GSM BCCH cells according to the cell re-selection criteria in TS25.304. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell.

If the UE detects a BSIC, which is not indicated in the measurement control system information, the UE shall not consider that GSM BCCH carrier in cell reselection. The UE also shall not consider the GSM BCCH carrier in cell reselection, if the UE can not demodulate the BSIC of that GSM BCCH carrier.

4.2.2.6 Evaluation of cell reselection criteria

The UE shall evaluate the cell re-selection criteria defined in TS 25.304 for the cells, which have new measurement results available, at least once every DRX cycle.

UE shall perform cell reselection immediately after the UE has found a better ranked suitable cell, unless less than 1 second has elapsed from the moment the UE started camping on the current serving cell.

4.2.2.7 Maximum interruption time in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed 50 ms.

At inter-frequency and inter-RAT cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-frequency cell. For inter-frequency cell re-selection the interruption time shall not exceed $T_{\text{SI}} + 50$ ms. For inter-RAT cell re-selection the interruption time shall not exceed $T_{\text{BCCH}} + 50$ ms.

T_{SI} is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS25.331 for a UTRAN cell.

T_{BCCH} is the maximum time allowed to read BCCH data from a GSM cell as defined in TS05.08.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors.

Table 4.1: $T_{measureTDD}$, $T_{evaluateTDD}$, $T_{measureFDD}$, $T_{evaluateFDD}$ and $T_{measureGSM}$

DRX cycle length [s]	N_{serv} (number of DRX cycles)	$T_{measureTDD}$ [s] (number of DRX cycles)	$T_{evaluateTDD}$ [s] (number of DRX cycles)	$T_{measureFDD}$ [s] (number of DRX cycles)	$T_{evaluateFDD}$ [s] (number of DRX cycles)	$T_{measureGSM}$ [s] (number of DRX cycles)
0.08	4	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	2.56 (32 DRX cycles)
0.16	4	0.64 (4)	2.56 (16)	0.64 (4)	2.56 (16)	2.56 (16)
0.32	4	1.28 (4)	5.12 (16)	1.28 (4)	5.12 (16)	5.12 (16)
0.64	4	1.28 (2)	5.12 (8)	1.28 (2)	5.12 (8)	5.12 (8)
1.28	2	1.28 (1)	6.4 (5)	1.28 (1)	6.4 (5)	6.4 (5)
2.56	2	2.56 (1)	7.68 (3)	2.56 (1)	7.68 (3)	7.68 (3)
5.12	1	5.12 (1)	10.24 (2)	5.12 (1)	10.24 (2)	10.24 (2)

In idle mode, UE shall support DRX cycles lengths 0.64, 1.28, 2.56 and 5.12 s, according to [16].

4.2.2.8 Number of cells in cell lists

For idle mode cell re-selection purposes, the UE shall be capable of monitoring:

- 32 intra-frequency cells (including serving cell), and
- 32 inter-frequency cells, including
 - TDD mode cells on maximum 2 additional TDD carriers, and
 - Depending on UE capability, FDD mode cells, distributed on up to 3 FDD carriers, and
 - Depending on UE capability, 32 inter RAT GSM cells,

as indicated in cell information lists sent in system information (BCCH).

5 UTRAN Connected Mode Mobility

This section contains the requirements on the mobility procedures in UTRAN connected mode such as handover and cell re-selection.

Requirements related to the measurements in support of the execution of the UTRAN connected mode mobility procedures are specified, currently not necessarily for all UTRAN connected mode states, in section 8.

The radio links the UE shall use are controlled by UTRAN with RRC signalling.

UE behaviour in response to UTRAN RRC messages is described in TS25.331.

The purpose of Cell reselection in CELL_FACH, CELL_PCH and URA_PCH states is that the UE shall select a better cell according to the cell reselection criteria in TS 25.304. CELL_FACH, CELL_PCH and URA_PCH states are described in TS 25.331.

5.1 TDD/TDD Handover

5.1.1 Introduction

The purpose of TDD/TDD handover is to change the cell of the connection between UE and UTRAN. The handover procedure is initiated from UTRAN with a RRC message that implies a handover, refer to TS25.331. The handover procedure may cause the UE to change its frequency.

5.1.2 Requirements

5.1.2.1 TDD/TDD Handover delay

Procedure delay for all procedures, that can command a handover, are specified in TS25.331 section 13.5.2.

When the UE receives a RRC message implying handover with the activation time "now" or earlier than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH within D_{handover} seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH at the designated activation time.

where:

D_{handover} equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.1.2.2.

5.1.2.2 Interruption time

The interruption time i.e. the time between the last TTI containing a transport block on the old DPCH and the time the UE starts transmission of the new uplink DPCH, shall be less than the value in table 5.1 for intra-frequency handover and TDD/TDD inter-frequency handover. There is different requirement on the interruption time depending on if the cell is known or not and if the SFN of the target cell has to be decoded by the UE or not.

A cell shall be regarded as known by the UE if either or both of the following conditions are true:

- it has been measured during the last 5 seconds or
- a dedicated connection existed between the UE and the cell during the last 5 seconds.

The SFN of the target cell needs not to be decoded by the UE if either or both of the following conditions are true:

- a handover with timing maintain is commanded by the UTRAN or
- the SFN of the target cell is known by the UE

Table 5.1 TDD/TDD handover – interruption time

TDD/TDD handover case	Maximum delay [ms]			
	Known Cell		Unknown Cell	
	SFN not to be decoded	SFN needs to be decoded	SFN not to be decoded	SFN needs to be decoded
Intra-frequency	40	70	350	400
Inter-frequency	40	70	350	400

The interruption time includes the time that can elapse till the appearance of the channel required for the synchronisation, which can be up to one frame (10ms). And the time that can elapse till the appearance of the slot in which the new uplink DPCH shall be transmitted, which can be up to one frame (10ms).

The requirement in Table 5-1 for the unknown cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

NOTE: One synchronisation attempt can consist of coherent averaging using several frames.

5.2 TDD/FDD Handover

5.2.1 Introduction

The purpose of TDD/FDD handover is to change the mode between FDD and TDD.

The handover procedure is initiated from UTRAN with a handover command message, refer to TS25.331. The handover procedure causes the UE to change its frequency.

5.2.2 Requirements

These requirements shall apply only to TDD/FDD UE.

The requirements do not apply if FDD macro-diversity is used.

5.2.2.1 Handover delay

Procedure delay for all procedures, that can command a hard handover, are specified in TS25.331 section 13.5.2.

When the UE receives a RRC message implying hard handover with the activation time "now" or earlier than $D_{handover}$ seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCCH within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than $D_{handover}$ seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCCH at the designated activation time.

where:

$D_{handover}$ equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.2.2.2.

5.2.2.2 Interruption time

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old DTCH and the time the UE starts transmission of the new uplink DPCCCH. The interruption time shall be less than the value in table 5.2.

There is different requirement on the interruption time depending on if the cell is known or not and if the SFN of the target cell needs to be decoded by the UE during the interruption time or not.

The definition of known cell can be found in section 5.1.2.2.

Table 5.2 TDD/FDD interruption time

cell present in the handover command message	Maximum delay [ms]		
	Known Cell		Unknown cell
	SFN not to be decoded	SFN needs to be decoded	SFN needs to be decoded
1	[100]	[130]	[400]

The interruption time includes the interruption uncertainty when changing the timing from the old TDD to the new FDD cell, which can be up to one frame (10ms) and the time required for measuring the downlink DPCCCH channel as stated in TS 25.214 section 4.3.1.2.

The requirement in Table 5-2 for the unknown cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

5.3 TDD/GSM Handover

5.3.1 Introduction

The purpose of inter-RAT handover from UTRAN TDD to GSM is to transfer a connection between the UE and UTRAN TDD to GSM. The handover procedure is initiated from UTRAN with a RRC message (HANDOVER FROM UTRAN COMMAND). The procedure is described in TS25.331 section 8.3.7.

5.3.2 Requirements

These requirements shall apply only to TDD/GSM UE.

This clause presents some of the important aspects of GSM handover required to be performed by the UE.

The underlying requirement is to ensure continuity of service to the UMTS user. The handover requirements for 3G to GSM should be comparable to GSM to GSM handover requirements.

5.3.2.1 Handover delay

When the UE receives a RRC HANDOVER FROM UTRAN COMMAND with the activation time "now" or earlier than the value in Table 5.3 from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 05.10) on the new channel of the new RAT within the value in Table 5.3 from the last TTI containing the RRC command. If the access is delayed to an indicated activation time later than the value in Table 5-3 from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 05.10) on the channel of the new RAT at the designated activation time.

The UE shall process the RRC procedures for the RRC HANDOVER FROM UTRAN COMMAND within 50 ms. If the activation time is used, it corresponds to the CFN of the UTRAN channel.

Table 5.3: TDD/GSM handover –handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	90
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	190

5.3.2.2 Interruption time

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old channel and the time the UE is ready to transmit on the new channel, shall be less than the value in Table 5.4. The requirement in Table 5.4 for the case, that UE is not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received, is valid when the signal quality of the GSM cell is good enough for successful synchronisation with one attempt.

Table 5.4: TDD/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	40
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	140

5.4 Cell Re-selection in Cell_FACH

5.4.1 Introduction

When a Cell Re-selection process is triggered according to 25.331, the UE shall evaluate the cell re-selection criteria specified in TS 25.304, based on radio measurements, and if a better cell is found that cell is selected.

5.4.2 Requirements

The cell re-selection delays specified below are applicable when the RRC parameter $T_{\text{reselection}}$ is set to 0. Otherwise the Cell reselection delay is increase by $T_{\text{reselection}}$.

P-CCPCH RSCP shall be used for cell reselection in Cell-FACH state to another TDD cell, CPICH RSCP shall be used for re-selection to a FDD cell and GSM carrier RSSI shall be used for cell re-selection to a GSM cell. The accuracies of the measurements used for a cell-reselection in an AWGN environment shall comply with the requirements in chapter 9.

5.4.2.1 Measurements

The UE measurement capability according to section 8.4.2.1 shall apply.

5.4.2.2 Cell re-selection delay

The cell re-selection delay is defined as the time between the occurrence of an event which will trigger Cell Reselection process and the moment in time when the UE starts sending the RRC CELL UPDATE message to the UTRAN.

5.4.2.2.1 Intra-frequency cell re-selection

The cell re-selection delay in CELL_FACH state for intra frequency cells shall be less than:

$$T_{\text{reselection, intra}} = T_{\text{identify, intra}} + T_{\text{SI}}$$

where

$T_{\text{identify, intra}}$ = Specified in 8.4.2.2.1.

T_{SI} = Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

5.4.2.2.2 Inter-frequency TDD cell re-selection

The cell re-selection delay in CELL_FACH state for inter-frequency TDD cells shall be less than:

$$T_{\text{reselection, TDD, inter}} = T_{\text{identify, inter}} + T_{\text{SI}}$$

where

$T_{\text{identify, inter}}$ = Specified in 8.4.2.3.1.

T_{SI} = Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

5.4.2.2.3 Inter-frequency FDD cell re-selection

The cell re-selection delay in CELL_FACH state for inter-frequency FDD cells shall be less than:

$$T_{\text{reselection, FDD}} = T_{\text{identify, FDD}} + T_{\text{SI}}$$

where

$T_{\text{identify, FDD}}$ = Specified in 8.4.2.4.1.

T_{SI} = Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

5.4.2.2.4 Inter-RAT cell re-selection

The cell re-selection delay in CELL_FACH state for inter-RAT cells shall be less than:

$$T_{\text{reselection, GSM}} = T_{\text{identify, GSM}} + T_{\text{Measurement_GSM}} + T_{\text{SI}}$$

where

$T_{\text{identify, GSM}}$ = Is the worst case time for identification of one previously not identified GSM cell and is specified in TS25.225 Annex A.

T_{SI} = Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

$T_{\text{Measurement_GSM}}$ is the worst case time for measuring one previously identified GSM carrier.

$$T_{\text{Measurement, GSM}} = \text{Max} \left\{ 480\text{ms}, 8 \cdot \frac{N_{\text{carriers}}}{N_{\text{GSM carrier RSSI}}} \cdot T_{\text{meas}} \right\}$$

where:

N_{carriers} is the number of GSM carriers in the Inter-RAT cell info list

$N_{\text{GSM carrier RSSI}}$ can be derived from the values in table 8.7 section 8.4.2.5.1.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

5.4.2.3 Maximum interruption in FACH message reception

The UE shall perform the cell re-selection with minimum interruption in FACH message reception.

The UE shall not interrupt the FACH message reception during measurements required for cell re-selection

The UE shall not interrupt the FACH message reception during the evaluation process of a cell required for a cell re-selection.

In case the UE reselects a cell the interruption time shall not exceed $T_{\text{SI}}+50\text{ms}$. T_{SI} is the longest repetition period for the system information to be read by the UE to camp on the cell.

5.5 Cell Re-selection in Cell_PCH

5.5.1 Introduction

The UE shall evaluate the cell re-selection criteria specified in TS 25.304, based on radio measurements, and if a better cell is found that cell is selected.

5.5.2 Requirements

Requirements for cell re-selection in Cell_PCH state are the same as for cell re-selection in idle mode, see section 4.2. The UE shall support all DRX cycle lengths in table 4.1, according to TS25.331.

5.6 Cell Re-selection in URA_PCH

5.6.1 Introduction

The UE shall evaluate the cell re-selection criteria specified in TS 25.304, based on radio measurements, and if a better cell is found that cell is selected.

5.6.2 Requirements

Requirements for cell re-selection in URA_PCH state are the same as for cell re-selection in idle mode, see section 4.2. The UE shall support all DRX cycle lengths in table 4.1, according to TS25.331.

6 void

6A RRC Connection Control

6A.1 RRC Connection re-establishment

6A.1.1 Introduction

RRC connection re-establishment is needed, when a UE in state CELL_DCH loses radio connection due to radio link failure. The procedure when a radio link failure occurs in CELL_DCH is specified in TS 25.331.

6A.1.2 Requirements

The requirements in this section are applicable when the UE performs a RRC connection re-establishment to a cell belonging to any of the frequencies present in the previous (old) monitored set.

When the UE is in CELL_DCH state, the UE shall be capable of sending a CELL UPDATE message using the cause "radio link failure" within $T_{RE-ESTABLISH}$ seconds from when the CPHY-Out-Of-Synch primitive indicates lost synchronisation.

The RRC connection re-establishment delay requirement ($T_{RE-ESTABLISH-REQ}$) is defined as the time between the moment when the CPHY-Out-Of-Synch primitive indicates lost synchronisation, to when the UE starts to send a CELL UPDATE message using the cause "radio link failure" on the PRACH.

$T_{RE-ESTABLISH-REQ}$ is depending on whether the target cell is known by the UE or not. A cell is known if either or both of the following conditions are true:

- the UE has had a dedicated connection to the cell during the last 5 seconds
- the cell has been measured by the UE during the last 5 seconds

The RRC connection re-establishment delay shall be less than

$$50\text{ms} + T_{\text{search}} + T_{\text{SI}}$$

in case that the target cell is known by the UE, and

$$50\text{ms} + T_{\text{search}} * NF + T_{\text{SI}}$$

in case that the target cell is not known by the UE.

Where

T_{search} is the time it takes for the UE to search the cell.

$T_{\text{search}} = 100$ ms if the target cell is known by the UE, and

$T_{\text{search}} = 800$ ms if the target cell is not known by the UE.

T_{SI} is the maximum repetition period of all relevant system information blocks that needs to be received by the UE to camp on a cell (ms).

NF is the number of different frequencies in the monitored set.

This requirement assumes radio conditions to be sufficient, so that reading of system information can be done without errors.

6A.2 Transport format combination selection in UE

6A.2.1 Introduction

When the UE estimates that a certain TFC would require more power than the maximum transmit power, it shall limit the usage of transport format combinations for the assigned transport format set, according to the functionality specified in section 11.4 in TS25.321. This in order to make it possible for the network operator to maximise the coverage. Transport format combination selection is described in section 11.4 of TS 25.321.

6A.2.2 Requirements

The UE shall continuously evaluate based on the *Elimination*, *Recovery* and *Blocking* criteria defined below, how TFCs can be used for the purpose of TFC selection. The evaluation shall be performed using the estimated UE transmit power of a given TFC. The UE transmit power estimation shall be made using the UE transmitted power measured over the measurement period and the gain factors of the corresponding TFC.

The UE shall consider the *Elimination* criterion for a given TFC to be fulfilled if the estimated UE transmit power needed for this TFC is greater than the Maximum UE transmitter power for at least X out of Y successive measurement periods. The MAC in the UE shall consider that the TFC is in Excess-Power state for the purpose of TFC selection.

MAC in the UE shall indicate the available bitrate for each logical channel to upper layers within [15 ms] from the moment the *Elimination* criterion was fulfilled.

The UE shall consider the *Recovery* criterion for a given TFC to be fulfilled if the estimated UE transmit power needed for this TFC has not been greater than the Maximum UE transmitter power for at least Y successive measurement periods. The MAC in the UE shall consider that the TFC is in Supported state for the purpose of TFC selection.

MAC in the UE shall indicate the available bitrate for each logical channel to upper layers within T_{notify} from the moment the *Recovery* criterion was fulfilled.

The UE shall consider the *Blocking* criterion for a given TFC to be fulfilled at the latest at the start of the longest uplink TTI after the moment at which the TFC will have been in Excess-Power state for a duration of

$$(T_{\text{notify}} + T_{\text{modify}} + T_{\text{L1_proc}}).$$

where:

T_{notify} equals [15] ms, and

T_{modify} equals $\text{MAX}(T_{\text{adapt_max}}, T_{\text{TTI}})$, and

$T_{\text{L1_proc}}$ equals 15 ms, and

$T_{\text{adapt_max}}$ equals $\text{MAX}(T_{\text{adapt_1}}, T_{\text{adapt_2}}, \dots, T_{\text{adapt_N}})$, and

N equals the number of logical channels that need to change rate, and

T_{adapt_n} equals the time it takes for higher layers to provide data to MAC in a new supported bitrate, for logical channel n. Table 6A.1 defines T_{adapt} times for different services. For services where no codec is used T_{adapt} shall be considered to be equal to 0 ms.

Table 6A.1: T_{adapt}

Service	T_{adapt} [ms]
AMR	40

T_{TTI} equals the longest uplink TTI of the selected TFC (ms).

The Maximum UE transmitter power is defined as follows

Maximum UE transmitter power = MIN(Maximum allowed UL TX Power, UE maximum transmit power)

where

Maximum allowed UL TX Power is set by UTRAN and defined in [16], and

UE maximum transmit power is defined by the UE power class, and specified in [5].

6A.3 Maximum allowed UL TX Power

6A.3.1 Introduction

UTRAN may limit the power the UE is using on the uplink by setting the maximum allowed UL TX power IE defined in TS25.331.

6A.3.2 Requirements

For each measurement period, the UE shall with the use of the UE transmitted power measurement, estimate if it has reached the Maximum allowed UL TX Power or not. With tolerances as defined for the UE transmitted power measurement accuracy (section 9.1.2.1), the UE output power shall not exceed the Maximum allowed UL TX Power, as set by the UTRAN.

7 Timing characteristics

7.1 Timing Advance (TA) requirements

7.1.1 Introduction

The timing advance is initiated from UTRAN with an RRC message that implies an adjustment of the timing advance, see TS 25.331 section 8.6.6.26.

To update timing advance of a UE, the UTRAN measures RX Timing deviation. The measurements are defined in TS 25.225 and measurement accuracies are specified in section 9.

7.1.2 Requirements

7.1.2.1 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with an accuracy better than or equal to ± 0.5 chip to the signalled timing advance value.

7.1.2.2 Timing Advance adjustment delay

The UE shall adjust the timing of its transmission at the designated activation time, when the indicated activation time is later than D_{TA} msec from the end of the last TTI containing the RRC message implying an adjustment of the timing advance.

D_{TA} equals the RRC procedure delay of the RRC message implying an adjustment of the timing advance as defined in TS25.331 section 13.5.

7.2 Cell synchronization accuracy

7.2.1 Definition

Cell synchronization accuracy is defined as the maximum deviation in frame start times between any pair of cells on the same frequency that have overlapping coverage areas.

7.2.2 Minimum requirements

The cell synchronization accuracy shall be better than or equal to $3\mu\text{s}$.

7.3 UE Transmit Timing

7.3.1 Definition

UE transmit timing is defined as the frame start time of uplink transmissions relative to the downlink frame timing at zero propagation delay with timing advance turned off. The reference point for UE transmit timing shall be the antenna connector. This is applicable for the AWGN propagation condition. In the case of multi-path fading conditions, the reference point for UE transmit timing shall be the first significant path of the received PCCPCH.

7.3.2 Minimum Requirement

The UE transmit timing error shall be within 0 to +3 chips for the AWGN propagation condition.

8 UE Measurements Procedures

8.1 Measurements in CELL_DCH State

8.1.1 Introduction

This section contains requirements on the UE regarding measurement reporting in CELL_DCH state. The requirements are split in TDD intra frequency, TDD inter frequency, FDD and GSM measurements. These measurements may be used by the UTRAN, e.g. for handover decisions. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and parallel measurements are specified in section 8.2. For the description of the idle intervals see TS 25.225, Annex A.

8.1.2 Requirements

8.1.2.1 UE Measurement Capability

The UE shall be able to monitor up to:

- 32 intra frequency TDD cells (including serving cell), and

- 32 inter frequency cells, including
 - TDD mode cells distributed on up to 2 additional TDD carriers and
 - Depending on UE capability, FDD mode cells, distributed on up to 3 FDD carriers.
- Depending on UE capability, 32 inter RAT GSM cells.

Performance requirements for different types of measurements and different number of cells are defined in the following sections.

The requirements in section 9 are applicable for a UE performing measurements according to this section.

8.1.2.2 TDD intra frequency measurements

During the CELL_DCH state the UE shall continuously measure identified intra frequency cells and search for new intra frequency cells in the monitoring set. In case the network requests the UE to report detected set cells, the UE shall also search for intra frequency cells outside the monitored and active set. Cells, which are neither included in the active set nor in the monitored set and are identified by the UE, belong to the detected set according to [16]. Intra frequency measurements can be performed (simultaneously to data reception from the active cell) in all time slots not allocated to transmission nor the time used for inter frequency measurements.

8.1.2.2.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify intra}} = \text{Max} \left\{ 800, T_{\text{basic identify TDD, intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \right\} \text{ms}$$

8.1.2.2.2 UE P-CCPCH RSCP measurement capability

In the CELL_DCH state the measurement period for intra frequency P-CCPCH RSCP measurements is 200 ms. When no inter frequency measurement is scheduled, the UE shall be capable of performing P-CCPCH RSCP measurements for 6 identified intra-frequency cells of the monitored set, and the UE physical layer shall be capable of reporting these measurements to higher layers with the measurement period of 200 ms. When inter-frequency measurements are required by the network, the UE shall be capable of performing P-CCPCH RSCP measurements for at least $Y_{\text{measurement intra}}$ cells, where $Y_{\text{measurement intra}}$ is defined in the following equation. The detectable cells, that were not measured during that measurement period, shall be measured in the following measurement periods. The measurement accuracy for all measured cells shall be as specified in the section 9.

$$Y_{\text{measurement intra}} = \text{Floor} \left\{ X_{\text{basic measurement TDD}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement Period, Intra}}} \right\}$$

whereby function Floor(x) takes the integer part of x.

$X_{\text{basic measurement TDD}} = 6$ (cells)

$T_{\text{Measurement Period, Intra}} = 200$ ms. The measurement period for Intra frequency P-CCPCH RSCP measurements.

T_{Intra} : This is the minimum time (representing a time corresponding to an integer number of full slots) that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. It is assumed for the requirement that the slot allocation allows measurement windows to be of minimum duration necessary to perform the measurements.

$T_{\text{basic identify TDD, intra}} = 800$ ms. This is the time period used in the intra frequency equation where the maximum allowed time for the UE to identify a new TDD cell is defined. (side conditions are defined in subclause 8.1.2.6).

8.1.2.2.2A Timeslot ISCP measurement capability

In the CELL_DCH state the measurement period for intra frequency Timeslot ISCP measurements on arbitrary DL timeslots, including Beacon timeslots is 400 ms. When no inter frequency measurement is scheduled, the UE shall be

capable of performing Timeslot ISCP measurements for a total of 10 different combinations of an arbitrary DL timeslot and an intra-frequency cell [16], including the current serving cell. The UE physical layer shall be capable of reporting Timeslot ISCP measurements to higher layers with the measurement period of 400 ms.

When inter-frequency measurements are required by the network, the UE shall be capable of performing Timeslot ISCP measurements for at least $Y_{\text{measurement intra ISCP}}$ different combinations, where $Y_{\text{measurement intra ISCP}}$ is defined in the following equation. Any Timeslot ISCP measurement that could not be performed during that measurement period, shall be measured in the following measurement periods. The measurement accuracy of the Timeslot ISCP measurement shall be as specified in the section 9.

$$Y_{\text{measurement intra ISCP}} = \text{Floor} \left\{ X_{\text{basic measurement ISCP}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement Period, Intra, ISCP}}} \right\}$$

whereby function Floor(x) takes the integer part of x.

- $X_{\text{basic measurement ISCP}} = 10$ (combinations of an arbitrary DL timeslot and an intra-frequency cell)
- $T_{\text{Measurement Period, Intra, ISCP}} = 400$ ms. The measurement period for Intra frequency Timeslot ISCP measurements.
- T_{Intra} : This is the minimum time (representing a time corresponding to an integer number of full slots) that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. It is assumed for the requirement that the slot allocation allows measurement windows to be of minimum duration necessary to perform the measurements.

8.1.2.2.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.4 Event-triggered Periodic Reporting

Reported measurements in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.5 Event Triggered Reporting.

8.1.2.2.5 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report, until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The event triggered measurement reporting delay, on cells belonging to the monitored set, measured without L3 filtering shall be less than $T_{\text{identify intra}}$ defined in Section 8.1.2.2.1. When L3 filtering is used an additional delay can be expected.

If a cell, belonging to the monitored set, has been detectable at least for the time period $T_{\text{identify intra}}$ and then enters the reporting range, the event triggered measurement reporting delay shall be less than $T_{\text{Measurement Period Intra}}$ when the L3 filter has not been used and the UE P-CCPCH measurement capabilities of section 8.1.2.2.2 are valid.

8.1.2.3 TDD inter frequency measurements

When signalled by the network during CELL_DCH state, the UE shall continuously measure detected inter frequency cells and search for new inter frequency cells indicated in the measurement control information.

8.1.2.3.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify_inter}} = \text{Max} \left\{ 5000, T_{\text{basic_identify_TDD,inter}} \cdot \frac{T_{\text{Measurement_Period, Inter}}}{T_{\text{Inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

8.1.2.3.2 P-CCPCH RSCP measurement period

When TDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting P-CCPCH RSCP measurements to higher layers with measurement accuracy as specified in section 9 and with measurement period given by

$$T_{\text{measurement_inter}} = \text{Max} \left\{ 480, T_{\text{basic_measurement_TDD_inter}} \cdot \frac{T_{\text{Measurement_Period, Inter}}}{T_{\text{Inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

In case of a dual receiver UE, the measurement period for inter frequency P-CCPCH RSCP measurements is 480 ms.

$T_{\text{Measurement_Period_Inter}} = 480$ ms. The period used for calculating the measurement period $T_{\text{measurement_inter}}$ for inter frequency P-CCPCH RSCP measurements.

T_{Inter} : This is the minimum time (representing a time corresponding to an integer number of full slots) available for inter frequency measurements during the period $T_{\text{Measurement_Period_inter}}$ with an arbitrarily chosen timing. The minimum time depends on the channel allocation and is calculated by assuming $2 \cdot 0.5$ ms for implementation margin (for the description of the idle intervals see Annex A of 25.225). It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

$T_{\text{basic_identify_TDD,inter}} = 800$ ms. This is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD cell is defined. (side conditions are defined in subclause 8.1.2.6).

$T_{\text{basic_measurement_TDD_inter}} = 50$ ms. This is the time period used in the equation for defining the measurement period for inter frequency P-CCPCH RSCP measurements.

N_{Freq} : number of TDD frequencies indicated in the interfrequency measurement control information.

8.1.2.3.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.3.4 Event Triggered Reporting.

8.1.2.3.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report, until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify_inter}}$ defined in Section 8.1.2.3.1. When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{\text{identify_inter}}$ and then enters the reporting range, the event triggered measurement reporting delay shall be less than $T_{\text{Measurement_Period_Inter}}$ when the L3 filter has not been used.

8.1.2.4 FDD measurements

The requirements in this section apply only to UE supporting both TDD and FDD mode.

In the CELL_DCH state when FDD inter frequency measurements are scheduled the UE shall continuously measure detected inter frequency FDD cells and search for new inter frequency cells indicated in the measurement control information.

The UE shall be capable of measuring the requested measurement quantity of at least 32 cells on a maximum of 3 frequencies.

8.1.2.4.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify_FDD_inter}} = \text{Max} \left\{ 5000, T_{\text{basic_identify_FDD_inter}} \cdot \frac{T_{\text{Measurement_Period_FDD_inter}}}{T_{\text{FDD_inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

when CPICH Ec/Io \geq -20 dB, SCH_Ec/Io \geq -17 dB and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

8.1.2.4.2 Measurement period

When FDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9 with measurement period given by

$$T_{\text{measurement_FDD_inter}} = \text{Max} \left\{ T_{\text{Measurement_Period_FDD_inter}}, T_{\text{basic_measurement_FDD_inter}} \cdot \frac{T_{\text{Measurement_Period_FDD_inter}}}{T_{\text{FDD_inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

$T_{\text{Measurement_Period_FDD_inter}} = 480$ ms. The period used for calculating the measurement period $T_{\text{measurement_FDD_inter}}$ for inter frequency CPICH measurements.

$T_{\text{FDD_inter}}$: This is the minimum time as full slots that is available for inter frequency measurements, during the period $T_{\text{Measurement_Period_FDD_inter}}$ with an arbitrarily chosen timing. The minimum time depends on the channel allocation and is calculated by assuming $2 \cdot 0.5$ ms for implementation margin (for the description of the idle intervals see Annex A of 25.225). It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

$T_{\text{basic_identify_FDD_inter}} = 800$ ms. This is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD cell is defined.

$T_{\text{basic_measurement_FDD_inter}} = 50$ ms. This is the time period used in the equation for defining the measurement period for inter frequency CPICH measurements.

N_{Freq} : Number of FDD frequencies indicated in the inter frequency measurement control information.

8.1.2.4.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.4.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send event triggered measurement reports as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a

delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify_FDD_inter}}$ defined in Section 8.1.2.4.1. When L3 filtering is used an additional delay can be expected. If a cell has been detectable at least for the time period $T_{\text{identify_FDD_inter}}$ and then enters the reporting range, the event triggered measurement reporting delay shall be less than $T_{\text{Measurement_Period_FDD_Inter}}$ provided the timing to that cell has not changed more than ± 32 chips while transmission gap has not been available and the L3 filter has not been used.

8.1.2.5 GSM measurements

The requirements in this section applies only to UE supporting TDD and GSM.

When signalled by UTRAN during CELL_DCH state, the UE shall continuously measure GSM cells and search for new GSM cells given in the monitored set.

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified.

If BSIC verified is requested for a GSM cell the UE shall only report measurement quantities for that GSM cell with a BSIC "verified" according to section 8.1.2.5.2 "BSIC verification". If BSIC verification is not required for a GSM cell the UE shall report measurement quantities for that GSM cell irrespectively if the BSIC has been verified or not verified according to section 8.1.2.5.2 "BSIC verification".

If the UE does not need to perform GSM measurements in the idle intervals only, the requirements of handover measurements in TS 05.08 shall apply.

8.1.2.5.1 GSM carrier RSSI

An UE supporting GSM measurements shall be able to measure GSM carrier RSSI levels of GSM cells from the monitored set with acquisition speed defined in table 8.1. In the CELL_DCH state the measurement period for the GSM carrier RSSI measurement is 480 ms.

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 05.08, when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

Table 8.1

Idle Interval Length (slots)	Number of GSM carrier RSSI measurements
3	1
4	2
5	3
7	6
10	10
13	14

For the description of the idle intervals see Annex A of 25.225.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods. This means that, in this particular case, the L1 reporting period to higher layers of a GSM neighbour can be a multiple of the measurement period.

8.1.2.5.2 BSIC verification

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

1) Initial BSIC identification

Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the TDD and GSM cell. The UE shall trigger the initial BSIC identification within the

available idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The requirements for Initial BSIC identification can be found in section 8.1.2.5.2.1, "Initial BSIC identification"

2) BSIC re-confirmation

Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The requirements for Initial BSIC identification can be found in section 8.1.2.5.2.2, "BSIC re-confirmation"

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified. If GSM measurements are requested with BSIC verified the UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification) and from that moment the BSIC shall be re-confirmed at least once every $T_{\text{re-confirm_abort}}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". The time requirement for initial BSIC identification, $T_{\text{identify_abort}}$, and the BSIC re-confirmation interval $T_{\text{re-confirm_abort}}$ can be found in the sections below.

The worst-case time for identification of one previously not identified GSM cell measurement is specified in TS 25.225, Annex A.

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 05.05.

8.1.2.5.2.1 Initial BSIC identification

This measurement is performed in the idle intervals as specified in TS 25.225, Annex A (Fig. A.1).

For GSM cells that are requested with BSIC verified the UE shall attempt to decode the SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the measurement control information. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BSIC carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value after layer 3 filtering. If the BSIC of a GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $T_{\text{identify_abort}}$, the UE shall abort the BSIC decoding attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC decoding of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC decoding failed shall not be re-considered for BSIC decoding until BSIC decoding attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

The UE shall be able to perform initial BSIC decoding on one new GSM BCCH carrier within the time specified in Annex A in TS 25.225.

When N new GSM cells are to be BSIC identified the time is changed to $N * T_{\text{identify_abort}}$, with

$T_{\text{identify_abort}} = 5000$ ms. This is the time necessary to identify one new GSM cell. It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

8.1.2.5.2.2 BSIC re-confirmation

The requirements of this section are applicable for BSIC re-confirmation.

The UE shall maintain the timing information of at least 8 identified GSM cells. Initial timing information is obtained from the initial BSIC decoding. The timing information shall be updated every time the BSIC is decoded.

If more than one BSIC can be decoded within the same measurement window given by the idle intervals, priority shall be given to the least recently decoded BSIC.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM BCCH carrier within $T_{\text{re-confirm_abort}}$ seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM BCCH carrier. The GSM BCCH carrier shall be treated as a new GSM BCCH carrier with unidentified BSIC and

the GSM BCCH carrier shall be moved to the initial BSIC decoding procedure, see section 8.1.2.5.2.1. The UE shall be able to make BSIC re-confirmation attempts for the 8 strongest GSM cells in the monitored list.

This measurement shall be based on the idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The time requirement for BSIC re-confirmation is specified in Annex A in TS 25.225.

$T_{\text{re-confirm abort}} = 5000$ ms. This is the BSIC reconfirmation interval.

It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

8.1.2.6 TDD Synchronisation to new cells

Time for synchronisation to new cell is defined as the time from when the cell appears until the time when the cell is reported in a RRC message to the network. The time needed to synchronise depends on the level of the received signal and is different for inter and intra frequency cells.

These time limits are used in the requirements for the measurements in paragraph 8.1.2 as well as preconditions in paragraph 9.

The requirements given for by $T_{\text{basic identify TDD, intra}}$ and by $T_{\text{basic identify TDD, inter}}$ are valid under the following side conditions:

$$\left(\frac{P - \text{CCPCH} - E_c}{I_o} \right) \Big|_{\text{in dB}} \geq -8\text{dB}$$

$$\left(\frac{\text{SCH} - E_c}{I_o} \right) \Big|_{\text{in dB}} \geq -13\text{dB}$$

where the received P-CCPCH E_c/I_o is defined as

$$\left(\frac{P - \text{CCPCH} - E_c}{I_o} \right) \Big|_{\text{in dB}} = \left(\frac{P - \text{CCPCH} - E_c}{I_{or}} \right) \Big|_{\text{in dB}} - \left(\frac{I_o}{\hat{I}_{or}} \right) \Big|_{\text{in dB}}$$

and the received SCH E_c/I_o is defined as

$$\left(\frac{\text{SCH} - E_c}{I_o} \right) \Big|_{\text{in dB}} = \left(\frac{\text{SCH} - E_c}{I_{or}} \right) \Big|_{\text{in dB}} - \left(\frac{I_o}{\hat{I}_{or}} \right) \Big|_{\text{in dB}}$$

and $\text{SCH}_{-}E_c/I_{or}$ is equally divided between primary synchronisation code and the sum of all secondary synchronisation codes, where the secondary synchronisation codes are also equally divided.

8.2 Parallel Measurements in CELL_DCH State

8.2.1 Introduction

The purpose with this section is to ensure that all UE can handle a certain number of measurements in parallel. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and measurements reporting delays are specified in section 8.1. For the description of the idle intervals see TS 25.225, Annex A.

8.2.2 Requirements

The requirements in section 9 are applicable for a UE performing measurements according to this section.

The UE shall be able to perform parallel measurements according to table 8.2.

In addition to the requirements in table 8.2 the UE shall in parallel, in state CELL_DCH, also be able to measure and report the quantities according to section 8.2.

Table 8.2: Parallel measurement requirements

Measurement quantity	Number of parallel measurements possible to request from the UE
Transport channel BLER	[1] per TrCh
UE transmitted power	[1]
SFN-SFN observed time difference type 2	[]
UE GPS Timing of Cell Frames for UP	[]

Editors Note: The presence of the measurements for location services needs to be revised.

8.3 Capabilities for Support of Event Triggering and Reporting Criteria

8.3.1 Introduction

This section contains requirements on UE capabilities for support of event triggering and reporting criteria.

The UE can be requested to make measurements under different measurement identity numbers. With each identity number there may be associated multiple number of events. The purpose of this section is to set some limits on the number of different reporting criteria the UE may be requested to track in parallel.

8.3.2 Requirements

In this section reporting criteria can be either event triggered reporting criteria or periodic reporting criteria.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table 8.6.

For the measurement categories: Intra-frequency, Inter frequency and Inter-RAT the UE need not support more than 14 reporting criteria in total. For the measurement categories Traffic volume and Quality measurements the UE need not support more than 16 reporting criteria in total.

Table 8.6: Requirements for reporting criteria per measurement category

Measurement category	E_{cat}	Note
Intra-frequency	4	Applicable for periodic reporting or TDD events (1G-1I).
Inter-frequency	6	Applicable for periodic reporting or Event 2A-2F
Inter-RAT	4	Only applicable for UE with this capability
UE internal measurements	8	
Traffic volume measurements	2 + (2 per Transport Channel)	
Quality measurements	2 per Transport Channel	
UP measurements	2	Only applicable for UE with this capability.

8.4 Measurements in CELL_FACH State

8.4.1 Introduction

This section contains requirements on the UE regarding measurement reporting in CELL_FACH state. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and parallel measurements are specified in section 8.2. For the description of the idle intervals see TS 25.225, Annex A.

8.4.2 Requirements

8.4.2.1 UE Measurement Capability

The UE shall be able to monitor up to

- 32 intra frequency TDD cells (including serving cell), and
- 32 inter frequency cells, including
 - TDD mode cells distributed on up to 2 additional TDD carriers and
 - Depending on UE capability, FDD mode cells, distributed on up to 3 FDD carriers.
- Depending on UE capability, 32 inter RAT GSM cells.

The requirements in section 9 on P-CCPCH RSCP measurements are applicable for a UE performing measurements according to this section. For inter-frequency FDD, TDD and GSM cell re-selection, measurement occasions as specified in TS 25.331 and idle intervals as described in TS 25.225 are used to find and measure on other cells.

It is defined below how the measurements on different systems and modes are performed given the time allocated to that system. The time during the measurement occasions and idle intervals that is allocated to each of the different modes and systems shall be equally shared by the modes which the UE has capability for and that are in the monitored set signalled by the network.

The UE is required to measure periodically once every time period T_{meas} on each of the modes and systems, FDD interfrequency cells, TDD interfrequency cells and GSM carriers, for which the corresponding parameter N_{FDD} , N_{TDD} and N_{GSM} is set to 1, within the measurement time T_{meas}

$$T_{meas} = [(N_{FDD} + N_{TDD} + N_{GSM}) \cdot N_{TTI} \cdot M_REP \cdot 10] \text{ ms}$$

where the following parameters are defined:

$N_{TDD} = 0$ or 1. If there are inter-frequency TDD cells in the neighbour list $N_{TDD}=1$, otherwise $N_{TDD}=0$.

$N_{FDD} = 0$ or 1. If the UE is capable of FDD and there are FDD cells in the neighbour list $N_{FDD}=1$ otherwise $N_{FDD}=0$.

$N_{GSM} = 0$ or 1. If the UE is capable of GSM and there are GSM cells in the neighbour list, $N_{GSM}=1$, otherwise $N_{GSM}=0$.

M_REP is the Measurement Occasion cycle length in number of frames as specified in TS 25.331.

N_{TTI} is the number of frames in each measurement occasion, equal to the length of the largest TTI on the SCCPCH monitored by the UE.

8.4.2.2 TDD intra frequency measurements

During the CELL_FACH state the UE shall continuously measure identified intra frequency cells and search for new intra frequency cells in the monitoring set. Intra frequency measurements can be performed (simultaneously to data reception from the active cell) in all time slots not allocated to transmission nor the time used for inter frequency measurements.

8.4.2.2.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify intra}} = \text{Max} \left\{ 800, T_{\text{basic identify TDD, intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \right\} \text{ ms}$$

8.4.2.2.2 UE P-CCPCH RSCP measurement capability

In the CELL_FACH state the measurement period for intra frequency P-CCPCH RSCP measurements is 200 ms. When no inter frequency measurement is scheduled, the UE shall be capable of performing P-CCPCH RSCP measurements for 6 identified intra-frequency cells of the monitored set, and the UE physical layer shall be capable of reporting these measurements to higher layers with the measurement period of 200 ms. When inter-frequency measurements are required by the network, the UE shall be capable of performing P-CCPCH RSCP measurements for the $Y_{\text{measurement intra}}$ strongest cells, where $Y_{\text{measurement intra}}$ is defined in the following equation. The detectable cells, that were not measured during that measurement period, shall be measured in the following measurement periods. The measurement accuracy for all measured cells shall be as specified in the section 9.

$$Y_{\text{measurement intra}} = \text{Floor} \left\{ X_{\text{basic measurement TDD}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement Period, Intra}}} \right\}$$

whereby function Floor(x) takes the integer part of x.

$X_{\text{basic measurement TDD}}$ is specified in section 8.1.2.2.2

$T_{\text{Measurement_Period, Intra}}$ is specified in section 8.1.2.2.2

T_{Intra} is specified in section 8.1.2.2.2

$T_{\text{basic_identify_TDD, intra}}$ is specified in section 8.1.2.2.2

8.4.2.2.3 void

8.4.2.2.4 void

8.4.2.2.5 Timeslot ISCP measurement capability

In the CELL_FACH state the measurement period for intra frequency Timeslot ISCP measurements on arbitrary DL timeslots, including Beacon timeslots is 400 ms. When no inter frequency measurement is scheduled, the UE shall be capable of performing Timeslot ISCP measurements on the current serving cell for 10 arbitrary DL timeslots. The UE physical layer shall be capable of reporting Timeslot ISCP measurements to higher layers with the measurement period of 400 ms.

When inter-frequency measurements are required by the network, the UE shall be capable of performing Timeslot ISCP measurements on the current serving for at least $Y_{\text{measurement intra ISCP}}$ arbitrary DL timeslots, where $Y_{\text{measurement intra ISCP}}$ is defined in the following equation. Any Timeslot ISCP measurement that could not be performed during that measurement period, shall be measured in the following measurement periods. The measurement accuracy of the Timeslot ISCP measurement shall be as specified in the section 9.

$$Y_{\text{measurement intra ISCP}} = \text{Floor} \left\{ X_{\text{basic measurement ISCP}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement Period, Intra, ISCP}}} \right\}$$

whereby function Floor(x) takes the integer part of x,

- $X_{\text{basic measurement ISCP}} = 10$ (arbitrary DL timeslots of the current serving cell)
- $T_{\text{Measurement_Period, Intra, ISCP}}$ is specified in section 8.1.2.2.6,
- T_{Intra} is specified in section 8.1.2.2.6.

8.4.2.2.6 RACH reporting

Reporting measurements in the measurement reports sent on the RACH shall meet the requirements in section 9.

8.4.2.3 TDD inter frequency measurements

When signalled by the network during CELL_FACH state, the UE shall continuously measure detected inter frequency cells and search for new inter frequency cells indicated in the measurement control information.

8.4.2.3.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify_inter}} = \text{Max} \left\{ 5000, T_{\text{basic_identify_TDD,inter}} \cdot \frac{T_{\text{Measurement_Period,Inter}}}{T_{\text{Inter_FACH}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

8.4.2.3.2 P-CCPCH RSCP measurement period

When TDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting P-CCPCH RSCP measurements to higher layers with measurement accuracy as specified in section 9 with measurement period given by

$$T_{\text{measurement_inter}} = \text{Max} \left\{ 480, T_{\text{basic_measurement_TDD_inter}} \cdot \frac{T_{\text{Measurement_Period,Inter}}}{T_{\text{Inter_FACH}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

$T_{\text{Measurement_Period_Inter}}$ is specified in section 8.1.2.3.2

$T_{\text{Inter_FACH}}$: This is the minimum time as full slots that is available for the inter frequency P-CCPCH RSCP measurements during the period $T_{\text{Measurement_Period_inter}}$ with an arbitrarily chosen timing. The minimum time depends on the channel allocation and on measurement occasions during CELL_FACH state and is calculated by assuming $2 \cdot 0.5$ ms for implementation margin (for the description of the idle intervals see Annex A of 25.225 and for definition of measurement occasions during CELL_FACH state given by M_REP and TTI see TS 25.331). It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements. During the measurement occasions for CELL_FACH state the UE shall measure primarily cells that can not be measured in the idle intervals.

$T_{\text{basic_identify_TDD,inter}}$ is specified in section 8.1.2.3.2

$T_{\text{basic_measurement_TDD_inter}}$ is specified in section 8.1.2.3.2

N_{Freq} is specified in section 8.1.2.3.2

If the UE does not need measurement occasions to perform inter-frequency measurements, the measurement period for inter frequency measurements is 480ms.

8.4.2.3.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.4.2.3.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

In CELL_FACH event triggered reporting can only be set for Traffic Volume measurements defined in TS 25.331.

8.4.2.4 FDD measurements

The requirements in this section apply only to UE supporting both TDD and FDD mode.

In the CELL_FACH state when FDD inter frequency measurements are scheduled the UE shall continuously measure detected inter frequency FDD cells and search for new inter frequency cells indicated in the measurement control information.

The UE shall be capable of measuring the requested measurement quantity of at least 32 cells on a maximum of 3 frequencies.

8.4.2.4.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify FDD inter}} = \text{Max} \left\{ 5000, T_{\text{basic identify FDD inter}} \cdot \frac{T_{\text{Measurement Period FDD inter}}}{T_{\text{Inter FACH}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

when CPICH Ec/Io \geq -20 dB, SCH_Ec/Io \geq -17 dB and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

8.4.2.4.2 Measurement period

When FDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9 with measurement period given by

$$T_{\text{measurement FDD inter}} = \text{Max} \left\{ T_{\text{Measurement Period FDD inter}}, T_{\text{basic measurement FDD inter}} \cdot \frac{T_{\text{Measurement Period FDD inter}}}{T_{\text{Inter FACH}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

$T_{\text{Measurement Period FDD inter}}$ is specified in section 8.1.2.4.2

$T_{\text{Inter FACH}}$ is specified in section 8.4.2.3.2

$T_{\text{basic identify FDD inter}}$ is specified in section 8.1.2.4.2

$T_{\text{basic measurement FDD inter}}$ is specified in section 8.1.2.4.2.

N_{Freq} is specified in section 8.1.2.4.2

8.4.2.4.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.4.2.4.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

In CELL_FACH event triggered reporting can only be set for Traffic Volume measurements defined in TS 25.331.

8.4.2.5 GSM measurements

The requirements in this section applies only to UE supporting TDD and GSM.

When signalled by UTRAN during CELL_FACH state, the UE shall continuously measure GSM cells and search for new GSM cells given in the monitored set.

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified.

If BSIC verified is requested for a GSM cell the UE shall only report measurement quantities for that GSM cell with a BSIC "verified". If BSIC verification is not required for a GSM cell the UE shall report measurement quantities for that GSM cell irrespectively if the BSIC has been verified or not verified.

The measurement windows due to idle intervals and measurements occasions used for GSM measurements shall be scheduled as follows. 3 occasions out of 4 shall be allocated for GSM carrier RSSI measurements and 1 out of 4 shall be allocated for GSM BSIC reconfirmation. The scheduling of measurement windows between GSM carrier RSSI measurements and GSM BSIC reconfirmation is up to the UE.

For the UE performing GSM measurements, the requirements in GSM 05.08 shall apply.

8.4.2.5.1 GSM carrier RSSI

An UE supporting GSM measurements shall meet the minimum number of GSM carrier RSSI measurements specified in table 8.7. In the CELL_FACH state the measurement period for the GSM carrier RSSI measurement is 480 ms.

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 05.08, when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

Table 8.7

Measurement Window Length (slots)	Number of GSM carrier RSSI measurements.
3	1
4	2
5	3
7	6
10	10
13	14
15	16
30	32
60	64
120	128

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods. This means that, in this particular case, the L1 reporting period to higher layers of a GSM neighbour can be a multiple of the measurement period.

8.4.2.5.2 BSIC verification

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

1) Initial BSIC identification

Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the TDD and GSM cell. The UE shall trigger the initial BSIC identification within 50% of the available measurement windows. The requirements for Initial BSIC identification can be found in section 8.4.2.5.2.1, "Initial BSIC identification"

2) BSIC re-confirmation

Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement windows. The requirements for Initial BSIC identification can be found in section 8.4.2.5.2.2, "BSIC re-confirmation"

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified. If GSM measurements are requested with BSIC verified the UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification) and from that moment the BSIC shall be re-confirmed at least once every 6 times $T_{re-confirm\ abort}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". The time requirement for initial BSIC identification, $T_{identify\ abort}$, and the BSIC re-confirmation interval $T_{re-confirm\ abort}$ can be found in the sections below.

The worst-case time for identification of one previously not identified GSM cell measurement is specified in TS 25.225, Annex A.

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in GSM 05.05.

8.4.2.5.2.1 Initial BSIC identification

This measurement is performed in the measurement windows as described in 8.4.2.5.

For GSM cells that are requested with BSIC verified the UE shall attempt to decode the SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the measurement control information. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BSIC carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value after layer 3 filtering.

When the UE attempts to decode the BSIC of one GSM BCCH carrier with unknown BSIC, the UE shall use all available measurements occasions allocated for GSM initial BSIC identification according section 8.4.2.5 to attempt to decode the BSIC from that GSM BCCH carrier.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully identified the BSIC of the GSM BCCH carrier within $T_{\text{identify_abort}}$, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

The UE shall be able to perform initial BSIC identification on one new GSM cell within the time specified in Annex A in TS 25.225.

When N new GSM cells are to be BSIC identified the time is changed to $N * T_{\text{identify_abort}}$, with

$T_{\text{identify_abort}}$ is specified in section 8.1.2.5.

8.4.2.5.2.2 BSIC re-confirmation

The requirements of this section are applicable for BSIC re-confirmation.

The UE shall maintain the timing information of 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

For each measurement window allocated for GSM BSIC reconfirmation as described in 8.4.2.5, the UE shall attempt to decode the BSIC falling within the effective idle interval duration. If more than one BSIC can be decoded within the same measurement window, priority shall be given to the least recently decoded BSIC.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $T_{\text{re-confirm_abort}}$ seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see section 8.4.2.5.2.1. The UE shall be able to make BSIC re-confirmation attempts for the 8 strongest GSM cells in the monitored list.

The time requirement for BSIC re-confirmation is specified in Annex A in TS 25.225.

$T_{\text{re-confirm_abort}}$ is specified in section 8.1.2.5.

It is assumed for the requirement that the measurement windows possible due to higher layer parameters are of minimum duration necessary to perform the measurements.

9 Measurements performance requirements

One of the key services provided by the physical layer is the measurement of various quantities which are used to trigger or perform a multitude of functions. Both the UE and the UTRAN are required to perform a variety of measurements. The complete list of measurements is specified in 3GPP TS 25.302 "Services Provided by Physical Layer". The physical layer measurements for TDD are described and defined in 3GPP TS 25.225 "Physical layer – Measurements (TDD)". In this clause for TDD, per each measurement the relevant requirements on performance in terms of accuracy are reported.

Unless explicitly stated,

- Reported measurements shall be within defined range in 90 % of the cases.
- Measurement channel is 12,2 kbps as defined in 3GPP TS 25.102 annex A. This measurement channel is used both in active cell and cells to be measured.
- Physical channels used as defined in 3GPP TS 25.102 annex A.
- All requirements are defined when UE is in a CELL_DCH or CELL_FACH stage. The difference between modes are the reporting delay. Some of the measurements are not requested to be reported in both stages.
- Single task reporting.
- Power control is active.

9.1 Measurements performance for UE

The requirements in this clause are applicable for a UE:

- in state CELL_DCH and state CELL_FACH.
- performing measurements according to section 8.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS25.302.

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

9.1.1 Performance for UE measurements in downlink (RX)

9.1.1.1 P-CCPCH RSCP (TDD)

These measurements consider *P-CCPCH RSCP* measurements for TDD cells.

The measurement period for CELL_DCH state can be found in section 8.

The accuracy requirements in table 9.1 are valid under the following conditions:

P-CCPCH RSCP \geq -102 dBm.

The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

9.1.1.1.1 Absolute accuracy requirements

Table 9.1 P-CCPCH_RSCP absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
P-CCPCH_RSCP	dBm	± 6	± 9	-94...-70
	dBm	± 8	± 11	-70...-50

9.1.1.1.2 Relative accuracy requirements

The P-CCPCH_RSCP intra-frequency relative accuracy is defined as the P-CCPCH_RSCP measured from one cell compared to the P-CCPCH_RSCP measured from another cell on the same frequency.

The accuracy requirements in table 9.2 are valid under the following conditions:

P-CCPCH RSCP_{1,2} ≥ -102 dBm.

$$\left| P - CCPCH RSCP1 \Big|_{in\ dB} - P - CCPCH RSCP2 \Big|_{in\ dB} \right| \leq 20dB$$

Relative Io difference [dB] ≤ relative RSCP difference [dB]

The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

It is assumed that the measurements of P-CCPCH RSCP1 and P-CCPCH RSCP2 can be performed within 20ms due to slot allocations in the cells concerned.

Table 9.2: P-CCPCH_RSCP intra-frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions	
		Normal condition	Extreme condition	Io [dBm]	relative RSCP difference [dB]
P-CCPCH_RSCP	dBm	±1	±1	-94...-50	<2
		±2	±2		2...14
		±3	±3		>14

The P-CCPCH_RSCP inter-frequency relative accuracy is defined as the P-CCPCH_RSCP measured from one cell compared to the P-CCPCH_RSCP measured from another cell on a different frequency.

The accuracy requirements in table 9.3 are valid under the following conditions:

P-CCPCH RSCP_{1,2} ≥ -102 dBm.

$$\left| P - CCPCH RSCP1 \Big|_{in\ dB} - P - CCPCH RSCP2 \Big|_{in\ dB} \right| \leq 20dB$$

The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

Table 9.3 P-CCPCH_RSCP inter-frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
P-CCPCH_RSCP	dBm	± 6	± 6	-94...-50

9.1.1.1.3 Range/mapping

The reporting range for P-CCPCH RSCP is from -115 ...-25 dBm.

In table 9.4 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.4

Reported value	Measured quantity value	Unit
P-CCPCH RSCP_LEV_00	P-CCPCH RSCP <-115	dBm
P-CCPCH RSCP_LEV_01	-115 ≤ P-CCPCH RSCP < -114	dBm
P-CCPCH RSCP_LEV_02	-114 ≤ P-CCPCH RSCP < -113	dBm
...
P-CCPCH RSCP_LEV_89	-27 ≤ P-CCPCH RSCP < -26	dBm
P-CCPCH RSCP_LEV_90	-26 ≤ P-CCPCH RSCP < -25	dBm
P-CCPCH RSCP_LEV_91	-25 ≤ P-CCPCH RSCP	dBm

9.1.1.2 CPICH measurements (FDD)

Note: This measurement is used for handover between UTRA TDD and UTRA FDD.

These measurements consider *CPICH RSCP* and *CPICH Ec/Io* measurements. The requirements in this section are valid for terminals supporting this capability.

The measurement period for CELL_DCH state and CELL_FACH state can be found in section 8.

9.1.1.2.1 CPICH RSCP

9.1.1.2.1.1 Inter frequency measurement absolute accuracy requirement

The accuracy requirements in table 9.5 are valid under the following conditions:

$CPICH_RSCP1|_{dBm} \geq -114$ dBm.

$$\left| \frac{I_o}{\hat{I}_{or}} \right|_{in\ dB} - \left(\frac{CPICH_E_c}{I_{or}} \right)_{in\ dB} \leq 20dB$$

Table 9.5: CPICH_RSCP Inter frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
CPICH_RSCP	dBm	± 6	± 9	-94...-70
	dBm	± 8	± 11	-94...-50

9.1.1.2.1.2 Range/mapping

The reporting range for *CPICH RSCP* is from -115 ...-25 dBm.

In table 9.6 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.6

Reported value	Measured quantity value	Unit
CPICH_RSCP_LEV_00	CPICH RSCP < -115	dBm
CPICH_RSCP_LEV_01	-115 ≤ CPICH RSCP < -114	dBm
CPICH_RSCP_LEV_02	-114 ≤ CPICH RSCP < -113	dBm
...
CPICH_RSCP_LEV_89	-27 ≤ CPICH RSCP < -26	dBm
CPICH_RSCP_LEV_90	-26 ≤ CPICH RSCP < -25	dBm
CPICH_RSCP_LEV_91	-25 ≤ CPICH RSCP	dBm

9.1.1.2.2 CPICH Ec/Io

9.1.1.2.2.1 Inter frequency measurement relative accuracy requirement

The relative accuracy of *CPICH Ec/Io* is defined as the *CPICH Ec/Io* measured from one cell compared to the *CPICH Ec/Io* measured from another cell on a different frequency.

The accuracy requirements in table 9.7 are valid under the following conditions:

$CPICH_RSCP1,2 \geq -114$ dBm.

$$\left| CPICH_RSCP1|_{in\ dB} - CPICH_RSCP2|_{in\ dB} \right| \leq 20dB$$

$| \text{Channel 1}_{Io} - \text{Channel 2}_{Io} | \leq 20 \text{ dB}$.

$$\left(\frac{I_o}{\hat{I}_{or}} \right)_{in \text{ dB}} - \left(\frac{CPICH_{Ec}}{I_{or}} \right)_{in \text{ dB}} \leq 20 \text{ dB}$$

Table 9.7 CPICH Ec/Io Inter frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
CPICH_Ec/Io	dB	± 1.5 for $-14 \leq \text{CPICH Ec/Io}$ ± 2 for $-16 \leq \text{CPICH Ec/Io} < -14$ ± 3 for $-20 \leq \text{CPICH Ec/Io} < -16$	± 3	-94...-50

9.1.1.2.2 Range/mapping

The reporting range for *CPICH Ec/Io* is from -24 ...0 dB.

In table 9.8 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.8

Reported value	Measured quantity value	Unit
CPICH_Ec/Io_00	CPICH Ec/Io < -24	dB
CPICH_Ec/Io_01	$-24 \leq \text{CPICH Ec/Io} < -23.5$	dB
CPICH_Ec/Io_02	$-23.5 \leq \text{CPICH Ec/Io} < -23$	dB
...
CPICH_Ec/Io_47	$-1 \leq \text{CPICH Ec/Io} < -0.5$	dB
CPICH_Ec/Io_48	$-0.5 \leq \text{CPICH Ec/Io} < 0$	dB
CPICH_Ec/Io_49	$0 \leq \text{CPICH Ec/Io}$	dB

9.1.1.3 Timeslot ISCP

The measurement period for CELL_DCH state can be found in section 8. The measurement period for CELL_FACH state can be found in section 8.4

9.1.1.3.1 Absolute accuracy requirements

Table 9.9 Timeslot_ISCP Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
Timeslot_ISCP	dBm	± 6	± 9	-94...-70
	dBm	± 8	± 11	-70...-50

9.1.1.3.2 Range/mapping

The reporting range for *Timeslot ISCP* is from -115...-25 dBm.

In table 9.10 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.10

Reported value	Measured quantity value	Unit
UE_TS_ISCP_LEV_00	Timeslot_ISCP < -115	dBm
UE_TS_ISCP_LEV_01	-115 ≤ Timeslot_ISCP < -114	dBm
UE_TS_ISCP_LEV_02	-114 ≤ Timeslot_ISCP < -113	dBm
...
UE_TS_ISCP_LEV_89	-27 ≤ Timeslot_ISCP < -26	dBm
UE_TS_ISCP_LEV_90	-26 ≤ Timeslot_ISCP < -25	dBm
UE_TS_ISCP_LEV_91	-25 ≤ Timeslot_ISCP	dBm

9.1.1.4 UTRA carrier RSSI

Note: The purpose of measurement is for Inter-frequency handover evaluation.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.4.1 Absolute accuracy requirement

Absolute accuracy case only one carrier is applied.

Table 9.11 UTRA carrier RSSI Inter frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
UTRA Carrier RSSI	dBm	± 4	± 7	-94...-70
	dBm	± 6	± 9	-70...-50

9.1.1.4.2 Relative accuracy requirement

Relative accuracy requirement is defined as active cell frequency UTRAN RSSI compared to measured other frequency UTRAN RSSI level

The accuracy requirements in table 9.12 are valid under the following condition:

$| \text{Channel 1}_{Io} - \text{Channel 2}_{Io} | < 20 \text{ dB}$.

Table 9.12 UTRA carrier RSSI Inter frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
UTRA Carrier RSSI	dBm	± 7	± 11	-94...-50

9.1.1.4.3 Range/mapping

The reporting range for *UTRA carrier RSSI* is from -100 ...-25 dBm.

In table 9.13 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.13

Reported value	Measured quantity value	Unit
UTRA_carrier_RSSI_LEV_00	UTRA carrier RSSI < -100	dBm
UTRA_carrier_RSSI_LEV_01	-100 ≤ UTRA carrier RSSI < -99	dBm
UTRA_carrier_RSSI_LEV_02	-99 ≤ UTRA carrier RSSI < -98	dBm
...
UTRA_carrier_RSSI_LEV_74	-27 ≤ UTRA carrier RSSI < -26	dBm
UTRA_carrier_RSSI_LEV_75	-26 ≤ UTRA carrier RSSI < -25	dBm
UTRA_carrier_RSSI_LEV_76	-25 ≤ UTRA carrier RSSI	dBm

9.1.1.5 GSM carrier RSSI

Note: This measurement is for handover between UTRAN and GSM.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for CELL_DCH state can be found in section 8.1.2.5. The measurement period for CELL_FACH state can be found in section 8.4.2.5.

If the UE, in CELL_DCH state, does not need idle intervals to perform GSM measurements, the measurement accuracy requirements for RXLEV in GSM 05.08 shall apply.

If the UE, in CELL_DCH state needs idle intervals to perform GSM measurements, the measurement accuracy requirement is stated in section 8.1.2.5.

If the UE, in CELL_FACH state, does not need measurement occasions and/or idle intervals to perform GSM measurements, the measurement accuracy requirements for RXLEV in GSM 05.08 shall apply.

If the UE, in CELL_FACH state needs measurement occasions and/or idle intervals to perform GSM measurements, the measurement accuracy requirement is stated in section 8.4.2.5.

The reporting range and mapping specified for RXLEV in GSM 05.08 shall apply.

9.1.1.6 SIR

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.6.1 Absolute accuracy requirements

Table 9.14 SIR Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	
SIR	dB	±3 dB for	[]	For 0 < SIR < 20 dB and lo range -94...-50
SIR	dB	±(3 - SIR)	[]	For -7 ≤ SIR ≤ 0 dB and lo range -94...-50

9.1.1.6.2 Range/mapping

The reporting range for *SIR* is from -11 ...20 dB.

In table 9.15 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.15

Reported value	Measured quantity value	Unit
UE_SIR_00	SIR < -11,0	dB
UE_SIR_01	-11,0 ≤ SIR < -10,5	dB
UE_SIR_02	-10,5 ≤ SIR < -10,0	dB
...
UE_SIR_61	-19 ≤ SIR < 19,5	dB
UE_SIR_62	19,5 ≤ SIR < 20	dB
UE_SIR_63	20 ≤ SIR	dB

9.1.1.7 Transport channel BLER

9.1.1.7.1 BLER measurement requirement

The Transport Channel BLER value shall be calculated from a window with the size equal to the reporting interval (see clause on periodical reporting criteria in TS 25.331).

9.1.1.7.2 Range/mapping

The *Transport channel BLER* reporting range is from 0 to 1.

In table 9.16 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.16

Reported value	Measured quantity value	Unit
BLER_LOG_00	Transport channel BLER = 0	-
BLER_LOG_01	$-\infty < \text{Log}_{10}(\text{Transport channel BLER}) < -4,03$	-
BLER_LOG_02	$-4,03 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3,965$	-
BLER_LOG_03	$-3,965 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3,9$	-
...
BLER_LOG_61	$-0,195 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0,13$	-
BLER_LOG_62	$-0,13 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0,065$	-
BLER_LOG_63	$-0,065 \leq \text{Log}_{10}(\text{Transport channel BLER}) \leq 0$	-

9.1.1.8 SFN-SFN observed time difference

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.8.1 Accuracy requirements

The accuracy requirement in table 9-17 is valid under the following conditions:

$$P\text{-CCPCH_RSCP}_{1,2} \geq -102 \text{ dBm}$$

$$\left| P\text{-CCPCH_RSCP}_{1, \text{in dB}} - P\text{-CCPCH_RSCP}_{2, \text{in dB}} \right| \leq 20 \text{ dB}$$

The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6.

Table 9.17 SFN-SFN observed time difference accuracy

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-SFN observed time difference	chip	+/-0,5 for both type 1 and 2	-94...-50

9.1.1.8.2 Range/mapping

The reporting range for *SFN-SFN observed time difference type 1* is from 0 ... 9830400 chip.

In table 9.18 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.18

Reported value	Measured quantity value	Unit
T1_SFN-SFN_TIME _0000000	$0 \leq \text{SFN-SFN observed time difference type 1} < 1$	chip
T1_SFN-SFN_TIME _0000001	$1 \leq \text{SFN-SFN observed time difference type 1} < 2$	chip
T1_SFN-SFN_TIME _0000002	$2 \leq \text{SFN-SFN observed time difference type 1} < 3$	chip
...
T1_SFN-SFN_TIME _9830397	$9830397 \leq \text{SFN-SFN observed time difference type 1} < 9830398$	chip
T1_SFN-SFN_TIME _9830398	$9830398 \leq \text{SFN-SFN observed time difference type 1} < 9830399$	chip
T1_SFN-SFN_TIME _9830399	$9830399 \leq \text{SFN-SFN observed time difference type 1} < 9830400$	chip

The reporting range for *SFN-SFN observed time difference type 2* is from -1280 ... +1280 chip.

In table 9.19 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.19

Reported value	Measured quantity value	Unit
T2_SFN-SFN_TIME _00000	SFN-SFN observed time difference type 2 < -1280,0000	chip
T2_SFN-SFN_TIME _00001	$-1280,0000 \leq \text{SFN-SFN observed time difference type 2} < -1279,9375$	chip
T2_SFN-SFN_TIME _00002	$-1279,9375 \leq \text{SFN-SFN observed time difference type 2} < -1279,8750$	chip
...
T2_SFN-SFN_TIME _40959	$1279,8750 \leq \text{SFN-SFN observed time difference type 2} < 1279,9375$	chip
T2_SFN-SFN_TIME _40960	$1279,9375 \leq \text{SFN-SFN observed time difference type 2} < 1280,0000$	chip
T2_SFN-SFN_TIME _40961	$1280,0000 \leq \text{SFN-SFN observed time difference type 2}$	chip

9.1.1.9 Observed time difference to GSM cell

Note: This measurement is used to determine the system time difference between UTRAN and GSM cells.

The requirements in this section are valid for terminals supporting UTRA TDD and GSM.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.9.1 Accuracy requirements

Table 9.20 Observed time difference to GSM cell accuracy

Parameter	Unit	Accuracy [chip]	Conditions
Observed time difference to GSM cell	chip	± 20	

9.1.1.9.2 Range/mapping

The reporting range for *Observed time difference to GSM cell* is from 0 ... 3060/13 ms.

In table 9.21 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.21

Reported value	Measured quantity value	Unit
GSM_TIME _0000	$0 \leq \text{Observed time difference to GSM cell} < 1 \times 3060 / (4096 \times 13)$	ms
GSM_TIME _0001	$1 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 2 \times 3060 / (4096 \times 13)$	ms
GSM_TIME _0002	$2 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 3 \times 3060 / (4096 \times 13)$	ms
GSM_TIME _0003	$3 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4 \times 3060 / (4096 \times 13)$	ms
...
GSM_TIME _4093	$4093 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4094 \times 3060 / (4096 \times 13)$	ms
GSM_TIME _4094	$4094 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4095 \times 3060 / (4096 \times 13)$	ms
GSM_TIME _4095	$4095 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 3060 / 13$	ms

9.1.1.10 UE GPS Timing of Cell Frames for UP

9.1.1.10.1 Accuracy requirement

The requirements in this section are valid for terminals supporting this capability

The measurement period for CELL_DCH state can be found in section 8.

Table 9.22

Parameter	Unit	Accuracy [chip]	Conditions
UE GPS Timing of Cell Frames for LCS	chip	[]	

9.1.1.10.2 UE GPS timing of Cell Frames for UP measurement report mapping

The reporting range for *UE GPS timing of Cell Frames for UP* is from 0 ... 2319360000000 chip.

In table 9.23 mapping of the measured quantity is defined.

Table 9.23

Reported value	Measured quantity value	Unit
GPS_TIME_0000000000000000	UE GPS timing of Cell Frames for UP < 0,0625	chip
GPS_TIME_0000000000000001	$0,0625 \leq \text{UE GPS timing of Cell Frames for UP} < 0,1250$	chip
GPS_TIME_0000000000000002	$0,1250 \leq \text{UE GPS timing of Cell Frames for UP} < 0,1875$	chip
...
GPS_TIME_371097599999997	$2319359999999,8125 \leq \text{UE GPS timing of Cell Frames for UP} < 2319359999999,8750$	chip
GPS_TIME_371097599999998	$2319359999999,8750 \leq \text{UE GPS timing of Cell Frames for UP} < 2319359999999,9375$	chip
GPS_TIME_371097599999999	$2319359999999,9375 \leq \text{UE GPS timing of Cell Frames for UP} < 2319360000000,0000$	chip

9.1.1.11 SFN-CFN observed time difference

Note: This measurement is for handover timing purposes to identify active cell and neighbour cell time difference.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.11.1 Accuracy requirements

The accuracy requirements in tables 9.24 are valid under the following conditions:

$P\text{-CCPCH_RSCP}_{1,2} \geq -102\text{dBm}$.

$$\left| P\text{-CCPCH_RSCP1}_{in\ dB} - P\text{-CCPCH_RSCP2}_{in\ dB} \right| \leq 20\text{dB}$$

The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

Table 9.24 SFN-CFN observed time difference accuracy for a TDD neighbour cell

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-CFN observed time difference	chip	+/-0,5	-94...-50

The accuracy requirements in tables 9.25 are valid under the following conditions:

$CPICH_RSCP_{1,2} \geq -114\ \text{dBm}$.

$$\left| CPICH_RSCP1_{in\ dB} - CPICH_RSCP2_{in\ dB} \right| \leq 20\text{dB}$$

The received signal levels on SCH and CPICH are according the requirements in paragraph 8.1.2.6

Table 9.25 SFN-CFN observed time difference accuracy for a FDD neighbour cell

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-CFN observed time difference	chip	+/-1	-94...-50

9.1.1.11.2 Range/mapping

The reporting range for SFN-CFN observed time difference for a TDD neighbour cell is from 0...256 frames.

In table 9.26 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.26 SFN-CFN observed time difference range/mapping for a TDD neighbour cell

Reported value	Measured quantity value	Unit
SFN-CFN_TIME_000	$0 \leq \text{SFN-CFN observed time difference} < 1$	frame
SFN-CFN_TIME_001	$1 \leq \text{SFN-CFN observed time difference} < 2$	frame
SFN-CFN_TIME_002	$2 \leq \text{SFN-CFN observed time difference} < 3$	frame
...
SFN-CFN_TIME_253	$253 \leq \text{SFN-CFN observed time difference} < 254$	frame
SFN-CFN_TIME_254	$254 \leq \text{SFN-CFN observed time difference} < 255$	frame
SFN-CFN_TIME_255	$255 \leq \text{SFN-CFN observed time difference} < 256$	frame

The reporting range for *SFN-CFN observed time difference* for a FDD neighbour cell is from 0 ... 9830400 chip.

In table 9.27 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.27: SFN-CFN observed time difference range/mapping for a FDD neighbour cell

Reported value	Measured quantity value	Unit
SFN-CFN_TIME_0000000	$0 \leq \text{SFN-CFN observed time difference} < 1$	chip
SFN-CFN_TIME_0000001	$1 \leq \text{SFN-CFN observed time difference} < 2$	chip
SFN-CFN_TIME_0000002	$2 \leq \text{SFN-CFN observed time difference} < 3$	chip
...
SFN-CFN_TIME_9830397	$9830397 \leq \text{SFN-CFN observed time difference} < 9830398$	chip
SFN-CFN_TIME_9830398	$9830398 \leq \text{SFN-CFN observed time difference} < 9830399$	chip
SFN-CFN_TIME_9830399	$9830399 \leq \text{SFN-CFN observed time difference} < 9830400$	chip

9.1.2 Performance for UE Measurements in Uplink (TX)

The output power is defined as the average power of the transmit timeslot, and is measured with a filter that has a Root-Raised Cosine (RRC) filter response with a roll off $\alpha = 0,22$ and a bandwidth equal to the chip rate.

9.1.2.1 UE transmitted power

The measurement period for CELL_DCH state is 1 slot.

9.1.2.1.1 Absolute accuracy requirements

Table 9.28 UE transmitted power absolute accuracy

Parameter	Unit	PUEMAX	
		24dBm	21dBm
UE transmitted power=PUEMAX	dB	+1/-3	± 2
UE transmitted power=PUEMAX-1	dB	+1,5/-3,5	$\pm 2,5$
UE transmitted power=PUEMAX-2	dB	+2/-4	± 3
UE transmitted power=PUEMAX-3	dB	+2,5/-4,5	$\pm 3,5$
$\text{PUEMAX}-10 \leq \text{UE transmitted power} < \text{PUEMAX}-3$	dB	+3/-5	± 4

Note 1: User equipment maximum output power, PUEMAX, is the maximum output power level without tolerance defined for the power class of the UE in 3GPP TS 25.102 "UTRA (UE) TDD; Radio Transmission and Reception".

Note 2: UE transmitted power is the reported value.

9.1.2.1.2 Range/mapping

The reporting range for *UE transmitted power* is from -50 ...+34 dBm.

In table 9.29 mapping of the measured quantity is defined. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.29

Reported value	Measured quantity value	Unit
UE_TX_POWER_021	$-50 \leq \text{UE transmitted power} < -49$	dBm
UE_TX_POWER_022	$-49 \leq \text{UE transmitted power} < -48$	dBm
UE_TX_POWER_023	$-48 \leq \text{UE transmitted power} < -47$	dBm
...
UE_TX_POWER_102	$31 \leq \text{UE transmitted power} < 32$	dBm
UE_TX_POWER_103	$32 \leq \text{UE transmitted power} < 33$	dBm
UE_TX_POWER_104	$33 \leq \text{UE transmitted power} < 34$	dBm

9.2 Measurements Performance for UTRAN

9.2.1 Performance for UTRAN Measurements in Uplink (RX)

9.2.1.1 RSCP

The measurement period shall be 100 ms.

9.2.1.1.1 Absolute accuracy requirements

Table 9.30 RSCP absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	Io [dBm]
RSCP	dB	± 6	± 9	-105..-74

9.2.1.1.2 Relative accuracy requirements

The relative accuracy of RSCP in inter frequency case is defined as the RSCP measured from one UE compared to the RSCP measured from another UE.

Table 9.31 RSCP relative accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Io [dBm]
RSCP	dB	± 3 for intra-frequency	-105..-74

9.2.1.1.3 Range/mapping

The reporting range for RSCP is from -120 ...-57 dBm.

In table 9.32 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.32

Reported value	Measured quantity value	Unit
RSCP_LEV_00	$\text{RSCP} < -120,0$	dBm
RSCP_LEV_01	$-120,0 \leq \text{RSCP} < -119,5$	dBm
RSCP_LEV_02	$-119,5 \leq \text{RSCP} < -119,0$	dBm
...
RSCP_LEV_125	$-58,0 \leq \text{RSCP} < -57,5$	dBm
RSCP_LEV_126	$-57,5 \leq \text{RSCP} < -57,0$	dBm
RSCP_LEV_127	$-57,0 \leq \text{RSCP}$	dBm

9.2.1.2 Timeslot ISCP

The measurement period shall be 100 ms.

9.2.1.2.1 Absolute accuracy requirements

Table 9.33 Timeslot ISCP Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	Io [dBm]
Timeslot ISCP	dB	± 6	± 9	-105..-74

9.2.1.2.2 Range/mapping

The reporting range for *Timeslot ISCP* is from -120...-57 dBm.

In table 9.34 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.34

Reported value	Measured quantity value	Unit
UTRAN_TS_ISCP_LEV_00	Timeslot_ISCP < -120,0	dBm
UTRAN_TS_ISCP_LEV_01	-120,0 ≤ Timeslot_ISCP < -119,5	dBm
UTRAN_TS_ISCP_LEV_02	-119,5 ≤ Timeslot_ISCP < -119,0	dBm
...
UTRAN_TS_ISCP_LEV_125	-58,0 ≤ Timeslot_ISCP < -57,5	dBm
UTRAN_TS_ISCP_LEV_126	-57,5 ≤ Timeslot_ISCP < -57,0	dBm
UTRAN_TS_ISCP_LEV_127	-57,0 ≤ Timeslot_ISCP	dBm

9.2.1.3 Received Total Wideband Power

The measurement period shall be 100 ms.

9.2.1.3.1 Absolute accuracy requirements

Table 9.35 RECEIVED TOTAL WIDE BAND POWER Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Io [dBm]
RECEIVED TOTAL WIDE BAND POWER	dB	± 4	-105..-74

9.2.1.3.2 Range/mapping

The reporting range for *RECEIVED TOTAL WIDE BAND POWER* is from -112 ... -50 dBm.

In table 9.36 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.36

Reported value	Measured quantity value	Unit
RECEIVED TOTAL WIDE BAND POWER_LEV_000	RECEIVED TOTAL WIDE BAND POWER < -112,0	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_001	-112,0 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,9	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_002	-111,9 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,8	dBm
...
RECEIVED TOTAL WIDE BAND POWER_LEV_619	-50,2 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,1	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_620	-50,1 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,0	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_621	-50,0 ≤ RECEIVED TOTAL WIDE BAND POWER	dBm

9.2.1.4 SIR

The measurement period shall be 80 ms.

9.2.1.4.1 Absolute accuracy requirements

Table 9.37 SIR Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
SIR	dB	± 3	For 0 < SIR < 20 dB when $l_o > -105$ dBm
SIR	dB	+/- (3 - SIR)	For -7 < SIR < 0 dB when $l_o > -105$ dBm

9.2.1.4.2 Range/mapping

The reporting range for *SIR* is from -11 ... 20 dB.

In table 9.38 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.38

Reported value	Measured quantity value	Unit
UTRAN_SIR_00	SIR < -11,0	dB
UTRAN_SIR_01	-11,0 ≤ SIR < -10,5	dB
UTRAN_SIR_02	-10,5 ≤ SIR < -10,0	dB
...
UTRAN_SIR_61	19,0 ≤ SIR < 19,5	dB
UTRAN_SIR_62	19,5 ≤ SIR < 20,0	dB
UTRAN_SIR_63	20,0 ≤ SIR	dB

9.2.1.5 Transport Channel BER

The measurement period shall be equal to the TTI of the transport channel. Each reported Transport channel BER measurement shall be an estimate of the BER averaged over one measurement period only.

9.2.1.5.1 Accuracy requirement

The average of consecutive Transport channel BER measurements is required to fulfil the accuracy stated in table 9.39 if the total number of erroneous bits during these measurements is at least 500 and the absolute BER value for each of the measurements is within the range given in table 9.39.

Table 9.39 Transport channel BER accuracy

Parameter	Unit	Accuracy [% of the absolute BER value]	Conditions
			Range
TrpBER	-	+/- 10	Convolutional coding 1/3 rd with any amount of repetition or a maximum of 25% puncturing: for absolute BER value $\leq 15\%$ Convolutional coding 1/2 with any amount of repetition or no puncturing: for absolute BER value $\leq 15\%$ Turbo coding 1/3 rd with any amount of repetition or a maximum of 20% puncturing: for absolute BER value $\leq 15\%$.

9.2.1.5.2 Range/mapping

The *Transport channel BER* reporting range is from 0 to 1.

In table 9.40 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.40

Reported value	Measured quantity value	Unit
TrCh_BER_LOG_000	Transport channel BER = 0	-
TrCh_BER_LOG_001	$-\infty < \text{Log}_{10}(\text{Transport channel BER}) < -2,06375$	-
TrCh_BER_LOG_002	$-2,06375 \leq \text{Log}_{10}(\text{Transport channel BER}) < -2,055625$	-
TrCh_BER_LOG_003	$-2,055625 \leq \text{Log}_{10}(\text{Transport channel BER}) < -2,0475$	-
...
TrCh_BER_LOG_253	$-0,024375 \leq \text{Log}_{10}(\text{Transport channel BER}) < -0,01625$	-
TrCh_BER_LOG_254	$-0,01625 \leq \text{Log}_{10}(\text{Transport channel BER}) < -0,008125$	-
TrCh_BER_LOG_255	$-0,008125 \leq \text{Log}_{10}(\text{Transport channel BER}) \leq 0$	-

9.2.1.6 RX Timing Deviation

The measurement period shall be 100 ms.

9.2.1.6.1 Accuracy requirements

Table 9.41 RX Timing Deviation accuracy

Parameter	Unit	Accuracy [chip]	Conditions
			Range [chips]
RX Timing Deviation	chip	+/- 0,5	-256, ..., 256

9.2.1.6.2 Range/mapping

The reporting range for *RX Timing Deviation* is from -255,9375 ... 255,9375 chips.

In table 9.42 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.42

Reported value	Measured quantity value	Unit
RX_TIME_DEV_0000	RX Timing Deviation < -255,9375	chip
RX_TIME_DEV_0001	-255,9375 ≤ RX Timing Deviation < 255,875	chip
RX_TIME_DEV_0002	-255,875 ≤ RX Timing Deviation < -255,8125	chip
...
RX_TIME_DEV_4096	000,00 ≤ RX Timing Deviation < 0,0625	chip
...
RX_TIME_DEV_8189	255,8125 ≤ RX Timing Deviation < 255,875	chip
RX_TIME_DEV_8190	255,875 ≤ RX Timing Deviation < 255,9375	chip
RX_TIME_DEV_8191	255,9375 ≤ RX Timing Deviation	chip

NOTE: This measurement may be used for timing advance calculation or location services.

9.2.1.7 (void)

9.2.1.8 (void)

9.2.1.9 UTRAN GPS Timing of Cell Frames for UP

9.2.1.9.1 Accuracy requirement

Only necessary for UEs supporting UP.

Table 9.43

Parameter	Unit	Accuracy [chip]	Conditions
UTRAN GPS timing of Cell Frames for UP	chip	[]	

9.2.1.9.2 Range/mapping

The reporting range for *UTRAN GPS timing of Cell Frames for UP* is from 0 ... 231936000000 chip.

In table 9.44 the mapping of measured quantity is defined.

Table 9.44

Reported value	Measured quantity value	Unit
GPS_TIME_0000000000000000	UTRAN GPS timing of Cell Frames for UP < 0,0625	chip
GPS_TIME_0000000000000001	0,0625 ≤ UTRAN GPS timing of Cell Frames for UP < 0,1250	chip
GPS_TIME_0000000000000002	0,1250 ≤ UTRAN GPS timing of Cell Frames for UP < 0,1875	chip
...
GPS_TIME_371097599999997	231935999999,8125 ≤ UTRAN GPS timing of Cell Frames for UP < 231935999999,8750	chip
GPS_TIME_371097599999998	231935999999,8750 ≤ UTRAN GPS timing of Cell Frames for UP < 231935999999,9375	chip
GPS_TIME_371097599999999	231935999999,9375 ≤ UTRAN GPS timing of Cell Frames for UP < 231936000000,0000	chip

9.2.2 Performance for UTRAN measurements in downlink (TX)

The output power is defined as the average power of the transmit timeslot, and is measured with a filter that has a Root-Raised Cosine (RRC) filter response with a roll off $\alpha = 0,22$ and a bandwidth equal to the chip rate.

9.2.2.1 Transmitted carrier power

The measurement period shall be 100 ms.

9.2.2.1.1 Accuracy requirements

Table 9.45 Transmitted carrier power accuracy

Parameter	Unit	Accuracy [% units]	Conditions
			Range
Transmitted carrier power	%	± 10	For $10\% \leq$ Transmitted carrier power $\leq 90\%$

9.2.2.1.2 Range/mapping

The reporting range for *Transmitted carrier power* is from 0 ... 100 %.

In table 9.46 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.46

Reported value	Measured quantity value	Unit
UTRAN_TX_POWER_000	Transmitted carrier power = 0	%
UTRAN_TX_POWER_001	$0 < \text{Transmitted carrier power} \leq 1$	%
UTRAN_TX_POWER_002	$1 < \text{Transmitted carrier power} \leq 2$	%
UTRAN_TX_POWER_003	$2 < \text{Transmitted carrier power} \leq 3$	%
...
UTRAN_TX_POWER_098	$97 < \text{Transmitted carrier power} \leq 98$	%
UTRAN_TX_POWER_099	$98 < \text{Transmitted carrier power} \leq 99$	%
UTRAN_TX_POWER_100	$99 < \text{Transmitted carrier power} \leq 100$	%

9.2.2.2 Transmitted code power

The measurement period shall be 100 ms.

9.2.2.2.1 Absolute accuracy requirements

Table 9.47 Transmitted code power absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
Transmitted code power	dB	$[\pm 3]$	Over the full range

9.2.2.2.2 Relative accuracy requirements

The relative accuracy of transmitted code power is defined as the transmitted code power measured at one dedicated radio link compared to the transmitted code power measured from a different dedicated radio link in the same cell.

Table 9.48 Transmitted code power relative accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
Transmitted code power	dB	± 2	Over the full range

9.2.2.2.3 Range/mapping

The reporting range for *Transmitted code power* is from -10 ... 46 dBm.

In table 9.49 the mapping of measured quantity is defined. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.49

Reported value	Measured quantity value	Unit
UTRAN_CODE_POWER_010	$-10,0 \leq \text{Transmitted code power} < -9,5$	dBm
UTRAN_CODE_POWER_011	$-9,5 \leq \text{Transmitted code power} < -9,0$	dBm
UTRAN_CODE_POWER_012	$-9,0 \leq \text{Transmitted code power} < -8,5$	dBm
...
UTRAN_CODE_POWER_120	$45,0 \leq \text{Transmitted code power} < 45,5$	dBm
UTRAN_CODE_POWER_121	$45,5 \leq \text{Transmitted code power} < 46,0$	dBm
UTRAN_CODE_POWER_122	$46,0 \leq \text{Transmitted code power} < 46,5$	dBm

Annex A (normative): Test Cases

A.1 Purpose of Annex

This Annex specifies test specific parameters for some of the functional requirements in chapters 4 to 9. The tests provide additional information to how the requirements should be interpreted for the purpose of conformance testing. The tests in this Annex are described such that one functional requirement may be tested in one or several test and one test may verify several requirements. Some requirements may lack a test.

The conformance tests are specified in TS34.122. Statistical interpretation of the requirements is described in Annex A.2.

A.2 Requirement classification for statistical testing

Requirements in this specification are either expressed as absolute requirements with a single value stating the requirement, or expressed as a success rate. There are no provisions for the statistical variations that will occur when the parameter is tested.

Annex A outlines the test in more detail and lists the test parameters needed. The test will result in an outcome of a test variable value for the DUT inside or outside the test limit. Overall, the probability of a “good” DUT being inside the test limit(s) and the probability of a “bad” DUT being outside the test limit(s) should be as high as possible. For this reason, when selecting the test variable and the test limit(s), the statistical nature of the test is accounted for.

The statistical nature depends on the type of requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a DUT passing the test actually meets the requirement and determines how many times a test has to be repeated and what the pass and fail criteria are. Those aspects are not covered by TS 25.123. The details of the tests, how many times to run it and how to establish confidence in the tests are described in TS 34.122. This Annex establishes what the test variable is and whether it can be viewed as statistical in nature or not.

A.2.1 Types of requirements in TS 25.123

A.2.1.1 Time and delay requirements on UE higher layer actions

One part of the RRM requirements are delay requirements:

In idle mode (A.4) there is cell re-selection delay.

In UTRAN Connected Mode Mobility (A.5) there is measurement reporting delay, handover delay and cell re-selection delay.

In RRC Connection Control (A.6) there is RRC re-establishment delay.

All have in common that the UE is required to perform an action observable in higher layers (e.g. camp on the correct cell) within a certain time after a specific event (e.g. a new strong pilot arises). The delay time is statistical in nature for several reasons, among others that measurements required by the UE are performed in a fading radio environment.

The variations make a strict limit unsuitable for a test. Instead there is a condition set for a correct action by the UE, e.g. that the UE shall camp on the correct cell within X seconds. Then the rate of correct events as observed during repeated tests shall be at least 90% in case of AWGN propagation condition.. How the limit is applied in the test depends on the confidence required, further detailed are in TS 34.122.

A.2.1.2 Measurements of power levels, relative powers and time

A very large number of requirements are on measurements that the UE performs:

In UTRAN Connected Mode Mobility (A.5) there are measurement reports.

Measurement performance requirements (A.8) has requirements on all type of measurements.

The accuracy requirements on measurements are expressed in this specification as a fixed limit (e.g. +/-X dB), but the measurement error will have a distribution that is not easily confined in fixed limits. Assuming a Gaussian distribution of the error, the limits will have to be set at $\pm 3,29\sigma$ if the probability of failing a "good DUT" in a single test is to be kept at 0,1%. It is more reasonable to set the limit tighter and test the DUT by counting the rate of measurements that are within the limits, in a way similar to the requirements on delay.

A.2.1.3 Implementation requirements

A few requirements are strict actions the UE should take or capabilities the UE should have, without any allowance for deviations. These requirements are absolute and should be tested as such. Examples are

"Event triggered report rate" in UTRAN Connected Mode Mobility (A.5)

A.2.1.4 Physical layer timing requirements

All requirements on "Timing Characteristics" (A.7) are absolute limits on timing accuracy.

A.2.1.5 BER and BLER requirements

Some measurement report procedures in "UE Measurement procedures" (A.8) have requirements on DCH BLER. These are tested in the same way as BLER requirements in TS 25.102.

A.3 Reserved for Future Use

(void)

A.4 Idle Mode

A.4.1 Cell selection

NOTE: This section is included for consistency with numbering with section 4; no test covering requirements exist.

A.4.2 Cell Re-Selection

For each of the re-selection scenarios in section 4.2 a test is proposed.

For TDD/TDD cell reselection two scenarios are considered:

- Scenario 1: Single carrier case
- Scenario 2: Multi carrier case

A.4.2.1 Scenario 1: TDD/TDD cell re-selection single carrier case

A.4.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in the single carrier case reported in section 4.2.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.4.1 and A.4.2. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.1: General test parameters for Cell Re-selection single carrier multi-cell case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Qrxlevmin		dBm	-102	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1,28	The value shall be used for all cells in the test.
DRX cycle length		s	1,28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.4.2: Cell re-selection single carrier multi-cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/Ior	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/Ior	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	9	7	9	7	7	9	7	9	-1	-1	-1	-1
PCCPCH RSCP	dBm	-64	-66			-66	-64			-74	-74		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0 C1, C5:0; C1, C6:0				C2, C1: 0; C2, C3:0; C2,C4:0 C2, C5: 0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5: 0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/Ior	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/Ior	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
PCCPCH RSCP	dBm	-74	-74			-74	-74			-74	-74		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.4.2.1.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.2 Scenario 2: TDD/TDD cell re-selection multi carrier case

A.4.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in the multi carrier case reported in section 4.2.2.

This scenario implies the presence of 2 carriers and 6 cells as given in Table A.4.3 and A.4.4. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.3: General test parameters for Cell Re-selection in Multi carrier case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
	HCS		Not used	
	UE_TXPWR_MAX_RACH	dBm	21	The value shall be used for all cells in the test.
	Qrxlevmin	dBm	-102	The value shall be used for all cells in the test.
	Access Service Class (ASC#0) - Persistence value		1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
	T_{SI}	s	1.28	The value shall be used for all cells in the test.
	DRX cycle length	s	1.28	The value shall be used for all cells in the test.
	T1	s	30	
	T2	s	15	

Table A.4.4: Cell re-selection multi carrier multi cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	6	0	6	0	0	6	0	6	-3	-3	-3	-3
PCCPCH RSCP	dBm	-67	-73			-73	-67			-76	-76		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0C1, C5:0; C1, C6:0				C2, C1: 0; C2, C3:0; C2,C4:0C2, C5:0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5:0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 2			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3
PCCPCH RSCP	dBm	-76	-76			-76	-76			-76	-76		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0 C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.4.2.2.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.3 Scenario 3: TDD/FDD cell re-selection

A.4.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the TDD/FDD cell re-selection delay reported in section 4.2.2.

This scenario implies the presence of 1 TDD and 1 FDD cell as given in Table A.4.5 and A.4.6.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.5: General test parameters for the TDD/FDD cell re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	TDD cell
	Neighbour cells		Cell2	FDD cell
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1.28	The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	30	
T2		s	15	

Table A.4.6: TDD/FDD cell re-selection

Parameter	Unit	Cell 1				Cell 2	
		0		8		n.a.	n.a.
Timeslot Number		T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2	
CPICH_Ec/lor	dB	n.a.		n.a.		-10	-10
PCCPCH_Ec/lor	dB	-3	-3			-12	-12
SCH_Ec/lor	dB	-9	-9	-9	-9	-12	-12
SCH _{offset}		0	0	0	0	n.a.	n.a.
PICH_Ec/lor	dB			-3	-3	-15	-15
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-0,941	-0,941
\hat{I}_{or}/I_{oc}	dB	3	-2	3	-2	-2	3
I_{oc}	dBm/3.8 4 MHz	-70					
CPICH_RSCP	dBm	n.a.		n.a.		-82	-77
PCCPCH_RSCP	dBm	-70	-75			n.a.	n.a.
Cell_selection and reselectionquality _measure		CPICH_RSCP				CPICH_RSCP	
Qrxlevmin	dBm	-102				-115	
Qoffset1 _{s,n}	dB	C1, C2: -12				C2, C1: +12	
Qhyst1 _s	dB	0				0	
Treselection	s	0				0	
Sintersearch	dB	not sent				not sent	
Propagation Condition		AWGN				AWGN	

NOTE: The purpose of this test case is to evaluate the delay of the TDD/FDD re-selection process, it is not intended to give reasonable values for a TDD/FDD cell re-selection.

A.4.2.3.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateFDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateFDD}}$ See Table 4.1 in section 4.2.2.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.4 Scenario 4: inter RAT cell re-selection

A.4.2.4.1 Test Purpose and Environment

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.3.2.1.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. Test parameters are given in Table, A.4.7, A.4.8, A.4.9.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the TDD cell 1 is better ranked as the GSM cell 2 during T1 and the GSM cell 2 is better ranked than the TDD cell 1 during T2.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.7: General test parameters for UTRAN to GSM Cell Re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	TDD Cell
	Neighbour cell		Cell2	GSM Cell
Final condition	Active cell		Cell2	
DRX cycle length		s	1,28	UTRAN cell
BCCH repetition period (GSM cell)		s	1,87	In GSM the system information is scheduled according to an 8 x (51 x 8) cycle (i.e. a system information message is transmitted every 235 ms). The cell selection parameters in system info 3 and 4 are transmitted at least every second. (GSM 05.02)
T1		s	15	
T2		s	15	

Table A.4.8: Cell re-selection UTRAN to GSM cell case (cell 1)

Parameter	Unit	Cell 1 (UTRA)			
		0		8	
Timeslot Number		T1	T2	T1	T2
UTRA RF Channel Number		Channel 1		Channel 1	
PCCPCH_Ec/lor	dB	-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9
SCH_toffset		0	0	0	0
PICH_Ec/lor	dB			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	3	-2	3	-2
I_{oc}	dBm/3, 84 MHz	-70		-70	
PCCPCH RSCP	dBm	-70	-75		
Propagation Condition		AWGN		AWGN	
Treselection	s	0			
Ssearch _{RAT}	dB	not sent			

Table A.4.9: Cell re-selection UTRAN to GSM cell case (cell 2)

Parameter	Unit	Cell 2 (GSM)	
		T1	T2
Absolute RF Channel Number		ARFCN 1	
RXLEV	dBm	-80	-70
RXLEV_ACCESS_MIN	dBm	-100	
MS_TXPWR_MAX_CCH	dBm	30	

NOTE: The purpose of this test case is to evaluate the delay of the TDD/GSM re-selection process, it is not intended to give reasonable values for a TDD/GSM cell re-selection.

A.4.2.4.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send LOCATION UPDATING REQUEST message to perform a Location update.

The cell re-selection delay shall be less than [8] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The UE shall keep a running average of 4 measurements, thus gives 4*1280ms ($T_{\text{measureGSM}}$ Table 4.1), means 5.12 seconds can elapse from the beginning of time period T2 before the UE has finished the measurements to evaluate that the GSM cell fulfils the re-selection criteria.

The cell selection parameters in the BCCH of the GSM cell in system info 3 and 4 are transmitted at least every second.

A.5 UTRAN Connected Mode Mobility

A.5.1 TDD/TDD Handover

A.5.1.1 Handover to intra-frequency cell

A.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirement for the intra-frequency handover delay in CELL_DCH state in the single carrier case reported in section 5.1.2.1.

The test parameters are given in Table A.5.1.1 and A.5.1.2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 1G shall be used, and that P-CCPCH RSCP and SFN-CFN observed timed difference shall be reported together with Event 1G. The test consists of three successive time periods, with a time duration of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

UTRAN shall send a Physical Channel reconfiguration message with activation time at the beginning of T3 with a new active cell, cell 2. The Physical Channel reconfiguration message shall be sent to the UE such that the delay between the end of the last received TTI containing the message and the beginning of T3 is at least equal to the RRC procedure delay as defined in [16].

The second Beacon timeslot shall be provided in timeslot 8 for both cell 1 and cell 2. The UL DPCH shall be transmitted in timeslot 12.

Table A.5.1.1: General test parameters for Handover to intra-frequency cell

Parameter		Unit	Value	Comment
DCH parameters			DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A.2.2
Power Control			On	
Target quality value on DTCH		BLER	0.01	
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final condition	Active cell		Cell 2	
HCS			Not used	
O		dB	0	Cell individual offset. This value shall be used for all cells in the test.
Hysteresis		dB	0	
Time to Trigger		ms	0	
Filter coefficient			0	
Monitored cell list size			6 TDD neighbours on Channel 1	
T1		s	10	
T2		s	10	
T3		s	10	

Table A.5.1.2: Cell specific test parameters for Handover to intra-frequency cell

Parameter	Unit	Cell 1						Cell 2					
		0			4			0			5		
DL timeslot number		T1	T2	T3	T1	T2	T3	T1	T2	T3	T1	T2	T3
UTRA RF Channel Number		Channel 1						Channel 1					
PCCPCH_Ec/I _{or}	dB	-3			n.a.			-3			n.a.		
SCH_Ec/I _{or}	dB	-9			n.a.			-9			n.a.		
SCH_t _{offset}	dB	0			n.a.			5			n.a.		
DPCH_Ec/I _{or}	dB	n.a.			Note 1		n.a.	n.a.			n.a.		Note 1
OCNS_Ec/I _{or}	dB	-3,12			Note 2		n.a.	n.a.	-3,12		n.a.		Note 2
\hat{I}_{or}/I_{oc}	dB	1						-Inf.	3		-Inf.		3
PCCPCH RSCP	dBm	-72			n.a.			-Inf.	-70		n.a.		
I_{oc}	dBm/ 3,84 MHz	-70											
Propagation Condition		AWGN											
Note 1: The DPCH level is controlled by the power control loop													
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I _{or} .													

A.5.1.1.2 Test Requirements

The UE shall start to transmit the UL DPCH to Cell 2 less than 40 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.1.2 Handover to inter-frequency cell

A.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirement for the inter-frequency handover delay in CELL_DCH state in the dual carrier case reported in section 5.1.2.1.

The test consists of two successive time periods, with a time duration T1 and T2. The test parameters are given in tables A.5.1.3 and A.5.1.4 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 2C shall be used. The PCCPCH RSCP and SFN-CFN observed time difference of the best cell on the unused frequency shall be reported together with Event 2C reporting. At the start of time duration T1, the UE may not have any timing information of cell 2.

UTRAN shall send a Physical Channel reconfiguration message with activation time at beginning of T3 with one active cell, cell 2. The Physical Channel reconfiguration message shall be sent to the UE such that the delay between the last the end of the last received TTI containing the message and the beginning of T3 is at least equal to the RRC procedure delay as defined in [16].

The second Beacon timeslot shall be provided in timeslot 8 for cell 1 and in timeslot 10 for cell 2. The UL DPCH shall be transmitted in timeslot 12.

Table A.5.1.3: General test parameters for Handover to inter-frequency cell

Parameter		Unit	Value	Comment
DCH parameters			DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A.2.2
Power Control			On	
Target quality value on DTCH		BLER	0.01	
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final condition	Active cell		Cell 2	
HCS			Not used	
O		dB	0	Cell individual offset. This value shall be used for all cells in the test.
Hysteresis		dB	0	Hysteresis parameter for event 2C
Time to Trigger		ms	0	
Threshold non-used frequency		dBm	-80	Applicable for Event 2C
W non-used frequency			1	Applicable for Event 2C
Filter coefficient			0	
Monitored cell list size			6 TDD neighbours on Channel 1 6 TDD neighbours on Channel 2	
T _{SI}		s	1,28	The value shall be used for all cells in the test.
T1		s	10	
T2		s	10	
T3		s	10	

Table A.5.1.4: Cell Specific parameters for Handover to inter-frequency cell

Parameter	Unit	Cell 1						Cell 2					
		0			4			2			5		
		T1	T2	T3	T1	T2	T3	T1	T2	T3	T1	T2	T3
UTRA RF Channel Number		Channel 1						Channel 2					
PCCPCH_Ec/lor	dB	-3			n.a.			-3			n.a.		
SCH_Ec/lor	dB	-9			n.a.			-9			n.a.		
SCH_t _{offset}	dB	0			n.a.			5			n.a.		
DPCH_Ec/lor	dB	n.a.			Note 1		n.a.	n.a.			n.a.		Note 1
OCNS_Ec/lor	dB	-3,12			Note 2		n.a.	n.a.	-3,12		n.a.		Note 2
\hat{I}_{or}/I_{oc}	dB	1						-Inf.	7		-Inf.	7	
PCCPCH RSCP	dBm	-72			n.a.			-Inf.	-66		n.a.		
I_{oc}	dBm/ 3,84 MHz	-70											
Propagation Condition		AWGN											
Note 1: The DPCH level is controlled by the power control loop													
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to lor .													

A.5.1.2.2 Test Requirements

The UE shall start to transmit the UL DPCH to Cell 2 less than 40 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.2 TDD/FDD Handover

A.5.2.1 Test purpose and Environment

The purpose of this test is to verify the requirement for the TDD/FDD handover delay in CELL_DCH state reported in section 5.2.2.1.

The test parameters are given in Table A.5.2.1, A.5.2.2 and A.5.2.3 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 1G and 2B shall be used. The CPICH_RSCP of the best cell on the unused frequency shall be reported together with Event 2B reporting. The test consists of three successive time periods, with a time duration of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

UTRAN shall send a Physical Channel reconfiguration message with activation time at the beginning of T3 with a new active cell, cell 2. The Physical Channel reconfiguration message shall be sent to the UE such that the delay between the end of the last received TTI containing the message and the beginning of T3 is at least equal to the RRC procedure delay as defined in [16].

Table A.5.2.1: General test parameters for TDD/FDD handover

Parameter	Unit	Value	Comment
DCH parameters		DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A.2.2
Power Control		On	
Target quality value on DTCH	BLER	0.01	
Initial conditions	Active cell	Cell 1	TDD cell
	Neighbour cell	Cell 2	FDD cell
Final condition	Active cell	Cell 2	FDD cell
HCS		Not used	
O	dB	0	Cell individual offset. This value shall be used for all cells in the test.
Hysteresis	dB	3	Hysteresis parameter for event 2B
Time to Trigger	ms	0	
Absolute threshold used frequency	dBm	-71	Applicable for Event 2B
Threshold non-used frequency	dBm	-80	Applicable for Event 2B
W used frequency		1	Applicable for Event 2B
W non-used frequency		1	Applicable for Event 2B
Filter coefficient		0	
Monitored cell list size		6 TDD neighbours on Channel 1 6 FDD neighbours on Channel 2	
T _{SI}	s	1.28	The value shall be used for all cells in the test.
T1	s	5	
T2	s	15	
T3	s	5	

Table A.5.2.2: Cell 1 specific test parameters for TDD/FDD handover

Parameter	Unit	Cell 1					
		0			2		
DL timeslot number		T1	T2	T3	T1	T2	T3
UTRA RF Channel Number		Channel 1					
PCCPCH_Ec/I _{or}	dB	-3			n.a.		
SCH_Ec/I _{or}	dB	-9			n.a.		
SCH_t _{offset}	dB	0			n.a.		
DPCH_Ec/I _{or}	dB	n.a.			Note 1		n.a.
OCNS_Ec/I _{or}	dB	-3,12			Note 2		n.a.
\hat{I}_{or}/I_{oc}	dB	5	-1		5	-1	
PCCPCH RSCP	dBm	-68	-74		n.a.		
I_{oc}	dBm/ 3,84 MHz	-70					
Propagation Condition		AWGN					
Note 1: The DPCH level is controlled by the power control loop							
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I _{or} .							

Table A.5.2.3: Cell 2 specific test parameters for TDD/FDD handover

Parameter	Unit	Cell 2	
		T1, T2	T3
CPICH_Ec/I _{or}	dB	-10	
PCCPCH_Ec/I _{or}	dB	-12	
SCH_Ec/I _{or}	dB	-12	
PICH_Ec/I _{or}	dB	-15	
DPCH_Ec/I _{or}	dB	n.a.	Note 1
OCNS_Ec/I _{or}	dB	-0,941	Note 2
CPICH_RSCP	dBm	-83	-77
\hat{I}_{or}/I_{oc}	dB	-3	3
I_{oc}	dBm/3. 84 MHz	-70	
Propagation Condition		AWGN	
Note 1: The DPCH level is controlled by the power control loop			
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I _{or} .			

A.5.2.2 Test Requirements

The UE shall start to transmit the UL DPCH to Cell 2 less than [130] ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.3 TDD/GSM Handover

NOTE: This section is included for consistency with numbering with section 5 currently no test covering requirements in sections 5.3.2.1 and 5.3.2.2 exists.

A.5.4 Cell Re-selection in CELL_FACH

A.5.4.1 Scenario 1: TDD/TDD cell re-selection single carrier case

A.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirement for the cell re-selection delay in CELL_FACH state in the single carrier case reported in section 5.4.2.2.1. The test parameters are given in Tables A.5.4.1 to A.5.4.4.

Table A.5.4.1: General test parameters for Cell Re-selection in CELL_FACH

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Qrxlevmin		dBm	-102	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value		-	1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1,28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.5.4.2: Physical channel parameters for S-CCPCH.

Parameter	Unit	Level
Channel bit rate	Kbps	24,4
Channel symbol rate	Ksps	12,2
Slot Format #	-	0
Frame allocation	-	Continuous frame allocation
Midamble allocation	-	Default Midamble

Table A.5.4.3: Transport channel parameters for S-CCPCH

Parameter	FACH
Transport Channel Number	1
Transport Block Size	240
Transport Block Set Size	240
Transmission Time Interval	20 ms
Type of Error Protection	Convolutional Coding
Coding Rate	1/2
Rate Matching attribute	256
Size of CRC	16

Table A.5.4.4: Cell specific test parameters for Cell Re-selection in CELL_FACH

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/Ior	dB	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/Ior	dB			-3	-3			-3	-3			-3	-3

OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	9	7	9	7	7	9	7	9	-1	-1	-1	-1
PCCPCH RSCP	dBm	-64	-66			-66	-64			-74	-74		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0 C1, C5:0; C1,C6:0				C2, C1: 0; C2, C3:0; C2,C4:0 C2, C5: 0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5: 0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection		0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
FACH measurement occasion info		not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
PCCPCH RSCP	dBm	-74	-74			-74	-74			-74	-74		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0 C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection		0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
FACH measurement occasion info		not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

Note: S-CCPCH shall not be located in TS0.

A.5.4.1.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the CELL UPDATE message with cause value “cell reselection“ in cell 2.

The cell re-selection delay shall be less than 2,5 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{reselection,intra}} = T_{\text{identify intra}} + T_{\text{SI}}$, where:

$T_{\text{identify intra}}$ Specified in 8.4.2.2.1, gives 800 ms for this test case.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 2,08s, allow 2,5 s in the test case.

A.5.4.2 Scenario 2: TDD/TDD cell re-selection multi carrier case

A.5.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirement for the cell re-selection delay in CELL_FACH state in the multi carrier case reported in section 5.4.2.2.2. The test parameters are given in Tables A.5.4.5 to A.5.4.8.

Table A.5.4.5: General test parameters for Cell Re-selection in CELL_FACH

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Qrxlevmin		dBm	-102	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value		-	1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1,28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.5.4.6: Physical channel parameters for S-CCPCH.

Parameter	Unit	Level
Channel bit rate	Kbps	24,4
Channel symbol rate	Ksps	12,2
Slot Format #	-	0
Frame allocation	-	Continuous frame allocation
Midamble allocation	-	Default Midamble

Table A.5.4.7: Transport channel parameters for S-CCPCH

Parameter	FACH
Transport Channel Number	1
Transport Block Size	240
Transport Block Set Size	240
Transmission Time Interval	20 ms
Type of Error Protection	Convolutional Coding
Coding Rate	1/2
Rate Matching attribute	256
Size of CRC	16

Table A.5.4.8: Cell specific test parameters for Cell Re-selection in CELL_FACH

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3

OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	9	3	9	3	3	9	3	9	-1	-1	-1	-1
PCCPCH RSCP	dBm	-64	-70			-70	-64			-74	-74		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0 C1, C5:0; C1,C6:0				C2, C1: 0; C2, C3:0; C2,C4:0 C2, C5: 0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5: 0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection		0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
FACH measurement occasion info		not sent				not sent				not sent			
Inter-frequency TDD measurement indicator		TRUE				TRUE				TRUE			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 2			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
PCCPCH RSCP	dBm	-74	-74			-74	-74			-74	-74		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0 C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection		0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
FACH measurement occasion info		not sent				not sent				not sent			
Inter-frequency TDD measurement indicator		TRUE				TRUE				TRUE			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

Note: S-CCPCH shall not be located in TS0.

A.5.4.2.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the CELL UPDATE message with cause value "cell reselection" in cell 2.

The cell re-selection delay shall be less than 7 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{reselection,inter}} = T_{\text{identify inter}} + T_{\text{SI}}$, where:

$T_{\text{identify intra}}$ Specified in 8.4.2.3.1, gives 5 s for this test case.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 6,28s, allow 7 s in the test case.

A.5.5 Cell Re-selection in CELL_PCH

A.5.5.1 Scenario 1: TDD/TDD cell re-selection single carrier case

A.5.5.1.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in CELL_PCH state in section 5.5.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.5.5.1 and A.5.5.2.

Table A.5.5.1: General test parameters for Cell Re-selection single carrier multi-cell case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Qrxlevmin		dBm	-102	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1.28	The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.5.5.2: Cell re-selection single carrier multi-cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	9	7	9	7	7	9	7	9	-1	-1	-1	-1
PCCPCH RSCP	dBm	-64	-66			-66	-64			-74	-74		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0 C1, C5:0; C1, C6:0				C2, C1: 0; C2, C3:0; C2,C4:0 C2, C5: 0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5: 0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
PCCPCH RSCP	dBm	-74	-74			-74	-74			-74	-74		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.5.5.1.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the CELL UPDATE message with cause "cell reselection" in cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.5.5.2 Scenario 2: TDD/TDD cell re-selection multi carrier case

A.5.5.2.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in CELL_PCH state in section 5.5.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.5.5.3 and A.5.5.4.

Table A.5.5.3: General test parameters for Cell Re-selection in Multi carrier case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
	HCS		Not used	
	UE_TXPWR_MAX_RACH	dBm	21	The value shall be used for all cells in the test.
	Qrxlevmin	dBm	-102	The value shall be used for all cells in the test.
	Access Service Class (ASC#0) - Persistence value		1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
	T _{SI}	s	1.28	The value shall be used for all cells in the test.
	DRX cycle length	s	1.28	The value shall be used for all cells in the test.
	T1	s	30	
	T2	s	15	

Table A.5.5.4: Cell re-selection multi carrier multi cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 1			
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/Ior	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/Ior	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	6	0	6	0	0	6	0	6	-3	-3	-3	-3
PCCPCH RSCP	dBm	-67	-73			-73	-67			-76	-76		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0C1, C5:0; C1, C6:0				C2, C1: 0; C2, C3:0; C2,C4:0C2, C5:0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5:0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 2			
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/Ior	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/Ior	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3
PCCPCH RSCP	dBm	-76	-76			-76	-76			-76	-76		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0 C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.5.5.2.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the CELL UPDATE message with cause "cell reselection" in cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.5.6 Cell Re-selection in URA_PCH

A.5.6.1 Scenario 1: TDD/TDD cell re-selection single carrier case

A.5.6.1.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in URA_PCH state in section 5.6.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.5.6.1 and A.5.6.2.

Cell1 and Cell2 shall belong to different UTRAN Registration Areas (URA).

Table A.5.6.1: General test parameters for Cell Re-selection single carrier multi-cell case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
HCS			Not used	
UE_TXPWR_MAX_RACH		dBm	21	The value shall be used for all cells in the test.
Qrxlevmin		dBm	-102	The value shall be used for all cells in the test.
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
T _{SI}		s	1.28	The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.5.6.2: Cell re-selection single carrier multi-cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	9	7	9	7	7	9	7	9	-1	-1	-1	-1
PCCPCH RSCP	dBm	-64	-66			-66	-64			-74	-74		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0 C1, C5:0; C1,C6:0				C2, C1: 0; C2, C3:0; C2,C4:0 C2, C5: 0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5: 0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
PCCPCH RSCP	dBm	-74	-74			-74	-74			-74	-74		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.5.6.1.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the URA UPDATE message with URA update cause value "change of URA" in cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.5.6.2 Scenario 2: TDD/TDD cell re-selection multi carrier case

A.5.6.2.1 Test Purpose and Environment

This test is to verify the requirement for the cell re-selection delay in URA_PCH state in section 5.6.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.5.6.3 and A.5.6.4.

Table A.5.6.3: General test parameters for Cell Re-selection in Multi carrier case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
	HCS		Not used	
	UE_TXPWR_MAX_RACH	dBm	21	The value shall be used for all cells in the test.
	Qrxlevmin	dBm	-102	The value shall be used for all cells in the test.
	Access Service Class (ASC#0) - Persistence value		1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
	T _{SI}	s	1.28	The value shall be used for all cells in the test.
	DRX cycle length	s	1.28	The value shall be used for all cells in the test.
	T1	s	30	
	T2	s	15	

Table A.5.6.4: Cell re-selection multi carrier multi cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
		0		8		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	5	5	5	5	10	10	10	10
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	6	0	6	0	0	6	0	6	-3	-3	-3	-3
PCCPCH RSCP	dBm	-67	-73			-67	-70			-76	-76		
Qoffset1 _{s,n}	dB	C1, C2: 0; C1, C3:0; C1,C4:0C1, C5:0; C1, C6:0				C2, C1: 0; C2, C3:0; C2,C4:0C2, C5:0; C2, C6:0				C3, C1: 0; C3, C2:0; C3,C4:0 C3, C5:0; C3, C6:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
		Cell 4				Cell 5				Cell 6			
Timeslot		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 2			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		15	15	15	15	20	20	20	20	25	25	25	25
PICH_Ec/lor	dB			-3	-3			-3	-3			-3	-3
OCNS_Ec/lor	dB	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3
PCCPCH RSCP	dBm	-76	-76			-76	-76			-76	-76		
Qoffset1 _{s,n}	dB	C4, C1: 0; C4, C2:0; C4,C3:0 C4, C5:0; C4, C6:0				C5, C1: 0; C5, C2:0; C5,C3:0 C5, C4:0; C5, C6:0				C6, C1: 0; C6, C2:0; C6,C3:0 C6, C4:0; C6, C5:0			
Qhyst1 _s	dB	0				0				0			
Treselection	s	0				0				0			
Sintrasearch	dB	not sent				not sent				not sent			
Sintersearch	dB	not sent				not sent				not sent			
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.5.6.2.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the URA UPDATE message with URA update cause value "change of URA" in cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.6 void

A.6A RRC Connection Control

A.6A.1 RRC connection re-establishment delay

A.6A.1.1 Test Purpose and Environment

The purpose is to verify that the RRC connection re-establishment delay is within the specified limits. These tests will verify the requirements in section 6A.1.2.

The test parameters are given in table A.6.1 and table A.6.2 below. In the measurement control information it is indicated to the UE that periodic reporting shall be used. The test consists of 2 successive time periods, with a time duration of T1 and T2 respectively. At the start of time period T2, the dedicated channel is removed.

Table A.6A.1: General test parameters for RRC connection re-establishment delay, Test 1

Parameter	Unit	Value	Comment
Power Control		On	
Active cell		Cell 1	
N313	Frames	20	
N315	Frames	20	
T313	Seconds	0	
T _{SI}	ms	1280	
Monitored cell list size		24	Monitored set shall only include intra frequency neighbours
Cell 2		included in monitored set	Cell parameters according table A6.2.
Reporting frequency	Seconds	4	
T1		10	
T2		6	

Table A.6A.2: Cell specific parameters for RRC connection re-establishment delay test, Test 1

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1			
PCCPCH_Ec/lor	dB	-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_offset		0	0	0	0	15	15	15	15
PICH_Ec/lor				-3	-3			-3	-3
OCNS		-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	3	-13	3	-13	5	5	5	5
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-86			-68	-68		
Propagation Condition		AWGN							

NOTE: The DPCH of cell 1 is located in an other timeslot than 0 or 8, at the start of time period T2, the dedicated channel is removed.

Table A.6A.3: General test parameters for RRC connection re-establishment delay, Test 2

Parameter	Unit	Value	Comment
DCH Parameters		DL Reference measurement channel 12.2 kbps	Located in an other TS than 0 or 8
Power Control		On	
Active cell		Cell 1	
N313	Frames	20	
N315	Frames	20	
T313	Seconds	0	
T_{SI}	ms	1280	
Cells in the monitored set		24	
Channels in the monitored set		Channel 1, Channel 2, Channel 3	
Cell 2		Located on channel 2, cell 2 not included in monitored set	Parameters according table A6.4
Reporting frequency	Seconds	4	
T1		10	
T2		6	

Table A.6A.4: Cell specific parameters for RRC connection re-establishment delay test, Test 2

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		0	0	0	0	15	15	15	15
PICH_Ec/Ior				-3	-3			-3	-3
OCNS		-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	3	-13	3	-13	5	5	5	5
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-86			-68	-68		
Propagation Condition		AWGN							

NOTE: The DPCH of cell 1 is located in an other timeslot than 0 or 8, at the start of time period T2, the dedicated channel is removed.

A.6A.1.2 Test Requirements

A.6A.1.2.1 Test 1

The RRC connection re-establishment delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send of a CELL UPDATE message using the cause "radio link failure".

The RRC connection re-establishment delay shall be less than 1630 ms.

The rate of correct tests observed during repeated tests shall be at least 90%.

NOTE:

N313 is the number in frames of consecutive "out of synch" indications from layer 1 for the established dedicated physical channel before starting timer T313. In this test case N313=20 frames, resulting in 200ms to be taken into account for the test case.

The RRC connection re-establishment delay can be expressed as: $50\text{ms} + T_{\text{search}} + T_{SI}$ where:

T_{search} is the time it takes for the UE to search the cell. $T_{\text{search}} = 100\text{ ms}$ in case of a known target cell.

T_{SI} Maximum repetition rate of relevant system information blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total delay of 1.63s in the test case.

A.6A.1.2.2 Test 2

The RRC connection re-establishment delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send of a CELL UPDATE message using the cause "radio link failure".

The RRC connection re-establishment delay shall be less than 3930 ms.

The rate of correct tests observed during repeated tests shall be at least 90%.

NOTE:

N313 is the number in frames of consecutive "out of synch" indications from layer 1 for the established dedicated physical channel before starting timer T313. In this test case N313=20 frames, resulting in 200ms to be taken into account for the test case.

The RRC connection re-establishment delay can be expressed as: $50\text{ms} + T_{\text{search}} * NF + T_{SI}$ where:

T_{search} is the time it takes for the UE to search the cell. $T_{\text{search}} = 800$ ms in case of an unknown target cell.

NF is the number of different frequencies in the monitored set. $NF = 3$

T_{SI} Maximum repetition rate of relevant system information blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 3.93s in the test case.

A.7 Timing characteristics

A.7.1 Timing Advance

A.7.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements on timing advance adjustment accuracy and timing advance adjustment delay in section 7.1.2.

The test parameters are given in table A.7.1.1 and table A.7.1.2. The test consists of two successive time periods, with a time duration of T1 and T2 respectively. At the start of time duration T1, the UE shall transmit with the Uplink Timing Advance value set to zero, i.e. Timing Advance disabled.

During time period T1, UTRAN shall send an Uplink Physical Channel control message with activation time at the beginning of T2. The Uplink Physical Channel Control message shall be sent to the UE such that the delay between the end of the last received TTI containing the message and the beginning of T2 is greater than or equal to the RRC procedure delay as defined in [16].

Table A.7.1.1: General test parameters for Timing Advance test

Parameter		Unit	Value	Comment
DCH parameters			DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A.2.2
Power Control			On	
Target quality value on DTCH		BLER	0.01	
Initial conditions	Timing Advance value		0	IE "Uplink timing advance" value zero or IE "Uplink timing advance control" value disabled.
Final condition	Timing Advance value		5	IE "Uplink timing advance" value set to 5.
Monitored cell list size			6 TDD neighbours on Channel 1	
T_{SI}		s	1.28	The value shall be used for all cells in the test.
T1		s	5	
T2		s	5	

Table A.7.1.2: Cell specific test parameters for Timing Advance test

Parameter	Unit	Cell 1			
		0		2	
DL timeslot number		T1	T2	T1	T2
UTRA RF Channel Number		Channel 1			
PCCPCH_Ec/I _{or}	dB	-3		n.a.	
SCH_Ec/I _{or}	dB	-9		n.a.	
SCH_t _{offset}	dB	0		n.a.	
DPCH_Ec/I _{or}	dB	n.a.		Note 1	
OCNS_Ec/I _{or}	dB	-3,12		Note 2	
\hat{I}_{or}/I_{oc}	dB	3			
I_{oc}	dBm/ 3,84 MHz	-70			
Propagation Condition		AWGN			
Note 1: The DPCH level is controlled by the power control loop					
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I _{or}					

A.7.1.2 Test Requirements

The UE shall apply the signalled Timing Advance value to the UL DPCH transmission timing at the designated activation time, i.e the beginning of time period T2. The Timing Advance adjustment accuracy shall be within the limits specified in section 7.1.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.2 Cell synchronization accuracy

NOTE: This section is included for consistency with numbering with section 7; currently no test covering requirements in section 7.2 exists.

A.7.3 UE Transmit Timing

NOTE: This section is included for consistency with numbering with section 7; currently no test covering requirements in section 7.3 exists.

A.8 UE Measurements Procedures

A.8.1 TDD intra frequency measurements

A.8.1.1 Event triggered reporting in AWGN propagation conditions

A.8.1.1.1 Test Purpose and Environment

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" as illustrated in Figure A.8-1. General test parameters are given in the table A.8.1A below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 1G shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 1G reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts. The cell specific test parameters are given in Table A.8.1B below.

Table A.8.1A: General test parameters for correct reporting of intra frequency neighbours in AWGN propagation condition

Parameter	Unit	Value	Comment
DPCH parameters active cell		DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A. The DPCH is located in an other timeslot than 0 or 8
Power Control		On	
Active cell		Cell 1	
Threshold used frequency	dB	-71	Absolute P-CCPCH RSCP threshold for event 1G
Hysteresis	dB	0	
Time to Trigger	ms	0	
Filter coefficient		0	
Monitored cell list size		24	Measurement control information is sent before T1 starts.
T1	s	10	
T2	s	10	

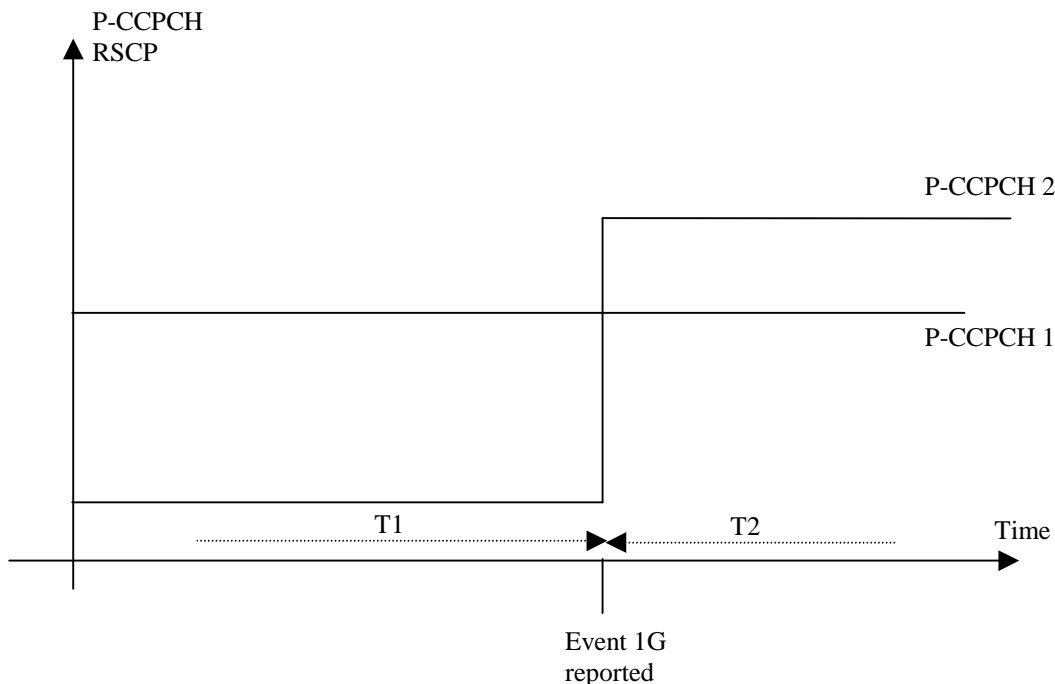


Figure A.8.1: Illustration of parameters for handover measurement reporting test case

Table A.8.1B Cell specific parameters for correct reporting of intra frequency neighbours in AWGN propagation condition

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1			
P-CCPCH_Ec/lor	dB	-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		0	0	0	0	15	15	15	15
PICH_Ec/lor				-3	-3			-3	-3
OCNS		-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	3	3	3	3	-Infinity	5	-Infinity	5
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-70			-Infinity	-68		
Propagation Condition		AWGN							

NOTE: The DPCH of all cells are located in an other timeslot than 0 or 8

A.8.1.1.2 Test Requirements

The UE shall send one Event 1G triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.1.2 Event 1H and 1I triggered reporting in AWGN propagation conditions

A.8.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of event 1H and event 1I. This test will partly verify the requirements in section 8.1.2 and section 9.1.

The test parameters are given in Table A.8.1.2, Table A.8.1.2A and Table A.8.1.2B below. The test consists of five successive time periods, with a time duration of T1, T2, T3, T4 and T5 respectively. Two cells shall be present in the test, cell 1 being the current serving cell and cell 2 being a neighbour cell on the used frequency.

In the measurement control information it shall be indicated to the UE that event-triggered reporting with event 1H and event 1I shall be used and that Timeslot ISCP and P-CCPCH RSCP shall be reported together with event 1H and 1I. Measurement control information shall be sent to the UE before the beginning of time period T1.

The second Beacon timeslot shall be provided in timeslot 8 for both cell 1 and cell 2. The UL DPCH shall be transmitted in timeslot 10. In addition, timeslots 3 and 4 shall be allocated as DL timeslots. Cell 1 and cell 2 shall be synchronised, i.e. share the same frame and timeslot timing.

Table A.8.1.2: General test parameters for correct event 1H and 1I reporting in AWGN propagation condition

Parameter		Unit	Value	Comment
DCH parameters			DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A.2.2
Power Control			On	
Target quality value on DTCH		BLER	0.01	
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final condition	Active cell		Cell 1	
HCS			Not used	
O		dB	0	Cell individual offset. This value shall be used for all cells in the test.
Timeslot list cell 1			2, 3, 4	Timeslot numbers in IE "Cell info" for Cell 1
Timeslot list cell 2			4	Timeslot numbers in IE "Cell info" for Cell 2
Threshold used frequency		dBm	-68	Threshold 1 applicable for event 1H, cell 1 timeslots 2, 4 and cell 2 timeslot 4
Threshold used frequency		dBm	-73	Threshold 2 applicable for event 1H, cell 1 timeslots 2, 3, 4 and cell 2 timeslot 4
Threshold used frequency		dBm	-67	Applicable for event 1I, cell 1 timeslots 2, 4 and cell 2 timeslot 4
Hysteresis		dB	0	
Time to Trigger		ms	0	
Filter coefficient			0	
Monitored cell list size			6 TDD neighbours on Channel 1	Cell 2 shall belong to the monitored set
T1		s	5	
T2		s	5	
T3		s	5	
T4		s	5	
T5		s	5	

Table A.8.1.2A: Cell 1 specific test parameters for correct event 1H and 1I reporting in AWGN propagation condition

Parameter	Unit	Cell 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
UTRA RF Channel Number		Channel 1									
DL timeslot number		0					2				
PCCPCH_Ec/Ior	dB	-3					n.a.				
SCH_Ec/Ior	dB	-9					n.a.				
SCH_t_offset	dB	5					n.a.				
DPCH_Ec/Ior	dB	n.a.					Note 1				
OCNS_Ec/Ior	dB	-3.12					Note 2				
\hat{I}_{or}/I_{oc}	dB	4					4				
PCCPCH RSCP	dBm	-69					n.a.				
I_{oc}	dBm / 3,84 MHz	-70									
Propagation Condition		AWGN									
DL timeslot number		3					4				
PCCPCH_Ec/Ior	dB	n.a.					n.a.				
SCH_Ec/Ior	dB	n.a.					n.a.				
SCH_t_offset	dB	n.a.					n.a.				
DPCH_Ec/Ior	dB	n.a.					n.a.				
OCNS_Ec/Ior	dB	0					0				
\hat{I}_{or}/I_{oc}	dB	3					0			6	
PCCPCH RSCP	dBm	n.a.					n.a.				
I_{oc}	dBm / 3,84 MHz	-70									
Propagation Condition		AWGN									
Note 1: The DPCH level is controlled by the power control loop											
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to Ior											

Table A.8.1.2B: Cell 2 specific test parameters for correct event 1H and 1I reporting in AWGN propagation condition

Parameter	Unit	Cell 2									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
UTRA RF Channel Number		Channel 1									
DL timeslot number		0					2				
PCCPCH_Ec/Ior	dB	-3					n.a.				
SCH_Ec/Ior	dB	-9					n.a.				
SCH_t_offset	dB	10					n.a.				
DPCH_Ec/Ior	dB	n.a.					n.a.				
OCNS_Ec/Ior	dB	-3,12					0				
\hat{I}_{or}/I_{oc}	dB	1					0	6	0		
PCCPCH RSCP	dBm	-72					n.a.				
I_{oc}	dBm / 3,84 MHz	-70									
Propagation Condition		AWGN									
DL timeslot number		3					4				
PCCPCH_Ec/Ior	dB	n.a.					n.a.				
SCH_Ec/Ior	dB	n.a.					n.a.				
SCH_t_offset	dB	n.a.					n.a.				
DPCH_Ec/Ior	dB	n.a.					n.a.				
OCNS_Ec/Ior	dB	0					0				
\hat{I}_{or}/I_{oc}	dB	3					6			0	
PCCPCH RSCP	dBm	n.a.					n.a.				
I_{oc}	dBm / 3,84 MHz	-70									
Propagation Condition		AWGN									

A.8.1.2.2 Test Requirements

The UE shall send one event 1I triggered measurement report, with a measurement reporting delay less than 400 ms from the beginning of time period T2.

The UE shall send one event 1H triggered measurement report, with a measurement reporting delay less than 400 ms from the beginning of time period T3.

The UE shall send one event 1H triggered measurement report, with a measurement reporting delay less than 400 ms from the beginning of time period T4.

The UE shall send one event 1I triggered measurement report, with a measurement reporting delay less than 400 ms from the beginning of time period T5.

The UE shall not send event 1H or 1I triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.2 TDD inter frequency measurements

A.8.2.1 Correct reporting of neighbours in AWGN propagation condition

A.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when doing inter frequency measurements. The test will partly verify the requirements in section 8.1.2.2.

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" General test parameters are given in the table A.8.2A below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 2C shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 2C reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts.

The cell specific test parameters are shown in Table A.8.2B.

Table A.8.2A: General test parameters for correct reporting of TDD inter frequency neighbours in AWGN propagation condition

Parameter	Unit	Value	Comment
DPCH parameters active cell		DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A. The DPCH is located in an other timeslot than 0 or 8
Power Control		On	
Active cell		Cell 1	
Threshold non used frequency	dB	-71	Absolute P-CCPCH RSCP threshold for event 2C
Hysteresis	dB	0	
Time to Trigger	ms	0	
Filter coefficient		0	
Monitored cell list size		24 on channel 1 16 on channel 2	Measurement control information is sent before T1 starts.
T1	s	10	
T2	s	10	

Table A.8.2B: Cell Specific Parameters for Correct Reporting of inter frequency Neighbours in AWGN Propagation Condition

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
P-CCPCH_Ec/Ior	dB	-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_toffset		0	0	0	0	15	15	15	15
PICH_Ec/Ior				-3	-3			-3	-3
OCNS		-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	3	3	3	3	-Infinity	9	-Infinity	9
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-70			-Infinity	-64		
Propagation Condition		AWGN							

NOTE: The DPCH of all cells are located in an other timeslot than 0 or 8

A.8.2.1.2 Test Requirements

The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than 5 s from the beginning of time period T2.

The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.3 FDD measurements

A.8.3.1 Correct reporting of FDD neighbours in AWGN propagation condition

A.8.3.1.1 Test Purpose and Environment

This test will derive that the terminal makes correct reporting of an event. Cell 1 is current active cell, Cell 2 is a FDD cell. The power level of CPICH RSCP of cell 2 and the P-CCPCH RSCP of cell 1 is changed. General test parameters are given in the table A.8.3A below and they are signalled from test device. New measurement control information, which defines neighbour cells etc., is always sent before the handover starts. The test parameters are given in Table A.8.3B below.

Table A.8.3A: General test parameters for Correct reporting of FDD neighbours in AWGN propagation condition

Parameter	Unit	Value	Comment
DPCH parameters active cell		DL Reference Measurement Channel 12.2 kbps	As specified in TS 25.102 section A. The DPCH is located in an other timeslot than 0 or 8
Power Control		On	
Active cell		Cell 1	
Threshold non used frequency	dB	-86	Absolute CPICH RSCP threshold for event 2C
Hysteresis	dB	0	
W non-used frequency		1	Applicable for event 2C
Time to Trigger	ms	0	
Filter coefficient		0	
Monitored cell list size		24 on channel 1 16 on channel 2	Measurement control information is sent before T1 starts.
T1	s	10	
T2	s	10	

Table A.8.3B: Cell Specific parameters for Correct reporting of FDD neighbours in AWGN propagation condition

Parameter	Unit	Cell 1				Cell 2			
		0		8		n.a.			
Timeslot Number		T1	T2	T1	T2	T1	T2		
UTRA RF Channel Number		Channel 1				Channel 2			
CPICH_Ec/Ior	dB	n.a.		n.a.		-10			
PCCPCH_Ec/Ior	dB	-3	-3			-12			
SCH_Ec/Ior	dB	-9	-9	-9	-9	-12			
SCH_toffset		0	0	0	0	n.a.			
PICH_Ec/Ior				-3	-3	-15			
OCNS	dB	-3,12	-3,12	-3,12	-3,12	-0,941			
\hat{I}_{or}/I_{oc}	dB	3	3	3	3	-infinity	-2		
I_{oc}	dBm/3.84 MHz	-70				-70			
CPICH_RSCP		n.a.				-infinity	-82		
PCCPCH_RSCP	dB	-70	-70	-70	-70	n.a.			
Propagation Condition		AWGN				AWGN			

NOTE: The DPCH of the TDD cell is located in an other timeslot than 0 or 8

A.8.3.1.2 Test Requirements

The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than [5] seconds from the start of time period T2.

The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.9 Measurement Performance Requirements

Unless explicitly stated:

- Reported measurements shall be within defined range in 90 % of the cases.

- Measurement channel is 12.2 kbps as defined in TS 25.102 annex A. This measurement channel is used both in active cell and cells to be measured.
- Cell 1 is the active cell.
- Single task reporting.

Power control is active.

A.9.1 Measurement Performance for UE

If not otherwise stated, the test parameters in table A.9.1 should be applied for UE RX measurements requirements in this clause.

A.9.1.1 TDD intra frequency measurements

In this case all cells are on the same frequency. The table A.9.1 and notes 1-5 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.1: Intra frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1		Cell 2	
		Channel 1		Channel 1	
UTRA RF Channel number		Channel 1		Channel 1	
Timeslot		0	8	0	8
P-CCPCH Ec/Ior	dB	-3	-	-3	-
SCH Ec/Ior	dB	-9	-9	-9	-9
PICH Ec/Ior	dB	-	-3	-	-3
OCNS	dB	-3,12	-3,12	-3,12	-3,12
Ior/Ioc	dB	[]		[]	
Ioc	dBm/ 3,84 MHz	-70		-70	
Range 1:Io	dBm	-94..-70		-94..-70	
Range 2: Io		-94..-50		-94..-50	
Propagation condition	-	AWGN		AWGN	

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_o - P\text{-CCPCH_Ec/Ior}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_o at receiver input and the geometry factor $\hat{I}_{or/I_{oc}}$.

Note 5: The DPCH of all cells are located in an other timeslot than 0 or 8

A.9.1.2 TDD inter frequency measurements

In this case all cells are on the same frequency. The table A.9.2 and notes 1-5 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.2: Inter frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1		Cell 2	
		Channel 1		Channel 2	
UTRA RF Channel number					
Timeslot		0	8	0	8
P-CCPCH Ec/Ior	dB	-3	-	-3	-
SCH Ec/Ior	dB	-9	-9	-9	-9
PICH Ec/Ior	dB	-	-3	-	-3
OCNS	dB	-3,12	-3,12	-3,12	-3,12
\hat{I}_{or}/I_{oc}	dB	[]		[]	
I_{oc}	dBm/ 3,84 MHz	-70		-70	
Range 1:Io Range 2: Io	dBm	-94..-70 -94..-50		-94..-70 -94..-50	
Propagation condition	-	AWGN		AWGN	

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_o - P\text{-CCPCH_Ec/Ior}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_o at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

Note 5: The DPCH of all cells are located in an other timeslot than 0 or 8

A.9.1.3 FDD inter frequency measurements

In this case both cells are in different frequency. Table A.9.3 and notes 1-6 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.3: CPICH Inter frequency test parameters

Parameter	Unit	Cell 1		Cell 2
		0	8	n.a
Timeslot Number				n.a
UTRA RF Channel Number		Channel 1		Channel 2
CPICH Ec/Ior	dB	n.a.	n.a.	-10
P-CCPCH Ec/Ior	dB	-3		-12
SCH Ec/Ior	dB	-9	-9	-12
SCH t_{offset}		0	0	n.a.
PICH Ec/Ior			-3	-15
DPCH Ec/Ior	dB	n.a.	n.a.	-15
OCNS	dB	-3,12	-3,12	-1,11
\hat{I}_{or}/I_{oc}	dB	[]	[]	10,5
I_{oc}	dBm/3,84 MHz	-70		Note 5
Range 1:Io Range 2: Io	dBm	-94..-70 -94..-50		-94..-70 -94..-50
Propagation condition	-	AWGN		AWGN

Note 1: $CPICH_RSCP_{1,2} \geq -114$ dBm.

Note 2: $|CPICH_RSCP_1 - CPICH_RSCP_2| \leq 20$ dB

Note 3: $|Channel\ 1\ I_o - Channel\ 2\ I_o| \leq 20$ dB

Note 4: $|I_o - CPICH_Ec/Ior| \leq 20$ dB

Note 5: I_{oc} level shall be adjusted in each carrier frequency according the total signal power I_o at receiver input and the geometry factor \hat{I}_{or}/I_{oc} . $I_o - 10,6\ dB = I_{oc}$

Note 6: The DPCH of the TDD cell is located in an other timeslot than 0 or 8

A.9.1.4 UTRA carrier RSSI inter frequency measurements

The table A.9.4 and notes 1,2 define the limits of signal strengths, where the requirement is applicable.

Table A.9.4: UTRA carrier RSSI Inter frequency test parameters

Parameter	Unit	Cell 1	Cell 2
UTRA RF Channel number	-	Channel 1	Channel 2
\hat{I}_{or}/I_{oc}	dB	-1	-1
I_{oc}	dBm/ 3.84 MHz	Note 2	Note 2
Range 1: I_{oc}	dBm/ 3,84 MHz	-94...-70	-94...-70
Range 2: I_{oc}		-94...-50	-94...-50
Propagation condition	-	AWGN	
Note 1: For relative accuracy requirement $ \text{Channel 1}_{I_{oc}} - \text{Channel 2}_{I_{oc}} < 20$ dB.			
Note 2: I_{oc} level shall be adjusted according the total signal power I_{oc} at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .			

Annex B (informative): Change History

Table B.1: CRs approved by TSG-RAN#7

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000020	25.123	001		R99	Update of test requirements for TDD/TDD Handover	F	3.0.0	3.1.0
RP-000020	25.123	002		R99	Update of the requirements for TDD/FDD Handover	F	3.0.0	3.1.0
RP-000020	25.123	003		R99	Update of Cell Selection and Re-selection sections	C	3.0.0	3.1.0
RP-000020	25.123	004		R99	Update of Power management and Radio Link Surveillance sections	F	3.0.0	3.1.0
RP-000020	25.123	005		R99	Update of measurements performance requirements	F	3.0.0	3.1.0
RP-000020	25.123	006		R99	Inclusion of transport channel BER	F	3.0.0	3.1.0
RP-000020	25.123	007		R99	Receiver Timing Advance	F	3.0.0	3.1.0
April 2000	25.123	-	-	R99	MCC Editorial update and clause 10 renumbering	A	3.1.0	3.1.1

Table B.2: CRs approved by TSG-RAN#8

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000209	25.123	008		R99	Correction of UTRAN "Transmitted carrier power" accuracy requirements	F	3.1.1	3.2.0
RP-000209	25.123	009		R99	Measurement reporting delay	F	3.1.1	3.2.0
RP-000209	25.123	010		R99	Update of UE SIR Measurements performance requirements	F	3.1.1	3.2.0
RP-000209	25.123	011		R99	UE Transport Channel BLER measurement	F	3.1.1	3.2.0
RP-000209	25.123	012		R99	Editorial corrections of 25.123	F	3.1.1	3.2.0
RP-000209	25.123	013		R99	Range and mapping in TS 25.123 (TDD)	F	3.1.1	3.2.0
RP-000209	25.123	014		R99	Requirement for UE Tx Power Measurement	F	3.1.1	3.2.0
RP-000209	25.123	015		R99	Addition of test parameters to RRM Measurements performance requirements	F	3.1.1	3.2.0

Table B.3: CRs approved by TSG-RAN#9

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000399	25.123	16		R99	Handling of measurement uncertainties in conformance testing (TDD) for RRM measurements	F	3.2.0	3.3.0
RP-000399	25.123	17		R99	Basestation Physical Channel BER Measurement	F	3.2.0	3.3.0
RP-000399	25.123	18		R99	Repetition Period of System Information	F	3.2.0	3.3.0
RP-000399	25.123	19		R99	RRC connection mobility in cell_FACH, cell_PCH and URA_PCH	F	3.2.0	3.3.0
RP-000399	25.123	20		R99	Basestation SIR Measurement	F	3.2.0	3.3.0
RP-000399	25.123	21		R99	UE SIR Measurement Accuracy	F	3.2.0	3.3.0
RP-000399	25.123	22		R99	UE TS ISCP range/mapping correction	F	3.2.0	3.3.0
RP-000399	25.123	23		R99	Alignment of TDD measurements for UE: SFN-CFN observed time difference	F	3.2.0	3.3.0
RP-000399	25.123	24		R99	UTRAN Transport Channel BLER	F	3.2.0	3.3.0
RP-000399	25.123	25		R99	Accuracy requirements for Node-B synchronization	F	3.2.0	3.3.0
RP-000399	25.123	26		R99	Alignment of TDD measurements with FDD: GPS related measurements	F	3.2.0	3.3.0

Table B.4: CRs approved by TSG RAN #10

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000590	25.123	27		R99	Re-structuring TS 25.123 Section 3	F	3.3.0	3.4.0
RP-000590	25.123	28		R99	Re-structuring TS 25.123 Section 4+A4	F	3.3.0	3.4.0
RP-000590	25.123	29		R99	Re-structuring TS 25.123 Section 5	F	3.3.0	3.4.0
RP-000590	25.123	30		R99	Re-structuring TS 25.123 Section A5	F	3.3.0	3.4.0
RP-000590	25.123	31		R99	Re-structuring TS 25.123 Section 6+7	F	3.3.0	3.4.0
RP-000590	25.123	32		R99	Re-structuring TS 25.123 Section 8+A8	F	3.3.0	3.4.0
RP-000590	25.123	33		R99	Re-structuring TS 25.123 Section 9+A9	F	3.3.0	3.4.0
RP-000590	25.123	34		R99	Re-structuring TS 25.123 Annex A1-3	F	3.3.0	3.4.0

Table B.5: CRs approved by TSG RAN #11

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-010090	25.123	35		R99	Deletion of cell-selection requirements	F	3.4.0	3.5.0
RP-010090	25.123	37		R99	Corrections in idle mode and corresponding test cases.	F	3.4.0	3.5.0
RP-010090	25.123	38		R99	Section 8 changes	F	3.4.0	3.5.0
RP-010090	25.123	39		R99	Section 9 Changes	F	3.4.0	3.5.0
RP-010090	25.123	40		R99	Correction of the cell-reselection and handover requirements in connected mode.	F	3.4.0	3.5.0
RP-010090	25.123	41		R99	Change and completion of the cell-reselection requirements in CELL-FACH state.	F	3.4.0	3.5.0
RP-010090	25.123	42		R99	Change of the cell-reselection requirements.	F	3.4.0	3.5.0
RP-010090	25.123	43		R99	Extension of reporting range for UTRAN UL measurements	F	3.4.0	3.5.0

Table B.6: CRs approved by TSG RAN #12

RAN Doc	Spec	CR	R	Title	Cat	Curr	New
RP-010351	25.123	46		UTRAN Measurements Test Cases	F	3.5.0	3.6.0
RP-010351	25.123	48		Cell synchronisation definition	F	3.5.0	3.6.0
RP-010351	25.123	50		UE measurement capability	F	3.5.0	3.6.0
RP-010351	25.123	52		Measurements performance requirements	F	3.5.0	3.6.0
RP-010351	25.123	54		FDD Measurements in Cell DCH State	F	3.5.0	3.6.0
RP-010351	25.123	56		Test tolerances	F	3.5.0	3.6.0
RP-010351	25.123	58		UE P-CCPCH RSCP relative accuracy	F	3.5.0	3.6.0
RP-010351	25.123	60		UE P-CCPCH RSCP inter-frequency accuracy	F	3.5.0	3.6.0
RP-010351	25.123	62		UE Tx Timing	F	3.5.0	3.6.0
RP-010351	25.123	64		Correction of re-selection requirements in Cell-FACH state.	F	3.5.0	3.6.0
RP-010352	25.123	66		General section 5 corrections	F	3.5.0	3.6.0
RP-010352	25.123	68		Correction to chapter 4.2 Cell re-selection	F	3.5.0	3.6.0
RP-010352	25.123	70		TDD Measurements in Cell DCH State	F	3.5.0	3.6.0
RP-010352	25.123	72		GSM Measurements in Cell DCH State	F	3.5.0	3.6.0
RP-010352	25.123	79		Measurements in Cell FACH State	F	3.5.0	3.6.0
RP-010352	25.123	81		TDD Measurement Test Cases	F	3.5.0	3.6.0
RP-010352	25.123	83		FDD Measurement Test Cases	F	3.5.0	3.6.0

Table B.7: CRs approved by TSG RAN #13

RAN Tdoc	Spec	CR	R	Ph	Title	Cat	Curr	New
RP-010618	25.123	88		Rel99	Section 4 corrections and clarifications in the test cases	F	3.6.0	3.7.0
RP-010618	25.123	90		Rel99	General section 5 corrections	F	3.6.0	3.7.0
RP-010618	25.123	92		Rel99	Introduction of intra- and inter-frequency test cases for Cell-PCH and URA-PCH	F	3.6.0	3.7.0
RP-010618	25.123	94		Rel99	Transport Channel BER accuracy requirement	F	3.6.0	3.7.0
RP-010618	25.123	96		Rel99	Success Rates in Test Cases	F	3.6.0	3.7.0
RP-010618	25.123	98		Rel99	Introduction of RRC Connection re-establishment requirements	F	3.6.0	3.7.0
RP-010618	25.123	100		Rel99	Introduction of RRC Connection re-establishment test cases	F	3.6.0	3.7.0
RP-010618	25.123	102		Rel99	Correction of UE CPICH RSCP reporting range	F	3.6.0	3.7.0
RP-010618	25.123	104		Rel99	Clarification to requirement classification for statistical testing	F	3.6.0	3.7.0
RP-010618	25.123	106		Rel99	Corrections to sections on inter-frequency measurements in Idle Mode and UE measurement capabilities in Cell-DCH and Cell-FACH for UTRA TDD	F	3.6.0	3.7.0
RP-010618	25.123	108		Rel99	Correction to event 1G triggered measurement reporting delay requirement for UTRA TDD intra-frequency measurement test in A.8.1.1	F	3.6.0	3.7.0

Table B.8: CRs approved by TSG RAN #14

RAN Tdoc	Spec	CR	R	Ph	Title	Cat	Curr	New
RP-010781	25.123	123		Rel99	Clarification of CPICH measurement accuracy	F	3.7.0	3.8.0
RP-010781	25.123	125		Rel99	CELL_FACH test cases for UTRA TDD	F	3.7.0	3.8.0
RP-010781	25.123	127		Rel99	Correction to test requirement for URA_PCH test cases	F	3.7.0	3.8.0
RP-010781	25.123	129		Rel99	Correction of RSSI relative accuracy requirements	F	3.7.0	3.8.0
RP-010781	25.123	131		Rel99	Corrections to TDD/TDD inter-frequency test cases in Annex A	F	3.7.0	3.8.0
RP-010781	25.123	133		Rel99	Correction to GSM carrier RSSI	F	3.7.0	3.8.0
RP-010781	25.123	135		Rel99	Requirements for TFC selection at UE maximum power	F	3.7.0	3.8.0

Table B.9: CRs approved by TSG RAN #15

RAN Tdoc	Spec	CR	R	Ph	Title	Cat	Curr	New
RP-020018	25.123	141	1	R99	Introduction TDD/TDD Handover Test Cases	F	3.8.0	3.9.0
RP-020018	25.123	142		R99	Corrections to Section 9	F	3.8.0	3.9.0
RP-020018	25.123	143		R99	Removal of section 6 on DCA	F	3.8.0	3.9.0
RP-020018	25.123	144		R99	Requirements on UE TS ISCP measurement	F	3.8.0	3.9.0
RP-020019	25.123	145	1	R99	Corrections measurement requirements in CELL_DCH and CELL_FACH states	F	3.8.0	3.9.0
RP-020018	25.123	146		R99	Corrections to reporting requirements in CELL_FACH state	F	3.8.0	3.9.0
RP-020019	25.123	147	1	R99	Introduction of Test Case for correct event 1H/I reporting	F	3.8.0	3.9.0
RP-020018	25.123	148	1	R99	Introduction TDD/FDD Handover Test Case	F	3.8.0	3.9.0
RP-020018	25.123	150		R99	Corrections to Timing Advance requirements	F	3.8.0	3.9.0
RP-020018	25.123	151	1	R99	Introduction of Timing Advance Test Case	F	3.8.0	3.9.0
RP-020018	25.123	152		R99	Correction of OCNS level settings in Annex A test cases	F	3.8.0	3.9.0
RP-020019	25.123	154	1	R99	Corrections to Idle Mode sections	F	3.8.0	3.9.0

History

Document history		
V3.0.0	January 2000	Publication
V3.1.1	May 2000	Publication
V3.2.0	June 2000	Publication
V3.3.0	October 2000	Publication
V3.4.0	December 2000	Publication
V3.5.0	March 2001	Publication
V3.6.0	June 2001	Publication
V3.7.0	September 2001	Publication
V3.8.0	December 2001	Publication
V3.9.0	February 2002	Publication