

ETSI TS 125 221 V7.2.0 (2007-03)

Technical Specification

Universal Mobile Telecommunications System (UMTS); Physical channels and mapping of transport channels onto physical channels (TDD) (3GPP TS 25.221 version 7.2.0 Release 7)



Reference

RTS/TSGR-0125221v720

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2007.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

| | |
|--|----|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Foreword..... | 11 |
| 1 Scope | 12 |
| 2 References | 12 |
| 3 Abbreviations | 12 |
| 4 Services offered to higher layers | 14 |
| 4.1 Transport channels | 14 |
| 4.1.1 Dedicated transport channels | 14 |
| 4.1.1.1 DCH – Dedicated Channel..... | 14 |
| 4.1.1.2 E-DCH – Enhanced Dedicated Channel | 14 |
| 4.1.2 Common transport channels | 14 |
| 4.1.2.1 BCH - Broadcast Channel..... | 14 |
| 4.1.2.2 FACH – Forward Access Channel | 14 |
| 4.1.2.3 PCH – Paging Channel..... | 14 |
| 4.1.2.4 RACH – Random Access Channel..... | 15 |
| 4.1.2.5 USCH – Uplink Shared Channel..... | 15 |
| 4.1.2.6 DSCH – Downlink Shared Channel..... | 15 |
| 4.1.2.7 HS-DSCH – High Speed Downlink Shared Channel..... | 15 |
| 4.2 Indicators..... | 15 |
| 5 Physical channels for the 3.84 Mcps option..... | 15 |
| 5.1 Frame structure..... | 16 |
| 5.2 Dedicated physical channel (DPCH)..... | 17 |
| 5.2.1 Spreading | 17 |
| 5.2.1.1 Spreading for Downlink Physical Channels..... | 17 |
| 5.2.1.2 Spreading for Uplink Physical Channels..... | 17 |
| 5.2.2 Burst Types..... | 17 |
| 5.2.2.1 Burst Type 1..... | 18 |
| 5.2.2.2 Burst Type 2..... | 18 |
| 5.2.2.3 Burst Type 3..... | 18 |
| 5.2.2.4 Transmission of TFCI..... | 19 |
| 5.2.2.5 Transmission of TPC..... | 20 |
| 5.2.2.6 Timeslot formats | 21 |
| 5.2.2.6.1 Downlink timeslot formats | 21 |
| 5.2.2.6.2 Uplink timeslot formats | 22 |
| 5.2.3 Training sequences for spread bursts | 24 |
| 5.2.4 Beamforming | 26 |
| 5.3 Common physical channels | 26 |
| 5.3.1 Primary common control physical channel (P-CCPCH)..... | 26 |
| 5.3.1.1 P-CCPCH Spreading | 27 |
| 5.3.1.2 P-CCPCH Burst Types..... | 27 |
| 5.3.1.3 P-CCPCH Training sequences | 27 |
| 5.3.2 Secondary common control physical channel (S-CCPCH)..... | 27 |
| 5.3.2.1 S-CCPCH Spreading | 27 |
| 5.3.2.2 S-CCPCH Burst Types..... | 27 |
| 5.3.2.3 S-CCPCH Training sequences | 27 |
| 5.3.3 The physical random access channel (PRACH) | 27 |
| 5.3.3.1 PRACH Spreading | 27 |
| 5.3.3.2 PRACH Burst Type..... | 27 |
| 5.3.3.3 PRACH Training sequences..... | 27 |
| 5.3.3.4 PRACH timeslot formats | 28 |
| 5.3.3.5 Association between Training Sequences and Channelisation Codes..... | 28 |
| 5.3.4 The synchronisation channel (SCH) | 29 |

| | | |
|-----------|---|----|
| 5.3.5 | Physical Uplink Shared Channel (PUSCH) | 30 |
| 5.3.5.1 | PUSCH Spreading | 30 |
| 5.3.5.2 | PUSCH Burst Types | 31 |
| 5.3.5.3 | PUSCH Training Sequences | 31 |
| 5.3.5.4 | UE Selection | 31 |
| 5.3.6 | Physical Downlink Shared Channel (PDSCH) | 31 |
| 5.3.6.1 | PDSCH Spreading | 31 |
| 5.3.6.2 | PDSCH Burst Types | 31 |
| 5.3.6.3 | PDSCH Training Sequences | 31 |
| 5.3.6.4 | UE Selection | 31 |
| 5.3.7 | The Paging Indicator Channel (PICH) | 31 |
| 5.3.7.1 | Mapping of Paging Indicators to the PICH bits | 31 |
| 5.3.7.2 | Structure of the PICH over multiple radio frames | 32 |
| 5.3.7.3 | PICH Training sequences | 33 |
| 5.3.8 | The physical node B synchronisation channel (PNBSCH) | 33 |
| 5.3.9 | High Speed Physical Downlink Shared Channel (HS-PDSCH) | 33 |
| 5.3.9.1 | HS-PDSCH Spreading | 33 |
| 5.3.9.2 | HS-PDSCH Burst Types | 33 |
| 5.3.9.3 | HS-PDSCH Training Sequences | 33 |
| 5.3.9.4 | UE Selection | 33 |
| 5.3.9.5 | HS-PDSCH timeslot formats | 33 |
| 5.3.10 | Shared Control Channel for HS-DSCH (HS-SCCH) | 34 |
| 5.3.10.1 | HS-SCCH Spreading | 34 |
| 5.3.10.2 | HS-SCCH Burst Types | 34 |
| 5.3.10.3 | HS-SCCH Training Sequences | 34 |
| 5.3.10.4 | HS-SCCH timeslot formats | 34 |
| 5.3.11 | Shared Information Channel for HS-DSCH (HS-SICH) | 34 |
| 5.3.11.1 | HS-SICH Spreading | 34 |
| 5.3.11.2 | HS-SICH Burst Types | 34 |
| 5.3.11.3 | HS-SICH Training Sequences | 34 |
| 5.3.11.4 | HS-SICH timeslot formats | 35 |
| 5.3.12 | The MBMS Indicator Channel (MICH) | 35 |
| 5.3.12.1 | Mapping of MBMS Indicators to the MICH bits | 35 |
| 5.3.12.2 | MICH Training sequences | 36 |
| 5.3.13 | E-DCH Physical Uplink Channel (E-PUCH) | 36 |
| 5.3.13.1 | E-UCCH | 36 |
| 5.3.13.2 | E-PUCH Spreading | 37 |
| 5.3.13.3 | E-PUCH Burst Types | 37 |
| 5.3.13.4 | PUSCH Training Sequences | 37 |
| 5.3.13.5 | UE Selection | 37 |
| 5.3.13.6 | E-PUCH timeslot formats | 37 |
| 5.3.14 | E-DCH Random Access Uplink Control Channel (E-RUCCH) | 39 |
| 5.3.15 | E-DCH Absolute Grant Channel (E-AGCH) | 39 |
| 5.3.15.1 | E-AGCH Spreading | 39 |
| 5.3.15.2 | E-AGCH Burst Types | 39 |
| 5.3.15.3 | E-AGCH Training Sequences | 40 |
| 5.3.15.4 | E-AGCH timeslot formats | 40 |
| 5.3.16 | E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH) | 40 |
| 5.3.16.1 | E-HICH Spreading | 41 |
| 5.3.16.2 | E-HICH Burst Types | 41 |
| 5.3.16.3 | E-HICH Training Sequences | 41 |
| 5.4 | Transmit Diversity for DL Physical Channels | 41 |
| 5.5 | Beacon characteristics of physical channels | 41 |
| 5.5.1 | Location of beacon channels | 41 |
| 5.5.2 | Physical characteristics of beacon channels | 42 |
| 5.6 | Midamble Allocation for Physical Channels | 42 |
| 5.6.1 | Midamble Allocation for DL Physical Channels | 42 |
| 5.6.1.1 | Midamble Allocation by signalling from higher layers | 42 |
| 5.6.1.2 | Midamble Allocation by layer 1 | 43 |
| 5.6.1.2.1 | Default midamble | 43 |
| 5.6.1.2.2 | Common Midamble | 43 |
| 5.6.2 | Midamble Allocation for UL Physical Channels | 43 |

| | | |
|------------|---|----|
| 5.7 | Midamble Transmit Power | 44 |
| 5A | Physical channels for the 1.28 Mcps option | 45 |
| 5A.1 | Frame structure | 45 |
| 5A.2 | Dedicated physical channel (DPCH) | 46 |
| 5A.2.1 | Spreading | 46 |
| 5A.2.2 | Burst Format | 47 |
| 5A.2.2.1 | Transmission of TFCI | 47 |
| 5A.2.2.2 | Transmission of TPC | 48 |
| 5A.2.2.3 | Transmission of SS | 51 |
| 5A.2.2.4 | Timeslot formats | 53 |
| 5A.2.2.4.1 | Timeslot formats for QPSK | 54 |
| 5A.2.2.4.2 | Time slot formats for 8PSK | 57 |
| 5A.2.3 | Training sequences for spread bursts | 57 |
| 5A.2.4 | Beamforming | 59 |
| 5A.3 | Common physical channels | 59 |
| 5A.3.1 | Primary common control physical channel (P-CCPCH) | 59 |
| 5A.3.1.1 | P-CCPCH Spreading | 59 |
| 5A.3.1.2 | P-CCPCH Burst Format | 59 |
| 5A.3.1.3 | P-CCPCH Training sequences | 59 |
| 5A.3.2 | Secondary common control physical channel (S-CCPCH) | 59 |
| 5A.3.2.1 | S-CCPCH Spreading | 59 |
| 5A.3.2.2 | S-CCPCH Burst Format | 59 |
| 5A.3.2.3 | S-CCPCH Training sequences | 59 |
| 5A.3.3 | Fast Physical Access CHannel (FPACH) | 60 |
| 5A.3.3.1 | FPACH burst | 60 |
| 5A.3.3.1.1 | Signature Reference Number | 60 |
| 5A.3.3.1.2 | Relative Sub-Frame Number | 60 |
| 5A.3.3.1.3 | Received starting position of the UpPCH (UpPCH _{POS}) | 60 |
| 5A.3.3.1.4 | Transmit Power Level Command for the RACH message | 60 |
| 5A.3.3.2 | FPACH Spreading | 60 |
| 5A.3.3.3 | FPACH Burst Format | 60 |
| 5A.3.3.4 | FPACH Training sequences | 61 |
| 5A.3.3.5 | FPACH timeslot formats | 61 |
| 5A.3.4 | The physical random access channel (PRACH) | 61 |
| 5A.3.4.1 | PRACH Spreading | 61 |
| 5A.3.4.2 | PRACH Burst Format | 61 |
| 5A.3.4.3 | PRACH Training sequences | 61 |
| 5A.3.4.4 | PRACH timeslot formats | 61 |
| 5A.3.4.5 | Association between Training Sequences and Channelisation Codes | 61 |
| 5A.3.5 | The synchronisation channels (DwPCH, UpPCH) | 61 |
| 5A.3.6 | Physical Uplink Shared Channel (PUSCH) | 62 |
| 5A.3.7 | Physical Downlink Shared Channel (PDSCH) | 62 |
| 5A.3.8 | The Page Indicator Channel (PICH) | 62 |
| 5A.3.8.1 | Mapping of Paging Indicators to the PICH bits | 62 |
| 5A.3.8.2 | Structure of the PICH over multiple radio frames | 63 |
| 5A.3.9 | High Speed Physical Downlink Shared Channel (HS-PDSCH) | 63 |
| 5A.3.9.1 | HS-PDSCH Spreading | 63 |
| 5A.3.9.2 | HS-PDSCH Burst Format | 63 |
| 5A.3.9.3 | HS-PDSCH Training Sequences | 63 |
| 5A.3.9.4 | UE Selection | 63 |
| 5A.3.9.5 | HS-PDSCH timeslot formats | 63 |
| 5A.3.10 | Shared Control Channel for HS-DSCH (HS-SCCH) | 64 |
| 5A.3.10.1 | HS-SCCH Spreading | 64 |
| 5A.3.10.2 | HS-SCCH Burst Format | 64 |
| 5A.3.10.3 | HS-SCCH Training Sequences | 64 |
| 5A.3.10.4 | HS-SCCH timeslot formats | 64 |
| 5A.3.11 | Shared Information Channel for HS-DSCH (HS-SICH) | 64 |
| 5A.3.11.1 | HS-SICH Spreading | 64 |
| 5A.3.11.2 | HS-SICH Burst Format | 64 |
| 5A.3.11.3 | HS-SICH Training Sequences | 64 |
| 5A.3.11.4 | HS-SICH timeslot formats | 65 |

| | | |
|------------|--|----|
| 5A.3.12 | The MBMS Indicator Channel (MICH)..... | 65 |
| 5A.3.12.1 | Mapping of MBMS Indicators to the MICH bits | 65 |
| 5A.3.13 | Physical Layer Common Control Channel (PLCCH) | 65 |
| 5A.3.13.1 | PLCCH Spreading..... | 66 |
| 5A.3.13.2 | PLCCH Burst Type | 66 |
| 5A.3.13.3 | PLCCH Training Sequence..... | 66 |
| 5A.3.13.4 | PLCCH timeslot formats | 66 |
| 5A.3.14 | E-DCH Physical Uplink Channel | 66 |
| 5A.3.14.1 | E-UCCH | 66 |
| 5A.3.14.2 | E-PUCH Spreading | 67 |
| 5A.3.14.3 | E-PUCH Burst Types | 67 |
| 5A.3.14.4 | E-PUCH Training Sequences..... | 67 |
| 5A.3.14.5 | UE Selection | 67 |
| 5A.3.14.6 | E-PUCH timeslot formats..... | 67 |
| 5A.3.15 | E-DCH Random Access Uplink Control Channel (E-RUCCH)..... | 74 |
| 5A.3.15.1 | E-RUCCH Spreading | 74 |
| 5A.3.15.2 | E-RUCCH Burst Format | 74 |
| 5A.3.15.3 | E-RUCCH Training sequences..... | 74 |
| 5A.3.15.4 | E-RUCCH timeslot formats..... | 74 |
| 5A.3.16 | E-DCH Absolute Grant Channel (E-AGCH)..... | 74 |
| 5A.3.16.1 | E-AGCH Spreading | 74 |
| 5A.3.16.2 | E-AGCH Burst Types | 74 |
| 5A.3.16.3 | E-AGCH Training Sequences | 75 |
| 5A.3.16.4 | E-AGCH timeslot formats..... | 75 |
| 5A.3.17 | E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH)..... | 75 |
| 5A.3.17.1 | E-HICH Spreading..... | 76 |
| 5A.3.17.2 | E-HICH Burst Types..... | 76 |
| 5A.3.17.3 | E-HICH Training Sequences..... | 76 |
| 5A.3.17.4 | E-HICH timeslot formats | 76 |
| 5A.4 | Transmit Diversity for DL Physical Channels..... | 77 |
| 5A.5 | Beacon characteristics of physical channels..... | 77 |
| 5A.5.1 | Location of beacon channels..... | 77 |
| 5A.5.2 | Physical characteristics of the beacon function | 77 |
| 5A.6 | Midamble Allocation for Physical Channels..... | 78 |
| 5A.6.1 | Midamble Allocation for DL Physical Channels | 78 |
| 5A.6.1.1 | Midamble Allocation by signalling from higher layers..... | 78 |
| 5A.6.1.2 | Midamble Allocation by layer 1..... | 78 |
| 5A.6.1.2.1 | Default midamble | 78 |
| 5A.6.1.2.2 | Common Midamble..... | 78 |
| 5A.6.2 | Midamble Allocation for UL Physical Channels | 78 |
| 5A.7 | Midamble Transmit Power | 78 |
| 5B | Physical channels for the 7.68 Mcps option..... | 78 |
| 5B.1 | General | 78 |
| 5B.2 | Frame structure..... | 79 |
| 5B.3 | Dedicated physical channel (DPCH)..... | 80 |
| 5B.3.1 | Spreading | 80 |
| 5B.3.1.1 | Spreading for Downlink Physical Channels..... | 80 |
| 5B.3.1.2 | Spreading for Uplink Physical Channels..... | 80 |
| 5B.3.2 | Burst Types..... | 80 |
| 5B.3.2.1 | Burst Type 1 | 81 |
| 5B.3.2.2 | Burst Type 2..... | 81 |
| 5B.3.2.3 | Burst Type 3..... | 82 |
| 5B.3.2.4 | Transmission of TFCI | 82 |
| 5B.3.2.5 | Transmission of TPC..... | 83 |
| 5B.3.2.6 | Timeslot formats | 84 |
| 5B.3.2.6.1 | Downlink timeslot formats | 84 |
| 5B.3.2.6.2 | Uplink timeslot formats..... | 85 |
| 5B.3.3 | Training sequences for spread bursts | 87 |
| 5B.3.4 | Beamforming | 89 |
| 5B.4 | Common physical channels..... | 89 |
| 5B.4.1 | Primary common control physical channel (P-CCPCH)..... | 89 |

| | | |
|-----------|--|-----|
| 5B.4.1.1 | P-CCPCH Spreading | 89 |
| 5B.4.1.2 | P-CCPCH Burst Types..... | 89 |
| 5B.4.1.3 | P-CCPCH Training sequences | 89 |
| 5B.4.2 | Secondary common control physical channel (S-CCPCH)..... | 89 |
| 5B.4.2.1 | S-CCPCH Spreading | 89 |
| 5B.4.2.2 | S-CCPCH Burst Types..... | 89 |
| 5B.4.2.3 | S-CCPCH Training sequences | 89 |
| 5B.4.3 | The physical random access channel (PRACH) | 89 |
| 5B.4.3.1 | PRACH Spreading | 89 |
| 5B.4.3.2 | PRACH Burst Type..... | 89 |
| 5B.4.3.3 | PRACH Training sequences..... | 90 |
| 5B.4.3.4 | PRACH timeslot formats | 90 |
| 5B.4.3.5 | Association between Training Sequences and Channelisation Codes..... | 90 |
| 5B.4.4 | The synchronisation channel (SCH) | 91 |
| 5B.4.5 | Physical Uplink Shared Channel (PUSCH) | 92 |
| 5B.4.5.1 | PUSCH Spreading..... | 92 |
| 5B.4.5.2 | PUSCH Burst Types | 92 |
| 5B.4.5.3 | PUSCH Training Sequences | 92 |
| 5B.4.5.4 | UE Selection | 92 |
| 5B.4.6 | Physical Downlink Shared Channel (PDSCH) | 92 |
| 5B.4.6.1 | PDSCH Spreading..... | 92 |
| 5B.4.6.2 | PDSCH Burst Types | 92 |
| 5B.4.6.3 | PDSCH Training Sequences | 92 |
| 5B.4.6.4 | UE Selection | 92 |
| 5B.4.7 | The Paging Indicator Channel (PICH)..... | 92 |
| 5B.4.7.1 | Mapping of Paging Indicators to the PICH bits | 92 |
| 5B.4.7.2 | Structure of the PICH over multiple radio frames..... | 93 |
| 5B.4.7.3 | PICH Training sequences..... | 93 |
| 5B.4.8 | High Speed Physical Downlink Shared Channel (HS-PDSCH) | 94 |
| 5B.4.8.1 | HS-PDSCH Spreading | 94 |
| 5B.4.8.2 | HS-PDSCH Burst Types | 94 |
| 5B.4.8.3 | HS-PDSCH Training Sequences | 94 |
| 5B.4.8.4 | UE Selection | 94 |
| 5B.4.8.5 | HS-PDSCH timeslot formats | 94 |
| 5B.4.9 | Shared Control Channel for HS-DSCH (HS-SCCH)..... | 94 |
| 5B.4.9.1 | HS-SCCH Spreading..... | 94 |
| 5B.4.9.2 | HS-SCCH Burst Types | 95 |
| 5B.4.9.3 | HS-SCCH Training Sequences | 95 |
| 5B.4.9.4 | HS-SCCH timeslot formats..... | 95 |
| 5B.4.10 | Shared Information Channel for HS-DSCH (HS-SICH) | 95 |
| 5B.4.10.1 | HS-SICH Spreading | 95 |
| 5B.4.10.2 | HS-SICH Burst Types..... | 95 |
| 5B.4.10.3 | HS-SICH Training Sequences..... | 95 |
| 5B.4.10.4 | HS-SICH timeslot formats | 95 |
| 5B.4.11 | The MBMS Indicator Channel (MICH)..... | 95 |
| 5B.4.11.1 | Mapping of MBMS Indicators to the MICH bits | 95 |
| 5B.4.11.2 | MICH Training sequences | 96 |
| 5B.4.12 | E-DCH Physical Uplink Channel (E-PUCH) | 97 |
| 5B.4.12.1 | E-UCCH..... | 97 |
| 5B.4.12.2 | E-PUCH Spreading | 98 |
| 5B.4.12.3 | E-PUCH Burst Types..... | 98 |
| 5B.4.12.4 | PUSCH Training Sequences | 98 |
| 5B.4.12.5 | UE Selection | 98 |
| 5B.4.12.6 | E-PUCH timeslot formats | 98 |
| 5B.4.13 | E-DCH Random Access Uplink Control Channel (E-RUCCH)..... | 100 |
| 5B.4.14 | E-DCH Absolute Grant Channel (E-AGCH)..... | 100 |
| 5B.4.14.1 | E-AGCH Spreading | 100 |
| 5B.4.14.2 | E-AGCH Burst Types | 100 |
| 5B.4.14.3 | E-AGCH Training Sequences | 100 |
| 5B.4.15.4 | E-AGCH timeslot formats..... | 101 |
| 5B.4.15 | E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH)..... | 101 |
| 5B.4.15.1 | E-HICH Spreading | 101 |

| | | |
|-----------------------------|--|------------|
| 5B.4.15.2 | E-HICH Burst Types..... | 102 |
| 5B.4.15.3 | E-HICH Training Sequences..... | 102 |
| 5B.5 | Transmit Diversity for DL Physical Channels..... | 102 |
| 5B.6 | Beacon characteristics of physical channels..... | 102 |
| 5B.6.1 | Location of beacon channels..... | 102 |
| 5B.6.2 | Physical characteristics of beacon channels..... | 102 |
| 5B.7 | Midamble Allocation for Physical Channels..... | 103 |
| 5B.8 | Midamble Transmit Power..... | 103 |
| 6 | Mapping of transport channels to physical channels for the 3.84 Mcps option..... | 105 |
| 6.1 | Dedicated Transport Channels..... | 105 |
| 6.1.1 | The Dedicated Channel (DCH)..... | 105 |
| 6.1.2 | The Enhanced Uplink Dedicated Channel (E-DCH)..... | 106 |
| 6.1.2.1 | E-DCH/E-AGCH Association and Timing..... | 106 |
| 6.1.2.2 | E-DCH/E-HICH Association and Timing..... | 106 |
| 6.2 | Common Transport Channels..... | 107 |
| 6.2.1 | The Broadcast Channel (BCH)..... | 107 |
| 6.2.2 | The Paging Channel (PCH)..... | 107 |
| 6.2.2.1 | PCH/PICH Association..... | 108 |
| 6.2.3 | The Forward Channel (FACH)..... | 108 |
| 6.2.4 | The Random Access Channel (RACH)..... | 108 |
| 6.2.5 | The Uplink Shared Channel (USCH)..... | 108 |
| 6.2.6 | The Downlink Shared Channel (DSCH)..... | 108 |
| 6.2.7 | The High Speed Downlink Shared Channel (HS-DSCH)..... | 108 |
| 6.2.7.1 | HS-DSCH/HS-SCCH Association and Timing..... | 108 |
| 6.2.7.2 | HS-SCCH/HS-DSCH/HS-SICH Association and Timing..... | 109 |
| 7 | Mapping of transport channels to physical channels for the 1.28 Mcps option..... | 110 |
| 7.1 | Dedicated Transport Channels..... | 110 |
| 7.1.1 | The Dedicated Channel (DCH)..... | 110 |
| 7.1.2 | The Enhanced Uplink Dedicated Channel (E-DCH)..... | 111 |
| 7.1.2.1 | E-DCH/E-AGCH Association and Timing..... | 111 |
| 7.1.2.2 | E-DCH/E-HICH Association and Timing..... | 111 |
| 7.2 | Common Transport Channels..... | 112 |
| 7.2.1 | The Broadcast Channel (BCH)..... | 112 |
| 7.2.2 | The Paging Channel (PCH)..... | 112 |
| 7.2.3 | The Forward Channel (FACH)..... | 112 |
| 7.2.4 | The Random Access Channel (RACH)..... | 112 |
| 7.2.5 | The Uplink Shared Channel (USCH)..... | 112 |
| 7.2.6 | The Downlink Shared Channel (DSCH)..... | 112 |
| 7.2.7 | The High Speed Downlink Shared Channel (HS-DSCH)..... | 112 |
| 7.2.7.1 | HS-DSCH/HS-SCCH Association and Timing..... | 112 |
| 7.2.7.2 | HS-SCCH/HS-DSCH/HS-SICH Association and Timing..... | 113 |
| 8 | Mapping of transport channels to physical channels for the 7.68 Mcps option..... | 114 |
| 8.1 | Dedicated Transport Channels..... | 114 |
| 8.1.1 | The Dedicated Channel (DCH)..... | 114 |
| 8.1.2 | The Enhanced Uplink Dedicated Channel (E-DCH)..... | 114 |
| 8.1.2.1 | E-DCH/E-AGCH Association and Timing..... | 114 |
| 8.1.2.2 | E-DCH/E-HICH Association and Timing..... | 115 |
| 8.2 | Common Transport Channels..... | 116 |
| 8.2.1 | The Broadcast Channel (BCH)..... | 116 |
| 8.2.2 | The Paging Channel (PCH)..... | 116 |
| 8.2.3 | The Forward Channel (FACH)..... | 116 |
| 8.2.4 | The Random Access Channel (RACH)..... | 116 |
| 8.2.5 | The Uplink Shared Channel (USCH)..... | 116 |
| 8.2.6 | The Downlink Shared Channel (DSCH)..... | 117 |
| 8.2.7 | The High Speed Downlink Shared Channel (HS-DSCH)..... | 117 |
| 8.2.7.1 | HS-DSCH/HS-SCCH Association and Timing..... | 117 |
| 8.2.7.2 | HS-SCCH/HS-DSCH/HS-SICH Association and Timing..... | 117 |
| Annex A (normative): | Basic Midamble Codes for the 3.84 Mcps option..... | 118 |

| | | |
|--|---|------------|
| A.1 | Basic Midamble Codes for Burst Type 1 and 3 | 118 |
| A.2 | Basic Midamble Codes for Burst Type 2 | 123 |
| A.3 | Association between Midambles and Channelisation Codes | 126 |
| A.3.1 | Association for Burst Type 1/3 and $K_{Cell}=16$ Midambles | 126 |
| A.3.2 | Association for Burst Type 1/3 and $K_{Cell}=8$ Midambles | 127 |
| A.3.3 | Association for Burst Type 1/3 and $K_{Cell}=4$ Midambles | 127 |
| A.3.4 | Association for Burst Type 2 and $K_{Cell}=6$ Midambles | 128 |
| A.3.5 | Association for Burst Type 2 and $K_{Cell}=3$ Midambles | 128 |
| Annex AA (normative): Basic Midamble Codes for the 1.28 Mcps option..... | | 130 |
| AA.1 | Basic Midamble Codes..... | 130 |
| AA.2 | Association between Midambles and Channelisation Codes | 133 |
| AA.2.1 | Association for $K=16$ Midambles | 133 |
| AA.2.2 | Association for $K=14$ Midambles | 134 |
| AA.2.3 | Association for $K=12$ Midambles | 134 |
| AA.2.4 | Association for $K=10$ Midambles | 135 |
| AA.2.5 | Association for $K=8$ Midambles | 135 |
| AA.2.6 | Association for $K=6$ Midambles | 136 |
| AA.2.7 | Association for $K=4$ Midambles | 136 |
| AA.2.8 | Association for $K=2$ Midambles | 137 |
| Annex AB (normative): Basic Midamble Codes for the 7.68 Mcps option..... | | 138 |
| AB.1 | Basic Midamble Codes for Burst Type 1 and 3 | 138 |
| AB.2 | Basic Midamble Codes for Burst Type 2 | 146 |
| AB.3 | Association between Midambles and Channelisation Codes | 147 |
| AB.3.1 | Association for $K_{Cell}=16$ Midambles | 147 |
| AB.3.2 | Association for $K_{Cell}=8$ Midambles | 148 |
| AB.3.3 | Association for $K_{Cell}=4$ Midambles | 149 |
| Annex B (normative): Signalling of the number of channelisation codes for the DL common midamble case for 3.84Mcps TDD | | 150 |
| B.1 | Mapping scheme for Burst Type 1 and $K_{Cell}=16$ Midambles | 150 |
| B.2 | Mapping scheme for Burst Type 1 and $K_{Cell}=8$ | 150 |
| | Midambles | 150 |
| B.3 | Mapping scheme for Burst Type 1 and $K_{Cell}=4$ Midambles | 151 |
| B.4 | Mapping scheme for beacon timeslots and $K_{Cell}=16$ Midambles | 151 |
| B.5 | Mapping scheme for beacon timeslots and $K_{Cell}=8$ Midambles | 152 |
| B.6 | Mapping scheme for beacon timeslots and $K_{Cell}=4$ Midambles | 152 |
| B.7 | Mapping scheme for Burst Type 2 and $K_{Cell}=6$ Midambles | 152 |
| B.8 | Mapping scheme for Burst Type 2 and $K_{Cell}=3$ Midambles | 153 |
| Annex BA (normative): Signalling of the number of channelisation codes for the DL common midamble case for 1.28Mcps TDD | | 154 |
| BA.1 | Mapping scheme for $K=16$ Midambles..... | 154 |
| BA.2 | Mapping scheme for $K=14$ Midambles..... | 154 |
| BA.3 | Mapping scheme for $K=12$ Midambles..... | 155 |
| BA.4 | Mapping scheme for $K=10$ Midambles..... | 155 |
| BA.5 | Mapping scheme for $K=8$ Midambles..... | 155 |

| | |
|--|------------|
| BA.6 Mapping scheme for $K=6$ Midambles..... | 156 |
| BA.7 Mapping scheme for $K=4$ Midambles..... | 156 |
| BA.8 Mapping scheme for $K=2$ Midambles..... | 156 |
| Annex BB (normative): Signalling of the number of channelisation codes for the DL common midamble case for 7.68Mcps TDD | 157 |
| BB.1 Mapping scheme for $K_{\text{Cell}}=16$ Midambles..... | 157 |
| BB.2 Mapping scheme for $K_{\text{Cell}}=8$ Midambles..... | 157 |
| BB.3 Mapping scheme for $K_{\text{Cell}}=4$ Midambles..... | 158 |
| BB.4 Mapping scheme for beacon timeslots and $K_{\text{Cell}}=16$ Midambles | 158 |
| BB.5 Mapping scheme for beacon timeslots and $K_{\text{Cell}}=8$ Midambles | 159 |
| BB.6 Mapping scheme for beacon timeslots and $K_{\text{Cell}}=4$ Midambles | 159 |
| Annex C (informative): CCPCH Multiframe Structure for the 3.84 Mcps option..... | 160 |
| Annex CA (informative): CCPCH Multiframe Structure for the 1.28 Mcps option..... | 162 |
| Annex CB (informative): Examples of the association of UL TPC commands to UL uplink time slots and CCTrCH pairs for 1.28 Mcps TDD..... | 163 |
| Annex CC (informative): Examples of the association of UL SS commands to UL uplink time slots..... | 165 |
| Annex D (informative): Change history | 167 |
| History | 169 |

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document describes the characteristics of the physical channels and the mapping of the transport channels to physical channels in the TDD mode of UTRA.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3GPP TS 25.201: "Physical layer - general description".
- [2] 3GPP TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
- [3] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [4] 3GPP TS 25.213: "Spreading and modulation (FDD)".
- [5] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [6] 3GPP TS 25.215: "Physical layer – Measurements (FDD)".
- [7] 3GPP TS 25.222: "Multiplexing and channel coding (TDD)".
- [8] 3GPP TS 25.223: "Spreading and modulation (TDD)".
- [9] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [10] 3GPP TS 25.225: "Physical layer – Measurements (TDD)".
- [11] 3GPP TS 25.301: "Radio Interface Protocol Architecture".
- [12] 3GPP TS 25.302: "Services Provided by the Physical Layer".
- [13] 3GPP TS 25.401: "UTRAN Overall Description".
- [14] 3GPP TS 25.402: "Synchronisation in UTRAN, Stage 2".
- [15] 3GPP TS 25.304: "UE Procedures in Idle Mode and Procedures for Cell Reselection in Connected Mode".
- [16] 3GPP TS 25.427: "UTRAN Iur and Iub interface user plane protocols for DCH data streams".
- [17] 3GPP TS 25.435: "UTRAN I_{ub} Interface User Plane Protocols for Common Transport Channel Data Streams".
- [18] 3GPP TS 25.308: High Speed Downlink Packet Access (HSDPA); Overall description; Stage 2

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

16QAM 16 Quadrature Amplitude Modulation

| | |
|----------|--|
| BCH | Broadcast Channel |
| CCPCH | Common Control Physical Channel |
| CCTrCH | Coded Composite Transport Channel |
| CDMA | Code Division Multiple Access |
| CQI | Channel Quality Indicator |
| DCH | Dedicated Channel |
| DL | Downlink |
| DPCH | Dedicated Physical Channel |
| DRX | Discontinuous Reception |
| DSCH | Downlink Shared Channel |
| DTX | Discontinuous Transmission |
| DwPCH | Downlink Pilot Channel |
| DwPTS | Downlink Pilot Time Slot |
| E-AGCH | E-DCH Absolute Grant Channel |
| E-DCH | Enhanced Dedicated Channel |
| E-HICH | E-DCH Hybrid ARQ Indicator Channel |
| E-PUCH | E-DCH Physical Uplink Channel |
| E-RUCCH | E-DCH Random Access Uplink Control Channel |
| E-UCCH | E-DCH Uplink Control Channel |
| FACH | Forward Access Channel |
| FDD | Frequency Division Duplex |
| FEC | Forward Error Correction |
| GP | Guard Period |
| GSM | Global System for Mobile Communication |
| HARQ | Hybrid ARQ |
| HS-DSCH | High Speed Downlink Shared Channel |
| HS-PDSCH | High Speed Physical Downlink Shared Channel |
| HS-SCCH | Shared Control Channel for HS-DSCH |
| HS-SICH | Shared Information Channel for HS-DSCH |
| MIB | Master Information Block |
| MICH | MBMS Indicator Channel |
| NI | MBMS Notification Indicator |
| NRT | Non-Real Time |
| OVSF | Orthogonal Variable Spreading Factor |
| P-CCPCH | Primary CCPCH |
| PCH | Paging Channel |
| PDSCH | Physical Downlink Shared Channel |
| PI | Paging Indicator (value calculated by higher layers) |
| PICH | Page Indicator Channel |
| PLCCH | Physical Layer Common Control Channel |
| P_q | Paging Indicator (indicator set by physical layer) |
| PRACH | Physical Random Access Channel |
| PUSCH | Physical Uplink Shared Channel |
| RACH | Random Access Channel |
| RF | Radio Frame |
| RT | Real Time |
| S-CCPCH | Secondary CCPCH |
| SCH | Synchronisation Channel |
| SCTD | Space Code Transmit Diversity |
| SF | Spreading Factor |
| SFN | Cell System Frame Number |
| SS | Synchronisation Shift |
| TCH | Traffic Channel |
| TDD | Time Division Duplex |
| TDMA | Time Division Multiple Access |
| TFC | Transport Format Combination |
| TFCI | Transport Format Combination Indicator |
| TFI | Transport Format Indicator |
| TPC | Transmitter Power Control |
| TrCH | Transport Channel |
| TSTD | Time Switched Transmit Diversity |
| TTI | Transmission Time Interval |

| | |
|-------|---|
| UE | User Equipment |
| UL | Uplink |
| UMTS | Universal Mobil Telecommunications System |
| UpPTS | Uplink Pilot Time Slot |
| UpPCH | Uplink Pilot Channel |
| USCH | Uplink Shared Channel |
| UTRAN | UMTS Terrestrial Radio Access Network |

4 Services offered to higher layers

4.1 Transport channels

Transport channels are the services offered by layer 1 to the higher layers. A transport channel is defined by how and with what characteristics data is transferred over the air interface. A general classification of transport channels is into two groups:

- Dedicated Channels, using inherent addressing of UE
- Common Channels, using explicit addressing of UE if addressing is needed

General concepts about transport channels are described in [12].

4.1.1 Dedicated transport channels

There exists two types of dedicated transport channel, the Dedicated Channel (DCH) and the Enhanced Dedicated Channel (E-DCH).

4.1.1.1 DCH – Dedicated Channel

The Dedicated Channel (DCH) is an up- or downlink transport channel that is used to carry user or control information between the UTRAN and a UE.

4.1.1.2 E-DCH – Enhanced Dedicated Channel

The Enhanced Dedicated Channel (E-DCH) is an uplink transport channel.

4.1.2 Common transport channels

There are seven types of common transport channels: BCH, FACH, PCH, RACH, USCH, DSCH, HS-DSCH.

4.1.2.1 BCH - Broadcast Channel

The Broadcast Channel (BCH) is a downlink transport channel that is used to broadcast system- and cell-specific information.

4.1.2.2 FACH – Forward Access Channel

The Forward Access Channel (FACH) is a downlink transport channel that is used to carry control information to a mobile station when the system knows the location cell of the mobile station. The FACH may also carry short user packets.

4.1.2.3 PCH – Paging Channel

The Paging Channel (PCH) is a downlink transport channel that is used to carry control information to a mobile station when the system does not know the location cell of the mobile station.

4.1.2.4 RACH – Random Access Channel

The Random Access Channel (RACH) is an up link transport channel that is used to carry control information from mobile station. The RACH may also carry short user packets.

4.1.2.5 USCH – Uplink Shared Channel

The uplink shared channel (USCH) is an uplink transport channel shared by several UEs carrying dedicated control or traffic data.

4.1.2.6 DSCH – Downlink Shared Channel

The downlink shared channel (DSCH) is a downlink transport channel shared by several UEs carrying dedicated control or traffic data.

4.1.2.7 HS-DSCH – High Speed Downlink Shared Channel

The High Speed Downlink Shared Channel (HS-DSCH) is a downlink transport channel shared by several UEs. The HS-DSCH is associated with one or several Shared Control Channels (HS-SCCH). The HS-DSCH is transmitted over the entire cell or over only part of the cell using e.g. beam-forming antennas.

4.2 Indicators

Indicators are means of fast low-level signalling entities which are transmitted without using information blocks sent over transport channels. The meaning of indicators is implicit to the receiver.

The indicator(s) defined in the current version of the specifications are: Paging Indicator (PI) and MBMS Notification Indicator (NI).

5 Physical channels for the 3.84 Mcps option

All physical channels take three-layer structure with respect to timeslots, radio frames and system frame numbering (SFN), see [14]. Depending on the resource allocation, the configuration of radio frames or timeslots becomes different. All physical channels need a guard period in every timeslot. The time slots are used in the sense of a TDMA component to separate different user signals in the time domain. The physical channel signal format is presented in figure 1.

A physical channel in TDD is a burst, which is transmitted in a particular timeslot within allocated Radio Frames. The allocation can be continuous, i.e. the time slot in every frame is allocated to the physical channel or discontinuous, i.e. the time slot in a subset of all frames is allocated only. A burst is the combination of two data parts, a midamble part and a guard period. The duration of a burst is one time slot. Several bursts can be transmitted at the same time from one transmitter. In this case, the data parts must use different OVFSF channelisation codes, but the same scrambling code. The midamble parts are either identically or differently shifted versions of a cell-specific basic midamble code, see section 5.2.3.

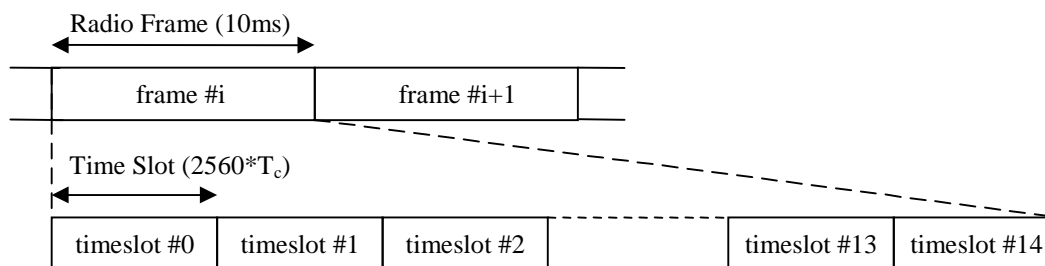


Figure 1: Physical channel signal format

The data part of the burst is spread with a combination of channelisation code and scrambling code. The channelisation code is a OVFSF code, that can have a spreading factor of 1, 2, 4, 8, or 16. The data rate of the physical channel is depending on the used spreading factor of the used OVFSF code.

The midamble part of the burst can contain two different types of midambles: a short one of length 256 chips, or a long one of 512 chips. The data rate of the physical channel is depending on the used midamble length.

So a physical channel is defined by frequency, timeslot, channelisation code, burst type and Radio Frame allocation. The scrambling code and the basic midamble code are broadcast and may be constant within a cell. When a physical channel is established, a start frame is given. The physical channels can either be of infinite duration, or a duration for the allocation can be defined.

5.1 Frame structure

The TDMA frame has a duration of 10 ms and is subdivided into 15 time slots (TS) of $2560 \cdot T_c$ duration each. A time slot corresponds to 2560 chips. The physical content of the time slots are the bursts of corresponding length as described in subclause 5.2.2.

Each 10 ms frame consists of 15 time slots, each allocated to either the uplink or the downlink (figure 2). With such a flexibility, the TDD mode can be adapted to different environments and deployment scenarios. In any configuration at least one time slot has to be allocated for the downlink and at least one time slot has to be allocated for the uplink.

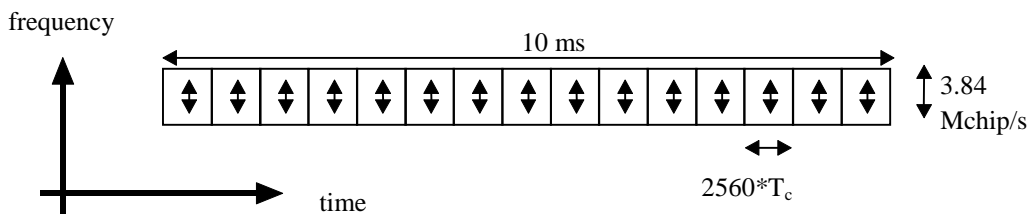


Figure 2: The TDD frame structure

Examples for multiple and single switching point configurations as well as for symmetric and asymmetric UL/DL allocations are given in figure 3.

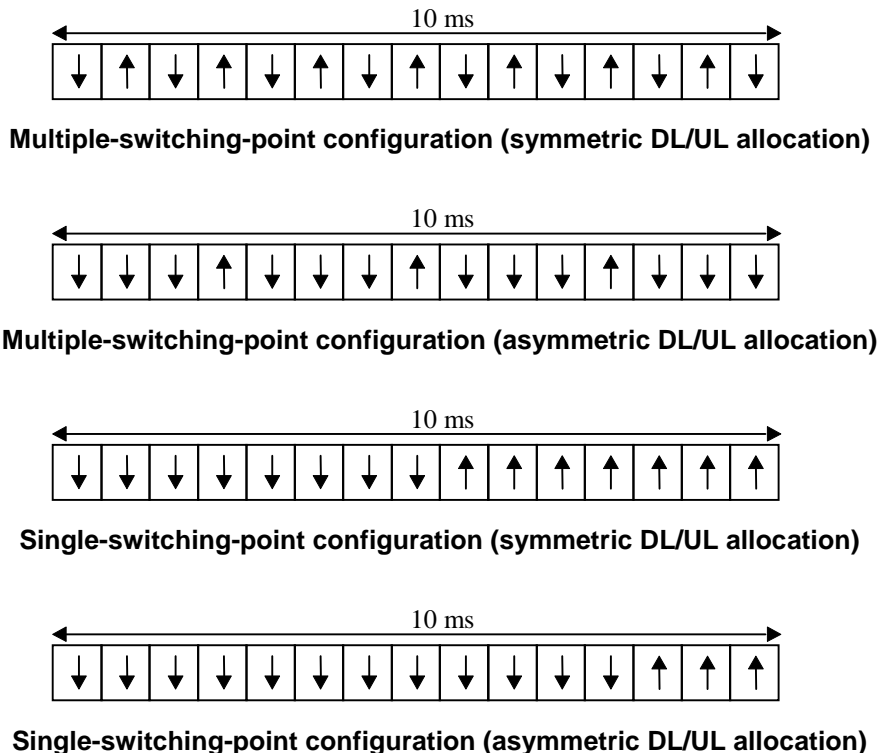


Figure 3: TDD frame structure examples

5.2 Dedicated physical channel (DPCH)

The DCH as described in subclause 4.1.1 is mapped onto the dedicated physical channel.

5.2.1 Spreading

Spreading is applied to the data part of the physical channels and consists of two operations. The first is the channelisation operation, which transforms every data symbol into a number of chips, thus increasing the bandwidth of the signal. The number of chips per data symbol is called the Spreading Factor (SF). The second operation is the scrambling operation, where a scrambling code is applied to the spread signal. Details on channelisation and scrambling operation can be found in [8].

5.2.1.1 Spreading for Downlink Physical Channels

Downlink physical channels shall use SF =16. Multiple parallel physical channels can be used to support higher data rates. These parallel physical channels shall be transmitted using different channelisation codes, see [8]. These codes with SF =16 are generated as described in [8].

Operation with a single code with spreading factor 1 is possible for the downlink physical channels.

5.2.1.2 Spreading for Uplink Physical Channels

The range of spreading factor that may be used for uplink physical channels shall range from 16 down to 1. For each physical channel an individual minimum spreading factor SF_{min} is transmitted by means of the higher layers. There are two options that are indicated by UTRAN:

1. The UE shall use the spreading factor SF_{min} , independent of the current TFC.
2. The UE shall autonomously increase the spreading factor depending on the current TFC.

If the UE autonomously changes the SF, it shall always vary the channelisation code along the branch with the higher code numbering of the allowed OVFS sub tree, as depicted in [8]. In the event that code hopping is configured by higher layers, the allowed OVFS sub-tree is that subtended by the effective allocated OVFS code after the hop sequence has been applied to the allocated OVFS code (see [9]).

For multicode transmission a UE shall use a maximum of two physical channels per timeslot simultaneously. These two parallel physical channels shall be transmitted using different channelisation codes, see [8].

5.2.2 Burst Types

Three types of bursts for dedicated physical channels are defined. All of them consist of two data symbol fields, a midamble and a guard period, the lengths of which are different for the individual burst types. Thus, the number of data symbols in a burst depends on the SF and the burst type, as depicted in table 1.

Table 1: Number of data symbols (N) for burst type 1, 2, and 3

| Spreading factor (SF) | Burst Type 1 | Burst Type 2 | Burst Type 3 |
|-----------------------|--------------|--------------|--------------|
| 1 | 1952 | 2208 | 1856 |
| 2 | 976 | 1104 | 928 |
| 4 | 488 | 552 | 464 |
| 8 | 244 | 276 | 232 |
| 16 | 122 | 138 | 116 |

The support of all three burst types is mandatory for the UE. The three different bursts defined here are well suited for different applications, as described in the following sections.

5.2.2.1 Burst Type 1

The burst type 1 can be used for uplink and downlink. Due to its longer midamble field this burst type supports the construction of a larger number of training sequences, see 5.2.3. The maximum number of training sequences depend on the cell configuration, see annex A. For the burst type 1 this number may be 4, 8, or 16.

The data fields of the burst type 1 are 976 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 1 above. The midamble of burst type 1 has a length of 512 chips. The guard period for the burst type 1 is 96 chip periods long. The burst type 1 is shown in Figure 4. The contents of the burst fields are described in table 2.

Table 2: The contents of the burst type 1 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | | Contents of field |
|------------------|--------------------------|----------------------------|--|-------------------|
| 0-975 | 976 | Cf table 1 | | Data symbols |
| 976-1487 | 512 | - | | Midamble |
| 1488-2463 | 976 | Cf table 1 | | Data symbols |
| 2464-2559 | 96 | - | | Guard period |

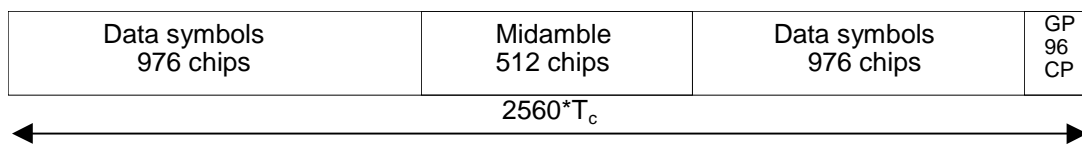


Figure 4: Burst structure of the burst type 1. GP denotes the guard period and CP the chip periods

5.2.2.2 Burst Type 2

The burst type 2 can be used for uplink and downlink. It offers a longer data field than burst type 1 on the cost of a shorter midamble. Due to the shorter midamble field the burst type 2 supports a maximum number of training sequences of 3 or 6 only, depending on the cell configuration, see annex A.

The data fields of the burst type 2 are 1104 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 1 above. The guard period for the burst type 2 is 96 chip periods long. The burst type 2 is shown in Figure 5. The contents of the burst fields are described in table 3.

Table 3: The contents of the burst type 2 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | | Contents of field |
|------------------|--------------------------|----------------------------|--|-------------------|
| 0-1103 | 1104 | cf table 1 | | Data symbols |
| 1104-1359 | 256 | - | | Midamble |
| 1360-2463 | 1104 | cf table 1 | | Data symbols |
| 2464-2559 | 96 | - | | Guard period |

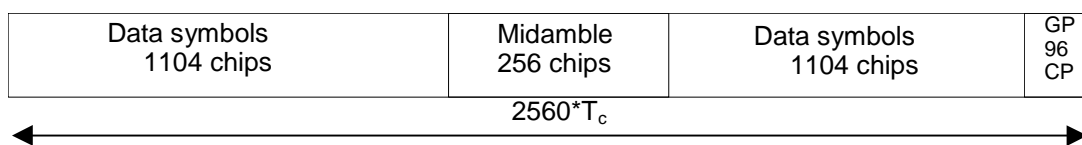


Figure 5: Burst structure of the burst type 2. GP denotes the guard period and CP the chip periods

5.2.2.3 Burst Type 3

The burst type 3 is used for uplink only. Due to the longer guard period it is suitable for initial access or access to a new cell after handover. It offers the same number of training sequences as burst type 1.

The data fields of the burst type 3 have a length of 976 chips and 880 chips, respectively. The corresponding number of symbols depends on the spreading factor, as indicated in table 1 above. The midamble of burst type 3 has a length of 512 chips. The guard period for the burst type 3 is 192 chip periods long. The burst type 3 is shown in Figure 6. The contents of the burst fields are described in table 4.

Table 4: The contents of the burst type 3 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | Contents of field |
|------------------|--------------------------|----------------------------|-------------------|
| 0-975 | 976 | Cf table 1 | Data symbols |
| 976-1487 | 512 | - | Midamble |
| 1488-2367 | 880 | Cf table 1 | Data symbols |
| 2368-2559 | 192 | - | Guard period |

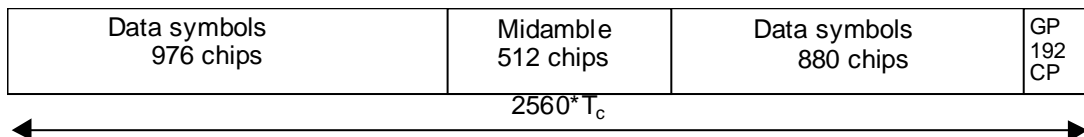


Figure 6: Burst structure of the burst type 3. GP denotes the guard period and CP the chip periods

5.2.2.4 Transmission of TFCI

All burst types 1, 2 and 3 provide the possibility for transmission of TFCI.

The transmission of TFCI is negotiated at call setup and can be re-negotiated during the call. For each CCTrCH it is indicated by higher layer signalling, which TFCI format is applied. Additionally for each allocated timeslot it is signalled individually whether that timeslot carries the TFCI or not. The TFCI is always present in the first timeslot in a radio frame for each CCTrCH. If a time slot contains the TFCI, then it is always transmitted using the physical channel with the lowest physical channel sequence number (*p*) in that timeslot. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

The transmission of TFCI is done in the data parts of the respective physical channel. In DL the TFCI code word bits and data bits are subject to the same spreading procedure as depicted in [8]. In UL, independent of the SF that is applied to the data symbols in the burst, the data in the TFCI field are always spread with SF=16 using the channelisation code in the branch with the highest code numbering of the allowed OVFSF sub tree, as depicted in [8]. Hence the midamble structure and length is not changed. The TFCI code word is to be transmitted directly adjacent to the midamble, possibly after the TPC. Figure 7 shows the position of the TFCI code word in a traffic burst in downlink. Figure 8 shows the position of the TFCI code word in a traffic burst in uplink.

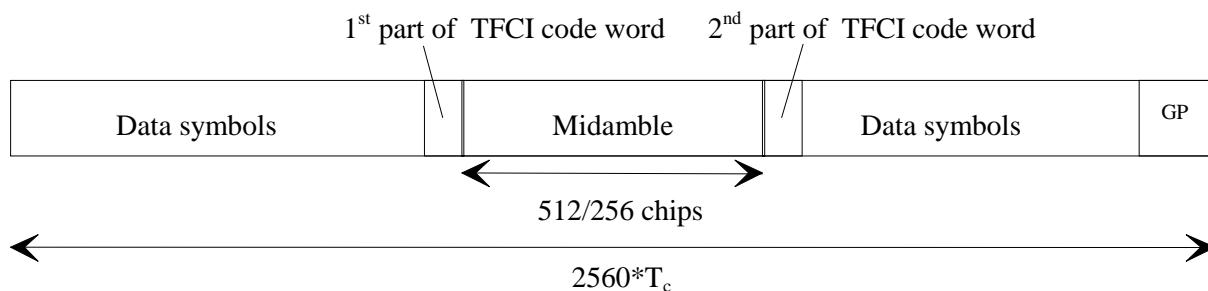


Figure 7: Position of the TFCI code word in the traffic burst in case of downlink

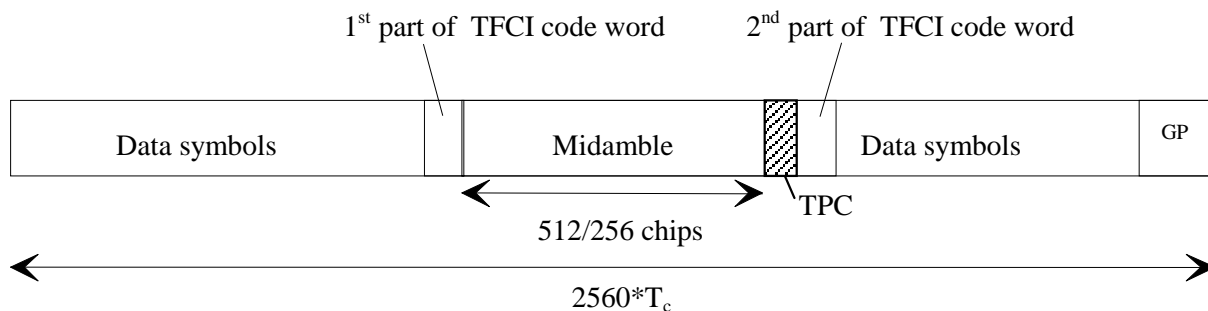


Figure 8: Position of the TFCI code word in the traffic burst in case of uplink

Two examples of TFCI transmission in the case of multiple DPCCHs used for a connection are given in the Figure 9 and Figure 10 below. Combinations of the two schemes shown are also applicable.

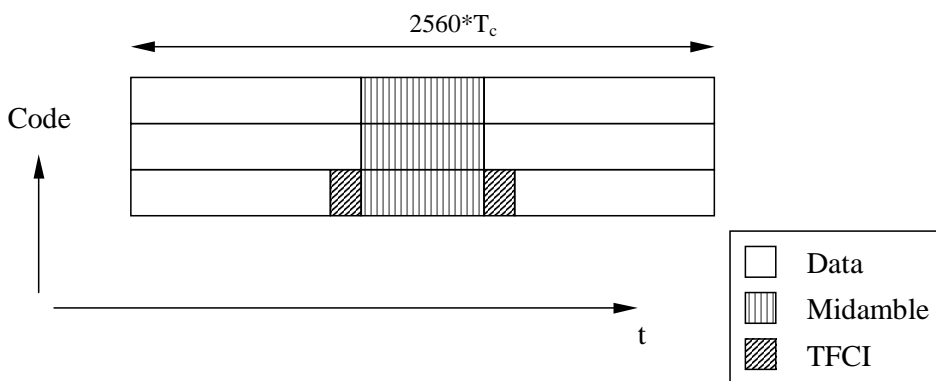


Figure 9: Example of TFCI transmission with physical channels multiplexed in code domain

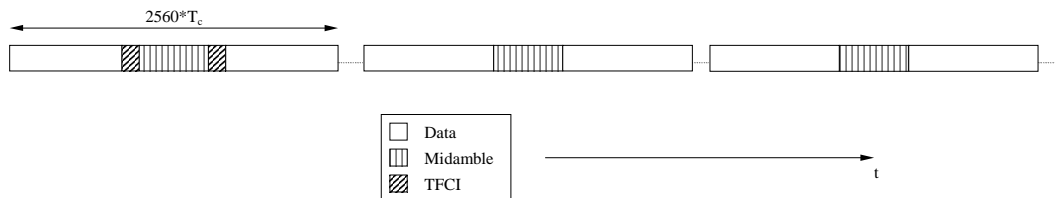


Figure 10: Example of TFCI transmission with physical channels multiplexed in time domain

In case the Node B receives an invalid TFI combination on the DCHs mapped to one CCTrCH the procedure described in [16] shall be applied. According to this procedure DTX shall be applied to all DPCCHs to which the CCTrCH is mapped to.

5.2.2.5 Transmission of TPC

All burst types 1, 2 and 3 for dedicated channels provide the possibility for transmission of TPC in uplink.

The transmission of TPC is done in the data parts of the traffic burst. Independent of the SF that is applied to the data symbols in the burst, the data in the TPC field are always spread with SF=16 using the channelisation code in the branch with the highest code numbering of the allowed OVFSF sub tree, as depicted in [8]. Hence the midamble structure and length is not changed. The TPC information is to be transmitted directly after the midamble. Figure 11 shows the position of the TPC in a traffic burst.

For every user the TPC information shall be transmitted at least once per transmitted frame. If a TFCI is applied for a CCTrCH, TPC shall be transmitted with the same channelization codes and in the same timeslots as the TFCI. If no TFCI is applied for a CCTrCH, TPC shall be transmitted using the physical channel corresponding to physical channel

sequence number $p=1$. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

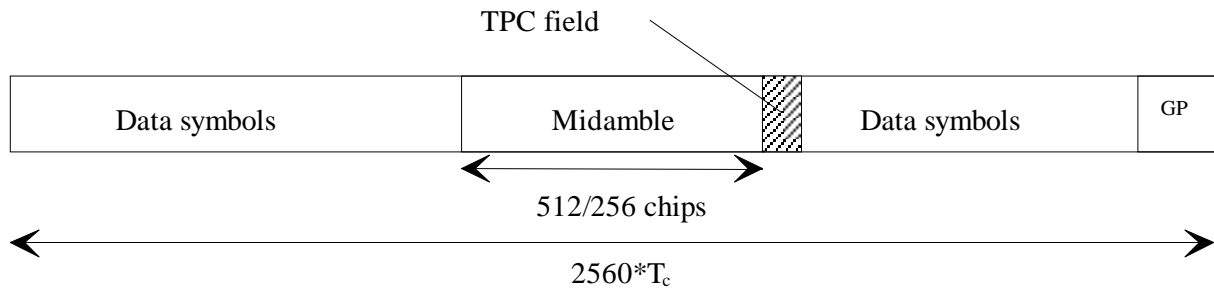


Figure 11: Position of TPC information in the traffic burst

The length of the TPC field is N_{TPC} bits. The TPC field is formed via repetition encoding a single bit b_{TPC} , N_{TPC} times. The relationship between b_{TPC} and the TPC command is shown in table 4a.

Table 4a: TPC bit pattern

| b_{TPC} | TPC command | Meaning |
|-----------|-------------|-------------------|
| 0 | 'Down' | Decrease Tx Power |
| 1 | 'Up' | Increase Tx Power |

5.2.2.6 Timeslot formats

5.2.2.6.1 Downlink timeslot formats

The downlink timeslot format depends on the spreading factor, midamble length and on the number of the TFCI code word bits, as depicted in the table 5a.

Table 5a: Time slot formats for the Downlink

| Slot Format # | Spreading Factor | Midamble length (chips) | $N_{\text{TFCI code word}}$ (bits) | Bits/slot | $N_{\text{Data/Slot}}$ (bits) | $N_{\text{data/data field}}$ (bits) |
|---------------|------------------|-------------------------|------------------------------------|-----------|-------------------------------|-------------------------------------|
| 0 | 16 | 512 | 0 | 244 | 244 | 122 |
| 1 | 16 | 512 | 4 | 244 | 240 | 120 |
| 2 | 16 | 512 | 8 | 244 | 236 | 118 |
| 3 | 16 | 512 | 16 | 244 | 228 | 114 |
| 4 | 16 | 512 | 32 | 244 | 212 | 106 |
| 5 | 16 | 256 | 0 | 276 | 276 | 138 |
| 6 | 16 | 256 | 4 | 276 | 272 | 136 |
| 7 | 16 | 256 | 8 | 276 | 268 | 134 |
| 8 | 16 | 256 | 16 | 276 | 260 | 130 |
| 9 | 16 | 256 | 32 | 276 | 244 | 122 |
| 10 | 1 | 512 | 0 | 3904 | 3904 | 1952 |
| 11 | 1 | 512 | 4 | 3904 | 3900 | 1950 |
| 12 | 1 | 512 | 8 | 3904 | 3896 | 1948 |
| 13 | 1 | 512 | 16 | 3904 | 3888 | 1944 |
| 14 | 1 | 512 | 32 | 3904 | 3872 | 1936 |
| 15 | 1 | 256 | 0 | 4416 | 4416 | 2208 |
| 16 | 1 | 256 | 4 | 4416 | 4412 | 2206 |
| 17 | 1 | 256 | 8 | 4416 | 4408 | 2204 |
| 18 | 1 | 256 | 16 | 4416 | 4400 | 2200 |
| 19 | 1 | 256 | 32 | 4416 | 4384 | 2192 |

5.2.2.6.2 Uplink timeslot formats

The uplink timeslot format depends on the spreading factor, midamble length, guard period length and on the number of the TFCI code word bits. Due to TPC, different amount of bits are mapped to the two data fields. The timeslot formats are depicted in the table 5b. Note that slot format #90 shall only be used for HS_SICH.

Table 5b: Timeslot formats for the Uplink

| Slot Format # | Spreading Factor | Midamble length (chips) | Guard Period (chips) | N _{TCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|------------------|-------------------------|----------------------|-----------------------------------|-------------------------|-----------|-------------------------------|--|--|
| 0 | 16 | 512 | 96 | 0 | 0 | 244 | 244 | 122 | 122 |
| 1 | 16 | 512 | 96 | 0 | 2 | 244 | 242 | 122 | 120 |
| 2 | 16 | 512 | 96 | 4 | 2 | 244 | 238 | 120 | 118 |
| 3 | 16 | 512 | 96 | 8 | 2 | 244 | 234 | 118 | 116 |
| 4 | 16 | 512 | 96 | 16 | 2 | 244 | 226 | 114 | 112 |
| 5 | 16 | 512 | 96 | 32 | 2 | 244 | 210 | 106 | 104 |
| 6 | 16 | 256 | 96 | 0 | 0 | 276 | 276 | 138 | 138 |
| 7 | 16 | 256 | 96 | 0 | 2 | 276 | 274 | 138 | 136 |
| 8 | 16 | 256 | 96 | 4 | 2 | 276 | 270 | 136 | 134 |
| 9 | 16 | 256 | 96 | 8 | 2 | 276 | 266 | 134 | 132 |
| 10 | 16 | 256 | 96 | 16 | 2 | 276 | 258 | 130 | 128 |
| 11 | 16 | 256 | 96 | 32 | 2 | 276 | 242 | 122 | 120 |
| 12 | 8 | 512 | 96 | 0 | 0 | 488 | 488 | 244 | 244 |
| 13 | 8 | 512 | 96 | 0 | 2 | 486 | 484 | 244 | 240 |
| 14 | 8 | 512 | 96 | 4 | 2 | 482 | 476 | 240 | 236 |
| 15 | 8 | 512 | 96 | 8 | 2 | 478 | 468 | 236 | 232 |
| 16 | 8 | 512 | 96 | 16 | 2 | 470 | 452 | 228 | 224 |
| 17 | 8 | 512 | 96 | 32 | 2 | 454 | 420 | 212 | 208 |
| 18 | 8 | 256 | 96 | 0 | 0 | 552 | 552 | 276 | 276 |
| 19 | 8 | 256 | 96 | 0 | 2 | 550 | 548 | 276 | 272 |
| 20 | 8 | 256 | 96 | 4 | 2 | 546 | 540 | 272 | 268 |
| 21 | 8 | 256 | 96 | 8 | 2 | 542 | 532 | 268 | 264 |
| 22 | 8 | 256 | 96 | 16 | 2 | 534 | 516 | 260 | 256 |
| 23 | 8 | 256 | 96 | 32 | 2 | 518 | 484 | 244 | 240 |
| 24 | 4 | 512 | 96 | 0 | 0 | 976 | 976 | 488 | 488 |
| 25 | 4 | 512 | 96 | 0 | 2 | 970 | 968 | 488 | 480 |
| 26 | 4 | 512 | 96 | 4 | 2 | 958 | 952 | 480 | 472 |
| 27 | 4 | 512 | 96 | 8 | 2 | 946 | 936 | 472 | 464 |
| 28 | 4 | 512 | 96 | 16 | 2 | 922 | 904 | 456 | 448 |
| 29 | 4 | 512 | 96 | 32 | 2 | 874 | 840 | 424 | 416 |
| 30 | 4 | 256 | 96 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 31 | 4 | 256 | 96 | 0 | 2 | 1098 | 1096 | 552 | 544 |
| 32 | 4 | 256 | 96 | 4 | 2 | 1086 | 1080 | 544 | 536 |
| 33 | 4 | 256 | 96 | 8 | 2 | 1074 | 1064 | 536 | 528 |
| 34 | 4 | 256 | 96 | 16 | 2 | 1050 | 1032 | 520 | 512 |
| 35 | 4 | 256 | 96 | 32 | 2 | 1002 | 968 | 488 | 480 |
| 36 | 2 | 512 | 96 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 37 | 2 | 512 | 96 | 0 | 2 | 1938 | 1936 | 976 | 960 |
| 38 | 2 | 512 | 96 | 4 | 2 | 1910 | 1904 | 960 | 944 |
| 39 | 2 | 512 | 96 | 8 | 2 | 1882 | 1872 | 944 | 928 |
| 40 | 2 | 512 | 96 | 16 | 2 | 1826 | 1808 | 912 | 896 |
| 41 | 2 | 512 | 96 | 32 | 2 | 1714 | 1680 | 848 | 832 |
| 42 | 2 | 256 | 96 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 43 | 2 | 256 | 96 | 0 | 2 | 2194 | 2192 | 1104 | 1088 |
| 44 | 2 | 256 | 96 | 4 | 2 | 2166 | 2160 | 1088 | 1072 |
| 45 | 2 | 256 | 96 | 8 | 2 | 2138 | 2128 | 1072 | 1056 |
| 46 | 2 | 256 | 96 | 16 | 2 | 2082 | 2064 | 1040 | 1024 |
| 47 | 2 | 256 | 96 | 32 | 2 | 1970 | 1936 | 976 | 960 |

| Slot Format # | Spreading Factor | Midamble length (chips) | Guard Period (chips) | N _{TFCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|------------------|-------------------------|----------------------|------------------------------------|-------------------------|-----------|-------------------------------|--|--|
| 48 | 1 | 512 | 96 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 49 | 1 | 512 | 96 | 0 | 2 | 3874 | 3872 | 1952 | 1920 |
| 50 | 1 | 512 | 96 | 4 | 2 | 3814 | 3808 | 1920 | 1888 |
| 51 | 1 | 512 | 96 | 8 | 2 | 3754 | 3744 | 1888 | 1856 |
| 52 | 1 | 512 | 96 | 16 | 2 | 3634 | 3616 | 1824 | 1792 |
| 53 | 1 | 512 | 96 | 32 | 2 | 3394 | 3360 | 1696 | 1664 |
| 54 | 1 | 256 | 96 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 55 | 1 | 256 | 96 | 0 | 2 | 4386 | 4384 | 2208 | 2176 |
| 56 | 1 | 256 | 96 | 4 | 2 | 4326 | 4320 | 2176 | 2144 |
| 57 | 1 | 256 | 96 | 8 | 2 | 4266 | 4256 | 2144 | 2112 |
| 58 | 1 | 256 | 96 | 16 | 2 | 4146 | 4128 | 2080 | 2048 |
| 59 | 1 | 256 | 96 | 32 | 2 | 3906 | 3872 | 1952 | 1920 |
| 60 | 16 | 512 | 192 | 0 | 0 | 232 | 232 | 122 | 110 |
| 61 | 16 | 512 | 192 | 0 | 2 | 232 | 230 | 122 | 108 |
| 62 | 16 | 512 | 192 | 4 | 2 | 232 | 226 | 120 | 106 |
| 63 | 16 | 512 | 192 | 8 | 2 | 232 | 222 | 118 | 104 |
| 64 | 16 | 512 | 192 | 16 | 2 | 232 | 214 | 114 | 100 |
| 65 | 16 | 512 | 192 | 32 | 2 | 232 | 198 | 106 | 92 |
| 66 | 8 | 512 | 192 | 0 | 0 | 464 | 464 | 244 | 220 |
| 67 | 8 | 512 | 192 | 0 | 2 | 462 | 460 | 244 | 216 |
| 68 | 8 | 512 | 192 | 4 | 2 | 458 | 452 | 240 | 212 |
| 69 | 8 | 512 | 192 | 8 | 2 | 454 | 444 | 236 | 208 |
| 70 | 8 | 512 | 192 | 16 | 2 | 446 | 428 | 228 | 200 |
| 71 | 8 | 512 | 192 | 32 | 2 | 430 | 396 | 212 | 184 |
| 72 | 4 | 512 | 192 | 0 | 0 | 928 | 928 | 488 | 440 |
| 73 | 4 | 512 | 192 | 0 | 2 | 922 | 920 | 488 | 432 |
| 74 | 4 | 512 | 192 | 4 | 2 | 910 | 904 | 480 | 424 |
| 75 | 4 | 512 | 192 | 8 | 2 | 898 | 888 | 472 | 416 |
| 76 | 4 | 512 | 192 | 16 | 2 | 874 | 856 | 456 | 400 |
| 77 | 4 | 512 | 192 | 32 | 2 | 826 | 792 | 424 | 368 |
| 78 | 2 | 512 | 192 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 79 | 2 | 512 | 192 | 0 | 2 | 1842 | 1840 | 976 | 864 |
| 80 | 2 | 512 | 192 | 4 | 2 | 1814 | 1808 | 960 | 848 |
| 81 | 2 | 512 | 192 | 8 | 2 | 1786 | 1776 | 944 | 832 |
| 82 | 2 | 512 | 192 | 16 | 2 | 1730 | 1712 | 912 | 800 |
| 83 | 2 | 512 | 192 | 32 | 2 | 1618 | 1584 | 848 | 736 |
| 84 | 1 | 512 | 192 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |
| 85 | 1 | 512 | 192 | 0 | 2 | 3682 | 3680 | 1952 | 1728 |
| 86 | 1 | 512 | 192 | 4 | 2 | 3622 | 3616 | 1920 | 1696 |
| 87 | 1 | 512 | 192 | 8 | 2 | 3562 | 3552 | 1888 | 1664 |
| 88 | 1 | 512 | 192 | 16 | 2 | 3442 | 3424 | 1824 | 1600 |
| 89 | 1 | 512 | 192 | 32 | 2 | 3202 | 3168 | 1696 | 1472 |
| 90 | 16 | 512 | 96 | 0 | 8 | 244 | 236 | 122 | 114 |

5.2.3 Training sequences for spread bursts

In this subclause, the training sequences for usage as midambles in burst type 1, 2 and 3 (see subclause 5.2.2) are defined. The training sequences, i.e. midambles, of different users active in the same cell and same time slot are

cyclically shifted versions of one cell-specific single basic midamble code. The applicable basic midamble codes are given in Annex A.1 and A.2. As different basic midamble codes are required for different burst formats, the Annex A.1 shows the basic midamble codes \mathbf{m}_{pL} for burst type 1 and 3, and Annex and A.2 shows \mathbf{m}_{pS} for burst type 2. It should be noted that burst type 2 must not be mixed with burst type 1 or 3 in the same timeslot of one cell.

The basic midamble codes in Annex A.1 and A.2 are listed in hexadecimal notation. The binary form of the basic midamble code shall be derived according to table 6 below.

Table 6: Mapping of 4 binary elements m_i on a single hexadecimal digit

| 4 binary elements m_i | Mapped on hexadecimal digit |
|----------------------------|-----------------------------|
| -1 -1 -1 -1 | 0 |
| -1 -1 -1 1 | 1 |
| -1 -1 1 -1 | 2 |
| -1 -1 1 1 | 3 |
| -1 1 -1 -1 | 4 |
| -1 1 -1 1 | 5 |
| -1 1 1 -1 | 6 |
| -1 1 1 1 | 7 |
| 1 -1 -1 -1 | 8 |
| 1 -1 -1 1 | 9 |
| 1 -1 1 -1 | A |
| 1 -1 1 1 | B |
| 1 1 -1 -1 | C |
| 1 1 -1 1 | D |
| 1 1 1 -1 | E |
| 1 1 1 1 | F |

For each particular basic midamble code, its binary representation can be written as a vector \mathbf{m}_p :

$$\mathbf{m}_p = (m_1, m_2, \dots, m_p) \quad (1)$$

According to Annex A.1, the size of this vector \mathbf{m}_p is $P=456$ for burst type 1 and 3. Annex A.2 is setting $P=192$ for burst type 2. As QPSK modulation is used, the training sequences are transformed into a complex form, denoted as the complex vector $\underline{\mathbf{m}}_p$:

$$\underline{\mathbf{m}}_p = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_p) \quad (2)$$

The elements \underline{m}_i of $\underline{\mathbf{m}}_p$ are derived from elements m_i of \mathbf{m}_p using equation (3):

$$\underline{m}_i = (j)^i \cdot m_i \text{ for all } i = 1, \dots, P \quad (3)$$

Hence, the elements \underline{m}_i of the complex basic midamble code are alternating real and imaginary.

To derive the required training sequences (different shifts), this vector $\underline{\mathbf{m}}_p$ is periodically extended to the size:

$$i_{\max} = L_m + (K'-1)W + \lfloor P / K \rfloor \quad (4)$$

Notes on equation (4):

- L_m : Midamble length
- K' : Maximum number of different midamble shifts in a cell, when no intermediate shifts are used. This value depends on the midamble length.
- K : Maximum number of different midamble shifts in a cell, when intermediate shifts are used, $K=2K'$. This value depends on the midamble length.

- W : Shift between the midambles, when the number of midambles is K .
- $\lfloor x \rfloor$ denotes the largest integer smaller or equal to x

Allowed values for L_m , K and W are given in Annex A.1 and A.2.

So we obtain a new vector $\underline{\mathbf{m}}$ containing the periodic basic midamble sequence:

$$\underline{\mathbf{m}} = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{i_{\max}}) = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{L_m + (K-1)W + \lfloor P/K \rfloor}) \quad (5)$$

The first P elements of this vector $\underline{\mathbf{m}}$ are the same ones as in vector $\underline{\mathbf{m}}_p$, the following elements repeat the beginning:

$$\underline{m}_i = \underline{m}_{i-P} \text{ for the subset } i = (P+1), \dots, i_{\max} \quad (6)$$

Using this periodic basic midamble sequence $\underline{\mathbf{m}}$ for each shift k a midamble $\underline{\mathbf{m}}^{(k)}$ of length L_m is derived, which can be written as a shift specific vector:

$$\underline{\mathbf{m}}^{(k)} = (\underline{m}_1^{(k)}, \underline{m}_2^{(k)}, \dots, \underline{m}_{L_m}^{(k)}) \quad (7)$$

The L_m midamble elements $\underline{m}_i^{(k)}$ are generated for each midamble of the first K shifts ($k = 1, \dots, K$) based on:

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K-k)W} \text{ with } i = 1, \dots, L_m \text{ and } k = 1, \dots, K' \quad (8)$$

The elements of midambles for the second K shifts ($k = (K'+1), \dots, K = (K'+1), \dots, 2K'$) are generated based on a slight modification of this formula introducing intermediate shifts:

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K-k)W + \lfloor P/K \rfloor} \text{ with } i = 1, \dots, L_m \text{ and } k = K'+1, \dots, K-1 \quad (9)$$

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K-1)W + \lfloor P/K \rfloor} \text{ with } i = 1, \dots, L_m \text{ and } k = K \quad (10)$$

The number K_{Cell} of midambles that is supported in each cell can be smaller than K , depending on the cell size and the possible delay spreads, see annex A. The number K_{Cell} is signalled by higher layers. The midamble sequences derived according to equations (7) to (10) have complex values and are not subject to channelisation or scrambling process, i.e. the elements $\underline{m}_i^{(k)}$ represent complex chips for usage in the pulse shaping process at modulation.

The term "a midamble code set" or "a midamble code family" denotes K specific midamble codes $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$, based on a single basic midamble code $\underline{\mathbf{m}}_p$ according to (1).

5.2.4 Beamforming

When DL beamforming is used, at least that user to which beamforming is applied and which has a dedicated channel shall get one individual midamble according to subclause 5.2.3, even in DL.

5.3 Common physical channels

5.3.1 Primary common control physical channel (P-CCPCH)

The BCH as described in subclause 4.1.2 is mapped onto the Primary Common Control Physical Channel (P-CCPCH). The position (time slot / code) of the P-CCPCH is known from the Physical Synchronisation Channel (PSCH), see subclause 5.3.4.

5.3.1.1 P-CCPCH Spreading

The P-CCPCH uses fixed spreading with a spreading factor $SF = 16$ as described in subclause 5.2.1.1. The P-CCPCH always uses channelisation code $c_{Q=16}^{(k=1)}$.

5.3.1.2 P-CCPCH Burst Types

The burst type 1 as described in subclause 5.2.2 is used for the P-CCPCH. No TFCI is applied for the P-CCPCH.

5.3.1.3 P-CCPCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5.2.3 are used for the P-CCPCH.

5.3.2 Secondary common control physical channel (S-CCPCH)

PCH and FACH as described in subclause 4.1.2 are mapped onto one or more secondary common control physical channels (S-CCPCH). In this way the capacity of PCH and FACH can be adapted to the different requirements.

5.3.2.1 S-CCPCH Spreading

The S-CCPCH uses fixed spreading with a spreading factor $SF = 16$ as described in subclause 5.2.1.1.

5.3.2.2 S-CCPCH Burst Types

The burst types 1 or 2 as described in subclause 5.2.2 are used for the S-CCPCHs. TFCI may be applied for S-CCPCHs.

5.3.2.3 S-CCPCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5.2.3 are used for the S-CCPCH.

5.3.3 The physical random access channel (PRACH)

The RACH as described in subclause 4.1.2 is mapped onto one uplink physical random access channel (PRACH).

5.3.3.1 PRACH Spreading

The uplink PRACH uses either spreading factor $SF=16$ or $SF=8$ as described in subclause 5.2.1.2. The set of admissible spreading codes for use on the PRACH and the associated spreading factors are broadcast on the BCH (within the RACH configuration parameters on the BCH).

5.3.3.2 PRACH Burst Type

The UEs send uplink access bursts of type 3 randomly in the PRACH. TFCI and TPC are not applied for the PRACH.

5.3.3.3 PRACH Training sequences

The training sequences, i.e. midambles, of different users active in the same time slot are time shifted versions of a single periodic basic code. The basic midamble codes for burst type 3 are shown in Annex A. The necessary time shifts are obtained by choosing either *all* $k=1,2,3,\dots,K$ (for cells with small radius) or *uneven* $k=1,3,5,\dots\leq K$ (for cells with large radius). Different cells use different periodic basic codes, i.e. different midamble sets.

For cells with large radius additional midambles may be derived from the time-inverted Basic Midamble Sequence. Thus, the second Basic Midamble Code m_2 is the time inverted version of Basic Midamble Code m_1 .

In this way, a joint channel estimation for the channel impulse responses of all active users within one time slot can be performed by a maximum of two cyclic correlations (in cells with small radius, a single cyclic correlator suffices). The different user specific channel impulse response estimates are obtained sequentially in time at the output of the cyclic correlators.

5.3.3.4 PRACH timeslot formats

For the PRACH the timeslot format is only spreading factor dependent. The timeslot formats 60 and 66 of table 5b are applicable for the PRACH.

5.3.3.5 Association between Training Sequences and Channelisation Codes

For the PRACH there exists a fixed association between the training sequence and the channelisation code. The generic rule to define this association is based on the order of the channelisation codes $c_Q^{(k)}$ given by k and the order of the midambles $m_j^{(k)}$ given by k , firstly, and j , secondly, with the constraint that the midamble for a spreading factor Q is the same as in the upper branch for the spreading factor $2Q$. The index $j=1$ or 2 indicates whether the original Basic Midamble Sequence ($j=1$) or the time-inverted Basic Midamble Sequence is used ($j=2$).

- For the case that all k are allowed and only one periodic basic code m_1 is available for the RACH, the association depicted in figure 12 is straightforward.
- For the case that only odd k are allowed the principle of the association is shown in figure 13. This association is applied for one and two basic periodic codes.

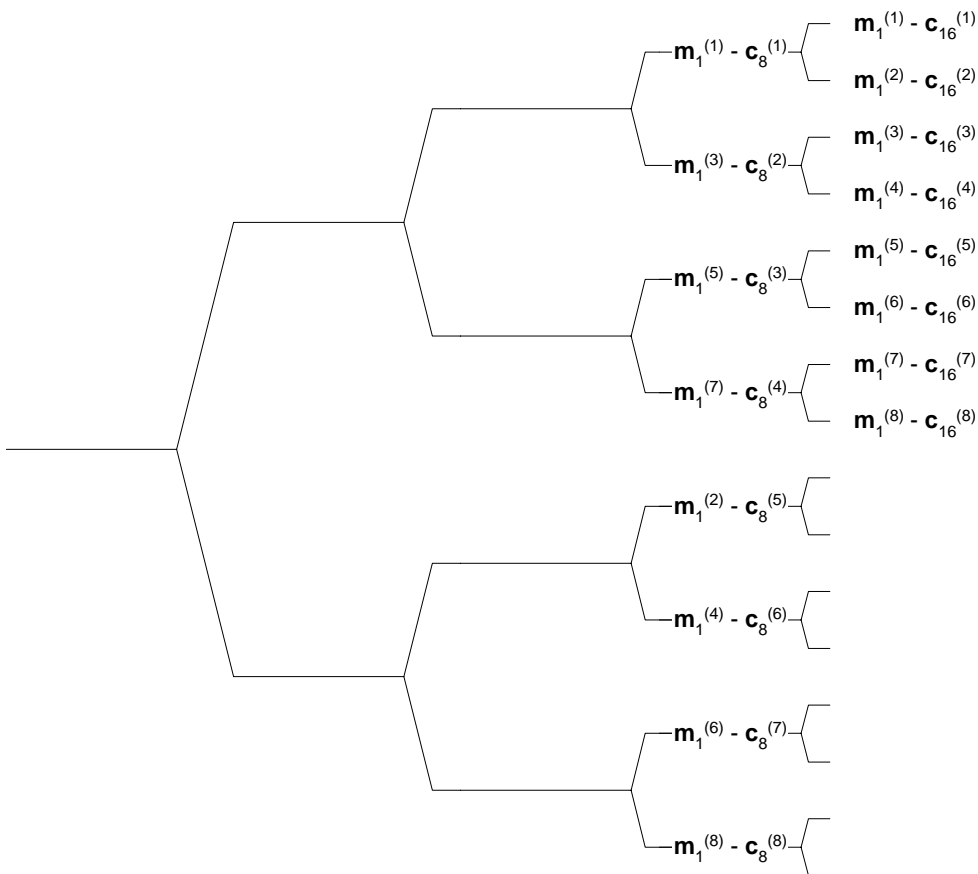


Figure 12: Association of Midambles to Channelisation Codes in the OVSF tree for all k

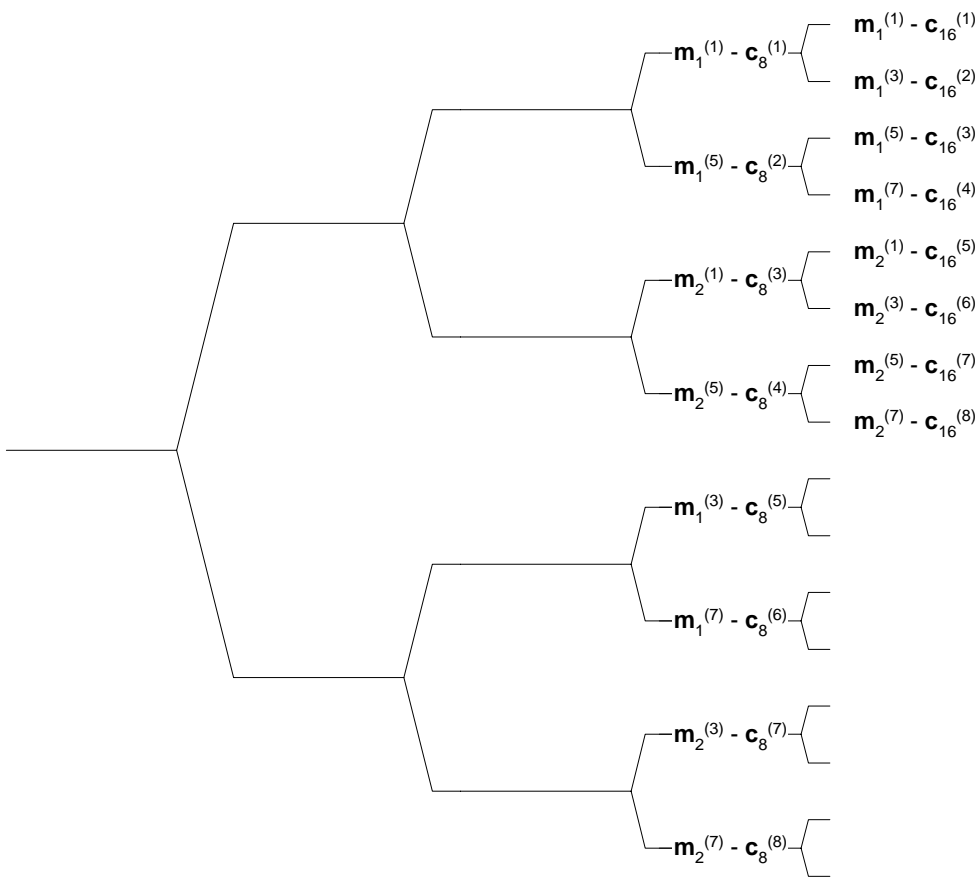


Figure 13: Association of Midambles to Channelisation Codes in the OVSF tree for odd *k*

5.3.4 The synchronisation channel (SCH)

In TDD mode code group of a cell can be derived from the synchronisation channel. In order not to limit the uplink/downlink asymmetry the SCH is mapped on one or two downlink slots per frame only.


There are two cases of SCH and P-CCPCH allocation as follows:

- Case 1) SCH and P-CCPCH allocated in TS#*k*, *k*=0...14
- Case 2) SCH allocated in two TS: TS#*k* and TS#*k*+8, *k*=0...6; P-CCPCH allocated in TS#*k*.

The position of SCH (value of *k*) in frame can change on a long term basis in any case.

Due to this SCH scheme, the position of P-CCPCH is known from the SCH.

Figure 14 is an example for transmission of SCH, *k*=0, of Case 2.

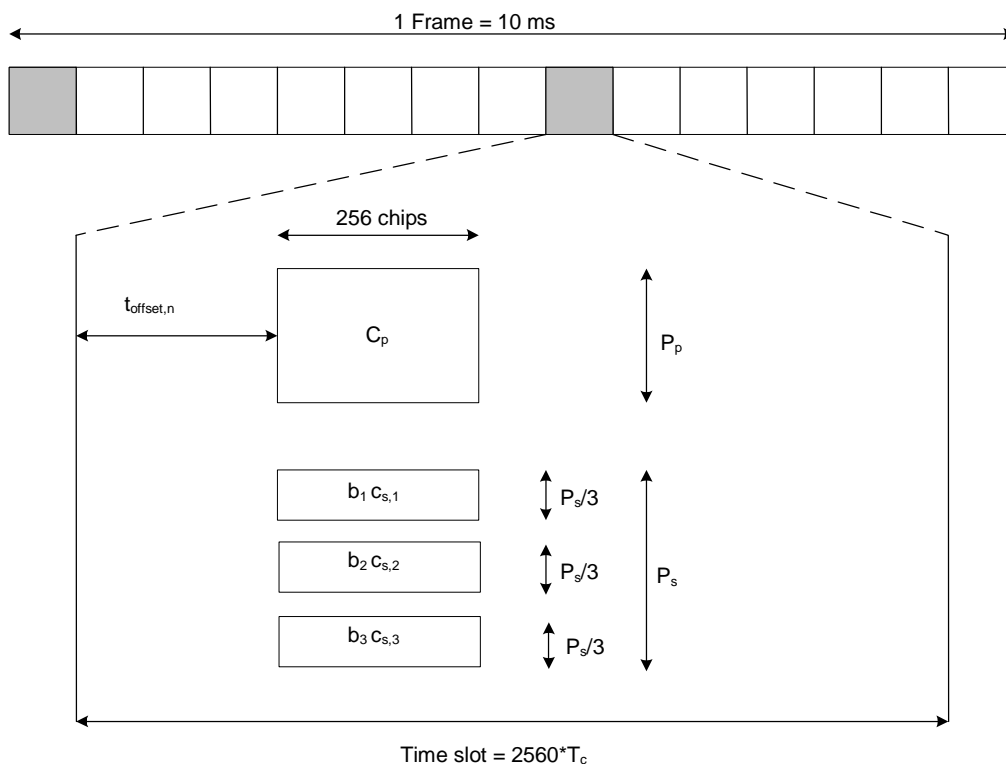

$$b_i \in \{\pm 1, \pm j\}, C_{s,i} \in \{C_0, C_1, C_3, C_4, C_5, C_6, C_8, C_{10}, C_{12}, C_{13}, C_{14}, C_{15}\}, i=1,2,3; \text{ see [8]}$$

Figure 14: Scheme for Synchronisation channel SCH consisting of one primary sequence Cp and 3 parallel secondary sequences Cs,i in slot k and k+8 (example for k=0 in Case 2)

As depicted in figure 14, the SCH consists of a primary and three secondary code sequences each 256 chips long. The primary and secondary code sequences are defined in [8] clause 7 'Synchronisation codes for the 3.84 Mcps option'.

Due to mobile to mobile interference, it is mandatory for public TDD systems to keep synchronisation between base stations. As a consequence of this, a capture effect concerning SCH can arise. The time offset $t_{\text{offset},n}$ enables the system to overcome the capture effect.

The time offset $t_{\text{offset},n}$ is one of 32 values, depending on the code group of the cell, n, cf. "table 6 Mapping scheme for Cell Parameters, Code Groups, Scrambling Codes, Midambles and t_{offset} " in [8]. Note that the cell parameter will change from frame to frame, cf. "Table 7 Alignment of cell parameter cycling and system frame number" in [8], but the cell will belong to only one code group and thus have one time offset $t_{\text{offset},n}$. The exact value for $t_{\text{offset},n}$, regarding column "Associated t_{offset} " in table 6 in [8] is given by:

$$t_{\text{offset},n} = \begin{cases} n \cdot 48 \cdot T_c & n < 16 \\ (720 + n \cdot 48) T_c & n \geq 16 \end{cases}; \quad n = 0, \dots, 31$$

5.3.5 Physical Uplink Shared Channel (PUSCH)

The USCH as described in subclause 4.1.2 is mapped onto one or more physical uplink shared channels (PUSCH). Timing advance, as described in [9], subclause 4.3, is applied to the PUSCH.

5.3.5.1 PUSCH Spreading

The spreading factors that can be applied to the PUSCH are SF = 1, 2, 4, 8, 16 as described in subclause 5.2.1.2.

5.3.5.2 PUSCH Burst Types

Burst types 1, 2 or 3 as described in subclause 5.2.2 can be used for PUSCH. TFCI and TPC can be transmitted on the PUSCH.

5.3.5.3 PUSCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the PUSCH.

5.3.5.4 UE Selection

The UE that shall transmit on the PUSCH is selected by higher layer signalling.

5.3.6 Physical Downlink Shared Channel (PDSCH)

The DSCH as described in subclause 4.1.2 is mapped onto one or more physical downlink shared channels (PDSCH).

5.3.6.1 PDSCH Spreading

The PDSCH uses either spreading factor $SF = 16$ or $SF = 1$ as described in subclause 5.2.1.1.

5.3.6.2 PDSCH Burst Types

Burst types 1 or 2 as described in subclause 5.2.2 can be used for PDSCH. TFCI can be transmitted on the PDSCH.

5.3.6.3 PDSCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the PDSCH.

5.3.6.4 UE Selection

To indicate to the UE that there is data to decode on the DSCH, three signalling methods are available:

- 1) using the TFCI field of the associated channel or PDSCH;
- 2) using on the DSCH user specific midamble derived from the set of midambles used for that cell;
- 3) using higher layer signalling.

When the midamble based method is used, the UE specific midamble allocation method shall be employed (see subclause 5.6), and the UE shall decode the PDSCH if the PDSCH was transmitted with the midamble assigned to the UE by UTRAN. For this method no other physical channels may use the same time slot as the PDSCH and only one UE may share the PDSCH time slot within one TTI.

Note: From the above mentioned signalling methods, only the higher layer signalling method is supported by higher layers in this release.

5.3.7 The Paging Indicator Channel (PICH)

The Paging Indicator Channel (PICH) is a physical channel used to carry the paging indicators.

5.3.7.1 Mapping of Paging Indicators to the PICH bits

Figure 15 depicts the structure of a PICH burst and the numbering of the bits within the burst. The same burst type is used for the PICH in every cell. N_{PIB} bits in a normal burst of type 1 or 2 are used to carry the paging indicators, where N_{PIB} depends on the burst type: $N_{PIB}=240$ for burst type 1 and $N_{PIB}=272$ for burst type 2. The bits $s_{N_{PIB}+1}, \dots, s_{N_{PIB}+4}$ adjacent to the midamble are reserved for possible future use.

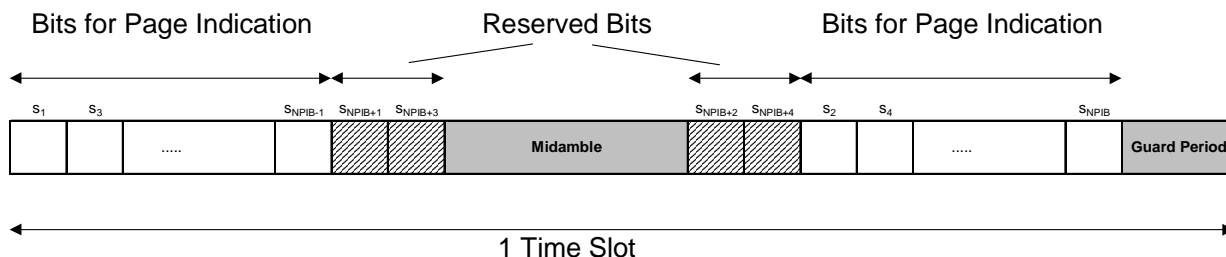


Figure 15: Transmission and numbering of paging indicator carrying bits in a PICH burst

Each paging indicator P_q in one time slot is mapped to the bits $\{s_{2L_{PI} \cdot q+1}, \dots, s_{2L_{PI} \cdot (q+1)}\}$ within this time slot. Thus, due to the interleaved transmission of the bits half of the symbols used for each paging indicator are transmitted in the first data part, and the other half of the symbols are transmitted in the second data part, as exemplarily shown in figure 16 for a paging indicator length L_{PI} of 4 symbols.

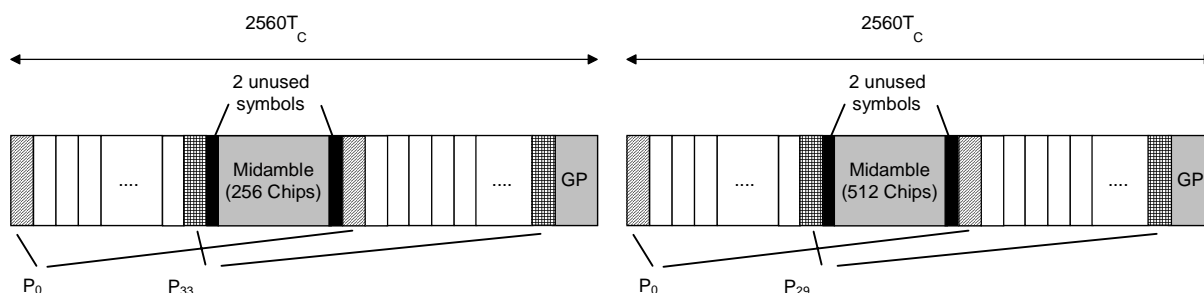


Figure 16: Example of mapping of paging indicators on PICH bits for $L_{PI}=4$

The setting of the paging indicators and the corresponding PICH bits (including the reserved ones) is described in [7].

N_{PI} paging indicators of length $L_{PI}=2$, $L_{PI}=4$ or $L_{PI}=8$ symbols are transmitted in each radio frame that contains the PICH. The number of paging indicators N_{PI} per radio frame is given by the paging indicator length and the burst type, which are both known by higher layer signalling. In table 7 this number is shown for the different possibilities of burst types and paging indicator lengths.

Table 7: Number N_{PI} of paging indicators per time slot for the different burst types and paging indicator lengths L_{PI}

| | $L_{PI}=2$ | $L_{PI}=4$ | $L_{PI}=8$ |
|--------------|-------------|-------------|-------------|
| Burst Type 1 | $N_{PI}=60$ | $N_{PI}=30$ | $N_{PI}=15$ |
| Burst Type 2 | $N_{PI}=68$ | $N_{PI}=34$ | $N_{PI}=17$ |

5.3.7.2 Structure of the PICH over multiple radio frames

As shown in figure 17, the paging indicators of N_{PICH} consecutive frames form a PICH block, N_{PICH} is configured by higher layers. Thus, $N_P=N_{PICH} \cdot N_{PI}$ paging indicators are transmitted in each PICH block.

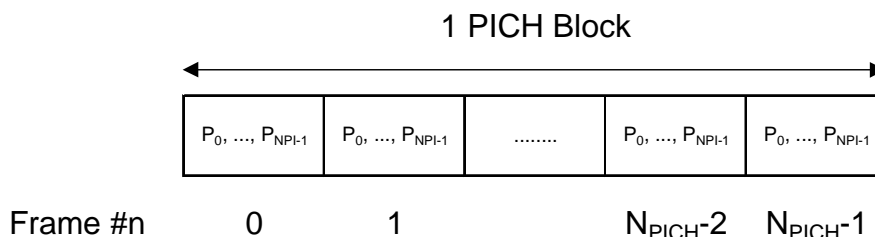


Figure 17: Structure of a PICH block

The value PI (PI = 0, ..., N_P-1) calculated by higher layers for use for a certain UE, see [15], is associated to the paging indicator P_q in the n th frame of one PICH block, where q is given by

$$q = \text{PI mod } N_{PI}$$

and n is given by

$$n = \text{PI div } N_{PI}$$

The PI bitmap in the PCH data frames over I_{ub} contains indication values for all possible higher layer PI values, see [17]. Each bit in the bitmap indicates if the paging indicator P_q associated with that particular PI shall be set to 0 or 1. Hence, the calculation in the formulas above is to be performed in Node B to make the association between PI and P_q .


5.3.7.3 PICH Training sequences

The training sequences, i.e. midambles for the PICH, are generated as described in subclause 5.2.3. The allocation of midambles depends on whether SCTD is applied to the PICH.

- If no antenna diversity is applied to the PICH the midambles can be allocated as described in subclause 5.6.
- If SCTD antenna diversity is applied to the PICH the allocation of midambles shall be as described in [9].

5.3.8 The physical node B synchronisation channel (PNBSCH)

In case cell sync bursts are used for Node B synchronisation the PNBSCH shall be used for the transmission of the cell sync burst [8]. The PNBSCH shall be mapped on the same timeslot as the PRACH acc. to a higher layer schedule. The cell sync burst shall be transmitted at the beginning of a timeslot. In case of Node B synchronisation via the air interface the transmission of a RACH may be prohibited on higher layer command in specified frames and timeslots.

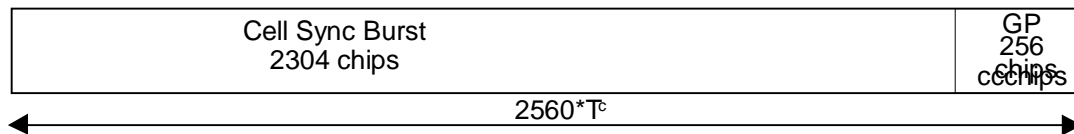

5.3.9 High Speed Physical Downlink Shared Channel (HS-PDSCH)

The HS-DSCH as described in subclause 4.1.2 is mapped onto one or more high speed physical downlink shared channels (HS-PDSCH).

5.3.9.1 HS-PDSCH Spreading

The HS-PDSCH shall use either spreading factor SF = 16 or SF=1, as described in 5.2.1.1.

5.3.9.2 HS-PDSCH Burst Types

Burst types 1 or 2 as described in subclause 5.2.2 can be used for PDSCH. TFCI shall not be transmitted on the HS-PDSCH. The TF of the HS-DSCH is derived from the associated HS-SCCH.

5.3.9.3 HS-PDSCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the HS-PDSCH.

5.3.9.4 UE Selection

To indicate to the UE that there is data to decode on the HS-DSCH, the UE id on the associated HS-SCCH shall be used.

5.3.9.5 HS-PDSCH timeslot formats

An HS-PDSCH may use QPSK or 16QAM modulation symbols. The time slot formats are shown in table 7A.

Table 7A: Time slot formats for the HS-PDSCH

| Slot Format # | Spreading Factor | Midamble length (chips) | N_{TFCI} code word (bits) | Bits/slot | $N_{\text{Data/Slot}}$ (bits) | $N_{\text{data/data field}}$ (bits) |
|---------------|------------------|-------------------------|------------------------------------|-----------|-------------------------------|-------------------------------------|
| 0 (QPSK) | 16 | 512 | 0 | 244 | 244 | 122 |
| 1 (16QAM) | 16 | 512 | 0 | 488 | 488 | 244 |
| 2 (QPSK) | 16 | 256 | 0 | 276 | 276 | 138 |
| 3 (16QAM) | 16 | 256 | 0 | 552 | 552 | 276 |
| 4 (QPSK) | 1 | 512 | 0 | 3904 | 3904 | 1952 |
| 5 (16QAM) | 1 | 512 | 0 | 7808 | 7808 | 3904 |
| 6 (QPSK) | 1 | 256 | 0 | 4416 | 4416 | 2208 |
| 7(16QAM) | 1 | 256 | 0 | 8832 | 8832 | 4416 |

5.3.10 Shared Control Channel for HS-DSCH (HS-SCCH)

The HS-SCCH is a DL physical channel that carries higher layer control information for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SCCH the structure of which is described below.

5.3.10.1 HS-SCCH Spreading

The HS-SCCH shall use spreading factor $SF = 16$, as described in 5.2.1.1.

5.3.10.2 HS-SCCH Burst Types

Burst type 1 as described in subclause 5.2.2 can be used for HS-SCCH. TFCI shall not be transmitted on the HS-SCCH.

5.3.10.3 HS-SCCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the HS-SCCH.

5.3.10.4 HS-SCCH timeslot formats

The HS-SCCH always uses time slot format #0 from table 5a, see section 5.2.2.6.1.

5.3.11 Shared Information Channel for HS-DSCH (HS-SICH)

The HS-SICH is a UL physical channel that carries higher layer control information and the Channel Quality Indicator CQI for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SICH the structure of which is described below.

5.3.11.1 HS-SICH Spreading

The HS-SICH shall use spreading factor $SF = 16$, as described in 5.2.1.2.

5.3.11.2 HS-SICH Burst Types

Burst type 1 as described in subclause 5.2.2 can be used for HS-SICH. TFCI shall not be transmitted on the HS-SICH, however, the HS-SICH shall carry TPC information.

5.3.11.3 HS-SICH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the HS-SICH.

5.3.11.4 HS-SICH timeslot formats

The HS-SICH shall use time slot format #90 from table 5b, see section 5.2.2.6.2.

5.3.12 The MBMS Indicator Channel (MICH)

The MBMS Indicator Channel (MICH) is a physical channel used to carry the MBMS notification indicators. The UE may use multiple MICH within the MBMS modification period in order to make decisions on individual MBMS notification indicators.

5.3.12.1 Mapping of MBMS Indicators to the MICH bits

Figure 17a depicts the structure of a MICH burst and the numbering of the bits within the burst. The same burst type is used for the MICH in every cell. N_{NIB} bits in a normal burst of type 1 or 2 are used to carry the MBMS notification indicators, where N_{NIB} depends on the burst type: $N_{NIB}=240$ for burst type 1 and $N_{NIB}=272$ for burst type 2. The bits $s_{N_{NIB}+1}, \dots, s_{N_{NIB}+4}$ adjacent to the midamble are reserved for possible future use.

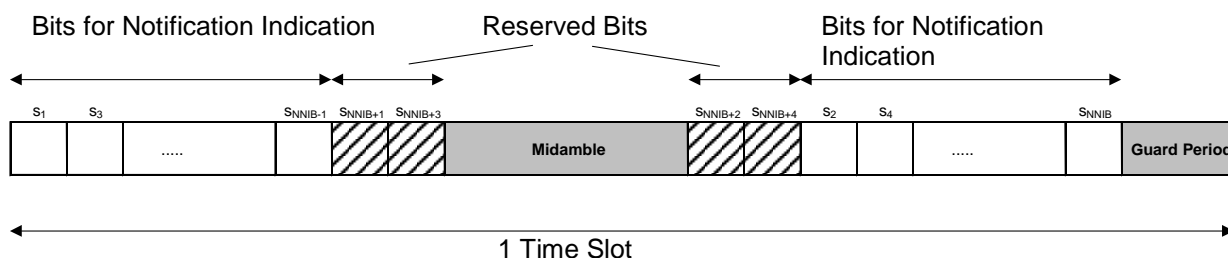


Figure 17a: Transmission and numbering of MBMS notification indicator carrying bits in a MICH burst

Each notification indicator N_q in one time slot is mapped to the bits $\{s_{2L_{NI} \cdot q+1}, \dots, s_{2L_{NI} \cdot (q+1)}\}$ within this time slot. Thus, due to the interleaved transmission of the bits half of the symbols used for each MBMS notification indicator are transmitted in the first data part, and the other half of the symbols are transmitted in the second data part: an example is shown in figure 17b for a MBMS notification indicator length L_{NI} of 4 symbols.

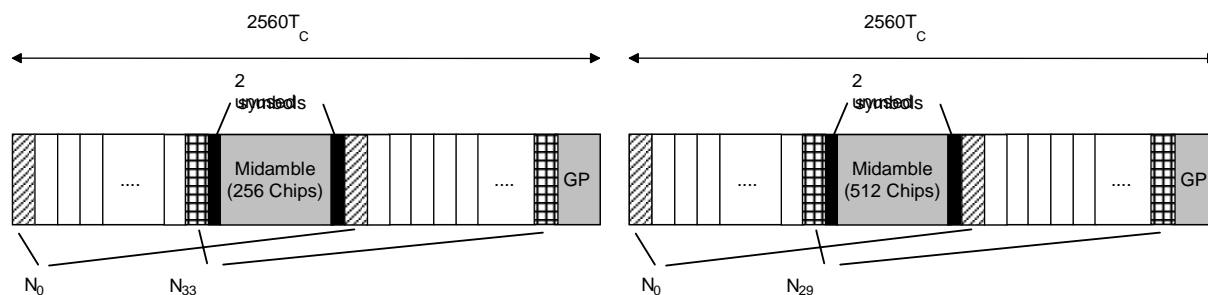


Figure 17b: Example of mapping of MBMS notification indicators on MICH bits for $L_{NI}=4$

The setting of the MBMS notification indicators and the corresponding MICH bits (including the reserved ones) is described in [7].

N_n MBMS notification indicators of length $L_{NI}=2, L_{NI}=4$ or $L_{NI}=8$ symbols are transmitted in each MICH. The number of MBMS notification indicators N_n per MICH is given by the MBMS notification indicator length and the burst type, which are both known by higher layer signalling. In table 7B this number is shown for the different possibilities of burst types and MBMS notification indicator lengths.

Table 7B: Number N_n of MBMS notification indicators per time slot for the different burst types and MBMS notification indicator lengths L_{NI}

| | $L_{NI}=2$ | $L_{NI}=4$ | $L_{NI}=8$ |
|--------------|------------|------------|------------|
| Burst Type 1 | $N_n=60$ | $N_n=30$ | $N_n=15$ |
| Burst Type 2 | $N_n=68$ | $N_n=34$ | $N_n=17$ |

The value NI ($NI = 0, \dots, N_{NI}-1$) calculated by higher layers, is associated to the MBMS notification indicator N_q , where $q = NI \bmod N_n$.

The set of NI passed over the I_{ub} indicates all higher layer NI values for which the notification indicator on MICH should be set to 1 during the corresponding modification period; all other indicators shall be set to 0.

5.3.12.2 MICH Training sequences

The training sequences, i.e. midambles for the MICH, are generated as described in subclause 5.2.3. The allocation of midambles depends on whether SCTD is applied to the MICH.

- If no antenna diversity is applied to the MICH the midambles can be allocated as described in subclause 5.6.
- If SCTD antenna diversity is applied to the MICH the allocation of midambles shall be as described in [9].

5.3.13 E-DCH Physical Uplink Channel (E-PUCH)

One or more E-PUCH are used to carry the uplink E-DCH transport channel and associated control information (E-UCCH) in each E-DCH TTI. In a timeslot designated by UTRAN for E-PUCH use, up to one E-PUCH may be transmitted by a UE. No other physical channels may be transmitted by a UE in an E-PUCH timeslot.

Timing advance, as described in [9], subclause 4.3, is applied to the E-PUCH.

5.3.13.1 E-UCCH

The E-DCH Uplink Control Channel (E-UCCH) carries uplink control information associated with the E-DCH and is carried within indicator fields mapped to E-PUCH. Depending on the configuration by higher layers, an E-PUCH burst may or may not contain E-UCCH and TPC. When E-PUCH does contain E-UCCH, TPC is also transmitted. When E-PUCH does not contain E-UCCH, TPC is not transmitted.

Higher layers shall indicate the maximum number of timeslots (N_{E-UCCH}) that may contain E-UCCH/TPC in the E-DCH TTI. For an allocation of n_{TS} E-PUCH timeslots, the UE shall transmit E-UCCH and TPC on the first m allocated timeslots of the E-DCH TTI, where $m = \min(n_{TS}, N_{E-UCCH})$.

The E-UCCH comprises two parts, E-UCCH part 1 and E-UCCH part 2.

E-UCCH part 1:

- is of length 32 physical channel bits
- is mapped to the TFCI field of the E-PUCH (16 bits either side of the midamble)
- is spread at SF=16 using the channelisation code in the branch with the highest code numbering of the allowed OVFSF sub tree, as depicted in [8]
- uses QPSK modulation

E-UCCH part 2:

- is of length 32 physical channel bits
- is spread using the same spreading factor as the data payloads
- uses the same modulation as the data payloads

Figures 17c and 17d show the E-PUCH data burst with and without the E-UCCH/TPC fields.

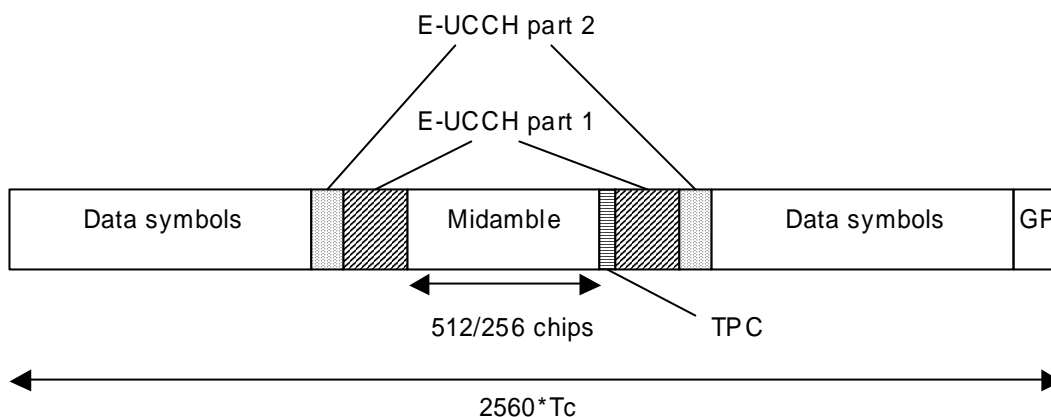


Figure 17c: Location of E-UCCH part 1, E-UCCH part 2 and TPC in the E-PUCH data burst

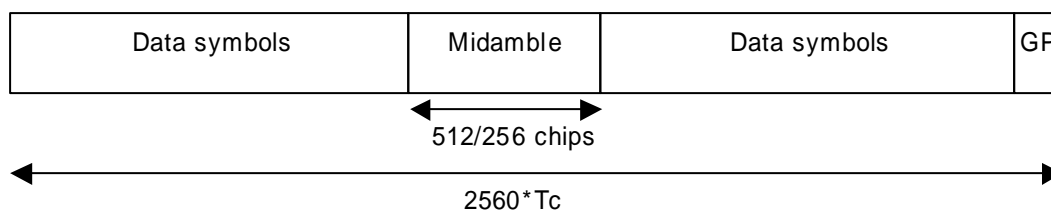


Figure 17d: E-PUCH data burst without E-UCCH/TPC

5.3.13.2 E-PUCH Spreading

The spreading factors that can be applied to the E-PUCH are SF = 1, 2, 4, 8, 16 as described in subclause 5.2.1.2.

5.3.13.3 E-PUCH Burst Types

Burst types 1, 2 or 3 as described in subclause 5.2.2 can be used for E-PUCH. E-UCCH and TPC can be transmitted on the E-PUCH.

5.3.13.4 PUSCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the E-PUCH.

5.3.13.5 UE Selection

UEs that shall transmit on the E-PUCH are selected by higher layers. The UE id on the associated E-AGCH shall be used for identification.

5.3.13.6 E-PUCH timeslot formats

An E-PUCH may use QPSK or 16QAM modulation symbols and may or may not contain E-UCCH/TPC. The time slot formats are shown in table 7c.

Table 7c: Timeslot formats for E-PUCH

| slot format # | SF | Midamble Length (chips) | GP (chips) | N _{EUCC1} (bits) | N _{EUCC2} (bits) | N _{TPC} (bits) | Bits/slot | N _{data/slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|----|-------------------------|------------|---------------------------|---------------------------|-------------------------|-----------|-------------------------------|--|--|
| 0 (QPSK) | 16 | 512 | 96 | 0 | 0 | 0 | 244 | 244 | 122 | 122 |
| 1 (16QAM) | 16 | 512 | 96 | 0 | 0 | 0 | 488 | 488 | 244 | 244 |
| 2 (QPSK) | 16 | 512 | 96 | 32 | 32 | 2 | 244 | 178 | 90 | 88 |
| 3 (16QAM) | 16 | 512 | 96 | 32 | 32 | 2 | 454 | 388 | 196 | 192 |
| 4 (QPSK) | 16 | 256 | 96 | 0 | 0 | 0 | 276 | 276 | 138 | 138 |
| 5 (16QAM) | 16 | 256 | 96 | 0 | 0 | 0 | 552 | 552 | 276 | 276 |
| 6 (QPSK) | 16 | 256 | 96 | 32 | 32 | 2 | 276 | 210 | 106 | 104 |
| 7 (16QAM) | 16 | 256 | 96 | 32 | 32 | 2 | 518 | 452 | 228 | 224 |
| 8 (QPSK) | 8 | 512 | 96 | 0 | 0 | 0 | 488 | 488 | 244 | 244 |
| 9 (16QAM) | 8 | 512 | 96 | 0 | 0 | 0 | 976 | 976 | 488 | 488 |
| 10 (QPSK) | 8 | 512 | 96 | 32 | 32 | 2 | 454 | 388 | 196 | 192 |
| 11 (16QAM) | 8 | 512 | 96 | 32 | 32 | 2 | 874 | 808 | 408 | 400 |
| 12 (QPSK) | 8 | 256 | 96 | 0 | 0 | 0 | 552 | 552 | 276 | 276 |
| 13 (16QAM) | 8 | 256 | 96 | 0 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 14 (QPSK) | 8 | 256 | 96 | 32 | 32 | 2 | 518 | 452 | 228 | 224 |
| 15 (16QAM) | 8 | 256 | 96 | 32 | 32 | 2 | 1002 | 936 | 472 | 464 |
| 16 (QPSK) | 4 | 512 | 96 | 0 | 0 | 0 | 976 | 976 | 488 | 488 |
| 17 (16QAM) | 4 | 512 | 96 | 0 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 18 (QPSK) | 4 | 512 | 96 | 32 | 32 | 2 | 874 | 808 | 408 | 400 |
| 19 (16QAM) | 4 | 512 | 96 | 32 | 32 | 2 | 1714 | 1648 | 832 | 816 |
| 20 (QPSK) | 4 | 256 | 96 | 0 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 21 (16QAM) | 4 | 256 | 96 | 0 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 22 (QPSK) | 4 | 256 | 96 | 32 | 32 | 2 | 1002 | 936 | 472 | 464 |
| 23 (16QAM) | 4 | 256 | 96 | 32 | 32 | 2 | 1970 | 1904 | 960 | 944 |
| 24 (QPSK) | 2 | 512 | 96 | 0 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 25 (16QAM) | 2 | 512 | 96 | 0 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 26 (QPSK) | 2 | 512 | 96 | 32 | 32 | 2 | 1714 | 1648 | 832 | 816 |
| 27 (16QAM) | 2 | 512 | 96 | 32 | 32 | 2 | 3394 | 3328 | 1680 | 1648 |
| 28 (QPSK) | 2 | 256 | 96 | 0 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 29 (16QAM) | 2 | 256 | 96 | 0 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 30 (QPSK) | 2 | 256 | 96 | 32 | 32 | 2 | 1970 | 1904 | 960 | 944 |
| 31 (16QAM) | 2 | 256 | 96 | 32 | 32 | 2 | 3906 | 3840 | 1936 | 1904 |
| 32 (QPSK) | 1 | 512 | 96 | 0 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 33 (16QAM) | 1 | 512 | 96 | 0 | 0 | 0 | 7808 | 7808 | 3904 | 3904 |
| 34 (QPSK) | 1 | 512 | 96 | 32 | 32 | 2 | 3394 | 3328 | 1680 | 1648 |
| 35 (16QAM) | 1 | 512 | 96 | 32 | 32 | 2 | 6754 | 6688 | 3376 | 3312 |
| 36 (QPSK) | 1 | 256 | 96 | 0 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 37 (16QAM) | 1 | 256 | 96 | 0 | 0 | 0 | 8832 | 8832 | 4416 | 4416 |
| 38 (QPSK) | 1 | 256 | 96 | 32 | 32 | 2 | 3906 | 3840 | 1936 | 1904 |
| 39 (16QAM) | 1 | 256 | 96 | 32 | 32 | 2 | 7778 | 7712 | 3888 | 3824 |
| 40 (QPSK) | 16 | 512 | 192 | 0 | 0 | 0 | 232 | 232 | 122 | 110 |
| 41 (16QAM) | 16 | 512 | 192 | 0 | 0 | 0 | 464 | 464 | 244 | 220 |
| 42 (QPSK) | 16 | 512 | 192 | 32 | 32 | 2 | 232 | 166 | 90 | 76 |
| 43 (16QAM) | 16 | 512 | 192 | 32 | 32 | 2 | 430 | 364 | 196 | 168 |
| 44 (QPSK) | 8 | 512 | 192 | 0 | 0 | 0 | 464 | 464 | 244 | 220 |
| 45 (16QAM) | 8 | 512 | 192 | 0 | 0 | 0 | 928 | 928 | 488 | 440 |

| slot format # | SF | Midamble Length (chips) | GP (chips) | N _{EUCCH1} (bits) | N _{EUCCH2} (bits) | N _{TPC} (bits) | Bits/slot | N _{data/slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|----|-------------------------|------------|----------------------------|----------------------------|-------------------------|-----------|-------------------------------|--|--|
| 46 (QPSK) | 8 | 512 | 192 | 32 | 32 | 2 | 430 | 364 | 196 | 168 |
| 47 (16QAM) | 8 | 512 | 192 | 32 | 32 | 2 | 826 | 760 | 408 | 352 |
| 48 (QPSK) | 4 | 512 | 192 | 0 | 0 | 0 | 928 | 928 | 488 | 440 |
| 49 (16QAM) | 4 | 512 | 192 | 0 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 50 (QPSK) | 4 | 512 | 192 | 32 | 32 | 2 | 826 | 760 | 408 | 352 |
| 51 (16QAM) | 4 | 512 | 192 | 32 | 32 | 2 | 1618 | 1552 | 832 | 720 |
| 52 (QPSK) | 2 | 512 | 192 | 0 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 53 (16QAM) | 2 | 512 | 192 | 0 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |
| 54 (QPSK) | 2 | 512 | 192 | 32 | 32 | 2 | 1618 | 1552 | 832 | 720 |
| 55 (16QAM) | 2 | 512 | 192 | 32 | 32 | 2 | 3202 | 3136 | 1680 | 1456 |
| 56 (QPSK) | 1 | 512 | 192 | 0 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |
| 57 (16QAM) | 1 | 512 | 192 | 0 | 0 | 0 | 7424 | 7424 | 3904 | 3520 |
| 58 (QPSK) | 1 | 512 | 192 | 32 | 32 | 2 | 3202 | 3136 | 1680 | 1456 |
| 59 (16QAM) | 1 | 512 | 192 | 32 | 32 | 2 | 6370 | 6304 | 3376 | 2928 |

5.3.14 E-DCH Random Access Uplink Control Channel (E-RUCCH)

The E-RUCCH is used to carry E-DCH-associated uplink control signalling when E-PUCH resources are not available. The characteristics of the E-RUCCH physical channel are identical to those of PRACH (see subclause 5.3.3).

Physical resources available for E-RUCCH are configured by higher layers. E-RUCCH may be mapped to the same physical resources that are assigned for PRACH.

5.3.15 E-DCH Absolute Grant Channel (E-AGCH)

The E-DCH Absolute Grant Channel (E-AGCH) is a downlink physical channel carrying the uplink E-DCH absolute grant control information. E-AGCH carries a TPC field (located immediately after the midamble and spread using SF16) which is used to control the E-PUCH power. Figure 17e illustrates the burst structure of the E-AGCH.

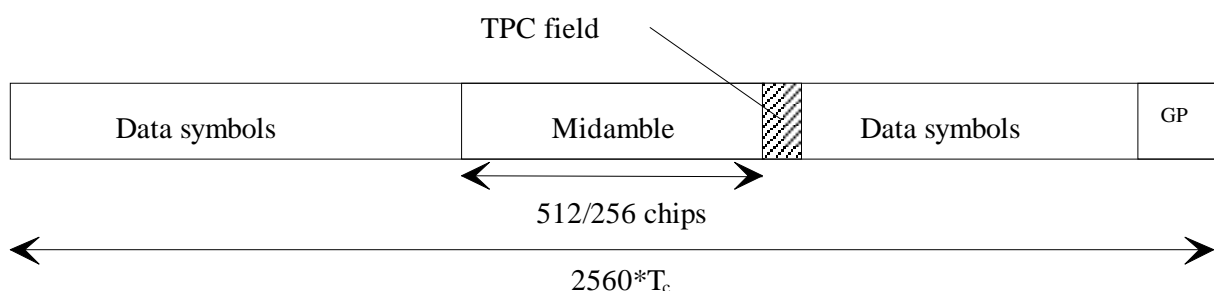


Figure 17e: Burst structure of E-AGCH

One E-DCH absolute grant for a UE shall be transmitted over one E-AGCH.

5.3.15.1 E-AGCH Spreading

The E-AGCH shall use spreading factor SF = 16, as described in 5.2.1.1.

5.3.15.2 E-AGCH Burst Types

Burst types 1 and 2 as described in subclause 5.2.2 can be used for E-AGCH. TPC shall be transmitted on E-AGCH whereas TFCI shall not be transmitted.

5.3.15.3 E-AGCH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the E-AGCH.

5.3.15.4 E-AGCH timeslot formats

The E-AGCH uses the timeslot formats of Table 7d. These augment downlink slot formats 0...19 of table 5a, see subclause 5.2.2.6.1.

Table 7d: Time slot formats for E-AGCH

| Slot Format # | SF | Midamble length (chips) | N_{TFCI} code word (bits) | N_{TPC} (bits) | Bits/slot | $N_{Data/Slot}$ (bits) | $N_{data/data}$ field (1) (bits) | $N_{data/data}$ field (2) (bits) |
|---------------|----|-------------------------|-----------------------------|------------------|-----------|------------------------|----------------------------------|----------------------------------|
| 20 | 16 | 512 | 0 | 2 | 244 | 242 | 122 | 120 |
| 21 | 16 | 256 | 0 | 2 | 276 | 274 | 138 | 136 |

5.3.16 E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH)

The E-DCH HARQ Acknowledgement indicator channel (E-HICH) is defined in terms of a SF16 downlink physical channel and a signature sequence. The E-HICH carries the uplink E-DCH hybrid ARQ acknowledgement indicator. Figure 17f illustrates the structure of the E-HICH.

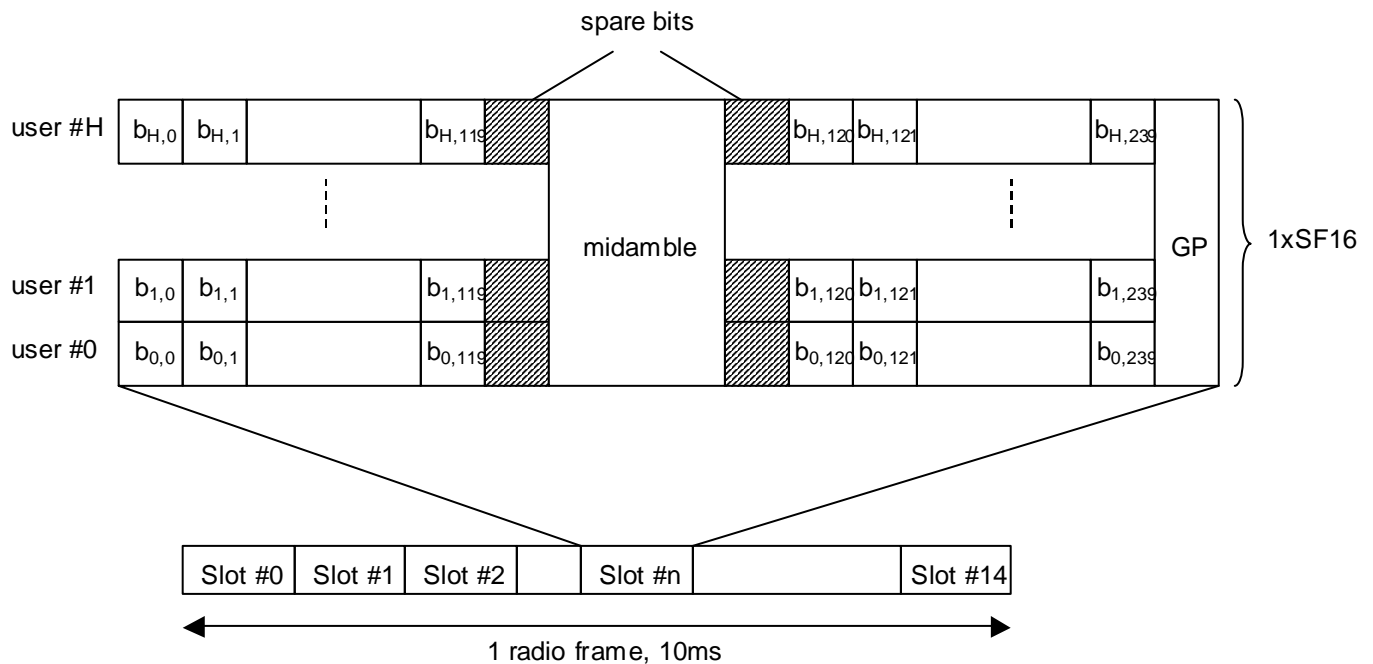


Figure 17f – E-HICH Structure

A single channelisation code may carry one or multiple signature sequences. Each signature sequence conveys a HARQ acknowledgement indicator. A maximum of one indicator may be transmitted to a UE. Each acknowledgement indicator is coded to form a signature sequence of 240 bits (b_0, b_1, \dots, b_{239}) as defined in [7] and is transmitted within a single E-HICH timeslot. The E-HICH also contains U spare bit locations, where $U=4$ for burst type 1 and $U=36$ for burst type 2. The spare bit values are not defined.

5.3.16.1 E-HICH Spreading

Signature sequences (including spare bits inserted) that share the same channelisation code are combined and spread using spreading factor SF=16 as described in [8].

5.3.16.2 E-HICH Burst Types

Burst types 1 and 2 as described in subclause 5.2.2 can be used for E-HICH. Neither TFCI nor TPC shall be transmitted on the E-HICH.

5.3.16.3 E-HICH Training Sequences

The training sequences as described in subclause 5.2.3 are used for the E-HICH.

5.4 Transmit Diversity for DL Physical Channels

Table 8 summarizes the different transmit diversity schemes for different downlink physical channel types that are described in [9].

Table 8: Application of Tx diversity schemes on downlink physical channel types
"X" – can be applied, "-" – must not be applied

| Physical channel type | Open loop Tx Diversity | | Closed loop Tx Diversity |
|-----------------------|------------------------|---------------------|--------------------------|
| | TSTD | SCTD ^(*) | |
| P-CCPCH | – | X | – |
| S-CCPCH | X ^(**) | X | -- |
| SCH | X | – | – |
| DPCH | – | – | X |
| PDSCH | – | X | X |
| PICH | – | X | – |
| MICH | – | X | – |
| HS-SCCH | -- | X | X |
| HS-PDSCH | -- | X | X |
| E-AGCH | -- | X | X |
| E-HICH | -- | X | -- |

(*) Note: SCTD may only be applied to physical channels when they are allocated to beacon locations.

(**) Note: TSTD may not be applied to S-CCPCH in beacon locations.

5.5 Beacon characteristics of physical channels

For the purpose of measurements, common physical channels that are allocated to particular locations (time slot, code) shall have particular physical characteristics, called beacon characteristics. Physical channels with beacon characteristics are called beacon channels. The locations of the beacon channels are called beacon locations. The ensemble of beacon channels shall provide the beacon function, i.e. a reference power level at the beacon locations, regularly existing in each radio frame. Thus, beacon channels must be present in each radio frame, the only exception is when idle periods are used to support time difference measurements for location services [9]. Then it may be possible that the beacon channels occur in the same frame and time slot as the idle periods. In this case, the beacon channels will not be transmitted in that particular frame and time slot.

5.5.1 Location of beacon channels

The beacon locations are determined by the SCH and depend on the SCH allocation case, see subclause 5.3.4:

- Case 1) The beacon function shall be provided by the physical channels that are allocated to channelisation code $c_{Q=16}^{(k=1)}$ and to TS#k, k=0,...,14.

- Case 2) The beacon function shall be provided by the physical channels that are allocated to channelisation code $c_{Q=16}^{(k=1)}$ and to TS#k and TS#k+8, k=0,...,6.

Note that by this definition the P-CCPCH always has beacon characteristics.

5.5.2 Physical characteristics of beacon channels

The beacon channels shall have the following physical characteristics. They:

- are transmitted with reference power;
- are transmitted without beamforming;
- use burst type 1;
- use midamble $m^{(1)}$ and $m^{(2)}$ exclusively in this time slot; and
- midambles $m^{(9)}$ and $m^{(10)}$ are always left unused in this time slot, if 16 midambles are allowed in that cell.

Note that in the time slot where the P-CCPCH is transmitted only the midambles $m^{(1)}$ to $m^{(8)}$ shall be used, see 5.6.1. Thus, midambles $m^{(9)}$ and $m^{(10)}$ are always left unused in this time slot.

The reference power corresponds to the sum of the power allocated to both midambles $m^{(1)}$ and $m^{(2)}$. Two possibilities exist:

- If SCTD antenna diversity is not applied to beacon channels all the reference power of any beacon channel is allocated to $m^{(1)}$.
- If SCTD antenna diversity is applied to beacon channels, for any beacon channel midambles $m^{(1)}$ and $m^{(2)}$ are each allocated half of the reference power.

5.6 Midamble Allocation for Physical Channels

Midambles are part of the physical channel configuration which is performed by higher layers. Three different midamble allocation schemes exist:

- UE specific midamble allocation: A UE specific midamble for DL or UL is explicitly assigned by higher layers.
- Default midamble allocation: The midamble for DL or UL is allocated by layer 1 depending on the associated channelisation code.
- Common midamble allocation: The midamble for the DL is allocated by layer 1 depending on the number of channelisation codes currently being present in the DL time slot.

If a midamble is not explicitly assigned and the use of the common midamble allocation scheme is not signalled by higher layers, the midamble shall be allocated by layer 1, based on the default midamble allocation scheme. This default midamble allocation scheme is given by a fixed association between midambles and channelisation codes, see clause A.3, and shall be applied individually to all channelisation codes within one time slot. Different associations apply for different burst types and cell configurations with respect to the maximum number of midambles.

5.6.1 Midamble Allocation for DL Physical Channels

Beacon channels shall always use the reserved midambles $m^{(1)}$ and $m^{(2)}$, see 5.5. For DL physical channels that are located in the same time slot as the P-CCPCH, midambles shall be allocated based on the default midamble allocation scheme, using the association for burst type 1 and $K_{\text{Cell}}=8$ midambles. For all other DL physical channels, the midamble is explicitly assigned by higher layers or allocated by layer 1.

5.6.1.1 Midamble Allocation by signalling from higher layers

UE specific midambles may be signalled by higher layers to UE's as a part of the physical channel configuration, if:

- multiple UEs use the physical channels in one DL time slot; and

- beamforming is applied to all of these DL physical channels; and
- no closed loop TxDiversity is applied to any of these DL physical channels;

or

- PDSCH physical layer signalling based on the midamble is used.

5.6.1.2 Midamble Allocation by layer 1

5.6.1.2.1 Default midamble

If a midamble is not explicitly assigned and the use of the common midamble allocation scheme is not signalled by higher layers, the UE shall derive the midambles from the allocated channelisation codes and shall use an individual midamble for each channelisation code group containing one primary and a set of secondary channelisation codes. The association between midambles and channelisation code groups is given in annex A.3. All the secondary channelisation codes within a set use the same midamble as the primary channelisation code to which they are associated.

Higher layers shall allocate the channelisation codes in a particular order. Secondary codes shall only be allocated if the associated primary code is also allocated. If midambles are reserved for the beacon channels, all primary and secondary channelisation codes that are associated with the reserved midambles shall not be used.

Channelisation codes of one channelisation code group shall not be allocated to different UE"s.

In the case that secondary channelisation codes are used, secondary channelisation codes of one channelisation code group shall be allocated in ascending order, with respect to their numbering, and beginning with the lowest code index in this channelisation code group.

The UE shall assume different channel estimates for each of the individual midambles.

The default midamble allocation shall not apply for those downlink channels that are intended for a UE which will be the only UE assigned to a given time slot or slots for the duration of the assigned channel's existence (as in the case of high rate services).

5.6.1.2.2 Common Midamble

The use of the common midamble allocation scheme is signalled to the UE by higher layers as a part of the physical channel configuration. A common midamble may be assigned by layer 1 to all physical channels in one DL time slot, if:

- a single UE uses all physical channels in one DL time slot (as in the case of high rate service);

or

- multiple UEs use the physical channels in one DL time slot; and
- no beamforming is applied to any of these DL physical channels; and
- no closed loop TxDiversity is applied to any of these DL physical channels; and
- midambles are not used for PDSCH physical layer signalling.

The number of channelisation codes currently employed in the DL time slot is associated with the use of a particular common midamble. Different associations apply for different burst types and cell configurations with respect to the maximum number of midambles, see annex B.

5.6.2 Midamble Allocation for UL Physical Channels

If the midamble is explicitly assigned by higher layers, an individual midamble shall be assigned to all UE"s in one UL time slot.

If no midamble is explicitly assigned by higher layers, the UE shall derive the midamble from the channelisation code that is used for the data part (except for TFCI/TPC) of the burst. Note that in the event that code hopping is employed the midamble is derived from the channelisation code actually transmitted (i.e. the code used after the hop sequence has

been applied – see [9]). The associations between midamble and channelisation code are the same as for DL physical channels.

5.7 Midamble Transmit Power

There shall be no offset between the sum of the powers allocated to all midambles in a timeslot and the sum of the powers allocated to the data symbol fields. The transmit power within a timeslot is hence constant.

The midamble transmit power of beacon channels is equal to the reference power. If SCTD is used for beacon channels, the reference power is equally divided between the midambles $m^{(1)}$ and $m^{(2)}$.

The midamble transmit power of all other physical channels depends on the midamble allocation scheme used. The following rules apply

- In case of Default Midamble Allocation, every midamble is transmitted with the same power as the associated codes.
- In case of Common Midamble Allocation in the downlink, the transmit power of this common midamble is such that there is no power offset between the data parts and the midamble part of the overall transmit signal within one time slot.
- In case of UE Specific Midamble Allocation, the transmit power of the UE specific midamble is such that there is no power offset between the data parts and the midamble part of every user within one time slot.

The following figure 18 depicts the midamble powers for the different channel types and midamble allocation schemes.

Note 1: In figure 18, the codes $c(1)$ to $c(16)$ represent the set of usable codes and not the set of used codes.

Note 2: The common midamble allocation and the midamble allocation by higher layers are not applicable in those beacon time slots, in which the P-CCPCH is located, see section 5.6.1.

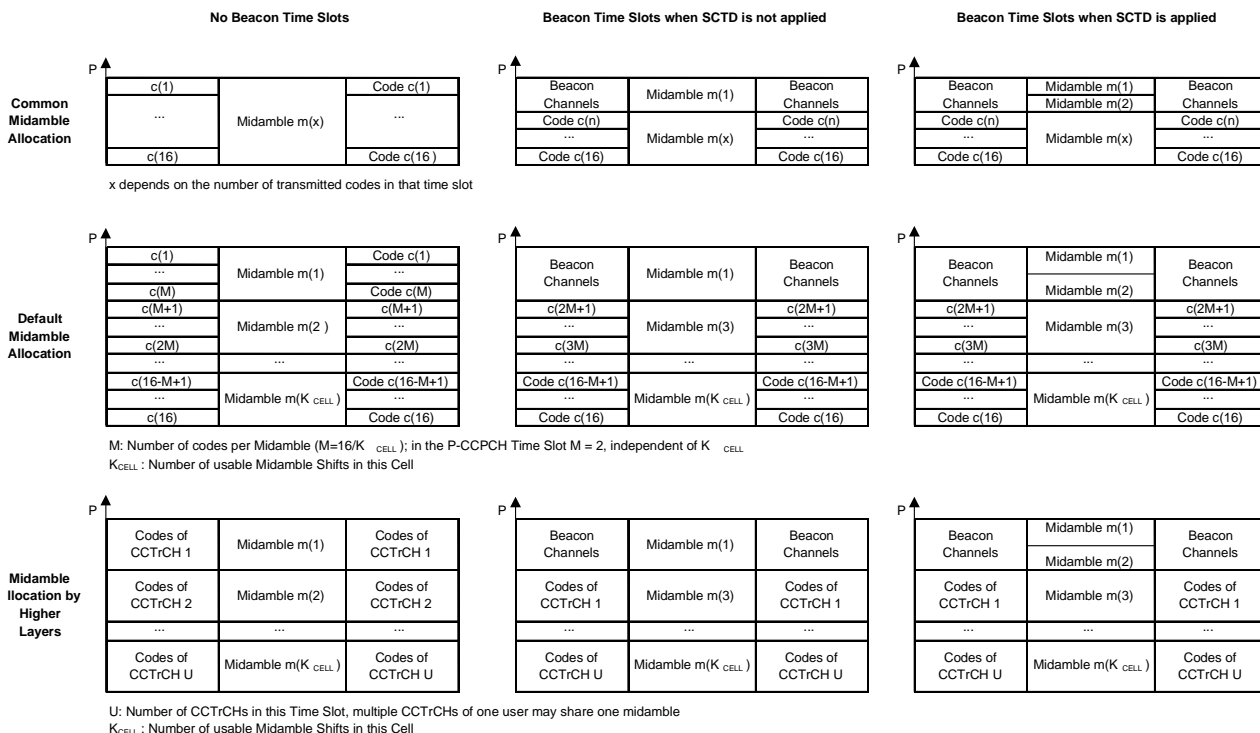


Figure 18: Midamble powers for the different midamble allocation schemes

5A Physical channels for the 1.28 Mcps option

All physical channels take three-layer structure with respect to timeslots, radio frames and system frame numbering (SFN), see [14]. Depending on the resource allocation, the configuration of radio frames or timeslots becomes different. All physical channels need guard symbols in every timeslot. The time slots are used in the sense of a TDMA component to separate different user signals in the time and the code domain. The physical channel signal format for 1.28Mcps TDD is presented in figure 18A.

A physical channel in TDD is a burst, which is transmitted in a particular timeslot within allocated Radio Frames. The allocation can be continuous, i.e. the time slot in every frame is allocated to the physical channel or discontinuous, i.e. the time slot in a subset of all frames is allocated only. A burst is the combination of a data part, a midamble and a guard period. The duration of a burst is one time slot. Several bursts can be transmitted at the same time from one transmitter. In this case, the data part must use different OVSF channelisation codes, but the same scrambling code. The midamble part has to use the same basic midamble code, but can use different midambles.

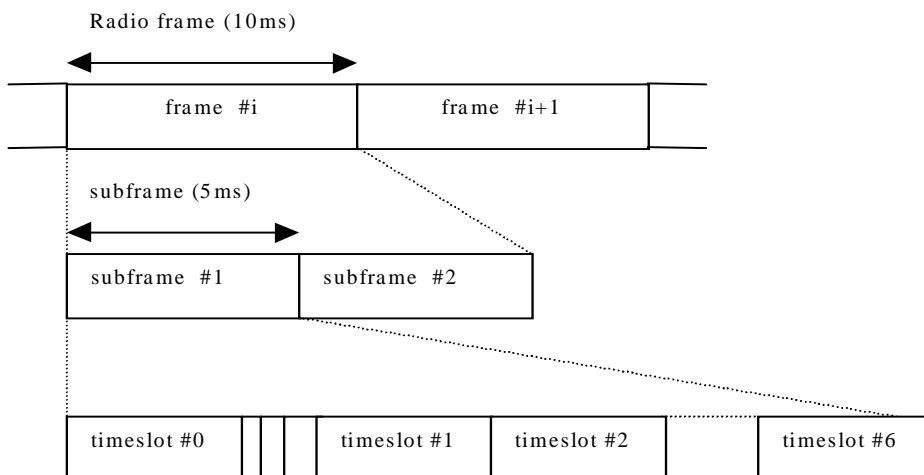


Figure 18A: Physical channel signal format for 1.28Mcps TDD option

The data part of the burst is spread with a combination of channelisation code and scrambling code. The channelisation code is a OVSF code, that can have a spreading factor of 1, 2, 4, 8, or 16. The data rate of the physical channel is depending on the used spreading factor of the used OVSF code.

So a physical channel is defined by frequency, timeslot, channelisation code, burst type and Radio Frame allocation. The scrambling code and the basic midamble code are broadcast and may be constant within a cell. When a physical channel is established, a start frame is given. The physical channels can either be of infinite duration, or a duration for the allocation can be defined.

5A.1 Frame structure

The TDMA frame has a duration of 10 ms and is divided into 2 sub-frames of 5ms. The frame structure for each sub-frame in the 10ms frame length is the same.

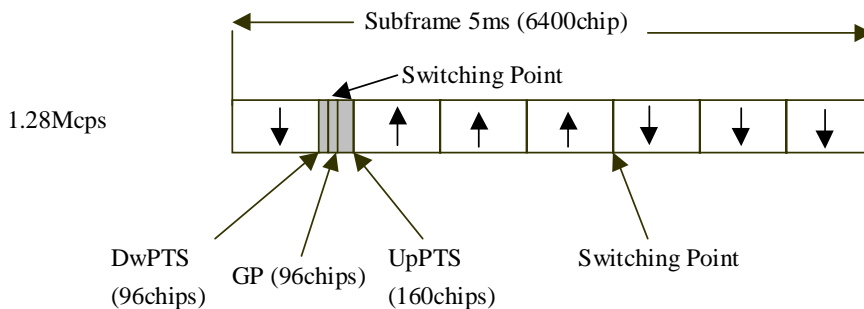


Figure 18B: Structure of the sub-frame for 1.28Mcps TDD option

Time slot#n (n from 0 to 6): the nth traffic time slot, 864 chips duration;

DwPTS: downlink pilot time slot, 96 chips duration;

UpPTS: uplink pilot time slot, 160 chips duration;

GP: main guard period for TDD operation, 96 chips duration;

In Figure 18B, the total number of traffic time slots for uplink and downlink is 7, and the length for each traffic time slot is 864 chips duration. Among the 7 traffic time slots, time slot#0 is always allocated as downlink while time slot#1 is always allocated as uplink. The time slots for the uplink and the downlink are separated by switching points. Between the downlink time slots and uplink time slots, the special period is the switching point to separate the uplink and downlink. In each sub-frame of 5ms for 1.28Mcps option, there are two switching points (uplink to downlink and vice versa).

Using the above frame structure, the 1.28Mcps TDD option can operate on both symmetric and asymmetric mode by properly configuring the number of downlink and uplink time slots. In any configuration at least one time slot (time slot#0) has to be allocated for the downlink and at least one time slot has to be allocated for the uplink (time slot#1).

Examples for symmetric and asymmetric UL/DL allocations are given in figure 18C.

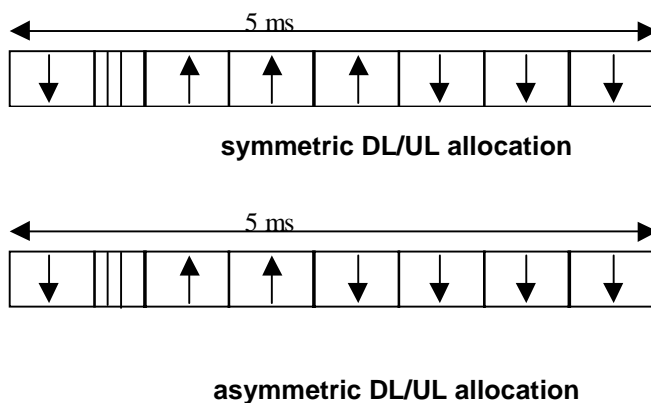


Figure 18C: 1.28Mcps TDD sub-frame structure examples

5A.2 Dedicated physical channel (DPCH)

The DCH as described in subclause 4.1.1 'Dedicated transport channels' is mapped onto the dedicated physical channel.

5A.2.1 Spreading

The spreading of physical channels is the same as in 3.84 Mcps TDD (cf. 5.2.1 'Spreading').

5A.2.2 Burst Format

A traffic burst consists of two data symbol fields, a midamble of 144 chips and a guard period. The data fields of the burst are 352 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 8A below. The guard period is 16 chip periods long.

The burst format is shown in Figure 18D. The contents of the traffic burst fields is described in table 8B.

Table 8A: number of symbols per data field in a traffic burst

| Spreading factor (Q) | Number of symbols (N) per data field in Burst |
|----------------------|---|
| 1 | 352 |
| 2 | 176 |
| 4 | 88 |
| 8 | 44 |
| 16 | 22 |

Table 8B: The contents of the traffic burst format fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | Contents of field |
|------------------|--------------------------|----------------------------|-------------------|
| 0-351 | 352 | cf table 8A | Data symbols |
| 352-495 | 144 | - | Midamble |
| 496-847 | 352 | cf table 8A | Data symbols |
| 848-863 | 16 | - | Guard period |

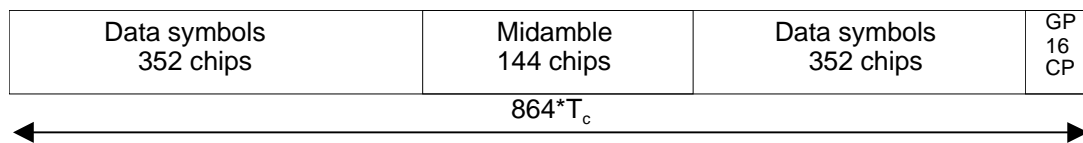


Figure 18D: Burst structure of the traffic burst format (GP denotes the guard period and CP the chip periods)

5A.2.2.1 Transmission of TFCI

The traffic burst format provides the possibility for transmission of TFCI in uplink and downlink.

The transmission of TFCI is configured by higher Layers. For each CCTrCH it is indicated by higher layer signalling, which TFCI format is applied. Additionally for each allocated timeslot it is signalled individually whether that timeslot carries the TFCI or not. The TFCI is always present in the first timeslot in a radio frame for each CCTrCH. If a time slot contains the TFCI, then it is always transmitted using the physical channel with the lowest physical channel sequence number (p) in that timeslot. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

The transmission of TFCI is done in the data parts of the respective physical channel, this means that TFCI code word bits and data bits are subject to the same spreading procedure as depicted in [8]. Hence the midamble structure and length is not changed.

The TFCI code word bits are equally distributed between the two subframes and the respective data fields. The TFCI code word is to be transmitted possibly either directly adjacent to the midamble or after the SS and TPC symbols. Figure 18E shows the position of the TFCI code word in a traffic burst, if neither SS nor TPC are transmitted. Figure 18F shows the position of the TFCI code word in a traffic burst, if SS and TPC are transmitted.

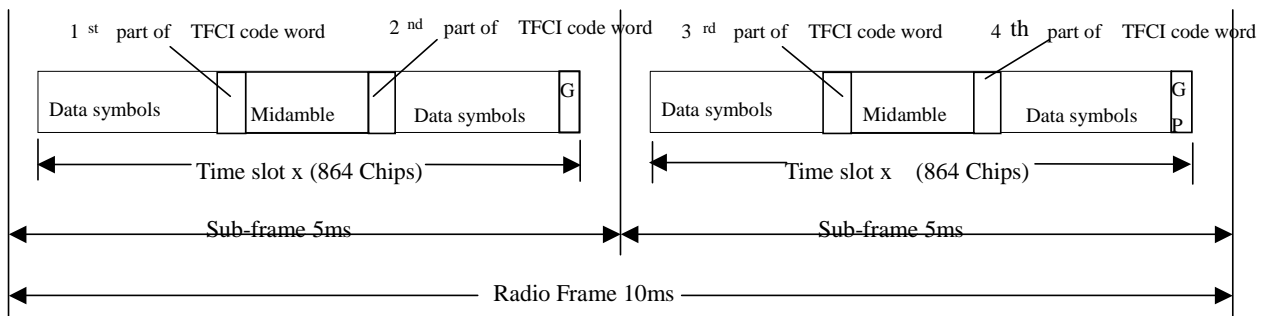


Figure 18E: Position of the TFCI code word in the traffic burst in case of no TPC and SS in 1.28 Mcps TDD

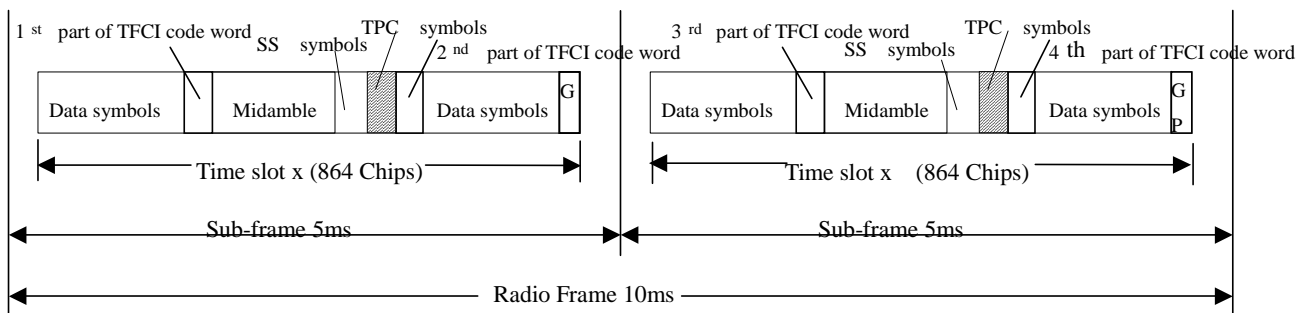


Figure 18F: Position of the TFCI code word in the traffic burst in case of TPC and SS in 1.28 Mcps TDD

5A.2.2.2 Transmission of TPC

In this section, transmission of TPC over dedicated physical channels is described. Optionally, UTRAN may configure some UL CCTrCH"s to be controlled via TPC commands on PLCCCH (for example in the case of HS-DSCH operation without an associated downlink DPCH). PLCCCH is described in section 5A.3.13.

Within the context of this subclause, only those TPC commands not borne by PLCCCH (in the DL case) nor by PLCCCH-controlled physical channels (in the UL case) are considered. That is to say that those UL timeslot/CCTrCH pairs controlled by PLCCCH and those DL TPC commands mapped to PLCCCH are excluded from consideration when deriving the mapping between UL/DL TPC commands and the UL/DL CCTrCH"s they control. The association between PLCCCH and UL timeslot/CCTrCH pair(s) is signalled by higher layers.

The burst type for dedicated channels provides the possibility for transmission of TPC in uplink and downlink.

The transmission of TPC is done in the data parts of the traffic burst. Hence the midamble structure and length is not changed. The TPC information is to be transmitted directly after the SS information, which is transmitted after the midamble. Figure 18G shows the position of the TPC command in a traffic burst.

For every user the TPC information is to be transmitted at least once per 5ms sub-frame. For each allocated timeslot it is signalled individually whether that timeslot carries TPC information or not. If applied in a timeslot, transmission of TPC symbols is done in the data parts of the traffic burst and they are transmitted using the physical channel with the lowest physical channel sequence number (*p*) in that timeslot. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

TPC symbols may also be transmitted on more than one physical channel in a time slot. For this purpose, higher layers allocate an additional number of N_{TPC} physical channels, individually for each time slot. The TPC symbols shall then be transmitted using the physical channels with the $N_{TPC}+1$ lowest physical channel sequence numbers (*p*) in that time slot. Physical channel sequence numbering is determined by the rate matching function and is described in [7]. If the rate matching function results in $N_{RM} < N_{TPC}+1$ remaining physical channels in this time slot, TPC symbols shall be transmitted only on the N_{RM} remaining physical channels.

The TPC symbols are spread with the same spreading factor (SF) and spreading code as the data parts of the respective physical channel.

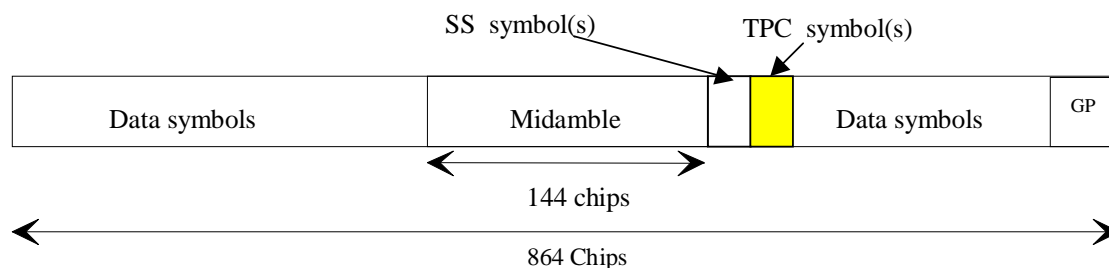


Figure 18G: Position of TPC information in the traffic burst in downlink and uplink

For the number of TPC symbols per time slot there are 3 possibilities, that can be configured by higher layers, individually for each timeslot:

- 1) one TPC symbol
- 2) no TPC symbols
- 3) 16/SF TPC symbols

So, in case 3), when SF=1, there are 16 TPC symbols which correspond to 32 bits (for QPSK) and 48 bits (for 8PSK).

In the following the uplink is described only. For the description of the downlink, downlink (DL) and uplink (UL) have to be interchanged.

Each of the TPC symbols for uplink power control in the DL will be associated with an UL time slot and an UL CCTrCH pair. This association varies with

- the number of allocated UL time slots and UL CCTrCHs on these time slots (time slot and CCTrCH pair) and
- the allocated TPC symbols in the DL.

In case a UE has

- more than one channelisation code

and/or

- channelisation codes being of lower spreading factor than 16 and using 16/SF SS and 16/SF TPC symbols,

the TPC commands for each ULtime slot CCTrCH pair (all channelisation codes on that time slot belonging to the same time slot and CCTrCH pair have the same TPC command) will be distributed to the following rules:

1. The ULtime slots and CCTrCH pairs the TPC commands are intended for will be numbered from the first to the last ULtime slot and CCTrCH pair allocated to the regarded UE (starting with 0). The number of a time slot and CCTrCH pair is smaller than the number of another time slot and CCTrCH pair within the same time slot if its spreading code with the lowest SC number according to the following table has a lower SC number than the spreading code with the lowest SC number of the other time slot and CCTrCH pair.
2. The commanding TPC symbols on all DL CCTrCHs allocated to one UE are numbered consecutively starting with zero according to the following rules:
 - a) The numbers of the TPC commands of a regarded DL time slot are lower than those of DL time slots being transmitted after that time slot
 - b) Within a DL time slot the numbers of the TPC commands of a regarded channelisation code are lower than those of channelisation codes having a higher spreading code number

The spreading code number is defined by the following table (see[8]):

| SC number | SF (Q) | Walsh code number (k) |
|-----------|--------|-----------------------|
| 0 | 16 | $c_{Q=16}^{(k=1)}$ |
| | ... | |
| 15 | 16 | $c_{Q=16}^{(k=16)}$ |
| 16 | 8 | $c_{Q=8}^{(k=1)}$ |
| | ... | |
| 23 | 8 | $c_{Q=8}^{(k=8)}$ |
| 24 | 4 | $c_{Q=4}^{(k=1)}$ |
| | ... | |
| 27 | 4 | $c_{Q=4}^{(k=4)}$ |
| 28 | 2 | $c_{Q=2}^{(k=1)}$ |
| 29 | 2 | $c_{Q=2}^{(k=2)}$ |
| 30 | 1 | $c_{Q=1}^{(k=1)}$ |

Note: Spreading factors 2-8 are not used in DL

- c) Within a channelisation code numbers of the TPC commands are lower than those of TPC commands being transmitted after that time

The following equation is used to determine the UL time slot which is controlled by the regarded TPC symbol in the DL:

$$UL_{pos} = (SFN \cdot N_{UL_TPCsymbols} + TPC_{DLpos} + ((SFN \cdot N_{UL_TPCsymbols} + TPC_{DLpos}) \text{div}(N_{ULslot}))) \text{mod}(N_{ULslot}),$$

where

UL_{pos} is the number of the controlled uplink time slot and CCTrCH pairs.

SFN" is the system frame number counting the sub-frames. The system frame number of the radio frames (SFN) can be derived from SFN" by

$SFN = SFN" \text{ div } 2$, where div is the remainder free division operation.

$N_{UL_PCsymbols}$ is the number of UL TPC symbols in a sub-frame (excluding those on PLCCCH-controlled resources).

TPC_{DLpos} is the number of the regarded UL TPC symbol in the DL within the sub-frame.

N_{ULslot} is the number of UL slots and CCTrCH pairs in a sub-frame (excluding those associated with PLCCCH).

When one of the above parameters is changed due to higher layer reconfiguration, the new relationship between TPC symbols and controlled UL time slots shall be valid, beginning with the radio frame, for which the new parameters are set.

In Annex CB two examples of the association of TPC commands to time slots and CCTrCH pairs are shown.

Coding of TPC:

The relationship between the TPC Bits and the transmitter power control command for QPSK is the same as in the 3.84Mcps TDD cf. [5.2.2.5 "Transmission of TPC"].

The relationship between the TPC Bits and the transmitter power control command for 8PSK is given in table 8C

Table 8C: TPC Bit Pattern for 8PSK

| TPC Bits | TPC command | Meaning |
|----------|-------------|-------------------|
| 000 | 'Down' | Decrease Tx Power |
| 110 | 'Up' | Increase Tx Power |

5A.2.2.3 Transmission of SS

In this section, transmission of SS over dedicated physical channels is described. Optionally, UTRAN may configure some UL CCTrCH"s to be controlled via SS commands on PLCCCH (for example in the case of HS-DSCH operation without an associated downlink DPCH). PLCCCH is described in section 5A.3.13.

Within the context of this subclause, only those SS commands not borne by PLCCCH are considered. That is to say that those UL timeslots controlled exclusively by PLCCCH and those SS commands carried by PLCCCH are excluded from consideration when deriving the mapping between DL SS commands and the UL timeslots they control. The association between PLCCCH and UL timeslot/CCTrCH pair(s) is signalled by higher layers.

The burst type for dedicated channels provides the possibility for transmission of uplink synchronisation control (ULSC).

The transmission of ULSC is done in the data parts of the traffic burst. Hence the midamble structure and length is not changed. The ULSC information is to be transmitted directly after the midamble. Figure 18H shows the position of the SS command in a traffic burst.

For every user the ULSC information shall be transmitted at least once per transmitted sub-frame.

For each allocated timeslot it is signalled individually whether that timeslot carries ULSC information or not. If applied in a time slot, transmission of SS symbols is done in the data parts of the traffic burst and they are transmitted using the physical channel with the lowest physical channel sequence number (*p*) in that timeslot. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

SS symbols may also be transmitted on more than one physical channel in a time slot. For this purpose, higher layers allocate an additional number of N_{SS} physical channels, individually for each time slot. The SS symbols shall then be transmitted using the physical channels with the $N_{SS}+1$ lowest physical channel sequence numbers (*p*) in that time slot. Physical channel sequence numbering is determined by the rate matching function and is described in [7]. If the rate matching function results in $N_{RM} < N_{SS}+1$ remaining physical channels in this time slot, SS symbols shall be transmitted only on the N_{RM} remaining physical channels.

The SS symbols are spread with the same spreading factor (SF) and spreading code as the data parts of the respective physical channel.

The SS is utilised to command a timing adjustment by $(k/8) T_c$ each *M* sub-frames, where T_c is the chip period. The *k* and *M* values are signalled by the network. The SS, as one of *L1* signals, is to be transmitted once per 5ms sub-frame.

M (1-8) and *k* (1-8) can be adjusted during call setup or readjusted during the call.

Note: The smallest step for the SS signalled by the UTRAN is $1/8 T_c$. For the UE capabilities regarding the SS adjustment of the UE it is suggested to set the tolerance for the executed command to be $[1/9;1/7] T_c$.

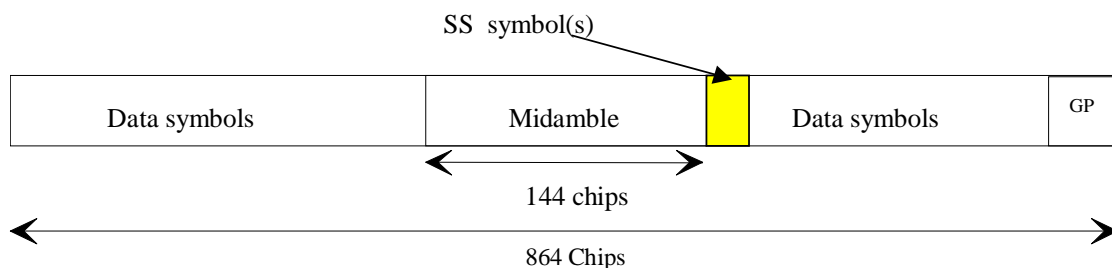


Figure 18H: Position of ULSC information in the traffic burst (downlink and uplink)

Note that for the uplink where there is no SS symbol used, the SS symbol space is reserved for future use. This can keep UL and DL slots the same structure.

For the number of SS symbols per time slot there are 3 possibilities, that can be configured by higher layers individually for each time slot:

- one SS symbol
- no SS symbol
- 16/SF SS symbols

So, in case 3, when SF=1, there are 16 SS symbols which correspond to 32 bits (for QPSK) and 48 bits (for 8PSK).

Each of the SS symbols in the DL will be associated with an UL time slot depending on the allocated UL time slots and the allocated SS symbols in the DL.

Note: Even though the different time slots of the UE are controlled with independent SS commands, the UE is not in need to execute SS commands leading to a deviation of more than [3] chip with respect to the average timing advance applied by the UE.

The synchronisation shift commands for each UL time slot (all channelisation codes on that time slot have the same SS command) will be distributed to the following rules:

1. The UL time slots the SS commands are intended for will be numbered from the first to the last UL time slot occupied by the regarded UE (starting with 0) considering all CCTrCHs allocated to that UE.
2. The commanding SS symbols on all downlink CCTrCHs allocated to one UE are numbered consecutively starting with zero according to the following rules:
 - a) The numbers of the SS commands of a regarded DL time slot are lower than those of DL time slots being transmitted after that time slot
 - b) Within a DL time slot the numbers of the SS commands of a regarded channelisation code are lower than those of channelisation codes having a bigger spreading code number

The spreading code number is defined by the following table: (see TS 25.223)

| Spreading code number | SF (Q) | Walsh code number (k) |
|-----------------------|--|-----------------------|
| 0 | 16 | $c_{Q=16}^{(k=1)}$ |
| | ... | |
| 15 | 16 | $c_{Q=16}^{(k=16)}$ |
| | Spreading factors 2-8 are not used in DL | |
| 30 | 1 | $c_{Q=1}^{(k=1)}$ |

- c) Within a channelisation code numbers of the SS commands are lower than those of SS commands being transmitted after that time

The following equation is used to determine the UL time slot which is controlled by the regarded SS symbol:

$$UL_{pos} = (SFN \cdot N_{SSymbols} + SS_{pos} + ((SFN \cdot N_{SSymbols} + SS_{pos}) \div N_{ULslot})) \bmod(N_{ULslot}),$$

where

UL_{pos} is the number of the controlled uplink time slot.

SFN'' is the system frame number counting the sub-frames. The system frame number of the radio frames (SFN) can be derived from SFN'' by

$SFN = SFN'' \text{ div } 2$, where div is the remainder free division operation.

$N_{SS_{symbols}}$ is the number of SS symbols in a sub-frame (excluding those associated with PLCCH).

SS_{pos} is the number of the regarded SS symbol within the sub-frame.

$N_{UL_{slot}}$ is the number of UL slots in a sub-frame (excluding those slots exclusively controlled by PLCCH).

When one of the above parameters is changed due to higher layer reconfiguration, the new relationship between SS symbols and controlled UL time slots shall be valid, beginning with the radio frame, for which the new parameters are set.

The relationship between the SS Bits and the SS command for QPSK is the given in table 8D:

Table 8D: Coding of the SS for QPSK

| SS Bits | SS command | Meaning |
|---------|--------------|---|
| 00 | 'Down' | Decrease synchronisation shift by $k/8 T_c$ |
| 11 | 'Up' | Increase synchronisation shift by $k/8 T_c$ |
| 01 | "Do nothing" | No change |

The relationship between the SS Bits and the SS command for 8PSK is given in table 8E:

Table 8E: Coding of the SS for 8PSK

| SS Bits | SS command | Meaning |
|---------|--------------|---|
| 000 | 'Down' | Decrease synchronisation shift by $k/8 T_c$ |
| 110 | 'Up' | Increase synchronisation shift by $k/8 T_c$ |
| 011 | "Do nothing" | No change |

5A.2.2.4 Timeslot formats

The timeslot format depends on the spreading factor, the number of the TFCI code word bits, the number of SS and TPC symbols and the applied modulation scheme (QPSK/8PSK) as depicted in the following tables.

5A.2.2.4.1 Timeslot formats for QPSK

5A.2.2.4.1.1 Downlink timeslot formats

Table 8F : Time slot formats for the Downlink

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | N _{SS} & N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|------------------------------------|---|-----------|-------------------------------|--|--|
| 0 | 16 | 144 | 0 | 0 & 0 | 88 | 88 | 44 | 44 |
| 1 | 16 | 144 | 4 | 0 & 0 | 88 | 86 | 42 | 44 |
| 2 | 16 | 144 | 8 | 0 & 0 | 88 | 84 | 42 | 42 |
| 3 | 16 | 144 | 16 | 0 & 0 | 88 | 80 | 40 | 40 |
| 4 | 16 | 144 | 32 | 0 & 0 | 88 | 72 | 36 | 36 |
| 5 | 16 | 144 | 0 | 2 & 2 | 88 | 84 | 44 | 40 |
| 6 | 16 | 144 | 4 | 2 & 2 | 88 | 82 | 42 | 40 |
| 7 | 16 | 144 | 8 | 2 & 2 | 88 | 80 | 42 | 38 |
| 8 | 16 | 144 | 16 | 2 & 2 | 88 | 76 | 40 | 36 |
| 9 | 16 | 144 | 32 | 2 & 2 | 88 | 68 | 36 | 32 |
| 10 | 1 | 144 | 0 | 0 & 0 | 1408 | 1408 | 704 | 704 |
| 11 | 1 | 144 | 4 | 0 & 0 | 1408 | 1406 | 702 | 704 |
| 12 | 1 | 144 | 8 | 0 & 0 | 1408 | 1404 | 702 | 702 |
| 13 | 1 | 144 | 16 | 0 & 0 | 1408 | 1400 | 700 | 700 |
| 14 | 1 | 144 | 32 | 0 & 0 | 1408 | 1392 | 696 | 696 |
| 15 | 1 | 144 | 0 | 2 & 2 | 1408 | 1404 | 704 | 700 |
| 16 | 1 | 144 | 4 | 2 & 2 | 1408 | 1402 | 702 | 700 |
| 17 | 1 | 144 | 8 | 2 & 2 | 1408 | 1400 | 702 | 698 |
| 18 | 1 | 144 | 16 | 2 & 2 | 1408 | 1396 | 700 | 696 |
| 19 | 1 | 144 | 32 | 2 & 2 | 1408 | 1388 | 696 | 692 |
| 20 | 1 | 144 | 0 | 32 & 32 | 1408 | 1344 | 704 | 640 |
| 21 | 1 | 144 | 4 | 32 & 32 | 1408 | 1342 | 702 | 640 |
| 22 | 1 | 144 | 8 | 32 & 32 | 1408 | 1340 | 702 | 638 |
| 23 | 1 | 144 | 16 | 32 & 32 | 1408 | 1336 | 700 | 636 |
| 24 | 1 | 144 | 32 | 32 & 32 | 1408 | 1328 | 696 | 632 |

5A.2.2.4.1.2

Uplink timeslot formats

Table 8G : Time slot formats for the Uplink

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | N _{SS} & N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|------------------------------------|---|-----------|-------------------------------|--|--|
| 0 | 16 | 144 | 0 | 0 & 0 | 88 | 88 | 44 | 44 |
| 1 | 16 | 144 | 4 | 0 & 0 | 88 | 86 | 42 | 44 |
| 2 | 16 | 144 | 8 | 0 & 0 | 88 | 84 | 42 | 42 |
| 3 | 16 | 144 | 16 | 0 & 0 | 88 | 80 | 40 | 40 |
| 4 | 16 | 144 | 32 | 0 & 0 | 88 | 72 | 36 | 36 |
| 5 | 16 | 144 | 0 | 2 & 2 | 88 | 84 | 44 | 40 |
| 6 | 16 | 144 | 4 | 2 & 2 | 88 | 82 | 42 | 40 |
| 7 | 16 | 144 | 8 | 2 & 2 | 88 | 80 | 42 | 38 |
| 8 | 16 | 144 | 16 | 2 & 2 | 88 | 76 | 40 | 36 |
| 9 | 16 | 144 | 32 | 2 & 2 | 88 | 68 | 36 | 32 |
| 10 | 8 | 144 | 0 | 0 & 0 | 176 | 176 | 88 | 88 |
| 11 | 8 | 144 | 4 | 0 & 0 | 176 | 174 | 86 | 88 |
| 12 | 8 | 144 | 8 | 0 & 0 | 176 | 172 | 86 | 86 |
| 13 | 8 | 144 | 16 | 0 & 0 | 176 | 168 | 84 | 84 |
| 14 | 8 | 144 | 32 | 0 & 0 | 176 | 160 | 80 | 80 |
| 15 | 8 | 144 | 0 | 2 & 2 | 176 | 172 | 88 | 84 |
| 16 | 8 | 144 | 4 | 2 & 2 | 176 | 170 | 86 | 84 |
| 17 | 8 | 144 | 8 | 2 & 2 | 176 | 168 | 86 | 82 |
| 18 | 8 | 144 | 16 | 2 & 2 | 176 | 164 | 84 | 80 |
| 19 | 8 | 144 | 32 | 2 & 2 | 176 | 156 | 80 | 76 |
| 20 | 8 | 144 | 0 | 4 & 4 | 176 | 168 | 88 | 80 |
| 21 | 8 | 144 | 4 | 4 & 4 | 176 | 166 | 86 | 80 |
| 22 | 8 | 144 | 8 | 4 & 4 | 176 | 164 | 86 | 78 |
| 23 | 8 | 144 | 16 | 4 & 4 | 176 | 160 | 84 | 76 |
| 24 | 8 | 144 | 32 | 4 & 4 | 176 | 152 | 80 | 72 |
| 25 | 4 | 144 | 0 | 0 & 0 | 352 | 352 | 176 | 176 |
| 26 | 4 | 144 | 4 | 0 & 0 | 352 | 350 | 174 | 176 |
| 27 | 4 | 144 | 8 | 0 & 0 | 352 | 348 | 174 | 174 |
| 28 | 4 | 144 | 16 | 0 & 0 | 352 | 344 | 172 | 172 |
| 29 | 4 | 144 | 32 | 0 & 0 | 352 | 336 | 168 | 168 |
| 30 | 4 | 144 | 0 | 2 & 2 | 352 | 348 | 176 | 172 |
| 31 | 4 | 144 | 4 | 2 & 2 | 352 | 346 | 174 | 172 |
| 32 | 4 | 144 | 8 | 2 & 2 | 352 | 344 | 174 | 170 |
| 33 | 4 | 144 | 16 | 2 & 2 | 352 | 340 | 172 | 168 |
| 34 | 4 | 144 | 32 | 2 & 2 | 352 | 332 | 168 | 164 |
| 35 | 4 | 144 | 0 | 8 & 8 | 352 | 336 | 176 | 160 |
| 36 | 4 | 144 | 4 | 8 & 8 | 352 | 334 | 174 | 160 |
| 37 | 4 | 144 | 8 | 8 & 8 | 352 | 332 | 174 | 158 |
| 38 | 4 | 144 | 16 | 8 & 8 | 352 | 328 | 172 | 156 |
| 39 | 4 | 144 | 32 | 8 & 8 | 352 | 320 | 168 | 152 |
| 40 | 2 | 144 | 0 | 0 & 0 | 704 | 704 | 352 | 352 |
| 41 | 2 | 144 | 4 | 0 & 0 | 704 | 702 | 350 | 352 |
| 42 | 2 | 144 | 8 | 0 & 0 | 704 | 700 | 350 | 350 |
| 43 | 2 | 144 | 16 | 0 & 0 | 704 | 696 | 348 | 348 |
| 44 | 2 | 144 | 32 | 0 & 0 | 704 | 688 | 344 | 344 |
| 45 | 2 | 144 | 0 | 2 & 2 | 704 | 700 | 352 | 348 |
| 46 | 2 | 144 | 4 | 2 & 2 | 704 | 698 | 350 | 348 |

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | N _{SS} & N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|------------------------------------|---|-----------|-------------------------------|--|--|
| 47 | 2 | 144 | 8 | 2 & 2 | 704 | 696 | 350 | 346 |
| 48 | 2 | 144 | 16 | 2 & 2 | 704 | 692 | 348 | 344 |
| 49 | 2 | 144 | 32 | 2 & 2 | 704 | 684 | 344 | 340 |
| 50 | 2 | 144 | 0 | 16 & 16 | 704 | 672 | 352 | 320 |
| 51 | 2 | 144 | 4 | 16 & 16 | 704 | 670 | 350 | 320 |
| 52 | 2 | 144 | 8 | 16 & 16 | 704 | 668 | 350 | 318 |
| 53 | 2 | 144 | 16 | 16 & 16 | 704 | 664 | 348 | 316 |
| 54 | 2 | 144 | 32 | 16 & 16 | 704 | 656 | 344 | 312 |
| 55 | 1 | 144 | 0 | 0 & 0 | 1408 | 1408 | 704 | 704 |
| 56 | 1 | 144 | 4 | 0 & 0 | 1408 | 1406 | 702 | 704 |
| 57 | 1 | 144 | 8 | 0 & 0 | 1408 | 1404 | 702 | 702 |
| 58 | 1 | 144 | 16 | 0 & 0 | 1408 | 1400 | 700 | 700 |
| 59 | 1 | 144 | 32 | 0 & 0 | 1408 | 1392 | 696 | 696 |
| 60 | 1 | 144 | 0 | 2 & 2 | 1408 | 1404 | 704 | 700 |
| 61 | 1 | 144 | 4 | 2 & 2 | 1408 | 1402 | 702 | 700 |
| 62 | 1 | 144 | 8 | 2 & 2 | 1408 | 1400 | 702 | 698 |
| 63 | 1 | 144 | 16 | 2 & 2 | 1408 | 1396 | 700 | 696 |
| 64 | 1 | 144 | 32 | 2 & 2 | 1408 | 1388 | 696 | 692 |
| 65 | 1 | 144 | 0 | 32 & 32 | 1408 | 1344 | 704 | 640 |
| 66 | 1 | 144 | 4 | 32 & 32 | 1408 | 1342 | 702 | 640 |
| 67 | 1 | 144 | 8 | 32 & 32 | 1408 | 1340 | 702 | 638 |
| 68 | 1 | 144 | 16 | 32 & 32 | 1408 | 1336 | 700 | 636 |
| 69 | 1 | 144 | 32 | 32 & 32 | 1408 | 1328 | 696 | 632 |

5A.2.2.4.2 Time slot formats for 8PSK

The Downlink and the Uplink timeslot formats are described together in the following table.

Table 8H: Timeslot formats for 8PSK modulation

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | N _{SS} & N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|------------------------------------|---|-----------|-------------------------------|--|--|
| 0 | 1 | 144 | 0 | 0 & 0 | 2112 | 2112 | 1056 | 1056 |
| 1 | 1 | 144 | 6 | 0 & 0 | 2112 | 2109 | 1053 | 1056 |
| 2 | 1 | 144 | 12 | 0 & 0 | 2112 | 2106 | 1053 | 1053 |
| 3 | 1 | 144 | 24 | 0 & 0 | 2112 | 2100 | 1050 | 1050 |
| 4 | 1 | 144 | 48 | 0 & 0 | 2112 | 2088 | 1044 | 1044 |
| 5 | 1 | 144 | 0 | 3 & 3 | 2112 | 2106 | 1056 | 1050 |
| 6 | 1 | 144 | 6 | 3 & 3 | 2112 | 2103 | 1053 | 1050 |
| 7 | 1 | 144 | 12 | 3 & 3 | 2112 | 2100 | 1053 | 1047 |
| 8 | 1 | 144 | 24 | 3 & 3 | 2112 | 2094 | 1050 | 1044 |
| 9 | 1 | 144 | 48 | 3 & 3 | 2112 | 2082 | 1044 | 1038 |
| 10 | 1 | 144 | 0 | 48 & 48 | 2112 | 2016 | 1056 | 960 |
| 11 | 1 | 144 | 6 | 48 & 48 | 2112 | 2013 | 1053 | 960 |
| 12 | 1 | 144 | 12 | 48 & 48 | 2112 | 2010 | 1053 | 957 |
| 13 | 1 | 144 | 24 | 48 & 48 | 2112 | 2004 | 1050 | 954 |
| 14 | 1 | 144 | 48 | 48 & 48 | 2112 | 1992 | 1044 | 948 |
| 15 | 16 | 144 | 0 | 0 & 0 | 132 | 132 | 66 | 66 |
| 16 | 16 | 144 | 6 | 0 & 0 | 132 | 129 | 63 | 66 |
| 17 | 16 | 144 | 12 | 0 & 0 | 132 | 126 | 63 | 63 |
| 18 | 16 | 144 | 24 | 0 & 0 | 132 | 120 | 60 | 60 |
| 19 | 16 | 144 | 48 | 0 & 0 | 132 | 108 | 54 | 54 |
| 20 | 16 | 144 | 0 | 3 & 3 | 132 | 126 | 66 | 60 |
| 21 | 16 | 144 | 6 | 3 & 3 | 132 | 123 | 63 | 60 |
| 22 | 16 | 144 | 12 | 3 & 3 | 132 | 120 | 63 | 57 |
| 23 | 16 | 144 | 24 | 3 & 3 | 132 | 114 | 60 | 54 |
| 24 | 16 | 144 | 48 | 3 & 3 | 132 | 102 | 54 | 48 |

5A.2.3 Training sequences for spread bursts

In this subclause, the training sequences for usage as midambles are defined. The training sequences, i.e. midambles, of different users active in the same cell and same time slot are cyclically shifted versions of one single basic midamble code. The applicable basic midamble codes are given in Annex AA.1.

The basic midamble codes in Annex AA.1 are listed in hexadecimal notation. The binary form of the basic midamble code shall be derived according to table 8I below.

Table 8I: Mapping of 4 binary elements m_i on a single hexadecimal digit:

| 4 binary elements m_i | Mapped on hexadecimal digit |
|-------------------------|-----------------------------|
| -1 -1 -1 -1 | 0 |
| -1 -1 -1 1 | 1 |
| -1 -1 1 -1 | 2 |
| -1 -1 1 1 | 3 |
| -1 1 -1 -1 | 4 |
| -1 1 -1 1 | 5 |
| -1 1 1 -1 | 6 |
| -1 1 1 1 | 7 |
| 1 -1 -1 -1 | 8 |
| 1 -1 -1 1 | 9 |
| 1 -1 1 -1 | A |
| 1 -1 1 1 | B |
| 1 1 -1 -1 | C |
| 1 1 -1 1 | D |
| 1 1 1 -1 | E |
| 1 1 1 1 | F |

For each particular basic midamble code, its binary representation can be written as a vector \mathbf{m}_p :

$$\mathbf{m}_p = (m_1, m_2, \dots, m_p) \quad (1)$$

According to Annex AA.1, the size of this vector \mathbf{m}_p is $P=128$. As QPSK modulation is used, the training sequences are transformed into a complex form, denoted as the complex vector $\underline{\mathbf{m}}_p$:

$$\underline{\mathbf{m}}_p = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_p) \quad (2)$$

The elements \underline{m}_i of $\underline{\mathbf{m}}_p$ are derived from elements m_i of \mathbf{m}_p using equation (3):

$$\underline{m}_i = (j)^i \cdot m_i \text{ for all } i = 1, \dots, P \quad (3)$$

Hence, the elements \underline{m}_i of the complex basic midamble code are alternating real and imaginary.

To derive the required training sequences, this vector $\underline{\mathbf{m}}_p$ is periodically extended to the size:

$$i_{\max} = L_m + (K - 1)W \quad (4)$$

Notes on equation (4):

K and W are taken from Annex AA.1

So we obtain a new vector $\underline{\mathbf{m}}$ containing the periodic basic midamble sequence:

$$\underline{\mathbf{m}} = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{i_{\max}}) = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{L_m + (K-1)W}) \quad (5)$$

The first P elements of this vector $\underline{\mathbf{m}}$ are the same ones as in vector $\underline{\mathbf{m}}_p$, the following elements repeat the beginning:

$$\underline{m}_i = \underline{m}_{i-P} \text{ for the subset } i = (P + 1), \dots, i_{\max} \quad (6)$$

Using this periodic basic midamble sequence $\underline{\mathbf{m}}$ for each user k a midamble $\underline{\mathbf{m}}^{(k)}$ of length L_m is derived, which can be written as a user specific vector:

$$\underline{\mathbf{m}}^{(k)} = (\underline{m}_1^{(k)}, \underline{m}_2^{(k)}, \dots, \underline{m}_{L_m}^{(k)}) \quad (7)$$

The L_m midamble elements $\underline{m}_i^{(k)}$ are generated for each midamble of the k users ($k = 1, \dots, K$) based on:

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K-k)W} \text{ with } i = 1, \dots, L_m \text{ and } k = 1, \dots, K \quad (8)$$

The midamble sequences derived according to equations (7) to (8) have complex values and are not subject to channelisation or scrambling process, i.e. the elements $\underline{m}_i^{(k)}$ represent complex chips for usage in the pulse shaping process at modulation.

The term "a midamble code set" or "a midamble code family" denotes K specific midamble codes $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$, based on a single basic midamble code $\underline{\mathbf{m}}_p$ according to (1).

5A.2.4 Beamforming

Beamforming is same as that of the 3.84Mcps TDD, cf. [5.2.4 Beamforming].

5A.3 Common physical channels

5A.3.1 Primary common control physical channel (P-CCPCH)

The BCH as described in section 4.1.2 "Common Transport Channels" is mapped onto the Primary Common Control Physical Channels (P-CCPCH1 and P-CCPCH2). The position (time slot / code) of the P-CCPCHs is fixed in the 1.28Mcps TDD. The P-CCPCHs are mapped onto the first two code channels of timeslot#0 with spreading factor of 16. The P-CCPCH is always transmitted with an antenna pattern configuration that provides whole cell coverage.

5A.3.1.1 P-CCPCH Spreading

The P-CCPCH uses fixed spreading with a spreading factor $SF = 16$. The P-CCPCH1 and P-CCPCH2 always use channelisation code $c_{Q=16}^{(k=1)}$ and $c_{Q=16}^{(k=2)}$ respectively.

5A.3.1.2 P-CCPCH Burst Format

The burst format as described in section 5A.2.2 is used for the P-CCPCH. No TFCI is applied for the P-CCPCH.

5A.3.1.3 P-CCPCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5A.2.3 are used for the P-CCPCH.

5A.3.2 Secondary common control physical channel (S-CCPCH)

PCH and FACH as described in subclause 4.1.2 are mapped onto one or more secondary common control physical channels (S-CCPCH). In this way the capacity of PCH and FACH can be adapted to the different requirements. The time slot and codes used for the S-CCPCH are broadcast on the BCH.

5A.3.2.1 S-CCPCH Spreading

The S-CCPCH uses fixed spreading with a spreading factor $SF = 16$. as described in subclause 5A.2.1

5A.3.2.2 S-CCPCH Burst Format

The burst format as described in section 5A.2.2 is used for the S-CCPCH. TFCI may be applied for S-CCPCHs.

5A.3.2.3 S-CCPCH Training sequences

The training sequences, i.e. midambles, as described in the subclause 5A.2.3 are also used for the S-CCPCH.

5A.3.3 Fast Physical Access CHannel (FPACH)

The Fast Physical Access CHannel (FPACH) is used by the Node B to carry, in a single burst, the acknowledgement of a detected signature with timing and power level adjustment indication to a user equipment. FPACH makes use of one code with spreading factor 16, so that its burst is composed by 44 symbols. The spreading code, training sequence and time slot position are configured by the network and signalled on the BCH.

5A.3.3.1 FPACH burst

The FPACH burst contains 32 information bits. Table 8J reports the content description of the FPACH information bits and their priority order:

Table 8J: FPACH information bits description

| Information field | Length (in bits) |
|---|------------------|
| Signature Reference Number | 3 (MSB) |
| Relative Sub-Frame Number | 2 |
| Received starting position of the UpPCH (UpPCH _{POS}) | 11 |
| Transmit Power Level Command for RACH message | 7 |
| Reserved bits (default value: 0) | 9 (LSB) |

The use and generation of the information fields is explained in [9].

5A.3.3.1.1 Signature Reference Number

The reported number corresponds to the numbering principle for the cell signatures as described in [8].

The Signature Reference Number value range is 0 – 7 coded in 3 bits such that:

bit sequence(0 0 0) corresponds to the first signature of the cell; ...; bit sequence (1 1 1) corresponds to the 8th signature of the cell.

5A.3.3.1.2 Relative Sub-Frame Number

The Relative Sub-Frame Number value range is 0 – 3 coded such that:

bit sequence (0 0) indicates one sub-frame difference; ...; bit sequence (1 1) indicates 4 sub-frame difference.

5A.3.3.1.3 Received starting position of the UpPCH (UpPCH_{POS})

The received starting position of the UpPCH value range is 0 – 2047 coded such that:

bit sequence (0 0 ... 0 0 0) indicates the received starting position zero chip; ...; bit sequence (1 1 ... 1 1 1) indicates the received starting position 2047*1/8 chip.

5A.3.3.1.4 Transmit Power Level Command for the RACH message

The transmit power level command is transmitted in 7 bits.

5A.3.3.2 FPACH Spreading

The FPACH uses only spreading factor SF=16 as described in subclause 5A.3.3. The set of admissible spreading codes for use on the FPACH is broadcast on the BCH.

5A.3.3.3 FPACH Burst Format

The burst format as described in section 5A.2.2 is used for the FPACH.

5A.3.3.4 FPACH Training sequences

The training sequences, i.e. midambles, as described in subclause 5A.2.3 are used for FPACH.

5A.3.3.5 FPACH timeslot formats

The FPACH uses slot format #0 of the DL time slot formats given in subclause 5A.2.2.4.1.1.

5A.3.4 The physical random access channel (PRACH)

The RACH as described in subclause 4.1.2 is mapped onto one or more uplink physical random access channels (PRACH). In such a way the capacity of RACH can be flexibly scaled depending on the operators need.

5A.3.4.1 PRACH Spreading

The uplink PRACH uses either spreading factor SF=16, SF=8 or SF=4 as described in subclause 5A.2.1. The set of admissible spreading codes for use on the PRACH and the associated spreading factors are broadcast on the BCH (within the RACH configuration parameters on the BCH).

5A.3.4.2 PRACH Burst Format

The burst format as described in section 5A.2.2 is used for the PRACH.

5A.3.4.3 PRACH Training sequences

The training sequences, i.e. midambles, of different users active in the same time slot are time shifted versions of a single periodic basic code. The basic midamble codes as described in subclause 5A.2.3 are used for PRACH.

5A.3.4.4 PRACH timeslot formats

The PRACH uses the following time slot formats taken from the uplink timeslot formats described in sub-clause 5A.2.2.4.1.2:

| Spreading Factor | Slot Format # |
|------------------|---------------|
| 16 | 0 |
| 8 | 10 |
| 4 | 25 |

5A.3.4.5 Association between Training Sequences and Channelisation Codes

The association between training sequences and channelisation codes of PRACH in the 1.28McpsTDD is same as that of the DPCH.

5A.3.5 The synchronisation channels (DwPCH, UpPCH)

There are two dedicated physical synchronisation channels —DwPCH and UpPCH in each 5ms sub-frame of the 1.28Mcps TDD. The DwPCH is used for the down link synchronisation and the UpPCH is used for the uplink synchronisation.

The position and the contents of the DwPCH are equal to the DwPTS as described in the subclause 5A.1., while the position and the contents of the UpPCH are equal to the UpPTS.

The DwPCH is transmitted at each sub-frame with an antenna pattern configuration which provides whole cell coverage. Furthermore it is transmitted with a constant power level which is signalled by higher layers.

The burst structure of the DwPCH (DwPTS) is described in the figure 18I.

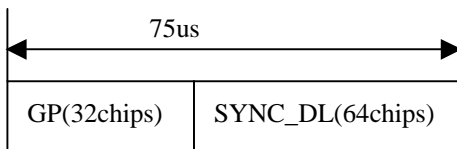


Figure 18I: burst structure of the DwPCH (DwPTS)

Note: 'GP' for 'Guard Period'

The burst structure of the UpPCH (UpPTS) is described in the figure 18J.




Figure 18J: burst structure of the UpPCH (UpPTS)

The SYNC-DL code in DwPCH and the SYNC-UL code in UpPCH are not spreaded. The details about the SYNC-DL and SYNC-UL code are described in the corresponding subclause and annex in [8].

5A.3.6 Physical Uplink Shared Channel (PUSCH)

For Physical Uplink Shared Channel (PUSCH) the burst structure of DPCH as described in subclause 5A.2 and the training sequences as described in subclause 5A.2.3 shall be used. PUSCH provides the possibility for transmission of TFCI, SS, and TPC in uplink.

The PUSCH is common with 3.84 Mcps TDD with respect to Spreading and UE selection, cf. [5.3.5 Physical Uplink Shared Channel (PUSCH)].

5A.3.7 Physical Downlink Shared Channel (PDSCH)

For Physical Downlink Shared Channel (PDSCH) the burst structure of DPCH as described in subclause 5A.2 and the training sequences as described in subclause 5A.2.3 shall be used. PDSCH provides the possibility for transmission of TFCI, SS, and TPC in downlink.

The PDSCH is common with 3.84 Mcps TDD with respect to Spreading and UE selection, cf. [5.3.6 Physical Downlink Shared Channel (PDSCH)].

5A.3.8 The Page Indicator Channel (PICH)

The Paging Indicator Channel (PICH) is a physical channel used to carry the paging indicators.

5A.3.8.1 Mapping of Paging Indicators to the PICH bits

Figure 18K depicts the structure of a PICH transmission and the numbering of the bits within the bursts. The burst type as described in [5A.2.2 "Burst Format"] is used for the PICH. N_{PIB} bits are used to carry the paging indicators, where $N_{PIB}=352$.

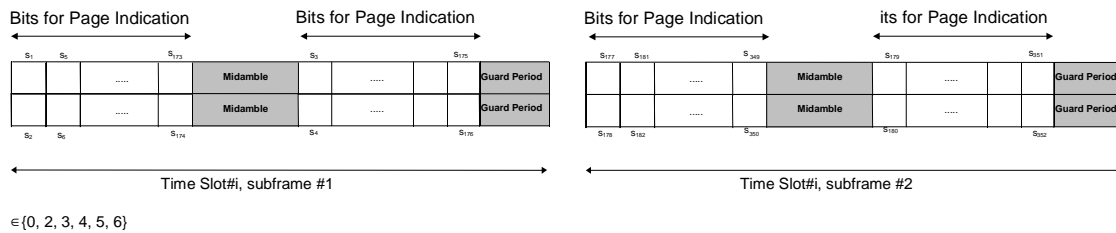


Figure 18K: Transmission and numbering of paging indicator carrying bits in the PICH bursts

Each paging indicator P_q (where $P_q, q = 0, \dots, N_{PI}-1, P_q \in \{0, 1\}$) in one radio frame is mapped to the bits $\{s_{2L_{PI} \cdot q+1}, \dots, s_{2L_{PI} \cdot (q+1)}\}$ in subframe #1 or subframe #2.

The setting of the paging indicators and the corresponding PICH bits is described in [7].

N_{PI} paging indicators of length $L_{PI}=2, L_{PI}=4$ or $L_{PI}=8$ symbols are transmitted in each radio frame that contains the PICH. The number of paging indicators N_{PI} per radio frame is given by the paging indicator length, which signalled by higher layers. In table 8K this number is shown for the different possibilities of paging indicator lengths.

Table 8K: Number N_{PI} of paging indicators per radio frame for different paging indicator lengths L_{PI}

| | $L_{PI}=2$ | $L_{PI}=4$ | $L_{PI}=8$ |
|--------------------------|------------|------------|------------|
| N_{PI} per radio frame | 88 | 44 | 22 |

5A.3.8.2 Structure of the PICH over multiple radio frames

The structure of the PICH over multiple radio frames is common with 3.84 Mcps TDD, cf. [5.3.7.2 Structure of the PICH over multiple radio frames]

5A.3.9 High Speed Physical Downlink Shared Channel (HS-PDSCH)

The HS-DSCH as described in subclause 4.1.2 is mapped onto one or more high speed physical downlink shared channels (HS-PDSCH).

5A.3.9.1 HS-PDSCH Spreading

Spreading of the HS-PDSCH is common with 3.84 Mcps TDD, cf. [5.3.9.1HS-PDSCH Spreading]

5A.3.9.2 HS-PDSCH Burst Format

The burst format as described in section 5A.2.2 shall be used for the HS-PDSCH.

5A.3.9.3 HS-PDSCH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the HS-PDSCH.

5A.3.9.4 UE Selection

UE selection is common with 3.84 Mcps TDD, cf. [5.3.9.4 UE selection].

5A.3.9.5 HS-PDSCH timeslot formats

An HS-PDSCH may use QPSK or 16QAM modulation symbols. The time slot formats are shown in table 8KA.

Table 8KA: Time slot formats for the HS-PDSCH

| Slot Format # | SF | Midamble length (chips) | N _{TFCI} code word (bits) | N _{SS} & N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|----|-------------------------|------------------------------------|---|-----------|-------------------------------|--|--|
| 0 (QPSK) | 16 | 144 | 0 | 0 & 0 | 88 | 88 | 44 | 44 |
| 1 (16QAM) | 16 | 144 | 0 | 0 & 0 | 176 | 176 | 88 | 88 |
| 2 (QPSK) | 1 | 144 | 0 | 0 & 0 | 1408 | 1408 | 704 | 704 |
| 3 (16QAM) | 1 | 144 | 0 | 0 & 0 | 2816 | 2816 | 1408 | 1408 |

5A.3.10 Shared Control Channel for HS-DSCH (HS-SCCH)

The HS-SCCH is a DL physical channel that carries higher layer control information for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SCCH the structure of which is described below.

The information on the HS-SCCH is carried by two separate physical channels (HS-SCCH1 and HS-SCCH2). The term HS-SCCH refers to the ensemble of these physical channels.

5A.3.10.1 HS-SCCH Spreading

Spreading of the HS-SCCH is common with 3.84 Mcps TDD, cf. [5.3.10.1 HS-SCCH Spreading].

5A.3.10.2 HS-SCCH Burst Format

The burst format as described in section 5A.2.2 shall be used for the HS-SCCH.

5A.3.10.3 HS-SCCH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the HS-SCCH.

5A.3.10.4 HS-SCCH timeslot formats

HS-SCCH1 shall use time slot format #5 and HS-SCCH2 shall use time slot format #0 from table 8F, see section 5A.2.2.4.1.1, i.e. HS-SCCH shall carry TPC and SS but no TFCL.

5A.3.11 Shared Information Channel for HS-DSCH (HS-SICH)

The HS-SICH is a UL physical channel that carries higher layer control information and the Channel Quality Indicator CQI for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SICH the structure of which is described below.

5A.3.11.1 HS-SICH Spreading

Spreading of the HS-SICH is common with 3.84 Mcps TDD, cf. [5.3.11.1 HS-SICH Spreading].

5A.3.11.2 HS-SICH Burst Format

The burst format as described in section 5A.2.2 shall be used for the HS-SICH.

5A.3.11.3 HS-SICH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the HS-SICH.

5A.3.11.4 HS-SICH timeslot formats

The HS-SICH shall use time slot format #5 from table 8G, see section 5A.2.2.4.1.2, i.e., it shall carry TPC and SS but no TFCL.

5A.3.12 The MBMS Indicator Channel (MICH)

The MBMS Indicator Channel (MICH) is a physical channel used to carry the MBMS notification indicators. The UE may use multiple MICH within the MBMS modification period in order to make decisions on individual MBMS notification indicators.

5A.3.12.1 Mapping of MBMS Indicators to the MICH bits

Figure 18L depicts the structure of a MICH transmission and the numbering of the bits within the bursts. The burst type as described in [5A.2.2 "Burst Format"] is used for the MICH. N_{NIB} bits are used to carry the MBMS notification indicators, where $N_{NIB}=352$.

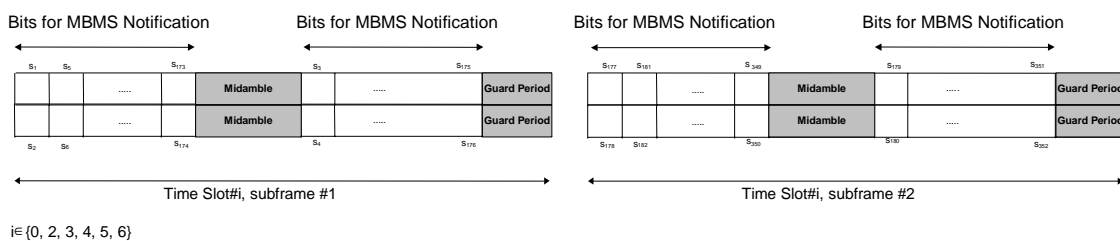


Figure 18L: Transmission and numbering of MBMS notification indicator carrying bits in a MICH burst

Each notification indicator N_q (where $N_q, q = 0, \dots, N_n-1, N_q \in \{0, 1\}$) in one radio frame is mapped to the bits $\{s_{2L_{NI} \cdot q+1}, \dots, s_{2L_{NI} \cdot (q+1)}\}$ in subframe #1 or subframe #2.

The setting of the MBMS notification indicators and the corresponding MICH bits is described in [7].

N_n MBMS notification indicators of length $L_{NI}=2, L_{NI}=4$ or $L_{NI}=8$ symbols are transmitted in each radio frame that contains the MICH. The number of MBMS notification indicators N_{NI} per radio frame is given by the MBMS notification indicator length, which is signalled by higher layers. In table 8KB this number is shown for the different possibilities of MBMS notification indicator lengths.

Table 8KB: Number N_{NI} of MBMS notification indicators per radio frame for different MBMS notification indicator lengths L_{NI}

| | $L_{NI}=2$ | $L_{NI}=4$ | $L_{NI}=8$ |
|-----------------------|------------|------------|------------|
| N_n per radio frame | 88 | 44 | 22 |

The value NI ($NI = 0, \dots, N_{NI}-1$) calculated by higher layers, is associated to the MBMS notification indicator N_q , where $q = NI \bmod N_n$.

The set of NI passed over the I_{ub} indicates all higher layer NI values for which the notification indicator on MICH should be set to 1 during the corresponding modification period; all other indicators shall be set to 0.

5A.3.13 Physical Layer Common Control Channel (PLCCH)

The Physical Layer Common Control Channel (PLCCH) is a Node B terminated channel which may be used to carry dedicated (UE-specific) TPC and SS information to multiple UEs. The PLCCH carries TPC and SS information only. No higher layer data is mapped to PLCCH. Each uplink CCTrCH is controlled either by PLCCH or by other appropriate downlink physical channels, under the control of higher layer signalling.

5A.3.13.1 PLCCCH Spreading

The PLCCCH uses only spreading factor SF=16 as described in subclause 5A.2.1. The spreading codes for use on the PLCCCH are indicated by higher layers.

5A.3.13.2 PLCCCH Burst Type

The burst format as described in section 5A2.2 is used for the PLCCCH.

5A.3.13.3 PLCCCH Training Sequence

The training sequences as described in subclause 5A.2.3 are used for PLCCCH.

5A.3.13.4 PLCCCH timeslot formats

The PLCCCH shall use time slot format #0 from table 8G, see section 5A.2.2.4.1.2.

5A.3.14 E-DCH Physical Uplink Channel

One or more E-PUCH are used to carry the uplink E-DCH transport channel and associated control information (E-UCCH) in each E-DCH TTI. In a timeslot designated by UTRAN for E-PUCH use, up to one E-PUCH may be transmitted by a UE. No other physical channels may be transmitted by a UE in an E-PUCH timeslot.

5A.3.14.1 E-UCCH

The E-DCH Uplink Control Channel (E-UCCH) carries uplink control information associated with the E-DCH and is mapped to E-PUCH. Depending on the configuration by higher layers, an E-PUCH burst may or may not contain E-UCCH and TPC. When E-PUCH does contain E-UCCH, TPC is also transmitted. When E-PUCH does not contain E-UCCH, TPC is not transmitted.

One E-UCCH instance :

- is of length 32 physical channel bits
- is mapped to the data field of the E-PUCH
- is spread at SF appointed by CRR1
- uses QPSK modulation

There shall be at least one E-UCCH and TPC in every E-DCH TTI. Multiple instances of the same E-UCCH information and TPC can be transmitted within an E-DCH TTI, the detailed number of instances can be set by NodeB MAC-e for scheduled transmissions and signalled by higher layers for non-scheduled transmissions. When an E-DCH data block is transmitted on multiple (N) timeslots in one TTI, there will be multiple E-PUCH timeslots. All repetitions of E-UCCH and TPC are evenly distributed on multiple E-PUCH timeslots. N is the number of timeslots of the E-PUCH, M is the number of E-UCCH and TPC instances in one TTI; K is the integral part of M/N; L is the residue of M/N. S is the number of E-UCCHs and TPCs in one E-PUCH timeslot. S equals K+1 for the first L E-PUCH timeslots and equals K for the last (N-L) E-PUCH timeslots.

The burst composition of the E-UCCH information and the E-DCH data is shown in figure 18M.

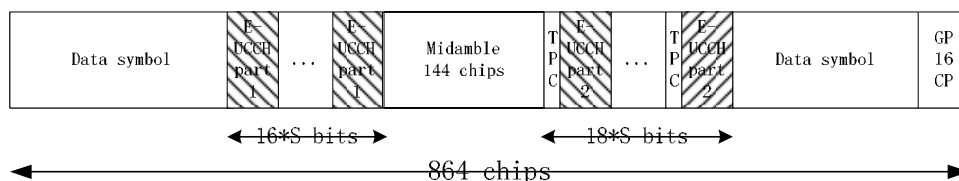


Figure 18M: Multiplexing structure of E-DCH and E-UCCH

An E-UCCH is composed of 32 bits: $k_0, k_1 \dots k_{31}$. It is segmented evenly into two parts shown in figure 18N.

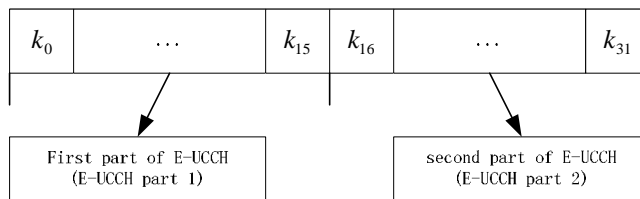


Figure 18N: E-UCCH code composition

Figures 18O and 18P show the E-PUCH data burst with and without the E-UCCH/TPC fields.

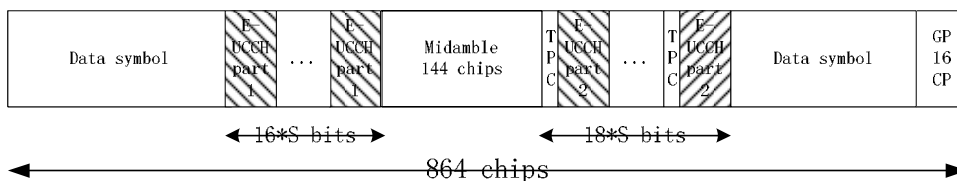


Figure 18O: E-PUCH data burst with E-UCCH/TPC

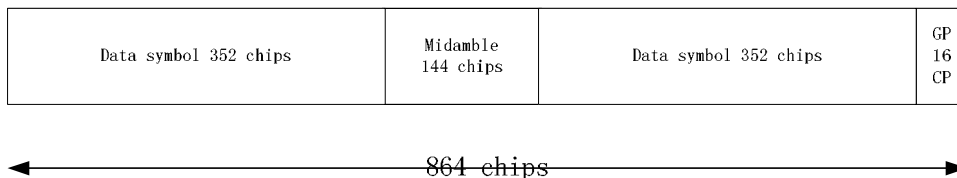


Figure 18P: E-PUCH data burst without E-UCCH/TPC

5A.3.14.2 E-PUCH Spreading

The spreading factors that can be applied to the E-PUCH are SF = 1, 2, 4, 8, 16 as described in subclause 5A.2.1. All E-PUCH use the same spreading factor within an E-DCH TTI. For scheduled transmissions, E-PUCHs use the spreading factor indicated by CRRI on E-AGCH.

5A.3.14.3 E-PUCH Burst Types

The burst types as described in subclause 5A.2.2 can be used for E-PUCH. E-UCCH and TPC can be transmitted on the E-PUCH.

5A.3.14.4 E-PUCH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the E-PUCH.

5A.3.14.5 UE Selection

UEs that shall transmit on the E-PUCH are selected by higher layers. The UE id on the associated E-AGCH shall be used for identification.

5A.3.14.6 E-PUCH timeslot formats

An E-PUCH may use QPSK or 16QAM modulation symbols and may or may not contain E-UCCH/TPC. The time slot formats are shown in table 8KC.

Table 8KC: Time slot formats for the E-PUCH

| Slot Format # | 0 (QPSK) | 1 (16QAM) | 2 (QPSK) | 3 (16QAM) | 4 (QPSK) | 5 (16QAM) | 6 (QPSK) | 7 (16QAM) | 8 (QPSK) | 9 (16QAM) | 10 (QPSK) | 11 (16QAM) | 12 (QPSK) | 13 (16QAM) |
|--|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|-----------|------------|-----------|------------|
| Spreading Factor | 16 | 16 | 16 | 16 | 16 | 16 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Midamble length (chips) | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 |
| Bits/slot | 88 | 176 | 88 | 176 | 88 | 176 | 176 | 352 | 176 | 352 | 176 | 352 | 176 | 352 |
| N _{Data/Slot} (bits) | 88 | 176 | 54 | 108 | 20 | 40 | 176 | 352 | 142 | 284 | 108 | 216 | 74 | 148 |
| N _{data/data field(1)} (bits) | 44 | 88 | 28 | 56 | 12 | 24 | 88 | 176 | 72 | 144 | 56 | 112 | 40 | 80 |
| N _{EUCC8_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC7_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC6_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC5_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC4_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC3_part1} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N _{EUCC2_part1} (bits) | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N _{EUCC1_part1} (bits) | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N _{TPC1} (bits) | 0 | 0 | 2 | 2 | 2 | 2 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 |
| N _{EUCC1_part2} (bits) | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N _{TPC2} (bits) | 0 | 0 | 0 | 0 | 2 | 2 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 |
| N _{EUCC2_part2} (bits) | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N _{TPC3} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| N _{EUCC3_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N _{TPC4} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC4_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{TPC5} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC5_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{TPC6} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC6_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{TPC7} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC7_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{TPC8} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{EUCC8_part2} (bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N _{data/data field(2)} | 44 | 88 | 26 | 52 | 8 | 16 | 88 | 176 | 70 | 140 | 52 | 104 | 34 | 68 |

| Slot Format # | 0 (QPSK) | 1 (16QAM) | 2 (QPSK) | 3 (16QAM) | 4 (QPSK) | 5 (16QAM) | 6 (QPSK) | 7 (16QAM) | 8 (QPSK) | 9 (16QAM) | 10 (QPSK) | 11 (16QAM) | 12 (QPSK) | 13 (16QAM) |
|---------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|-----------|------------|-----------|------------|
| (bits) | | | | | | | | | | | | | | |

| Slot Format # | 14 (QPSK) | 15 (16QAM) | 16 (QPSK) | 17 (16QAM) | 18 (QPSK) | 19 (16QAM) | 20 (QPSK) | 21 (16QAM) | 22 (QPSK) | 23 (16QAM) | 24 (QPSK) | 25 (16QAM) | 26 (QPSK) | 27 (16QAM) |
|--|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| Spreading Factor | 8 | 8 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Midamble length (chips) | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 |
| Bits/slot | 176 | 352 | 352 | 704 | 352 | 704 | 352 | 704 | 352 | 704 | 352 | 704 | 352 | 704 |
| N_{Data}/Slot (bits) | 40 | 80 | 352 | 704 | 318 | 636 | 284 | 568 | 250 | 500 | 216 | 432 | 182 | 364 |
| N_{data}/data field(1) (bits) | 24 | 48 | 176 | 352 | 160 | 320 | 144 | 288 | 128 | 256 | 112 | 224 | 96 | 192 |
| N_{EUCC8_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC7_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC6_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC5_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{EUCC4_part1}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{EUCC3_part1}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC2_part1}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC1_part1}(bits) | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC1}(bits) | 2 | 2 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC1_part2}(bits) | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC2}(bits) | 2 | 2 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC2_part2}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC3}(bits) | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC3_part2}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC4}(bits) | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 |
| N_{EUCC4_part2}(bits) | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{TPC5}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| N_{EUCC5_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{TPC6}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC6_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{TPC7}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC7_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Slot Format # | 14 (QPSK) | 15 (16QAM) | 16 (QPSK) | 17 (16QAM) | 18 (QPSK) | 19 (16QAM) | 20 (QPSK) | 21 (16QAM) | 22 (QPSK) | 23 (16QAM) | 24 (QPSK) | 25 (16QAM) | 26 (QPSK) | 27 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| N_{TPC8}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC8_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{data/data field(2)}(bits) | 16 | 32 | 176 | 352 | 158 | 316 | 140 | 280 | 122 | 244 | 104 | 208 | 86 | 172 |

| Slot Format # | 28 (QPSK) | 29 (16QAM) | 30 (QPSK) | 31 (16QAM) | 32 (QPSK) | 33 (16QAM) | 34 (QPSK) | 35 (16QAM) | 36 (QPSK) | 37 (16QAM) | 38 (QPSK) | 39 (16QAM) | 40 (QPSK) | 41 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| Spreading Factor | 4 | 4 | 4 | 4 | 4 | 4 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Midamble length (chips) | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 |
| Bits/slot | 352 | 704 | 352 | 704 | 352 | 704 | 704 | 1408 | 704 | 1408 | 704 | 1408 | 704 | 1408 |
| N_{Data/Slot}(bits) | 148 | 296 | 114 | 228 | 80 | 160 | 704 | 1408 | 670 | 1340 | 636 | 1272 | 602 | 1204 |
| N_{data/data field(1)}(bits) | 80 | 160 | 64 | 128 | 48 | 96 | 352 | 704 | 336 | 672 | 320 | 640 | 304 | 608 |
| N_{EUCC8_part1}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC7_part1}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC6_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC5_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC4_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC3_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{EUCC2_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{EUCC1_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC1}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC1_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC2}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 |
| N_{EUCC2_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{TPC3}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| N_{EUCC3_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{TPC4}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC4_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{TPC5}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCC5_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{TPC6}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Slot Format # | 28 (QPSK) | 29 (16QAM) | 30 (QPSK) | 31 (16QAM) | 32 (QPSK) | 33 (16QAM) | 34 (QPSK) | 35 (16QAM) | 36 (QPSK) | 37 (16QAM) | 38 (QPSK) | 39 (16QAM) | 40 (QPSK) | 41 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| N_{EUCCH6_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{TPC7}(bits) | 0 | 0 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCCH7_part2}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{TPC8}(bits) | 0 | 0 | 0 | 0 | 2 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{EUCCH8_part2}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N_{data/data field(2)}(bits) | 68 | 136 | 50 | 100 | 32 | 64 | 352 | 704 | 334 | 668 | 316 | 632 | 298 | 596 |

| Slot Format # | 42 (QPSK) | 43 (16QAM) | 44 (QPSK) | 45 (16QAM) | 46 (QPSK) | 47 (16QAM) | 48 (QPSK) | 49 (16QAM) | 50 (QPSK) | 51 (16QAM) | 52 (QPSK) | 53 (16QAM) | 54 (QPSK) | 55 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| Spreading Factor | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 |
| Midamble length (chips) | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 |
| Bits/slot | 704 | 1408 | 704 | 1408 | 704 | 1408 | 704 | 1408 | 704 | 1408 | 1408 | 2816 | 1408 | 2816 |
| N_{Data/Slot}(bits) | 568 | 1136 | 534 | 1068 | 500 | 1000 | 466 | 932 | 432 | 864 | 1408 | 2816 | 1374 | 2748 |
| N_{data/data field(1)}(bits) | 288 | 576 | 272 | 544 | 256 | 512 | 240 | 480 | 224 | 448 | 704 | 1408 | 688 | 1376 |
| N_{EUCCH8_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH7_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH6_part1}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH5_part1}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH4_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH3_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH2_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{EUCCH1_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 |
| N_{TPC1}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 2 | 2 |
| N_{EUCCH1_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 16 | 16 |
| N_{TPC2}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCCH2_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{TPC3}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCCH3_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{TPC4}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCCH4_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |

| Slot Format # | 42 (QPSK) | 43 (16QAM) | 44 (QPSK) | 45 (16QAM) | 46 (QPSK) | 47 (16QAM) | 48 (QPSK) | 49 (16QAM) | 50 (QPSK) | 51 (16QAM) | 52 (QPSK) | 53 (16QAM) | 54 (QPSK) | 55 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| N_{TPC5}(bits) | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCC5_part2}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{TPC6}(bits) | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCC6_part2}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{TPC7}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCC7_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{TPC8}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 0 | 0 | 0 | 0 |
| N_{EUCC8_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 0 | 0 | 0 | 0 |
| N_{data/data field(2)}(bits) | 280 | 560 | 262 | 524 | 244 | 488 | 226 | 452 | 208 | 416 | 704 | 1408 | 686 | 1372 |

| Slot Format # | 56 (QPSK) | 57 (16QAM) | 58 (QPSK) | 59 (16QAM) | 60 (QPSK) | 61 (16QAM) | 62 (QPSK) | 63 (16QAM) | 64 (QPSK) | 65 (16QAM) | 66 (QPSK) | 67 (16QAM) | 68 (QPSK) | 69 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| Spreading Factor | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Midamble length (chips) | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 | 144 |
| Bits/slot | 1408 | 2816 | 1408 | 2816 | 1408 | 2816 | 1408 | 2816 | 1408 | 2816 | 1408 | 2816 | 1408 | 2816 |
| N_{data/Slot}(bits) | 1340 | 2680 | 1306 | 2612 | 1272 | 2544 | 1238 | 2476 | 1204 | 2408 | 1170 | 2340 | 1136 | 2272 |
| N_{data/data field(1)}(bits) | 672 | 1344 | 656 | 1312 | 640 | 1280 | 624 | 1248 | 608 | 1216 | 592 | 1184 | 576 | 1152 |
| N_{EUCC8_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{EUCC7_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{EUCC6_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC5_part1}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC4_part1}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC3_part1}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC2_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{EUCC1_part1}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC1}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC1_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC2}(bits) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCC2_part2}(bits) | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC3}(bits) | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |

| Slot Format # | 56 (QPSK) | 57 (16QAM) | 58 (QPSK) | 59 (16QAM) | 60 (QPSK) | 61 (16QAM) | 62 (QPSK) | 63 (16QAM) | 64 (QPSK) | 65 (16QAM) | 66 (QPSK) | 67 (16QAM) | 68 (QPSK) | 69 (16QAM) |
|---|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| N_{EUCCH3_part2}(bits) | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC4}(bits) | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCCH4_part2}(bits) | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC5}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCCH5_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC6}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 | 2 | 2 |
| N_{EUCCH6_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 | 16 | 16 |
| N_{TPC7}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 2 |
| N_{EUCCH7_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 | 16 | 16 |
| N_{TPC8}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| N_{EUCCH8_part2}(bits) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 16 | 16 |
| N_{data/data field(2)}(bits) | 668 | 1336 | 650 | 1300 | 632 | 1264 | 614 | 1228 | 596 | 1192 | 578 | 1156 | 560 | 1120 |

5A.3.15 E-DCH Random Access Uplink Control Channel (E-RUCCH)

The E-RUCCH is used to carry E-DCH-associated uplink control signalling when E-PUCH resources are not available. It shall be mapped to the same random access physical resources defined by UTRAN.

5A.3.15.1 E-RUCCH Spreading

The E-RUCCH uses spreading factor SF=16 or SF=8 as described in subclause 5A.2.1. The set of admissible spreading codes used on the E-RUCCH are based on the spreading codes of PRACH.

5A.3.15.2 E-RUCCH Burst Format

The burst format as described in section 5A.2.2 is used for the E-RUCCH.

5A.3.15.3 E-RUCCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5A.2.3 are used for E-RUCCH.

5A.3.15.4 E-RUCCH timeslot formats

The timeslot format depends on the spreading factor of the E-RUCCH:

| Spreading Factor | Slot Format # |
|------------------|---------------|
| 16 | 0 |
| 8 | 10 |

5A.3.16 E-DCH Absolute Grant Channel (E-AGCH)

The E-DCH Absolute Grant Channel (E-AGCH) is a downlink physical channel carrying the uplink E-DCH absolute grant control information. The E-AGCH uses two separate physical channels (E-AGCH1 and E-AGCH2). The term E-AGCH refers to the ensemble of these physical channels.

5A.3.16.1 E-AGCH Spreading

Spreading of the E-AGCH is common with 3.84Mcps TDD, cf. [5.3.15.1 E-AGCH Spreading].

5A.3.16.2 E-AGCH Burst Types

The burst structures for E-AGCH1 and E-AGCH2 are shown in figure 18Q and 18R.

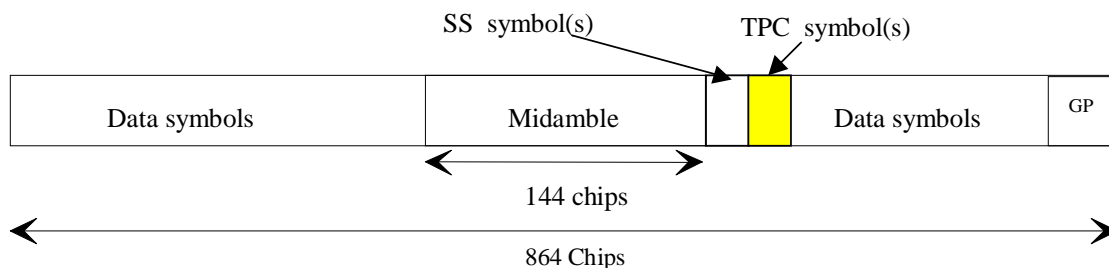


Figure 18Q: E-AGCH1 burst structure

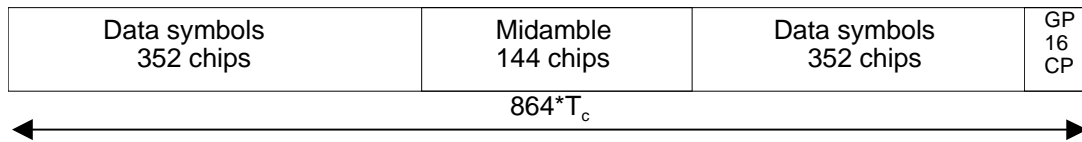


Figure 18R: E-AGCH2 burst structure

5A.3.16.3 E-AGCH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the E-AGCH.

5A.3.16.4 E-AGCH timeslot formats

E-AGCH1 shall use time slot format #5 and E-AGCH2 shall use time slot format #0 from table 8F, see section 5A.2.2.4.1.1, i.e. E-AGCH shall carry TPC and SS for E-PUCH power control and synchronization but no TFCI.

Table 8KD: Timeslot formats for the E-AGCH

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | N _{ss} &N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field (1) (bits) | N _{data/data} field (2) (bits) |
|---------------|------------------|-------------------------|------------------------------------|--|-----------|-------------------------------|---|---|
| 0 | 16 | 144 | 0 | 0&0 | 88 | 88 | 44 | 44 |
| 5 | 16 | 144 | 0 | 2&2 | 88 | 84 | 44 | 40 |

5A.3.17 E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH)

The E-DCH HARQ Acknowledgement indicator channel (E-HICH) is defined in terms of a SF16 downlink physical channel and a signature sequence.

The E-HICH carries one or multiple users' acknowledgement indicator. Figure 18S illustrates the structure of the E-HICH. The E-HICH contains 8 spare bit locations. The spare bit values are undefined. The power of each user's acknowledgement indicator may be set independently by the Node-B. The number of E-HICHs in a cell is configured by the system. Scheduled traffic's and non-scheduled traffic's acknowledgement indicators are transmitted on different E-HICHs.

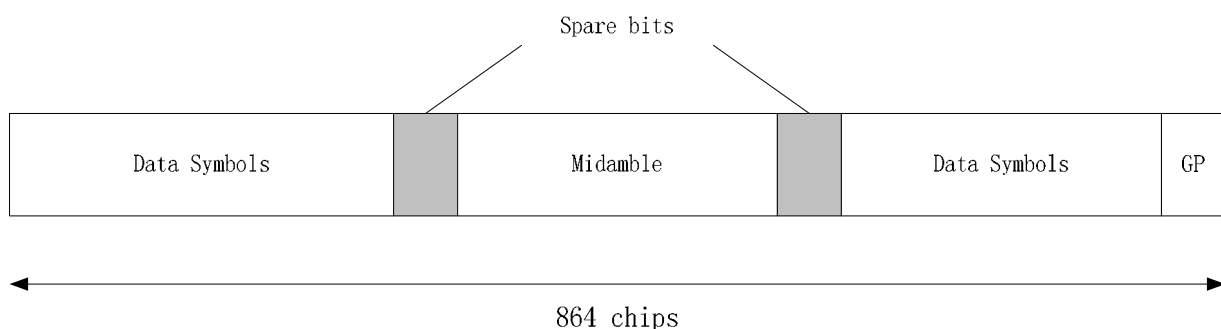


Figure 18S: E-HICH Structure

For Scheduled transmissions, at most four E-HICHs can be configured for one user's scheduled transmission. Which E-HICH is used to convey the HARQ acknowledgment indicator is indicated by the 2-bit E-HICH indicator on E-AGCH. A single E-HICH may carry one or multiple HARQ acknowledgement indicator(s) which are decided by the Node-B.

For Non-Scheduled transmissions, E-HICHs carry not only the HARQ acknowledgement indicators but also TPC and SS commands. The 80 signature sequences are divided into 20 groups while each group includes 4 sequences. Every non-scheduled user is assigned only one group which are signalled by higher layer. Among the 4 sequences, the first

one is used to indicate ACK/NACK, and the other three are used to indicate the TPC/SS commands. The three sequences and their three reverse sequences are the six possible sequences used to indicate the TPC/SS combination state. The reverse sequence is constructed by reverse every bit of the sequence from 0 to 1 or from 1 to 0. The mapping between the index and the TPC/SS command is shown in table 8KE. The index is calculated according to the equation: $\text{index} = 2 * A + B$, ($A = 0, 1, 2$; $B = 0, 1$). A is the relative index of the selected sequence among the three assigned sequences and B equals to 1 when the reverse sequence is chosen, otherwise, B equals to 0. The power of the sequence used for TPC/SS indication can be set differently from the one used to indicate ACK/NACK.

Table 8KE: Mapping between the index and TPC/SS command

| index | TPC command | SS command |
|-------|-------------|--------------|
| 0 | "DOWN" | "DOWN" |
| 1 | "UP" | "DOWN" |
| 2 | "DOWN" | "UP" |
| 3 | "UP" | "UP" |
| 4 | "DOWN" | "Do Nothing" |
| 5 | "UP" | "Do Nothing" |

The acknowledgement indicator for an E-DCH transmission in TTI 'N' is carried by the E-HICH in TTI 'N+[T_A]' (T_A is determined according to the value of n_{E-HICH}). The E-HICH is thus synchronously related to those E-DCH transmissions for which it carries acknowledgement information.

5A.3.17.1 E-HICH Spreading

Multiple users' signature sequences (including the inserted spare bits) sharing the same channelisation code are combined and spread using spreading factor SF=16 as described in [8].

5A.3.17.2 E-HICH Burst Types

The burst structures for E-HICH are shown in figure 18D.

5A.3.17.3 E-HICH Training Sequences

The training sequences as described in subclause 5A.2.3 are used for the E-HICH.

5A.3.17.4 E-HICH timeslot formats

E-HICH shall use time slot format #0 from table 8F.

5A.4 Transmit Diversity for DL Physical Channels

Table 8L summarizes the different transmit diversity schemes for different downlink physical channel types in 1.28Mcps TDD that are described in [9].

Table 8L: Application of Tx diversity schemes on downlink physical channel types in 1.28Mcps TDD
"X" – can be applied, "-" – must not be applied

| Physical channel type | Open loop TxDiversity | | Closed loop TxDiversity |
|-----------------------|-----------------------|------|-------------------------|
| | TSTD | SCTD | |
| P-CCPCH | X | X | - |
| S-CCPCH | X | X | - |
| DwPCH | X | - | - |
| DPCH | X | - | X |
| PDSCH | X | X | X |
| PICH | X | X | - |
| MICH | X | X | - |
| PLCCH | X | X | - |
| HS-SCCH | - | X | X |
| HS-PDSCH | - | - | X |
| E-AGCH | -- | X | X |
| E-HICH | -- | X | -- |

(*) Note: SCTD may only be applied to physical channels when they are allocated to beacon locations.

5A.5 Beacon characteristics of physical channels

For the purpose of measurements, common physical channels that are allocated to particular locations (time slot, code) shall have particular physical characteristics, called beacon characteristics. Physical channels with beacon characteristics are called beacon channels. The location of the beacon channels is called beacon location. The beacon channels shall provide the beacon function, i.e. a reference power level at the beacon location, regularly existing in each subframe. Thus, beacon channels must be present in each subframe.

5A.5.1 Location of beacon channels

The beacon location is described as follows :

The beacon function shall be provided by the physical channels that are allocated to channelisation code $C_{Q=16}^{(k=1)}$ and $C_{Q=16}^{(k=2)}$ in Timeslot#0.

Note that by this definition the P-CCPCH always has beacon characteristics.

5A.5.2 Physical characteristics of the beacon function

The beacon channels shall have the following physical characteristics.

They:

- are transmitted with reference power;
- are transmitted without beamforming;
- use midamble $m^{(1)}$ and $m^{(2)}$ exclusively in this time slot

The reference power corresponds to the sum of the power allocated to both midambles $m^{(1)}$ and $m^{(2)}$. Two possibilities exist:

- If SCTD antenna diversity is not applied to beacon channels, all the reference power of any beacon channel is allocated to $m^{(1)}$.

- If SCTD antenna diversity is applied to beacon channels, for any beacon channel midambles $m^{(1)}$ and $m^{(2)}$ are each allocated half of the reference power.

5A.6 Midamble Allocation for Physical Channels

The midamble allocation schemes for physical channels are the same as in the 3.84 Mcps TDD option. The associations between channelisation codes and midambles for the default and common midamble allocation differ from the 3.84 Mcps TDD option. The associations are given in Annex AA.2 [Association between Midambles and channelisation Codes] and BA [Signalling of the number of channelisation codes for the DL common midamble case for 1.28 Mcps TDD] respectively

5A.6.1 Midamble Allocation for DL Physical Channels

Beacon channels shall always use the reserved midambles $m^{(1)}$ and $m^{(2)}$, see 5A.5. For the other DL physical channels that are located in timeslot #0, midambles shall be allocated based on the default midamble allocation scheme, using the association for $K=8$ midambles. For all other DL physical channels, the midamble is explicitly assigned by higher layers or allocated by layer 1.

5A.6.1.1 Midamble Allocation by signalling from higher layers

The midamble allocation by signalling is the same like in the 3.84 Mcps TDD cf. [5.6.1.1 Midamble allocation by signalling from higher layers]

5A.6.1.2 Midamble Allocation by layer 1

5A.6.1.2.1 Default midamble

The default midamble allocation by layer 1 is the same like in the 3.84 Mcps TDD cf. [5.6.1.2.1 Default midamble]. The associations between midambles and channelisation codes are given in Annex AA.2 [Association between Midambles and channelisation Codes].

5A.6.1.2.2 Common Midamble

The common midamble allocation by layer 1 is the same like in the 3.84 Mcps TDD cf. [5.6.1.2.2 Common midamble]. The respective associations are given in Annex BA [Signalling of the number of channelisation codes for the DL common midamble case for 1.28 Mcps TDD].

5A.6.2 Midamble Allocation for UL Physical Channels

The midamble allocation for UL Physical Channels is the same as in the 3.84 Mcps TDD cf. [5.6.2 Midamble allocation for UL Physical Channels]

5A.7 Midamble Transmit Power

The setting of the midamble transmit power is done as in the 3.84 Mcps TDD option cf. 5.7 "Midamble Transmit Power"

5B Physical channels for the 7.68 Mcps option

5B.1 General

All physical channels take a three-layer structure with respect to timeslots, radio frames and system frame numbering (SFN). Depending on the resource allocation, the configuration of radio frames or timeslots becomes different. All physical channels need a guard period in every timeslot. The time slots are used in the sense of a TDMA component to separate different user signals in the time domain. The physical channel signal format is presented in figure 18AA.

A physical channel in the 7.68Mcps TDD option is a burst, which is transmitted in a particular timeslot within allocated Radio Frames. The allocation can be continuous, i.e. the time slot in every frame is allocated to the physical channel or discontinuous, i.e. the time slot in a subset of all frames is allocated only. A burst is the combination of two data parts, a midamble part and a guard period. The duration of a burst is one time slot. Several bursts can be transmitted at the same time from one transmitter. In this case, the data parts must use different OVSF channelisation codes, but the same scrambling code. The midamble parts are either identically or differently shifted versions of a cell-specific basic midamble code, see section 5B.3.3.

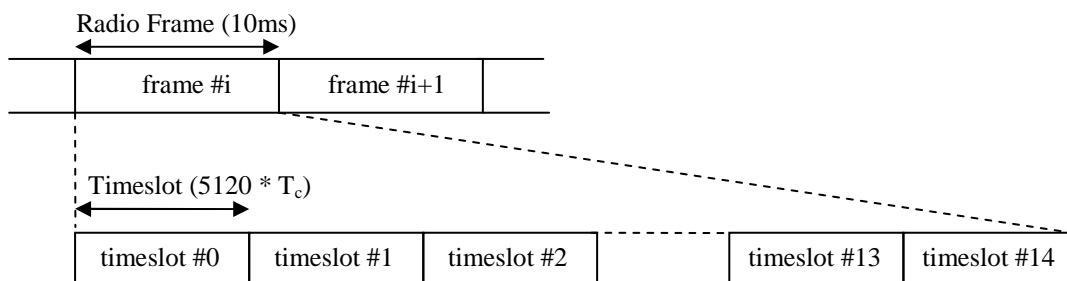


Figure 18AA: Physical channel signal format

The data part of the burst is spread with a combination of channelisation code and scrambling code. The channelisation code is an OVSF code, that can have a spreading factor of 1, 2, 4, 8, 16 or 32. The data rate of the physical channel depends on the used spreading factor of the used OVSF code.

The midamble part of the burst can contain two different types of midambles: a short one of length 512 chips, or a long one of length 1024 chips. The data rate of the physical channel depends on the used midamble length.

So a physical channel is defined by frequency, timeslot, channelisation code, burst type and Radio Frame allocation. The scrambling code and the basic midamble code are broadcast and may be constant within a cell. When a physical channel is established, a start frame is given. The physical channels can either be of infinite duration, or of a duration defined by allocation.

5B.2 Frame structure

The TDMA frame has a duration of 10 ms and is subdivided into 15 time slots (TS) of $5120 \cdot T_c$ duration each. A time slot corresponds to 5120 chips. The physical content of the time slots are the bursts of corresponding length as described in subclause 5B.3.2.

Each 10 ms frame consists of 15 time slots, each allocated to either the uplink or the downlink (figure 18AB). With such a flexibility, the TDD mode can be adapted to different environments and deployment scenarios. In any configuration at least one time slot has to be allocated for the downlink and at least one time slot has to be allocated for the uplink.

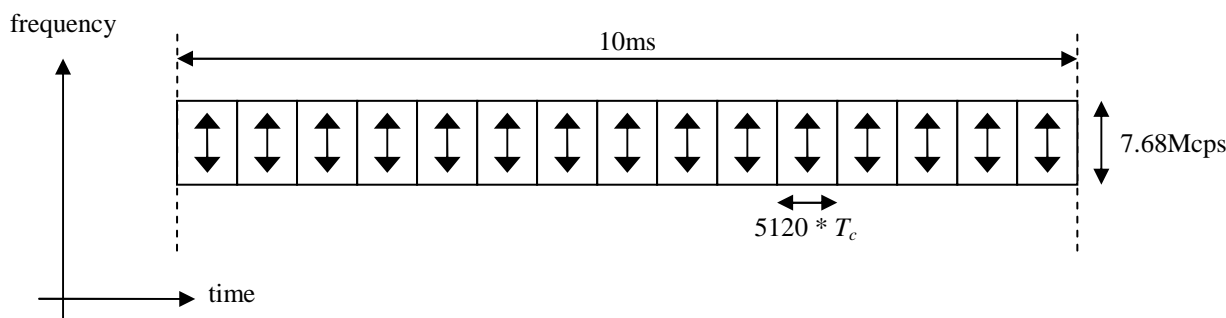


Figure 18AB: The TDD frame structure

Examples for multiple and single switching point configurations as well as for symmetric and asymmetric UL/DL allocations are given in figure 3.

5B.3 Dedicated physical channel (DPCH)

The DCH as described in subclause 4.1.1 is mapped onto the dedicated physical channel.

5B.3.1 Spreading

Spreading is applied to the data part of the physical channels and consists of two operations. The first is the channelisation operation, which transforms every data symbol into a number of chips, thus increasing the bandwidth of the signal. The number of chips per data symbol is called the Spreading Factor (SF). The second operation is the scrambling operation, where a scrambling code is applied to the spread signal. Details on channelisation and scrambling operation can be found in [8].

5B.3.1.1 Spreading for Downlink Physical Channels

Downlink physical channels shall use SF=32 or SF=1.

Multiple parallel physical channels can be used to support higher data rates. Within a timeslot, parallel physical channels shall be transmitted using different channelisation codes, see [8]. These codes with SF =32 are generated as described in [8].

5B.3.1.2 Spreading for Uplink Physical Channels

The range of spreading factors that may be used for uplink physical channels shall range from 32 down to 1. For each physical channel an individual minimum spreading factor SF_{min} is transmitted by means of the higher layers. There are two options that are indicated by UTRAN:

1. The UE shall use the spreading factor SF_{min} , independent of the current TFC.
2. The UE shall autonomously increase the spreading factor depending on the current TFC.

If the UE autonomously changes the SF, it shall always vary the channelisation code along the branch with the higher code numbering of the allowed OVFS sub tree, as depicted in [8]. In the event that code hopping is configured by higher layers, the allowed OVFS sub-tree is that subtended by the effective allocated OVFS code after the hop sequence has been applied to the allocated OVFS code (see [9]).

For multicode transmission a UE shall use a maximum of two physical channels per timeslot simultaneously. These two parallel physical channels shall be transmitted using different channelisation codes, see [8].

5B.3.2 Burst Types

Three types of bursts are defined. All of them consist of two data symbol fields, a midamble and a guard period, the lengths of which are different for the individual burst types. Thus, the number of data symbols in a burst depends on the SF and the burst type, as depicted in table 8AA.

Table 8AA: Number of data symbols (N) for burst type 1, 2, and 3

| Spreading factor (SF) | Burst Type 1 | Burst Type 2 | Burst Type 3 |
|-----------------------|--------------|--------------|--------------|
| 1 | 3904 | 4416 | 3712 |
| 2 | 1952 | 2208 | 1856 |
| 4 | 976 | 1104 | 928 |
| 8 | 488 | 552 | 464 |
| 16 | 244 | 276 | 232 |
| 32 | 122 | 138 | 116 |

The support of all three burst types is mandatory for the UE. The three different bursts defined here are well suited for different applications, as described in the following sections.

5B.3.2.1 Burst Type 1

Burst type 1 can be used for uplink and downlink. Due to its longer midamble field this burst type supports the construction of a larger number of training sequences. The maximum number of training sequences depends on the cell configuration. For burst type 1 this number may be 4, 8, or 16.

The data fields of burst type 1 are 1952 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 8AA above. The midamble of burst type 1 has a length of 1024 chips. The guard period for the burst type 1 is 192 chip periods long. Burst type 1 is shown in Figure 18AC. The contents of the burst fields are described in table 8AB.

Table 8AB: The contents of burst type 1 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | | Contents of field |
|------------------|--------------------------|----------------------------|--|-------------------|
| 0-1951 | 1952 | Cf table 8AA | | Data symbols |
| 1952-2975 | 1024 | - | | Midamble |
| 2976-4927 | 1952 | Cf table 8AA | | Data symbols |
| 4928-5119 | 192 | - | | Guard period |

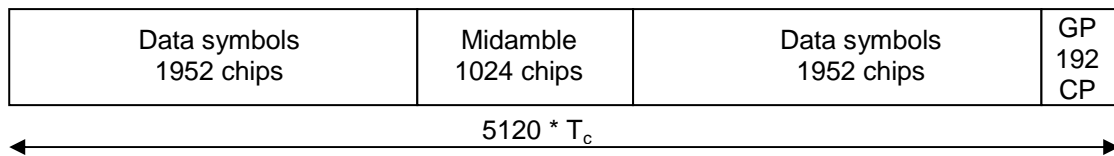


Figure 18AC: Burst structure of burst type 1. GP denotes the guard period and CP the chip periods

5B.3.2.2 Burst Type 2

Burst type 2 can be used for uplink and downlink. It offers a longer data field than burst type 1 at the cost of a shorter midamble. Due to the shorter midamble field the burst type 2 supports a maximum number of training sequences of 4 or 8 only, depending on the cell configuration.

The data fields of the burst type 2 are 2208 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 8AA above. The guard period for the burst type 2 is 192 chip periods long. Burst type 2 is shown in Figure 18AD. The contents of the burst fields are described in table 8AC.

Table 8AC: The contents of burst type 2 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | | Contents of field |
|------------------|--------------------------|----------------------------|--|-------------------|
| 0-2207 | 2208 | cf table 8AA | | Data symbols |
| 2208-2719 | 512 | - | | Midamble |
| 2720-4927 | 2208 | cf table 8AA | | Data symbols |
| 4928-5119 | 192 | - | | Guard period |

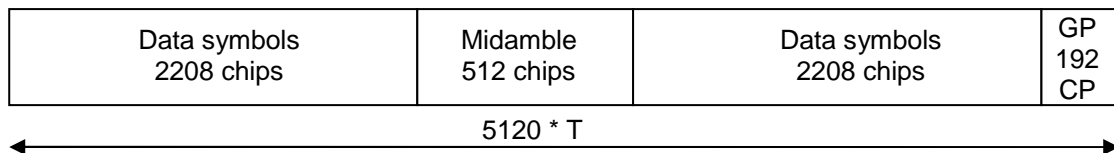


Figure 18AD: Burst structure of the burst type 2. GP denotes the guard period and CP the chip periods

5B.3.2.3 Burst Type 3

Burst type 3 is used for uplink only. Due to the longer guard period it is suitable for initial access or access to a new cell after handover. It offers the same number of training sequences as burst type 1.

The data fields of the burst type 3 have a length of 1952 chips and 1760 chips, respectively. The corresponding number of symbols depends on the spreading factor, as indicated in table 8AA above. The midamble of burst type 3 has a length of 1024 chips. The guard period for the burst type 3 is 384 chip periods long. Burst type 3 is shown in Figure 18AE. The contents of the burst fields are described in table 8AD.

Table 8AD: The contents of burst type 3 fields

| Chip number (CN) | Length of field in chips | Length of field in symbols | Contents of field |
|------------------|--------------------------|----------------------------|-------------------|
| 0-1951 | 1952 | Cf table 8AA | Data symbols |
| 1952-2975 | 1024 | - | Midamble |
| 2976-4735 | 1760 | Cf table 8AA | Data symbols |
| 4736-5119 | 384 | - | Guard period |

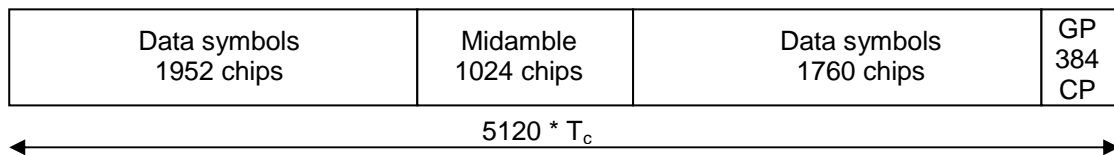


Figure 18AE: Burst structure of the burst type 3. GP denotes the guard period and CP the chip periods

5B.3.2.4 Transmission of TFCI

All burst types 1, 2 and 3 provide the possibility for transmission of TFCI.

The transmission of TFCI is negotiated at call setup and can be re-negotiated during the call. For each CCTrCH it is indicated by higher layer signalling, which TFCI format is applied. Additionally for each allocated timeslot it is signalled individually whether that timeslot carries the TFCI or not. The TFCI is always present in the first timeslot in a radio frame for each CCTrCH. If a time slot contains the TFCI, then it is always transmitted using the physical channel with the lowest physical channel sequence number (*p*) in that timeslot. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

The transmission of TFCI is done in the data parts of the respective physical channel. In DL the TFCI code word bits and data bits are subject to the same spreading procedure as depicted in [8]. In UL, independent of the SF that is applied to the data symbols in the burst, the data in the TFCI field are always spread with SF=32 using the channelisation code in the branch with the highest code numbering of the allowed OVSF sub tree, as depicted in [8]. Hence the midamble structure and length is not changed. The TFCI code word is to be transmitted directly adjacent to the midamble, possibly after the TPC. Figure 18AF shows the position of the TFCI code word in a traffic burst in downlink. Figure 18AG shows the position of the TFCI code word in a traffic burst in uplink.

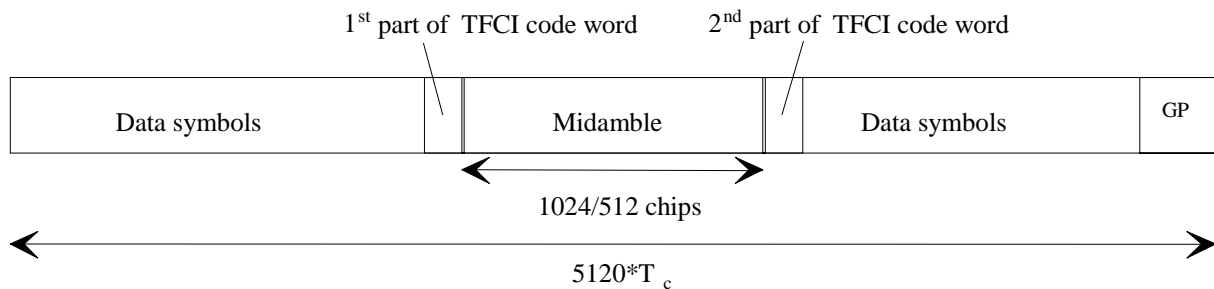


Figure 18AF: Position of the TFCI code word in the traffic burst in case of downlink

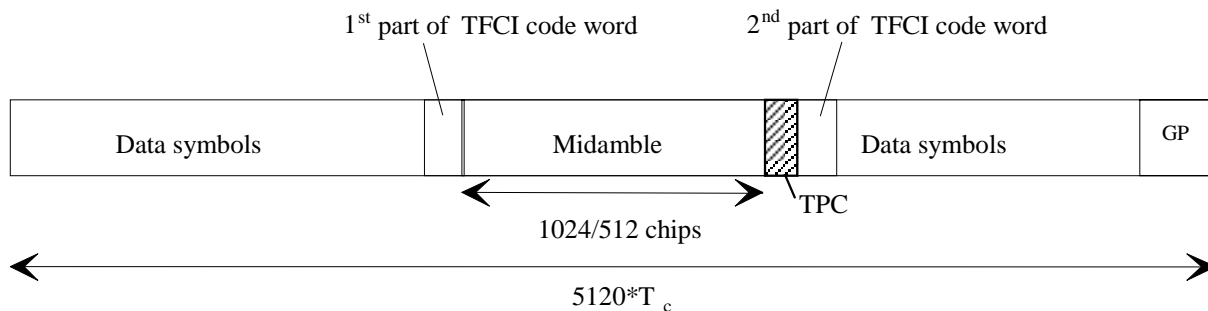


Figure 18AG: Position of the TFCI code word in the traffic burst in case of uplink

Two examples of TFCI transmission in the case of multiple DPCHs used for a connection are given in the Figure 18AH and Figure 18AI below. Combinations of the two schemes shown are also applicable.

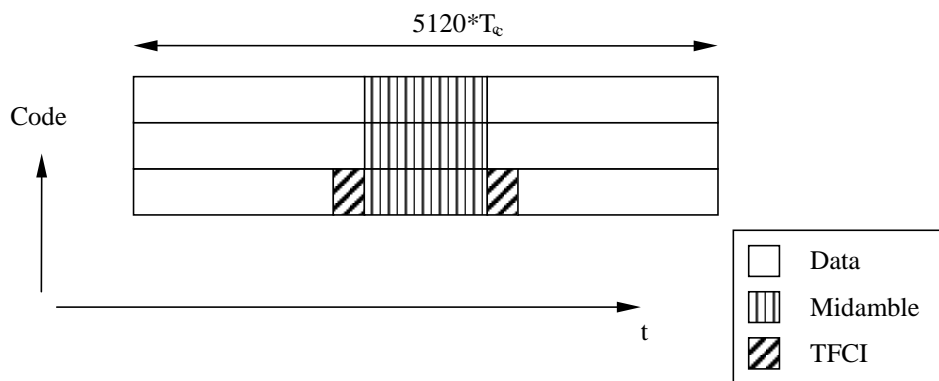


Figure 18AH: Example of TFCI transmission with physical channels multiplexed in code domain

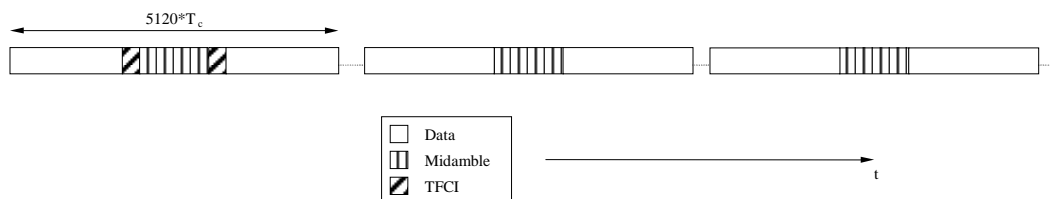


Figure 18AI: Example of TFCI transmission with physical channels multiplexed in time domain

5B.3.2.5 Transmission of TPC

All burst types 1, 2 and 3 for dedicated and shared channels provide the possibility for transmission of TPC in uplink.

The transmission of TPC is done in the data parts of the traffic burst. Independent of the SF that is applied to the data symbols in the burst, the data in the TPC field are always spread with SF=32 using the channelisation code in the branch with the highest code numbering of the allowed OVFSF sub tree, as depicted in [8]. Hence the midamble structure and length is not changed. The TPC information is to be transmitted directly after the midamble. Figure 18AJ shows the position of the TPC in a traffic burst.

For every user the TPC information shall be transmitted at least once per transmitted frame. If a TFCI is applied for a CCTrCH, TPC shall be transmitted with the same channelization codes and in the same timeslots as the TFCI. If no TFCI is applied for a CCTrCH, TPC shall be transmitted using the physical channel corresponding to physical channel sequence number $p=1$. Physical channel sequence numbering is determined by the rate matching function and is described in [7].

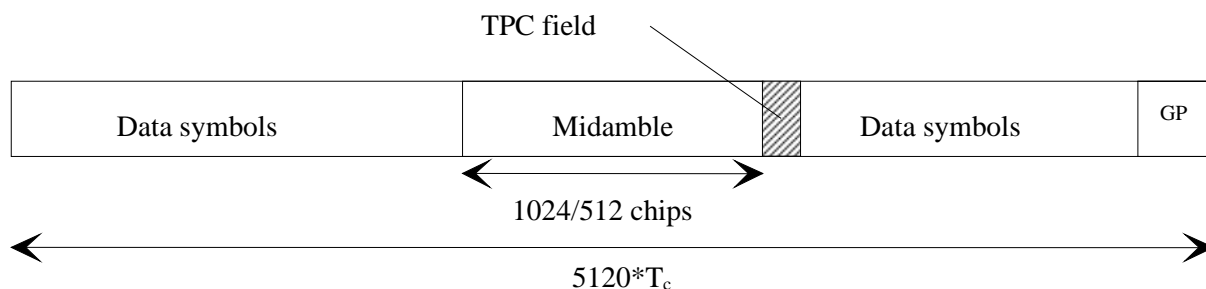


Figure 18AJ: Position of TPC information in the traffic burst

The length of the TPC field is N_{TPC} bits. The TPC field is formed via repetition encoding a single bit b_{TPC} , N_{TPC} times.

The relationship between b_{TPC} and the TPC command is shown in table 8AE.

Table 8AE: TPC bit pattern

| b_{TPC} | TPC command | Meaning |
|-----------|-------------|-------------------|
| 0 | 'Down' | Decrease Tx Power |
| 1 | 'Up' | Increase Tx Power |

5B.3.2.6 Timeslot formats

5B.3.2.6.1 Downlink timeslot formats

The downlink timeslot format depends on the spreading factor, midamble length and on the number of TFCI code word bits, as depicted in the table 8AF.

Table 8AF: Time slot formats for the Downlink

| Slot Format # | Spreading Factor | Midamble length (chips) | N_{TFCI} code word (bits) | Bits/slot | $N_{Data/Slot}$ (bits) | $N_{data/data\ field}$ (bits) |
|---------------|------------------|-------------------------|-----------------------------|-----------|------------------------|-------------------------------|
| 0 | 32 | 1024 | 0 | 244 | 244 | 122 |
| 1 | 32 | 1024 | 4 | 244 | 240 | 120 |
| 2 | 32 | 1024 | 8 | 244 | 236 | 118 |
| 3 | 32 | 1024 | 16 | 244 | 228 | 114 |
| 4 | 32 | 1024 | 32 | 244 | 212 | 106 |
| 5 | 32 | 512 | 0 | 276 | 276 | 138 |
| 6 | 32 | 512 | 4 | 276 | 272 | 136 |
| 7 | 32 | 512 | 8 | 276 | 268 | 134 |
| 8 | 32 | 512 | 16 | 276 | 260 | 130 |
| 9 | 32 | 512 | 32 | 276 | 244 | 122 |
| 10 | 1 | 1024 | 0 | 7808 | 7808 | 3904 |
| 11 | 1 | 1024 | 4 | 7808 | 7804 | 3902 |
| 12 | 1 | 1024 | 8 | 7808 | 7800 | 3900 |
| 13 | 1 | 1024 | 16 | 7808 | 7792 | 3896 |
| 14 | 1 | 1024 | 32 | 7808 | 7776 | 3888 |
| 15 | 1 | 512 | 0 | 8832 | 8832 | 4416 |
| 16 | 1 | 512 | 4 | 8832 | 8828 | 4414 |

| Slot Format # | Spreading Factor | Midamble length (chips) | N _{TFCI} code word (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data field} (bits) |
|---------------|------------------|-------------------------|------------------------------------|-----------|-------------------------------|-------------------------------------|
| 17 | 1 | 512 | 8 | 8832 | 8824 | 4412 |
| 18 | 1 | 512 | 16 | 8832 | 8816 | 4408 |
| 19 | 1 | 512 | 32 | 8832 | 8800 | 4400 |

5B.3.2.6.2 Uplink timeslot formats

The uplink timeslot format depends on the spreading factor, midamble length, guard period length and on the number of TFCI code word bits. Due to TPC, different amount of bits are mapped to the two data fields. The timeslot formats are depicted in the table 8AG. Note that slot format #90 shall only be used for HS_SICH.

Table 8AG: Time slot formats for the Uplink

| Slot Format # | Spreading Factor | Midamble length (chips) | Guard Period (chips) | N _{TFCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|------------------|-------------------------|----------------------|------------------------------------|-------------------------|-----------|-------------------------------|--|--|
| 0 | 32 | 1024 | 192 | 0 | 0 | 244 | 244 | 122 | 122 |
| 1 | 32 | 1024 | 192 | 0 | 2 | 244 | 242 | 122 | 120 |
| 2 | 32 | 1024 | 192 | 4 | 2 | 244 | 238 | 120 | 118 |
| 3 | 32 | 1024 | 192 | 8 | 2 | 244 | 234 | 118 | 116 |
| 4 | 32 | 1024 | 192 | 16 | 2 | 244 | 226 | 114 | 112 |
| 5 | 32 | 1024 | 192 | 32 | 2 | 244 | 210 | 106 | 104 |
| 6 | 32 | 512 | 192 | 0 | 0 | 276 | 276 | 138 | 138 |
| 7 | 32 | 512 | 192 | 0 | 2 | 276 | 274 | 138 | 136 |
| 8 | 32 | 512 | 192 | 4 | 2 | 276 | 270 | 136 | 134 |
| 9 | 32 | 512 | 192 | 8 | 2 | 276 | 266 | 134 | 132 |
| 10 | 32 | 512 | 192 | 16 | 2 | 276 | 258 | 130 | 128 |
| 11 | 32 | 512 | 192 | 32 | 2 | 276 | 242 | 122 | 120 |
| 12 | 16 | 1024 | 192 | 0 | 0 | 488 | 488 | 244 | 244 |
| 13 | 16 | 1024 | 192 | 0 | 2 | 486 | 484 | 244 | 240 |
| 14 | 16 | 1024 | 192 | 4 | 2 | 482 | 476 | 240 | 236 |
| 15 | 16 | 1024 | 192 | 8 | 2 | 478 | 468 | 236 | 232 |
| 16 | 16 | 1024 | 192 | 16 | 2 | 470 | 452 | 228 | 224 |
| 17 | 16 | 1024 | 192 | 32 | 2 | 454 | 420 | 212 | 208 |
| 18 | 16 | 512 | 192 | 0 | 0 | 552 | 552 | 276 | 276 |
| 19 | 16 | 512 | 192 | 0 | 2 | 550 | 548 | 276 | 272 |
| 20 | 16 | 512 | 192 | 4 | 2 | 546 | 540 | 272 | 268 |
| 21 | 16 | 512 | 192 | 8 | 2 | 542 | 532 | 268 | 264 |
| 22 | 16 | 512 | 192 | 16 | 2 | 534 | 516 | 260 | 256 |
| 23 | 16 | 512 | 192 | 32 | 2 | 518 | 484 | 244 | 240 |
| 24 | 8 | 1024 | 192 | 0 | 0 | 976 | 976 | 488 | 488 |
| 25 | 8 | 1024 | 192 | 0 | 2 | 970 | 968 | 488 | 480 |
| 26 | 8 | 1024 | 192 | 4 | 2 | 958 | 952 | 480 | 472 |
| 27 | 8 | 1024 | 192 | 8 | 2 | 946 | 936 | 472 | 464 |
| 28 | 8 | 1024 | 192 | 16 | 2 | 922 | 904 | 456 | 448 |
| 29 | 8 | 1024 | 192 | 32 | 2 | 874 | 840 | 424 | 416 |
| 30 | 8 | 512 | 192 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 31 | 8 | 512 | 192 | 0 | 2 | 1098 | 1096 | 552 | 544 |
| 32 | 8 | 512 | 192 | 4 | 2 | 1086 | 1080 | 544 | 536 |
| 33 | 8 | 512 | 192 | 8 | 2 | 1074 | 1064 | 536 | 528 |
| 34 | 8 | 512 | 192 | 16 | 2 | 1050 | 1032 | 520 | 512 |

| Slot Format # | Spreading Factor | Midamble length (chips) | Guard Period (chips) | N _{TFCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|----------------------|------------------------------------|-------------------------|-----------|-------------------------------|--|--|
| 35 | 8 | 512 | 192 | 32 | 2 | 1002 | 968 | 488 | 480 |
| 36 | 4 | 1024 | 192 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 37 | 4 | 1024 | 192 | 0 | 2 | 1938 | 1936 | 976 | 960 |
| 38 | 4 | 1024 | 192 | 4 | 2 | 1910 | 1904 | 960 | 944 |
| 39 | 4 | 1024 | 192 | 8 | 2 | 1882 | 1872 | 944 | 928 |
| 40 | 4 | 1024 | 192 | 16 | 2 | 1826 | 1808 | 912 | 896 |
| 41 | 4 | 1024 | 192 | 32 | 2 | 1714 | 1680 | 848 | 832 |
| 42 | 4 | 512 | 192 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 43 | 4 | 512 | 192 | 0 | 2 | 2194 | 2192 | 1104 | 1088 |
| 44 | 4 | 512 | 192 | 4 | 2 | 2166 | 2160 | 1088 | 1072 |
| 45 | 4 | 512 | 192 | 8 | 2 | 2138 | 2128 | 1072 | 1056 |
| 46 | 4 | 512 | 192 | 16 | 2 | 2082 | 2064 | 1040 | 1024 |
| 47 | 4 | 512 | 192 | 32 | 2 | 1970 | 1936 | 976 | 960 |
| 48 | 2 | 1024 | 192 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 49 | 2 | 1024 | 192 | 0 | 2 | 3874 | 3872 | 1952 | 1920 |
| 50 | 2 | 1024 | 192 | 4 | 2 | 3814 | 3808 | 1920 | 1888 |
| 51 | 2 | 1024 | 192 | 8 | 2 | 3754 | 3744 | 1888 | 1856 |
| 52 | 2 | 1024 | 192 | 16 | 2 | 3634 | 3616 | 1824 | 1792 |
| 53 | 2 | 1024 | 192 | 32 | 2 | 3394 | 3360 | 1696 | 1664 |
| 54 | 2 | 512 | 192 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 55 | 2 | 512 | 192 | 0 | 2 | 4386 | 4384 | 2208 | 2176 |
| 56 | 2 | 512 | 192 | 4 | 2 | 4326 | 4320 | 2176 | 2144 |
| 57 | 2 | 512 | 192 | 8 | 2 | 4266 | 4256 | 2144 | 2112 |
| 58 | 2 | 512 | 192 | 16 | 2 | 4146 | 4128 | 2080 | 2048 |
| 59 | 2 | 512 | 192 | 32 | 2 | 3906 | 3872 | 1952 | 1920 |
| 59a | 1 | 1024 | 192 | 0 | 0 | 7808 | 7808 | 3904 | 3904 |
| 59b | 1 | 1024 | 192 | 0 | 2 | 7746 | 7744 | 3904 | 3840 |
| 59c | 1 | 1024 | 192 | 4 | 2 | 7622 | 7616 | 3840 | 3776 |
| 59d | 1 | 1024 | 192 | 8 | 2 | 7498 | 7488 | 3776 | 3712 |
| 59e | 1 | 1024 | 192 | 16 | 2 | 7250 | 7232 | 3648 | 3584 |
| 59f | 1 | 1024 | 192 | 32 | 2 | 6754 | 6720 | 3392 | 3328 |
| 59g | 1 | 512 | 192 | 0 | 0 | 8832 | 8832 | 4416 | 4416 |
| 59h | 1 | 512 | 192 | 0 | 2 | 8770 | 8768 | 4416 | 4352 |
| 59i | 1 | 512 | 192 | 4 | 2 | 8646 | 8640 | 4352 | 4288 |
| 59j | 1 | 512 | 192 | 8 | 2 | 8522 | 8512 | 4288 | 4224 |
| 59k | 1 | 512 | 192 | 16 | 2 | 8274 | 8256 | 4160 | 4096 |
| 59l | 1 | 512 | 192 | 32 | 2 | 7778 | 7744 | 3904 | 3840 |
| 60 | 32 | 1024 | 384 | 0 | 0 | 232 | 232 | 122 | 110 |
| 61 | 32 | 1024 | 384 | 0 | 2 | 232 | 230 | 122 | 108 |
| 62 | 32 | 1024 | 384 | 4 | 2 | 232 | 226 | 120 | 106 |
| 63 | 32 | 1024 | 384 | 8 | 2 | 232 | 222 | 118 | 104 |
| 64 | 32 | 1024 | 384 | 16 | 2 | 232 | 214 | 114 | 100 |
| 65 | 32 | 1024 | 384 | 32 | 2 | 232 | 198 | 106 | 92 |
| 66 | 16 | 1024 | 384 | 0 | 0 | 464 | 464 | 244 | 220 |
| 67 | 16 | 1024 | 384 | 0 | 2 | 462 | 460 | 244 | 216 |
| 68 | 16 | 1024 | 384 | 4 | 2 | 458 | 452 | 240 | 212 |
| 69 | 16 | 1024 | 384 | 8 | 2 | 454 | 444 | 236 | 208 |
| 70 | 16 | 1024 | 384 | 16 | 2 | 446 | 428 | 228 | 200 |
| 71 | 16 | 1024 | 384 | 32 | 2 | 430 | 396 | 212 | 184 |

| Slot Format # | Spreading Factor | Midamble length (chips) | Guard Period (chips) | N _{TFCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field(1) (bits) | N _{data/data} field(2) (bits) |
|---------------|------------------|-------------------------|----------------------|------------------------------------|-------------------------|-----------|-------------------------------|--|--|
| 72 | 8 | 1024 | 384 | 0 | 0 | 928 | 928 | 488 | 440 |
| 73 | 8 | 1024 | 384 | 0 | 2 | 922 | 920 | 488 | 432 |
| 74 | 8 | 1024 | 384 | 4 | 2 | 910 | 904 | 480 | 424 |
| 75 | 8 | 1024 | 384 | 8 | 2 | 898 | 888 | 472 | 416 |
| 76 | 8 | 1024 | 384 | 16 | 2 | 874 | 856 | 456 | 400 |
| 77 | 8 | 1024 | 384 | 32 | 2 | 826 | 792 | 424 | 368 |
| 78 | 4 | 1024 | 384 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 79 | 4 | 1024 | 384 | 0 | 2 | 1842 | 1840 | 976 | 864 |
| 80 | 4 | 1024 | 384 | 4 | 2 | 1814 | 1808 | 960 | 848 |
| 81 | 4 | 1024 | 384 | 8 | 2 | 1786 | 1776 | 944 | 832 |
| 82 | 4 | 1024 | 384 | 16 | 2 | 1730 | 1712 | 912 | 800 |
| 83 | 4 | 1024 | 384 | 32 | 2 | 1618 | 1584 | 848 | 736 |
| 84 | 2 | 1024 | 384 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |
| 85 | 2 | 1024 | 384 | 0 | 2 | 3682 | 3680 | 1952 | 1728 |
| 86 | 2 | 1024 | 384 | 4 | 2 | 3622 | 3616 | 1920 | 1696 |
| 87 | 2 | 1024 | 384 | 8 | 2 | 3562 | 3552 | 1888 | 1664 |
| 88 | 2 | 1024 | 384 | 16 | 2 | 3442 | 3424 | 1824 | 1600 |
| 89 | 2 | 1024 | 384 | 32 | 2 | 3202 | 3168 | 1696 | 1472 |
| 89a | 1 | 1024 | 384 | 0 | 0 | 7424 | 7424 | 3904 | 3520 |
| 89b | 1 | 1024 | 384 | 0 | 2 | 7362 | 7360 | 3904 | 3456 |
| 89c | 1 | 1024 | 384 | 4 | 2 | 7238 | 7232 | 3840 | 3392 |
| 89d | 1 | 1024 | 384 | 8 | 2 | 7114 | 7104 | 3776 | 3328 |
| 89e | 1 | 1024 | 384 | 16 | 2 | 6866 | 6848 | 3648 | 3200 |
| 89f | 1 | 1024 | 384 | 32 | 2 | 6370 | 6336 | 3392 | 2944 |
| 90 | 32 | 1024 | 192 | 0 | 8 | 244 | 236 | 122 | 114 |

5B.3.3 Training sequences for spread bursts

In this subclause, the training sequences for usage as midambles in burst type 1, 2 and 3 (see subclause 5B.3.2) are defined. The training sequences, i.e. midambles, of different users active in the same cell and same time slot are cyclically shifted versions of one cell-specific single basic midamble code. The applicable basic midamble codes are given in Annex AB.1 and Annex AB.2. As different basic midamble codes are required for different burst formats, Annex AB.1 shows the basic midamble codes \mathbf{m}_{pL} for burst type 1 and 3, and Annex AB.2 shows \mathbf{m}_{pS} for burst type 2. It should be noted that burst type 2 must not be mixed with burst type 1 or 3 in the same timeslot of one cell.

The basic midamble codes in Annex AB.1 and Annex AB.2 are listed in hexadecimal notation. The binary form of the basic midamble code shall be derived according to table 6 (section 5.2.3).

For each particular basic midamble code, its binary representation can be written as a vector \mathbf{m}_p :

$$\mathbf{m}_p = (m_1, m_2, \dots, m_p) \quad (1)$$

According to Annex AB.1, the size of this vector \mathbf{m}_p is $P=912$ for burst type 1 and 3. According to Annex AB.2, the size of this vector \mathbf{m}_p is $P=456$ for burst type 2. As QPSK modulation is used, the training sequences are transformed into a complex form, denoted as the complex vector $\underline{\mathbf{m}}_p$:

$$\underline{\mathbf{m}}_p = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_p) \quad (2)$$

The elements \underline{m}_i of $\underline{\mathbf{m}}_p$ are derived from elements m_i of \mathbf{m}_p using equation (3):

$$\underline{m}_i = (j)^i \cdot m_i \text{ for all } i = 1, \dots, P \quad (3)$$

Hence, the elements \underline{m}_i of the complex basic midamble code are alternating real and imaginary.

To derive the required training sequences (different shifts), this vector $\underline{\mathbf{m}}_P$ is periodically extended to the size:

$$i_{\max} = L_m + (K'-1)W + \lfloor P/K \rfloor \quad (4)$$

Notes on equation (4):

- L_m : Midamble length
- K' : Maximum number of different midamble shifts in a cell, when no intermediate shifts are used. This value depends on the midamble length.
- K : Maximum number of different midamble shifts in a cell, when intermediate shifts are used, $K=2K'$. This value depends on the midamble length.
- W : Shift between the midambles, when the number of midambles is K' .
- $\lfloor x \rfloor$ denotes the largest integer smaller or equal to x

Allowed values for L_m , K' and W are given in Annex AB.1 and Annex AB.2.

So we obtain a new vector $\underline{\mathbf{m}}$ containing the periodic basic midamble sequence:

$$\underline{\mathbf{m}} = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{i_{\max}}) = (\underline{m}_1, \underline{m}_2, \dots, \underline{m}_{L_m + (K'-1)W + \lfloor P/K \rfloor}) \quad (5)$$

The first P elements of this vector $\underline{\mathbf{m}}$ are the same ones as in vector $\underline{\mathbf{m}}_P$, the following elements repeat the beginning:

$$\underline{m}_i = \underline{m}_{i-P} \text{ for the subset } i = (P+1), \dots, i_{\max} \quad (6)$$

Using this periodic basic midamble sequence $\underline{\mathbf{m}}$ for each shift k a midamble $\underline{\mathbf{m}}^{(k)}$ of length L_m is derived, which can be written as a shift specific vector:

$$\underline{\mathbf{m}}^{(k)} = (\underline{m}_1^{(k)}, \underline{m}_2^{(k)}, \dots, \underline{m}_{L_m}^{(k)}) \quad (7)$$

The L_m midamble elements $\underline{m}_i^{(k)}$ are generated for each midamble of the first K' shifts ($k = 1, \dots, K'$) based on:

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K'-k)W} \text{ with } i = 1, \dots, L_m \text{ and } k = 1, \dots, K' \quad (8)$$

The elements of midambles for the second K' shifts ($k = (K'+1), \dots, K = (K'+1), \dots, 2K'$) are generated based on a slight modification of this formula introducing intermediate shifts:

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K-k)W + \lfloor P/K \rfloor} \text{ with } i = 1, \dots, L_m \text{ and } k = K'+1, \dots, K-1 \quad (9)$$

$$\underline{m}_i^{(k)} = \underline{m}_{i+(K'-1)W + \lfloor P/K \rfloor} \text{ with } i = 1, \dots, L_m \text{ and } k = K \quad (10)$$

The number K_{Cell} of midambles that is supported in each cell can be smaller than K , depending on the cell size and the possible delay spreads, see Annex AB. The number K_{Cell} is signalled by higher layers. The midamble sequences derived according to equations (7) to (10) have complex values and are not subject to channelisation or scrambling process, i.e. the elements $\underline{m}_i^{(k)}$ represent complex chips for usage in the pulse shaping process at modulation.

The term "a midamble code set" or "a midamble code family" denotes K specific midamble codes $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$, based on a single basic midamble code $\underline{\mathbf{m}}_P$ according to (1).

5B.3.4 Beamforming

Support for beamforming is identical to 3.84Mcps TDD cf. [5.2.4 Beamforming].

5B.4 Common physical channels

5B.4.1 Primary common control physical channel (P-CCPCH)

The BCH as described in subclause 4.1.2 is mapped onto the Primary Common Control Physical Channel (P-CCPCH). The position (time slot / code) of the P-CCPCH is known from the Physical Synchronisation Channel (PSCH), see subclause 5B.4.4.

5B.4.1.1 P-CCPCH Spreading

The P-CCPCH uses fixed spreading with a spreading factor $SF = 32$ as described in subclause 5B.3.1.1. The P-CCPCH always uses channelisation code $C_{Q=32}^{(k=1)}$.

5B.4.1.2 P-CCPCH Burst Types

Burst type 1 as described in subclause 5B.2.2 is used for the P-CCPCH. No TFCI is applied for the P-CCPCH.

5B.4.1.3 P-CCPCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5B.3.3 are used for the P-CCPCH.

5B.4.2 Secondary common control physical channel (S-CCPCH)

PCH and FACH as described in subclause 4.1.2 are mapped onto one or more secondary common control physical channels (S-CCPCH). In this way the capacity of PCH and FACH can be adapted to the different requirements.

5B.4.2.1 S-CCPCH Spreading

The S-CCPCH uses fixed spreading with a spreading factor $SF = 32$ as described in subclause 5B.3.1.1.

5B.4.2.2 S-CCPCH Burst Types

Burst types 1 or 2 as described in subclause 5B.3.2 are used for the S-CCPCHs. TFCI may be applied for S-CCPCHs.

5B.4.2.3 S-CCPCH Training sequences

The training sequences, i.e. midambles, as described in subclause 5B.3.3 are used for the S-CCPCH.

5B.4.3 The physical random access channel (PRACH)

The RACH as described in subclause 4.1.2 is mapped onto one uplink physical random access channel (PRACH).

5B.4.3.1 PRACH Spreading

The uplink PRACH uses either spreading factor $SF=32$ or $SF=16$ as described in subclause 5B.3.1.2. The set of admissible spreading codes for use on the PRACH and the associated spreading factors are broadcast on the BCH (within the RACH configuration parameters on the BCH).

5B.4.3.2 PRACH Burst Type

The UEs send uplink access bursts of type 3 randomly in the PRACH. TFCI and TPC are not applied for the PRACH.

5B.4.3.3 PRACH Training sequences

The training sequences, i.e. midambles, of different users active in the same time slot are time shifted versions of a basic midamble code, m_1 , or a second basic midamble code, m_2 , which is a time inverted version of the basic midamble code m_1 . The basic midamble codes for burst type 3 are shown in Annex AB. The necessary time shifts are obtained by choosing all $k=1,2,3,\dots,K$. Different cells use different periodic basic codes, i.e. different midamble sets.

5B.4.3.4 PRACH timeslot formats

For the PRACH the timeslot format is only spreading factor dependent. The timeslot formats 60 and 66 of table 8AG are applicable for the PRACH.

5B.4.3.5 Association between Training Sequences and Channelisation Codes

For the PRACH the fixed association between a training sequence and associated channelisation code is defined in figure 18AK. In this figure, midamble $m_j^{(k)}$ is formed from the k^{th} shift of the original basic midamble code ($j=1$) or of the time-inverted basic midamble code ($j=2$).

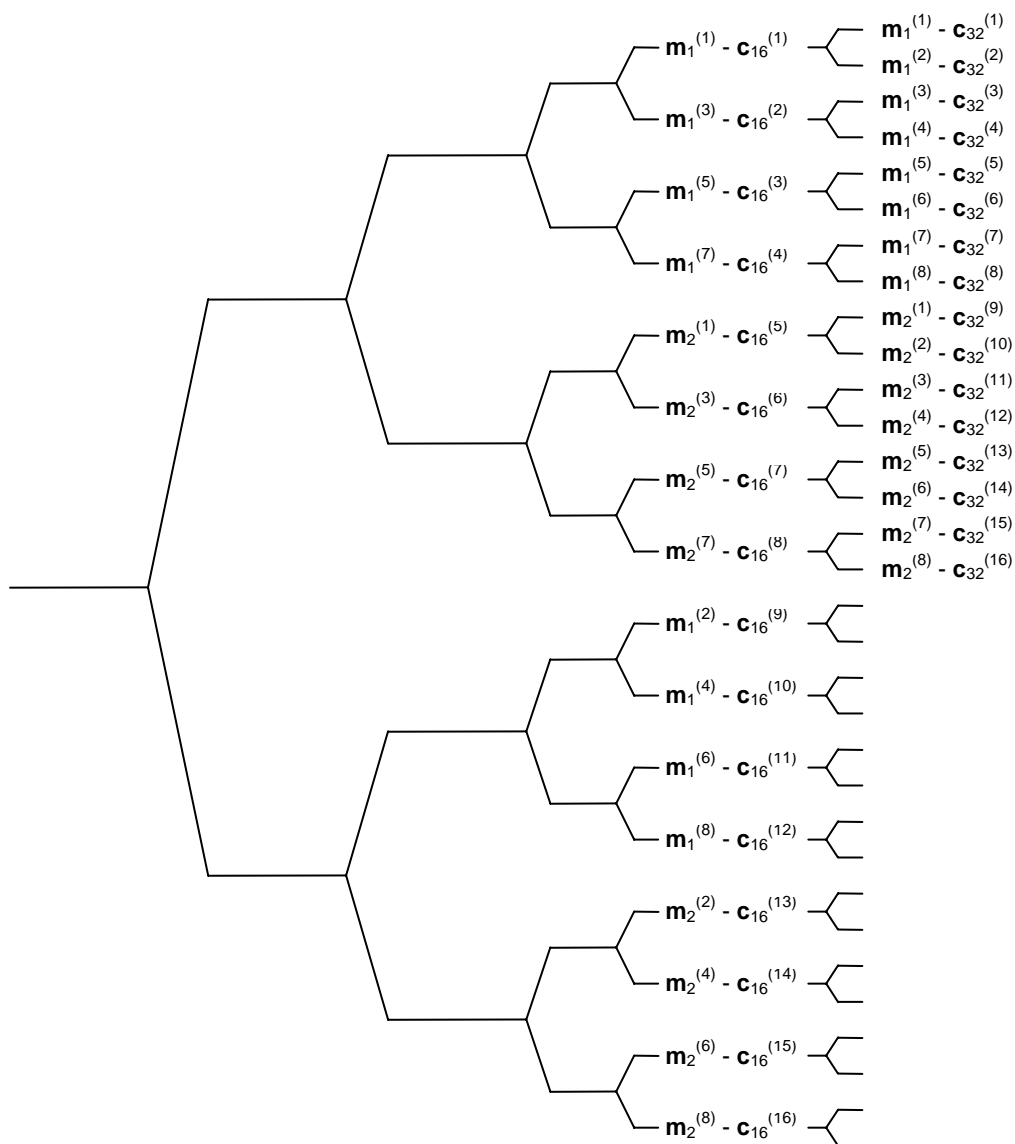


Figure 18AK: Association of midambles to channelisation codes for PRACH in the OVFS tree

5B.4.4 The synchronisation channel (SCH)

The code group of a cell can be derived from the synchronisation channel. In order not to limit uplink/downlink asymmetry, the SCH is mapped on one or two downlink slots per frame only.


There are two cases of SCH and P-CCPCH allocation as follows:

- Case 1) SCH and P-CCPCH allocated in TS#k, k=0...14
- Case 2) SCH allocated in two TS: TS#k and TS#k+8, k=0...6; P-CCPCH allocated in TS#k.

The position of SCH (value of k) in the frame can change on a long term basis in any case.

Due to this SCH scheme, the position of P-CCPCH is known from the SCH.

Figure 18AL is an example for transmission of SCH, k=0, of Case 2.

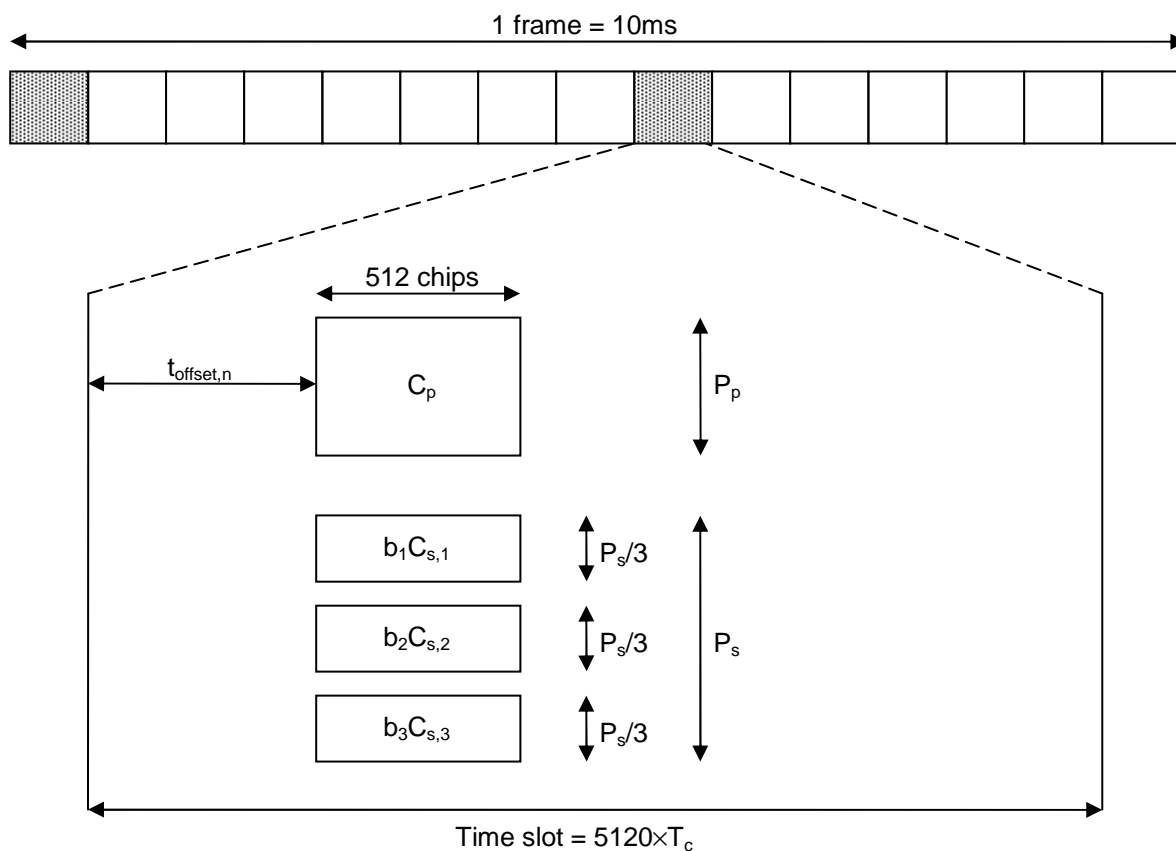

$$b_i \in \{\pm 1, \pm j\}, C_{s,i} \in \{C_0, C_1, C_3, C_4, C_5, C_6, C_8, C_{10}, C_{12}, C_{13}, C_{14}, C_{15}\}, i = 1,2,3; \text{ see section 8.4}$$

Figure 18AL: Scheme for Synchronisation channel SCH consisting of one primary sequence C_p and 3 parallel secondary sequences $C_{s,i}$ in slot k and k+8 (example for k=0 in Case 2)

As depicted in figure 18AL, the SCH consists of a primary and three secondary code sequences each 512 chips long. The primary and secondary code sequences are defined in [8].

Due to mobile to mobile interference, it is mandatory for public TDD systems to keep synchronisation between base stations. As a consequence of this, a capture effect concerning SCH can arise. The time offset $t_{\text{offset},n}$ enables the system to overcome the capture effect.

The time offset $t_{\text{offset},n}$ is one of 32 values, depending on the code group of the cell, n, [8]. Note that the cell parameter will change from frame to frame, but the cell will belong to only one code group and thus have one time offset $t_{\text{offset},n}$. The exact value for $t_{\text{offset},n}$ is given by:

$$t_{offset,n} = \begin{cases} n \cdot 96 \cdot T_c & n < 16 \\ (1440 + n \cdot 96) \cdot T_c & n \geq 16 \end{cases}; \quad n = 0, \dots, 31$$

5B.4.5 Physical Uplink Shared Channel (PUSCH)

The USCH as described in subclause 4.1.2 is mapped onto one or more physical uplink shared channels (PUSCH). Timing advance, as described in [9], is applied to the PUSCH.

5B.4.5.1 PUSCH Spreading

The spreading factors that can be applied to the PUSCH are SF = 1, 2, 4, 8, 16 or 32 as described in subclause 5B.3.1.2.

5B.4.5.2 PUSCH Burst Types

Burst types 1, 2 or 3 as described in subclause 5B.3.2 can be used for PUSCH. TFCI and TPC can be transmitted on the PUSCH.

5B.4.5.3 PUSCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the PUSCH.

5B.4.5.4 UE Selection

The UE that shall transmit on the PUSCH is selected by higher layer signalling.

5B.4.6 Physical Downlink Shared Channel (PDSCH)

The DSCH as described in subclause 4.1.2 is mapped onto one or more physical downlink shared channels (PDSCH).

5B.4.6.1 PDSCH Spreading

The PDSCH uses either spreading factor SF = 32 or SF = 1 as described in subclause 5B.3.1.1.

5B.4.6.2 PDSCH Burst Types

Burst types 1 or 2 as described in subclause 5B.3.2 can be used for PDSCH. TFCI can be transmitted on the PDSCH.

5B.4.6.3 PDSCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the PDSCH.

5B.4.6.4 UE Selection

To indicate to the UE that there is data to decode on the DSCH, higher layer signalling is used.

5B.4.7 The Paging Indicator Channel (PICH)

The Paging Indicator Channel (PICH) is a physical channel used to carry the paging indicators.

5B.4.7.1 Mapping of Paging Indicators to the PICH bits

Figure 18AM depicts the structure of a PICH burst and the numbering of the bits within the burst. The same burst type is used for the PICH in every cell. N_{PIB} bits in a normal burst of type 1 or 2 are used to carry the paging indicators, where N_{PIB} depends on the burst type: $N_{PIB}=240$ for burst type 1 and $N_{PIB}=272$ for burst type 2. The bits $s_{N_{PIB}+1}, \dots, s_{N_{PIB}+4}$ adjacent to the midamble are reserved for possible future use.

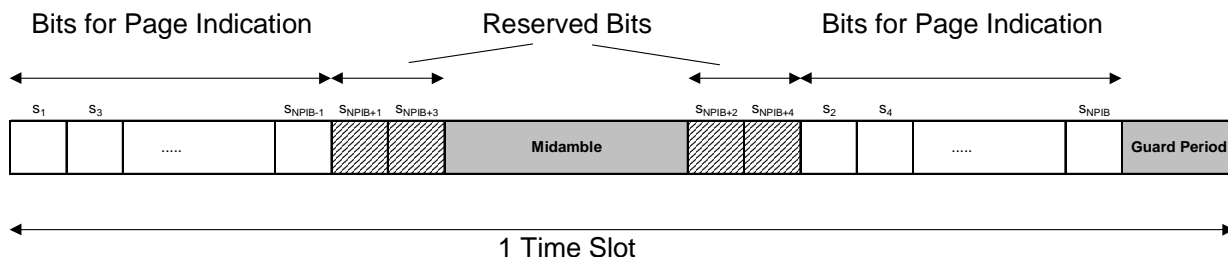


Figure 18AM: Transmission and numbering of paging indicator carrying bits in a PICH burst

Each paging indicator P_q in one time slot is mapped to the bits $\{s_{2L_{PI} \cdot q+1}, \dots, s_{2L_{PI} \cdot (q+1)}\}$ within this time slot. Thus, due to the interleaved transmission of the bits half of the symbols used for each paging indicator are transmitted in the first data part, and the other half of the symbols are transmitted in the second data part; an example is shown in figure 18AN for a paging indicator length L_{PI} of 4 symbols.

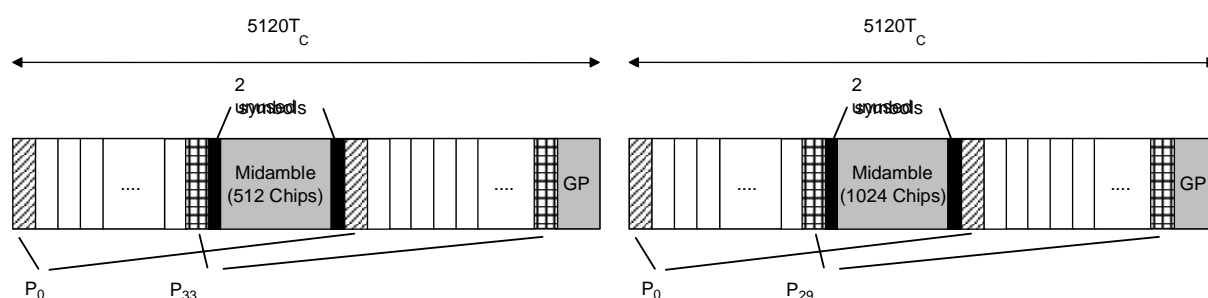


Figure 18AN: Example of mapping of paging indicators on PICH bits for $L_{PI}=4$

The setting of the paging indicators and the corresponding PICH bits (including the reserved ones) is described in [4].

N_{PI} paging indicators of length $L_{PI}=2$, $L_{PI}=4$ or $L_{PI}=8$ symbols are transmitted in each radio frame that contains the PICH. The number of paging indicators N_{PI} per radio frame is given by the paging indicator length and the burst type, which are both known by higher layer signalling. In table 8AH this number is shown for the different possibilities of burst types and paging indicator lengths.

Table 8AH: Number N_{PI} of paging indicators per time slot for the different burst types and paging indicator lengths L_{PI}

| | $L_{PI}=2$ | $L_{PI}=4$ | $L_{PI}=8$ |
|--------------|-------------|-------------|-------------|
| Burst Type 1 | $N_{PI}=60$ | $N_{PI}=30$ | $N_{PI}=15$ |
| Burst Type 2 | $N_{PI}=68$ | $N_{PI}=34$ | $N_{PI}=17$ |

5B.4.7.2 Structure of the PICH over multiple radio frames

The structure of PICH over multiple radio frames is identical to the structure of PICH in 3.84Mcps TDD cf [section 5.3.7.2].

5B.4.7.3 PICH Training sequences

The training sequences, i.e. midambles for the PICH, are generated as described in subclause 5B.3.3. The allocation of midambles depends on whether SCTD is applied to the PICH.

- If no antenna diversity is applied the PICH the midambles can be allocated as described in subclause 5B.7.
- If SCTD antenna diversity is applied to the PICH the allocation of midambles shall be as described in [9].

5B.4.8 High Speed Physical Downlink Shared Channel (HS-PDSCH)

The HS-DSCH as described in subclause 4.1.2 is mapped onto one or more high speed physical downlink shared channels (HS-PDSCH).

5B.4.8.1 HS-PDSCH Spreading

The HS-PDSCH shall use either spreading factor SF = 32 or SF=1, as described in 5B.3.1.1.

5B.4.8.2 HS-PDSCH Burst Types

Burst types 1 or 2 as described in subclause 5B.3.2 can be used for PDSCH. TFCI shall not be transmitted on the HS-PDSCH. The TF of the HS-DSCH is derived from the associated HS-SCCH.

5B.4.8.3 HS-PDSCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the HS-PDSCH.

5B.4.8.4 UE Selection

To indicate to the UE that there is data to decode on the HS-DSCH, the UE id on the associated HS-SCCH shall be used.

5B.4.8.5 HS-PDSCH timeslot formats

An HS-PDSCH may use QPSK or 16QAM modulation symbols. The time slot formats are shown in table 8AI.

Table 8AI: Time slot formats for the HS-PDSCH

| Slot Format # | Spreading Factor | Midamble length (chips) | $N_{\text{TFCI code word}}$ (bits) | Bits/slot | $N_{\text{Data/Slot}}$ (bits) | $N_{\text{data/data field}}$ (bits) |
|---------------|------------------|-------------------------|------------------------------------|-----------|-------------------------------|-------------------------------------|
| 0 (QPSK) | 32 | 1024 | 0 | 244 | 244 | 122 |
| 1 (16QAM) | 32 | 1024 | 0 | 488 | 488 | 244 |
| 2 (QPSK) | 32 | 512 | 0 | 276 | 276 | 138 |
| 3 (16QAM) | 32 | 512 | 0 | 552 | 552 | 276 |
| 4 (QPSK) | 1 | 1024 | 0 | 7808 | 7808 | 3904 |
| 5 (16QAM) | 1 | 1024 | 0 | 15616 | 15616 | 7808 |
| 6 (QPSK) | 1 | 512 | 0 | 8832 | 8832 | 4416 |
| 7(16QAM) | 1 | 512 | 0 | 17664 | 17664 | 8832 |

5B.4.9 Shared Control Channel for HS-DSCH (HS-SCCH)

The HS-SCCH is a DL physical channel that carries higher layer control information for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SCCH the structure of which is described below.

5B.4.9.1 HS-SCCH Spreading

The HS-SCCH shall use spreading factor SF = 32, as described in 5B.3.1.1.

5B.4.9.2 HS-SCCH Burst Types

Burst type 1 as described in subclause 5B.3.2 can be used for HS-SCCH. TFCI shall not be transmitted on the HS-SCCH.

5B.4.9.3 HS-SCCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the HS-SCCH.

5B.4.9.4 HS-SCCH timeslot formats

The HS-SCCH always uses time slot format #0 from table 8AF, see section 5B.3.2.6.1.

5B.4.10 Shared Information Channel for HS-DSCH (HS-SICH)

The HS-SICH is a UL physical channel that carries higher layer control information and the Channel Quality Indicator CQI for HS-DSCH. The physical layer will process this information according to [7] and will transmit the resulting bits on the HS-SICH the structure of which is described below.

5B.4.10.1 HS-SICH Spreading

The HS-SICH shall use spreading factor $SF = 32$, as described in 5B.3.1.2.

5B.4.10.2 HS-SICH Burst Types

Burst type 1 as described in subclause 5B.3.2 can be used for HS-SICH. TFCI shall not be transmitted on the HS-SICH, however, the HS-SICH shall carry TPC information.

5B.4.10.3 HS-SICH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the HS-SICH.

5B.4.10.4 HS-SICH timeslot formats

The HS-SICH shall use time slot format #90 from table 8AF, see section 5B.3.2.6.2.

5B.4.11 The MBMS Indicator Channel (MICH)

The MBMS Indicator Channel (MICH) is a physical channel used to carry the MBMS notification indicators. The UE may use multiple MICH within the MBMS modification period in order to make decisions on individual MBMS notification indicators.

5B.4.11.1 Mapping of MBMS Indicators to the MICH bits

Figure 18AO depicts the structure of a MICH burst and the numbering of the bits within the burst. The same burst type is used for the MICH in every cell. N_{NIB} bits in a normal burst of type 1 or 2 are used to carry the MBMS notification indicators, where N_{NIB} depends on the burst type: $N_{NIB}=240$ for burst type 1 and $N_{NIB}=272$ for burst type 2. The bits $s_{NNIB+1}, \dots, s_{NNIB+4}$ adjacent to the midamble are reserved for possible future use.

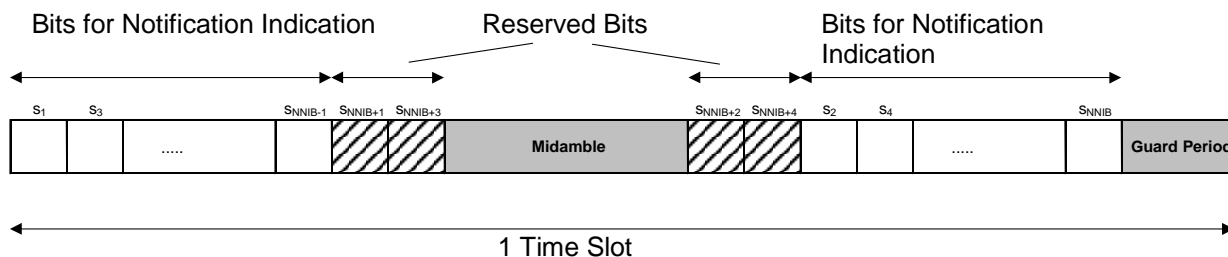


Figure 18AO: Transmission and numbering of MBMS notification indicator carrying bits in a MICH burst

Each notification indicator N_q in one time slot is mapped to the bits $\{s_{2L_{NI} \cdot q+1}, \dots, s_{2L_{NI} \cdot (q+1)}\}$ within this time slot. Thus, due to the interleaved transmission of the bits half of the symbols used for each MBMS notification indicator are transmitted in the first data part, and the other half of the symbols are transmitted in the second data part: an example is shown in figure 18AP for a MBMS notification indicator length L_{NI} of 4 symbols.

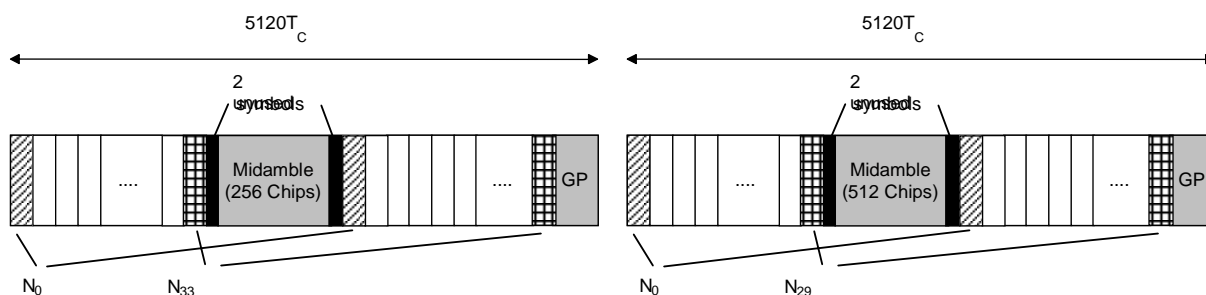


Figure 18AP: Example of mapping of MBMS notification indicators on MICH bits for $L_{NI}=4$

The setting of the MBMS notification indicators and the corresponding MICH bits (including the reserved ones) is described in [7].

N_n MBMS notification indicators of length $L_{NI}=2$, $L_{NI}=4$ or $L_{NI}=8$ symbols are transmitted in each MICH. The number of MBMS notification indicators N_n per MICH is given by the MBMS notification indicator length and the burst type, which are both known by higher layer signalling. In table 18AJ this number is shown for the different possibilities of burst types and MBMS notification indicator lengths.

Table 18AJ: Number N_n of MBMS notification indicators per time slot for the different burst types and MBMS notification indicator lengths L_{NI}

| | $L_{NI}=2$ | $L_{NI}=4$ | $L_{NI}=8$ |
|--------------|------------|------------|------------|
| Burst Type 1 | $N_n=60$ | $N_n=30$ | $N_n=15$ |
| Burst Type 2 | $N_n=68$ | $N_n=34$ | $N_n=17$ |

The value NI ($NI = 0, \dots, N_{NI}-1$) calculated by higher layers, is associated to the MBMS notification indicator N_q , where $q = NI \bmod N_n$.

The set of NI passed over the Iub indicates all higher layer NI values for which the notification indicator on MICH should be set to 1 during the corresponding modification period; all other indicators shall be set to 0.

5B.4.11.2 MICH Training sequences

The training sequences, i.e. midambles for the MICH, are generated as described in subclause 5B.3.3. The allocation of midambles depends on whether SCTD is applied to the MICH.

- If no antenna diversity is applied the MICH the midambles can be allocated as described in subclause 5B.7.

- If SCTD antenna diversity is applied to the MICH the allocation of midambles shall be as described in [9].

5B.4.12 E-DCH Physical Uplink Channel (E-PUCH)

One or more E-PUCH are used to carry the uplink E-DCH transport channel and associated control information (E-UCCH) in each E-DCH TTI. In a timeslot designated by UTRAN for E-PUCH use, up to one E-PUCH may be transmitted by a UE. No other physical channels may be transmitted by a UE in an E-PUCH timeslot.

Timing advance, as described in [9], subclause 4.3, is applied to the E-PUCH.

5B.4.12.1 E-UCCH

The E-DCH Uplink Control Channel (E-UCCH) carries uplink control information associated with the E-DCH and is carried within indicator fields mapped to E-PUCH. Depending on the configuration by higher layers, an E-PUCH burst may or may not contain E-UCCH and TPC. When E-PUCH does contain E-UCCH, TPC is also transmitted. When E-PUCH does not contain E-UCCH, TPC is not transmitted.

Higher layers shall indicate the maximum number of timeslots (N_{E-UCCH}) that may contain E-UCCH/TPC in the E-DCH TTI. For an allocation of n_{TS} E-PUCH timeslots, the UE shall transmit E-UCCH and TPC on the first m allocated timeslots of the E-DCH TTI, where $m = \min(n_{TS}, N_{E-UCCH})$.

The E-UCCH comprises two parts, E-UCCH part 1 and E-UCCH part 2.

E-UCCH part 1:

- is of length 32 physical channel bits
- is mapped to the TFCI field of the E-PUCH (16 bits either side of the midamble)
- is spread at SF=32 using the channelisation code in the branch with the highest code numbering of the allowed OVSF sub tree, as depicted in [8]
- uses QPSK modulation

E-UCCH part 2:

- is of length 32 physical channel bits
- is spread using the same spreading factor as the data payloads
- uses the same modulation as the data payloads

Figures 18APA and 18APB show the E-PUCH data burst with and without the E-UCCH/TPC fields.

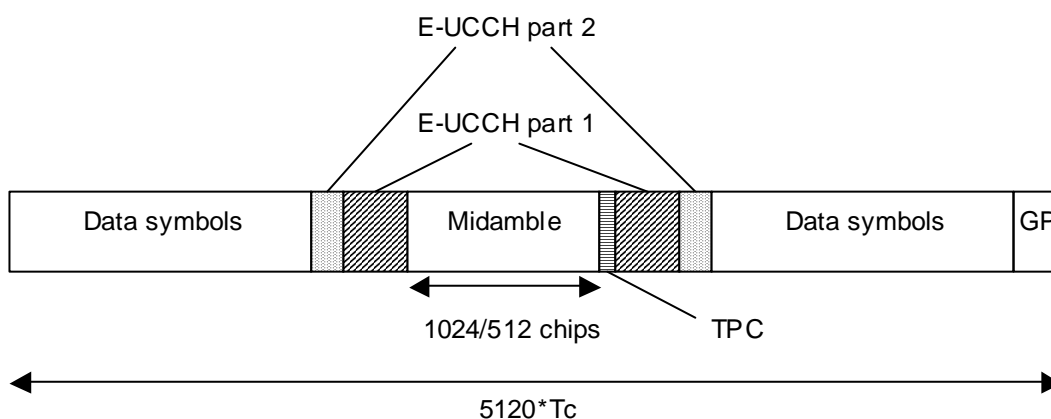


Figure 18APA: Location of E-UCCH part 1, E-UCCH part 2 and TPC in the E-PUCH data burst

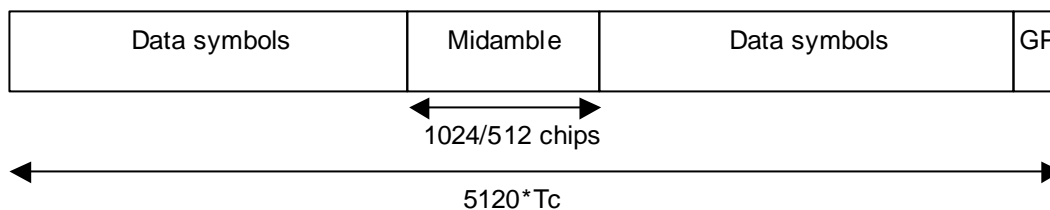


Figure 18APB: E-PUCH data burst without E-UCCH/TPC

5B.4.12.2 E-PUCH Spreading

The spreading factors that can be applied to the E-PUCH are SF = 1, 2, 4, 8, 16, 32 as described in subclause 5B.3.1.2.

5B.4.12.3 E-PUCH Burst Types

Burst types 1, 2 or 3 as described in subclause 5B.3.2 can be used for E-PUCH. E-UCCH and TPC can be transmitted on the E-PUCH.

5B.4.12.4 PUSCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the E-PUCH.

5B.4.12.5 UE Selection

UEs that shall transmit on the E-PUCH are selected by higher layers. The UE id on the associated E-AGCH shall be used for identification.

5B.4.12.6 E-PUCH timeslot formats

An E-PUCH may use QPSK or 16QAM modulation symbols and may or may not contain E-UCCH/TPC. The time slot formats are shown in table 19.

Table 19: Timeslot formats for E-PUCH

| slot format # | SF | Midamble Length (chips) | GP (chips) | N _{EUCCH1} (bits) | N _{EUCCH2} (bits) | N _{TPC} (bits) | Bits/slot | N _{data/slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|----|-------------------------|------------|----------------------------|----------------------------|-------------------------|-----------|-------------------------------|--|--|
| 0 (QPSK) | 32 | 1024 | 192 | 0 | 0 | 0 | 244 | 244 | 122 | 122 |
| 1 (16QAM) | 32 | 1024 | 192 | 0 | 0 | 0 | 488 | 488 | 244 | 244 |
| 2 (QPSK) | 32 | 1024 | 192 | 32 | 32 | 2 | 244 | 178 | 90 | 88 |
| 3 (16QAM) | 32 | 1024 | 192 | 32 | 32 | 2 | 454 | 388 | 196 | 192 |
| 4 (QPSK) | 32 | 512 | 192 | 0 | 0 | 0 | 276 | 276 | 138 | 138 |
| 5 (16QAM) | 32 | 512 | 192 | 0 | 0 | 0 | 552 | 552 | 276 | 276 |
| 6 (QPSK) | 32 | 512 | 192 | 32 | 32 | 2 | 276 | 210 | 106 | 104 |
| 7 (16QAM) | 32 | 512 | 192 | 32 | 32 | 2 | 518 | 452 | 228 | 224 |
| 8 (QPSK) | 16 | 1024 | 192 | 0 | 0 | 0 | 488 | 488 | 244 | 244 |
| 9 (16QAM) | 16 | 1024 | 192 | 0 | 0 | 0 | 976 | 976 | 488 | 488 |
| 10 (QPSK) | 16 | 1024 | 192 | 32 | 32 | 2 | 454 | 388 | 196 | 192 |
| 11 (16QAM) | 16 | 1024 | 192 | 32 | 32 | 2 | 874 | 808 | 408 | 400 |
| 12 (QPSK) | 16 | 512 | 192 | 0 | 0 | 0 | 552 | 552 | 276 | 276 |
| 13 (16QAM) | 16 | 512 | 192 | 0 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 14 (QPSK) | 16 | 512 | 192 | 32 | 32 | 2 | 518 | 452 | 228 | 224 |

| slot format # | SF | Midamble Length (chips) | GP (chips) | N _{EUCCH1} (bits) | N _{EUCCH2} (bits) | N _{TPC} (bits) | Bits/slot | N _{data/slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|----|-------------------------|------------|----------------------------|----------------------------|-------------------------|-----------|-------------------------------|--|--|
| 15 (16QAM) | 16 | 512 | 192 | 32 | 32 | 2 | 1002 | 936 | 472 | 464 |
| 16 (QPSK) | 8 | 1024 | 192 | 0 | 0 | 0 | 976 | 976 | 488 | 488 |
| 17 (16QAM) | 8 | 1024 | 192 | 0 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 18 (QPSK) | 8 | 1024 | 192 | 32 | 32 | 2 | 874 | 808 | 408 | 400 |
| 19 (16QAM) | 8 | 1024 | 192 | 32 | 32 | 2 | 1714 | 1648 | 832 | 816 |
| 20 (QPSK) | 8 | 512 | 192 | 0 | 0 | 0 | 1104 | 1104 | 552 | 552 |
| 21 (16QAM) | 8 | 512 | 192 | 0 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 22 (QPSK) | 8 | 512 | 192 | 32 | 32 | 2 | 1002 | 936 | 472 | 464 |
| 23 (16QAM) | 8 | 512 | 192 | 32 | 32 | 2 | 1970 | 1904 | 960 | 944 |
| 24 (QPSK) | 4 | 1024 | 192 | 0 | 0 | 0 | 1952 | 1952 | 976 | 976 |
| 25 (16QAM) | 4 | 1024 | 192 | 0 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 26 (QPSK) | 4 | 1024 | 192 | 32 | 32 | 2 | 1714 | 1648 | 832 | 816 |
| 27 (16QAM) | 4 | 1024 | 192 | 32 | 32 | 2 | 3394 | 3328 | 1680 | 1648 |
| 28 (QPSK) | 4 | 512 | 192 | 0 | 0 | 0 | 2208 | 2208 | 1104 | 1104 |
| 29 (16QAM) | 4 | 512 | 192 | 0 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 30 (QPSK) | 4 | 512 | 192 | 32 | 32 | 2 | 1970 | 1904 | 960 | 944 |
| 31 (16QAM) | 4 | 512 | 192 | 32 | 32 | 2 | 3906 | 3840 | 1936 | 1904 |
| 32 (QPSK) | 2 | 1024 | 192 | 0 | 0 | 0 | 3904 | 3904 | 1952 | 1952 |
| 33 (16QAM) | 2 | 1024 | 192 | 0 | 0 | 0 | 7808 | 7808 | 3904 | 3904 |
| 34 (QPSK) | 2 | 1024 | 192 | 32 | 32 | 2 | 3394 | 3328 | 1680 | 1648 |
| 35 (16QAM) | 2 | 1024 | 192 | 32 | 32 | 2 | 6754 | 6688 | 3376 | 3312 |
| 36 (QPSK) | 2 | 512 | 192 | 0 | 0 | 0 | 4416 | 4416 | 2208 | 2208 |
| 37 (16QAM) | 2 | 512 | 192 | 0 | 0 | 0 | 8832 | 8832 | 4416 | 4416 |
| 38 (QPSK) | 2 | 512 | 192 | 32 | 32 | 2 | 3906 | 3840 | 1936 | 1904 |
| 39 (16QAM) | 2 | 512 | 192 | 32 | 32 | 2 | 7778 | 7712 | 3888 | 3824 |
| 40 (QPSK) | 1 | 1024 | 192 | 0 | 0 | 0 | 7808 | 7808 | 3904 | 3904 |
| 41 (16QAM) | 1 | 1024 | 192 | 0 | 0 | 0 | 15616 | 15616 | 7808 | 7808 |
| 42 (QPSK) | 1 | 1024 | 192 | 32 | 32 | 2 | 6754 | 6688 | 3376 | 3312 |
| 43 (16QAM) | 1 | 1024 | 192 | 32 | 32 | 2 | 13474 | 13408 | 6768 | 6640 |
| 44 (QPSK) | 1 | 512 | 192 | 0 | 0 | 0 | 8832 | 8832 | 4416 | 4416 |
| 45 (16QAM) | 1 | 512 | 192 | 0 | 0 | 0 | 17664 | 17664 | 8832 | 8832 |
| 46 (QPSK) | 1 | 512 | 192 | 32 | 32 | 2 | 7778 | 7712 | 3888 | 3824 |
| 47 (16QAM) | 1 | 512 | 192 | 32 | 32 | 2 | 15522 | 15456 | 7792 | 7664 |
| 48 (QPSK) | 32 | 1024 | 384 | 0 | 0 | 0 | 232 | 232 | 122 | 110 |
| 49 (16QAM) | 32 | 1024 | 384 | 0 | 0 | 0 | 464 | 464 | 244 | 220 |
| 50 (QPSK) | 32 | 1024 | 384 | 32 | 32 | 2 | 232 | 166 | 90 | 76 |
| 51 (16QAM) | 32 | 1024 | 384 | 32 | 32 | 2 | 430 | 364 | 196 | 168 |
| 52 (QPSK) | 16 | 1024 | 384 | 0 | 0 | 0 | 464 | 464 | 244 | 220 |
| 53 (16QAM) | 16 | 1024 | 384 | 0 | 0 | 0 | 928 | 928 | 488 | 440 |
| 54 (QPSK) | 16 | 1024 | 384 | 32 | 32 | 2 | 430 | 364 | 196 | 168 |
| 55 (16QAM) | 16 | 1024 | 384 | 32 | 32 | 2 | 826 | 760 | 408 | 352 |
| 56 (QPSK) | 8 | 1024 | 384 | 0 | 0 | 0 | 928 | 928 | 488 | 440 |
| 57 (16QAM) | 8 | 1024 | 384 | 0 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 58 (QPSK) | 8 | 1024 | 384 | 32 | 32 | 2 | 826 | 760 | 408 | 352 |
| 59 (16QAM) | 8 | 1024 | 384 | 32 | 32 | 2 | 1618 | 1552 | 832 | 720 |
| 60 (QPSK) | 4 | 1024 | 384 | 0 | 0 | 0 | 1856 | 1856 | 976 | 880 |
| 61 (16QAM) | 4 | 1024 | 384 | 0 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |

| slot format # | SF | Midamble Length (chips) | GP (chips) | N _{EUCC1} (bits) | N _{EUCC2} (bits) | N _{TPC} (bits) | Bits/slot | N _{data/slot} (bits) | N _{data/data field(1)} (bits) | N _{data/data field(2)} (bits) |
|---------------|----|-------------------------|------------|---------------------------|---------------------------|-------------------------|-----------|-------------------------------|--|--|
| 62 (QPSK) | 4 | 1024 | 384 | 32 | 32 | 2 | 1618 | 1552 | 832 | 720 |
| 63 (16QAM) | 4 | 1024 | 384 | 32 | 32 | 2 | 3202 | 3136 | 1680 | 1456 |
| 64 (QPSK) | 2 | 1024 | 384 | 0 | 0 | 0 | 3712 | 3712 | 1952 | 1760 |
| 65 (16QAM) | 2 | 1024 | 384 | 0 | 0 | 0 | 7424 | 7424 | 3904 | 3520 |
| 66 (QPSK) | 2 | 1024 | 384 | 32 | 32 | 2 | 3202 | 3136 | 1680 | 1456 |
| 67 (16QAM) | 2 | 1024 | 384 | 32 | 32 | 2 | 6370 | 6304 | 3376 | 2928 |
| 68 (QPSK) | 1 | 1024 | 384 | 0 | 0 | 0 | 7424 | 7424 | 3904 | 3520 |
| 69 (16QAM) | 1 | 1024 | 384 | 0 | 0 | 0 | 14848 | 14848 | 7808 | 7040 |
| 70 (QPSK) | 1 | 1024 | 384 | 32 | 32 | 2 | 6370 | 6304 | 3376 | 2928 |
| 71 (16QAM) | 1 | 1024 | 384 | 32 | 32 | 2 | 12706 | 12640 | 6768 | 5872 |

5B.4.13 E-DCH Random Access Uplink Control Channel (E-RUCCH)

The E-RUCCH is used to carry E-DCH-associated uplink control signalling when E-PUCH resources are not available. The characteristics of the E-RUCCH physical channel are identical to those of PRACH (see subclause 5B.4.3).

Physical resources available for E-RUCCH are configured by higher layers. E-RUCCH may be mapped to the same physical resources that are assigned for PRACH.

5B.4.14 E-DCH Absolute Grant Channel (E-AGCH)

The E-DCH Absolute Grant Channel (E-AGCH) is a downlink physical channel carrying the uplink E-DCH absolute grant control information. Unlike other downlink physical channel types, E-AGCH also carries a TPC field (located immediately after the midamble and spread using SF32) which is used to control the E-PUCH power. Figure 18APC illustrates the burst structure of the E-AGCH.

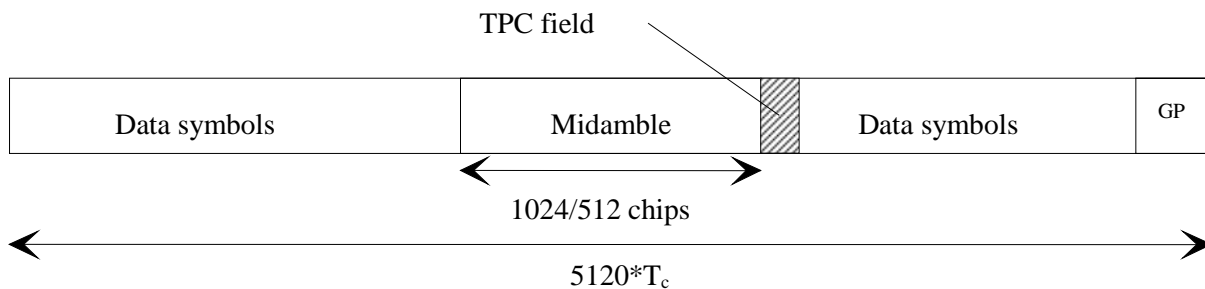


Figure 18APC: Burst structure of E-AGCH

One E-DCH absolute grant for a UE shall be transmitted over one E-AGCH.

5B.4.14.1 E-AGCH Spreading

The E-AGCH shall use spreading factor SF = 32, as described in 5B.3.1.1.

5B.4.14.2 E-AGCH Burst Types

Burst types 1 and 2 as described in subclause 5B.3.2 can be used for E-AGCH. TPC shall be transmitted on E-AGCH whereas TFCI shall not be transmitted.

5B.4.14.3 E-AGCH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the E-AGCH.

5B.4.15.4 E-AGCH timeslot formats

The E-AGCH uses the timeslot formats of Table 20. These augment downlink slot formats 0...19 of table 8AF, see subclause 5B.3.2.6.1.

Table 20: Time slot formats for E-AGCH

| Slot Format # | SF | Midamble length (chips) | N _{TFCI} code word (bits) | N _{TPC} (bits) | Bits/slot | N _{Data/Slot} (bits) | N _{data/data} field (1) (bits) | N _{data/data} field (2) (bits) |
|---------------|----|-------------------------|------------------------------------|-------------------------|-----------|-------------------------------|---|---|
| 20 | 32 | 1024 | 0 | 2 | 244 | 242 | 122 | 120 |
| 21 | 32 | 512 | 0 | 2 | 276 | 274 | 138 | 136 |

5B.4.15 E-DCH Hybrid ARQ Acknowledgement Indicator Channel (E-HICH)

The E-DCH HARQ Acknowledgement indicator channel (E-HICH) is defined in terms of a SF32 downlink physical channel and a signature sequence. The E-HICH carries the uplink E-DCH hybrid ARQ acknowledgement indicator. Figure 18APD illustrates the structure of the E-HICH.

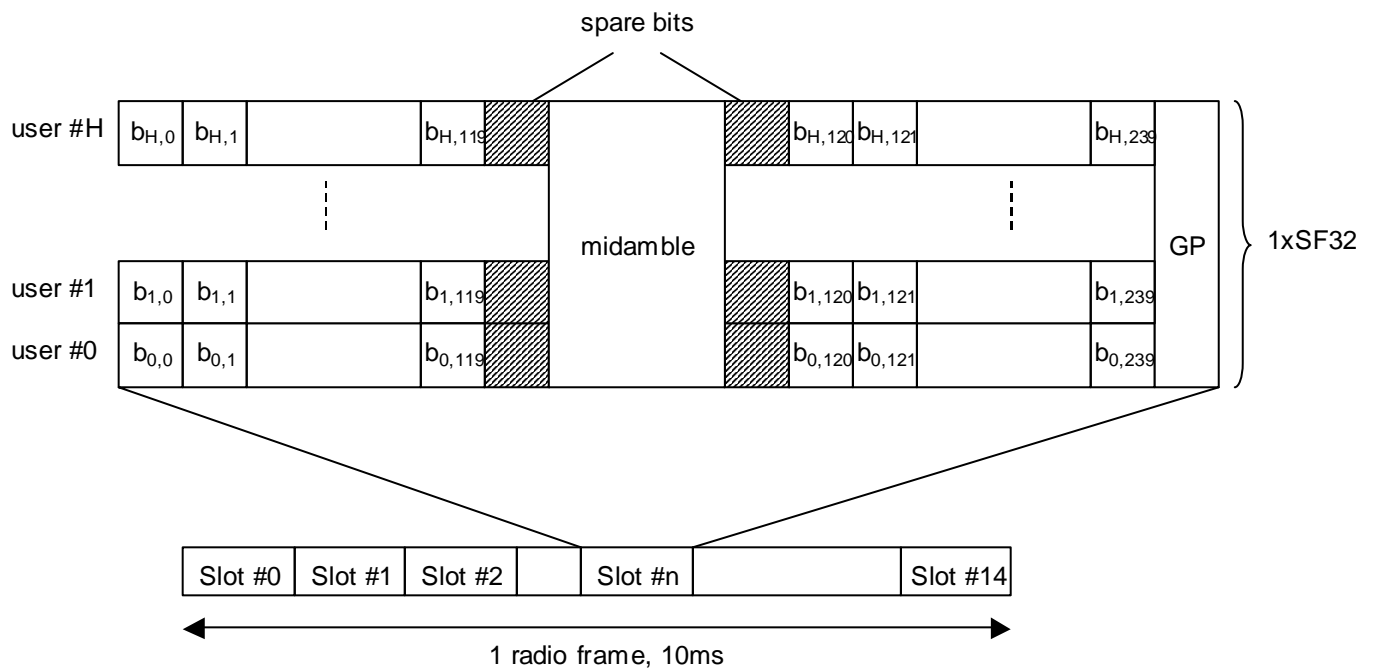


Figure 18APD – E-HICH Structure

A single channelisation code may carry one or multiple signature sequences. Each signature sequence conveys a HARQ acknowledgement indicator. A maximum of one indicator may be transmitted to a UE. Each acknowledgement indicator is coded to form a signature sequence of 240 bits (b_0, b_1, \dots, b_{239}) as defined in [7] and is transmitted within a single E-HICH timeslot. The E-HICH also contains U spare bit locations, where $U=4$ for burst type 1 and $U=36$ for burst type 2. The spare bit values are not defined.

5B.4.15.1 E-HICH Spreading

Signature sequences (including spare bits inserted) that share the same channelisation code are combined and spread using spreading factor SF=32 as described in [8].

5B.4.15.2 E-HICH Burst Types

Burst types 1 and 2 as described in subclause 5B.3.2 can be used for E-HICH. Neither TFCI nor TPC shall be transmitted on the E-HICH.

5B.4.15.3 E-HICH Training Sequences

The training sequences as described in subclause 5B.3.3 are used for the E-HICH.

5B.5 Transmit Diversity for DL Physical Channels

Support for transmit diversity is the same as that for the 3.84 Mcps TDD option cf. [5.4 Transmit Diversity].

5B.6 Beacon characteristics of physical channels

For the purpose of measurements, common physical channels that are allocated to particular locations (time slot, code) shall have particular physical characteristics, called beacon characteristics. Physical channels with beacon characteristics are called beacon channels. The locations of the beacon channels are called beacon locations. The ensemble of beacon channels shall provide the beacon function, i.e. a reference power level at the beacon locations, regularly existing in each radio frame. Thus, beacon channels must be present in each radio frame, the only exception is when idle periods are used to support time difference measurements for location services [9]. Then it may be possible that the beacon channels occur in the same frame and time slot as the idle periods. In this case, the beacon channels will not be transmitted in that particular frame and time slot.

5B.6.1 Location of beacon channels

The beacon locations are determined by the SCH and depend on the SCH allocation case, see subclause 5B.4.4:

- Case 1) The beacon function shall be provided by the physical channels that are allocated to channelisation code $C_{Q=32}^{(k=1)}$ and to TS#k, k=0,...,14.
- Case 2) The beacon function shall be provided by the physical channels that are allocated to channelisation code $C_{Q=32}^{(k=1)}$ and to TS#k and TS#k+8, k=0,...,6.

Note that by this definition the P-CCPCH always has beacon characteristics.

5B.6.2 Physical characteristics of beacon channels

The beacon channels shall have the following physical characteristics. They:

- are transmitted with reference power;
- are transmitted without beamforming;
- use burst type 1;
- use midamble $m^{(1)}$ and $m^{(2)}$ exclusively in this time slot; and
- midambles $m^{(9)}$ and $m^{(10)}$ are always left unused in this time slot, if 16 midambles are allowed in that cell.

Note that in the time slot where the P-CCPCH is transmitted only the midambles $m^{(1)}$ to $m^{(8)}$ shall be used, see 5B.7.1. Thus, midambles $m^{(9)}$ and $m^{(10)}$ are always left unused in this time slot.

The reference power corresponds to the sum of the power allocated to both midambles $m^{(1)}$ and $m^{(2)}$. Two possibilities exist:

- If SCTD antenna diversity is not applied to beacon channels all the reference power of any beacon channel is allocated to $m^{(1)}$.

- If SCTD antenna diversity is applied to beacon channels, for any beacon channel midambles $m^{(1)}$ and $m^{(2)}$ are each allocated half of the reference power.

5B.7 Midamble Allocation for Physical Channels

Midamble allocation for physical channels is identical to 3.84Mcps TDD [section 5.6]. The association between midambles and channelisation codes is given in Annex AB.3.

5B.8 Midamble Transmit Power

There shall be no offset between the sum of the powers allocated to all midambles in a timeslot and the sum of the powers allocated to the data symbol fields. The transmit power within a timeslot is hence constant.

The midamble transmit power of beacon channels is equal to the reference power. If SCTD is used for beacon channels, the reference power is equally divided between the midambles $m^{(1)}$ and $m^{(2)}$.

The midamble transmit power of all other physical channels depends on the midamble allocation scheme used. The following rules apply

- In case of Default Midamble Allocation, every midamble is transmitted with the same power as the associated codes.
- In case of Common Midamble Allocation in the downlink, the transmit power of this common midamble is such that there is no power offset between the data parts and the midamble part of the overall transmit signal within one time slot.
- In case of UE Specific Midamble Allocation, the transmit power of the UE specific midamble is such that there is no power offset between the data parts and the midamble part of every user within one time slot.

The following figure 18AQ depicts the midamble powers for the different channel types and midamble allocation schemes.

- Note 1: In figure 18AQ, the codes $c(1)$ to $c(32)$ represent the set of usable codes and not the set of used codes.
- Note 2: The common midamble allocation and the midamble allocation by higher layers are not applicable in those beacon time slots, in which the P-CCPCH is located, see section 5B.7.

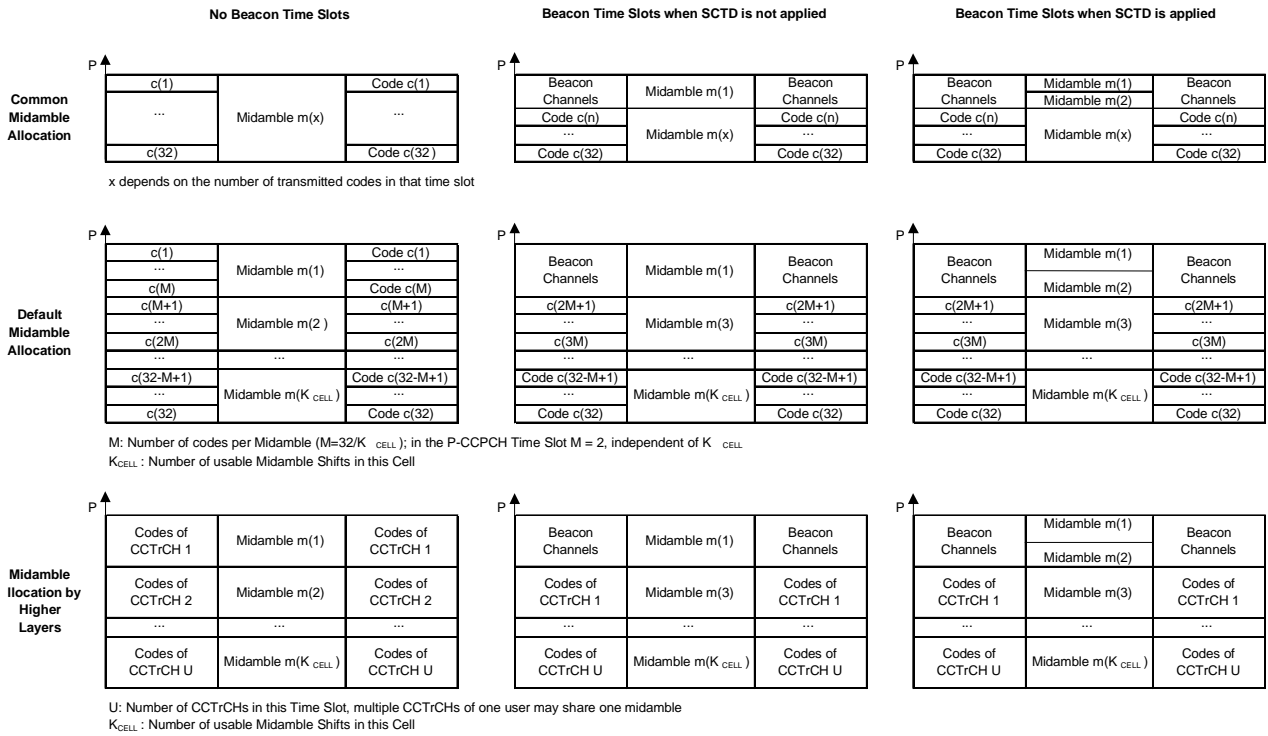


Figure 18AQ: Midamble powers for the different midamble allocation schemes

6 Mapping of transport channels to physical channels for the 3.84 Mcps option

This clause describes the way in which transport channels are mapped onto physical resources, see figure 19.

| Transport Channels | Physical Channels |
|--------------------|--|
| DCH _____ | Dedicated Physical Channel (DPCH) |
| BCH _____ | Primary Common Control Physical Channel (P-CCPCH) |
| FACH _____ | Secondary Common Control Physical Channel (S-CCPCH) |
| PCH _____ | |
| RACH _____ | Physical Random Access Channel (PRACH) |
| USCH _____ | Physical Uplink Shared Channel (PUSCH) |
| DSCH _____ | Physical Downlink Shared Channel (PDSCH) |
| | Paging Indicator Channel (PICH) |
| | MBMS Indication Channel (MICH) |
| | Synchronisation Channel (SCH) |
| | Physical Node B Synchronisation Channel (PNBSCH) |
| HS-DSCH _____ | High Speed Physical Downlink Shared Channel (HS-PDSCH) |
| | Shared Control Channel for HS-DSCH (HS-SCCH) |
| | Shared Information Channel for HS-DSCH (HS-SICH) |
| E-DCH _____ | E-DCH Physical Uplink Channel (E-PUCH) |
| | E-DCH Random Access Uplink Control Channel (E-RUCCH) |
| | E-DCH Absolute Grant Channel (E-AGCH) |
| | E-DCH Hybrid ARQ Indicator Channel (E-HICH) |

Figure 19: Transport channel to physical channel mapping

6.1 Dedicated Transport Channels

6.1.1 The Dedicated Channel (DCH)

A dedicated transport channel is mapped onto one or more physical channels. An interleaving period is associated with each allocation. The frame is subdivided into slots that are available for uplink and downlink information transfer. The mapping of transport blocks on physical channels is described in TS 25.222 ("multiplexing and channel coding").

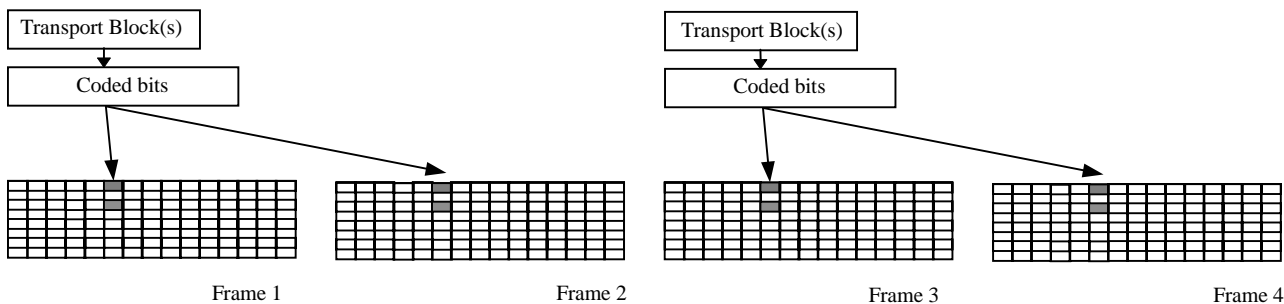


Figure 20: Mapping of Transport Blocks onto the physical bearer

For NRT packet data services, shared channels (USCH and DSCH) can be used to allow efficient allocations for a short period of time.

6.1.2 The Enhanced Uplink Dedicated Channel (E-DCH)

The enhanced uplink dedicated channel is mapped on one or several E-PUCH, see subclause 5.3.13.

6.1.2.1 E-DCH/E-AGCH Association and Timing

The E-DCH is always associated with a number of E-DCH Absolute Grant Channels (E-AGCH) and one hybrid ARQ indicator channel (E-HICH). A grant of E-DCH transmission resources may be transmitted to the UE on any one of the associated E-AGCH. All relevant Layer 1 control information related to an E-DCH TTI is transmitted in the associated E-AGCH and E-HICH.

The E-DCH related time slot information that is carried on the E-AGCH refers to the next valid E-PUCH allocation, which is given by the following limitation: There shall be an offset of $n_{E-AGCH} \geq 6$ time slots between the E-AGCH carrying the E-DCH related information and the first indicated E-PUCH (in time) for a given UE. The E-DCH related time slot information shall not refer to two subsequent radio frames but shall always refer to either the same or the following radio frame, as illustrated in figure 20a. Note that the figure only shows the E-AGCH that carries the E-DCH related information for the given UE.

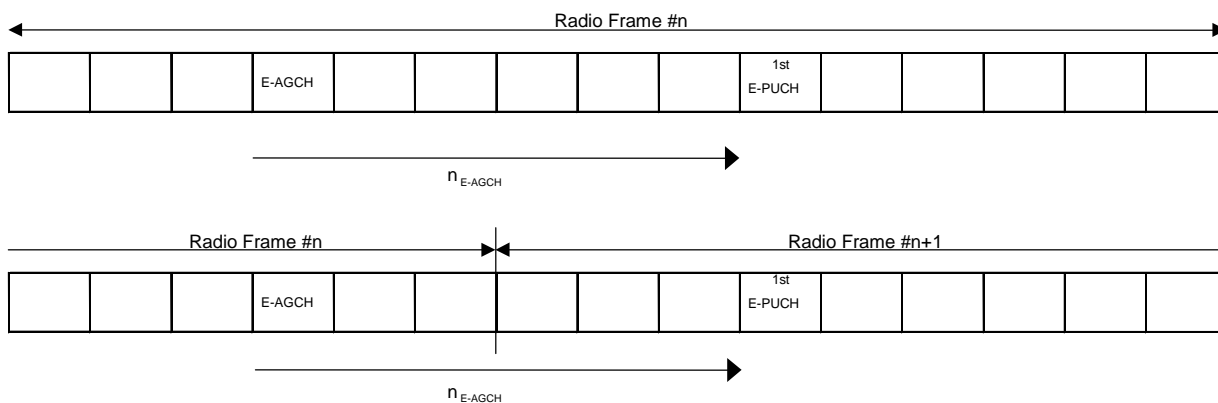


Figure 20a: Timing for E-AGCH and E-DCH for different radio frame configurations for a given UE

6.1.2.2 E-DCH/E-HICH Association and Timing

All E-DCH operations within the cell are associated with the same E-HICH channelisation code. A single E-HICH channelisation code exists in the cell per E-DCH TTI (10ms). For a given UE, a HARQ acknowledgement indicator is synchronously linked with the E-DCH TTI transmission to which it relates. There is thus a one-to-one association between an E-DCH TTI transmission and its respective HARQ acknowledgment indicator on the associated E-HICH.

The associated E-HICH shall reside on the first instance of the E-HICH channelisation code to occur after n_{E-HICH} timeslots have elapsed since the start of the last E-PUCH of the corresponding E-DCH TTI (see examples of figure 20b). The value of n_{E-HICH} is configurable by higher layers within the range 4 to 44 timeslots.

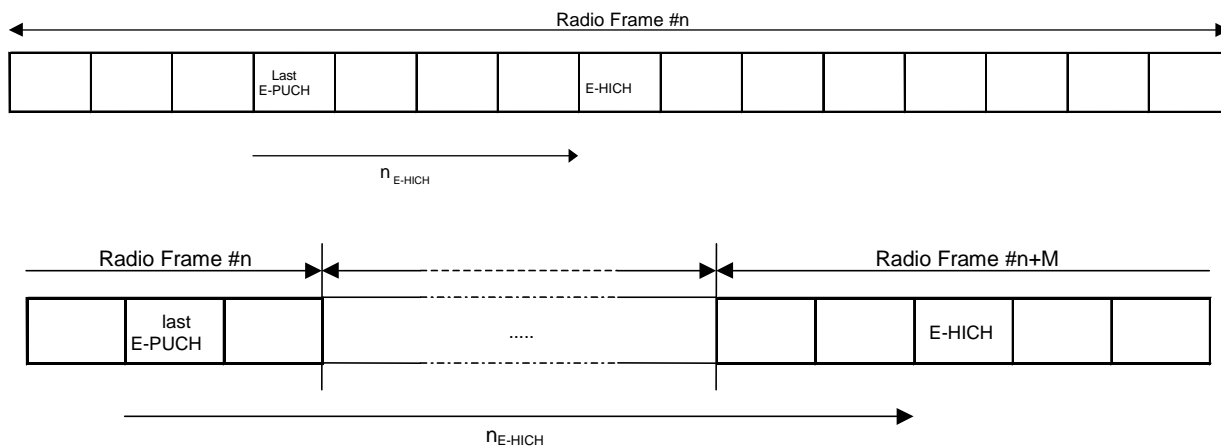


Figure 20b: Timing for E-DCH and E-HICH for a given UE

The HARQ acknowledgement indicator associated with an E-DCH transmission is transmitted using one of 240 signature sequences carried by the associated E-HICH channelisation code. Which signature sequence $r = 0, 1, 2, \dots, 239$ is used is calculated for each E-DCH resource allocation using the information signalled on the associated E-AGCH as follows:

$$r = 16(t_0 - 1) + (q_0 - 1) \frac{16}{Q_0}$$

- where:

- o t_0 is the bit position ($1 \dots n_{TRRI}$) of the first active timeslot in the timeslot resource related information bitmap (see [7]) on E-AGCH and where bit position 1 corresponds to the lowest-numbered timeslot
- o q_0 is the allocated channelisation code index ($1, 2, 3, \dots, Q_0$)
- o Q_0 is the spreading factor of the allocated uplink channelisation code

6.2 Common Transport Channels

6.2.1 The Broadcast Channel (BCH)

The BCH is mapped onto the P-CCPCH. The secondary SCH codes indicate in which timeslot a mobile can find the P-CCPCH containing BCH.

6.2.2 The Paging Channel (PCH)

The PCH is mapped onto one or several S-CCPCHs so that capacity can be matched to requirements. The location of the PCH is indicated on the BCH. It is always transmitted at a reference power level.

To allow an efficient DRX, the PCH is divided into PCH blocks, each of which comprising N_{PCH} paging sub-channels. N_{PCH} is configured by higher layers. Each paging sub-channel is mapped onto 2 consecutive PCH frames within one PCH block. Layer 3 information to a particular UE is transmitted only in the paging sub-channel, that is assigned to the

UE by higher layers, see [15]. The assignment of UEs to paging sub-channels is independent of the assignment of UEs to page indicators.

6.2.2.1 PCH/PICH Association

As depicted in figure 21, a paging block consists of one PICH block and one PCH block. If a paging indicator in a certain PICH block is set to '1' it is an indication that UEs associated with this paging indicator shall read their corresponding paging sub-channel within the same paging block. The value $N_{GAP} > 0$ of frames between the end of the PICH block and the beginning of the PCH block is configured by higher layers.

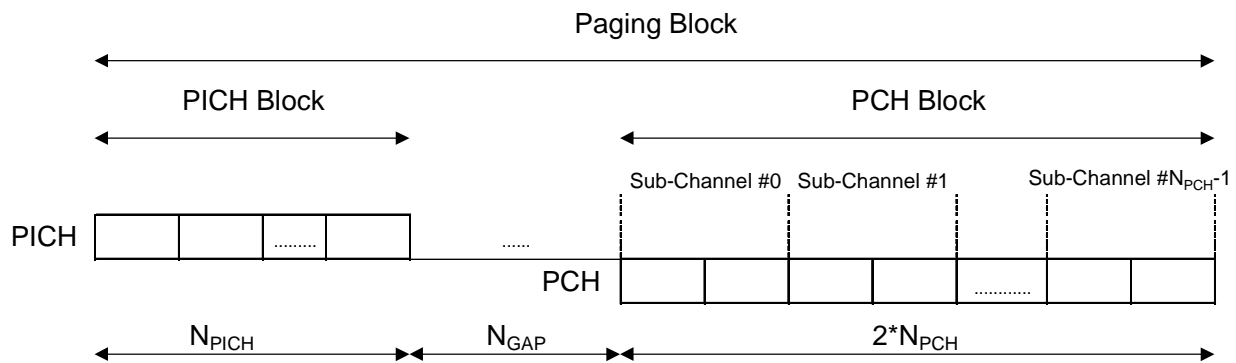


Figure 21: Paging Sub-Channels and Association of PICH and PCH blocks

6.2.3 The Forward Channel (FACH)

The FACH is mapped onto one or several S-CCPCHs. The location of the FACH is indicated on the BCH and both, capacity and location can be changed, if required. FACH may or may not be power controlled.

6.2.4 The Random Access Channel (RACH)

The RACH has intraslot interleaving only and is mapped onto PRACH. The same slot may be used for PRACH by more than one cell. Multiple transmissions using different spreading codes may be received in parallel. More than one slot per frame may be administered for the PRACH. The location of slots allocated to PRACH is broadcast on the BCH. The PRACH uses open loop power control. The details of the employed open loop power control algorithm may be different from the corresponding algorithm on other channels.

6.2.5 The Uplink Shared Channel (USCH)

The uplink shared channel is mapped on one or several PUSCH, see subclause 5.3.5.

6.2.6 The Downlink Shared Channel (DSCH)

The downlink shared channel is mapped on one or several PDSCH, see subclause 5.3.6.

6.2.7 The High Speed Downlink Shared Channel (HS-DSCH)

The high speed downlink shared channel is mapped on one or several HS-PDSCH, see subclause 5.3.9.

6.2.7.1 HS-DSCH/HS-SCCH Association and Timing

The HS-DSCH is always associated with a number of High Speed Shared Control Channels (HS-SCCH). The number of HS-SCCHs that are associated with an HS-DSCH for one UE can range from a minimum of one HS-SCCH ($M=1$) to a maximum of four HS-SCCH ($M=4$). All relevant Layer 1 control information is transmitted in the associated HS-SCCH i.e. the HS-PDSCH does not carry any Layer 1 control information.

The HS-DSCH related time slot information that is carried on the HS-SCCH refers to the next valid HS-PDSCH allocation, which is given by the following limitation: There shall be an offset of $n_{HS-SCCH} \geq 4$ time slots between the HS-SCCH carrying the HS-DSCH related information and the first indicated HS-PDSCH (in time) for a given UE. The HS-DSCH related time slot information shall not refer to two subsequent radio frames but shall always refer to either the same or the following radio frame, as illustrated in figure 21A. Note that the figure only shows the HS-SCCH that carries the HS-DSCH related information for the given UE.

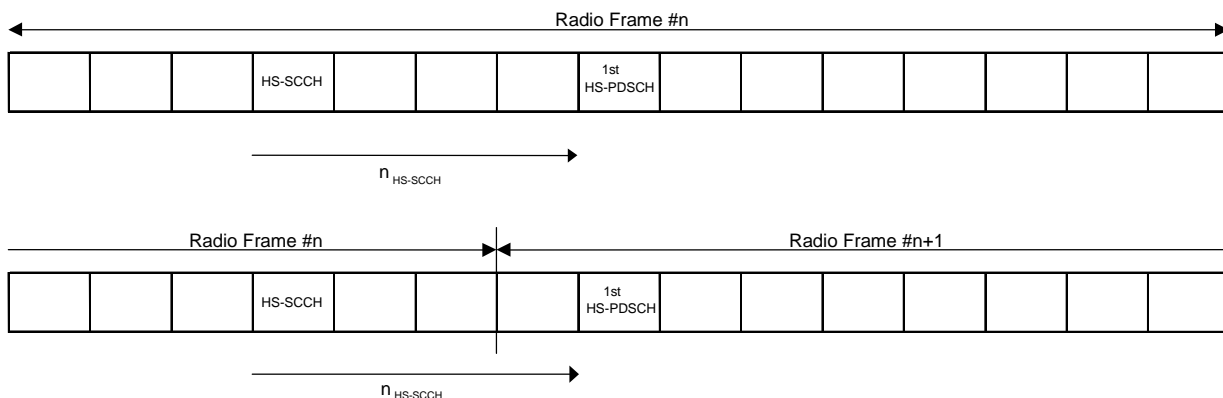


Figure 21A: Timing for HS-SCCH and HS-PDSCH for different radio frame configurations for a given UE

6.2.7.2 HS-SCCH/HS-DSCH/HS-SICH Association and Timing

The HS-SCCH is always associated with one HS-SICH. The association between the HS-SCCH in DL and HS-SICH in UL shall be pre-defined by higher layers and is common for all UEs.

The UE shall transmit the HS-DSCH related ACK / NACK on the next available associated HS-SICH with the following limitation: There shall be an offset of $n_{HS-SICH} \geq 17$ time slots between the last allocated HS-PDSCH (in time) and the HS-SICH for the given UE. Hence, the HS-SICH transmission shall be made in the next or next but one radio frame, following the HS-DSCH transmission, as illustrated in figure 21B. Note that the figure only shows the HS-SICH that carries the HS-DSCH related ACK / NACK for the given UE.

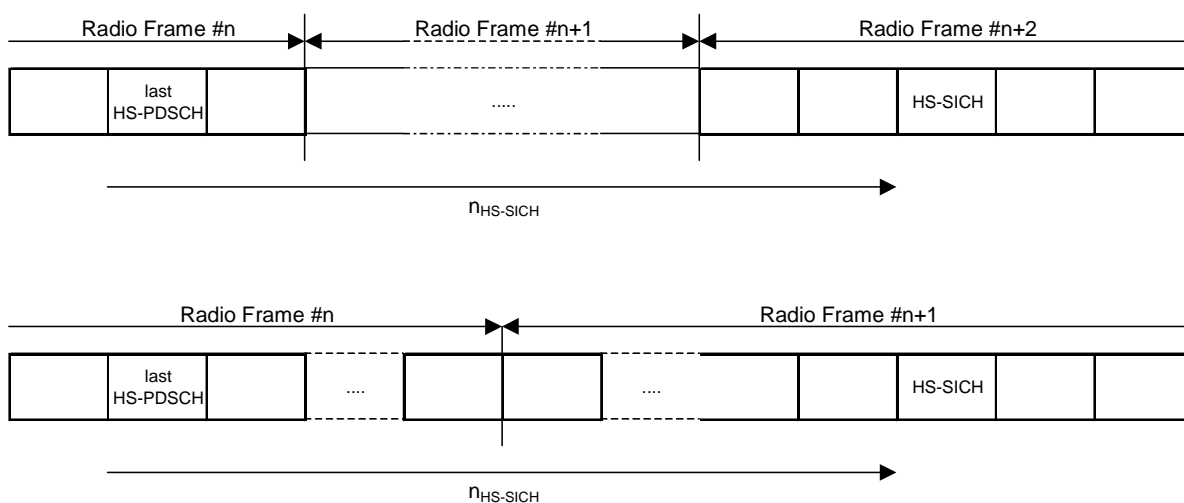


Figure 21B: Timing for HS-PDSCH and HS-SICH for different radio frame configurations for a given UE

7 Mapping of transport channels to physical channels for the 1.28 Mcps option

This clause describes the way in which the transport channels are mapped onto physical resources, see figure 22.

| Transport channels | Physical channels |
|--------------------|--|
| DCH | Dedicated Physical Channel (DPCH) |
| BCH | Primary Common Control Physical Channels (P-CCPCH) |
| PCH | Secondary Common Control Physical Channels(S-CCPCH) |
| FACH | Secondary Common Control Physical Channels(S-CCPCH) |
| | PICH |
| | MICH |
| | PLCCH |
| RACH | Physical Random Access Channel (PRACH) |
| USCH | Physical Uplink Shared Channel (PUSCH) |
| DSCH | Physical Downlink Shared Channel (PDSCH) |
| | Down link Pilot Channel (DwPCH) |
| | Up link Pilot Channel (UpPCH) |
| | FPACH |
| HS-DSCH | High Speed Physical Downlink Shared Channel (HS-PDSCH) |
| | Shared Control Channel for HS-DSCH (HS-SCCH) |
| | Shared Information Channel for HS-DSCH (HS-SICH) |
| E-DCH | E-DCH Physical Uplink Channel (E-PUCH) |
| | E-DCH Random Access Uplink Control Channel (E-RUCCH) |
| | E-DCH Absolute Grant Channel (E-AGCH) |
| | E-DCH Hybrid ARQ Indicator Channel (E-HICH) |

Figure 22: Transport channel to physical channel mapping for 1.28Mcps TDD

7.1 Dedicated Transport Channels

7.1.1 The Dedicated Channel (DCH)

The mapping of transport blocks to physical bearers is in principle the same as in 3.84 Mcps TDD but due to the subframe structure the coded bits are mapped onto each of the subframes within the given TTI.

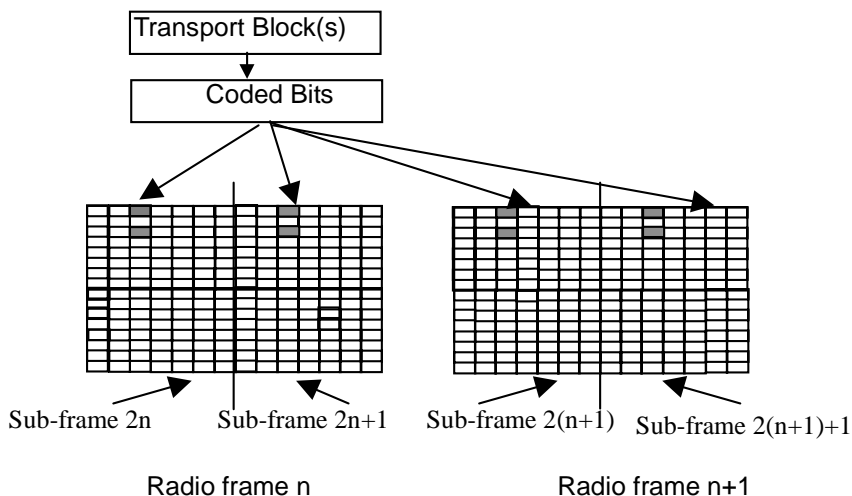


Figure 23 : Mapping of Transport Blocks onto the physical bearer (TTI= 20ms)

7.1.2 The Enhanced Uplink Dedicated Channel (E-DCH)

The enhanced uplink dedicated channel is mapped on one or several E-PUCH, see subclause 5A.3.14.

7.1.2.1 E-DCH/E-AGCH Association and Timing

The E-DCH is always associated with a number of E-DCH Absolute Grant Channels (E-AGCH) and up to four hybrid ARQ Indicator Channel (E-HICH). A grant of E-DCH transmission resources may be transmitted to the UE on any one of the associated E-AGCH. All relevant Layer 1 control information related to an E-DCH TTI is transmitted in the associated E-AGCH and E-HICH.

The E-DCH related timeslot information that is carried on the E-AGCH refers to the next valid E-PUCH allocation, which is given by the following limitation: There shall be an offset of $n_{E-AGCH} \geq 6$ time slots between the E-AGCH carrying the E-DCH related information and the first indicated E-PUCH (in time) for a given UE. DwPTS and UpPTS shall not be taken into account in this limitation as illustrated in figure 23A. Note that the figure only shows the E-AGCH that carries the E-DCH related information for the given UE and that DwPTS and UpPTS are not considered in this figure.

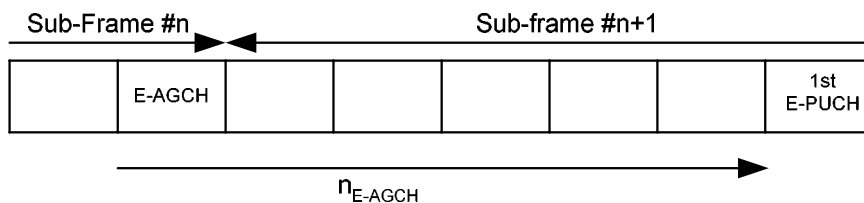


Figure 23A: Timing for E-AGCH and E-PUCH for different radio frame configurations for a given UE

7.1.2.2 E-DCH/E-HICH Association and Timing

For a given UE, a HARQ acknowledgement indicator (E-HICH) is synchronously linked with the E-DCH TTI transmission to which it relates.

The associated E-HICH shall reside on the first E-HICH instance of the E-HICH channelisation code to occur after n_{E-HICH} timeslots have elapsed since the start of the last E-PUCH of the corresponding E-DCH TTI (see examples of figure 23B). DwPTS and UpPTS are not considered in the figure. The value of n_{E-HICH} is configurable by higher layers within the range 4 to 15 timeslots. DwPTS and UpPTS shall not be taken into account in this limitation.

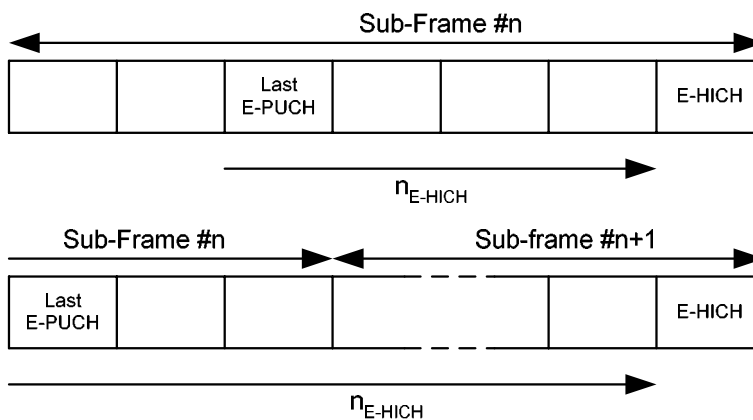


Figure 23B: Timing for E-DCH and E-HICH for a given UE

7.2 Common Transport Channels

7.2.1 The Broadcast Channel (BCH)

There are two P-CCPCHs, P-CCPCH 1 and P-CCPCH 2 which are mapped onto timeslot#0 using the channelisation codes $C_{Q=16}^{(k=1)}$ and $C_{Q=16}^{(k=2)}$ with spreading factor 16. The BCH is mapped onto the P-CCPCH1+P-CCPCH2.

The position of the P-CCPCHs is indicated by the relative phases of the bursts in the DwPTS with respect to the P-CCPCHs midamble sequences, see [8]. One special combination of the phase differences of the burst in the DwPTS with respect to the P-CCPCH midamble indicates the position of the P-CCPCH in the multi-frame and the start position of the interleaving period.

7.2.2 The Paging Channel (PCH)

The mapping of Paging Channels onto S-CCPCHs and the association between PCHs and Paging Indicator Channels is the same as in the 3.84 Mcps TDD option, cf. 6.2.2 'The paging Channel' and 6.2.2.1 'PCH/PICH Association' respectively.

7.2.3 The Forward Channel (FACH)

The FACH is mapped onto one or several S-CCPCHs. The location of the FACH is indicated on the BCH and both, capacity and location can be changed, if required. FACH may or may not be power controlled.

7.2.4 The Random Access Channel (RACH)

The RACH is mapped onto PRACH. More than one slot per frame may be administered for the PRACH. The location of slots allocated to PRACH is broadcast on the BCH. The uplink sync codes (SYNC-UL sequences) used by the UEs for UL synchronisation have a well known association with the P-RACHs, as broadcast on the BCH. On the PRACH, both power control and uplink synchronisation control are used.

7.2.5 The Uplink Shared Channel (USCH)

The uplink shared channel is mapped onto one or several PUSCH, see subclause 5A.3.6 "Physical Uplink Shared Channel (PUSCH)"

7.2.6 The Downlink Shared Channel (DSCH)

The downlink shared channel is mapped onto one or several PDSCH, see subclause 5A.3.7 "Physical Downlink Shared Channel (PDSCH)"

7.2.7 The High Speed Downlink Shared Channel (HS-DSCH)

The high speed downlink shared channel is mapped on one or several HS-PDSCH, see subclause 5A.3.9.

7.2.7.1 HS-DSCH/HS-SCCH Association and Timing

The HS-DSCH is always associated with one DL DPCH and a number of High Speed Shared Control Channels (HS-SCCH). The number of HS-SCCHs that are associated with an HS-DSCH for one UE can range from a minimum of one HS-SCCH ($M=1$) to a maximum of four HS-SCCH ($M=4$). All relevant Layer 1 control information is transmitted in the associated HS-SCCH i.e. the HS-PDSCH does not carry any Layer 1 control information.

The HS-DSCH related time slot information that is carried on the HS-SCCH refers to the next valid HS-PDSCH allocation, which is given by the following limitation: There shall be an offset of $n_{HS-SCCH} \geq 3$ time slots between the HS-SCCH carrying the HS-DSCH related information and the first indicated HS-PDSCH (in time) for a given UE. DwPTS and UpPTS shall not be taken into account in this limitation. The HS-DSCH related time slot information shall not refer to two subsequent sub-frames but shall always refer to either the same or the following sub-frame, as

illustrated in figure 24. Note that the figure only shows the HS-SCCH that carries the HS-DSCH related information for the given UE and that DwPTS and UpPTS are not considered in this figure.

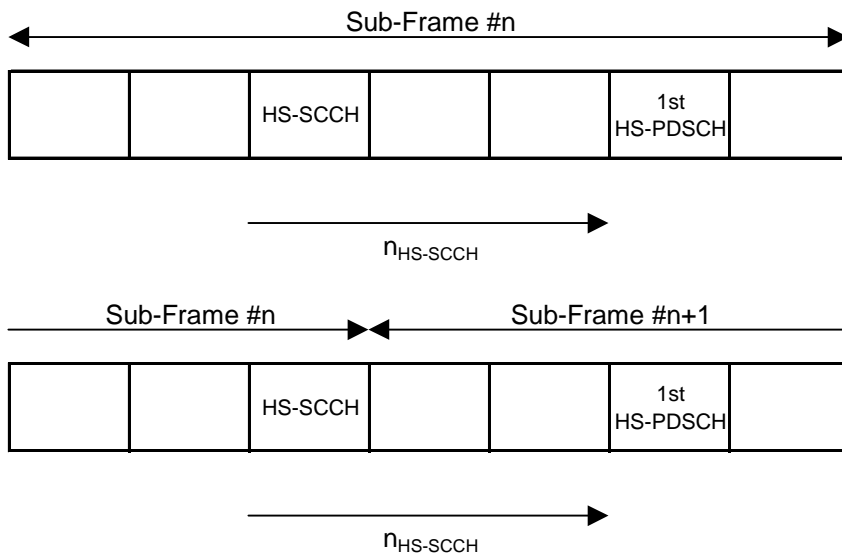


Figure 24: Timing for HS-SCCH and HS-DSCH for different radio frame configurations for a given UE

7.2.7.2 HS-SCCH/HS-DSCH/HS-SICH Association and Timing

The HS-SCCH is always associated with one HS-SICH, carrying the ACK/NACK and Channel Quality information (CQI). The association between the HS-SCCH in DL and HS-SICH in UL shall be pre-defined by higher layers and is common for all UEs.

The UE shall transmit the HS-DSCH related ACK / NACK on the next available associated HS-SICH with the following limitation: There shall be an offset of $n_{HS-SICH} \geq 9$ time slots between the last allocated HS-PDSCH (in time) and the HS-SICH for the given UE. DwPTS and UpPTS shall not be taken into account in this limitation. Hence, the HS-SICH transmission shall always be made in the next but one sub-frame, following the HS-DSCH transmission, as illustrated in figure 25. Note that the figure only shows the HS-SICH that carries the HS-DSCH related ACK / NACK for the given UE and that DwPTS and UpPTS are not considered in this figure.

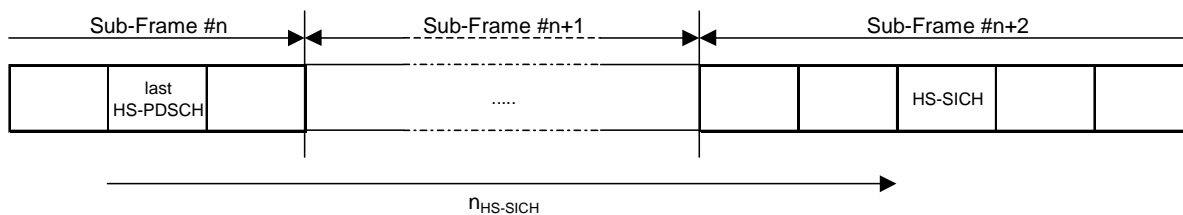


Figure 25: Timing for HS-DSCH and HS-SICH for different radio frame configurations for a given UE

8 Mapping of transport channels to physical channels for the 7.68 Mcps option

This clause describes the way in which transport channels are mapped onto physical resources, see figure 26.

| Transport Channels | Physical Channels |
|--------------------|--|
| DCH | Dedicated Physical Channel (DPCH) |
| BCH | Primary Common Control Physical Channel (P-CCPCH) |
| FACH | Secondary Common Control Physical Channel (S-CCPCH) |
| PCH | |
| RACH | Physical Random Access Channel (PRACH) |
| USCH | Physical Uplink Shared Channel (PUSCH) |
| DSCH | Physical Downlink Shared Channel (PDSCH) |
| | Paging Indicator Channel (PICH) |
| | MBMS Indication Channel (MICH) |
| | Synchronisation Channel (SCH) |
| HS-DSCH | High Speed Physical Downlink Shared Channel (HS-PDSCH) |
| | Shared Control Channel for HS-DSCH (HS-SCCH) |
| | Shared Information Channel for HS-DSCH (HS-SICH) |
| E-DCH | E-DCH Physical Uplink Channel (E-PUCH) |
| | E-DCH Random Access Uplink Control Channel (E-RUCCH) |
| | E-DCH Absolute Grant Channel (E-AGCH) |
| | E-DCH Hybrid ARQ Indicator Channel (E-HICH) |

Figure 26: Transport channel to physical channel mapping

8.1 Dedicated Transport Channels

8.1.1 The Dedicated Channel (DCH)

Mapping of dedicated transport channels to physical channels is identical to 3.84Mcps TDD cf. [6.1 Dedicated Transport Channels].

8.1.2 The Enhanced Uplink Dedicated Channel (E-DCH)

The enhanced uplink dedicated channel is mapped on one or several E-PUCH, see subclause 5B.4.12.

8.1.2.1 E-DCH/E-AGCH Association and Timing

The E-DCH is always associated with a number of E-DCH Absolute Grant Channels (E-AGCH) and with one or two hybrid ARQ indicator channels (E-HICH). A grant of E-DCH transmission resources may be transmitted to the UE on

any one of the associated E-AGCH. All relevant Layer 1 control information related to an E-DCH TTI is transmitted in the associated E-AGCH and one of the E-HICHs.

The E-DCH related time slot information that is carried on the E-AGCH refers to the next valid E-PUCH allocation, which is given by the following limitation: There shall be an offset of $n_{E-AGCH} \geq 6$ time slots between the E-AGCH carrying the E-DCH related information and the first indicated E-PUCH (in time) for a given UE. The E-DCH related time slot information shall not refer to two subsequent radio frames but shall always refer to either the same or the following radio frame, as illustrated in figure 27. Note that the figure only shows the E-AGCH that carries the E-DCH related information for the given UE.

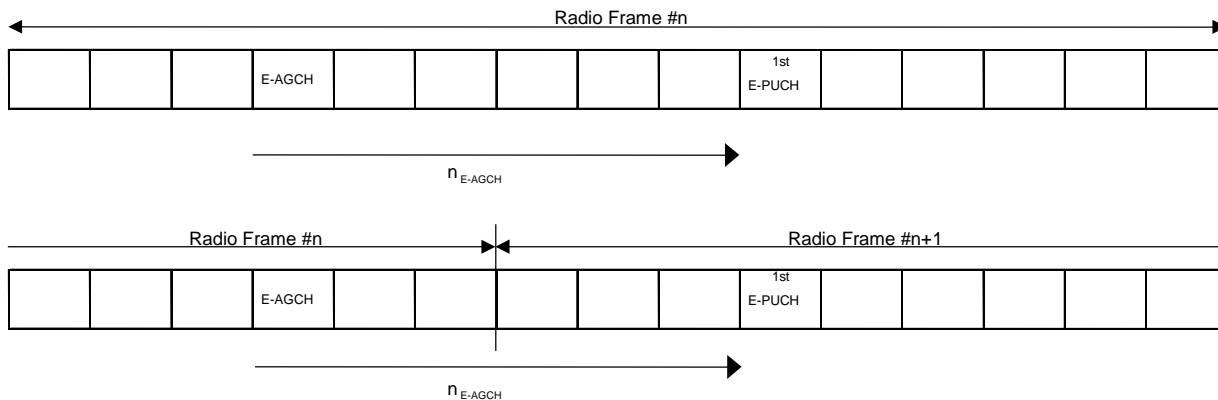


Figure 27: Timing for E-AGCH and E-DCH for different radio frame configurations for a given UE

8.1.2.2 E-DCH/E-HICH Association and Timing

E-DCH operations within the cell are associated with one or two channelisation codes carrying E-HICH (E-HICH₁ and E-HICH₂). If the number of timeslots configured for E-DCH use is 7 or more (this corresponds to the length of the timeslot resource related information field on E-AGCH – see [7]), both E-HICH₁ and E-HICH₂ channelisation codes shall be configured by higher layers, otherwise only the channelisation code E-HICH₁ is configured.

A single instance of E-HICH₁ (and E-HICH₂ if configured) channelisation codes exist in the cell per E-DCH TTI (10ms). For a given UE, a HARQ acknowledgement indicator is synchronously linked with the E-DCH TTI transmission to which it relates. There is thus a one-to-one association between an E-DCH TTI transmission and its respective HARQ acknowledgment indicator on one of the associated E-HICHs.

For each channelisation code carrying E-HICH, the associated instance shall be the first instance of that channelisation code to occur after n_{E-HICH} timeslots have elapsed since the start of the last E-PUCH of the corresponding E-DCH TTI (see examples of figure 28). The value of n_{E-HICH} is configurable by higher layers within the range 4 to 44 timeslots.

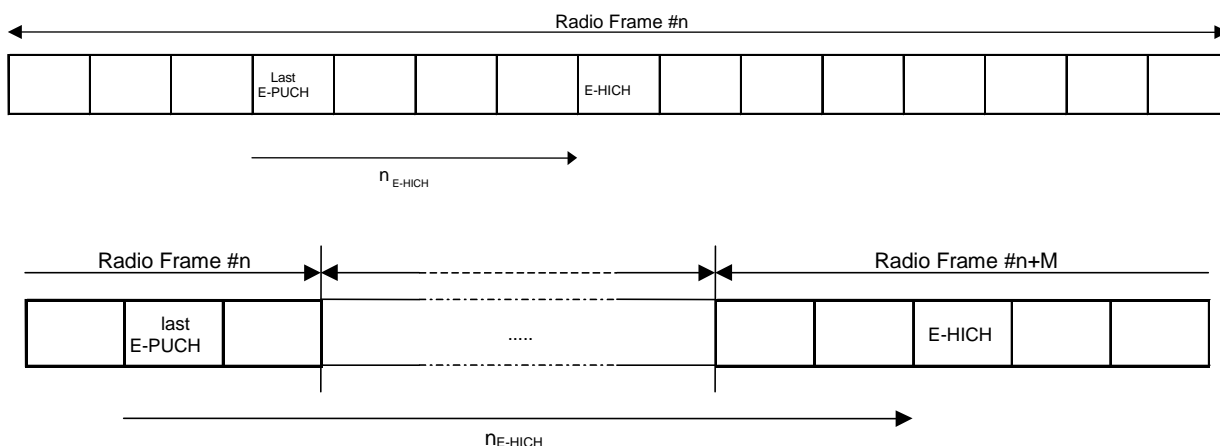


Figure 28: Timing for E-DCH and E-HICH for a given UE

The HARQ acknowledgement indicator associated with an E-DCH transmission is transmitted using one of 240 signature sequences carried by one of the associated E-HICH channelisation codes. Which signature sequence $r = 0, 1, 2, \dots, 239$ and (in the case that two channelisation codes are configured for E-HICH) which channelisation code is used are calculated for each E-DCH resource allocation using the following information signalled on the associated E-AGCH:

- t_0 is the bit position ($1 \dots n_{\text{TRRI}}$) of the first active timeslot in the timeslot resource related information bitmap (see [7]) on E-AGCH and where bit position 1 corresponds to the lowest-numbered timeslot
- q_0 is the allocated channelisation code index ($1, 2, 3, \dots, Q_0$)
- Q_0 is the spreading factor of the allocated uplink channelisation code

The value r'' is first calculated as:

$$r' = 32(t_0 - 1) + (q_0 - 1) \frac{32}{Q_0}$$

Then:

- if $r'' \leq 239$, $r = r''$ and channelisation code E-HICH₁ is used
- if $r'' > 239$, $r = (r'' - 240)$ and channelisation code E-HICH₂ is used.

8.2 Common Transport Channels

8.2.1 The Broadcast Channel (BCH)

The mapping of the broadcast channel (BCH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.1 The Broadcast Channel (BCH)].

8.2.2 The Paging Channel (PCH)

The mapping of the paging channel (PCH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.2 The Paging Channel (PCH)].

8.2.3 The Forward Channel (FACH)

The mapping of the forward access channel (FACH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.3 The Forward Access Channel (FACH)].

8.2.4 The Random Access Channel (RACH)

The mapping of the random access channel (RACH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.4 The Random Access Channel (RACH)].

8.2.5 The Uplink Shared Channel (USCH)

The mapping of the uplink shared channel (USCH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.5 The Uplink Shared Channel (USCH)].

8.2.6 The Downlink Shared Channel (DSCH)

The mapping of the downlink shared channel (DSCH) to physical channels is identical to 3.84Mcps TDD cf. [6.2.6 The Downlink Shared Channel (DSCH)].

8.2.7 The High Speed Downlink Shared Channel (HS-DSCH)

The high speed downlink shared channel is mapped on one or several HS-PDSCH, see subclause 5B.4.8.

8.2.7.1 HS-DSCH/HS-SCCH Association and Timing

The HS-DSCH/HS-SCCH association and timing is identical to 3.84Mcps TDD cf. [section 6.2.7.1 HS-DSCH/HS-SCCH Association and Timing] with the exception that the number of HS-SCCHs that are associated with an HS-DSCH for one UE can range from a minimum of one HS-SCCH ($M=1$) to a maximum of eight HS-SCCH ($M=8$).

8.2.7.2 HS-SCCH/HS-DSCH/HS-SICH Association and Timing

The HS-SCCH/HS-DSCH/HS-SICH association and timing is identical to 3.84Mcps TDD cf. [6.2.7.2 HS-SCCH/HS-DSCH/HS-SICH Association and Timing].

Annex A (normative): Basic Midamble Codes for the 3.84 Mcps option

A.1 Basic Midamble Codes for Burst Type 1 and 3

In the case of burst type 1 or 3 (see subclause 5.2.2) the midamble has a length of $L_m=512$, which is corresponding to: $K''=8$; $W=57$; $P=456$.

Depending on the possible delay spread timeslots are configured to use K_{Cell} midambles which are generated from the Basic Midamble Codes (see table A.1)

- for all $k=1,2,\dots,K$; $K=2K''$ or
- for $k=1,2,\dots,K''$, only, or
- for odd $k=1,3,5,\dots,\leq K''$, only.

In the beacon slot # k , where the P-CCPCH is located, the number of midambles $K_{Cell}=8$ (cf section 5.6.1). In all of the other timeslots that use burst type 1 or 3, K_{Cell} is individually configured from higher layers.

Depending on the cell size midambles for PRACH are generated from the Basic Midamble Codes (see table A.1)

- for $k=1,2,\dots,K''$ or
- for odd $k=1,3,5,\dots,\leq K''$, only.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in TS 25.223.

Table A.1: Basic Midamble Codes m_p according to equation (5) from subclause 5.2.3 for case of burst type 1 and 3

| Code ID | Basic Midamble Codes m_{pL} of length $P=456$ |
|------------|---|
| m_{pL0} | 8DF65B01E4650910A4BF89992E48F43860B07FE55FA0028E454EDCD1F0A09A6F029668F55427253FB8A71E5EF2EF360E539C489584413C6DC4 |
| m_{pL1} | 4C63F9BC3FD7B655D5401653BE75E1018DC26D271AADA1CF13FD348386759506270F2F953E93A44468E0A76605EAE8526225903B1201077602 |
| m_{pL2} | 8522611FFCAEB55A5F07D966036C852E7B15B893B3ABA9672C327380283D168564B8E1200F0E2205AF1BB23A58679899785CFA2A6C131CFDC4 |
| m_{pL3} | F58107E6B777C221999BDE9340E192DC6C31AB8AE85E70AA9BBEB39727435412A5A27C0EF73AB453ED0D28E5B032B94306EC1304736C91E922 |
| m_{pL4} | 89670985013DFD2223164B68A63BD58C7867E97316742D3ABD6CBDA4FC4E08C0B0CBE44451575C72F887507956BD1F27C466681800B4B016EE |
| m_{pL5} | FCDEF63500D6745CDB962594AF171740241E982E9210FC238C4DD85541F08C1A010F7B3161A7F4DF19BAD916FD308AB1CED2A32538C184E92C |
| m_{pL6} | DB04CE77A5BA7C0E09B6D3551072B11A7A43B6A355C1D6FDCF725D587874999895748DD09832ABC35CEC3008338249612E6FE5005E13B03103 |
| m_{pL7} | D2F61A622D0BA9E448CD29587D398EF8CDC3B6582B6CDD50E9E20BF5FE2B3258041E14D60821DC6725132C22D787CD5D497780D4241E3B420D |
| m_{pL8} | 7318524E62D806FA149ECC5435058A2B74111524B84727FE9A7923B4A1F0D8FCD89208F34BE E5CADEB90130F9954BB30605A98C11045FF173D |
| m_{pL9} | 8E832B4FA1A11E0BF318E84F54725C8052E0D099EF0AF54BC342BEE44976C9F38DE701623C7BF6474DF90D2E222A4915C8080E7CD3EC84DAC |
| m_{pL10} | CFA5BAC90780876C417933C43103B55699A8AD51164E590AF9DA6AF0C18804E1F74862F00CE7ECC899C85B6ABB0CAD5E50836AD7A39878FE2F |
| m_{pL11} | AD539094A19858A75458F1B98E286A4F7DC3A117083D04724CBE83F34102817C5531329CDB437FFF712241B644BDF0C1FEC8598A63C2F21BD7 |
| m_{pL12} | BEB8483139529BDE23E42DA6AB8170DD0BFBB30CE28A4502FAF3C8EDA219B9A6D5B849D9C9E4451F74E2408EA046061201E0C1D69CF48F3A94 |
| m_{pL13} | C482462CA7846266060D21688BA00B72E1EC84A3D5B7194C8DA39E21A3CE12BF512C8AAB6A7079F73C0D3E4F40AC555A4BCC453F1DFE3F6C82 |

| Code ID | Basic Midamble Codes m_{PL} of length $P=456$ |
|------------|---|
| m_{PL14} | 9663373935FD5C213AC58C0670206683D579D2526C05B0A81030DDF61A221D8A68EAD8D6F7AA0D662C07C6DCCD0115A54D39F03F7122B0675AC |
| m_{PL15} | 387397AE5CD3F2B3912C26B8F87CE82CEFEC55507DB08FB0C4CF2FD6858896201ACA7264281D0298440DD3481E5E9DDB24C16F30EB7A22948A |
| m_{PL16} | AFE9266843C892571B6230D808788C63B9065EA3BDFF687B92B8734A8D7099559FEA22C9416576D0C087EB4503E87E356471B330182A24A3E6 |
| m_{PL17} | 6E6C550A4CB74010F6C3E0328651DF421C456D9A5E8AE9D3946C10189D72B579184552EE3E799970969C870FE8A37B6C4BA890992103486DC0 |
| m_{PL18} | D803CA71B6F99CFB3105D40F4695D61EB0B62E803F79302EE3D2A6BF12EA70D304B181E8B38B3B74F5022B67EB8109808C62532688C563D4BE |
| m_{PL19} | E599ED48D01772055DBE9D343A4EA5EABE643DA38F06904FC7523B08C4101F021B199AF759A00D9AC298881D79413A77470992A75C7711492D0 |
| m_{PL20} | 9F30AC4162CE5D185953705F3D45F026F38E9B5721AEFE07370214D526A2C4B344B508B57BF B2492320C05903C79CBEE08C6E7F218B57E14D6 |
| m_{PL21} | B5971060DA84685B4D042ED0189FAF13C961B2EF61CC164E363B22AAB14AC8AF607906C1C6E04F2054C687AA6741A9E70639857DA02B6FFFA |
| m_{PL22} | 97135FC2226C4B4A5CBA5FCA3732763B87455F73A1148006F3DF214BD4C936D061E04045160E2CE33B9CD09D08FDE2A37F4E998322B4401D27 |
| m_{PL23} | 4D256D57C861B9791151A78D5299C56D116B6178B2A2D04BB95FB76540AF28341DC6EC4E7E D3BF9E508478D9C8F44914805DA82429E1CF320E |
| m_{PL24} | 858EF5C84CE32D18D9ABA110EEA7474CF0CD70254D2928C3F4DFF6BB3A518587CADA19029078AC90A8336C8178203BE3289E601F07D089CB64 |
| m_{PL25} | 920A8796A511650AEF32F93DD3C39C624E07AE03CE8C96139973F54DCB9803C5164ADB502D4FF561564D607037FCD172921F1982B102C3312C |
| m_{PL26} | 485C5DAE76B360A9C56E20B8422EA3E6ACF07CB093B5587CB0E6A5498A4714081EA98DBCD B0482B26E0D097C03444473D233BEF3C8E440DEBF |
| m_{PL27} | 565A9D54EA789892B024F97E728E8EE112411942C48BD0C5BC8AA457D8DC9941F0F7424B38643FFE6521CD306FBC56FE10F1428D4C245B5606 |
| m_{PL28} | 5AEF2C0C2C378179A1AC36242E6B3EDB72C42D3624437674F8D51260C0898C201837CBA14E9E23D1EF6451C4ACF27AB031F457A8A1BFD148AE |
| m_{PL29} | 87D8FE685417822A23D925307E6C11081ADAC4702BCCD9BE448E78984D109B50DEF5B7C58B C71EA1F0A6826BA8AD1978843E7697F3E416AADA |

| Code ID | Basic Midamble Codes m_{PL} of length $P=456$ |
|------------|--|
| m_{PL30} | 84802B72AF27B5BE724D1FB629E0E627BDB0D9061292562F98350C1D0C9D4B9D8E2BF71123C82EBB161003AE9829E07244D78F19926F8847A2 |
| m_{PL31} | 8CCB5128238BCB088E30972D62792AEF02B9BBDDCAD68C9916C00BF91CBE788B0F03851FAAF88605534FD73436C259D270B1013CB14226F658 |
| m_{PL32} | 62F4E6FAC2BF1979CE6854AA2D33534BFB2F946519101A6589131C3640707D40E67ED804AF8736AD213CAF5935741900061967E8285C27E34C |
| m_{PL33} | 4095E5B4EEAFCDF68A34B267EEA28D8444FA533900F41499E260D2E65C256A52E1DD5861F5227C98E00687D107233F51A1167BCF72FB184654 |
| m_{PL34} | 5630E9A79FCAD303404D9E5A802299162657AAC734761C6E90DA8BCE4F61A763E0BB48D3FEB3F78468C828ABA4828DAD06E0F904CFD40421DC |
| m_{PL35} | CD12B24C0BCA8AAC1FCBF050A3BC684A180E863D888F2506B48C68ECF17F76CB285991FBA18EB6397211FAD002F482D57A258CD45DE3FF1A6 |
| m_{PL36} | AFCF2A50877286CD3405442730C45514F082D9EC296B367C0F64F04C4E0007DCA9E50BEED5C102126E319ACBC64F1729272F2F72C9397029FE |
| m_{PL37} | 18F89EE8589D20882A72A44DCDF0050F0A3D88DBA6531614973D26905FDF41E3F779FF0648E8AF1540928511BCF4C25D9C64AF34AC31B8965 |
| m_{PL38} | F890D550F33F032ECD3A51FED427D634F64EB29AF1332A23CD961258E4BAED040E7B336918E250EC272A12816B9EBFFA1E0AE401185F08C10 |
| m_{PL39} | ACE5DD61506047E80FB7D41BD3992DF4D7F18EB46CC145C0E9105428C2F8F299141F5D66691904A7DC2513A3B83994ACB1292246B32818FE9D |
| m_{PL40} | 150680FF900C9B46E1E24D54BE2238CB950A934E5CCDE9BC3939EB51CB0AE202B7D339EEC2018B33A0AB9B63DA5D512D64FB58C0E51A1C82C2 |
| m_{PL41} | 51A579EED2663A002D32D10A0753173612F4D5BA167D1807C61F25C4D42C063682E8E9DD019F79D446A046EB3F75E50FEB228DC52F08E694B6 |
| m_{PL42} | CDC644FE4C0C6897604F9D14D714123BF16FFF0E49F35F674908CA60653702FE27BCCA2A47098453AF8661055C8C549EB6A951A8396AD4B94D |
| m_{PL43} | 750A10366C595373C5001CA3E4239764B1409D602CF6052B39BC6A3255A15FE06C782C4C5F847026A7E79838A2933A61C77BB6CBF5915B2DA5 |
| m_{PL44} | B7490686D78E409082C4C48FE18D4C35429C20AADF96076B92FC4E85490664753DB0891A0B27FD849BB7FCA99E3B38F22F8C662852C0D35AA6 |
| m_{PL45} | D86E1B575B47D23DA811806A54C231281F03317830E7BD305D3CAA7D6382A5233104CFD54D22DF9F34535E5B390D9040CF1375FEA44CEC29E2 |
| m_{PL46} | 828655960C026EC67B683480992AC2ED2C43ABC606F5220C2945F373470BE7ED5BCCF7C1AA0986BBCC84F11F1658AA568FAA0A60C5F0B5BFA |
| m_{PL47} | D76230E02C8533653AAB99B288AA2ADE25A1C1BF28516C04239240EAF1EFC0B98974B51F886861D8A1E9F5D62CFFEC309F071A9716B325101B |
| m_{PL48} | EA207662865B8A07D69648964DED818EE474A90B94473408871880E63EF0596B9FCFEC3C06B86EA6AD2B06C91672EFB33C70241A5450B59B8A |
| m_{PL49} | 9CB5459549909835FAB22F0D99298C120ACF479F814CCE749079D40688F28101037762F125C776DA9C5FA1FCE0E76E452F8185354FDCDE94E2 |
| m_{PL50} | 227506304AEC1D6F93569B51FDC3405A0F38194F65BE17163A3CB9827A35AECEA757D020FE249377ECD561428A38FEED004EC859C272563185 |
| m_{PL51} | 96B9AEC9938910F0E533422A3977519B05CD4AD3909BC15A7502D48D49C124FA192A8E57027CFEB11DF542010603CE5C9FDF8E626D4FBF8CF4 |
| m_{PL52} | A6AAD06E095A9BE0BD9F8A2ED40C3CBDBAE91C700CBB778C8696CC06F3A675C16BDB2918E5F2111005A8727206DC6A9684E05655185C398EEB |
| m_{PL53} | CD168D384A78DA172991AD333EE2A9880905AFE59E2A2A4AC4414C40F82874F98A3CBE7B44F4C7F4710B35FD88AFC0399FAEB070EB9CA4D30A |
| m_{PL54} | 22016CA87AD1549174A8699DD65599697871091457E83E0912E7E77A06531C209394D283D18A38662B73681DD9C5BF330FED978BDA7D487CA8 |
| m_{PL55} | B9401B0843AA6F7827A13BD66C922287E8886C31EB5B90B82B472CCD6DA3D8D4FBBF78B8F8496DFA8252B06429D5DD17142F1C908ACCD70EAO C |
| m_{PL56} | E42B9EFDC5D09AC27B3C7DA28D02493A70521223B9D7A76A9D13E9C171017964D16A70C08EAD02C3DC948889C23E365AFCF01BF20B89B0BF5C |
| m_{PL57} | 9DA0180168DB915E9F3597B59312198E1B5CC00D743C2ECB0DBAADA3E35A2465ED1EAA9D74734D49A313CE4DFF020D0760E3153DC485603943 |
| m_{PL58} | B6C966619ECB98191D719C187C07BD503425650CAA3A2D1F2DF5212B1441D7A0C1D36A4C9C2550240AD17CA43BB3943DFFFBF1E283D81299CC |
| m_{PL59} | DB0E8C41F08A03D477C1AA548799274C4BF3EB68F2636166FDC8D4B1E7132539930297E228BA232BB5C279FA5ECA3AC10E24361AF050A453B8 |
| m_{PL60} | 89BCE2DE2974EEBA833CF32F224C85A2891484478527DB48FA6ECEA84C5E288CC3914CB54ADA0476278750187F68FBEA41017E1E58DF1A5A3D |
| m_{PL61} | 70A457D1314A278625443EEB52520815EC92CEF17417B97440DCB531BC1CE83212F63270418D0FBDE71F6DB9E0EA88772E1E4535B6633E4425 |

| Code ID | Basic Midamble Codes m_{PL} of length $P=456$ |
|------------|--|
| m_{PL62} | C388460AD54B36C4452CF0433BD347100ACCC24C79C535AD3E1F23FE0425E93A044C553BFA116E09AA4BB32F13CFA76FBA1BC17520F45EFD44 |
| m_{PL63} | 0BAFCADCDF9AA2846681782CD3B90CA036A863C78EE1507620BC394D0C6804B4C97A15BC9C0D7B79E6892EA1BFF1A0DD9573A9213AB140D0D2 |
| m_{PL64} | 833B0226789A62882FCD27A30885E67872B1A1C2FA484AD498011599DD57E8E2A07A560B47167AA5F60EF47177DBB1632D5387A2896348640B |
| m_{PL65} | 8F52820323ABA5E6C6B465821B621600B980E59F53A599DA5646BA103214336836CF17E3386CE4FB2BC5F25CCB30CF7F500546828EC8786B8E |
| m_{PL66} | E2E9A29C3C8207B9A4508FD2F667A159F068EEE8D00686F46EA904C3692C1D79DFF1B32E5103720D47B4B58AC35384A26087027E141B3126A8 |
| m_{PL67} | 70E7C39FD2D3AE1DCE341699A544D801A8688A6EE47C5CB3630022147DDC06241FC5337A348A462B2472DEC5E104DD520ADA5114DB065D4B0D |
| m_{PL68} | 9E3483CAB164BD053C4971D4D87494CC689033D589EF80E5453376E4A8DCC02183B98C36B0FF7DDC0AD07FCE8B4D5164371BD03A2110AD1247 |
| m_{PL69} | 04DA1C649B0608938DAADD3FE920A4F681690C54505429DBDCDCF10067AB5714BCDDFE1F28692710F794765781C1D233344E119BEE8A8416DC |
| m_{PL70} | 7A18D6D30BDF44410714C3DCA27D8F9EA8A542D87122205640B98313C91AD9A0B993A5A7BC3E035F93B88BBE6D4204BC82A9FA8D4C1A7618CF |
| m_{PL71} | EB9525E10265A48733C8E0E77E459310112A71DCA680F68AC044B64BC0A31D02EEA0F7ACAAAB7F1E574E94FEA2D1301CB14B03263DA8122B76 |
| m_{PL72} | E706C6ED2D6F89153835079BE0C6D45310845EF2F9F6C6AE91B7419810508BA501C0148BF09955BAD90D6391BA8EBA5CEFB23221CC75143D7 |
| m_{PL73} | DF071A10AC4120CD1431590BEDCFF9483CA7047B19590D035D309240BDB4264E9A3A2761402EC97FD8BC51B4AF32E37FBC47162A2357D18751 |
| m_{PL74} | F0F952B2238139F46D8254D1A2C1C22A16BA71EC0C0C900ED1442452D7F44C798BC65FF40671B88074BA0B74C6510996EEAC495C5B49C37DEB |
| m_{PL75} | 1C86BD82EDA81FD65418D3837B5552A853791456D93B06C62C650D86CFBEC269AFFD772763064062C03751B9428C6DA2E60383025F9E404B70 |
| m_{PL76} | B390978DD2552C88AABA7838489A6F5A8E9C41E95FFA2215819BF8A5BFE39C8A706CC658E549E966611B843A1468406C41C09D1560BEDA4F1B |
| m_{PL77} | 1A69EC9D053C7E84BAE7A48CCC71857D0C6B06D1065E3EA4633B133AA022B8104F6EE7C69B6184B746C8822958B0A16686F27C8A0E3B4EFEAD |
| m_{PL78} | C95B2070816DC97C6D8DD2583263E73F9AAAFD13F0548D2EBD835824418F11E54111005FB713AB234BE412347358281C7DE331EDD21B8BEA52 |
| m_{PL79} | 56D6408399F23C2ED85EE0F68111D69A91A3AD9A732AC57CA08F86CC28B3CF4E4B02EBBA0BCE5CAE5BACC4D52004070797C04093A84BB18DBA |
| m_{PL80} | E662E7043867BE250764DA0596D34A582A619B408B505E6211DD6286E93A37F95B1EA680C0C5F3E777E3F71E8D75495D59043217FC0E222E16 |
| m_{PL81} | 27D5E681C222297AD478A079EF12F1A98F744B66335303322EF8880B931FEBF8322F4302944E80BED468A0A516D410B183D863795992DA7DDB |
| m_{PL82} | 5100336C05F9E5BF35201906C1C588858E0DAF56130DF5554B9AB21CA15311A90290624CD63E03F5EDA49DB7A0C32AB5F1CA427A2D5635FDA5 |
| m_{PL83} | C696DC993BFAEA9A61B781B9C5C3F5CF4A4C8339D8B03A9B0387883D0482A41AC78D6522425959846E561D26A30FF79A205C801A85889736B2 |
| m_{PL84} | D562297561AFF42D3168296C1153E4E39BE7B2EB0348BC704625AA08391235075EE0DE0A79AB03222FEDB27218C56F96EAC2F91CC8FCE64B12 |
| m_{PL85} | DD0B6768FC01CC0A551F8ACC36907129623E975AB8B3FF58037F1859E2FA8C62C2D9D1E8506916029A2C3F8CAD9A26AE2CC652F48800859F5C |
| m_{PL86} | 923920696EB3AB413786C41854822282BB83F6900D33A232D470BE198BBF086067B72613300C593B74251E2F079857ADBBCD86583A9DCAA6DC |
| m_{PL87} | B8EF30C797D8D2C4EF11244F137D806E556A436626D0115A621C92C34D166A68BCEDFA0040DA8FD6F987B1CD5C2AA1C1B045E64475F0F8DABD |
| m_{PL88} | E1887001D414405ED6419E9EE1D1D346D924ED57ADF04B31B7948099976B2D1501A60DFFB287AD44C8783DF0C1EA5AA5D273D1389C8EA22DCC |
| m_{PL89} | 8C2E379A58AA96748141CA84C35987905F984A49D3AD9BFF7807AC244C16C1DF74343C2E1F25514F5A0954CFBB3C92E25EF783136844998AC5 |
| m_{PL90} | 78F8A99E0A54E27F51C0726FE7A11EB26B1E29FE65F55AC8AC58011465900B958488A90F6DF614A58431DC8B6C6B9A6F032EE0E0B1306EC4B4 |
| m_{PL91} | 88F7A31B7B20E0F05CA26E729B4F8A1933962D7BD7BE3E1EB130B28C794C0B4D01CADE09006FF97E80117509733F3A9DC225413A0AE08CA662 |
| m_{PL92} | BE4DFCEAC18905AC8D5DA27A794F88A4D3058D2EFA3B075A819DEAE688EAF8940A653ED7104E7B403D490F0A9030264E1F12B8922C75775E61 |
| m_{PL93} | 5BA4B79FC4550234D8922963BF3537485E3C8745A5DB90D3E2E454B30FF61112F508155B7C2B3C4C628AF846240C2021ACDE547E5A41F666B8 |

| Code ID | Basic Midamble Codes m_{PL} of length $P=456$ |
|-------------|---|
| m_{PL94} | 00556D35649F7610AB24A43C4F16D6AC0571FD126F11880C5CD72100D730E4E4D6BB73C33F837FAF1072743B249ADA2E09598B1EB23F1180A7 |
| m_{PL95} | 7A0CC9F21BD69CF3023E944545C2176EF0D4F450B765C28359FB8A32137D043D0E5713E67B3F61320985D2C6106605081F87D2296321468A2F |
| m_{PL96} | DA669880995B0671201172BABFF141D5854A245E211879EF3038A7C84170DADBD368455F24653161E7886E15B253F93E3A3C568EFB17CDEB1A |
| m_{PL97} | 4E294E53D1661C1F6F748302A7723DA951C00FDB8BE8BFF67A68710BA0F1A255DFB1627059D41A23D3961726DE6FEB10E5D209CC4505B209812 |
| m_{PL98} | 73385DF701414E144768A67EF72924B1653479E962FB1554B7E54BC5284D9B3E41C0C133F878972230721918AA425501B920B204FECE0C7F8A |
| m_{PL99} | F4492160805F258CE592DF4D1200566F81D173458D78EA3ABED79A14AF88170DB1D4A9A5931D2B80C58C27FE17D806E3E6A66CDAAD09F118D4 |
| m_{PL100} | 44D562D9012D8B07B8F44596467C11A163982BB7EAEAC184078B6B8CE46B5D7E17C39CEF576A025491183017FA09931D070B307B86524B03FF |
| m_{PL101} | FCAEEFC49A13B4FFA12C0CC6A2B90CF4F57D78B1E98294B04675C2F0991661FDC61A452A247F8C29E0284AA21026F368307375AA2C3F1E12C |
| m_{PL102} | C486DF0510DCAD5AB86E178A686D398E11A0ECFAC5A326C10129257E5456B22FB8E147E9190D9929A5DFFE44715FA47D62F04CFC9B1C201414 |
| m_{PL103} | C10AF383DC708E257E15A8AB337BCE684A2F4AC7A22DC2C25C277F8E8D0858E79317CDDD9AA2EA6CBE604D24AC0945026103E7B4126FD361A4 |
| m_{PL104} | A5C60A181148D9A931B2DDDB9D169648BA54F366B4EFAE88F6861909EE0F07C037EE349D0EC59A823286E366CA3943589EEA7F828C3728085F |
| m_{PL105} | 96136AEBD5E28462B0421DF292BA899FFA660D80EA01620D2C7490E5347127884AA3C3D1FF44BCFE6C29EC589CDEF200C5742C5964F8B2B52 |
| m_{PL106} | 40F63C04ACAD986255D1E16B769A6D4C11A1D075E804BDC0AC61923E9A67F5D7417756328072455F6E22B1C64E06F367D1B0808295C2D90E22 |
| m_{PL107} | F4B82D413578C4888C5F002CF6D0E03778134A860436551FD57537E4CED334B3C9CEBACE615238271717AA762448B86FA53D2074BCE35658A7 |
| m_{PL108} | BCCC92D72C920E685530591FC351743D1E23DE044BF81D32650406113E23ECC757FDE4E386B6E2E7195EE4969717A7BD0812AC312B33A54308 |
| m_{PL109} | 6ED59DE0D44370A861CE2B42CF5E578E764A682AB5777905EE027D7160490EDC6C28989B23805AA697FCD215CB401BC5E4D430624C01B16192 |
| m_{PL110} | DE80C0E273B92CC3C5034F7A20DB3914643C430B425C8B9249EAF73ACE8C3BCF17957242CF534D87A67D4DC0252275262E737F4095450CFA14 |
| m_{PL111} | 9505C4FEF2A397D5059F4729D013292A8321FFFA929ACB0A210D0A13E13061227C44A68FBD8CE6B66CE3D783363CD039AB35EE52603E09B758 |
| m_{PL112} | E8BE90D7F954B14D8002A4CAC20765ABEED80634498C836D79B0F9338DBC17B28F05CF4E79136779E1C55AA30B6215F890882887B3B53C23E2 |
| m_{PL113} | 9F4B622C1358AE5468DC31E4B2CA320E5E20458C1DE5405BF4F9AD7D45A5BCAA39EC0626FFFC698C16A009CCCB7A18A64E85E70BA71731BA24 |
| m_{PL114} | B91B2624843CF48299AFC2B1442570B41F28F578530D1E322E0B54282372131C71ACB924E70768A243EECC3200E7A5EBFA77111D9FB07FEA8AE |
| m_{PL115} | 965F42DDA3A4650FE2F5103932B68F166FA424B9F0F7045311D962C2A9F66B9BC6C66FB480F9800354E0C54A72251071422CF1DFC44F94C00C |
| m_{PL116} | 08ADCE48699FC30FA0788073BDAADB9177BBB4C1CED41F93085218364B8BAD8488561EF0FE1B0DDAA403C602494CB35697D62AA0A2B93A64CF |
| m_{PL117} | 9A313BED80B1220D77C8ADA4B2E0B3D284A5120A94B741380923C78D3AD32BC3E71EC6EEA520E9D447D8727697598BB987F17506F482003ABD |
| m_{PL118} | 24C9AD4C14EFEC002A3473FCAB04E492F2E269161A2960BA8AF09FD710B444A40C4E8B138418E62301E91FBA97AFDC58759A76D00F676736C7 |
| m_{PL119} | 6514C7733711CE4942CD2123AB37186EB7FECB7E78ABB28744864942FCF4C0F810054AF55B1042EB53064F0857C61D85B2CF0D2DC5826AF22F |
| m_{PL120} | B2C80CDC83E48C36BC6FDAB8661208EAD392F3A0571BE41DFAD765E744932ADEA50061E66C05498A5381B2A1F1B446587089DC4E4A2DF03D82 |
| m_{PL121} | 639368BA75CC709A3D9F28EDA237E32C2017A9BF1E382045B9426AEE0A4049DCB4E1D7EBE4647B855212824557497CFA039885A3BA42F98F63 |
| m_{PL122} | 6A70DDC17D0C8024B1C853F0C1948561EF32510151BE0C63BCA9171F20217891D1021EE72586CAFF557F8973336913A9A2A699B8740B054B8 |
| m_{PL123} | 2E32E3A35CCD001172CE310B63B4E406126045A0FA3795BE3E3D9B56F72405FC94FD89946818BAECC24A61BABBEBE2D23052AB01EF73CA0CF4A |
| m_{PL124} | 82395C35205A480AC1351C25E234BF52D384A3DE1C5138A650A6F82F739757D812D9C38231AB9FD81AA0648B11F6F6113F9312C57624FC746 |
| m_{PL125} | D98FFE19C0AAAAB0571A9075ECD3E7373F5255DC669116A8C6913F0123E598F930934C5F6A601C37C529C371A0C391B59AC5A9E286D04011 |

| Code ID | Basic Midamble Codes m_{PL} of length $P=456$ |
|-------------|--|
| m_{PL126} | C1A108192BCE96C2430A63C189BB33856BE6B8B524703FCB205DAEF37EF544CD43CA09B6181B417398083FF2F781BA4AE89A5CA291DB928D71 |
| m_{PL127} | 42568DF9F61849BF9E7DEE750604BE2E0BC16CC464B1CDE15015E01D6498E9F3E6D6950E5824651F212BA0057CE9529B9CCAB88D8136B8545E |

A.2 Basic Midamble Codes for Burst Type 2

In the case of burst type 2 (see subclause 5.2.2) the midamble has a length of $L_m=256$, which is corresponding to:

$K''=3$; $W=64$; $P=192$.

Depending on the possible delay spread timeslots are configured to use K_{Cell} midambles which are generated from the Basic Midamble Codes (see table A.2)

- for all $k=1,2,\dots,K$; $K=2K''$ or
- for $k=1,2,\dots,K''$, only.

In all timeslots that use burst type 2, K_{Cell} is individually configured from higher layers.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in TS 25.223.

Table A.2: Basic Midamble Codes m_p according to equation (5) from subclause 5A.2.3 for case of burst type 2

| Code ID | Basic Midamble Codes m_{PS} of length $P=192$ |
|------------|--|
| m_{PS0} | 5D253744435A24EF0ECC21F43AA5B8144FBDB348C746080C |
| m_{PS1} | 9D7174187201B5CE0136B7A6D85D39A9DD8D4B00E23835E4 |
| m_{PS2} | AE90B477C294E55D28467476C6011029CDE29B7325DF0683 |
| m_{PS3} | BC8A44125F823E51E568641EC12A6C68EAFDFA2350E3233C |
| m_{PS4} | 898B7317B830D207C9BC7B521D5715680824DC08347B2943 |
| m_{PS5} | 466C7482C8827655BC13F479C7C1417290679A9841297C4A |
| m_{PS6} | AC0734C27C7DC1B818A8492744290DFE866B0EBA62B0B56E |
| m_{PS7} | 0A92106325B15A8C15FC3764724CE67A5056D50A77F9360E |
| m_{PS8} | AE69F62E23035083E6094B89493D33E06FDB6532D473A280 |
| m_{PS9} | B485D4E3614C9C373EA1365FA6FA890E9844084EBA90EB0C |
| m_{PS10} | 66182885E2D28360D2FEAB842C65304FFC956CE8DC8A90C7 |
| m_{PS11} | CC30A9B0A742FCC1E9A408415368391F1299AEA3CB6509FE |
| m_{PS12} | 673928915886947F464FDDAAD29A07D182328EBC5839089A |
| m_{PS13} | 4418861C14D62B46EE6D70D4BF05A3ED801A01BD6CDC5235 |
| m_{PS14} | DAD62DC88F52F2D140062C2330BE6540E6F86192322AFB04 |
| m_{PS15} | A2122BAF24529CEA9855FB43CE40923E7CA7B30D92E40702 |
| m_{PS16} | 6C44AB41E11F54B0929DF65673BD231F92A380132D9F1712 |
| m_{PS17} | 1DC2742E756CDA6421340D0087DD087A615E4B8688CB2F75 |
| m_{PS18} | 2E0105328B56E9E07D9B5A62F38B08AF8D8C2817B54F3302 |
| m_{PS19} | 88315EC30A94CA4EDB2C77079D9BD810A2E280B50DABB213 |
| m_{PS20} | 440E0093D28CB2B2B0A95D18CEB4AB934C33FA45C1CFC7B0 |
| m_{PS21} | CC9BF85D41A96A6EC314F9611D5E1C0672556C8850801BB4 |
| m_{PS22} | 1ABEA04C99BC26972715F01957C0B6B959CC71CD88120817 |
| m_{PS23} | EC5A33DA0BA4470442C5CB324A8E47B0A9F7968FC8108EE8 |
| m_{PS24} | F82086290271DB446B5B1DC15D9BE96414B19B3D5E0F540C |
| m_{PS25} | 11A1A790D6958FD3A9157DF1E05D1378248CA201EBCC7592 |
| m_{PS26} | AA8564882231907BCE78092DC6C9DD4F5A0E4A34AFCFB809 |
| m_{PS27} | 912EE2238212F87BC7CDA7F30441ED184A6AA954EC4D20C8 |
| m_{PS28} | 2D200D8B8891B804673E380A1AF5AB875986E29D37D3FDC9 |
| m_{PS29} | 75E086B6C818423491BF9D6365C52FD1C5E42A576E268170 |
| m_{PS30} | 50ADBF27DA2A3701470186B699118E16DDB0D10F705607B1 |
| m_{PS31} | 656C0692B4E22023590A906D2A74DFD471C883A7B1E0B3A2 |
| m_{PS32} | C21FDACD09A3CDCE74C4794010A3E45769B142505C56A0E6 |
| m_{PS33} | CD9392A87C2D4D7CE5801CDDA8A76339B6F900F008B290E2 |

| Code ID | Basic Midamble Codes m_{PS} of length $P=192$ |
|------------|--|
| m_{PS34} | 956426FEFD8B8D52073E87984E10C4D255064E1372C04A24 |
| m_{PS35} | C4F4D6DF1B754AD6063FD10C331C1428ABB27B0700134B94 |
| m_{PS36} | B65548082B34E9FAF43F33C4070F79099758CFD41B491A11 |
| m_{PS37} | C8317EA111A82B04E78B88B864B1EF5D711BBEB4A0527036 |
| m_{PS38} | 8FB7AD1188E8D1A5219845013672560FD38904E70537403B |
| m_{PS39} | B41A324E0D80AA0598A8D391C1D7FFC82B4A075218E98EC3 |
| m_{PS40} | 49A6350A62E208B011E86528B9A481A0E76D723F6675FF82 |
| m_{PS41} | C344C8C23C42A7B7442E6022E95AE4B08A4BFA786F35F911 |
| m_{PS42} | 28F430CF67D69C9DF60E25656413BC5F932A022DB1406C44 |
| m_{PS43} | 2FA5D70CF0FED4213F32116051450391C2A627D9B670C428 |
| m_{PS44} | 959537D988FDD4F1360B4E84701AE5409229C30EDF8BC404 |
| m_{PS45} | CDD2E0450F9EC12F81391AD4633CB29F315B4A0A890A9A22 |
| m_{PS46} | 158776A20B4B82C563EC08F086830EA66DBD2DCCB4DF6026 |
| m_{PS47} | 431FCACBE48208975950342709D11F19AD5FB047F3B440C9 |
| m_{PS48} | 86B141AC571BA6B42653B12FF04D4F0E6C81F3EB608660A2 |
| m_{PS49} | 86D297ABD34E8510F6CDB0EA617F1F1051C8799117B02211 |
| m_{PS50} | 80B2D9530B34E781311D95CFA3857F277CC07014D324AF5A |
| m_{PS51} | 2B607B93FD8B45601C1E574E14CFC6912C22AEC1045ADC49 |
| m_{PS52} | D234C5C45E105A837E6DD74BC4E534523A20317BA0625A29 |
| m_{PS53} | 768CCDB3E2A7A2B863128382590946B25472BE2BFFC40641 |
| m_{PS54} | 3DA38212E0A987EE1F665D4E13C2AA4446E00A76C948A073 |
| m_{PS55} | 09173135E4A2CFC8F2678750AB5257110906F013587BDE82 |
| m_{PS56} | 522E070B266F35E99C1F3C42D2017F8E415550492B72F086 |
| m_{PS57} | D63E4BD805262A3DEF05C7D86C422E5048921E5531784132 |
| m_{PS58} | 564AF806E28131611E5F884229265D446A50E1E488EAFBBA |
| m_{PS59} | A2603E009D3D30147727B750C35C62299AF754D3E4A54E1C |
| m_{PS60} | 938504B02599D33E28246E4271C375AE81A3BBE8D3F8A920 |
| m_{PS61} | 461516B2CAC6FC42A4B707CC6073BBE573C014892C811776 |
| m_{PS62} | 29186DE4CCAAB2CD0100BB19EA595879D63F0F0CFA881AA5 |
| m_{PS63} | A064B449CB784A91B803369CDC5EF61A670AAAC044BA3E68 |
| m_{PS64} | 8719C454D88FF5149DB943CB6CADA01D0B9664B357A18203 |
| m_{PS65} | A27EC68720F00A714AA2C45A7EF232286984D7B193F5C916 |
| m_{PS66} | AC8361676AB424E48F0789082B0CD2EFB8D2E627D041DD66 |
| m_{PS67} | ABA1BEB0064733A0620906BF2B29C95883F069D7E4C35D39 |
| m_{PS68} | 9E22EDED47D92CA1D0B7530EC6062287BD83A04874AE00C |
| m_{PS69} | 0BADEF288B20F5686C5DE3A71219AC2172054326BE831696 |
| m_{PS70} | 953801EB2AF58C2F80E49A6CC46085CB554243E3B3BBEC8C |
| m_{PS71} | 333A504C51C8FAC5025994565C3F600F154F64FAEF4EA484 |
| m_{PS72} | A6583E19647662005474153A6F8DD88A473853E94B720CE7 |
| m_{PS73} | 90ACAF707D18AF34F5848C58166830AF620ACDC1B2DFDDA8 |
| m_{PS74} | 39C5C598A374EA82F3F83378258248DAD3808812DD0E74BB |
| m_{PS75} | F79525DE694629346D73F6256CC0F140F82603197AAA1844 |
| m_{PS76} | B8C2A8F139097699A693022E78588D4058DB0A65FF52F813 |
| m_{PS77} | 449B50C2A52996FA5A828A907F30F9F460EE3D99930DF890 |
| m_{PS78} | 62CEC9574D30184BCB4F94EECF0CC23D2D2A8D0003F0AA33 |
| m_{PS79} | B56D258889703F76A0738EE3A7D355994159A4851833E198 |
| m_{PS80} | 65894AA54C0F6C9A206521C9FC379A8AAF6E621C03CF849C |
| m_{PS81} | 2D47F3414E30CC02C6835D95C9BA204488F0FFCB4852677D |
| m_{PS82} | 12BE4DD8B906B584010F8A330AB67B278E8642FA33D51B68 |
| m_{PS83} | BC928A90A4B10906CAEE638BF768E08542F48F1676006DF0 |
| m_{PS84} | 30C544E437C8ADA143566CD1BC4E9E7BA84139A08505C2F4 |
| m_{PS85} | 84FD5B05506192B753FBA2C719B584E0EDA01814999867D2 |
| m_{PS86} | 191F14DD00034E03AB5BB4342F1138B2CD33784E60CFD75A |
| m_{PS87} | B8ACE7990B6A98A80A61162C4D2D5F88F24E8F7DE4207590 |
| m_{PS88} | EC1DBE72E8EED0C61054FC2695422AC0AD2D888265B21AB0 |
| m_{PS89} | 9A1B4CA467AB7E082AF4278E44D177EA78424508C23E8B08 |
| m_{PS90} | 999EE541C608164AC975214F3A37A677FC2CA03E2C2A4B20 |
| m_{PS91} | 1BDCC20265031432917A2EB828FB356A22DF9CB609C0F8F3 |
| m_{PS92} | EB4A81859C93338B8A1B87C02C815AE09D765F6F2249B958 |
| m_{PS93} | E6A5D1629F4CF09A1F280DE0C480D4C73B26ADE321A50AEE |
| m_{PS94} | BAAB7286DD24C80B15A7958039B904F1CA83C310C8C7AFF2 |
| m_{PS95} | 12220F72619E983717C68FFE1C4148F2354B7B1955B65620 |
| m_{PS96} | A198706E24FAA08BD09EE392414816038E667BB34307D6B2 |

| Code ID | Basic Midamble Codes m_{PS} of length $P=192$ |
|-------------|--|
| m_{PS97} | 30B3493B4C035881A7A722E4546527AAE787FA2C0893AC46 |
| m_{PS98} | 5A7318126522843DCB7F00A2D9F9BA8F88963E4152BC923C |
| m_{PS99} | 844844B0CACAB702C332CE2692B4166F4B0C63E62BF151BF |
| m_{PS100} | B8297389526410313692F861DC60DA86A23607F7DDE24755 |
| m_{PS101} | 6C1144CF8BC01538D655D29ED62DE6E74A3180EC905BF1E0 |
| m_{PS102} | E9DB3221FACFC5C88691A7013EF09672A130D52C3413AAE2 |
| m_{PS103} | 2FD0508615EC4CD4BF18ADD46D777078869130C8921A4F0E |
| m_{PS104} | 40911B4E0525AC874228F6EF642E59154730CB187C7E417A |
| m_{PS105} | 2034C6A027D4D850F5184AA64C3153231F4651B616BBFCF9 |
| m_{PS106} | 57833235451525A1DFA213FCE0B419B6494BC7B99F488410 |
| m_{PS107} | 6DC3D57F2E39158D036825F8804810D77CA1ECA610ECD894 |
| m_{PS108} | F5C50DE43AA7B731CAB7683524021701F97650499A7070E4 |
| m_{PS109} | F2184D2699785442E09FA22CC2D60A5A13FFF22AE660A470 |
| m_{PS110} | EF0029DE0D79207205458CF4D7328E81A93518D93C9A74BD |
| m_{PS111} | 9D6D8992482FB885AA5E878C3BA2045538B09886C23CDC2D |
| m_{PS112} | C0A5AB67D1CEA126F6476C75443F0A11CBE749412EF03104 |
| m_{PS113} | 1853A5C20CDF968C5A180D8EB5E72BF15517D06680D98412 |
| m_{PS114} | 8CEA1223227ADF37D0DAAB320906E1C79029F480D25181A7 |
| m_{PS115} | 5561038E96A658EF3EC665612FF92B064065D1ACC1F54812 |
| m_{PS116} | C55A6263F08D664A1E53584560DFF5E611640D8281D9A843 |
| m_{PS117} | 4386A8EA59124D043F29056A4598735A4FC7BC11119B90C1 |
| m_{PS118} | D6571B20668BED50BD7C80388C162632BCB069AA67C7FC22 |
| m_{PS119} | 4F9F09ABBC1391EC2CCA5359FB52250E533BF04324154106 |
| m_{PS120} | 662659F42188C9453F6E6DF00C579627045DA1461A3A0EA5 |
| m_{PS121} | 8DCC9274C0C2A9BA6096BF27FACA542CD01CA8653D60A80F |
| m_{PS122} | 5C1210A1E50E505F6B73C90156C9D9F19AE2310BBD820DF0 |
| m_{PS123} | B1E0A7CE26202E223D4FC06D5C9BBA4E5F6D98204D2D5286 |
| m_{PS124} | DB506776958E34552F7E60E4B400D836153218F918E22FA6 |
| m_{PS125} | ECAA60300439B2360B2AC3C43FB6241ACDE5055B295FA71C |
| m_{PS126} | BF1E6D9AA9CA4AC092BE60500C77D0DC7A6A236520F86722 |
| m_{PS127} | 051C5FA122845A30B4EC306B38016B45667C7754F92F13A0 |

A.3 Association between Midambles and Channelisation Codes

The following mapping schemes apply for the association between midambles and channelisation codes if no midamble is allocated by higher layers. Secondary channelisation codes are marked with a *. These associations apply both for UL and DL.

A.3.1 Association for Burst Type 1/3 and $K_{Cell}=16$ Midambles

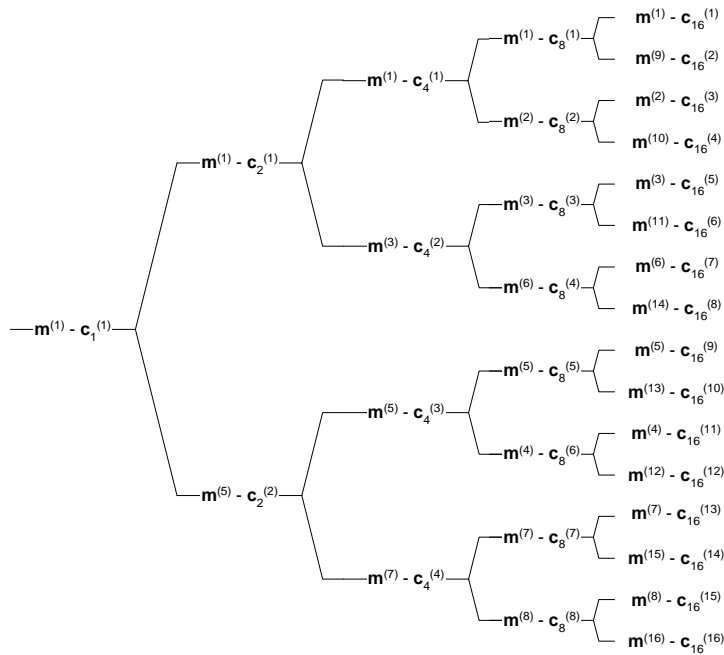


Figure A.1: Association of Midambles to Spreading Codes for Burst Type 1/3 and $K_{Cell}=16$

A.3.2 Association for Burst Type 1/3 and $K_{Cell}=8$ Midambles

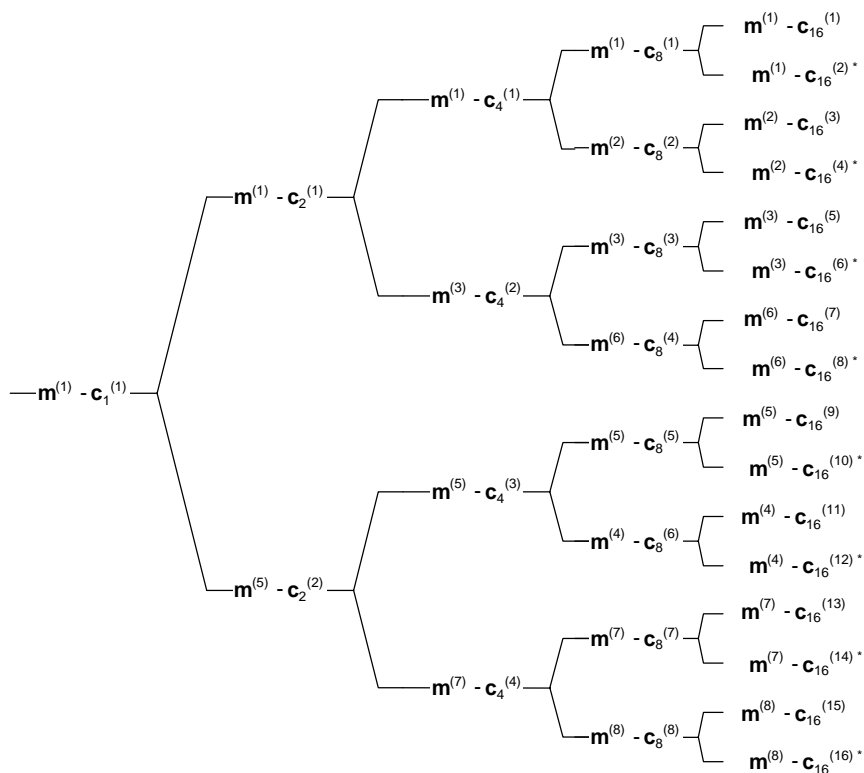


Figure A.2: Association of Midambles to Spreading Codes for Burst Type 1/3 and $K_{Cell}=8$

A.3.3 Association for Burst Type 1/3 and $K_{Cell}=4$ Midambles

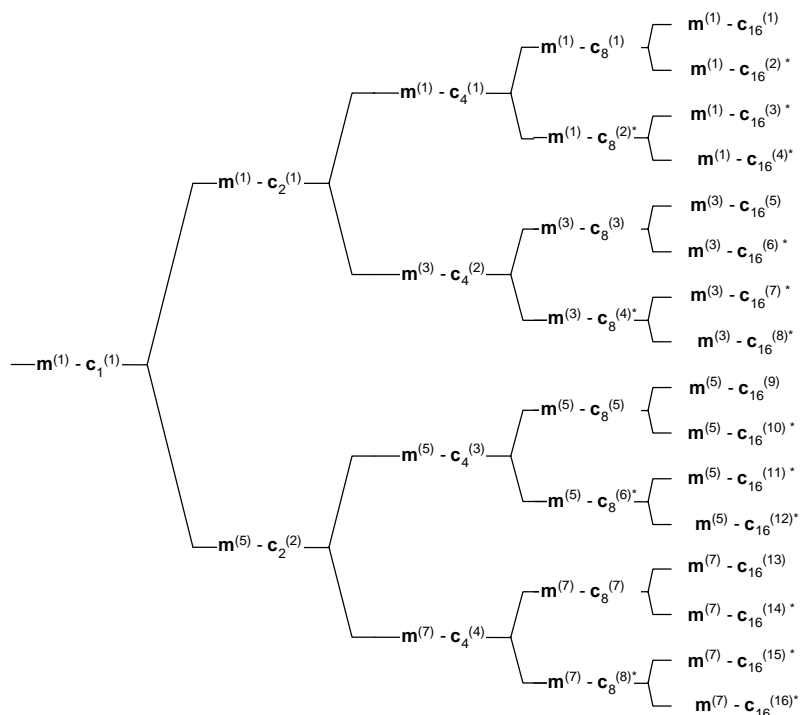


Figure A.3: Association of Midambles to Spreading Codes for Burst Type 1/3 and $K_{Cell}=4$

A.3.4 Association for Burst Type 2 and $K_{Cell}=6$ Midambles

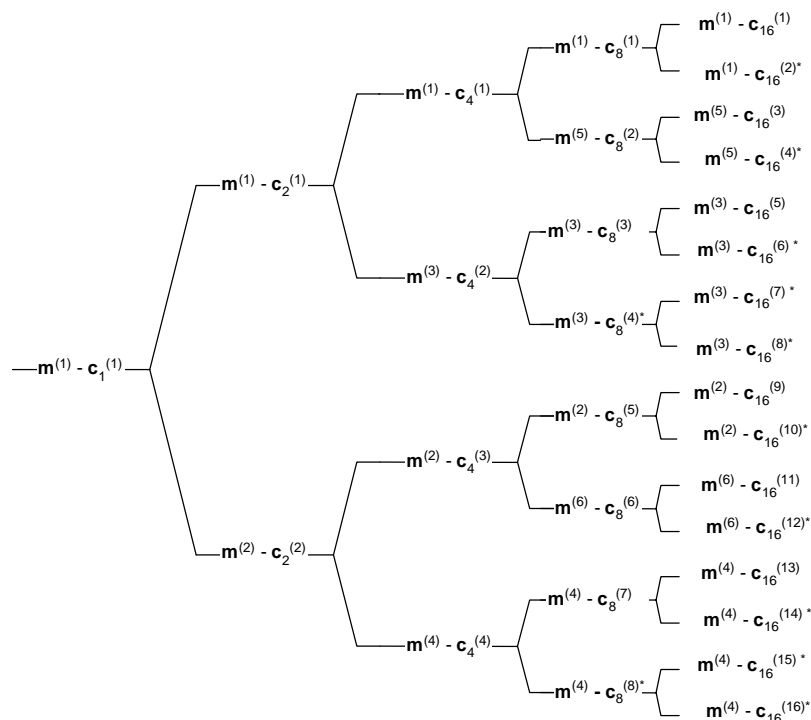


Figure A.4: Association of Midambles to Spreading Codes for Burst Type 2 and $K_{Cell}=6$

A.3.5 Association for Burst Type 2 and $K_{Cell}=3$ Midambles

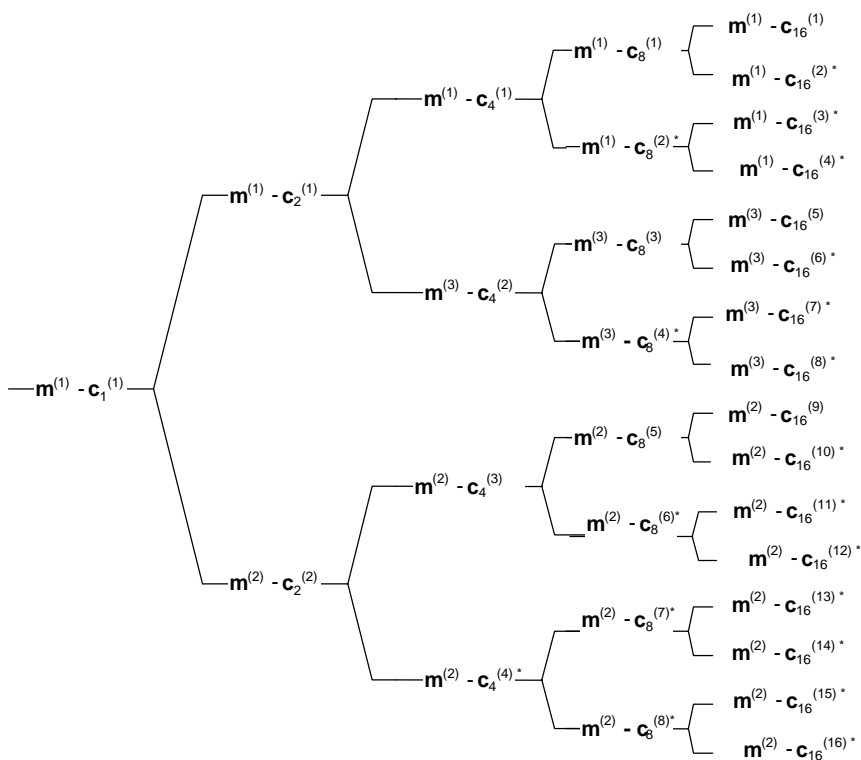


Figure A.5: Association of Midambles to Spreading Codes for Burst Type 2 and $K_{Cell}=3$

Note that the association for burst type 2 can be derived from the association for burst type 1 and 3, using the following table:

| | | | | | | | | |
|----------------|------|------|------|------|------|------|------|------|
| Burst Type 1/3 | m(1) | m(2) | m(3) | m(4) | m(5) | m(6) | m(7) | m(8) |
| Burst Type 2 | m(1) | m(5) | m(3) | m(6) | m(2) | m(4) | - | - |

Annex AA (normative): Basic Midamble Codes for the 1.28 Mcps option

AA.1 Basic Midamble Codes

The midamble has a length of $L_m=144$, which is corresponding to:

$$K=2, 4, 6, 8, 10, 12, 14, 16, \quad W = \left\lfloor \frac{P}{K} \right\rfloor, P=128$$

Note: that $\lfloor x \rfloor$ denotes the largest integer number less or equal to x .

Depending on the possible delay spread timeslots are configured to use K midambles. In timeslot 0 the number of midambles $K=8$ (cf section 6.6.1). In all of the other timeslots, K is individually configured from higher layers.

The K midambles are generated from one of the basic midamble codes shown in table AA.1.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in [8].

Table AA.1: Basic Midamble Codes m_p according to equation (5) from subclause 5A.2.3

| Code ID | Basic Midamble Codes m_p of length $P=128$ |
|-----------|--|
| m_{P0} | B2AC420F7C8DEBFA69505981BCD028C3 |
| m_{P1} | 0C2E988E0DBA046643F57B0EA6A435E2 |
| m_{P2} | D5CEC680C36A4454135F86DD37043962 |
| m_{P3} | E150D08CAC2A00FF9B32592A631CF85B |
| m_{P4} | E0A9C3A8F6E40329B2F2943246003D44 |
| m_{P5} | FE22658100A3A683EA759018739BD690 |
| m_{P6} | B46062F89BB2A1139D76A1EF32450DA0 |
| m_{P7} | EE63D75CC099092579400D956A90C3E0 |
| m_{P8} | D9C0E040756D427A2611DAA35E6CD614 |
| m_{P9} | EB56D03A498EC4FEC98AE220BC390450 |
| m_{P10} | F598703DB0838112ED0BABB98642B665 |
| m_{P11} | A0BC26A992D4558B9918986C14861EFF |
| m_{P12} | 541350D109F1DD68099796637B824F88 |
| m_{P13} | 892D344A962314662F01F9455F7BC302 |
| m_{P14} | 49F270E29CCD742A40480DD4215E1632 |
| m_{P15} | 6A5C0410C6C39AA04E77423C355926DE |
| m_{P16} | 7976615538203103D4DBCC219B16A9E1 |
| m_{P17} | A6C3C3175845400BD2B738C43EE2645F |
| m_{P18} | A0FD56258D228642C6F641851C3751ED |
| m_{P19} | EFA48C3FC84AC625783C6C9510A2269A |
| m_{P20} | 62A8EB1A420334B23396E8D76BC19740 |
| m_{P21} | 9E96235699D5D41C9816C921023BC741 |
| m_{P22} | 4362AE4CAE0DCC32D60A3FED1341A848 |
| m_{P23} | 454C068E6C4F190942E0904B95D61DFB |
| m_{P24} | 607FEEA6E2E99206718A49C0D6A25034 |
| m_{P25} | E1D1BCDA39A09095B5C81645103A077C |
| m_{P26} | 994B445E558344DE211C8286DDD3D1A3 |
| m_{P27} | C15233273581417638906ADB61FDCA3C |
| m_{P28} | 8B79A274D542F096FB1388098230F8A1 |
| m_{P29} | DF58AC1C5F44B2A40266385CE1DA5640 |
| m_{P30} | B5949A1CC69962C464401D05FF5C1A7A |
| m_{P31} | 85AC489841ED3EAA2D83BBB0039CC707 |
| m_{P32} | AE371CC144BC95923CA8108D8B49FE82 |
| m_{P33} | 7F188484A649D1C22BDA1F09D49B5117 |
| m_{P34} | ADAA3C657089DEF7C0284903A491C9B0 |
| m_{P35} | C3F96893C7504DC3B51488604AF64F4C |
| m_{P36} | B4002F5AE0CE8623AC979D368E9148C1 |
| m_{P37} | 0EEBCC0C795C02A106C24ABB36D08C6E |
| m_{P38} | 4B0F537E384A893F58971580D9894433 |
| m_{P39} | 08E0035AB29B7ECC53C15DAA0687CC8F |
| m_{P40} | 8611ACBC4C82781D77654EE862506D60 |
| m_{P41} | 63315261A8F1CB02549802DBFD197C07 |
| m_{P42} | 9A2609A434F43E7DCADC0E22B2EF4012 |
| m_{P43} | F4C9F0A127A88461209ABF8C69CE4D00 |
| m_{P44} | C79124EE3FFC28C5C4524D2B01670D42 |
| m_{P45} | C91985C4FED53D09361914354BA80E79 |
| m_{P46} | 82AA517260779ECFF26212C1A10BDC29 |
| m_{P47} | 561DE2040ACB458E0DBD354E43E111D9 |
| m_{P48} | 2E58C7202D17392BC1235782CEFABB09 |
| m_{P49} | C4FAA121C698047650F6503126A577C1 |
| m_{P50} | E7B75206A9B410E44346E0DAE842A23C |
| m_{P51} | 3F8B1C32682B28D098D3805ED130EA7F |
| m_{P52} | 8D5FC2C1C6715F824B401434C8D4BB82 |
| m_{P53} | 0B2A43453ACC028FE6EB6E1CB0740B59 |
| m_{P54} | BC56948FC700BA4883262EE73E12D82A |
| m_{P55} | 558D136710272912FA4F183D1189A7FD |
| m_{P56} | 5709E7F82DC6500B7B12A3072D182645 |
| m_{P57} | 86D4F161C844AE5E20EE39FD5493B044 |
| m_{P58} | 8729B6EDC382B152185885F013DAE222 |
| m_{P59} | 154C45B50720F4C362C14C77FE8335A1 |
| m_{P60} | C6A0962890351F4EB802DE43A7662C9E |

| | |
|-------|----------------------------------|
| mP61 | D19D69D6B380B4B22457CB80033519F0 |
| mP62 | C7D89509FB0DAE9255998E0A00C2B262 |
| mP63 | DFD481C652C0C905D61D66F1732C4AA2 |
| mP64 | 06C848619AF1D6C910A8EAC4B622FC06 |
| mP65 | 0635E29D4E7AC8ABC189890241F45ECA |
| mP66 | B272B020586AAD7B093AC2F459076638 |
| mP67 | B608ACE46E1A6BC96181EEDD88B54140 |
| mP68 | 0A516092B3ED7849B168AFE223B8670E |
| mP69 | D1A658C5009E04D0D7D5E9205EE663E8 |
| mP70 | AC316DC39B91EB60B1AABD8280740432 |
| mP71 | E3F06825476A026CD287625E514519FC |
| mP72 | A56D092080DDE8994F387C175CC56833 |
| mP73 | 15EA799DE587C506D0CD99A408217B05 |
| mP74 | A59C020BAB9AF6D3F813C391CA244CD2 |
| mP75 | 74B0101EB9F3167434B94BABC8378882 |
| mP76 | CE752975C8DA9B0100386DB82A8C3D20 |
| mP77 | BBB38DCDB1E9118570AC147DC05241A4 |
| mP78 | 944ABBF0866098101F6971731AB2E986 |
| mP79 | 2BB147B2A30C68B4853F90481A166EB6 |
| mP80 | 444840ACCF3F23C45B56D7704BF18283 |
| mP81 | 87604F7450D1AD188C452981A5C7FC9B |
| mP82 | 8C3842EBC948A65BC4C8B387F11B7090 |
| mP83 | 10B4767D071CF5DB2288E4029576135A |
| mP84 | 6F07AAB697CD0089572C6B062E2018E4 |
| mP85 | D3D65B442057E613A8655060C8D29E27 |
| mP86 | 5EDA330514C604BF4E0894E09EC57A74 |
| mP87 | B0899CD094060724DED82AE85F18A43A |
| mP88 | B2D999B86DF902BC25015CAE3A0823C4 |
| mP89 | C23CD40F04242B92D46EED82CD9A9A18 |
| mP90 | D22DDCC5CB82960125DD24655F3C8788 |
| mP91 | 54987218FBD99AE4340FD4C9458E9850 |
| mP92 | BE4341822997A7B11EA1E8A1A2767005 |
| mP93 | 255200FBA6EE48E6DE0A82B0461B8D0F |
| mP94 | 6FBD58A663932423503690CF9C171701 |
| mP95 | D215033A4AA87EC1C232BAC7EDA09370 |
| mP96 | CA0959B01AE48E80204F1E4A3F29CE55 |
| mP97 | 582043413B9B825903E3A3545ED59463 |
| mP98 | 5016541922971C703D16E284CBDF633B |
| mP99 | 7347EF160A1733CA98D43608A83A920B |
| mP100 | 908B22AD433CCA00B3FD47C691F1A290 |
| mP101 | BB22A272FC6923DF1B43BA4118806570 |
| mP102 | 0FA75C87474836B47DC7624D61193802 |
| mP103 | A22EBA0658A4D0FF1E9CA5030A65CC06 |
| mP104 | 6C9C51CA15F1F4981F4C46180A6A6697 |
| mP105 | 4C847ACF8BC15359C405322851C9BDE2 |
| mP106 | C1D29499C0082C9DE473ED15B14D63E0 |
| mP107 | 7E85ECC98AC761005076C5572869A431 |
| mP108 | D8F11121595B8F49F78A7039E44126A0 |
| mP109 | 1A0BC814445FD71C8E5B1A9163ED2059 |
| mP110 | A7591F27F8B0C00C68CC41697954FA04 |
| mP111 | 6CA2CE595E7406D79C4840183D41B9D0 |
| mP112 | C093D3CC701FC20E66F5AB22516C5460 |
| mP113 | D0E0CDE9B595546B96C4F8066B469020 |
| mP114 | E99F743A451431C8B427054A4E6F2007 |
| mP115 | C0D21A344A2C07DF2A6EBE6250C7B91E |
| mP116 | F031223E282CF7A4D8EF174A908668AE |
| mP117 | E4BD244AC16C55C7137FB068FD44280C |
| mP118 | C44920DE2028F19FC2AAB36A0DCFDAD0 |
| mP119 | 3FA7054E77135250699E6C8A11600742 |
| mP120 | D5740B4D8870C1C5B5A214C4266FC537 |
| mP121 | F0B7942D43BB6F38446442EB8126AB80 |
| mP122 | 83DB9534EAD6238FA8968798CDF04848 |
| mP123 | EB9663CDDC2B291690703125BABC800 |
| mP124 | 84D547225D4BBD20DEF1A583240C6E0F |

| | |
|-------------------|----------------------------------|
| m _{P125} | B51F6A771838BE934724AEA6A2669802 |
| m _{P126} | D92AC05E10496794BBDC115233B1C068 |
| m _{P127} | D3ACF0078EDA9856BBB0AF8651132103 |

AA.2 Association between Midambles and Channelisation Codes

The following mapping schemes apply for the association between midambles and channelisation codes if no midamble is allocated by higher layers. Secondary channelisation codes are marked with *. These associations apply for both UL and DL.

AA.2.1 Association for K=16 Midambles

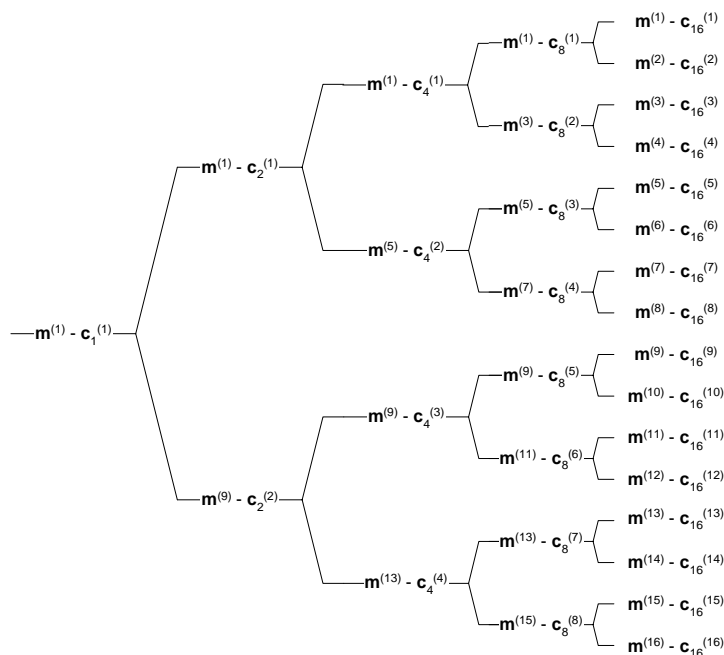


Figure AA.1: Association of Midambles to Spreading Codes for K=16

AA.2.2 Association for K=14 Midambles

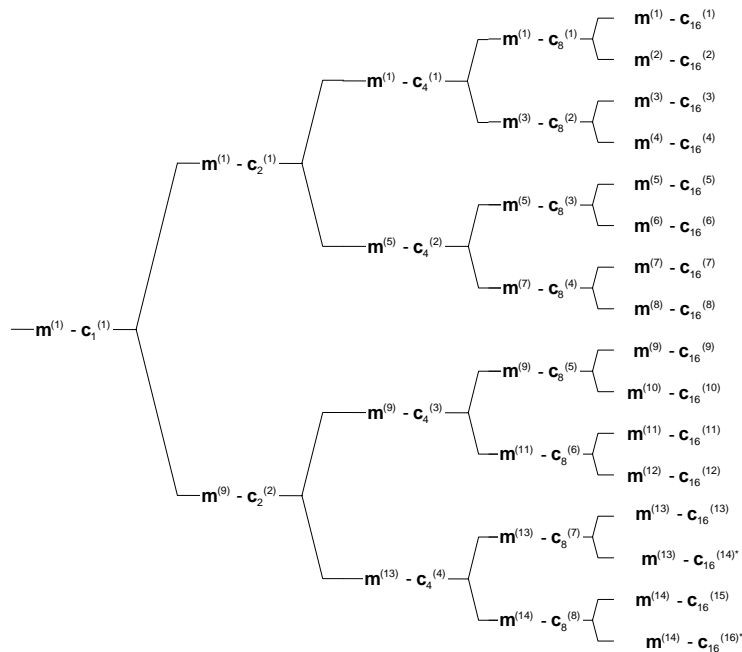


Figure AA.2: Association of Midambles to Spreading Codes for K=14

AA.2.3 Association for K=12 Midambles

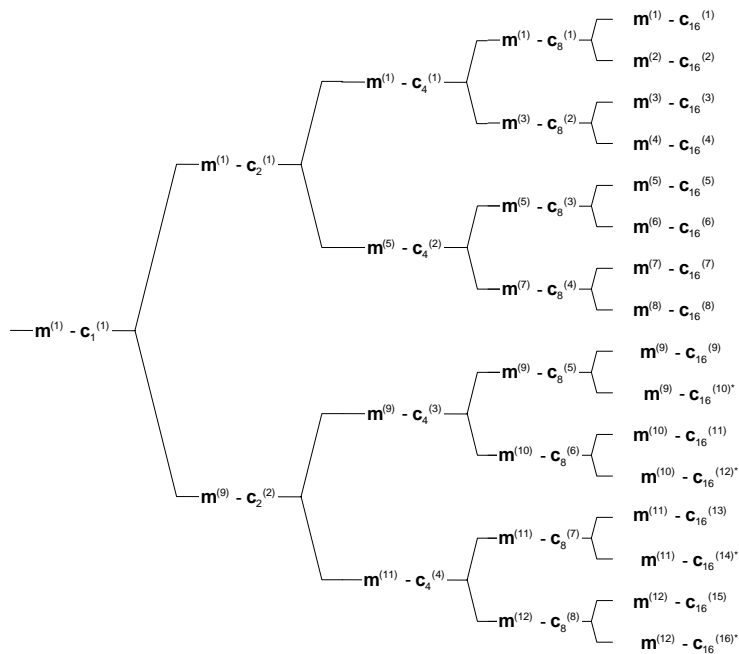


Figure AA.3: Association of Midambles to Spreading Codes for K=12

AA.2.4 Association for K=10 Midambles

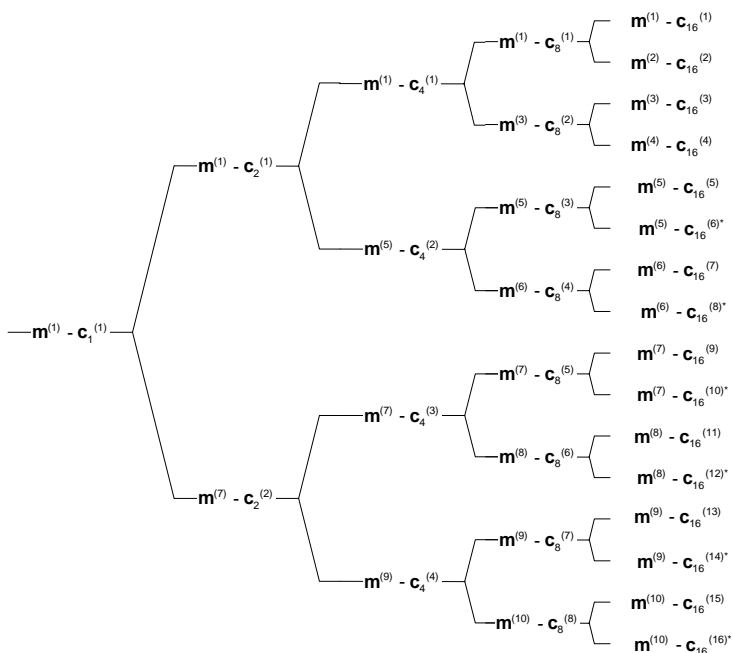


Figure AA.4: Association of Midambles to Spreading Codes for K=10

AA.2.5 Association for K=8 Midambles

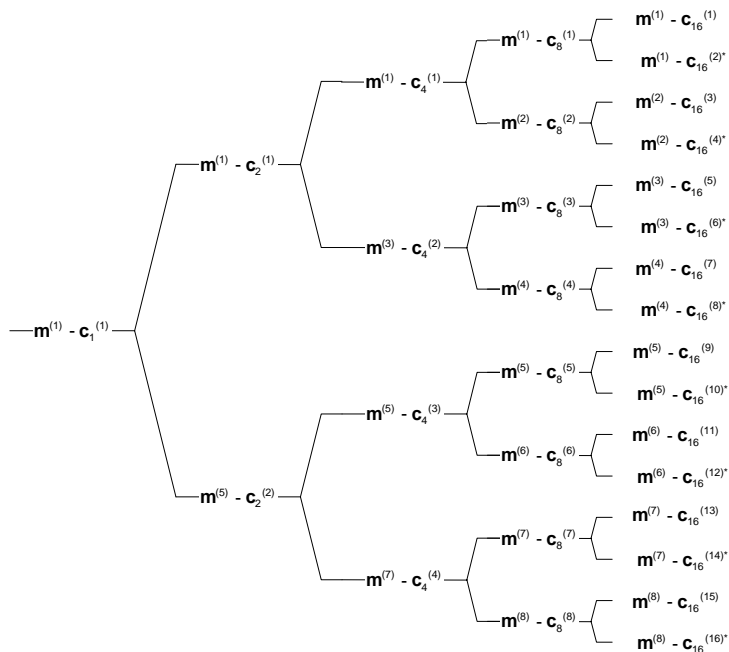


Figure AA.5: Association of Midambles to Spreading Codes for K=8

AA.2.6 Association for K=6 Midambles

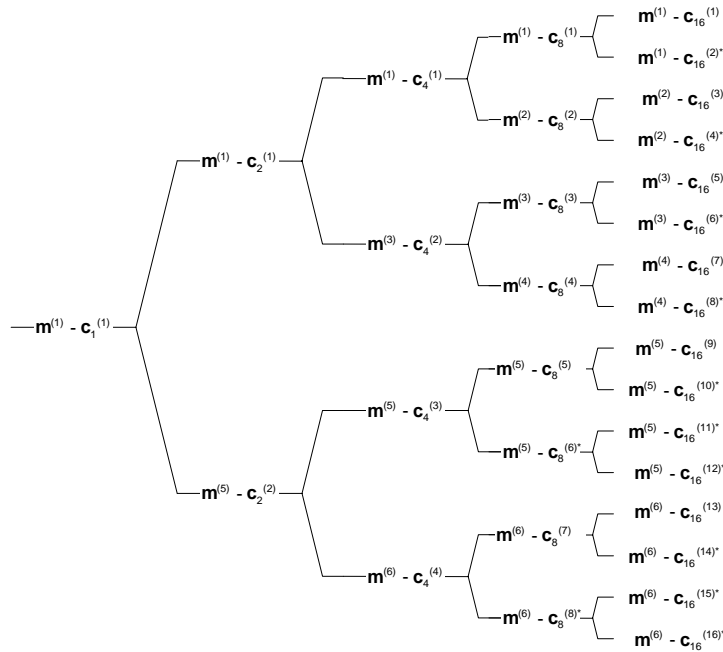


Figure AA.6: Association of Midambles to Spreading Codes for K=6

AA.2.7 Association for K=4 Midambles

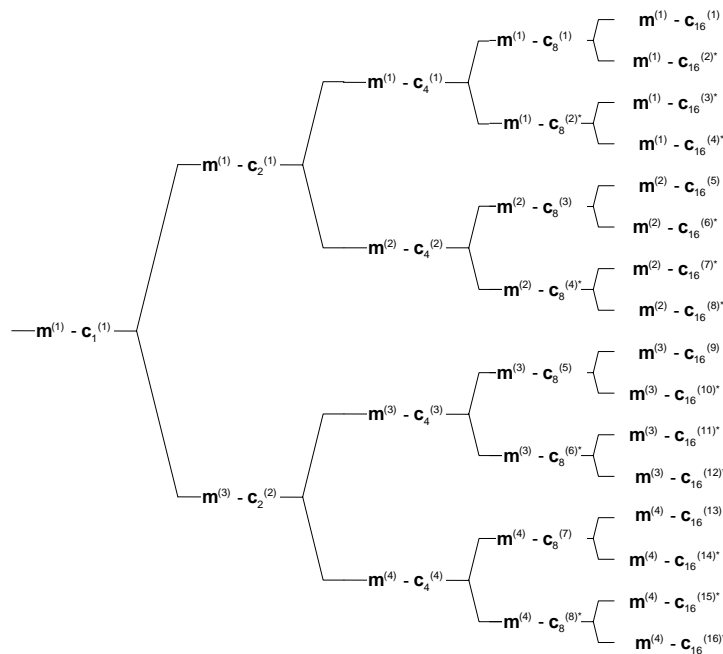


Figure AA.7: Association of Midambles to Spreading Codes for K=4

AA.2.8 Association for K=2 Midambles

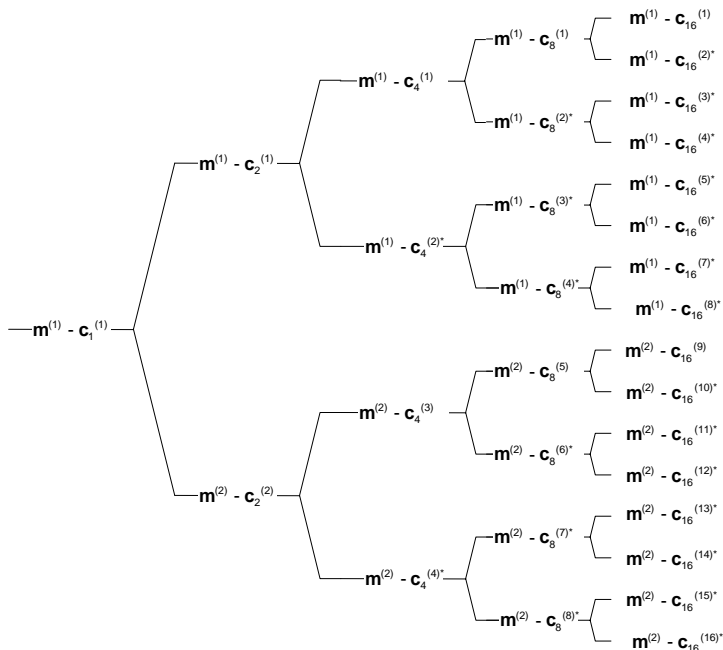


Figure AA.8: Association of Midambles to Spreading Codes for K=2

Annex AB (normative): Basic Midamble Codes for the 7.68 Mcps option

AB.1 Basic Midamble Codes for Burst Type 1 and 3

In the case of burst type 1 or 3 (see subclause 5B.3.2) the midamble has a length of $L_m=1024$, which corresponds to:

$$K''=8; W=114; P=912.$$

Depending on the possible delay spread cells are configured to use K_{Cell} midambles which are generated from the Basic Midamble Codes of length 912 defined in table AB.1 below

- for all $k=1,2,\dots,K$; $K=2K''$ or
- for $k=1,2,\dots,K''$, only, or
- for odd $k=1,3,5,\dots,\leq K''$, only.

In the beacon slot # k , where the P-CCPCH is located, the number of midambles $K_{\text{Cell}}=8$ (cf section 5B.7). In all of the other timeslots that use burst type 1 or 3, K_{Cell} is individually configured from higher layers.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in TS 25.223.

Table AB.1: Basic Midamble Codes m_p according to equation (5) from subclause 5B.3.3 for case of burst type 1 and 3

| Code ID | Basic Midamble Codes m_p of length $P=912$ |
|-----------|---|
| m_{p0} | 9E57CC4EFF411BC3A56568FCBECB53005A3A19CA729C922826FB5E2F55D4A0C6D57335B055 188F2274154ED0F61107BD34023FDC3887072689755E733FABEED9B7967C46E9452F78E0CBE 97CAFB92DD44C90E40E3CFE9DB4054AC45EB8F260FDF8CFB5C3C23733F7344633F26CB092 AC89F4 |
| m_{p1} | 3AC41CCDCB89F45AA67884536D0B796A5E048D76D2F9531E2E31516496B3B76196D68FB7F6 CFD8C5EA232B5C012953FFCF4C1CA7A2BDEB236426E422FD4F050C4022188D8068F47441FC 31B005F8F53452DB8D72839DF021A45D8BC51D1CF440A665D1F751145D2F04CA352BF2C0BC F589E |
| m_{p2} | 4241DBD18BB9C42E335530533B27F0411A0588156421FA0F306C2598CD9C2D3F7D954C64E4E EC699B2414356F1D47E2A3D09A56EA850ED4319AFE7AF07538A9499206DD943AE990F43FA33 FAB6CA8E6B3615D16D17B7FF914377BC59870C269E851B4E012B107EF92542B3A2B458E10DA 709 |
| m_{p3} | CCF886D4B65C6CEC0E3F8D8186F6CEA1FCFFEE878506F22EF69AAD6F51FDF2071B34E4ACB CD2545866C36B31C3235DD38361403E53DE6CD4FB1DC91752BF5F6C3AB442E292A90471F2A 5B9FE7599CEB4651D235D505052C22F54F868C18AB14205FD41FD468375B661BE35F0AA67E5 F33693 |
| m_{p4} | F95E0D6F5101D3D7BBB354646818EAED147E3E4CB0249F696738B3F3A65192F5F012868C190 BCB967DEB112D907A85F33161C68B9E425A3F5EA26022F6C40ED01B8DE7FF6A6F75F313FAC 3DCD47C7EAA32A9AE47D633CA6F47AAB8EA282B467D8CE21B1352FFCD36966F0A9B2EDE 0DF6252 |
| m_{p5} | 6FCD348CB614E6C68534737B6AB3F693A7256A85D5C28C6A77DBEA1ED62E1813E7CC88AE99 0BE4432387ED43C60FBA6556C5DBD7111B1B53FF5FBFAF86CB761F15EE2782C7616C816A1 C77E27F197DAE6BCBD028F37E5DA7906198C98F72207A0A8FF108EAA66C84D976049E4BA42 E0C27D |
| m_{p6} | 94503C230B52660711010625B04D9B98ABD0872DE470F3323F1D4120F46518715929FFF471421 2C26EC813F9B0601B573A3B38F8833B3CB57390D8E16A8561C54E6FEF9D8A64B2E06C07E417 B426671CDFAC9C7FA20D15B556CB39FADF128560A57D26B0C9354C1CFA5334A7C5F96B9528 1A |
| m_{p7} | 92B52AE0D72D7559C4A277EC57995B7B8BF3CBDA1DF8FA7D6A96DD02F93B28F84C18E6F905 D87A12D923E38C4DD659819F1CECFDB48DB8EB129DD472A2718045ACDE58C35A273FEC7A71 365FA35130215FD801BFA471D27ECBA3A8CA946E83060465BFA9A1F3C8888133D22BF43E1C8 9F26F2 |
| m_{p8} | BD71D9BF8F8250A64EC5131043F2B0E7424A365508E4E268A4A9857BAE4E3360058B8AF6FB4 A10B3C2BFAD8ED116229056B01F7E59E3D9D4120089EB213106B920925EB2422196AF8FA999 8389664E80DA294E1B4B7D6807FF3743EAE53276AB634EA1B080FD55425C318B1EF670E9783 EFO |
| m_{p9} | D61ABD7705BAB371765DE3FD732D2C5A51D5DA1BA0BF789170F01936183A55CD1693685BD1 BEC7BF691144BE24A8B74D7FCF1830425997806FE10C49E98F73BBE07835ACE5F2E6E083294 BA4048D8AD59A4E6EFE538B6D1991C21BD130D25555985D5E8AC1623FAC93663C5E1CCC77 A2B3FA |
| m_{p10} | 652DE6FBD477D92AFC5424953C64A722EAA5D5CB0E6A04CB43273841F71525016D8DD83708 11E3F38851E973D8EC2CEF3180D1462E6530623B004813C1E154B6CF790BE4C712573ED7348 9BC2952048A5C17F51A25604A6CA660EA480618F8DA78470580CA9B987BE33F3EC6485AF440 ADC3 |
| m_{p11} | 49AADFAED5D1C27455F2FE9D2C66B31E3792F088E20562C3B6DB2E4F2C67445690164E34043 B5C98819236020C15264BAD09CD75608EE4BF2F62D3671611443D541DA129FF475E26214AFE 00419D12EDFDC443A4F7A6DD38B2BF62F64294A80937969E9920FC3A33DE7B131C61F20C195 621 |
| m_{p12} | 6D408E783793B8F8B438F512CC4AA7F94B296885D9F59505F339C5C1F7FDB8F2567866B876F1 6614BB6E3788E1B237DD8BB955341911ABADD6E7D3276F7068DCAD08737243631C42CB77CC CFF7FD7A03B52D5D4C73F8716A83B6094827098095F19F136491EB1405992E3ADB80B685FEC B2A |
| m_{p13} | 349BA9F2D6B07CC41DDBDBB446F844D77A86E96C9C2F191F1BA42D0402754B40DFE76BAF4 DBEF3DFC28E426ACCEA6327FA51C4DAD1B6F2A9082332FA4E0BC21FCF10CA9822CDDEAEC 38760194855253E3E3D46C8565CE9EE86761B7E28BBF5C4958A3EE709B8FE9CDD0CF9560A1 DAF6CF971 |
| m_{p14} | 033E68B1E9D433BC88119CCAB47004E20B6E1B8F0E4C2756DD549EBDBC5243BC898694426A 3EDECEAAF00A7AD02D4AD1F0189A1E99B0B1D796E8BB8C5EE977280408DA0F772EA3A1AD7 44CC0C78C39070BFD324269BF86D67916D157A9BE63D9E94B76F690050368150867198BD0A6 8031CA |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|------------------|--|
| m _{P15} | C08FA672B545FA416E4856DF87BA5CFBBD64EC62A2A294427A563F691A28EF5610A0CCA37ABA21BD98535B4BC3F0C009CAA962384B5004063D16083C93D1A7C6002BD1D51A27B671EBB C4860092DF3B3C389A0E909E664FC4B99E5B1A39B72500335491372956E1782EDC5330CBEAB 7A636 |
| m _{P16} | F8AB480C79497D13EF846E58F4D6A0B52CF2A71AB1236661B0D84D8CCA603B157BC07C0000 306487C41A7CFC6A3A58C1276E8BBB592F9341C298E17886E3A2AA2A08576FA2380C710422F CC0B1AB50B13D6B676EA102B6A035449A77652524F3D79B05F9EB24C286D7A8E4AFA1596788 C987 |
| m _{P17} | 53F0FFAEB51656B7DC819B749FB5DF94E4A9545B669AFA52F385C5869C4D9A2F3BB5FC874B 9DE055EAD1159C47E7BAE8F08C7F3A202D18AF084CB9DA377C3BF8F9B710F9262855E5E04F 9C92C11E4B03DCBDFDF06311DFB839969036DD115654AD90E2096862B37338272506327E3D3 9D189 |
| m _{P18} | BA58B8BE4FB00B6122DA4EB61BFB9B775811B88EE9444BD8400CC9866193AD636A86A23588 F59E176DA8A18B856E8FFB41A8D7E91A9E874AB50B89E971AB36050058BC70C84220ED0D568 1F7CD84CD493A65B41B42E10D38B18598C63F73163EAAAC1C93CF3A3CAA3BDFB29D02521777 14756 |
| m _{P19} | 0C0769A781CC98EDFB93319AC2BEB03C8475C874CA1AFF16BEDE90B07D5C6EA8ECB401916 B5688AD4C0D97DF085CB0A16CA4D678A0AC1E00F9737B4CAA93A163F827B39AFF1AFB831C EDB26EF565102DB24ECC2B6BAF72B44FF5EB88574B38ACF3EEFD87E4F6173846B151271DD1 E1466DC4 |
| m _{P20} | 132C03285553D9205AA3746EAF108D92461B3DBA03866E70A2F47360DF17502559E5AFAA2EE 6C7DC800D8F620A3294A3E2B1FFFC17AA6634D6B7F3353A652CB0825A4E13A3CE5E91F7225 181A0678F53B3D038BACAFE214FD4BB4C2D80EF35D42A2F19B69CA2162E30543BE9BD85481 85D0D |
| m _{P21} | C2E92D3AA8981AE97C3325B1FC1843CB0E8C5E394C201981A8DD8D1BEBF8F649166508A5A1 7819D02EB0A8EF797D8C51DADBCA9A66D949A4C7E6B37ACCE1A2E578469D1B9D8D1A47E7 BEA9DD0002FF7D64BF6519A63D9084C0841A8841E183973644DF590AD107E852F3357A70A2A 5637E22 |
| m _{P22} | 9BEF2F948ABC4CAC809972EA52EFE03907142A44F3053F970445B1EDF5D1FC9F03B6EE30F7 CD74C04B68389D5826E85E763653ED75D1469A240E406B3989EDA065BD84E34F790D74D2D17 D7ABCEC25CF7FF130C4BDA979BB5A9133CF3E79B3558E921EAF013A0CC4B87C5FDCA4AA9 F245E15 |
| m _{P23} | 6DE4817165AAC324EA17347B78FB4E1D642F74E15F292880975C42F405D440B1FB101E64DBF 0A0ABDDCDDDB388672248D2BE9431F7BD77CEF1583F04680865B315E851A232547A807CEF C742E529CCE892EE7FB2F312E96EF7372AB4F7310F87912793FC2BAE5DC0E6DE2CE9FB40F 53513 |
| m _{P24} | FF5034A2747FF78F34664125AD31AB2ADD077839D8CC44372D13589649381A2198631F1454BC 450ECD0AC8D8695034CA8130B5E5DABB9EDF7A4AFC0738D82B7BAC7086FE813289092AF218 F5D04BCBCF98A07F4C2E0F8BC9C52F45C5813A693EF555A2B1EF308908FC993B2266B2AA09 C3DA |
| m _{P25} | FE1DBAC430C3B1815990B234583A86EB45EDCB32A38C92C3502B5611819701B1F545410092C AD7E962D3D6E232059CF0C9E8DEA6F7DA21D89F611EFE129D854C5B957FC810E0730EA0C56 03B035DD9D19686BD7BD8FF0C9979C900E955A649616DA71D0FAFF079176E541F1AA27F024E 669E |
| m _{P26} | 8C0A6F60BEF5DA92E8702CEF3563B50B8C1C2D29DC82B97FDEFBE322024205726A0E5B9E6C BE0F9F02FEFB264E62FF99955B536091CEFE5C6986957149C2954E0EC43C73650855376E0A8 A4ED9873AA8AED98D10579ADFB05A8713C37851692C3B4405D9D86E6BDA0EA9A4BD0CEB7C 79E6FD |
| m _{P27} | 205BB79C6DEFF102C2FEDA5301BC5B6D62957A3A02B486DD6BEB878558827499DFC1DC79E C55241B208599E32B99959F9589624E2C0AAF11E3C8CCCFA7EB88AE7B844B483BE360CF3441 1EF739BF073AAAF3F84E516CFA10992D606789A20F15686F54CBCE8A1305BEB7EFE8EBA95 F723B5 |
| m _{P28} | F32AE20D70B2FDB523682A5AE7A83307F740DFAAE0DBB58F828DF0ED20AC79C85E2FCAE3E C342E79F0EC8054231A541952736CFFED94A4F44FB7DF473C476FFB3CC87BF18A0938AC776 A26DEB32BF906D2C90F57ED192BC33F1312746B143AF383C972A2B61AD8D46F3C4E56026150 6CC87B |
| m _{P29} | 8F6A99C81370432B4D05459359C92D87DC3D10E82454B911EAD9E80AF07F26B198C6ED71E72 F608118B67C61E8C64EA654B7BB0ED91A3DAB2B77C5CCF92AEEA8D6DB9E9AFC142F6FA9D 2E79E443DD42D0F66BFE92D9BAE58113B8811E50FF8796E13C43BB210076AE2F8FD0A1FDF3 D5B2AFE |
| m _{P30} | 3BE3E2BD5546AFE1933CDBEA679EC8FBAB69C0ACFD5B2DF9A72CC5B4132123D6EFE9F907 CB187DB647C6C7E59F71E830DB84472B40C011CB418DACED36025BEF7289FA803D1E32FA2 D35F667D2AF8B78985D469532B5FA8336072B7FC74A515B8700CAEFCB625AC212AE335E6EB C37207FA3 |
| m _{P31} | 2642A80A8DD998C3198E6EF691B68257560C5E875A32F8C101478B24F9150883476B03F26B6A 137E117057B525F37E3749D1C1DFFC2BD059C6F4FBA8765D58493C87894E819EBC1172A62D |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|-----------|--|
| | D6F3DFF2B18A5987B0841FE85BC85575B0B1048A9138E6C9181017A501CBE76337926BD9AC778F |
| m_{P32} | 362817D18ED89453CFAAB83B0D182FC12F3E90C124514F404743D223487FD2A2026603D3CEC04AADB26D2DD8123B2D18C4ADFA6FA95260FC8055D29B0EC561FC355BEA5E97CA030B0187773B726299C2CB91CD7E0EE28B89C63EBE333F316DB6209B012A230FAAA29C52D41F9DBC6B66F7BF |
| m_{P33} | 6E92DBCC6445EDBDAE1D566F99C4FA5AD9823981B71A883BCD14967C2358711A59B856EC4890697E030009682A332D0F7CD85FA7E509CB2538BF395306603EE229C950D749D3A4EC4172F8400B1E1BA5479098A79F48F3F977C400D54135F75DBC6CF97019E30954AAA550D95ED4E08FC2AE |
| m_{P34} | 82B02C0023B142BFFF4C2EAC7E5F83D3C76A7A18EAC7B621A0F9B65152E475C8F8E2A30479EC3EE9263F73426722E9A96DC53EC42D7C0BC50A643E66E9B8C0BDE8E893A7562CA33856D4219A5A59F599590164B4015BB9EDCD26904B9716449FD02CA7380C6A50CE22A40E0CDB787D109122 |
| m_{P35} | CF2673929413ED857B0DC9894D8AE460C19CEEA9CBEDB810388C0ED13E11FB7201ED5A6865ADA459DC8E5023C73FC13D159A7A540F64FBF586A2504C18843F42714D4699DF6591944AB44126A4A83D175E8C41EFB28D34048E2EBEF454150F4878F6A02A874B1BE46CCBF8577A5EBF377578 |
| m_{P36} | E0FAEF096093575ADD91187D72DDB6E6401BC189A5014D6149E092146BF879450EFC3E504C306D0151ED465840ED503FF3BF92CE33E411A17AA7DADB365731D271791B8C21BED3557892C4D0B3795A24EB61566C3143A54797B8BF25194A9F8CE20C5C991FA29BBA64211B4807066A45B9E8 |
| m_{P37} | 234F19C1B17B1C403171712FDB575CB8FCBFE15B39F548E682452117597AB24B8E7E51834F222508ADF3260AEC2246AE84359DC0130229580F98275BD036F82BCCACBFDA34391C556EE7E4C90A2C67252C2614175A2D0C37D5C861A0D735DA8E05D2E7712332C0BC0B33FDDED4FD90A61D2F |
| m_{P38} | 415B84B33D1F23316B8C7DE312EBDA1091AA5BA44319C7289C78701DD437028F8CBCA30C534FFF1875A230EF762F1293A9C9BFB32856DBE06EE915D1AD66417474A705B7BFF4EC8DD448834789AE9BBBA1D2D99080CF03841DA0242E0204D3B80680C1AA6935F3F6E9F0AA2B51E5A7A227D0 |
| m_{P39} | FF16F0619F5A297CC40FC2F97DA2A92A9D144C2D1C1043F53DA05909FB7F23DD82ECE70545330C327A097FBB2F93A0E7970DC64768F76FCA0E5D255B4116550E838664791055B8D24A5837B6DE3CA65C522A50CC25284D68C3BF61440DEA011345F3127A802234B66E5FCB893830BD39C6E3 |
| m_{P40} | E9EF50791AEFDCEA8D5FCE9398C3FD7A8AFBB50F2268234F62FD799FCA3BE94285C92BEE044A546DBC29319E983C6FDA5431BCB78AED499872F24F228FA4782FEBEB6AA13606239E56F7D19107CFA441C2004192386AD0BB6DB381ECACE4D153DD844F9179263E899DB195F16D9581248259 |
| m_{P41} | C310A1E57CDA2246752056F432E5808F423AE04F5757F6B3D2E798FBCAF12517BA77CACDDF11B18D6A04CB37D80A077C8F90FDED0D33F8739312401B6889E16B8665ACA75075210424AB7BB2516828B2CAF89ADD0B8CD223FA9850B170D465125723D43C5DCFB7264F4247B4C0F5D3283C15 |
| m_{P42} | DF2A1C8FF69CFDEB8D36F67744F0C94A6028C7FFC376E4F32AE818557C2F017F040D88096141C90B1F4F55A22AC386BC40ED96EA1B7BFAC91AA0BF97E36F60E225E167D926536AA22BB1CE36BB9B42C53CD1A56B2354F23807B350BDCE7C9B01CE6AC7AF212C050F8E827CBC3AFF71D50E97 |
| m_{P43} | 88F8ED04165EA0D34E412F8C7175D3C387A9B18E0316E00DB2F6BB74CB24BA74EDDA374036FA0A4224F6434752B67462C8445EA3E51884BB5C079A862E7711AAEBE14C50DA149B032066C88E38CD0FA85AA6213F28E5BB2D67BB1E000E16B6330BDD9796AFA27EEBB6A0A7A1395DFFF1588 |
| m_{P44} | 5439C5FF080A258601EDAB8A0B54F51AC7C66B6D8165AEA5BE1E15AD85DFAAE4F908AC8404DA4CAEB3FA93AD698C835F3B60205DCDE971BE63D570267B04CC26A8CF3D5051B22D9B0F4099CA151A89508E1838185F90D7BE73161CA5CC3950E2E848B26F85B98331398AFFEFEB9A046A5A3E |
| m_{P45} | 9D26B1376B5C4F5F586486CF35762FF481842D6353D6006AC191D1157CC39678F0B4D31A1668AF65E2B78B57D7ADDB45621DAE6A3E4B0322FE0D5713485234392040C32551461A0749B53627F0364A998A18CC02EE708732DCA8189E523D588EF5D3CF70E87EA5140007BF84AEC5BC1BB391 |
| m_{P46} | 89530DB4E7FEC9DB64622E6FB8F0879B24F3D023C83AD69D674189910F1EE52BED4FCCC501EA81E122E8336A89D209FACD7F6A89F65611A470C16B12CF8B84AE475E6B82895CDA52F564DA7726210D073B38342F6BAA22014A7D0EAFD6202DE5B03CAACA0610884223E4C787E06F84A8CBFB |
| m_{P47} | A9E83B98E0C2ED7950FEB892BCAC4ECD503CBDB193D143BD03F2459DC6895A81314861930CBD9ECFF114865CFECFBF025075D3FD471558FB7C6A6CEF8547E937CF52DA324E4EA04319B78376D2F4BFFE8E467DD8C29DD0D44135ADF1D179886A82320FC35AABE4957641C9762F7C3AA7D970 |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|-----------|---|
| m_{P48} | E113DC0ACF1E85730EA81E964487D1D8263A186C5B627B8F96D95244284FAF1E9D8351D1DD7957D205C15F26F3919B34196FBED8E88D96C00441A438D27B215AB448B6F6D9DA895FFF10EB3D4FEB44468F21E77CE64757F6D8A627C4A2BF0DD9D67684F80F3C1BDDADAD192EF32BAE5479 |
| m_{P49} | 687C6FAAB36FF9C20DDBCF1CBB7AE82F334E48CC6C10B988D8154DA5D18746F3E9153A5510C2B026F5CC7B6A7562644E5936CEF2A023F40BF239A1F2A6DC75782F2D056174E8A904A7A11D3E301C0842F8BEAAA3D36C86F240309635A90E10E766FD8149844F8B42A9C4A59FE4863ADOE285 |
| m_{P50} | FFDBD37063D55715CEC274D716DB7DEDAB90ED8808952BEDA0E75599D5A29C13C483FB97D3A0822F46F2E1F4ABB756A7FD4710DE7333B488203F7152FE1D1DECBE5AB17EDB806681DED8CC12C11753418E2B2A5C95D60FD2DC9970DF38C84CE7864833B69046AD039D261DC1C14CF056DC8 |
| m_{P51} | F1748076429321CABC98153CA2C18D3ECD24CAF8B22CD97C1674F6A3EE26C016CC1B8E8C3D0BBB98482D09ADB2B06CAAFD73FEA2203F8A2B791ADE9C14A5DA7015A442392535CC10A10399B2F80D818DF180707211A8D858ADD9DB1EE10BBD6F92F2DA9CC03512EAAE5BE18F7AA87573FDC |
| m_{P52} | 81DDF8E2BBAD0D040EF4796A5EA19DFA9C0CA8067068909896A83C2E1E239D83D2B858E0864A7BDD2962AD001EB19665E4414BE81FBA6D7BBB1787AEDB0C81913D5C86E3905B20DBA6C9DAC555B4BA05574F3120FE8F3326B336B61BBC2068BCE2788641CD59032731BFA73E58869A11E4B7 |
| m_{P53} | 0F59625A8BBF1E83A906E5EB9E5E1CF85DADC7BCF7736DC02DDEADC8736F7399E4CE10601DD832D32AEA53AC895EB92DF5FFB409985EED5BC9C775C7A655102E644435ED2EB84DDDF30130F101FBF2A93FE65D473593FF3A4134A41C4C7EA6A50448F8B2FE1F91F1E9E84C95818D2CA340C59 |
| m_{P54} | 3AA62BAC2BB34A4B7D06A968E20E16A1C79D865C1F87DCA2B3DE6F3D49D962175B4D7FACE8EB162E9E0FFF9FABD6F57305051838A7D5A370DB79F9246B3ABF10719EF9EFD86664DEC9B06137911903AFE43D00DC992F9F8FAD1C017CBB7591E1A02BDE56B75B2F82FE61234ADCE34AFA8017 |
| m_{P55} | 1682757D7852076B78872B235412EA5CE2AA997BD66C8689DB605F04779E70F61A4E5AB75C65F1BD3D9948C2442D9AF89EEAEC6609E7E1DFC95294C318AAE8FB0C2E025713BE5B38A08F8A8463D12081EF250C482A2DD9803628B07C9076CACFFEF49EDD6A3440A6952C73493E0DEA0DB112 |
| m_{P56} | 016B428AAA41A03CB6BAEB518F27D34CD9F4E0A7F0C149D3B8F35B9481274E4258C01E6D1F0EF01256E48B00C7D4F9FFC242273890A4D5BF9338A1F5D74F01BF56EB2E5DE461AD46F78446DC2B56667E8732E73E95768CC05615752A8D2C88DF077277F026CA1A1057DA0C15D10CD6093DAA |
| m_{P57} | 68C2F3594AD2A41BFD7BBF60702C5581B3F75E54CE7D1B3A598400306FAA22783335DAC415AF939C4596A104724F53953BB51239BEB77D2574FDC37CA1B07C5E7AAC2774DC35DFD6B83DCCEFC3C0A9B3EACE9A6052C44E8C327B24D173A760BF9535EF8095F35D9DA3E289F636521ED06584 |
| m_{P58} | BC27B7917AA3ECA9ACE1F94A1A917FE1CE6754E906AD4645719CB3818FC58A48F8CBBF32938D18D68203507A4D2205C049AA7741E089777205F1EDA69439984BA8DFFE45C210253D528305BFAD36FCC90683801A0F19022923E45DD0A52F6E2E3F9A49333250F76A8BA8C325A39B362D9F2F |
| m_{P59} | 057CA87F217E30182A60109027005CEF36F98571B1C11A6525308632CD39232853177DB25A639192FB65EA70A70D90CCAA34FBF7C2E6233A362F46345F15CC5B2565DD7537010E1BCC22AAD2C7BB05EB6BC05A5DF289A8AE249EAC10F21666C742A09462FE8F1D38B5860CDEFCAE2FE8BDB0 |
| m_{P60} | A2AD4999053CFAA50A1093DB07AEABCF6F80C293E00D8ECCB12B56CE7FBA3F62D686C15B3E1A941AB480ADD6F2176C537686F770D73ED366086E67F2C46B8AC06B870880AAA2D9B444217504ED74C7B90390485AFC46A63F15CAD9251C638278707D46A384DB62A7BA27245A5E16D6231908 |
| m_{P61} | A196D99A227C44C27BF2BB0B6029557118925061AC9ECE965EA7AC380CFE1C0C33E5B7567E4FB77B7AC7DF34E4557545366A943D375E4D8A211CF03FB7F37620E9EE47267D78ED1D0A2478A353D2217AD5AD76892388EE7F0144ECD69CE3B5B04928CFA6A68C9FD0FE817942FF143D9C2DD3 |
| m_{P62} | 2968ADAE21E52DC8AE811AD840AB7600A5C6FACB2F3BF707D0DE018178B5FF73BB31F5C88E9B6C02C54B8D7B1A049E39CD7960F7109AA5EE9A18E9C3E9F0E8359952E144169870381391E3761E3137204CA71CCC4DB38CE4394068303F088A2497FD49DF4864CBFA1675AAA895068577AD0 |
| m_{P63} | AF21B04CE4B418B9A0AD80221A9C47978750483A83E9096D9F09069C3065E8F6F1FA68EAD50B78736311BDD70F72D97290C06888ACDEA4FBCA3B25FFBC5C8E91676C4384EC68C5D3C40CD5AC3E75116CDC28C05F08B479A73E2AF7D380F69CEDA810A60B6FD6609CFB8A7D4E98DE0596C4A |
| m_{P64} | 56BC72E0F1CB9DA84FBABFF84FA635E1AF9B60BEA6C22F8953156C90691F44D2B4078EBD8E8A8BF6760BCE5217E2B0C2E19D4470D3321083486339AFD6D57FF66E21C149B40FCFC5CDAC8 |

| Code ID | Basic Midamble Codes m _p of length P=912 |
|------------------|---|
| | 0F7B6ED2AE576F3ECD4D14A5C56DCE7CD04147F9D725A783D9915D2E7A036FC854CC373EE8333305 |
| m _{P65} | EDF8D061318EC3126958D38D4E0A0C71460B5F46E16CB7FD7A4084D174F900BC8A79C672C612E46E2AECDFCF3C744F40510FB20D15FD9C2E696F8FCCFBF80FA6A435369889E17A612EB222D50A6B88BA06408DE022EBF4EA74295F5B921AE86029D376E2D51250B79053EB3AA58B4C6F3199 |
| m _{P66} | B86E98A32DEB7FB6F9A120725EC9C07CF1864670A9D5082D7DB7FC7656AEA8EFA05D661E63A06D436DEA5CB02E5F29F4B3D364701B1481BCACF306804FC14EE48A19CB8095F9C456502B39A08593AE258DBC12B358D6918C3EB8546F9F3E36646282E08142CFA309CECC823549E02946606A |
| m _{P67} | 070850FC776EF3F88456CC9841604D144CDD4B58247B2938AA074009F128682E25FE0E6DF2C3991A5029A7E4EECA22C5718D6C457F3B529702EF34C7CBE96B6EC2A2391DD6079A21941855B5BAE1729CEDE009BFE8CBA54C25E7F0960990B004755A647D568D290A645C4C3B8E7262C347B5 |
| m _{P68} | D96CD3FAF18CE3B8D470CCA2567E54544F4F9FC471F02F6441AB5F786DC9099E16C9482468A2BF0DD84C87E36C8A7D39500538FECCF76B03086065EBF38819530458E0D4B3ADF3C66C066A0651D3E8A84BBF6A4697C05DE066B112A8B6118977923DC3A01F43014B02C525663748B4F65E79 |
| m _{P69} | F660B66151AC70269D9405C9A987C3FF25DFB65AEA14E5EB2A699BFA335AB16974D0011206212F3A3FEA6F0A6971FB3C6F4D73A6D44543FF1FA0775D57D13AEF2E470177C55F1D823299B1DCFE4CA851D7E9075CE9B8D6344B47354DA209DCE4EA6C0EB1F43ED231C04DBB510C68B2D2F336 |
| m _{P70} | 88C9890A01B550D44B635B0D4C01C20AEC17B0EA42389FFFB0D70386CC2BAD4D5A8E021A228BBD4059FD12854187F2F0DB1D6CF7AB654AEC2877D2B1A3A8C508CD9329A096F161B8DE72866C2C99BB67024C9261A24AFCFAFF3A483E8D71BA7AD985E9DD0CEC2A4B31E088A7CCB7C4F39CDC8 |
| m _{P71} | 1309529E28E71D99D501350D9662F3BF5E3D54AC16408117F0083FBA22F1AAD9CC29552590B051B725B81B56E33E36C72F8EEFDA5F3EEF4629885BF827E05A4B918B831FCFDACC9656FC41D30FAC255D2C931D3E090897C3E75CCA520061DE330C60AFA9545148B27A1377300B0643897976 |
| m _{P72} | AAB7E27B83CD46F2EF18B91FFE9D9C69BB92327B0DDE3664C8974EF7BCBC77234772C02007B344BB99DDF344F7E5A6C3CA3F01B0F28DCD566BE913C274F296F056A74CEDD7680CA7969A34CD785597008543208DFC63DB6C847BD364BAFE11751515287B210554A5610D7035A374E0243E72 |
| m _{P73} | 7972CD5FFC6AF3780BB7A88BD4BF9799AC403D1976D8B4ABEAEF4888BF0C269C96572D81B3BB55E33D30900CBEEAAF1969F08E4EFC7CFE7F99DB9A184869DCB18A3D143AC725E46F01B11EEF3940932A7AFA30E87E156428EA927872FB64CFD072106F00811359CB146C957C15C3E920DA96B |
| m _{P74} | D62ABF2E9F79492FD2A22FF60CAA94DBEC39C380F12290B133DE53F18B1914DB0555BF6AAF47539337FDFEADC58B320D67644408C4F5105F8907F2254731D319FC3CA221974D5E9006979BCA2BD89C04F2D1E1FF2D4C51F3BBF2CA5BB2FE8FD34CF05AB45599BCD6DCE5C2BC53E114A723DC |
| m _{P75} | A0D97790B621153CF61E6DF09D07FABB17CD0EDFD030E300ADB777FE3569C35F747E4DD1566196305DA32BDE5BF26E395D6836254BFF3DAC9FE2BBACC4A5900A14E2E72E0D4D05D09A7A3BCF211D1E2F7E36CA379B52BC21D937BC628D6686F59171C5DC4A223D9AB1B8F89019FD50683ED |
| m _{P76} | A133814EC7D9BA19C3BF38946484310280B2333E631F2A29137230EF8B8F9A30A958D8AEE03A5578EA40ADC014AB6D8204C396AD7EAB3C17B1325D7D55FFE946525ADD5CBE28F3DA392D8873C82C6CB6CB65760DB5B0D985786A7B04237C0D0C5F43C903E9CC3126AEBF3BC5CD4349FE2602 |
| m _{P77} | 89D74B62E35F853EC718FE7A32C7B39AFCA27A41C87CA9BC76FF6640DA6ADADA997562B010AA1841DB918E947989291BDCB50C9F40FFF623CCB0336FAAF878FD49BE092804AA73A3A41907D5CD32A375C898373D93FCC4C9EA84A2DB9802521FD5376F9635EE1D0C3E8DC34849369A757F5C |
| m _{P78} | 2DDE87087BDB66B5DF7744CB16AE7164D2E5AA7B7B2CD8BB46C6A602DC9A108752DB6967F1728B12FEEEB1FCB681DDC48ED7C1C3DA5536AD84CFD9F5E94E6148F4DD3D9CF3C830F3B6401C8206B0ADF952AD505B96C74C615FC6F70381949B2E6E25F42D3E6563041FA5F501CAAA93C519D |
| m _{P79} | ACD35DB85397D81E1124B62A60CE35E4E8214318527F96F273AB6718822971BA76448B3A6E662FAFF4D37BB2176934F80AFB3E03FF494AEE2F7C5B1D0B723E316AC0D67AE53A1C0637E155729422E7F78F5FE19BB9DCF674D13157B2F8994C5DC03780B6EEC2AA0E57FB7F8A6FC0EC81AF87 |
| m _{P80} | 43FCF00452F2E93D9A4110003601467549D08A20E4DE27F025843FAE54D9E2E5820D890558C7541FC771CDDECEA6648984D63183ADD8E5BA52F6E56956B6F1CBCD93374F34F4709DBB812D155528403D364CA2E54BF1F6828FB342B3D378185A6E3E8572B2F28EF6AB194C184ACF4FC409FC |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|-----------|---|
| m_{P81} | B130A5C2EC864C8FF71CFDC347DB4CEE38259F34A8F9C8BD143763AA9DE869CA25E1A6A49D7A6FE1DC029DB9076FB6F111351C6FDBF0D1C1DDE412B835FCF0B97ADEEE7AE09241C2FD620D63F894BB09E839021D4D81932BE52926A33AC9C81AB3D9586AD2E8AE53CFEDB55D43965CA9EE422 |
| m_{P82} | 7AE9E0D3F5D0295917B116C28DC20E9B305296A3FF02339C1BBA86CD3D566D0C8948839C2D4751730DB66179EEDF5B04404B7D867219715C87F9A18408284F0C0894E1864A55596DB9851D0DB68B8AF7EEBAC5C01DA3284E6B42F7FCE8877AF04713C98274FB93FC8C8D421B0B572B5DD1F0 |
| m_{P83} | 9737D9C29C179CA57976D04DF9597432A763D93B69B799EC14FFEF6F84A2F56EA0EAFD13FD6D2C69462FFB551A58C17B06E32C59E605C34CA287EF8EA38F99C45D93A922C50B19FD02B130F5E704BF435A8998BE97F76181B64C56760D8A5B0043F290C1637783FBE77E9D113955431B6F21 |
| m_{P84} | 29FE9F4CB903F8BFFB5134A5D8A2B3D7A8936A3311BB1905D9ADBA1E3467AC5D3F5F6A7758130E4445856422CE094D85B620611E7D8F5B3C0CF386490214FB6DED5CF761BD2BC87CBB0F4171B566FA32761C9CF11147417F50C47BD1986AFB9EC129CDA74EB0947C06B935F5A175D22E2E35 |
| m_{P85} | 50D3795F988F865B3A9739FB23047D301913B7BDA5F87D0A3EAC478002A20C571D553EA190393D404E1718BDE3C780D26BC9FB48EB55A9228C323036F000CEC60AF43E23F734B104A4998B4662D1770B46B1643EE6A9B4D8D9308F4410821FDB39403652D53952D5CDE7903BEB66FDA2596 |
| m_{P86} | F84F4D2894AFF4B26CF0FB72DE03D5C43D98F7A13C95FCFAFA16D9AD2DEE38EBA7CE7CCD51F02DDEA932436451B6AF185E2C27173FC5DC4D52172E0451F4864933F7D829691994CD982D2D7D7B302333F13CAE7DAF6EC9E67188955207AC461AC2AC124FF94ABD2705560E5DCFC6F98C8AF0E |
| m_{P87} | 058C6EE106A2DCE93EF5220D1BDFDF725C4DB869698A72F89A886AD38A0F42ABEDC4966FADF33AD0C39388055421F2D4D22FF5E698C4B1F002633C051582D899A9CC51973000BC3D43E64BB0E080F392DAA65ED11D081DB55BAA3AE3EF2B5B135136E2BBBF81F17A926D9293233C08F58A |
| m_{P88} | 600EE81F7C9864F1B8C7337A7C1582B1A038B8461F5381276E514C27A86B1C96F61A3DFC4890023AA7A3A8F8FAD7750B3A632BF745881704C91198D40F0C6DE51293656203E4545EC660659EFDE97CB52C4540AD7E6942B475BF5C8C2047E38E3F79731AB972F64B519B4DF44BF25254FB28A |
| m_{P89} | FDDF8C811955AA732713A5973F621C8A763E4057047D3CE2791D20A49250C5BCAB0FC702FA6563274372D03275D6B3FDFB4E981D7D35A7EEA2D99F607E88CB38D7D4B35A40934EA67B3EC9E7FE2ABFED68969E0534FC6720346D8C07CDEF5C173554F14E05BD81DCA647C355AB8379BEE206 |
| m_{P90} | 624518F8749EFD5DCF5729A3D5BF4AB67A5854398C8D6A2CCB07F2BE0D676221F764716E0AEF70515873645A9F438C1250072FA65A167AEB30CF099AFC2C2504E129D77FF2BDB28B78A36A0D621F74FDD36D5EEC9BC4625EFC4AF6CDCDC496B747134E6D94D87F141481DEEB83B841C0E33 |
| m_{P91} | F8DF107B028097DB928CF7A03F0157BC3B50EACC30063934EE28413D7764CDDA46D17EF91CA7205516B76933B3D50D385D871357AEFA2E34D1E3E929FCD08B940AD54762D21B73B0C144C4C2309A26AD3EBEDBDBCBB0B1A49AF796DC5D8F62F479A6CC739D6B391D97C39FA017EF2D85855 |
| m_{P92} | A45FCBE0688A55D051B057C34508507010F607661BA244DB1A7CE599CB4ABC6F3575A765E41C2EB8B5BC49E61162478CEB07461787B0EB6AD14CEAC878DC9257E48418C2F3292BD087FF3B4CB7758B00BC5380427E620776FFF7128254CAEF743129B317B8C21D0ED02B3B94785048B3B274 |
| m_{P93} | 432250D31BCDC883439F92FFA76470DE1B6689465A0FBD3A12AB4D165012AB32B7EDEC85968CB1BA84C24321CDDCAADB0175DC6C2FE2EBA78EB788E049F8ED34A3AF1F42519957C74896872C3BC6C0A7A210E8438EC84085A3C4E3884E8B79AA57F85937D815C493C044B80519F76EAC075 |
| m_{P94} | 4E3834426643F2C419007C48053C6B7AEA54D231D68631D5CE305FC33C155405B2566ADF0BC3E4D70B498B3CB2981425D610559C2EB63213F07AAF3E240653230436ABF9D823799A05D78D4D5A45A67F6637C9D9A4BEF410BC0290BCFB47E206A64FB6EADA1CCFC9B77023EC705670A9439C |
| m_{P95} | B655DDE80717690057C86FB8C2F94A922D4965624E527B42C080EDC3114472B5D58E3076EE606A6513515FF6FE1F5C6CC4F6A34AD865C7EAF03558BDDA4A96A838B1D13543B87E382A4CEC3383E4F2EC960D9707CC52624905326B32B0F6C8F3CB3FE7D912B8040518E61C0C1D0BE6135F4 |
| m_{P96} | D3817A6FD2936F4738A55F19CFBD1EE3801CB86F9B9656D39BB4CCE5EC930CB801BA371A05876F63F2A9919BF8E769F140338176169439309841D43FC304EED8D80164D2EFABDE83DBBAEA927748597DC553E6A2EC52E3D7340FFBEAF817484A7558B59753BD8661596C940CA6F16570D6F3 |
| m_{P97} | 0CCD1503DBC6DB746E369372930B18BEC1C972C30D3BAC9547590AA432AA5280492851CF8935F74A5431E97169A3322586719FD703B122B70A0394D784A010D6B9BCA2A9C7284B8368127F |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|------------|--|
| | 2C00BB31CFC8EC1B3A31EF6EE148114BC0867C1182A742FA26A2EF1F62F948762C3FC6DF7E1E4C |
| m_{P98} | 68AD9382C2FB0471F415D72240613B24F019FD981423501796E76898F2D423801EA8321E01CFEB9DCE4AADE7CBDF0C10F94F98E6C9A561204D4051487E5326173030FBF760C28D8BE6815FCE78805E9C55CF7994AC8482B6A13254CE7FD3ACCD6D96CC35913962F57965D2BA905D50F4F7F4 |
| m_{P99} | 965AD6AF7A822E2D0A7F3F8B23BDB9DA7667882789C85A010B0CD095E2BD43919DD6BC8F290FD5FB7B1F0A4F8C47C348EEC37F483B75721352856568DFCFC16AA1168E1D948E9861A5E693AA0AC4F26225CC888DF6F326DF4D5014C892ED9A6A8E99C4140BAF7C03873532F0CB1EDB7EF |
| m_{P100} | 11514B31D4E01ABB0202CD8B26B4F3610886058BA519EF4C9701EDF8ED2E935F65AFC454C0B672B14B06672BB742640EA5BDBDA47FA5F87BE583F65331E2A30CD850B4619637DD7B8464606F10236714131E1D2AB4EC55654D05A93050E6F8748B4DC83C6202B7FD63CA1FC0EA00DBD48538 |
| m_{P101} | F6FE8BDAEBB7FAA334EC95ADC619F8A04171707C84C79A7C96F973392176EB7AC5626FB24D0F88EE8D5FC99DA5F03C381A93ED455B13DAAA4DA3EF7A092D114316F6D25F319473BFA8EF025438B0A510DB7F4E8436A38B16606150D2B35B2872DC206AFB17732FD16219BA58CBA1CE402B9A |
| m_{P102} | 912FF3C82D2B7FDA4703DAE6E349E1844212B4672DB02A4D0D4465220C1A4CF0E7D56C945ADA538D465A76C7DC3AE272BCBAA4FB9D9925EC41FAE0735380C1126E36EBEE55270F99A0D851FEB280B103E3F51080B99496B2E3027F6EC16D91EF42C58E4089AAE68CE075D323C4A2D409CE0 |
| m_{P103} | 4789D7468124CE0AB731772154704A07BDD14C319DAA60E9E3B55E30D61616301AC560BB31B6341FA629F630204D057A74B8226EDE4A4696159DF3BC7DC3597072A1A95464142AF23103CB7C28AA69A7D2CB990967427F9EADF3EB65FB95DD72CEA804DEEE0924307794D99FF406F0AC40F6 |
| m_{P104} | 9A5C8700EF68ECFC28CD6552C267515F58593EA84FD48BB5D63EA028DA77F92787FECA4FEDAAC04591502198A10725B62AA7361C932B58C6F4D431103A56AF5A8400E8DE5AD26788F28526387908EE52B030B639DEBA260A321B09BD60E7BF3C54E1D8264A04B0F65D81F9473622CC05C3AC |
| m_{P105} | 9F6A2D1D54D09A6A3AF7BF514DC754301A164602D531807186D9930FCFAF112D40F72D17DCE9C40E9EEE8FD2E5D1D3BA4543ED609DAF163CED9BD0074D3E5F7E17F5AC7B4FC4CA0690977DA3533AFDBA5BD328BA079BF2335364035D68673B98330B92AF5E3C26A9AB596986EFE9665219F8 |
| m_{P106} | FFEDA9F3DC1F267C121D6303743286B1AB1094A1790B58B1E4DDA9D16303A3289BC4440987775D6491383589C96181AE093289D42230FD88BA098F3575FC393246726C9EAF6C6955EF135EF07E862915734A5994D2CA7301FE844DE7B4BA9417CF10045BEF5F4D4C5BC044A347E5C9E99821 |
| m_{P107} | 644CA39E3F93C4AC795EFC5D58BD90228E2638BAE24CF4C3DE75697823DF4AEDD3253E98081C4BD215DC64A9E6BC0115027F6BA4E4FE2A93FC726DBA4D9D21DACDBC76B45377B68863F9FD426E4F89625657EF97C03D277C373E15D21EB721AFEAD246ADF1A0A2A0CEA730BCA98CDD4CB808 |
| m_{P108} | AF16DD60C5458A3D27E36850281E401B10116D5B0BCEA1B159C97487584652047981333D5573686F4C0A063E1186306FD02DEFE2C61722C5BBED60249AA2D9260ACDF870B3B5F5CFD7581580DE486D8D9F332A6C6B6464AB0E9D54159CCD03D6F9CA12C13DE34145B34FA40703FDC76AEE7 |
| m_{P109} | 33FC7C9D9FF74A2FF009240C3AF398937D078012219BA54C6B0B0D9448391CD1D4017CBDB54AA59355EF05A9712779D71761D96F650EE10546C39694938AEE89F7CE6FCCF4BF987D0E9DD584992F2732D5838A92E537559EDE2FCEE82302D7FD8B1C9CF8215B67BE61D4EF4523EF9032B1E2 |
| m_{P110} | DDAC8DB73BF5A8FD9A74561DE805959C2ADC755274740993616B3771D10C6F5B0B8E4939A444F280B39CFD29EA0F562FEE0405451D8D9DAEFB8B1E0C8D69CBEDD6D23D8A56A3A9B87BD6EDE46FBCCC135D70B8FD4619C35F9A72E93E8954FA787B8452347E4B209013736D0EC059A243803B |
| m_{P111} | 516913696CB4D961C939529F64585F08C42D1FD1DCDC78F16DFD5BCE287434ED251FA1AABF676006D75FC455DDE30C8840BE6AEAD10F8A12C641800C35B8CECC9BB54037AB1075190EE3D2D8D81F675898FC442A57B3A7B18B0AF90528DA8019245182E920B926AE569D656E3BB03A975CD9 |
| m_{P112} | B2419222199441C48BB085E7982DCFC0FAEB16D39DBFD22270AB8EA6A802DF3580ED6A68A90E3AF03281B48ED3FAA2DC45371E3733539E70B137ED82D5A2CCC2031BE3D6A4786EE9D9A9153658EA0B483EDD49F9D1E189F3D418B73825CAF3B4D05A805F80FCCC5949704252390DD3E86EF6 |
| m_{P113} | 04D96F94A767AB70BE85D6EBFF3831E2825595CAF1583CAF2B75010816DF65757F4BB4BC58E011FC5CC50F220EC72ABF672E8C9A29821D4A106603187276492C366618C68CECF60AA6D4B4F03505EE0BEB591336E130EF4593C5C11749CC3D2974B1AACD0DF19672F9330457241E201DB7CC |

| Code ID | Basic Midamble Codes m_P of length $P=912$ |
|------------|--|
| m_{P114} | 12CE52D22E8BDFC665F49D86AC6C488C9012088FA091E5EE13B7C45A9A5CB156F147D6ACB FF87C4817350AD15C5FC3773F3C58FD0D3B88242CC46DD43A5288933ABE5A6055FD67B1159 3C900A9654D82BE40200E38C7A9643BF25419861A2D674B84995301121FB34389CC5AC83E94 CCC738 |
| m_{P115} | 3831B0AED8C54E6F5F348C22351E35AB1099C47149117A40521B30D005DB13A81337A7EF75B 0A6FDEE2012E394935C2D61C0BAED3B65D4FC768C30F654E97BD33A54F49A2753915CAA137 F8B99861872F00F6C019DA1A27277E1FD648608CC108EFA2D85490980F7570C37619D5F4785E A45 |
| m_{P116} | 2D7BDCD4C93F3175F441994A9B188976A7F4F714A80AF693139FBB757C1D0D71274167EEF2C 36F891612ABF8B3504FB2A1F0BC1DF24186A6C2B79A4EF118F67FF477AFD650F6BD208599D3 31C3B5ECFBD173C25D7CBB9A0C9D4E0F455509A8BEF805201429E3192D82477E4E85D606C 53AC |
| m_{P117} | 01E085F900F58E7769F8C8A24DCA26984EE56F2D8CF0A0726508094A20ACAEF0703351EBF8E DDC1C59012F9A3032B11D5BB260FAD321280BE48642CE84C0D3681E57784332A87DA3C06C2 CCF0993A6EC2BE1A979414EFADEEF3CEC8E12C41F55DE52D48F0B851EA968C159B9CB2D51 4CF4C5 |
| m_{P118} | 32814E789480CDAF8D0E09BF65DC4863B99B8542F0693D77ADAF6F32D0173110789E26F1BB8 F9A8A71D09DAB03FD52935945D7A4EC68C8B043B27AA81200CCA1DA23A9833217CFCAB5D6 2E0C488EA2DA2C73DB031F205D7F960E9D8918A5C652C1501EE93204D273464BEF438A94DF 4496AE |
| m_{P119} | 15DD44EF0204B908795A090C32188643FBE7366EBF30DADCFB2C41953A854FEE39EAA7E9E4 E58E30B45409B72AD05B43BAE11095FB1D20FB2A73E04448DEC973926BD7BA0EC291A29AA7 EBDA5783A2A253649F036962A0E4525A07C66653394116352439A2520891F8E18D2CD360FFE0 B111 |
| m_{P120} | 89217691E99FDDE0598092D7413C6946390C718299455B5B455CFDE3E2E15CAE056389BE60C 836B500053044568990C9EE40582F6978F91EE5ABD501408EFD805F4F64FCE2FAA5607976AC0 16633E12FED435EDC627548B79898DE3B5FA8B246196CB2F4289A0E3FBC7A4A911274D4CCC 980 |
| m_{P121} | B3047C6EC9C960702C122202B7BA48D54A1015C1F9CA22D879FF5435C6EF930FC5EF8FD811 3B48BE47D794B87E5194F8E7B4525B4CEE45FF5D0D70CCC00C67496943EBDC878DE4F9BC8 849A24CFB05282B117F140A4B1967B8F4E38A0637A4E8C916914CFAC15D399174B1AA65C86D A472EA |
| m_{P122} | CED19A2B452FB08A4E677AE137AD75601BD7824CE59E4FA627A3C5AD101920FFD89328B3A9 17782F05781BA0292EEB18193BC1C3C02B48D272D449F381CA20B12B1C27A480C628A33AC47 2F2EBEEB775D3D3681A365C728DB9476CBF8744D84448FC6303BDD28BC38413277F6B61CCD 4A913 |
| m_{P123} | EA7FD3D0732484865089964AFD0181F0A64E0B9BF58C20C3F34D45739C01ECDD11681E3B4D 175D237A19C2800C8024FB7D3A14DDDA53180B10E8F1C569DD9CE06FF19EC958989AE43ED2 6E96DCA2E954BCBB6EB502F0C269EA75F5CF002BF49B383A00159C0D39AC71D502B5571636 16B66E |
| m_{P124} | D08DC6EE2CB2EB2D3890230CF7411F51F71024C8F05CDA7F958CBCB81B12C0CF27342431C CD1BBF61DEF50298E87ECB4A98C489D3CABDB55CE95EEAFF850BA13C0F772CD9F2943F961 227078A05FA3AEE18E61657D04AA37B7F98BF5B6DDEF0F87ACAA5B4D1D2CE0622DF6B8816 EFAA2F448 |
| m_{P125} | 70C1FC8BAE04C07CD256269A02056B79CD0014D188197B4BE89AF8A460026EA8FBC7C13A77 93F2822A94A4A7234727516D44A5BA521E3E28C34396C69BEC8233FD0D82FA8D5B2C4F12F92 84962A6F19C2E655AC44BA85F064E8D134F28F9EC479FDBFBA74223466D185CA34C7188C6E7 E515 |
| m_{P126} | 82323B03B81937932EF44D0BB2A22DF5F8803080618940A4F1DED2778230FBE3D04545B86B1A AC4AFD43A90DA09148456DD81684F7C143C48C710076ED7A60BD6128BB9C4717DB97331CFB 667E9EC1D4B03191B3A218B12CC957A3F5182A452694FDE1A4241B1410DD104BE1551F1E85F 8A5 |
| m_{P127} | BE616513AE32C4143C92A7CECDB56F082F7907098FF61403161D95CA3767AAF7F46A8D60D66 C6195D27F25FC5D0D840F7DDDD67A3E492FD9FB85A805CA0438F822BDE583BC11B74C760E D2FBC9DAC6F361EDF71B17B96B065D5E2E43A9A87A7CD561FC8F4BC809F474D68E6C4B6A7 542065A |

AB.2 Basic Midamble Codes for Burst Type 2

In the case of burst type 2 (see subclause 5B.3.2) the midamble has a length of $L_m=512$, which corresponds to:

$$K''=8; W=57; P=456.$$

Depending on the possible delay spread cells are configured to use K_{Cell} midambles which are generated from the Basic Midamble Codes of length P defined in Annex A.1.

- for $k=1,2,\dots,K$ ", only, or
- for odd $k=1,3,5,\dots,\leq K$ ", only.

AB.3 Association between Midambles and Channelisation Codes

The following mapping schemes apply for the association between midambles and channelisation codes if no midamble is allocated by higher layers. These mapping schemes apply for all burst types 1,2 and 3. Secondary channelisation codes are marked with a *. These associations apply both for UL and DL.

AB.3.1 Association for $K_{Cell} = 16$ Midambles

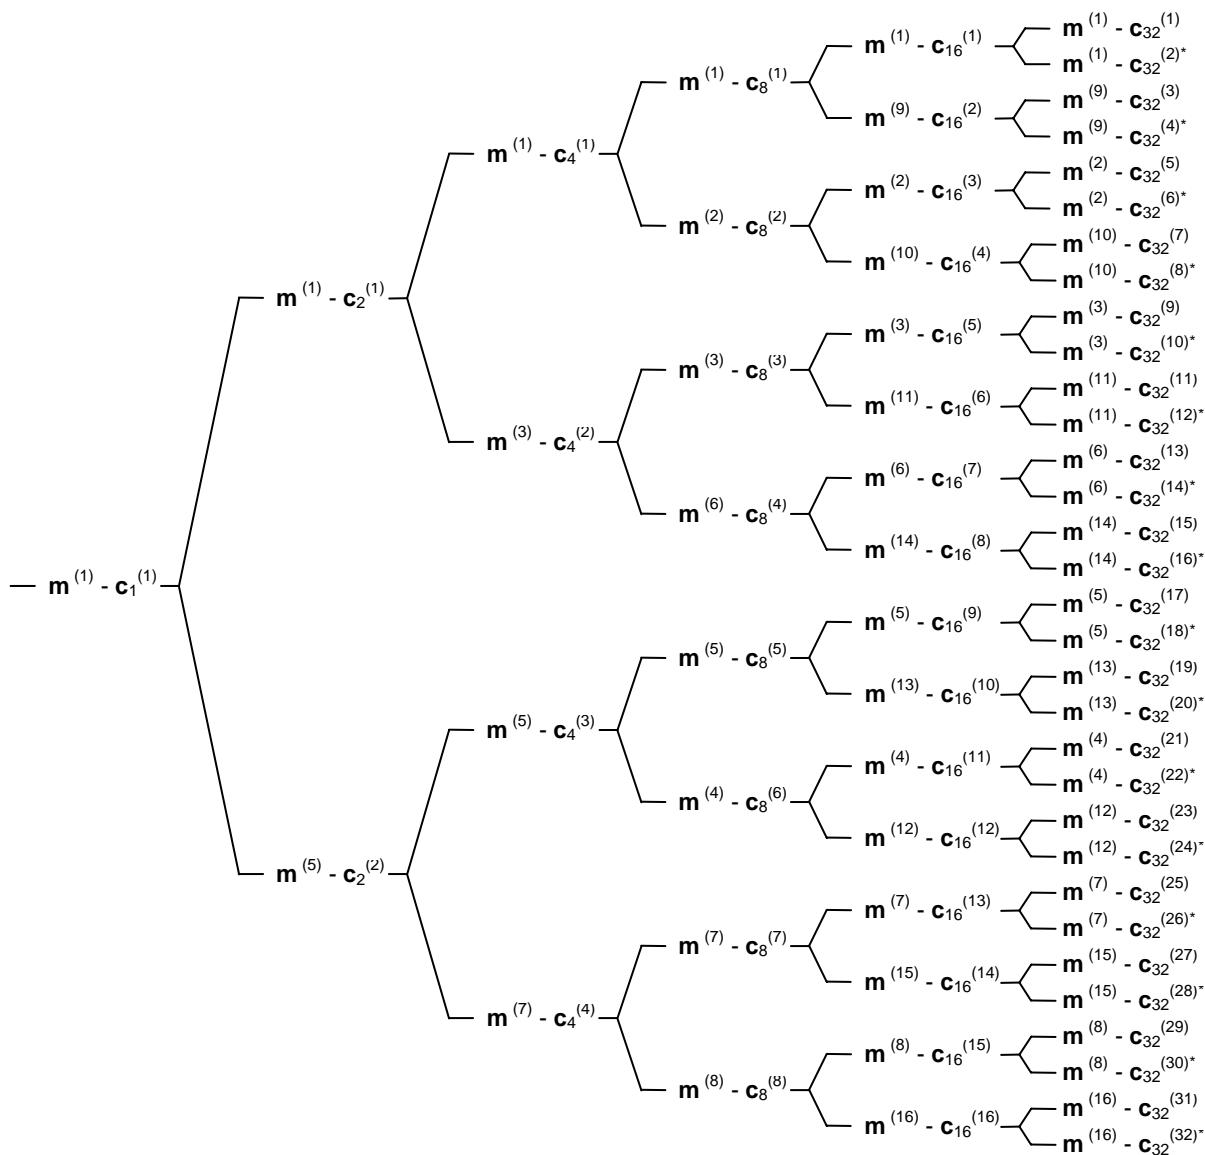


Figure AB.1: Association of Midambles to Spreading Codes for $K_{Cell} = 16$

AB.3.2 Association for $K_{Cell} = 8$ Midambles

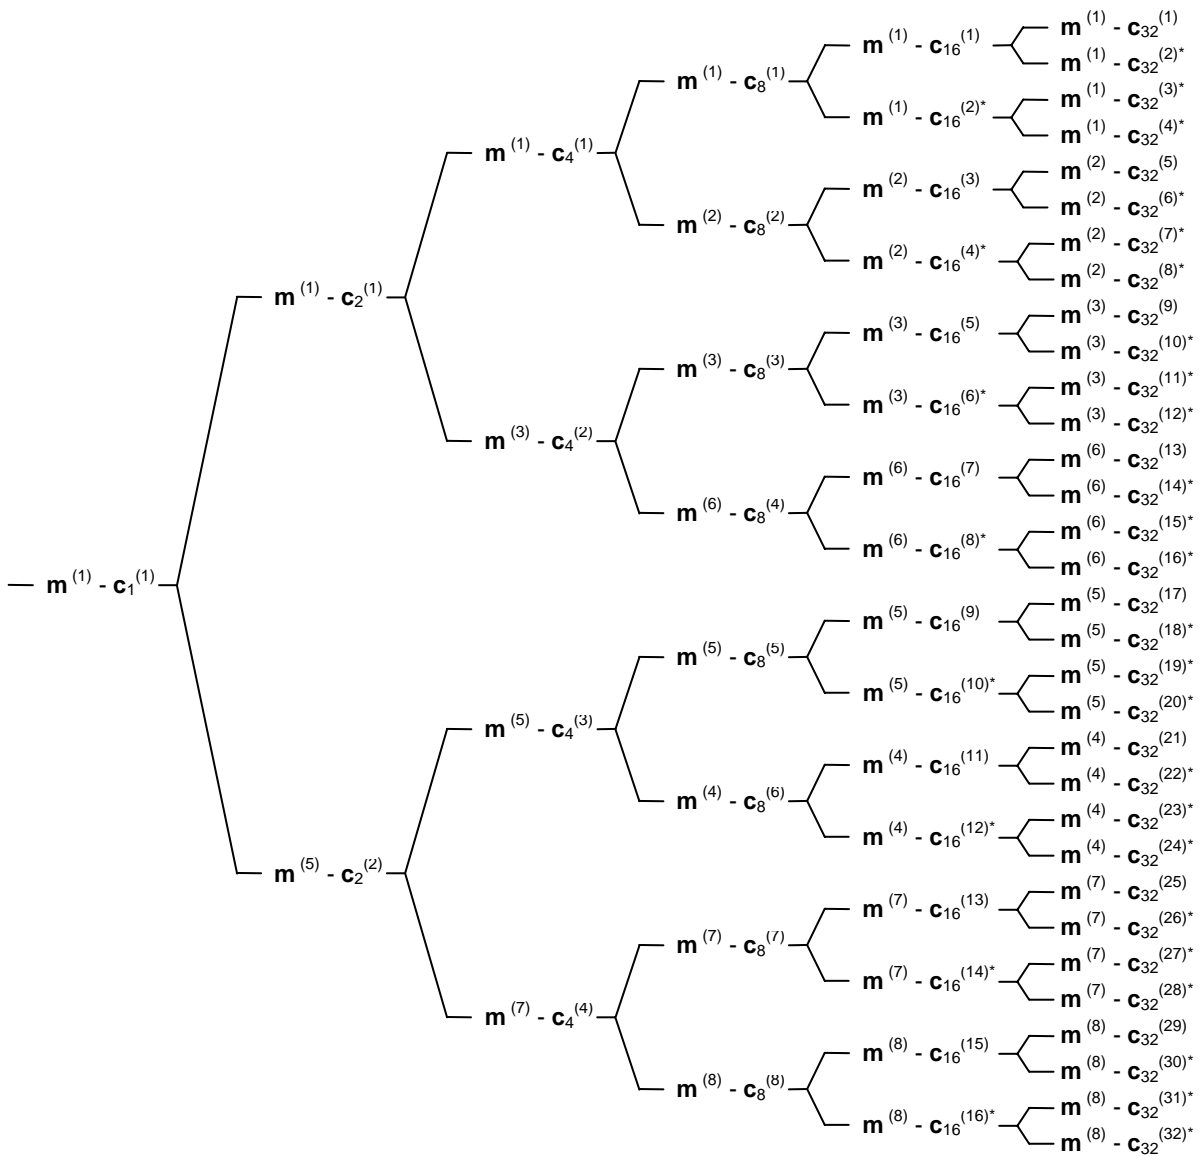


Figure AB.2: Association of Midambles to Spreading Codes for $K_{Cell} = 8$

AB.3.3 Association for $K_{Cell} = 4$ Midambles

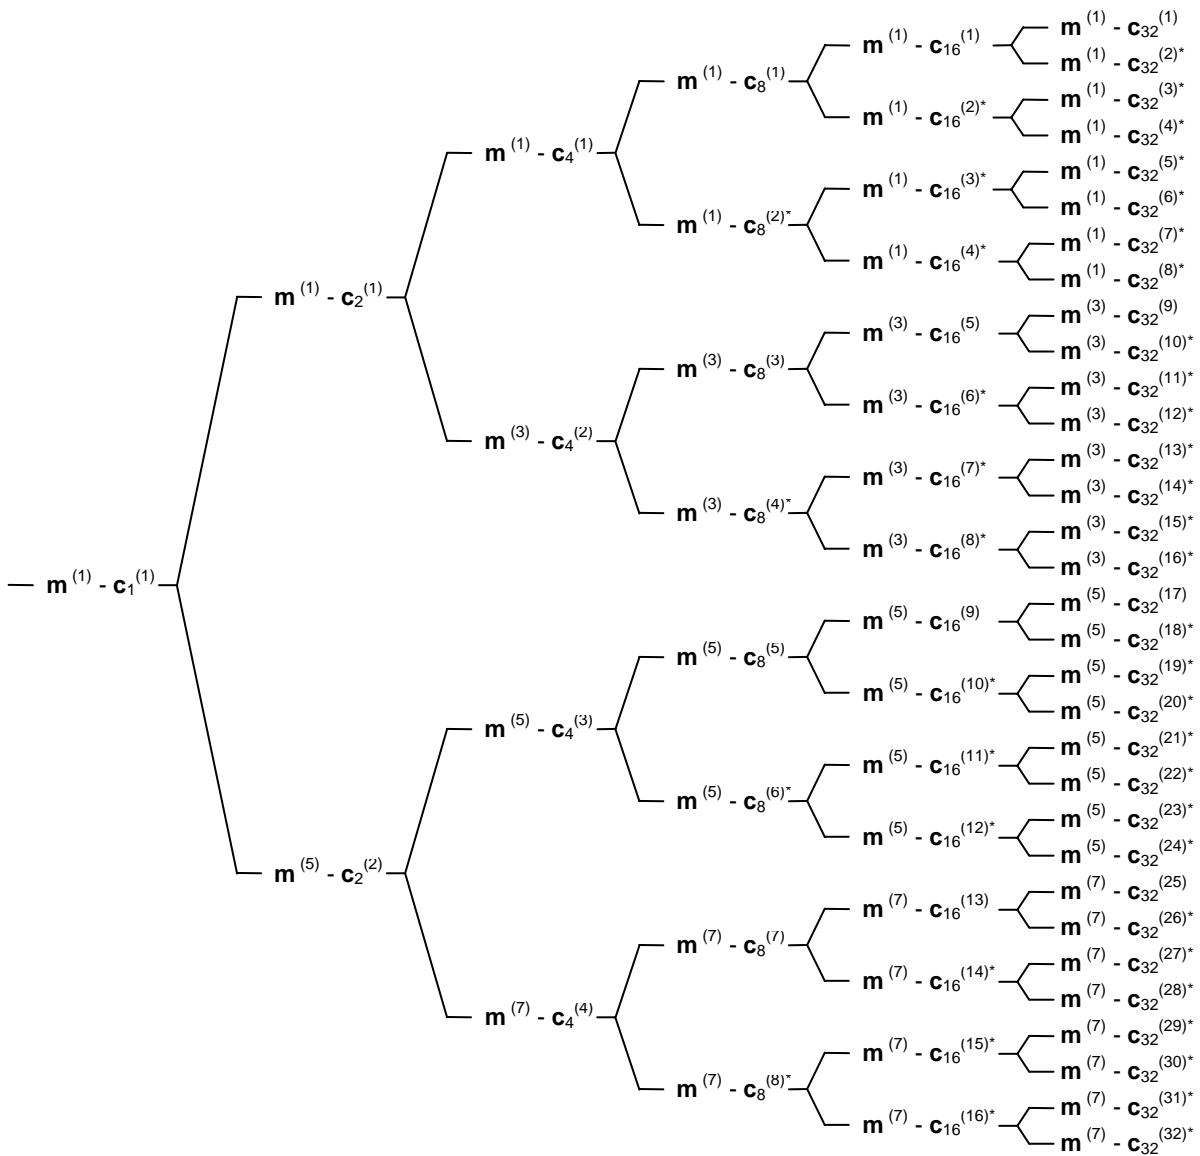


Figure AB.3: Association of Midambles to Spreading Codes for $K_{Cell} = 4$

Annex B (normative):

Signalling of the number of channelisation codes for the DL common midamble case for 3.84Mcps TDD

The following mapping schemes shall apply for the association between the number of channelisation codes employed in a timeslot and the use of a particular midamble shift in the DL common midamble case. In the following tables the presence of a particular midamble shift is indicated by "1". Midamble shifts marked with "0" are left unused. Mapping schemes B.4, B.5 and B.6 are not applicable to beacon timeslots where a P-CCPCH is present, because the default midamble allocation scheme is applied to these timeslots. Note that in mapping schemes B.4, B.5 and B.6, the fixed and pre-allocated channelisation code for the beacon channel is included into the number of indicated channelisation codes.

B.1 Mapping scheme for Burst Type 1 and $K_{\text{Cell}}=16$ Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | m7 | M8 | m9 | m10 | m11 | m12 | m13 | m14 | m15 | m16 | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 9 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 10 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 11 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 12 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 13 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 14 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 15 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 16 codes |

B.2 Mapping scheme for Burst Type 1 and $K_{\text{Cell}}=8$

Midambles

| M1 | m2 | m3 | m4 | m5 | m6 | m7 | m8 | |
|----|----|----|----|----|----|----|----|---------------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code or 9 codes |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes or 10 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 3 codes or 11 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 4 codes or 12 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 5 codes or 13 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 6 codes or 14 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 7 codes or 15 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 8 codes or 16 codes |

B.3 Mapping scheme for Burst Type 1 and $K_{Cell}=4$ Midambles

| m1 | m3 | m5 | m7 | |
|----|----|----|----|--------------------------|
| 1 | 0 | 0 | 0 | 1 or 5 or 9 or 13 codes |
| 0 | 1 | 0 | 0 | 2 or 6 or 10 or 14 codes |
| 0 | 0 | 1 | 0 | 3 or 7 or 11 or 15 codes |
| 0 | 0 | 0 | 1 | 4 or 8 or 12 or 16 codes |

B.4 Mapping scheme for beacon timeslots and $K_{Cell}=16$ Midambles

| m1 | m2 | m3 | M4 | m5 | m6 | m7 | M8 | m9 | m10 | m11 | M12 | m13 | m14 | m15 | m16 | |
|----|------------------|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|--|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code (see note 1) |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD applied to beacon in this time slot, see note 2) |
| 1 | x ^(*) | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 13 codes |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD not applied to beacon in this time slot) or 14 codes |
| 1 | x ^(*) | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 codes or 15 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 codes or 16 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 7 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 8 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 9 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 10 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 11 codes |
| 1 | x ^(*) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 12 codes |

^(*) For the case of SCTD applied to beacon, midamble shift 2 is used by the diversity antenna.

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble(s) shall be used.

Note 2: If SCTD is applied to the beacon and only two codes are present in a beacon time slot, the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midambles shall be used.

B.5 Mapping scheme for beacon timeslots and $K_{Cell}=8$ Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | m7 | M8 | |
|----|-----------|----|----|----|----|----|----|---|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code (see note 1) |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD applied to beacon in this time slot, see note 2) |
| 1 | $x^{(*)}$ | 1 | 0 | 0 | 0 | 0 | 0 | 7 or 13 codes |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 2 (SCTD not applied to beacon in this time slot) or 8 or 14 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 1 | 0 | 0 | 0 | 3 or 9 or 15 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 1 | 0 | 0 | 4 or 10 or 16 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 0 | 1 | 0 | 5 codes or 11 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 0 | 0 | 1 | 6 codes or 12 codes |

(*) For the case of SCTD applied to beacon, midamble shift 2 is used by the diversity antenna.

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble(s) shall be used.

Note 2: If SCTD is applied to beacon and only two codes are present in a beacon time slot, the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midambles shall be used.

B.6 Mapping scheme for beacon timeslots and $K_{Cell}=4$ Midambles

| m1 | m3 | m5 | m7 | |
|----|----|----|----|--------------------------------|
| 1 | 0 | 0 | 0 | 1code (see note 1) |
| 1 | 1 | 0 | 0 | 4 or 7 or 10 or 13 or 16 codes |
| 1 | 0 | 1 | 0 | 2 or 5 or 8 or 11 or 14 codes |
| 1 | 0 | 0 | 1 | 3 or 6 or 9 or 12 or 15 codes |

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble shall be used.

B.7 Mapping scheme for Burst Type 2 and $K_{Cell}=6$ Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | |
|----|----|----|----|----|----|---------------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 1 or 7 or 13 codes |
| 0 | 1 | 0 | 0 | 0 | 0 | 2 or 8 or 14 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 3 or 9 or 15 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 4 or 10 or 16 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 5 or 11 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 6 or 12 codes |

B.8 Mapping scheme for Burst Type 2 and $K_{\text{Cell}}=3$ Midambles

| m1 | m2 | m3 | |
|----|----|----|-------------------------------------|
| 1 | 0 | 0 | 1 or 4 or 7 or 10 or 13 or 16 codes |
| 0 | 1 | 0 | 2 or 5 or 8 or 11 or 14 codes |
| 0 | 0 | 1 | 3 or 6 or 9 or 12 or 15 codes |

Annex BA (normative): Signalling of the number of channelisation codes for the DL common midamble case for 1.28Mcps TDD

The following mapping schemes shall apply for the association between the number of channelisation codes employed in a timeslot and the use of a particular midamble shift in the DL common midamble case. In the following tables the presence of a particular midamble shift is indicated by "1". Midamble shifts marked with "0" are left unused.

BA.1 Mapping scheme for K=16 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | M7 | M8 | m9 | m10 | m11 | m12 | M13 | m14 | m15 | m16 | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 9 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 10 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 11 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 12 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 13 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 14 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 15 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 16 codes |

BA.2 Mapping scheme for K=14 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | M7 | M8 | m9 | m10 | m11 | m12 | M13 | m14 | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 15 code(s) |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 16 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 8 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 9 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 10 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 11 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 12 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 13 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 14 codes |

BA.3 Mapping scheme for K=12 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | M7 | M8 | m9 | m10 | m11 | m12 | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 13 code(s) |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 14 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 or 15 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 or 16 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 6 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 7 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 8 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 9 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 10 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 11 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 12 codes |

BA.4 Mapping scheme for K=10 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | M7 | M8 | m9 | m10 | |
|----|----|----|----|----|----|----|----|----|-----|-----------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 11 code(s) |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 12 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 or 13codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 4 or 14 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 5 or 15 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 6 or 16 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 7 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 8 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 9 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 10 codes |

BA.5 Mapping scheme for K=8 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | m7 | m8 | |
|----|----|----|----|----|----|----|----|----------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 9 code(s) |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 10 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 3 or 11 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 4 or 12 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 5 or 13 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 6 or 14 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 7 or 15 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 8 or 16 codes |

BA.6 Mapping scheme for K=6 Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | |
|----|----|----|----|----|----|----------------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 1 or 7 or 13 code(s) |
| 0 | 1 | 0 | 0 | 0 | 0 | 2 or 8 or 14 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 3 or 9 or 15 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 4 or 10 or 16 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 5 or 11 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 6 or 12 codes |

BA.7 Mapping scheme for K=4 Midambles

| m1 | m2 | m3 | m4 | |
|----|----|----|----|---------------------------|
| 1 | 0 | 0 | 0 | 1 or 5 or 9 or 13 code(s) |
| 0 | 1 | 0 | 0 | 2 or 6 or 10 or 14 codes |
| 0 | 0 | 1 | 0 | 3 or 7 or 11 or 15 codes |
| 0 | 0 | 0 | 1 | 4 or 8 or 12 or 16 codes |

BA.8 Mapping scheme for K=2 Midambles

| m1 | m2 | |
|----|----|---|
| 1 | 0 | 1 or 3 or 5 or 7 or 9 or 11 or 13 or 15 code(s) |
| 0 | 1 | 2 or 4 or 6 or 8 or 10 or 12 or 14 or 16 codes |

Annex BB (normative): Signalling of the number of channelisation codes for the DL common midamble case for 7.68Mcps TDD

The following mapping schemes shall apply for the association between the number of channelisation codes employed in a timeslot and the use of a particular midamble shift in the DL common midamble case. In the following tables the presence of a particular midamble shift is indicated by "1". Midamble shifts marked with "0" are left unused. Mapping schemes in section BB.4, BB.5 and BB.6 are not applicable to beacon timeslots where a P-CCPCH is present, because the default midamble allocation scheme is applied to these timeslots. Note that in the mapping schemes of sections BB.4, BB.5 and BB.6, the fixed and pre-allocated channelisation code for the beacon channel is included into the number of indicated channelisation codes.

BB.1 Mapping scheme for $K_{\text{Cell}}=16$ Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | m7 | M8 | m9 | m10 | m11 | m12 | m13 | m14 | m15 | m16 | |
|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|----------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 17 code |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 18 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 or 19 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 or 20 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 or 21 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 or 22 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 or 23 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8 or 24 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 9 or 25 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 10 or 26 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 11 or 27 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 12 or 28 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 13 or 29 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 14 or 30 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 15 or 31 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 16 or 32 codes |

BB.2 Mapping scheme for $K_{\text{Cell}}=8$ Midambles

| M1 | m2 | m3 | m4 | m5 | m6 | m7 | m8 | |
|----|----|----|----|----|----|----|----|---------------------------|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 or 9 or 17 or 25 codes |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 or 10 or 18 or 26 codes |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 3 or 11 or 19 or 27 codes |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 4 or 12 or 20 or 28 codes |
| 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 5 or 13 or 21 or 29 codes |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 6 or 14 or 22 or 30 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 7 or 15 or 23 or 31 codes |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 8 or 16 or 24 or 32 codes |

BB.3 Mapping scheme for $K_{Cell}=4$ Midambles

| m1 | m3 | m5 | m7 | |
|----|----|----|----|--|
| 1 | 0 | 0 | 0 | 1 or 5 or 9 or 13 or 17 or 21 or 25 or 29 codes |
| 0 | 1 | 0 | 0 | 2 or 6 or 10 or 14 or 18 or 22 or 26 or 30 codes |
| 0 | 0 | 1 | 0 | 3 or 7 or 11 or 15 or 19 or 23 or 27 or 31 codes |
| 0 | 0 | 0 | 1 | 4 or 8 or 12 or 16 or 20 or 24 or 28 or 32 codes |

BB.4 Mapping scheme for beacon timeslots and $K_{Cell}=16$ Midambles

| m1 | m2 | m3 | M4 | m5 | m6 | m7 | M8 | m9 | m10 | m11 | M12 | m13 | m14 | m15 | m16 | |
|----|-----------|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|--|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code (see note 1) |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD applied to beacon in this time slot, see note 2) |
| 1 | $x^{(1)}$ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 13 or 25 codes |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD not applied to beacon in this time slot) or 14 or 26 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 or 15 or 27 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 or 16 or 28 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 or 17 or 29 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 or 18 or 30 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 7 or 19 or 31 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 8 or 20 or 32 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 9 or 21 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 10 or 22 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 11 or 23 codes |
| 1 | $x^{(1)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 12 or 24 codes |

⁽⁸⁾ For the case of SCTD applied to beacon, midamble shift 2 is used by the diversity antenna.

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble(s) shall be used.

Note 2: If SCTD is applied to the beacon and only two codes are present in a beacon time slot, the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midambles shall be used.

BB.5 Mapping scheme for beacon timeslots and $K_{\text{Cell}}=8$ Midambles

| m1 | m2 | m3 | m4 | m5 | m6 | m7 | M8 | |
|----|-----------|----|----|----|----|----|----|---|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 code (see note 1) |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 codes (SCTD applied to beacon in this time slot, see note 2) |
| 1 | $x^{(*)}$ | 1 | 0 | 0 | 0 | 0 | 0 | 7 or 13 or 19 or 25 or 31 codes |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 2 (SCTD not applied to beacon in this time slot) or 8 or 14 or 20 or 26 or 32 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 1 | 0 | 0 | 0 | 3 or 9 or 15 or 21 or 27 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 1 | 0 | 0 | 4 or 10 or 16 or 22 or 28 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 0 | 1 | 0 | 5 or 11 or 17 or 23 or 29 codes |
| 1 | $x^{(*)}$ | 0 | 0 | 0 | 0 | 0 | 1 | 6 or 12 or 18 or 24 or 30 codes |

(*) For the case of SCTD applied to beacon, midamble shift 2 is used by the diversity antenna.

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble(s) shall be used.

Note 2: If SCTD is applied to beacon and only two codes are present in a beacon time slot, the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midambles shall be used.

BB.6 Mapping scheme for beacon timeslots and $K_{\text{Cell}}=4$ Midambles

| m1 | m3 | m5 | m7 | |
|----|----|----|----|---|
| 1 | 0 | 0 | 0 | 1code (see note 1) |
| 1 | 1 | 0 | 0 | 4 or 7 or 10 or 13 or 16 or 19 or 22 or 25 or 28 or 31 codes |
| 1 | 0 | 1 | 0 | 2 or 5 or 8 or 11 or 14 or 17 or 20 or 23 or 26 or 29 or 32 codes |
| 1 | 0 | 0 | 1 | 3 or 6 or 9 or 12 or 15 or 18 or 21 or 24 or 27 or 30 codes |

Note 1: If only one code is present in a beacon time slot, this code is a beacon channel and the beacon channel is the only channel in this slot, by default. Therefore, only the beacon midamble shall be used.

Annex C (informative): CCPCH Multiframe Structure for the 3.84 Mcps option

In the following figures C.1 to C.3 some examples for Multiframe Structures on Primary and Secondary CCPCH are given. The figures show the placement of Common Transport Channels on the Common Control Physical Channels. Additional S-CCPCH capacity can be allocated on other codes and timeslots of course, e.g. FACH capacity is related to overall cell capacity and can be configured according to the actual needs. Channel capacities in the annex are derived using bursts with long midambles (Burst format 1). Every TrCH-box in the figures is assumed to be valid for two frames (see row "Frame #"), i.e. the transport channels in CCPCHs have an interleaving time of 20msec.

The actual CCPCH Multiframe Scheme used in the cell is described and broadcast on BCH. Thus the system information structure has its roots in this particular transport channel and allocations of other Common Channels can be handled this way, i.e. by pointing from BCH.

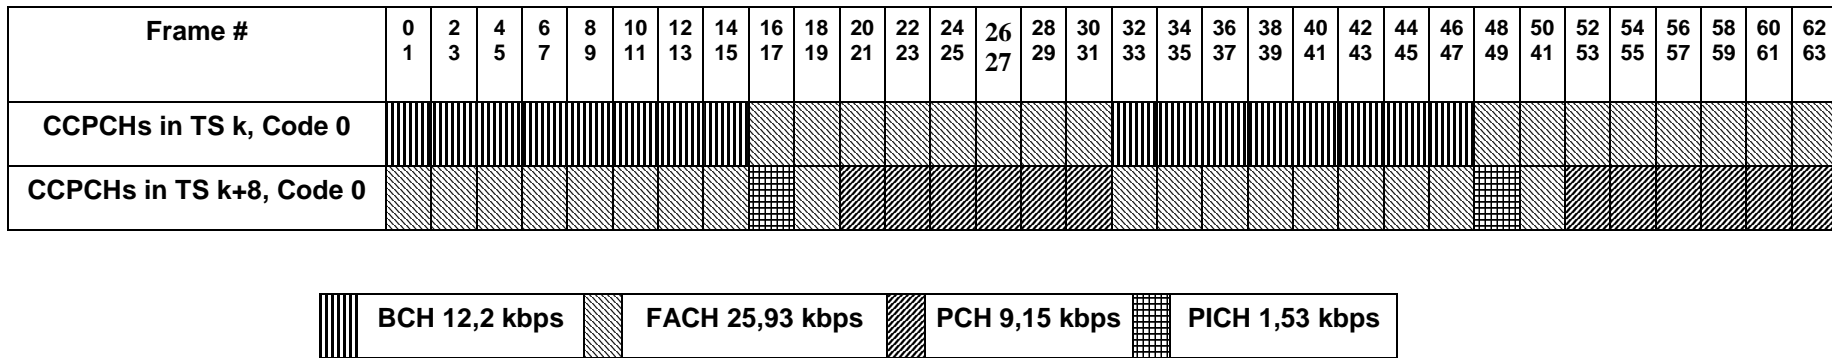


Figure C.1: Example for a multiframe structure for CCPCHs and PICH that is repeated every 64th frame

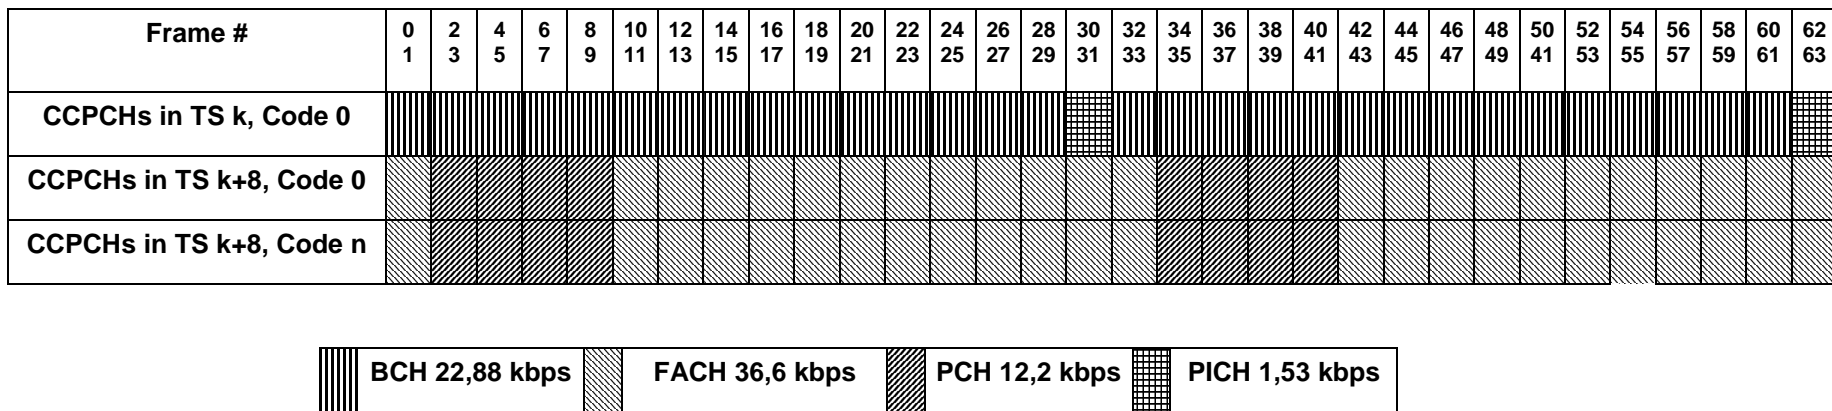


Figure C.2: Example for a multiframe structure for CCPCHs and PICH that is repeated every 64th frame, n=1...7

Annex CA (informative): CCPCH Multiframe Structure for the 1.28 Mcps option

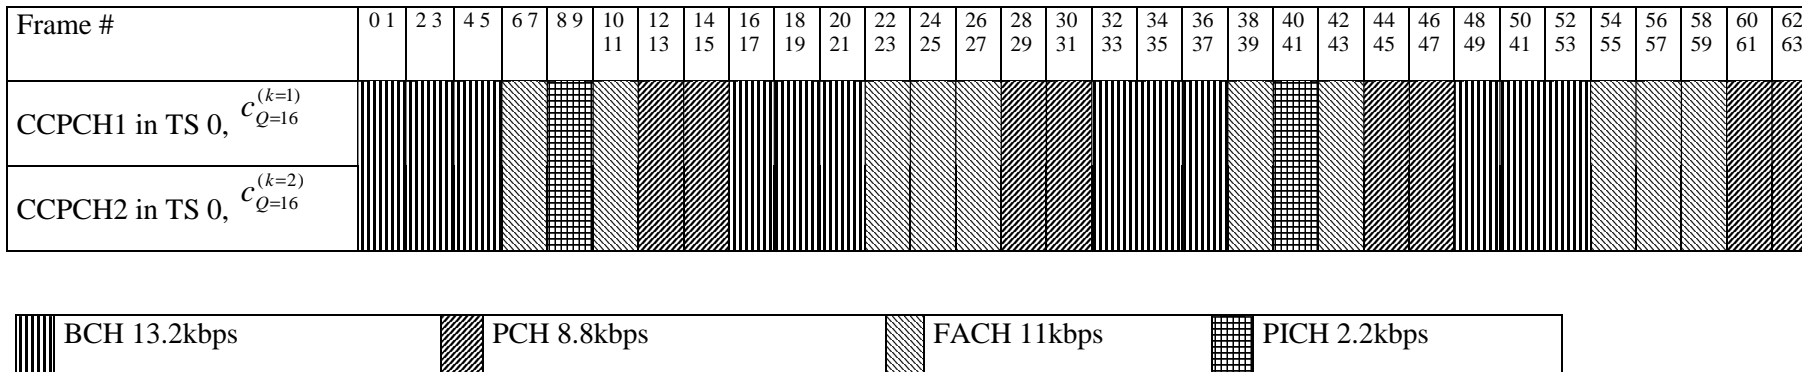


Figure CA.1: Example for a multiframe structure for CCPCHs and PICH that is repeated every 64th frame (128 sub-frame)

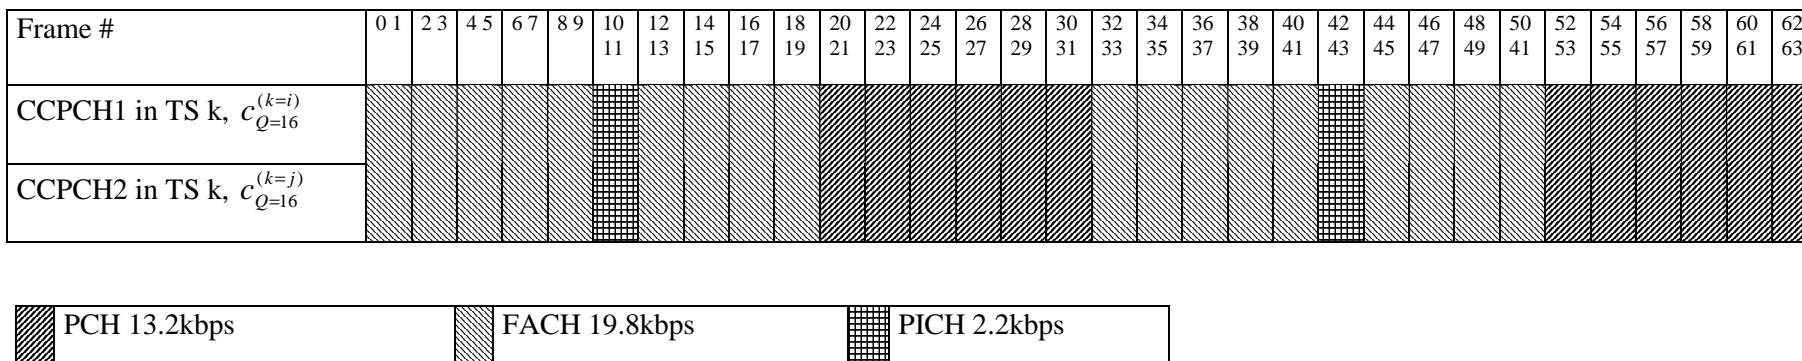


Figure CA.2: Example for a multiframe structure for S-CCPCHs and PICH that is repeated every 64th frame, $i,j=1...16 (i \neq j), k=0, 1, (128 \text{ sub-frame})$

Annex CB (informative): Examples of the association of UL TPC commands to UL uplink time slots and CCTrCH pairs for 1.28 Mcps TDD

In the following two examples of the association of UL TPC commands to UL time slots and CCTrCHs are shown (see 5A.2.2.2):

Table CB.1 Two examples of the association of UL TPC commands to UL uplink time slots and CCTrCH pairs with NULslot=3

Case 1: $N_{UL_TPCsymbols}=2$; Case 2: $N_{UL_TPCsymbols}=4$

| Sub-Frame Number | Case 1 (2 UL TPC symbols) | | The order of the served UL time slot and CCTrCH pairs (UL time slot and CCTrCH number) | Case 2 (4 UL TPC symbols) | |
|------------------|--|-----|--|------------------------------|--|
| | The order of UL TPC symbols | | | The order of UL TPC symbols | |
| SFN''=0 | (1 st UL _{pos} =0) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =0) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 1 (TS4) | 3 | |
| SFN''=1 | (1 st UL _{pos} =2) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =2) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 0 (TS3) | 3 | |
| SFN''=2 | (1 st UL _{pos} =2) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =1) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 0 (TS3) | 3 | |
| ... | ... | ... | ... | ... | ... |

Annex CC (informative): Examples of the association of UL SS commands to UL uplink time slots

In the following two examples of the association of UL SS commands to UL uplink time slots are shown (see 5A.2.2.3):

**Table CC.1 Two examples of the association of UL SS commands to UL uplink time slots with
 $N_{ULslot}=3$**

Case 1: $N_{SSsymbols}=2$; Case 2: $N_{SSsymbols}=4$

| Sub-Frame Number | Case 1 (2 UL SS symbols) | | The order of the served UL time slot (UL time slot number) | Case 2 (4 UL SS symbols) | |
|---------------------|---|-----|--|-----------------------------|---|
| | The order of UL SS symbols | | | The order of UL SS symbols | |
| SFN ⁿ =0 | (1 st UL _{pos} =0) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =0) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 1 (TS4) | 3 | |
| SFN ⁿ =1 | (1 st UL _{pos} =2) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =2) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 0 (TS3) | 3 | |
| SFN ⁿ =2 | (1 st UL _{pos} =2) | 0 | 0 (TS3) | 0 | (1 st UL _{pos} =1) |
| | | 1 | 1 (TS4) | 1 | |
| | | | 2 (TS5) | 2 | |
| | | | 0 (TS3) | 3 | |
| | | | 1 (TS4) | | |
| | 2 (TS5) | | | | |
| ... | ... | ... | ... | ... | ... |

Annex D (informative): Change history

| Change history | | | | | | | |
|----------------|--------|-----------|-----|-----|--|-------|-------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 14/01/00 | RAN_05 | RP-99591 | - | | Approved at TSG RAN #5 and placed under Change Control | - | 3.0.0 |
| 14/01/00 | RAN_06 | RP-99691 | 001 | 02 | Primary and Secondary CCPCH in TDD | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99691 | 002 | 02 | Removal of Superframe for TDD | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99691 | 006 | - | Corrections to TS25.221 | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99691 | 007 | 1 | Clarifications for Spreading in UTRA TDD | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99691 | 008 | - | Transmission of TFCI bits for TDD | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99691 | 009 | - | Midamble Allocation in UTRA TDD | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99690 | 010 | - | Introduction of the timeslot formats to the TDD specifications | 3.0.0 | 3.1.0 |
| 14/01/00 | - | - | - | - | Change history was added by the editor | 3.1.0 | 3.1.1 |
| 31/03/00 | RAN_07 | RP-000067 | 003 | 2 | Cycling of cell parameters | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 011 | - | Correction of Midamble Definition for TDD | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 012 | - | Introduction of the timeslot formats for RACH to the TDD specifications | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 013 | - | Paging Indicator Channel reference power | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 014 | 1 | Removal of Synchronisation Case 3 in TDD | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 015 | 1 | Signal Point Constellation | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 016 | - | Association between Midambles and Channelisation Codes | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000067 | 017 | - | Removal of ODMA from the TDD specifications | 3.1.1 | 3.2.0 |
| 26/06/00 | RAN_08 | RP-000271 | 018 | 1 | Removal of the reference to ODMA | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000271 | 019 | - | Editorial changes in transport channels section | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000271 | 020 | 1 | TPC transmission for TDD | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000271 | 021 | - | Editorial modification of 25.221 | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000271 | 023 | - | Clarifications on TxDiversity for UTRA TDD | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000271 | 024 | - | Clarifications on PCH and PICH in UTRA TDD | 3.2.0 | 3.3.0 |
| 23/0900 | RAN_09 | RP-000344 | 022 | 1 | Correction to midamble generation in UTRA TDD | 3.3.0 | 3.4.0 |
| 23/0900 | RAN_09 | RP-000344 | 026 | 2 | Some corrections for TS25.221 | 3.3.0 | 3.4.0 |
| 23/0900 | RAN_09 | RP-000344 | 028 | - | Terminology regarding the beacon function | 3.3.0 | 3.4.0 |
| 23/0900 | RAN_09 | RP-000344 | 030 | 1 | TDD Access Bursts for HOV | 3.3.0 | 3.4.0 |
| 23/0900 | RAN_09 | RP-000344 | 031 | 1 | Number of codes signalling for the DL common midamble case | 3.3.0 | 3.4.0 |
| 15/12/00 | RAN_10 | RP-000542 | 034 | - | Correction on TFCI & TPC Transmission | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000542 | 035 | 1 | Clarifications on Midamble Associations | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000542 | 036 | - | Clarification on PICH power setting | 3.4.0 | 3.5.0 |
| 16/03/01 | RAN_11 | - | - | - | Approved as Release 4 specification (v4.0.0) at TSG RAN #11 | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 033 | 2 | Correction to SCH section | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 037 | 1 | Bit Scrambling for TDD | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 039 | 1 | Corrections of PUSCH and PDSCH | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 040 | - | Alteration of SCH offsets to avoid overlapping Midamble | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 041 | - | Clarifications & Corrections for TS25.221 | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 045 | 1 | Corrections on the PRACH and clarifications on the midamble generation and the behaviour in case of an invalid TFI combination on the DCHs | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 046 | - | Clarification of TFCI transmission | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010062 | 048 | - | Corrections to Table 5.b 'Timeslot formats for the Uplink' | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010073 | 042 | 2 | Introduction of the Physical Node B Synchronization Channel | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010071 | 043 | 1 | Inclusion of 1.28Mcps TDD in TS 25.221 | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010072 | 044 | - | Correction of beacon characteristics due to IPDLs | 3.5.0 | 4.0.0 |
| 15/06/01 | RAN_12 | RP-010336 | 051 | - | Clarification of Midamble Usage in TS25.221 | 4.0.0 | 4.1.0 |
| 15/06/01 | RAN_12 | RP-010336 | 053 | - | Addition to the abbreviation list, correction of references to tables and figures | 4.0.0 | 4.1.0 |
| 15/06/01 | RAN_12 | RP-010342 | 049 | - | Correction of spelling in definition of beacon characteristics | 4.0.0 | 4.1.0 |
| 15/06/01 | RAN_12 | RP-010342 | 055 | - | Correction of Note for PDSCH signalling methods | 4.0.0 | 4.1.0 |
| 21/09/01 | RAN_13 | RP-010522 | 057 | - | TFCI Terminology | 4.1.0 | 4.2.0 |
| 21/09/01 | RAN_13 | RP-010522 | 063 | - | Clarification of notations in TS25.221 and TS25.223 | 4.1.0 | 4.2.0 |
| 21/09/01 | RAN_13 | RP-010522 | 062 | - | Addition and correction of the reference | 4.1.0 | 4.2.0 |
| 21/09/01 | RAN_13 | RP-010528 | 058 | 1 | Corrections for TS 25.221 | 4.1.0 | 4.2.0 |
| 14/12/01 | RAN_14 | RP-010741 | 065 | 1 | Transmit Diversity for P-CCPCH and PICH | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010741 | 067 | - | Clarification of midamble transmit power in TS25.221 | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010746 | 059 | - | Bit Scrambling for 1.28 Mcps TDD | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010746 | 068 | - | Transmit Diversity for P-CCPCH and PICH | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010746 | 069 | - | Corrections of reference numbers in TS 25.221 | 4.2.0 | 4.3.0 |
| 08/03/02 | RAN_15 | RP-020049 | 071 | 2 | Clarification of spreading for UL physical channels | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | RP-020049 | 073 | 1 | Common midamble allocation for beacon time slot | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | RP-020049 | 075 | 3 | Correction to a transmission of paging indicators bits | 4.3.0 | 4.4.0 |

| Change history | | | | | | | |
|----------------|--------|-----------|------|-----|--|-------|-------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 08/03/02 | RAN_15 | RP-020058 | 076 | 1 | CR to include HSDPA in TS25.221 | 4.3.0 | 5.0.0 |
| 07/06/02 | RAN_16 | RP-020434 | 080 | 2 | Clarification of shared channel functionality for TDD | 5.0.0 | 5.1.0 |
| 07/06/02 | RAN_16 | RP-020313 | 082 | - | Clarification of shared channel functionality for TDD | 5.0.0 | 5.1.0 |
| 07/06/02 | RAN_16 | RP-020317 | 081 | - | TxDiversity for HSDPA in TDD | 5.0.0 | 5.1.0 |
| 19/09/02 | RAN_17 | RP-020559 | 092 | 1 | Corrections to channelisation code mapping for 1.28 Mcps TDD | 5.1.0 | 5.2.0 |
| 19/09/02 | RAN_17 | RP-020576 | 094 | - | Correction to S-CCPCH description for 1.28 Mcps TDD | 5.1.0 | 5.2.0 |
| 19/09/02 | RAN_17 | RP-020579 | 104 | 2 | Corrections to transmit diversity mode for TDD beacon-function physical channels | 5.1.0 | 5.2.0 |
| 19/09/02 | RAN_17 | RP-020569 | 090 | 1 | Corrections to channelisation code mappings for 3.84 Mcps TDD | 5.1.0 | 5.2.0 |
| 19/09/02 | RAN_17 | RP-020572 | 097 | 2 | Corrections to transmit diversity mode for TDD beacon-function physical channels | 5.1.0 | 5.2.0 |
| 21/12/02 | RAN_18 | RP-020848 | 105 | - | Correction of the number of transport channels in clause 4.1 | 5.2.0 | 5.3.0 |
| 21/12/02 | RAN_18 | RP-020852 | 107 | - | Editorial modification to the section numberings | 5.2.0 | 5.3.0 |
| 26/03/03 | RAN_19 | RP-030138 | 109 | 3 | Clarification of number of midamble shifts in different time slots | 5.3.0 | 5.4.0 |
| 26/03/03 | RAN_19 | RP-030138 | 110 | 1 | Correction to applicable HS-SICH burst types and timeslot formats | 5.3.0 | 5.4.0 |
| 26/03/03 | RAN_19 | RP-030138 | 111 | - | Correction to HS-SCCH minimum timing requirement for UTRA TDD (3.84 Mcps Option) | 5.3.0 | 5.4.0 |
| 26/03/03 | RAN_19 | RP-030138 | 112 | 3 | Miscellaneous Corrections | 5.3.0 | 5.4.0 |
| 26/03/03 | RAN_19 | RP-030138 | 113 | - | HSDPA timing requirements | 5.3.0 | 5.4.0 |
| 24/06/03 | RAN_20 | RP-030275 | 114 | 1 | Corrections to field coding of TPC for support of HS-SICH (3.84Mcps TDD) | 5.4.0 | 5.5.0 |
| 13/01/04 | RAN_22 | - | - | - | Created for M.1457 update | 5.5.0 | 6.0.0 |
| 09/06/04 | RAN_24 | RP-040235 | 116 | 2 | Addition of TSTD for S-CCPCH in 3.84Mcps TDD | 6.0.0 | 6.1.0 |
| 13/12/04 | RAN_26 | RP-040451 | 117 | - | Introduction of MICH | 6.1.0 | 6.2.0 |
| 14/03/05 | RAN_27 | RP-050089 | 118 | - | Release 6 HS-DSCH operation without a DL DPCH for 3.84Mcps TDD | 6.2.0 | 6.3.0 |
| 16/06/05 | RAN_28 | RP-050240 | 124 | 1 | Correction to transmission of SS for 1.28Mcps TDD | 6.3.0 | 6.4.0 |
| 16/06/05 | RAN_28 | RP-050255 | 127 | 1 | Correction to the examples of the association of UL SS commands to UL uplink time slots | 6.3.0 | 6.4.0 |
| 16/06/05 | RAN_28 | RP-050239 | 130 | 1 | Correction to transmission of TPC for 1.28Mcps TDD | 6.3.0 | 6.4.0 |
| 16/06/05 | RAN_28 | RP-050255 | 133 | 1 | Correction to the examples of the association of UL TPC commands to UL uplink time slot and CCTrCH pairs | 6.3.0 | 6.4.0 |
| 29/06/05 | - | - | - | - | Editorial revision to the incorrect implementation of CR127r1 and CR133r1 | 6.4.0 | 6.4.1 |
| 26/09/05 | RAN_29 | RP-050448 | 0134 | - | Change of burst type to burst format | 6.4.1 | 6.5.0 |
| 20/03/06 | RAN_31 | RP-060078 | 0135 | - | Introduction of the Physical Layer Common Control Channel (PLCCH) | 6.5.0 | 7.0.0 |
| 20/03/06 | RAN_31 | RP-060079 | 0136 | - | Introduction of 7.68Mcps TDD option | 6.5.0 | 7.0.0 |
| 29/09/06 | RAN_33 | RP-060492 | 0138 | - | Introduction of E-DCH for 3.84Mcps and 7.68Mcps TDD | 7.0.0 | 7.1.0 |
| 09/03/07 | RAN_35 | RP-070118 | 0139 | 2 | Introduction of E-DCH for 1.28Mcps TDD | 7.1.0 | 7.2.0 |

History

| Document history | | |
|-------------------------|----------------|-------------|
| V7.0.0 | March 2006 | Publication |
| V7.1.0 | September 2006 | Publication |
| V7.2.0 | March 2007 | Publication |
| | | |
| | | |