# ETSI TS 126 450 V14.0.0 (2017-04)



Universal Mobile Telecommunications System (UMTS); LTE;

Codec for Enhanced Voice Services (EVS); Discontinuous Transmission (DTX) (3GPP TS 26.450 version 14.0.0 Release 14)





Reference
RTS/TSGS-0426450ve00

Keywords
LTE.UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <a href="https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx">https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx</a>

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

#### Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.
All rights reserved.

**DECT**<sup>™</sup>, **PLUGTESTS**<sup>™</sup>, **UMTS**<sup>™</sup> and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**<sup>™</sup> and **LTE**<sup>™</sup> are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

### Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

# Contents

Intel	lectual Property Rights	2
	word	
Mod	al verbs terminology	2
Fore	word	4
1	Scope	5
2	References	
3	Abbreviations	5
4 4.1 4.2	General  Background  General organization	6
5 5.1 5.2	EVS Codec DTX Operation  Transmit (TX) side	7
Ann	ex A (informative): Change history	
Hieta	•	C

#### **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

#### where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

#### 1 Scope

This document specifies the system level aspects of the Discontinuous Transmission (DTX) function of the EVS codec.

#### 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- 3GPP TR 21.905: "Vocabulary for 3GPP Specifications". [1] 3GPP TS 26.445: "Codec for Enhanced Voice Services (EVS); Detailed Algorithmic Description [2] 3GPP TS 26.442: "Codec for Enhanced Voice Services (EVS); ANSI C code (fixed-point)". [3] 3GPP TS 26.443: "Codec for Enhanced Voice Services (EVS): ANSI C code (floating-point)". [4] 3GPP TS 26.444: " Codec for Enhanced Voice Services (EVS); Test Sequences". [5] [6] 3GPP TS 26.446: " Codec for Enhanced Voice Services (EVS); AMR-WB Backward Compatible Functions". [7] 3GPP TS 26.447: "Codec for Enhanced Voice Services (EVS); Error Concealment of Lost Packets". 3GPP TS 26.448: "Codec for Enhanced Voice Services (EVS); Jitter Buffer Management". [8] [9] 3GPP TS 26.449: "Codec for Enhanced Voice Services (EVS); Comfort Noise Generation (CNG) Aspects". 3GPP TS 26.441: "Codec for Enhanced Voice Services (EVS); General Overview". [10] 3GPP TS 26.451: "Codec for Enhanced Voice Services (EVS); Voice Activity Detection (VAD)". [11] 3GPP TS 26.114: "Multimedia Telephony; Media handling and interaction". [12] 3GPP TS 26.131: "Terminal acoustic characteristics for telephony; Requirements ". [13] [14] 3GPP TR 26.952: "Codec for Enhanced Voice Services (EVS); Performance Characterization".

#### 3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

ACELP	Algebraic Code-Excited Linear Prediction
AMR-WB	Adaptive Multi Rate Wideband (codec)
CNG	Comfort Noise Generator

DTX Discontinuous Transmission EVS Enhanced Voice Services

FB Fullband

FEC Frame Erasure Concealment

IP Internet Protocol

JBM Jitter Buffer Management MSB Most Significant Bit

MTSI Multimedia Telephony Service for IMS

NB Narrowband PS Packet Switched

PSTN Public Switched Telephone Network

SAD Signal Activity Detection

SC-VBR Source Controlled - Variable Bit Rate

SID Silence Insertion Descriptor

SWB Super Wideband

VAD Voice Activity Detection

WB Wideband

WMOPS Weighted Millions of Operations Per Second

#### 4 General

#### 4.1 Background

The present document specifies the system level aspects of the Discontinuous Transmission (DTX) function of the EVS codec. Specific codec functions that implement the DTX functionality are described in TS 26.445 [2].

Discontinuous transmission (DTX) is a mechanism for the EVS Codec to encode the input signal at a lower average rate by taking speech inactivity into account. The DTX scheme is useful for the following purposes:

- to conserve UE power,
- to improve network capacity.

DTX in the transmitting path (uplink) shall be in operation in UEs if commanded so by the network. The UE shall handle DTX in the receiving path (downlink) at any time, regardless of whether DTX in the transmitting path is commanded or not.

#### 4.2 General organization

The default DTX mechanism described in the present document requires the following functions:

- a Signal Activity Detector (SAD) on the transmit (TX) side;
- evaluation of the background acoustic noise on the transmit (TX) side in order to transmit characteristic parameters to the receive (RX) side;
- generation, on the receive (RX) side, of a similar noise called comfort noise during periods where the transmission is switched off.

The Signal Activity Detector (SAD) is defined in TS 26.451 [11] and the comfort noise functions in TS 26.449 [9]. Both are based partly on the EVS Codec and its internal variables defined in TS 26.445 [2].

In addition to these functions, if the parameters arriving at the RX side are detected to be seriously corrupted by errors, the speech or comfort noise shall be generated from substituted data in order to avoid seriously annoying effects for the listener. These functions are defined in TS 26.447 [7].

An overall description of the speech processing parts can be found in TS 26.441 [10]. An overview of the DTX operation is shown in Figure 1.

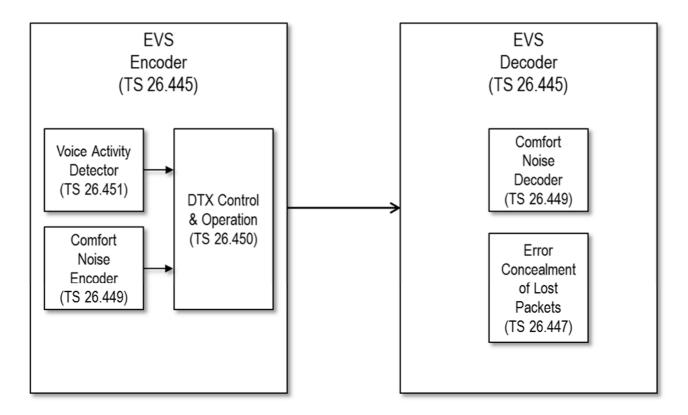


Figure 1: Block diagram of DTX Operation

## 5 EVS Codec DTX Operation

#### 5.1 Transmit (TX) side

There are two algorithms for extending the DTX hangover period. One is a general hangover algorithm and other is specific to music. Both are defined in clause 5.1.12.5 of TS 26.445 [2].

The main specification of the DTX/CNG algorithms is contained in clause 5.6 of TS 26.445 [2].

The bit allocation of SID frames generated for DTX operation is defined in clause 7.2 of TS 26.445 [2].

## 5.2 Receive (RX) side

Operation of the EVS decoder, including decoding of SID frames generated during DTX operation is described in clause 6.7 of TS 26.445 [2].

# Annex A (informative): Change history

Change history								
Date	TSG#	TSG Doc.	CR	Rev	Subject/Comment	Old	New	
2014-09	65	SP-140465			Presented at TSG#65 for approval		1.0.0	
2014-09	65				Approved at TSG SA#65	1.0.0	12.0.0	
2015-12	70				Version for Release 13	12.0.0	13.0.0	

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New
							version
2017-03	75					Version for Release 14	14.0.0

# History

Document history					
V14.0.0 April 2017 Publication					