

# ETSI TS 132 632 V4.0.0 (2001-06)

---

*Technical Specification*

**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
Telecommunication Management;  
Configuration Management;  
Core Network Resources IRP: NRM  
(3GPP TS 32.632 version 4.0.0 Release 4)**

---



---

**Reference**

DTS/TSGS-0532632Uv4

---

**Keywords**

GSM, UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.

All rights reserved.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by the ETSI 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under [www.etsi.org/key](http://www.etsi.org/key).

# Contents

|   |           |
|---|-----------|
| Foreword .....  | 4         |
| Introduction .....                                      | 4         |
| 1 Scope .....   | 6         |
| 2 References .....                                      | 6         |
| 3 Definitions and abbreviations .....                   | 7         |
| 3.1 Definitions .....                                   | 7         |
| 3.2 Abbreviations .....                                 | 8         |
| 4 System overview .....                                 | 9         |
| 4.1 System context .....                                | 9         |
| 4.2 Compliance rules .....                              | 10        |
| 5 Modelling approach .....                              | 10        |
| 6 IRP Information Model .....                           | 11        |
| 6.1 Introduction .....                                  | 11        |
| 6.2 Managed Object Class (MOC) diagrams .....           | 11        |
| 6.2.1 Inheritance hierarchy .....                       | 11        |
| 6.2.2 Containment/Naming and Association diagrams ..... | 13        |
| 6.3 Managed Object Class (MOC) definitions .....        | 15        |
| 6.3.1 MOC MscFunction .....                             | 15        |
| 6.3.2 MOC HlrFunction .....                             | 16        |
| 6.3.3 MOC VlrFunction .....                             | 16        |
| 6.3.4 MOC AucFunction .....                             | 17        |
| 6.3.5 MOC EirFunction .....                             | 17        |
| 6.3.6 MOC SmsIwmscFunction .....                        | 18        |
| 6.3.7 MOC SmsGmscFunction .....                         | 18        |
| 6.3.8 MOC GmscFunction .....                            | 19        |
| 6.3.9 MOC SgsnFunction .....                            | 19        |
| 6.3.10 MOC GgsnFunction .....                           | 20        |
| 6.3.11 MOC BgFunction .....                             | 20        |
| 6.3.12 MOC SmlcFunction .....                           | 21        |
| 6.3.13 MOC GmlcFunction .....                           | 21        |
| 6.3.14 MOC ScfFunction .....                            | 22        |
| 6.3.15 MOC SrfFunction .....                            | 22        |
| 6.3.16 MOC CbcFunction .....                            | 23        |
| 6.3.17 MOC CgfFunction .....                            | 23        |
| 6.3.18 MOC MgwFunction .....                            | 24        |
| 6.3.19 MOC GmscServerFunction .....                     | 24        |
| 6.3.20 MOC IwfFunction .....                            | 25        |
| 6.3.21 MOC MnpSrfFunction .....                         | 25        |
| 6.3.22 MOC NpdbFunction .....                           | 26        |
| 6.3.23 MOC RSgwFunction .....                           | 26        |
| 6.3.24 MOC SsfFunction .....                            | 27        |
| 6.3.25 MOC BsFunction .....                             | 27        |
| 6.4 Associations .....                                  | 28        |
| <b>Annex A (informative): Change history .....</b>      | <b>29</b> |

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## Introduction

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

Due to the growing number of specifications to model new services and Resource Models for Configuration Management (CM), as well as the expected growth in size of each of them from 3GPP Release 4 onwards, a new structure of the specifications is already needed in Release 4. This structure is needed for several reasons, but mainly to enable more independent development and release for each part, as well as a simpler document identification and version handling. Another benefit would be that it becomes easier for bodies outside 3GPP, such as the ITU-T, to refer to telecom management specifications from 3GPP. The new structure of the specifications does not lose any information or functionality supported by the Release 1999. The restructuring also includes defining new IRPs for the Network Resource Models (Generic, Core Network and UTRAN NRM).

Finally, the Name convention for Managed Objects (in Release 1999: 32.106-8) has been moved to a separate number series used for specifications common between several management areas (e.g. CM, FM, PM).

The following table shows an overview of the mapping between the old Release 1999 and new Release 4 CM specification structure.

Table: Mapping between Release '99 and the new Rel-4 specifications

| R99 Old no. | Old (R99) specification title                                      | Rel-4 New no. | New (Rel-4) specification title   |
|-------------|--|---------------|---|
| 32.106-1    | 3G Configuration Management: Concept and Requirements              | 32.600        | <b>3G Configuration Management: Concept and High-level Requirements</b> |
| 32.106-1    | <Notification IRP requirements from 32.106-1 and 32.106-2>         | 32.301        | <b>Notification IRP: Requirements</b>                                   |
| 32.106-2    | Notification IRP: IS   | 32.302        | Notification IRP: Information Service                                   |
| 32.106-3    | Notification IRP: CORBA SS   | 32.303        | Notification IRP: CORBA SS  |
| 32.106-4    | Notification IRP: CMIP SS  | 32.304        | Notification IRP: CMIP SS   |
| 32.106-8    | Name convention for Managed Objects                                | 32.300        | <b>Name Convention for Managed Objects</b>                              |
| 32.106-1    | <Basic CM IRP IS requirements from 32.106-1 and 32.106-5>          | 32.601        | <b>Basic CM IRP: Requirements</b>                                       |
| 32.106-5    | Basic CM IRP IM (Intro & IS part)                                  | 32.602        | Basic CM IRP: Information Service                                       |
| 32.106-6    | Basic CM IRP CORBA SS (IS related part)                            | 32.603        | Basic CM IRP: CORBA SS  |
| 32.106-7    | Basic CM IRP CMIP SS (IS related part)                             | 32.604        | Basic CM IRP: CMIP SS   |
| 32.106-8    | Name convention for Managed Objects                                | 32.300        | <b>Name Convention for Managed Objects</b>                              |
| -           | -  | 32.611        | <b>Bulk CM IRP: Requirements</b>  |
| -           | -  | 32.612        | Bulk CM IRP: Information Service  |
| -           | -  | 32.613        | Bulk CM IRP: CORBA SS   |
| -           | -  | 32.614        | Bulk CM IRP: CMIP SS  |
|             |  | 32.615        | Bulk CM IRP: XML file format definition                                 |
| 32.106-1    | <Basic CM IRP Generic NRM requirements from 32.106-1 and 32.106-5> | 32.621        | <b>Generic Network Resources IRP: Requirements</b>                      |
| 32.106-5    | Basic CM IRP IM (Generic NRM part)                                 | 32.622        | Generic Network Resources IRP: NRM                                      |
| 32.106-6    | Basic CM IRP CORBA SS (Generic NRM related part)                   | 32.623        | Generic Network Resources IRP: CORBA SS                                 |
| 32.106-7    | Basic CM IRP CMIP SS (Generic NRM related part)                    | 32.624        | Generic Network Resources IRP: CMIP SS                                  |
| 32.106-1    | <Basic CM IRP CN NRM requirements from 32.106-1 and 32.106-5>      | 32.631        | <b>Core Network Resources IRP: Requirements</b>                         |
| 32.106-5    | Basic CM IRP IM (CN NRM part)                                      | 32.632        | <b>Core Network Resources IRP: NRM</b>                                  |
| 32.106-6    | Basic CM IRP CORBA SS (CN NRM related part)                        | 32.633        | Core Network Resources IRP: CORBA SS                                    |
| 32.106-7    | Basic CM IRP CMIP SS (CN NRM related part)                         | 32.634        | Core Network Resources IRP: CMIP SS                                     |
| 32.106-1    | <Basic CM IRP UTRAN NRM requirements from 32.106-1 and 32.106-5>   | 32.641        | <b>UTRAN Network Resources IRP: Requirements</b>                        |
| 32.106-5    | Basic CM IRP IM (UTRAN NRM part)                                   | 32.642        | UTRAN Network Resources IRP: NRM  |
| 32.106-6    | Basic CM IRP CORBA SS (UTRAN NRM related part)                     | 32.643        | UTRAN Network Resources IRP: CORBA SS                                   |
| 32.106-7    | Basic CM IRP CMIP SS (UTRAN NRM related part)                      | 32.644        | UTRAN Network Resources IRP: CMIP SS                                    |
|             |  | 32.651        | <b>GERAN Network Resources IRP: Requirements</b>                        |
|             |  | 32.652        | GERAN Network Resources IRP: NRM  |
|             |  | 32.653        | GERAN Network Resources IRP: CORBA SS                                   |
|             |  | 32.654        | GERAN Network Resources IRP: CMIP SS                                    |

---

# 1 Scope

The present document is part of an Integration Reference Point (IRP) named “Core Network Resources IRP”, through which an 'IRPAgent' (typically an Element Manager or Network Element) can communicate Configuration Management information to one or several 'IRPManagers' (typically Network Managers) concerning CN resources. This version of the IRP is mainly intended for “passive management” of high-level network configuration and status information as required by a Network Manager. The “Core Network Resources IRP” comprises a set of specifications defining Requirements, a protocol neutral Network Resource Model (NRM) and corresponding Solution Set(s).

The present document specifies the protocol neutral Core Network Resources IRP: Network Resource Model. It reuses relevant parts of the generic NRM in [16], either by direct reuse or sub-classing, and in addition to that defines CN specific Managed Object Classes.

The Configuration Management (CM) area is very large. The intention is to split the specification of the related interfaces in several IRPs – as described in the Introduction clause above. An important aspect of such a split is that the Network Resource Models (NRMs) defined in different IRPs containing NRMs are consistent, and that NRMs supported by an IRPAgent implementation can be accessed as one coherent model through one IRP Information Service.

To summarize, the present document has the following main purpose: to define the applied CN specific Network Resource Model, based on the generic NRM in [16].

Finally, in order to access the information defined by this NRM, an IRP Information Service (IS) is needed, such as the Basic CM IRP: IS [17]. However, which Information Service that is applicable is outside the scope of this document.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 32.101: "3G Telecom Management principles and high level requirements".
- [2] 3GPP TS 32.102: "3G Telecom Management architecture".
- [3] 3GPP TS 32.302: "Telecommunication Management; Configuration Management; Notification Integration Reference Point; Information Service Version 1".
- [4] Void
- [5] Void
- [6] Void
- [7] ITU-T Recommendation X.710 (1991): "Common Management Information Service Definition for CCITT Applications".
- [8] Void
- [9] Void
- [10] Void

- [11] 3GPP TS 32.111-2: "Telecommunication Management; Fault Management; Part 2: Alarm Integration Reference Point; Information Service Version 1".
- [12] Void
- [13] 3GPP TS 32.300: "Name Convention for Managed Objects".
- [14] 3GPP TS 32.600: "3G Configuration Management: Concepts and requirements".
- [15] 3GPP TS 23.002: "Network Architecture".
- [16] 3GPP TS 32.622: "Generic Network Resources IRP: NRM".
- [17] 3GPP TS 32.602: "Basic CM IRP: Information Service".
- [18] 3GPP TS 23.060: "General Packet Radio Service (GPRS) Service description".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply. For terms and definitions not found here, please refer to 3GPP TS 32.101 [1], 3GPP TS 32.102 [2] and 3GPP TS 32.600 [14].

**Association:** In general it is used to model relationships between Managed Objects. Associations can be implemented in several ways, such as:

- (1) name bindings,
- (2) reference attributes, and
- (3) association objects.

This IRP stipulates that containment associations shall be expressed through name bindings, but it does not stipulate the implementation for other types of associations as a general rule. These are specified as separate entities in the object models (UML diagrams). Currently (in R99) however, all (non-containment) associations are modelled by means of reference attributes of the participating MOs.


**Managed Element (ME):** An instance of the Managed Object Class ManagedElement defined in [16].

**Managed Object (MO):** In the context of the present document, a Managed Object (MO) is a software object that encapsulates the manageable characteristics and behaviour of a particular Network Resource. The MO is instance of a MO class defined in a MIM/NRM. An MO class has attributes that provide information used to characterize the objects that belong to the class (the term "attribute" is taken from TMN and corresponds to a "property" according to CIM). Furthermore, an MO class can have operations that represent the behaviour relevant for that class (the term "operation" is taken from TMN and corresponds to a "method" according to CIM). An MO class may support notifications that provide information about an event occurrence within a network resource.

**Management Information Base (MIB):** A MIB is an instance of an NRM and has some values on the defined attributes and associations specific for that instance. In the context of the present document, an MIB consists of:

- (1) a Name space (describing the MO containment hierarchy in the MIB through Distinguished Names),
- (2) a number of Managed Objects with their attributes and
- (3) a number of Associations between these MOs. Also note that TMN (ITU-T Recommendation X.710 [7]) defines a concept of a Management Information Tree (also known as a Naming Tree) that corresponds to the name space (containment hierarchy) portion of this MIB definition. Figure 1 depicts the relationships between a Name space and a number of participating MOs (the shown association is of a non-containment type)



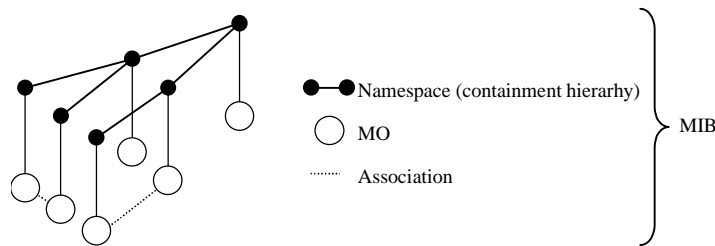

**Figure 1: Relationships between a Name space and a number of participating MOs**

**Management Information Model (MIM):** Also referred to as NRM – see the definition below.

**Name space:** A name space is a collection of names. The IRP name convention (see 3GPP TS 32.300 [13]) restricts the name space to a hierarchical containment structure, including its simplest form - the one-level, flat name space. All Managed Objects in a MIB shall be included in the corresponding name space and the MIB/name space shall only support a strict hierarchical containment structure (with one root object). A Managed Object that contains another is said to be the superior (parent); the contained Managed Object is referred to as the subordinate (child). The parent of all MOs in a single name space is called a Local Root. The ultimate parent of all MOs of all managed systems is called the Global Root.

**Network Resource Model (NRM):** A model representing the actual managed telecommunications network resources that a System is providing through the subject IRP. An NRM describes Managed Object Classes, their associations, attributes and operations. The NRM is also referred to as “MIM” (see above), which originates from the ITU-T TMN.

**Node B:** A logical node responsible for radio transmission/reception in one or more cells to/from the User Equipment. It terminates the Iub interface towards the RNC.

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

|             |   |
|-------------|---|
| AUC         | AUthentication Centre   |
| BG          | Border Gateway  |
| BS          | BillinG System  |
| CBC         | Cell Broadcast Center   |
| CGF         | CharginG Gateway Functionality                                  |
| CMIP        | Common Management Information Protocol                          |
| CMIS        | Common Management Information Service                           |
| CN          | Core Network  |
| CORBA       | Common Object Request Broker Architecture                       |
| DMTF        | Distributed Management Task Force                               |
| DN          | Distinguished Name (see 3GPP TS 32.300 [13])                    |
| EIR         | Equipment Identity Register                                     |
| EM          | Element Manager   |
| FM          | Fault Management  |
| FNR         | Flexible Number Register  |
| GDMO        | Guidelines for the Definition of Managed Objects                |
| GGSN        | Gateway GPRS Support Node                                       |
| GMLC        | Gateway Mobile Location Center                                  |
| GMSC        | Gateway MSC   |
| GMSC Server | Gateway MSC Server  |
| GPRS        | General Packet Radio System                                     |
| HLR         | Home Location Register  |
| IDL         | Interface Definition Language                                   |
| IEC         | International Electro-technical Commission                      |
| IETF        | Internet Engineering Task Force                                 |
| IRP         | Integration Reference Point                                     |
| ISO/IEC     | International Standards Organization                            |
| ITU-T       | International Telecommunication Union, Telecommunication Sector |

|            |   |
|------------|---|
| IWF        | Interworking Function                                 |
| NM         | Network Manager                                       |
| NE         | Network Element                                       |
| ME         | Managed Element                                       |
| MGW        | Media Gateway   |
| MIB        | Management Information Base                           |
| MIM        | Management Information Model                          |
| MIT        | Management Information Tree (or Naming Tree)          |
| MNP-SRF    | Mobile Number Portability/Signalling Relay Function   |
| MO         | Managed Object  |
| MOC        | Managed Object Class                                  |
| MOI        | Managed Object Instance                               |
| MSC        | Mobile Services Switching Centre                      |
| MSC Server | Mobile Services Switching Centre Server               |
| NE         | Network Element                                       |
| NPDB       | Number Portability Database                           |
| NR         | Network Resource                                      |
| NRM        | Network Resource Model                                |
| OSI        | Open Systems Interconnection                          |
| PM         | Performance Management                                |
| RDN        | Relative Distinguished Name (see 3GPP TS 32.300 [13]) |
| R-SGW      | Roaming Signalling Gateway                            |
| SCF        | Service Control Function                              |
| SGSN       | Serving GPRS Support Node                             |
| SMLC       | Serving Mobile Location Center                        |
| SMS        | Short Message Service                                 |
| SMS-GMSC   | SMS Gateway MSC                                       |
| SMS-IW MSC | SMS Interworking MSC                                  |
| SNMP       | Simple Network Management Protocol                    |
| SRF        | Specialised Resource Function                         |
| SS         | Solution Set  |
| SSF        | Service Switching Function                            |
| TMN        | Telecommunications Management Network                 |
| UML        | Unified Modelling Language                            |
| UMTS       | Universal Mobile Telecommunications System            |
| UTRAN      | UMTS Terrestrial Radio Access Network                 |
| VLR        | Visitor Location Register                             |
| WBEM       | Web-Based Enterprise Management                       |
| XML        | eXtensible Mark-up Language                           |

---

## 4 System overview

### 4.1 System context

Figure and Figure identify system contexts of the subject IRP in terms of its implementation called IRPAgent and the user of the IRPAgent, called IRPManager. For a definition of IRPManager and IRPAgent, see 3GPP TS 32.102 [2].

The IRPAgent implements and supports the Basic CM IRP. The IRPAgent can be an Element Manager (EM) or a mediator that interfaces one or more NEs (see Figure), or it can be a Network Element (NE) (see Figure). In the former case, the interfaces (represented by a thick dotted line) between the EM and the NEs are not subject of this IRP.

An IRPManager using this IRP shall choose one of the two System Contexts defined here, for each NE. For instance, if an EM is responsible for managing a number of NEs, the NM shall access this IRP through the EM and not directly to those NEs. For another IRP though, the System Context may be different.

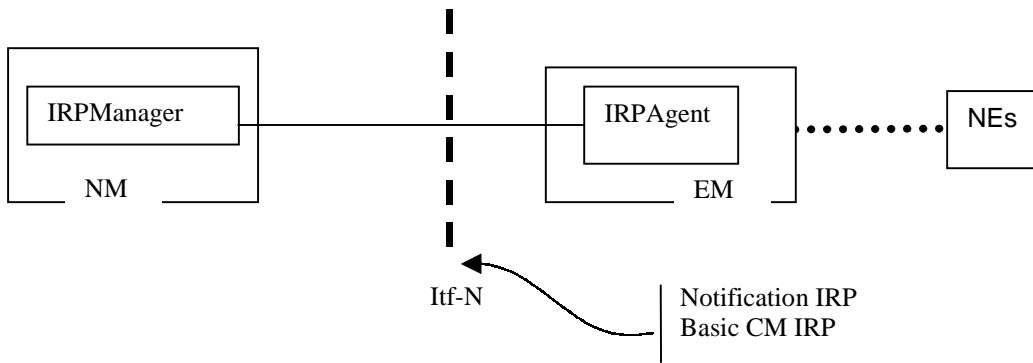


Figure 2: System Context A

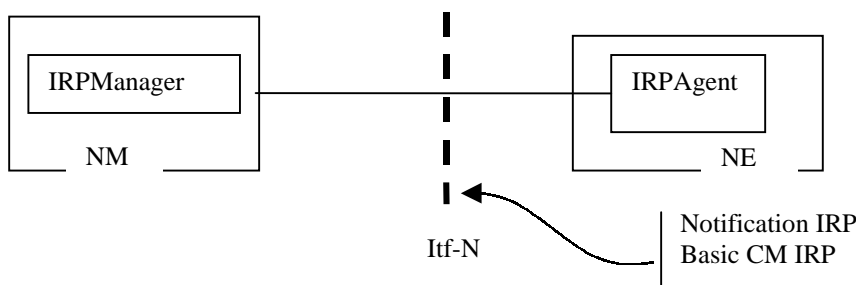


Figure 3: System Context B

## 4.2 Compliance rules

For general definitions of compliance rules related to qualifiers (Mandatory/Optional/Conditional) for *operations*, *notifications* and *parameters* (of operations and notifications) please refer to 3GPP TS 32.102 [2].

The following defines the meaning of Mandatory and Optional MOC attributes and associations between MOCs, in Solution Sets to the Basic CM IRP:

- The IRPManager shall support all mandatory attributes/associations. The IRPManager shall be prepared to receive information related to mandatory as well as optional attributes/associations without failure; however the IRPManager does not have to support handling of the optional attributes/associations.
- The IRPAgent shall support all mandatory attributes/associations. It may support optional attributes/associations.

An IRPAgent that incorporates vendor-specific extensions shall support normal communication with a 3GPP SA5-compliant IRPManager with respect to all Mandatory and Optional managed object classes, attributes, associations, operations, parameters and notifications without requiring the IRPManager to have any knowledge of the extensions.

Given that

- rules for vendor-specific extensions remain to be fully specified, and
- many scenarios under which IRPManager and IRPAgent interwork may exist,

it is recognised that in Release 4/5 the IRPManager, even though it is not required to have knowledge of vendor-specific extensions, may be required to be implemented with an awareness that extensions can exist and behave accordingly.

## 5 Modelling approach

The modelling approach is described in the Generic Network Resources IRP: NRM [16].

---

## 6 IRP Information Model

### 6.1 Introduction

As already introduced in the previous clause, the present clause defines the Core Network Resources IRP: Network Resource Model. That is, this model defines CN specific MOCs that shall be contained under the generic MOCs defined in [16].

The managed object classes in this NRM are protocol environment neutral and the model does not define the syntax or encoding of the operations and parameters.

It should be noted that this model allows for combined managed element functionality, where more than one 'function MOCs' (inherited from ManagedFunction) modelling more specific managed element functionality may be contained in the ManagedElement MOC.

The Information Service(s) to access managed objects of this NRM is defined elsewhere.

The corresponding Solution Set specifications provide protocol dependent definitions. They provide the actual realization of the operations and notifications defined in this subclause in each protocol environment. One may find that the class/attribute definitions in the protocol-neutral model differ from those defined in the Solution Sets (e.g. due to mappings to existing standard models that are applicable for a specific Solution Set).

### 6.2 Managed Object Class (MOC) diagrams

A general note regarding all the notification tables defined for each MOC below: Each MOC may potentially send the notifications listed in the notification table for the MOC. The notifications with qualifier (M) shall be supported by the MOC, and the notifications with qualifier (O) may be supported by the MOC.

For example: If Notification notifyObjectCreation defined in Basic CM IRP has the qualifier (M), then if a MOC is defined such that it emits such a notification, this notification shall be emitted when appropriate (i.e. when a new object is created). If Notification notifyChangedAlarm has the qualifier (O) in Alarm IRP (see 3GPP TS 32.111-2 [11]), then if a MOC is defined such that it emits such a notification, this notification may or may not be emitted when appropriate. Further, if a notification in the qualifier column (of the MOC notification tables) has a reference to another specification, it means that the qualifier for the notification is specified in the referred specification.

#### 6.2.1 Inheritance hierarchy

Figures 4 and 5 show the inheritance hierarchy for the CN NRM.

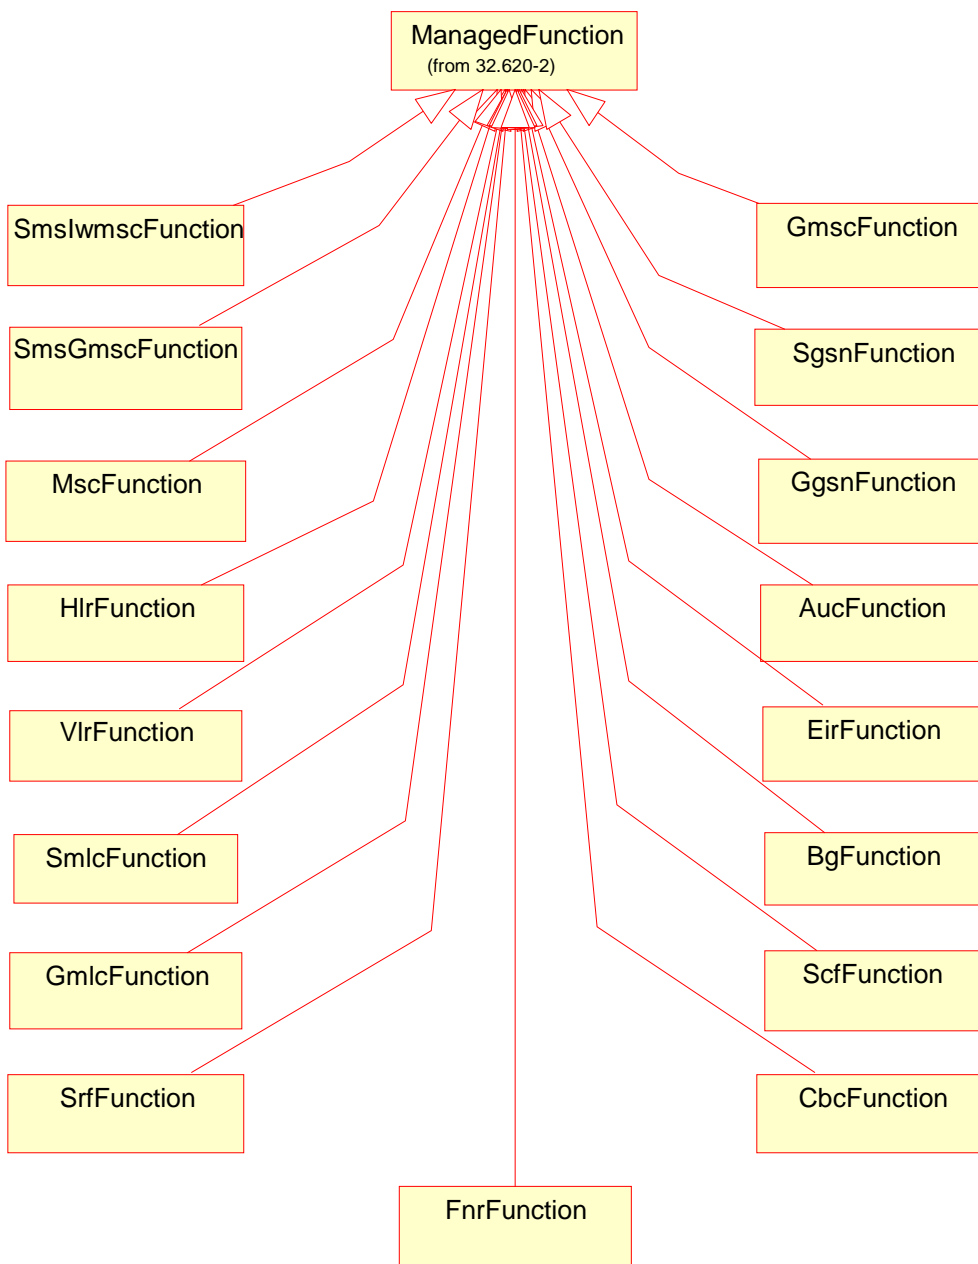


Figure 4: CN NRM Inheritance Hierarchy 1


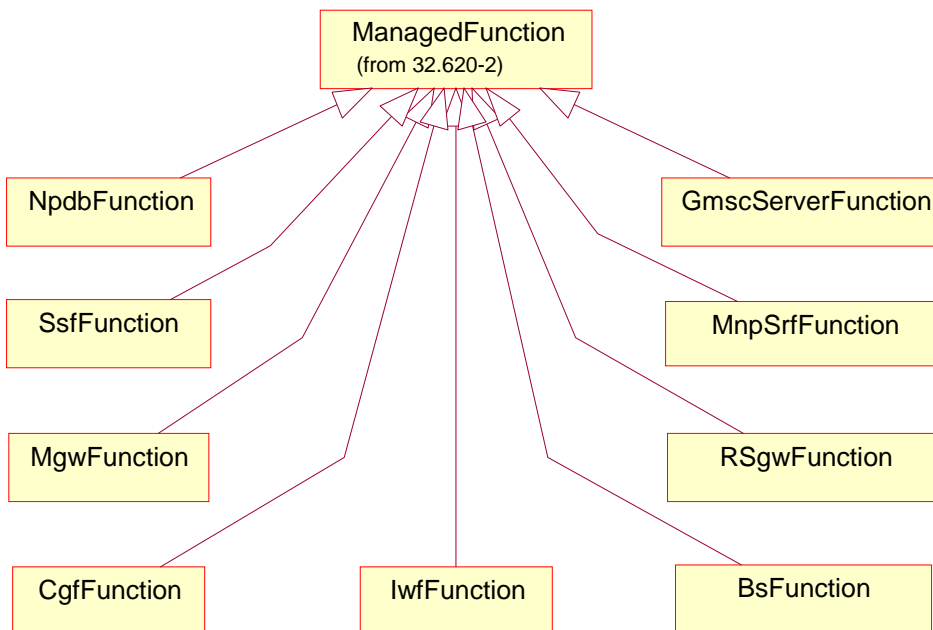


Figure 5: CN NRM Inheritance Hierarchy 2

### 6.2.2 Containment/Naming and Association diagrams


Figures 6 and 7 show the containment/naming hierarchy and the associations of the CN NRM.

NOTE: The Managed Object containment/naming relationships are in the diagram(s) below indicated by UML “Aggregation by reference” (“hollow diamonds”).

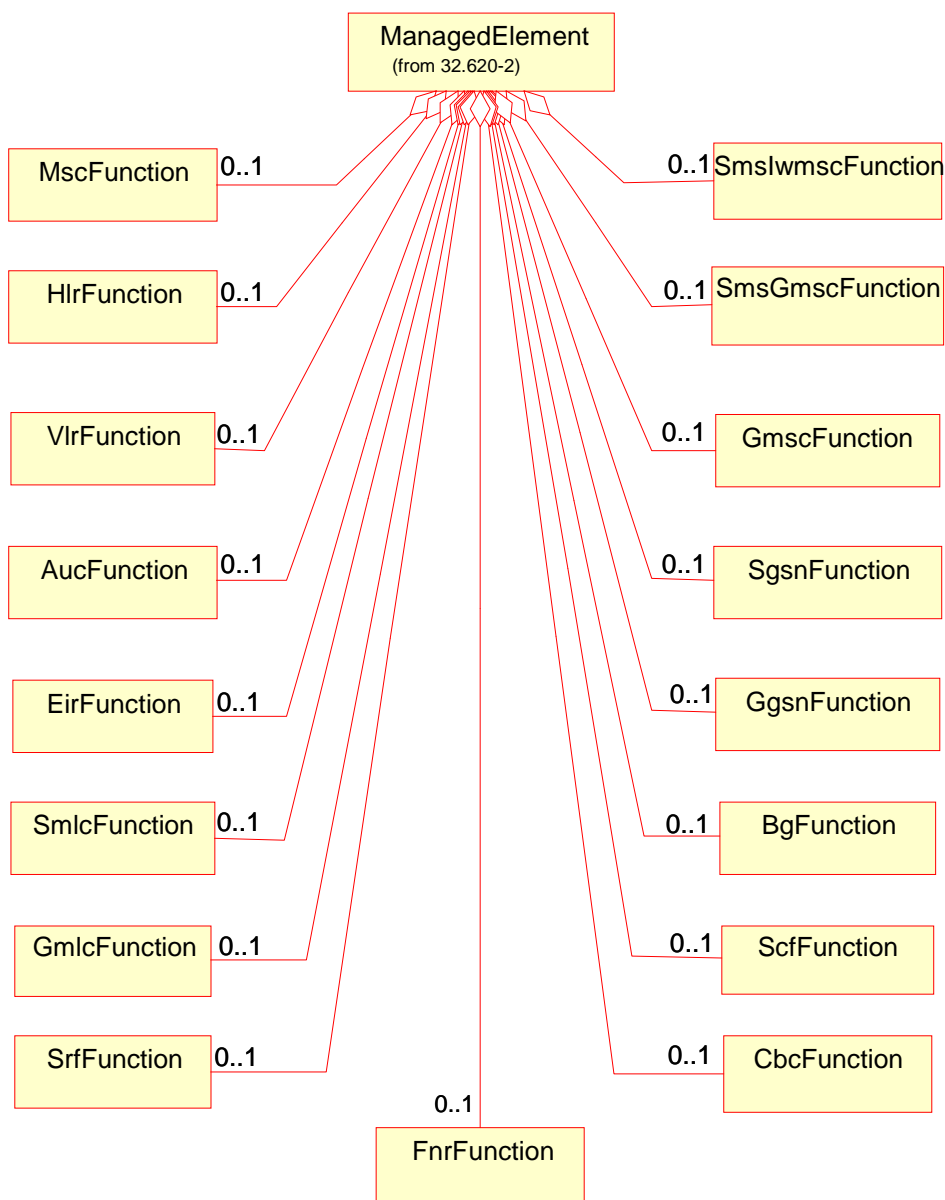

NOTE: The listed cardinality numbers represent transient as well as steady-state numbers, and reflect all managed object creation and deletion scenarios.

**Figure 6: CN NRM Containment/Naming and Association diagram 1**

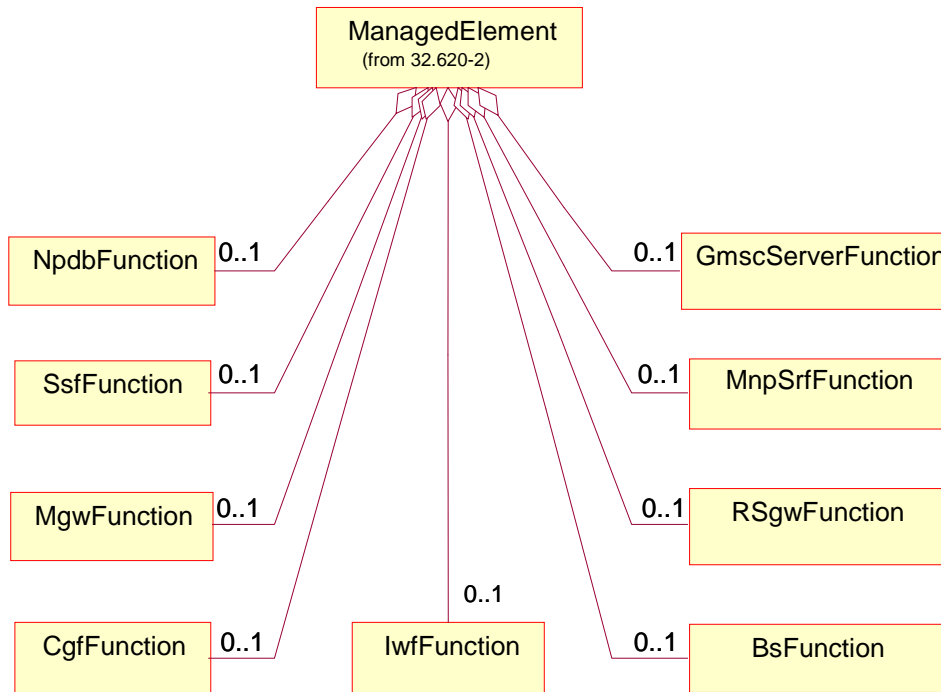

**Figure 7: CN NRM Containment/Naming and Association diagram 2**

Each Managed Object is identified with a Distinguished Name (DN) according to 3GPP TS 32.300 [13] that expresses its containment hierarchy. As an example, the DN of a Managed Object representing a cell could have a format like:

SubNetwork=Sweden,MeContext=MEC-Gbg-1,ManagedElement=MSC-Gbg-1,MscFunction=MSC-1.

### 6.3 Managed Object Class (MOC) definitions

#### 6.3.1 MOC MscFunction

This Managed Object Class represents MSC functionality. For more information about the MSC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 1: Attributes of MscFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| mscFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |



**Table 2: Notifications of MscFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.2 MOC HlrFunction

This Managed Object Class represents HLR functionality. For more information about the HLR, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 3: Attributes of HlrFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| hlrFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 4: Notifications of HlrFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.3 MOC VlrFunction

This Managed Object Class represents VLR functionality. For more information about the VLR, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 5: Attributes of VlrFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| vlrFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 6: Notifications of VlrFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.4 MOC AucFunction

This Managed Object Class represents AUC functionality. For more information about the AUC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 7: Attributes of AucFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| aucFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 8: Notifications of AucFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.5 MOC EirFunction

This Managed Object Class represents EIR functionality. For more information about the EIR, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 9: Attributes of EirFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| eirFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 10: Notifications of EirFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.6 MOC SmsIwmscFunction

This Managed Object Class represents SMS-IWMSM functionality. For more information about the SMS-IWMSM, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 11: Attributes of SmsIwmscFunction**

| Name               | Qualifier    | Description   |
|--------------------|--------------|---|
| SmsIwmscFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel          | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 12: Notifications of SmsIwmscFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.7 MOC SmsGmscFunction

This Managed Object Class represents SMS-GMSC functionality. For more information about the SMS-GMSC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 13: Attributes of SmsGmscFunction**

| Name              | Qualifier    | Description   |
|-------------------|--------------|---|
| SmsGmscFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel         | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 14: Notifications of SmsGmscFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.8 MOC GmscFunction

This Managed Object Class represents GMSC functionality. For more information about the GMSC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 15: Attributes of GmscFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| gmscFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 16: Notifications of GmscFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.9 MOC SgsnFunction

This managed object class represents SGSN functionality. For more information about the SGSN, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 17: Attributes of SgsnFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| sgsnFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 18: Notifications of SgsnFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.10 MOC GgsnFunction

This Managed Object Class represents GGSN functionality. For more information about the GGSN, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 19: Attributes of GgsnFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| ggsnFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 20: Notifications of GgsnFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.11 MOC BgFunction

This Managed Object Class represents BG functionality. For more information about the BG, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 21: Attributes of BgFunction**

| Name         | Qualifier    | Description   |
|--------------|--------------|---|
| bgFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel    | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 22: Notifications of BgFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.12 MOC SmlcFunction

This Managed Object Class represents SMLC functionality. For more information about the SMLC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 52: Attributes of SmlcFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| smlcFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 53: Notifications of SmlcFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.13 MOC GmlcFunction

This Managed Object Class represents GMLC functionality. For more information about the GMLC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 54: Attributes of GmlcFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| gmlcFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 55: Notifications of GmlcFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.14 MOC ScfFunction

This Managed Object Class represents SCF functionality (also referred to as gsmSCF). For more information about the SCF, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 56: Attributes of scfFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| scfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 57: Notifications of scfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.15 MOC SrfFunction

This Managed Object Class represents SRF functionality (also referred to as gsmSRF). For more information about the SRF, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 58: Attributes of srfFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| srfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 59: Notifications of SrfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.16 MOC CbcFunction

This Managed Object Class represents CBC functionality. For more information about the CBC, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 60: Attributes of CbcFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| cbcFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 61: Notifications of CbcFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.17 MOC CgfFunction

This Managed Object Class represents CGF functionality. For more information about the CGF, see 3GPP TS 23.060 [18].

It inherits from ManagedFunction.

**Table 64: Attributes of CgfFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| cgfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |



**Table 65: Notifications of CgfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.18 MOC MgwFunction

This Managed Object Class represents MGW functionality. For more information about MGW, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 66: Attributes of MgwFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| mgwFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 67: Notifications of MgwFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.19 MOC GmscServerFunction

This Managed Object Class represents GMSCServer functionality. For more information about GMSCServer, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 70: Attributes of GmscServerFunction**

| Name                 | Qualifier    | Description   |
|----------------------|--------------|---|
| gmscServerFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel            | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 71: Notifications of GmscServerFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.20 MOC IwfFunction

This Managed Object Class represents IWF functionality. For more information about IWF, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 76: Attributes of IwfFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| iwfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 77: Notifications of IwfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.21 MOC MnpSrfFunction

This Managed Object Class represents MNP-SRF functionality (also known as FNR). For more information about MNP-SRF, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 78: Attributes of MnpSrfFunction**

| Name             | Qualifier    | Description   |
|------------------|--------------|---|
| mnpSrfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel        | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 79: Notifications of MnpSrfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.22 MOC NpdbFunction

This Managed Object Class represents NPDB functionality. For more information about NPDB, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 80: Attributes of NpdbFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| npdbFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 81: Notifications of NpdbFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.23 MOC RSgwFunction

This Managed Object Class represents R-SGW functionality. For more information about R-SGW, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 82: Attributes of RSgwFunction**

| Name           | Qualifier    | Description   |
|----------------|--------------|---|
| rSgwFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel      | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 83: Notifications of RSgwFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.24 MOC SsfFunction

This Managed Object Class represents SSF functionality. For more information about SSF, see 3GPP TS 23.002 [15].

It inherits from ManagedFunction.

**Table 84: Attributes of SsfFunction**

| Name          | Qualifier    | Description   |
|---------------|--------------|---|
| ssfFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel     | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 85: Notifications of SsfFunction**

| Name                       | Qualifier                             | Notes |
|----------------------------|---------------------------------------|-------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyAttributeValueChange | O                                     |       |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |       |
| notifyObjectCreation       | O                                     |       |
| notifyObjectDeletion       | O                                     |       |

### 6.3.25 MOC BsFunction

This Managed Object Class represents BS functionality. For more information about BS, see 3GPP TS 23.060 [18].

It inherits from ManagedFunction.

**Table 86: Attributes of BsFunction**

| Name         | Qualifier    | Description   |
|--------------|--------------|---|
| bsFunctionId | READ-ONLY, M | An attribute whose 'name+value' can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. |
| userLabel    | READ-ONLY, M | A user-friendly (and user assigned) name of the associated object. Inherited from ManagedFunction.  |

**Table 87: Notifications of BsFunction**

| <b>Name</b>                | <b>Qualifier</b>                      | <b>Notes</b> |
|----------------------------|---------------------------------------|--------------|
| notifyAckStateChanged      | See Alarm IRP (3GPP TS 32.111-2 [11]) |              |
| notifyAttributeValueChange | O                                     |              |
| notifyChangedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |              |
| notifyClearedAlarm         | See Alarm IRP (3GPP TS 32.111-2 [11]) |              |
| notifyNewAlarm             | See Alarm IRP (3GPP TS 32.111-2 [11]) |              |
| notifyObjectCreation       | O                                     |              |
| notifyObjectDeletion       | O                                     |              |

## 6.4 Associations

-

---

## Annex A (informative): Change history

| Change history |       |           |    |     |  |       |       |
|----------------|-------|-----------|----|-----|--|-------|-------|
| Date           | TSG # | TSG Doc.  | CR | Rev | Subject/Comment  | Old   | New   |
| Jun 2001       | S_12  | SP-010283 | -- | --  | Approved at TSG SA #12 and placed under Change Control | 2.0.0 | 4.0.0 |
|                |       |           |    |     |  |       |       |
|                |       |           |    |     |  |       |       |

---

## History

| <b>Document history</b> |           |             |
|-------------------------|-----------|-------------|
| V4.0.0                  | June 2001 | Publication |
|                         |           |             |
|                         |           |             |
|                         |           |             |
|                         |           |             |