

ETSI TS 132 762 V11.4.0 (2013-02)



Technical Specification

**Digital cellular telecommunications system (Phase 2+);
Universal Mobile Telecommunications System (UMTS);
LTE;
Telecommunication management;
Evolved Universal Terrestrial Radio
Access Network (E-UTRAN) Network Resource Model (NRM)
Integration Reference Point (IRP);
Information Service (IS)
(3GPP TS 32.762 version 11.4.0 Release 11)**



Reference

RTS/TSGS-0532762vb40

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2013.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

| | |
|--|----|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Foreword..... | 7 |
| Introduction | 7 |
| 1 Scope | 8 |
| 2 References | 8 |
| 3 Definitions and abbreviations..... | 10 |
| 3.1 Definitions | 10 |
| 3.2 Abbreviations | 10 |
| 4 System overview | 11 |
| 4.1 Compliance rules..... | 11 |
| 5 Modelling approach..... | 11 |
| 6 Information Object Classes (IOCs) | 11 |
| 6.1 Information entities imported and local labels | 11 |
| 6.2 Class diagram | 12 |
| 6.2.1 Attributes and relationships | 12 |
| 6.2.2 Inheritance | 18 |
| 6.3 Information Object Class (IOC) definitions | 20 |
| 6.3.1 ENBFunction | 20 |
| 6.3.1.1 Definition | 20 |
| 6.3.1.2 Attributes..... | 20 |
| 6.3.1.3 Attribute constraints | 20 |
| 6.3.1.4 Notifications..... | 20 |
| 6.3.2 ExternalENBFunction..... | 20 |
| 6.3.2.1 Definition | 20 |
| 6.3.2.2 Attributes..... | 20 |
| 6.3.2.3 Attribute constraints | 20 |
| 6.3.2.4 Notifications..... | 21 |
| 6.3.3 EUTRANGenericCell..... | 21 |
| 6.3.3.1 Definition | 21 |
| 6.3.3.2 Attributes..... | 21 |
| 6.3.3.3 Attribute constraints | 21 |
| 6.3.3.4 Notifications..... | 22 |
| 6.3.4 ExternalEUTRANGenericCell | 22 |
| 6.3.4.1 Definition | 22 |
| 6.3.4.2 Attributes..... | 22 |
| 6.3.4.3 Attribute constraints | 22 |
| 6.3.4.4 Notifications..... | 22 |
| 6.3.5 EUTRANCellFDD | 22 |
| 6.3.5.1 Definition | 22 |
| 6.3.5.2 Attributes..... | 22 |
| 6.3.5.3 Attribute constraints | 22 |
| 6.3.5.4 Notifications..... | 22 |
| 6.3.6 ExternalEUTRANCellFDD..... | 23 |
| 6.3.6.1 Definition | 23 |
| 6.3.6.2 Attributes..... | 23 |
| 6.3.6.3 Attribute constraints | 23 |
| 6.3.6.4 Notifications..... | 23 |
| 6.3.7 EUTRANCellTDD | 23 |
| 6.3.7.1 Definition | 23 |
| 6.3.7.2 Attributes..... | 23 |

| | | |
|----------|---|----|
| 6.3.7.3 | Attribute constraints | 23 |
| 6.3.7.4 | Notifications | 23 |
| 6.3.8 | ExternalEUTranCellTDD | 23 |
| 6.3.8.1 | Definition | 23 |
| 6.3.8.2 | Attributes | 23 |
| 6.3.8.3 | Attribute constraints | 23 |
| 6.3.8.4 | Notifications | 24 |
| 6.3.9 | EUTranRelation | 24 |
| 6.3.9.1 | Definition | 24 |
| 6.3.9.2 | Attributes | 24 |
| 6.3.9.3 | Attribute constraints | 24 |
| 6.3.9.4 | Notifications | 24 |
| 6.3.10 | Link_ENB_ENB | 25 |
| 6.3.10.1 | Definition | 25 |
| 6.3.10.2 | Attributes | 25 |
| 6.3.10.3 | Attribute constraints | 25 |
| 6.3.10.4 | Notifications | 25 |
| 6.3.11 | Void | 25 |
| 6.3.12 | Void | 25 |
| 6.3.13 | Cdma2000Relation | 25 |
| 6.3.13.1 | Definition | 25 |
| 6.3.13.2 | Attributes | 25 |
| 6.3.13.3 | Attribute constraints | 25 |
| 6.3.13.4 | Notifications | 25 |
| 6.3.14 | MCEFunction | 25 |
| 6.3.14.1 | Definition | 25 |
| 6.3.14.2 | Attributes | 26 |
| 6.3.14.3 | Attribute constraints | 26 |
| 6.3.14.4 | Notifications | 26 |
| 6.3.15 | MBSFNArea | 26 |
| 6.3.15.1 | Definition | 26 |
| 6.3.15.2 | Attributes | 26 |
| 6.3.15.3 | Attribute constraints | 26 |
| 6.3.15.4 | Notifications | 26 |
| 6.3.16 | Link_MCE_ENB | 26 |
| 6.3.16.1 | Definition | 26 |
| 6.3.16.2 | Attributes | 26 |
| 6.3.16.3 | Attribute constraints | 26 |
| 6.3.16.4 | Notifications | 26 |
| 6.3.17 | Link_MCE_MME | 27 |
| 6.3.17.1 | Definition | 27 |
| 6.3.17.2 | Attributes | 27 |
| 6.3.17.3 | Attribute constraints | 27 |
| 6.3.17.4 | Notifications | 27 |
| 6.3.18 | RNFunction | 27 |
| 6.3.18.1 | Definition | 27 |
| 6.3.18.2 | Attributes | 27 |
| 6.3.18.3 | Attribute constraints | 27 |
| 6.3.18.4 | Notifications | 27 |
| 6.3.19 | ExternalRNFunction | 27 |
| 6.3.19.1 | Definition | 27 |
| 6.3.19.2 | Attributes | 27 |
| 6.3.19.3 | Attribute constraints | 27 |
| 6.3.19.4 | Notifications | 28 |
| 6.3.20 | DeNBCapability | 28 |
| 6.3.20.1 | Definition | 28 |
| 6.3.20.2 | Attributes | 28 |
| 6.3.20.3 | Attribute constraints | 28 |
| 6.3.20.4 | Notifications | 28 |
| 6.3.21 | Void | 28 |
| 6.3.22 | Void | 28 |
| 6.3.23 | CellOutageCompensationInformation | 28 |

| | | |
|----------|---|----|
| 6.3.23.1 | Definition | 28 |
| 6.3.23.2 | Attributes..... | 28 |
| 6.3.23.3 | Attribute constraints | 28 |
| 6.3.23.4 | Notifications..... | 28 |
| 6.3.24 | IOC QciDscpMapping | 28 |
| 6.3.24.1 | Definition | 28 |
| 6.3.24.2 | Attributes..... | 29 |
| 6.3.24.3 | Attribute constraints | 29 |
| 6.3.24.4 | Notifications..... | 29 |
| 6.3.25 | EUtranCellNMCentralizedSON | 29 |
| 6.3.25.1 | Definition | 29 |
| 6.3.25.2 | Attributes..... | 30 |
| 6.3.25.3 | Attribute constraints | 31 |
| 6.3.25.4 | Notifications..... | 31 |
| 6.4 | Information relationship definitions | 31 |
| 6.4.1 | EUtranNeighbourCellRelation (M)..... | 31 |
| 6.4.1.1 | Definition | 31 |
| 6.4.1.2 | Roles | 31 |
| 6.4.1.3 | Constraints | 31 |
| 6.4.2 | ExternalEUtranNeighbourCellRelation (M) | 31 |
| 6.4.2.1 | Definition | 31 |
| 6.4.2.2 | Roles | 31 |
| 6.4.2.3 | Constraints | 31 |
| 6.4.3 | ExternalCdma2000NeighbourCellRelation (M) | 32 |
| 6.4.3.1 | Definition | 32 |
| 6.4.3.2 | Roles | 32 |
| 6.4.3.3 | Constraints | 32 |
| 6.4.4 | Void | 32 |
| 6.4.5 | Void | 32 |
| 6.4.6 | Void | 32 |
| 6.4.7 | Void | 32 |
| 6.4.8 | Void | 32 |
| 6.4.9 | MBSFNAreaRelatedCells (M)..... | 32 |
| 6.4.9.1 | Definition | 32 |
| 6.4.9.2 | Roles | 32 |
| 6.4.9.3 | Constraints | 32 |
| 6.4.10 | ServesRN (O)..... | 32 |
| 6.4.10.1 | Definition | 32 |
| 6.4.10.2 | Roles | 32 |
| 6.4.10.3 | Constraints | 33 |
| 6.4.11 | ServesExtRN (O) | 33 |
| 6.4.11.1 | Definition | 33 |
| 6.4.11.2 | Roles | 33 |
| 6.4.11.3 | Constraints | 33 |
| 6.4.12 | ServedByEGC (O)..... | 33 |
| 6.4.12.1 | Definition | 33 |
| 6.4.12.2 | Roles | 33 |
| 6.4.12.3 | Constraints | 33 |
| 6.4.13 | ServedByExtEGC (O)..... | 33 |
| 6.4.13.1 | Definition | 33 |
| 6.4.13.2 | Roles | 33 |
| 6.4.13.3 | Constraints | 33 |
| 6.5 | Information attribute definitions..... | 34 |
| 6.5.1 | Definition and legal values | 34 |
| 6.5.2 | Constraints | 48 |
| 6.6 | Common Notifications | 48 |
| 6.6.1 | Alarm and configuration notifications | 48 |
| 6.6.2 | Configuration notifications | 48 |
| 6.7 | System State Model..... | 48 |

| | | |
|-------------------------------|--|-----------|
| Annex A (informative): | Notifications during a Cell Outage Compensation | 49 |
|-------------------------------|--|-----------|

Annex B (informative): **Change history**53
History55

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

- | | |
|---------------|--|
| 32.761 | Evolved Universal Terrestrial Radio Access Network (E-UTRAN) Network Resource Model (NRM) Integration Reference Point (IRP): Requirements |
| 32.762 | Evolved Universal Terrestrial Radio Access Network (E-UTRAN) Network Resource Model (NRM) Integration Reference Point (IRP): Information Service (IS) |
| 32.766 | Evolved Universal Terrestrial Radio Access Network (E-UTRAN) Network Resource Model (NRM) Integration Reference Point (IRP): Solution Set (SS) definitions |

1 Scope

The present document is part of an Integration Reference Point (IRP) named E-UTRAN Network Resource Model (NRM) IRP, through which an IRPAgent can communicate configuration management information to one or several IRPManagers concerning E-UTRAN resources. The E-UTRAN NRM IRP comprises a set of specifications defining Requirements, a protocol neutral Information Service and one or more Solution Set(s).

The present document specifies the protocol neutral E-UTRAN NRM IRP: Information Service (IS). It reuses relevant parts of the Generic NRM IRP: IS in 3GPP TS 32.622 [6], either by direct reuse or sub-classing, and in addition to that defines E-UTRAN specific Information Object Classes.

In order to access the information defined by this NRM, an Interface IRP such as the "Basic CM IRP" is needed (3GPP TS 32.602 [7]). However, which Interface IRP is applicable is outside the scope of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] 3GPP TS 23.003: "Numbering, addressing and identification".
- [4] 3GPP TS 32.300: "Telecommunication management; Configuration Management (CM); Name convention for Managed Objects".
- [5] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".
- [6] 3GPP TS 32.622: "Telecommunication management; Configuration Management (CM); Generic network resources Integration Reference Point (IRP): Network Resource Model (NRM)".
- [7] 3GPP TS 32.602: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP) Information Service (IS)".
- [8] 3GPP TS 32.612: "Telecommunication management; Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Information Service (IS)".
- [9] 3GPP TS 23.401: "General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access".
- [10] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA) Radio Resource Control (RRC); Protocol specification".
- [11] 3GPP TS 36.300: " Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2 ".
- [12] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation"

- [13] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception"
- [14] 3GPP TS 36.104: "Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception"
- [15] 3GPP TS 32.500: "Telecommunication Management; Self-Organizing Networks (SON); Concepts and requirements"
- [16] 3GPP TS 32.150: "Telecommunication management; Integration Reference Point (IRP) Concept and definitions"
- [17] 3GPP TS 21.905: "Vocabulary for 3GPP Specifications"
- [18] 3GPP TS 32.111-2: "Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP): Information Service (IS)"
- [19] 3GPP TS 23.002: "Network Architecture"
- [20] 3GPP TS 32.652: "Telecommunication management; Configuration Management (CM); GERAN network resources Integration Reference Point (IRP); Network Resource Model (NRM)"
- [21] 3GPP TS 32.642: "Telecommunication management; Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP); Network Resource Model (NRM)"
- [22] 3GPP2 S.S0028-D "OAM&P for cdma2000 (Overview, 3GPP R7 Delta Specification, 3GPP2 Network Resource Model IRP)"
- [23] 3GPP TS 32.752: "Telecommunication management; Evolved Packet Core (EPC) Network Resource Model (NRM) Integration Reference Point (IRP): Information Service (IS)"
- [24] 3GPP TS 36.423: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 application protocol (X2AP)".
- [25] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".
- [26] 3GPP TS 32.672: "Telecommunication management; Configuration Management (CM); State Management Integration Reference Point (IRP); Information Service (IS)".
- [27] 3GPP TS 36.413: "Evolved Universal Terrestrial Access Network (E-UTRAN); S1 Application Protocol (S1AP)".
- [28] 3GPP TS 32.443: "Evolved Universal Terrestrial Access Network (E-UTRAN); M2 Application Protocol (M2AP)".
- [29] 3GPP TS 22.011: "Service accessibility".
- [30] 3GPP TS 32.422: "Telecommunication management; Subscriber and equipment trace; Trace control and configuration management".
- [31] 3GPP TS 32.792: "Generic Radio Access Network (RAN) Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS) ".
- [32] 3GPP TS 32.662: "Telecommunication management; Configuration Management (CM); Kernel CM; Information service (IS)".
- [33] 3GPP TS 23.203: "Policy and charging control architecture".
- [34] 3GPP TS 23.207: "End-to-end Quality of Service (QoS) concept and architecture".
- [35] RFC 2474: "Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers".
- [36] 3GPP TS 25.304: "Universal Terrestrial Access Network (UTRAN); User equipment (UE) procedures in idle mode and procedures for cell reselection in connected mode".

- [37] 3GPP TS 45.008: "Technical Specification Group GSM/EDGE Radio Access Network; Radio subsystem link control".
- [38] 3GPP TS 36.133: "Universal Terrestrial Access Network (UTRAN); Requirements for support of radio resource management".
- [39] 3GPP TS 25.133: "Universal Terrestrial Access Network (UTRAN); Requirements for support of radio resource management".
- [40] 3GPP TS 36.321: "Universal Terrestrial Access Network (UTRAN); Medium Access Control (MAC) protocol specification".
- [41] 3GPP TS 36.304: "Evolved Universal Terrestrial Access Network (E-UTRAN); User equipment (UE) procedures in idle mode".
- [42] 3GPP TS 32.522: "Self-Organizing Networks (SON) Policy Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 32.150 [16], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [17] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TS 32.150 [16], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [17], in that order.

Association: In general it is used to model relationships between Managed Objects. Associations can be implemented in several ways, such as:

- (1) name bindings,
- (2) reference attributes, and
- (3) association objects.

This IRP stipulates that containment associations shall be expressed through name bindings, but it does not stipulate the implementation for other types of associations as a general rule. These are specified as separate entities in the object models (UML diagrams).

Managed Element (ME): An instance of the Information Object Class ManagedElement defined in TS 32.622 [6].

eNodeB: A logical node responsible for radio transmission/reception in one or more cells to/from the User Equipment. It terminates the S1 interface towards the EPC.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TS 32.150 [16], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [17] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TS 32.150 [16], TS 32.101 [1], TS 32.102 [2] and TS 21.905 [17], in that order.

| | |
|---------|---|
| DeNB | Donor eNodeB |
| DN | Distinguished Name (see 3GPP TS 32.300 [4]) |
| E-UTRA | Evolved Universal Terrestrial Radio Access |
| E-UTRAN | Evolved Universal Terrestrial Radio Access Network |
| ME | Managed Element |
| MO | Managed Object |
| MBSFN | Multimedia Broadcast multicast service Single Frequency Network |
| NR | Neighbour cell Relation |
| PM | Performance Management |
| RDN | Relative Distinguished Name (see 3GPP TS 32.300 [4]) |

RN

Relay Node

4 System overview

4.1 Compliance rules

The following defines the meaning of Mandatory and Optional IOC attributes and associations between IOCs, in Solution Sets to the IRP defined by the present document:

- The IRPManager shall support all mandatory attributes/associations. The IRPManager shall be prepared to receive information related to mandatory as well as optional attributes/associations without failure; however the IRPManager does not have to support handling of the optional attributes/associations.
- The IRPAgent shall support all mandatory attributes/associations. It may support optional attributes/associations.

An IRPAgent that incorporates vendor-specific extensions shall support normal communication with a 3GPP SA5-compliant IRPManager with respect to all Mandatory and Optional information object classes, attributes and associations without requiring the IRPManager to have any knowledge of the extensions.

Given that

- rules for vendor-specific extensions remain to be fully specified, and
- many scenarios under which IRPManager and IRPAgent interwork may exist,

it is recognised that the IRPManager, even though it is not required to have knowledge of vendor-specific extensions, may be required to be implemented with an awareness that extensions can exist and behave accordingly.

5 Modelling approach

The modelling approach adopted and used in this IRP is described in TS 32.622 [6].

6 Information Object Classes (IOCs)

6.1 Information entities imported and local labels

| Label reference | Local label |
|---|---------------------|
| 3GPP TS 32.672 [26], attribute, administrativeState | administrativeState |
| 3GPP TS 32.672 [26], attribute, availabilityStatus | availabilityStatus |
| 3GPP TS 32.672 [26], attribute, operationalState | operationalState |
| 3GPP TS 32.622 [6], IOC, Top | Top |
| 3GPP TS 32.622 [6], IOC, ManagedElement | ManagedElement |
| 3GPP TS 32.622 [6], IOC, SubNetwork | SubNetwork |
| 3GPP TS 32.622 [6], IOC, ManagedFunction | ManagedFunction |
| 3GPP TS 32.622 [6], IOC, Link | Link |
| 3GPP TS 32.752 [23], IOC, MMEFunction | MMEFunction |

| | |
|---|-------------------------|
| 3GPP TS 32.752 [23], IOC, ExternalMMEFunction | ExternalMMEFunction |
| 3GPP TS 32.642 [21], IOC, UtranRelation | UtranRelation |
| 3GPP TS 32.792 [31], IOC, AntennaFunction | AntennaFunction |
| 3GPP TS 32.792 [31], IOC, TmaFunction | TmaFunction |
| 3GPP TS 32.652 [20], IOC, GsmRelation | GsmRelation |
| 3GPP2 TS S.S0028 [22], IOC, ExternalSector | ExternalSector |
| 3GPP TS 32.752 [23], IOC, EP_RP_EPS | EP_RP_EPS |
| 3GPP TS 32.752 [23], IOC, QCISet | QCISet |
| 3GPP TS 32.792 [31], IOC, SectorEquipmentFunction | SectorEquipmentFunction |
| 3GPP TS 32.522 [42], IOC, EnergySavingProperties | EnergySavingProperties |

6.2 Class diagram

6.2.1 Attributes and relationships


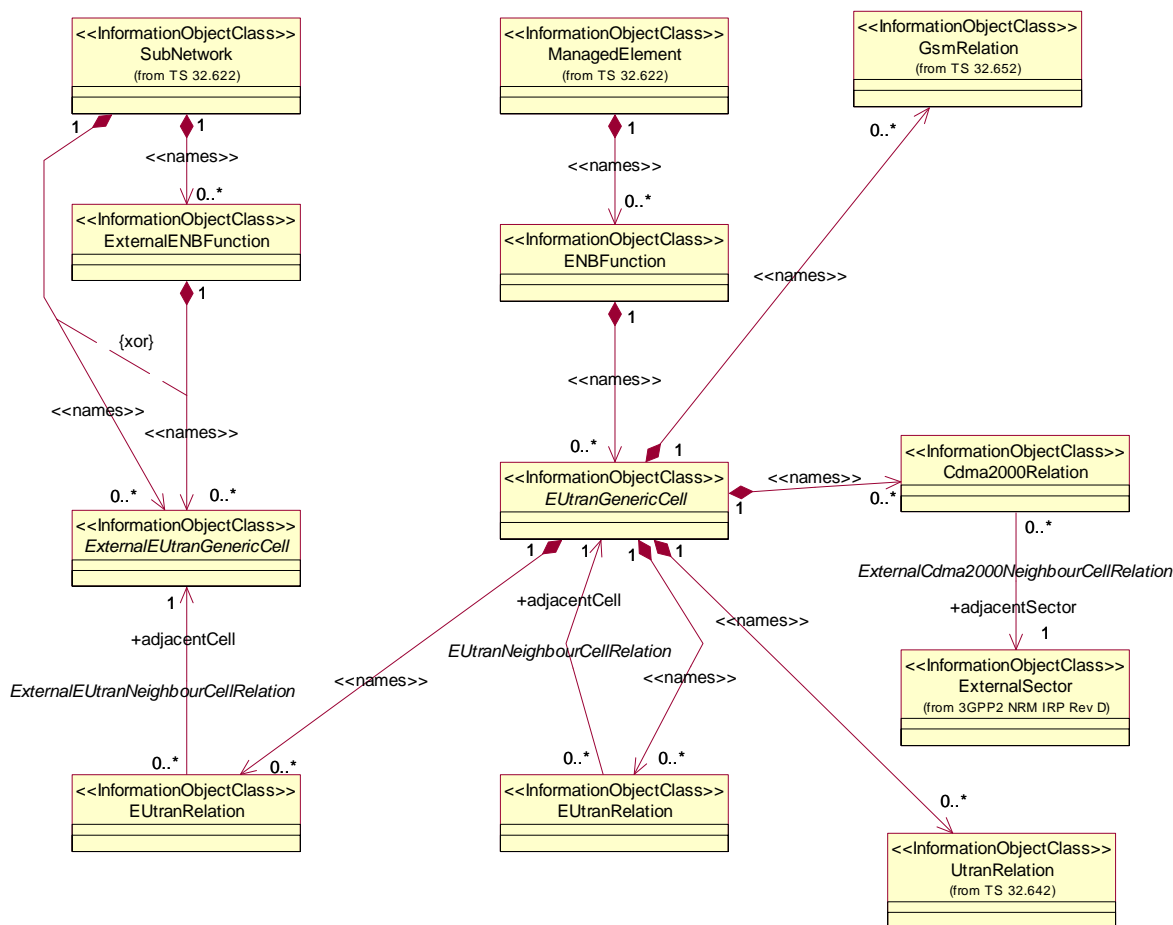


Figure 6.2.1.1: Cell view of E-UTRAN NRM

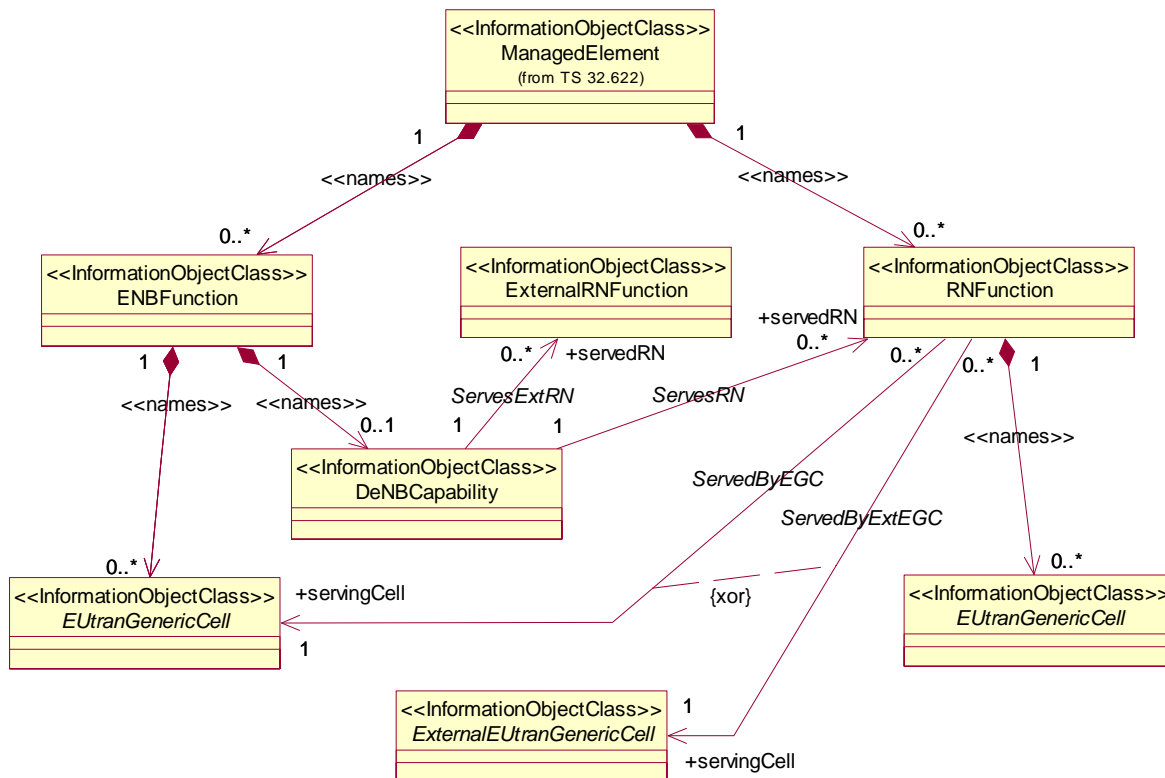

NOTE 1: If an instance of the *ServesRN* association is present, then a corresponding instance of *ServedByEGC* must be present. In this case, the ENBFunction and RNFunction instances are under the management scope of the same IRP Agent.
 If an instance of the *ServesExtRN* association is present, then a corresponding instance of *ServedByExtEGC* must be present. In this case, the ENBFunction and RNFunction instances are under the management scope of two different IRP Agents.

NOTE 2: The modelling of the DeNB capability as a separate IOC or as attributes of ENBFunction is FFS

Figure 6.2.1.2a: E-UTRAN relaying view of E-UTRAN NRM

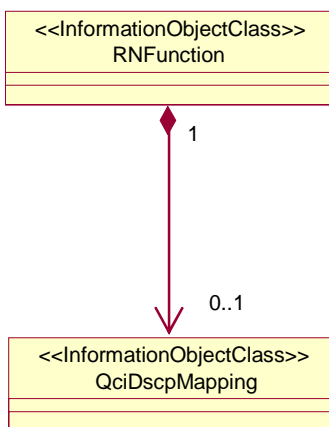


Figure 6.2.1.2b: E-UTRAN relaying view of E-UTRAN NRM_2

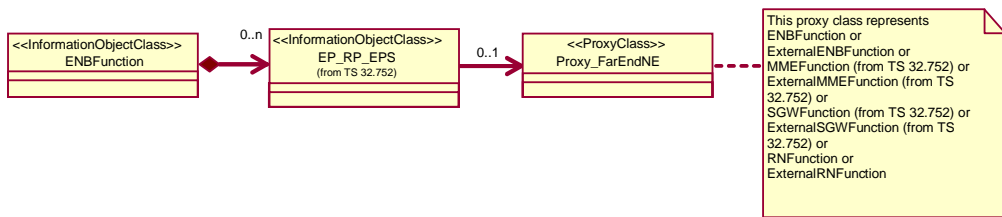


Figure 6.2.1.3: Transport view of E-UTRAN NRM

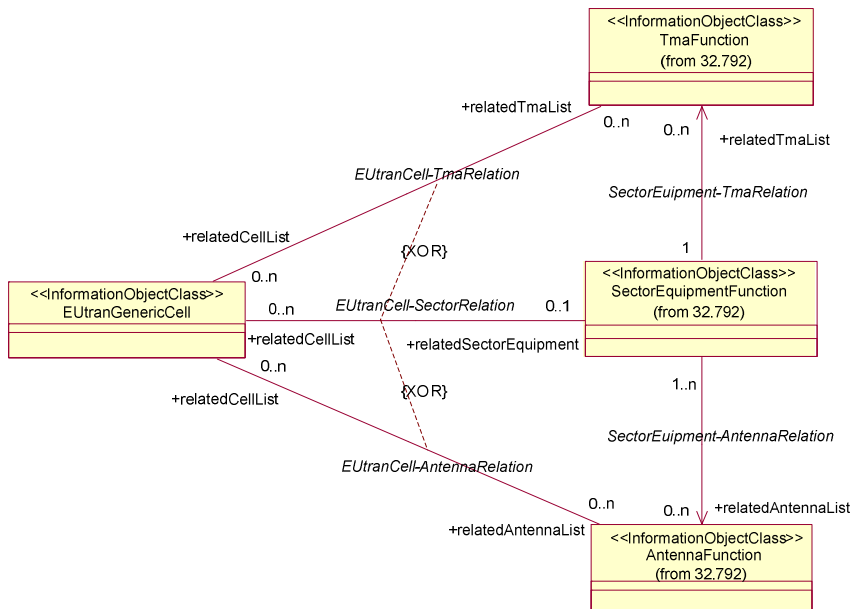


Figure 6.2.1.4: Radio equipment view of E-UTRAN NRM

NOTE: Please see TS 32.792 [31] for the definitions of the associations in this figure.

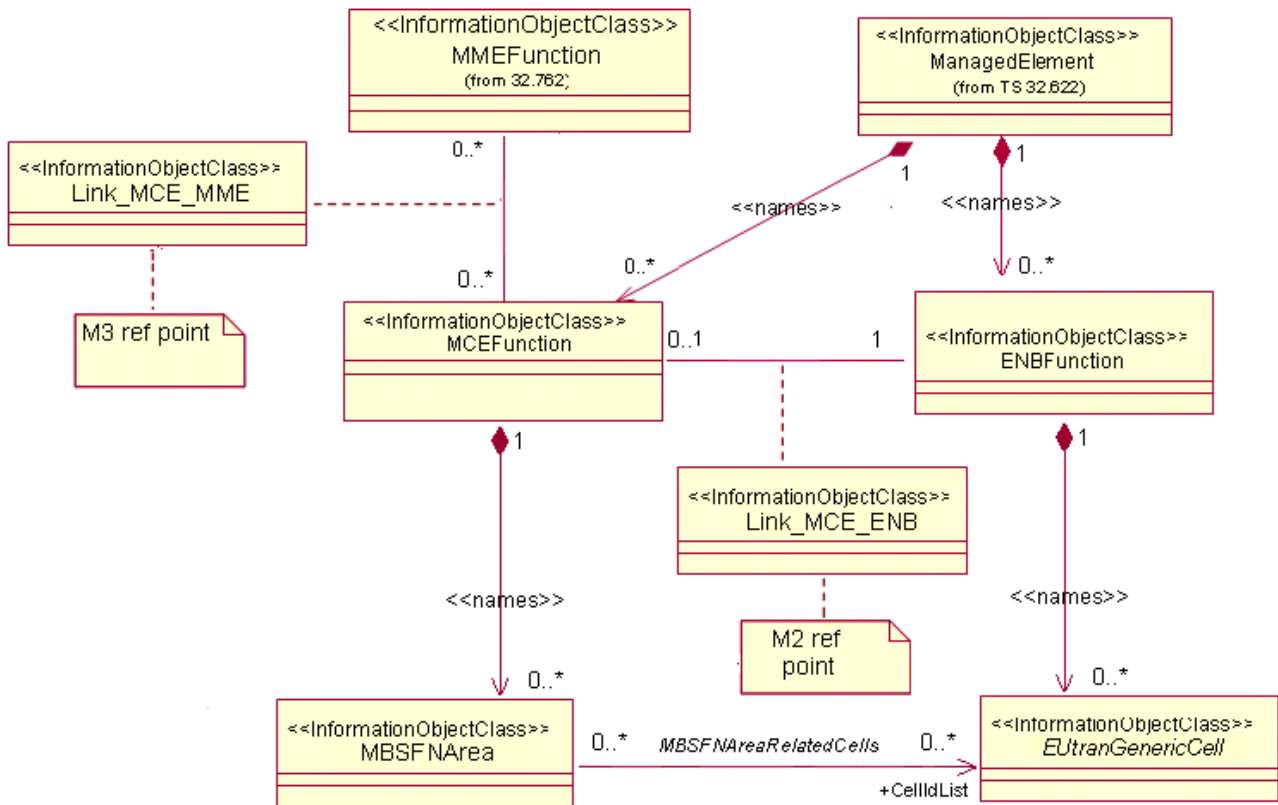


Figure 6.2.1.5: MBMS view of E-UTRAN NRM 1

NOTE 1: This is E-UTRAN NRM containment/relationship Figure form view of MBMS when MCE and ENB belong to one Network Element.

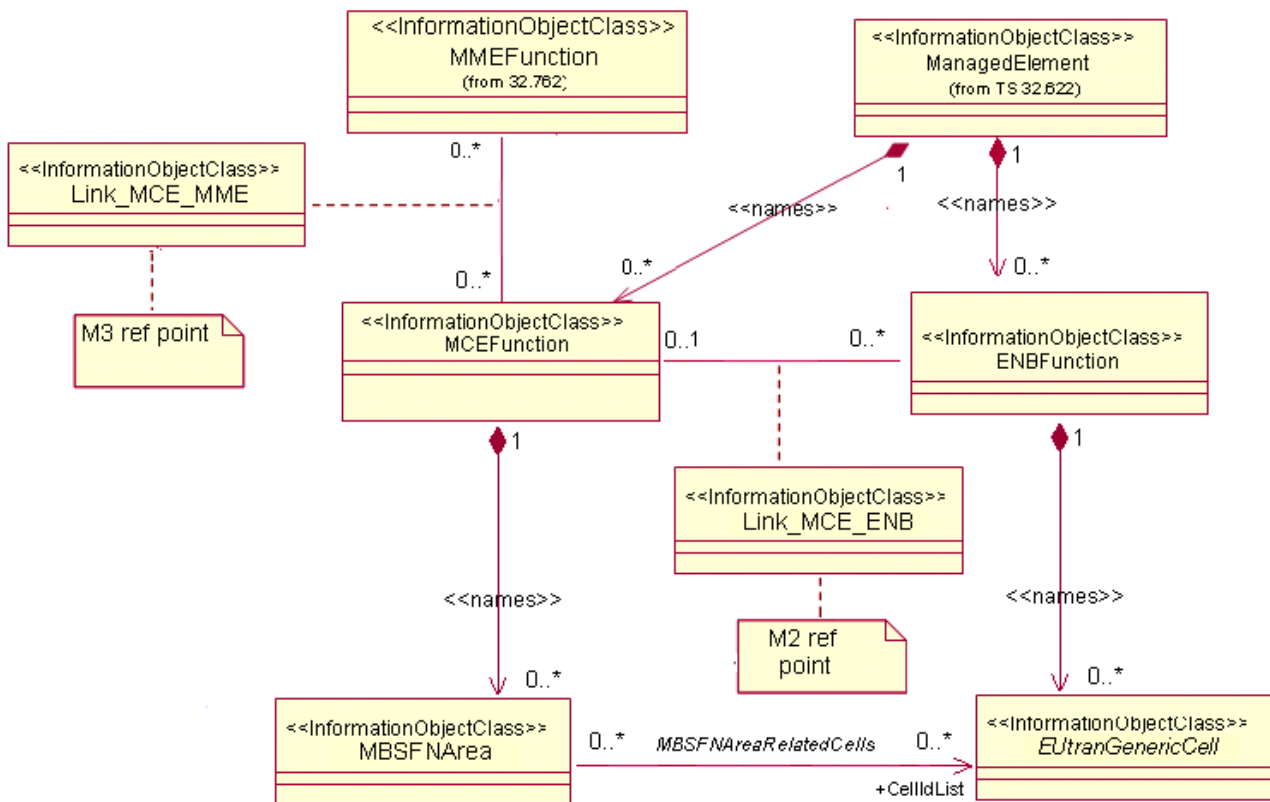


Figure 6.2.1.6: MBMS view of E-UTRAN NRM 2

NOTE 2: This is E-UTRAN NRM containment/relationship Figure form view of MBMS when MCE and ENB belong to different Network Elements.

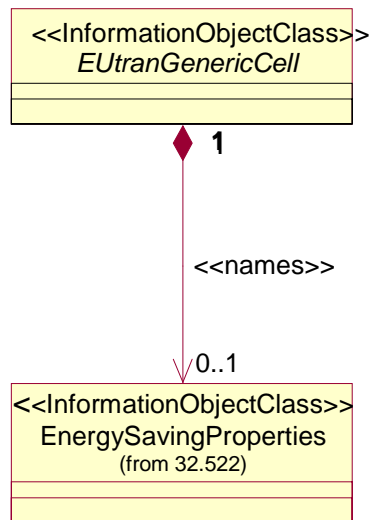


Figure 6.2.1.7: Energy Saving view of E-UTRAN NRM

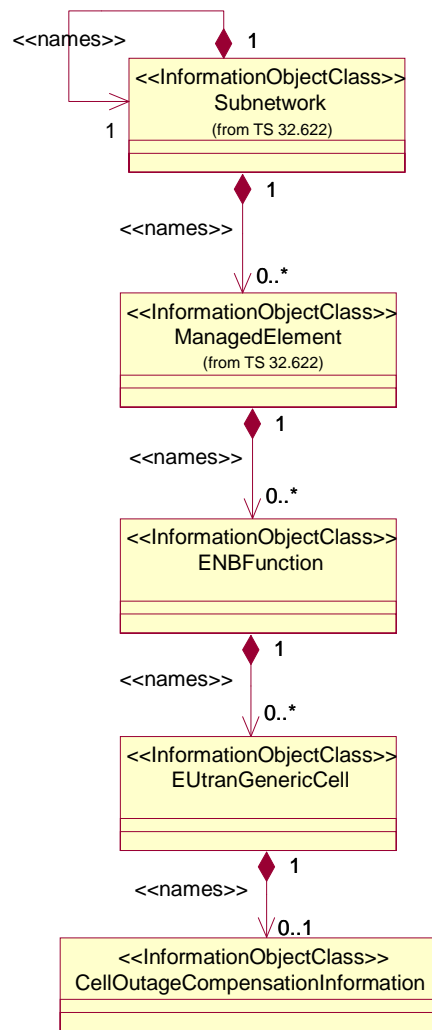


Figure 6.2.1.8: Cell Outage Compensation NRM IOCs (Containment Relationship)




Figure 6.2.1.9: Cell SON Attributes NRM IOCs (Containment Relationship)

6.2.2 Inheritance

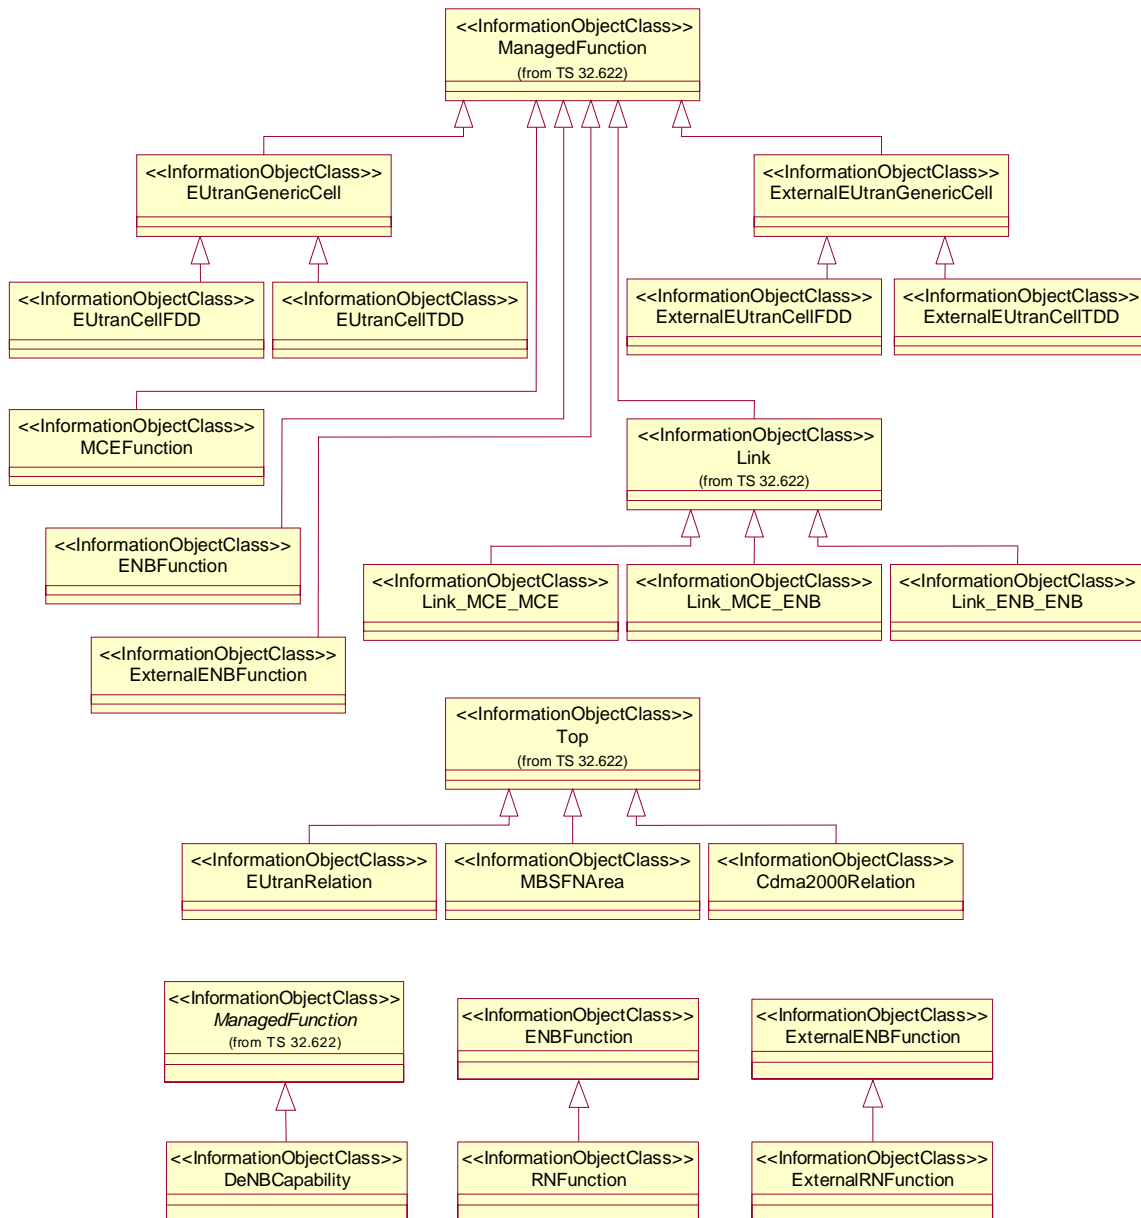


Figure 6.2.2.1: E-UTRAN NRM Inheritance Hierarchy

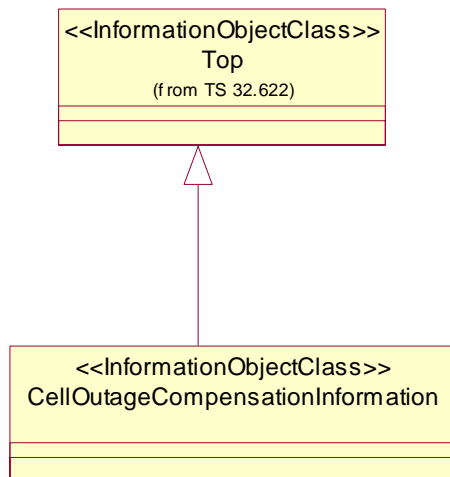


Figure 6.2.2.2: Cell Outage Compensation NRM IOCs (Inheritance Relationship)

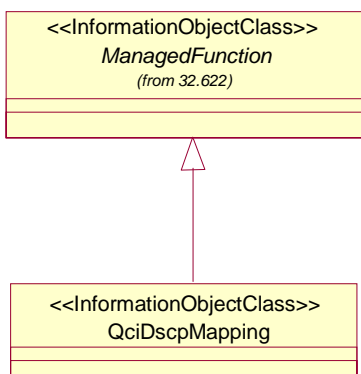


Figure 6.2.2.3: EPC NRM Inheritance Hierarchy_2

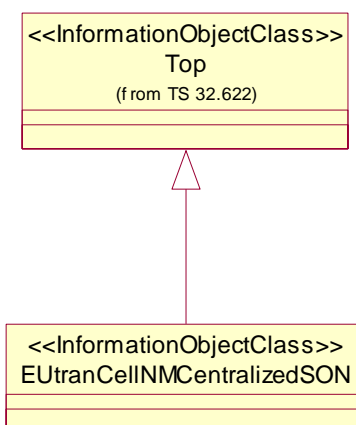


Figure 6.2.2.4: Cell SON Attributes NRM IOCs (Inheritance Relationship)

6.3 Information Object Class (IOC) definitions

6.3.1 ENBFunction

6.3.1.1 Definition

This IOC represents eNB functionality. For more information about the eNB, see 3GPP TS 23.002 [19].

6.3.1.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|---------------------------|-------------------|----------------|-----------------|
| id | M | M | - |
| intraANRSwitch | CM | M | M |
| iRATANRSwitch | CM | M | M |
| eNBId | M | M | - |
| x2BlackList | CM | M | M |
| x2WhiteList | CM | M | M |
| x2HOBlackList | CM | M | M |
| x2IpAddressList | O | M | - |
| tceIDMappingInfoList | CM | M | M |
| sharNetTceMappingInfoList | CM | M | M |

6.3.1.3 Attribute constraints

| Name | Definition |
|----------------------------------|---|
| intraANRSwitch Support Qualifier | The condition is 'ANR function is supported'. |
| iRATANRSwitch Support Qualifier | The condition is 'ANR function is supported'. |
| x2BlackList Support Qualifier | The condition is "ANR function is supported". |
| x2WhiteList Support Qualifier | The condition is "ANR function is supported". |
| x2HOBlackList Support Qualifier | The condition is "ANR function is supported". |
| tceIDMappingInfoList | The condition is 'MDT function is supported' . |
| sharNetTceMappingInfoList | The condition is 'MDT function and when several PLMNs are supported'. |

6.3.1.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.2 ExternalENBFunction

6.3.2.1 Definition

This IOC represents an external eNB functionality. For more information about the eNB, see 3GPP TS 23.002 [19].

6.3.2.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |
| eNBId | M | M | M |

6.3.2.3 Attribute constraints

None.

6.3.2.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, without exceptions or additions.

6.3.3 EUTranGenericCell

6.3.3.1 Definition

This abstract IOC represents the common properties of an E-UTRAN generic cell. For more information about cells, see 3GPP TS 23.401 [9].

6.3.3.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|--------------------------------|-------------------|----------------|-----------------|
| id | M | M | - |
| cellLocalId | M | M | M |
| cellSize | M | M | M |
| plmnIdList | M | M | M |
| tac | M | M | M |
| pci | M | M | CM |
| pciList | CM | M | M |
| maximumTransmissionPower | M | M | CM |
| referenceSignalPower | M | M | M |
| pb | M | M | M |
| partOfSectorPower | CM | M | M |
| relatedTmaList | CO | M | - |
| relatedAntennaList | CO | M | - |
| relatedSector | CM | M | - |
| cellResvInfo | CM | M | M |
| allowedAccessClasses | M | M | M |
| isChangeForEnergySavingAllowed | CM | M | M |

| Attribute Name | Support Qualifier | Read Qualifier | Write Qualifier |
|---------------------|-------------------|----------------|-----------------|
| operationalState | O | M | - |
| administrativeState | O | M | M |
| availabilityStatus | O | M | - |

NOTE: No state or status propagation shall be implied.

6.3.3.3 Attribute constraints

| Name | Definition |
|---|---|
| pci CM Write Qualifier | NM-Centralized PCI assignment (see TS 32.500, ref [15] subclause 6.1.6) is supported. |
| pciList CM Support Qualifier | Either EM-Centralized or Distributed PCI assignment (see TS 32.500, ref [15] subclause 6.1.6) is supported. |
| partOfSectorPower CM support qualifier | The IOC <code>SectorEquipmentFunction</code> is used. |
| maximumTransmissionPower CM Write Qualifier | The IOC <code>SectorEquipmentFunction</code> is not used. |
| relatedTmaList CO Support Qualifier | The IOC <code>SectorEquipmentFunction</code> is not used. |
| relatedAntennaList CO Support Qualifier | The IOC <code>SectorEquipmentFunction</code> is not used. |
| relatedSector CM Support Qualifier | The IOC <code>SectorEquipmentFunction</code> is used. |
| cellResvInfo CM Support Qualifier | The MBSFN Transmission (see TS 36.300, ref[11] subclause 15.3.3) is supported. |
| isChangeForEnergySavingAllowed CM Support Qualifier | The energy saving functionality is supported and uses distributed architecture. |

6.3.3.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.4 ExternalEUTranGenericCell

6.3.4.1 Definition

This abstract IOC represents the properties of an E-UTRAN generic cell controlled by another IRPAgent. This IOC contains necessary attributes for inter-system and intra-system handover. It also contains a subset of the attributes of related IOCs controlled by another IRPAgent. The way to maintain consistency between the attribute values of these IOCs is outside the scope of the present document.

6.3.4.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |
| pci | M | M | M |
| plmnIdList | M | M | M |
| cellLocalId | M | M | M |
| eNBId | CM | M | M |

6.3.4.3 Attribute constraints

| Name | Definition |
|----------------------------|---|
| eNBId CM Support Qualifier | This instance of ExternalEUTranGenericCell IOC is directly contained by SubNetwork. |

6.3.4.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, without exceptions or additions.

6.3.5 EUTranCellFDD

6.3.5.1 Definition

This IOC represents the properties of E-UTRAN FDD cell.

6.3.5.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| earfcnDl | M | M | M |
| earfcnUl | M | M | M |

6.3.5.3 Attribute constraints

None.

6.3.5.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.6 ExternalEUTranCellFDD

6.3.6.1 Definition

This IOC represents the common properties of external E-UTRAN FDD cell.

6.3.6.2 Attributes

Table 6.3.5.2.1: Attributes of ExternalEUTranCellFDD

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| earfcnDl | M | M | M |
| earfcnUl | M | M | M |

6.3.6.3 Attribute constraints

None.

6.3.6.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, without exceptions or additions.

6.3.7 EUTranCellTDD

6.3.7.1 Definition

This IOC represents the properties of E-UTRAN cell TDD.

6.3.7.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|-------------------|-------------------|----------------|-----------------|
| earfcn | M | M | M |
| sfAssignment | M | M | M |
| specialSfPatterns | M | M | M |

6.3.7.3 Attribute constraints

None.

6.3.7.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.8 ExternalEUTranCellTDD

6.3.8.1 Definition

This IOC represents the common properties of external E-UTRAN cell TDD.

6.3.8.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| earfcn | M | M | M |

6.3.8.3 Attribute constraints

None.

6.3.8.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, without exceptions or additions.

6.3.9 EUTranRelation

6.3.9.1 Definition

This IOC represents a NR from a source cell to a target cell, where the target cell is a EUTranGenericCell or ExternalEUTranGenericCell instance.

The source cell can be an EUTranGenericCell instance. This is the case for an Intra-E-UTRAN NR.

The source cell can be a UtranGenericCell instance. This is the case for Inter-RAT NR from UTRAN to E-UTRAN. See 3GPP TS 32.642 [21].

The source cell can be a GsmCell instance. This is the case for Inter-RAT NR from GERAN to E-UTRAN. See 3GPP TS 32.652 [20].

NRs are unidirectional.

6.3.9.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|------------------------------|-------------------|----------------|-----------------|
| id | M | M | - |
| tCI | O | M | M |
| isRemoveAllowed | CM | M | M |
| isHOAllowed | CM | M | M |
| adjacentCell | M | M | M |
| isICICInformationSendAllowed | CM | M | M |
| isLBAllowed | CM | M | M |
| isESCoveredBy | CM | M | M |
| qOffset | CM | M | M |
| cellIndividualOffset | CM | M | - |

6.3.9.3 Attribute constraints

| Name | Definition |
|--|--|
| isRemoveAllowed Support Qualifier | The condition is "ANR function is supported in the source cell, and the source cell is an EUTranGenericCell or a UtranGenericCell". |
| isHOAllowed Support Qualifier | The condition is "ANR function is supported in the source cell, and the source cell is an EUTranGenericCell or a UtranGenericCell". |
| isICICInformationSendAllowed Support Qualifier | The condition is "ICIC function is supported". |
| isLBAllowed Support Qualifier | The condition is "LB function is supported". |
| isESCoveredBy Support Qualifier | The condition is "Energy Saving function is supported". |
| qOffset Support Qualifier | The condition is "Neither an EM-centralized nor a distributed SON function support the SON use cases for which this attribute is relevant (see §6.5.1)". |
| cellIndividualOffset Support Qualifier | The condition is "HOO function is supported" or "Load Balancing Optimization function is supported". |

6.3.9.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.10 Link_ENB_ENB

6.3.10.1 Definition

This IOC represents the link between two ENBFunction.

6.3.10.2 Attributes

None.

6.3.10.3 Attribute constraints

None.

6.3.10.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.11 Void

6.3.12 Void

6.3.13 Cdma2000Relation

6.3.13.1 Definition

This IOC represents a NR from one EUTranGenericCell to a CDMA2000 sector. NRs are directional.

See 3GPP2 TS S.S0028 [22]

6.3.13.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |
| adjacentSector | M | M | - |

6.3.13.3 Attribute constraints

None.

6.3.13.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.14 MCEFunction

6.3.14.1 Definition

This IOC represents MCE functionality. For more information about the MCE, see 3GPP TS 36.300 [11].

6.3.14.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |

6.3.14.3 Attribute constraints

None.

6.3.14.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.15 MBSFNArea

6.3.15.1 Definition

This IOC represents MBSFN Area. For more information about MBSFN Area, see 3GPP TS 36.300 [11].

6.3.15.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |
| mbsfnAreaId | M | M | M |
| cellIdList | M | M | M |

6.3.15.3 Attribute constraints

None.

6.3.15.4 Notifications

| Name | Qualifier | Notes |
|----------------------------|---|-------|
| notifyAttributeValueChange | See Kernel CM IRP (3GPP TS 32.662 [13]) | |
| notifyObjectCreation | See Kernel CM IRP (3GPP TS 32.662 [13]) | |
| notifyObjectDeletion | See Kernel CM IRP (3GPP TS 32.662 [13]) | |

6.3.16 Link_MCE_ENB

6.3.16.1 Definition

This IOC models the M2 reference point as defined in TS 36.300 [11].

6.3.16.2 Attributes

None.

6.3.16.3 Attribute constraints

None.

6.3.16.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.17 Link_MCE_MME

6.3.17.1 Definition

This IOC models the M3 reference point as defined in TS 36.300 [11].

6.3.17.2 Attributes

None.

6.3.17.3 Attribute constraints

None.

6.3.17.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.18 RNFunction

6.3.18.1 Definition

This IOC represents Relay Node (RN) functionality. For more information about RN, see 3GPP TS 36.300 [11].

6.3.18.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|--------------------|-------------------|----------------|-----------------|
| candidateDeNBCells | M | M | M |
| servingCell | M | M | M |

Editor's note: the need of attribute `candidateDeNBCells` is for FFS.

6.3.18.3 Attribute constraints

None.

6.3.18.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.19 ExternalRNFunction

6.3.19.1 Definition

This IOC represents the properties of a Relay Node (RN) controlled by another IRP Agent. For more information about RN, see 3GPP TS 36.300 [11].

6.3.19.2 Attributes

None.

6.3.19.3 Attribute constraints

None.

6.3.19.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, without exceptions or additions.

6.3.20 DeNBCapability

6.3.20.1 Definition

This IOC represents the capability for an eNodeB to act as a Donor eNodeB (DeNB) functionality. For more information about the DeNB, see 3GPP TS 36.300 [11].

6.3.20.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| id | M | M | - |
| servedRN | M | M | M |
| maxNbrRAllowed | M | M | M |

6.3.20.3 Attribute constraints

None.

6.3.20.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.3.21 Void

6.3.22 Void

6.3.23 CellOutageCompensationInformation

6.3.23.1 Definition

This IOC represents information relevant in case of a Cell Outage Compensation taking place.

6.3.23.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|----------------|-------------------|----------------|-----------------|
| cOCStatus | M | M | - |
| isCOCAAllowed | M | M | M |

6.3.23.3 Attribute constraints

None.

6.3.23.4 Notifications

The common notifications defined in subclause 6.6.2 are valid for this IOC, with the addition that notifyAttributeValueChange shall be supported (Support Qualifier M).

6.3.24 IOC QciDscpMapping

6.3.24.1 Definition

This IOC represents a set of mapping between QCI and DSCP.

6.3.24.2 Attributes

| Attribute Name | Support Qualifier | Read Qualifier | Write Qualifier |
|--------------------|-------------------|----------------|-----------------|
| id | M | M | - |
| qciDscpMappingList | M | M | M |

6.3.24.3 Attribute constraints

Null.

6.3.24.4 Notifications

| Name | Qualifier | Notes |
|----------------------------|---|-------|
| notifyAttributeValueChange | See Kernel CM IRP (3GPP TS 32.662 [32]) | |
| notifyObjectCreation | See Kernel CM IRP (3GPP TS 32.662 [32]) | |
| notifyObjectDeletion | See Kernel CM IRP (3GPP TS 32.662 [32]) | |

6.3.25 EUTRANCellINMCentralizedSON

6.3.25.1 Definition

This abstract IOC represents the properties of an E-UTRAN generic cell which relate to SON functions. Its purpose is to enable configuration and tuning of the cell behaviour by the operator for SON functions which are not (yet) implemented in the eNodeB. NMS level SON should consider when configuring and tuning the cell the correlation of different attributes to optimise the eNodeB and network performance. For more information about cells, see 3GPP TS 23.401 [9].

6.3.25.2 Attributes

| Attribute name | Support Qualifier | Read Qualifier | Write Qualifier |
|------------------------------------|-------------------|----------------|-----------------|
| a1ThresholdRsrp | CM | M | M |
| a1ThresholdRsrq | CM | M | M |
| a2ThresholdRsrp | CM | M | M |
| a2ThresholdRsrq | CM | M | M |
| a3Offset | CM | M | M |
| a4ThresholdRsrp | CM | M | M |
| a4ThresholdRsrq | CM | M | M |
| a5Threshold1Rsrp | CM | M | M |
| a5Threshold1Rsrq | CM | M | M |
| b1ThresholdUtraRscp | CM | M | M |
| b1ThresholdUtraEcN0 | CM | M | M |
| b1ThresholdGeran | CM | M | M |
| b1ThresholdCdma2000 | CM | M | M |
| b2Threshold1Rsrp | CM | M | M |
| b2Threshold1Rsrq | CM | M | M |
| b2Threshold2UtraRscp | CM | M | M |
| b2Threshold2UtraEcN0 | CM | M | M |
| b2Threshold2Geran | CM | M | M |
| b2Threshold2Cdma2000 | CM | M | M |
| commonChannelPowerOffset | CM | M | M |
| configurationIndex | CM | M | M |
| contentionResolutionTimer | CM | M | M |
| hysteresisEutraA1 | CM | M | M |
| hysteresisEutraA2 | CM | M | M |
| hysteresisEutraA3 | CM | M | M |
| hysteresisEutraA4 | CM | M | M |
| hysteresisEutraA5 | CM | M | M |
| hysteresisIratB1 | CM | M | M |
| hysteresisIratB2 | CM | M | M |
| numberOfRaPreambles | CM | M | M |
| preambleInitialReceivedTargetPower | CM | M | M |
| preambleTransMax | CM | M | M |
| pMax | CM | M | M |
| powerRampingStep | CM | M | M |
| qHyst | CM | M | M |
| qOffsetUtra | CM | M | M |
| qOffsetGeran | CM | M | M |
| qOffsetCdma2000 | CM | M | M |
| qQualMinUtra | CM | M | M |
| qRxLevMinEUtraSib1 | CM | M | M |
| qRxLevMinEUtraSib3 | CM | M | M |
| qRxLevMinGeran | CM | M | M |
| qRxLevMinUtra | CM | M | M |
| responseWindowSize | CM | M | M |
| rootSequenceIndex | CM | M | M |
| sIntraSearch | CM | M | M |
| sizeOfRAPreamblesGroupA | CM | M | M |
| timeToTriggerEutraA1 | CM | M | M |
| timeToTriggerEutraA2 | CM | M | M |
| timeToTriggerEutraA3 | CM | M | M |
| timeToTriggerEutraA4 | CM | M | M |
| timeToTriggerEutraA5 | CM | M | M |
| timeToTriggerIratB1 | CM | M | M |
| timeToTriggerIratB2 | CM | M | M |
| tReselectionCdma2000 | CM | M | M |
| tReselectionEUtra | CM | M | M |
| tReselectionGeran | CM | M | M |
| tReselectionUtra | CM | M | M |
| tStoreUeContext | CM | M | M |

6.3.25.3 Attribute constraints

| Name | Definition |
|------------------------|--|
| All Support Qualifiers | The condition is "Neither an EM-centralized nor a distributed SON function support the SON use cases for which this attribute is relevant (see §6.5.1)". |

6.3.25.4 Notifications

The common notifications defined in subclause 6.6.1 are valid for this IOC, without exceptions or additions.

6.4 Information relationship definitions

6.4.1 EUTranNeighbourCellRelation (M)

6.4.1.1 Definition

This association represents the unidirectional Neighbour cell Relation (NR) from the `EUTranGenericCell` containing this `EUTranRelation` to another `EUTranGenericCell`.

6.4.1.2 Roles

| Name | Definition |
|---------------------------|---|
| <code>adjacentCell</code> | This role represents the associated <code>EUTranGenericCell</code> of an <code>EUTranNeighbourCellRelation</code> . |

6.4.1.3 Constraints

Associations `EUTranNeighbourCellRelation` and `ExternalEUTranNeighbourCellRelation` are mutually exclusive.

6.4.2 ExternalEUTranNeighbourCellRelation (M)

6.4.2.1 Definition

This association represents the unidirectional Neighbour cell Relation (NR) from the `EUTranGenericCell` containing this `EUTranRelation` to an `ExternalEUTranGenericCell`.

6.4.2.2 Roles

| Name | Definition |
|---------------------------|---|
| <code>adjacentCell</code> | This role represents the associated <code>ExternalEUTranGenericCell</code> of an <code>ExternalEUTranNeighbourCellRelation</code> . |

6.4.2.3 Constraints

Associations `EUTranNeighbourCellRelation` and `ExternalEUTranNeighbourCellRelation` are mutually exclusive.

6.4.3 ExternalCdma2000NeighbourCellRelation (M)

6.4.3.1 Definition

This association represents the unidirectional Neighbour cell Relation (NR) from the `EUtranGenericCell` containing this `Cdma2000Relation` to an `ExternalSector`.

6.4.3.2 Roles

| Name | Definition |
|-----------------------------|--|
| <code>adjacentSector</code> | This role represents the associated <code>ExternalSector</code> of an <code>ExternalCdma2000NeighbourCellRelation</code> . |

6.4.3.3 Constraints

6.4.4 Void

6.4.5 Void

6.4.6 Void

6.4.7 Void

6.4.8 Void

6.4.9 MBSFNAreaRelatedCells (M)

6.4.9.1 Definition

This association represents the unidirectional relationship from the `MBSFNArea` to the `EUtranGenericCells` it includes.

6.4.9.2 Roles

| Name | Definition |
|-------------------------|--|
| <code>cellIdList</code> | This role represents the associated <code>EUtranGenericCell</code> of a <code>MBSFNAreaRelatedCells</code> . |

6.4.9.3 Constraints

6.4.10 ServesRN (O)

6.4.10.1 Definition

This unidirectional association represents the relation between a `DeNB` (represented by an `ENBFunction` containing a `DeNBCapability`) and one or more served `RNFunction` instances.

6.4.10.2 Roles

| Name | Definition |
|-----------------------|--|
| <code>servedRN</code> | This role represents the <code>RN</code> instance served by a <code>DeNB</code> instance . |

6.4.10.3 Constraints

None.

6.4.11 ServedExtRN (O)

6.4.11.1 Definition

This unidirectional association represents the relation between a DeNB (represented by an ENBFunction containing a DeNBCapability) and one or more served ExternalRNFunction instances.

6.4.11.2 Roles

| Name | Definition |
|----------|---|
| servedRN | This role represents the external RN instance served by a DeNB instance . |

6.4.11.3 Constraints

None.

6.4.12 ServedByEGC (O)

6.4.12.1 Definition

This unidirectional association represents the relation between one or more RNs and their serving DeNB cell.

6.4.12.2 Roles

| Name | Definition |
|-------------|--|
| servingCell | This role represents the cell serving one or more RNFunction instances . |

6.4.12.3 Constraints

Associations ServedByEGC and ServedByExtEGC are mutually exclusive.

6.4.13 ServedByExtEGC (O)

6.4.13.1 Definition

This unidirectional association represents the relation between one or more RNs and their external serving DeNB cell (under another IRPAgent).

6.4.13.2 Roles

| Name | Definition |
|-------------|---|
| servingCell | This role represents the external cell serving one or more RNFunction instances . |

6.4.13.3 Constraints

Associations ServedByEGC and ServedByExtEGC are mutually exclusive.

6.5 Information attribute definitions

6.5.1 Definition and legal values

Table 6.5.1.1 defines the attributes that are present in several Information Object Classes (IOCs) of the present document.

Table 6.5.1.1: Attributes definitions and legal values

| Attribute Name | Definition | Legal Values |
|-----------------|---|--------------|
| a1ThresholdRsrp | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a1. Actual value is IE value -140 dBm. Corresponds to parameter a1-Threshold.Threshold-RSRP specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 97 |
| a1ThresholdRsrq | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a1. Actual value is (IE value -40)/2 dB. Corresponds to parameter a1-Threshold.Threshold-RSRQ specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 34 |
| a2ThresholdRsrp | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a2. Actual value is IE value -140 dBm. Corresponds to parameter a2-Threshold.Threshold-RSRP specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 97 |
| a2ThresholdRsrq | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a2. Actual value is (IE value -40)/2 dB. Corresponds to parameter a2-Threshold.Threshold-RSRQ specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 34 |
| a3Offset | Offset to be used in evaluation of EUTRA measurement report triggering condition for event a3. Mapping to values in dB is specified in [38]. Corresponds to parameter a3-Offset specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | -30 : 30 |
| a4ThresholdRsrp | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a4. Actual value is IE value -140 dBm. Corresponds to parameter a4-Threshold.Threshold-RSRP specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 97 |

| | | |
|----------------------|---|--|
| a4ThresholdRsrq | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a4. Actual value is (IE value -40)/2 dB. Corresponds to parameter a4-Threshold.Threshold-RSRQ specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 34 |
| a5Threshold1Rsrp | RSRP Threshold1 to be used in evaluation of EUTRA measurement report triggering condition for event a5. Actual value is IE value -140 dBm. Corresponds to parameter a5-Threshold1.Threshold-RSRP specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 97 |
| a5Threshold1Rsrq | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event a5. Actual value is (IE value -40)/2 dB. Corresponds to parameter a5-Threshold1.Threshold-RSRQ specified in ReportConfigEUTRA IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 34 |
| adjacentCell | This attribute contains the DN of a <code>EUtranGenericCell</code> or <code>ExternalEUtranGenericCell</code> . | |
| adjacentSector | This attribute contains the DN of an <code>ExternalSector</code> . | |
| allowedAccessClasses | This holds information for access classes (10-15) – [3GPP TS 22.011] that are allowed for the <code>eUTRANCell</code> . The access classes are: Class 10 – emergency call Class 11 - For PLMN Use. Class 12 - Security Services; Class 13 - Public Utilities (e.g. water/gas suppliers); Class 14 - Emergency Services; Class 15 - PLMN Staff; | The default value is all access classes are allowed See TS 22.011 [29] and 36.331 [10] for more details on the definition and SIB2 broadcast message definition |
| b1ThresholdCDMA2000 | Threshold to be used in CDMA2000 triggering condition for event b1. Mapping to actual dBm values is specified in 3GPP TS 45.008. Corresponds to parameter b1-ThresholdCDMA2000 specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:63 |
| b1ThresholdGERAN | Threshold to be used in GERAN triggering condition for event b1. Mapping to actual dBm values is specified in 3GPP TS 45.008. Corresponds to parameter b1-ThresholdGERAN specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:63 |

| | | |
|----------------------|--|--------|
| b1ThresholdUtraEcN0 | EcN0 threshold to be used in UTRA triggering condition for event b1. Mapping to actual dBm values is specified in 3GPP TS 25.133. Corresponds to parameter b1-ThresholdULTRA:utra-EcN0 specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:49 |
| b1ThresholdUtraRscp | RSCP threshold to be used in UTRA triggering condition for event b1. Mapping to actual dBm values is specified in 3GPP TS 25.133. Corresponds to parameter b1-ThresholdULTRA:utra-RSCP specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | -5 :91 |
| b2Threshold1Rsrp | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event b2. Actual value is IE value -140 dBm. Corresponds to parameter b2-Threshold1.Threshold-RSRP specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 97 |
| b2Threshold1Rsrq | RSRP Threshold to be used in evaluation of EUTRA measurement report triggering condition for event b2. Actual value is (IE value -40)/2 dB. Corresponds to parameter b2-Threshold1.Threshold-RSRQ specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0 : 34 |
| b2Threshold2Cdma2000 | Threshold to be used in CDMA2000 measurement report triggering condition for event b2. Mapping to actual dBm values is specified in [37]. Corresponds to parameter b2-Threshold2CDMA2000 specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:63 |
| b2Threshold2Geran | Threshold to be used in GERAN measurement report triggering condition for event b2. Mapping to actual dBm values is specified in [37]. Corresponds to parameter b2-Threshold2GERAN specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:63 |
| b2Threshold2UtraEcN0 | EcN0 threshold to be used in UTRA measurement report triggering condition for event b2. Mapping to actual dBm values is specified in 3GPP TS 25.133. Corresponds to parameter b2-Threshold2ULTRA:utra-EcN0 specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | 0:49 |

| | | |
|-----------------------|--|--|
| b2Threshold2UltraRscp | RSCP threshold to be used in UTRA measurement report triggering condition for event b2. Mapping to actual dBm values is specified in 3GPP TS 25.133. Corresponds to parameter b2-Threshold2ULTRA:utra-RSCP specified in ReportConfigInterRAT IE in [10]. This attribute may be used for Mobility Robustness Optimization. | -5 :91 |
| candidateDeNBCells | A list of ECGIs of the candidates DeNB cells for the subject Relay Node in Attach for RN operation (phase 2), see 36.300[4]. | See 3GPP TS 36.413[27], 36.300[4] |
| cellIdList | This holds a list of DN of EUTranGenericCell. These cells all belong to one MBSFN Area. | |
| cellIndividualOffset | Offset applicable to a neighbouring cell. It is used for evaluating the neighbouring cell for handover in connected mode. This attribute corresponds to parameter cellIndividualOffset in MeasObjectEUTRA IE in [10]. This attribute is used by the HandOver parameter Optimization (HOO) function or Load Balancing Optimization (LBO) function. | Enumerated : dB-24, dB-22, dB-20, dB-18, dB-16, dB-14, dB-12, dB-10, dB-08, dB-06, dB-05, dB-04, dB-03, dB-02, dB-01, dB+00, dB+01, dB+02, dB+03, dB+04, dB+05, dB+06, dB+08, dB+10, dB+12, dB+14, dB+16, dB+18, dB+20, dB+22, dB+24 |
| cellLocalId | Unambiguously identify a cell within an eNodeB | 0 - 255. |
| cellResvInfo | This attribute represents whether the cell is MBSFN Area Reserved Cell or not. See TS 36.300[11] for MBSFN Area Reserved Cell. | See 3GPP TS 36.443 [28] for Cell Reservation Info. |
| cellSize | See cell-Size in TS 36.423 [24]. | See cell-Size in TS 36.423 [24]. |

| | | |
|---------------------------|--|--|
| cOCStatus | <p>This attribute holds the information about cell outage compensation (COC) activities for the cell which name contains the CellOutageCompensationInformation IOC instance.</p> <p>The initial state is cOCDeactive.</p> <p>When a cell outage is detected and its compensation starts, then the state is cOCActivating.</p> <p>When COC function decides that all activities to activate the compensation are done, the state changes to cOCActive.</p> <p>When outage of cell is ended and activities to remove the compensation are ongoing, the state changes to cOCDeactivating.</p> <p>When outage of cell ends and all activities to remove the compensation are done, the state changes back to cOCDeactive.</p> <p>When a cell begins compensation of an outaged neighbouring cell, its state should change to cOCCompensating.</p> <p>When a cell ends compensation of an outaged neighbouring cell, its state should change to cOCDeactive.</p> <p>In case of errors during activation or deactivation, this attribute also contains a list of elements which could not be reconfigured by the COC function.</p> <p>If there are no errors during activation or deactivation, the list of elements shall be empty.</p> <p>For an example how notifyAttributeValueChange notifications related to this attribute are used to inform an IRPManager about COC activities see Annex A.</p> | <p>This element contains 2 parts, state and errorList</p> <pre>state = enumerated { cOCActivating, cOCActive, cOCDeactivating, cOCDeactive, cOCCompensating }</pre> <p>errorList = list of DNs</p> |
| commonChannelPowerOffset | <p>Power offset of the Primary Synchronization Channel, Secondary Synchronization Channel and Physical Broadcast Channel with respect to the referenceSignalPower. Value in dB is the actual value divided by 10. For example, value -30 represents -3dB; value 120 represent 12dB etc.</p> <p>This attribute may be used for Coverage and Capacity Optimization and ICIC.</p> | -350:150 |
| configurationIndex | <p>Provides index into the table defining PRACH resources within the frame. Corresponds to PRACH-Configuration-Index parameter defined in [10] and [12].</p> <p>This attribute may be used for RACH Optimization.</p> | 0 : 63 |
| contentionResolutionTimer | <p>Contention resolution timer. Corresponds to parameter mac-ContentionResolutionTimer specified in [10] and in [40]. Value sfn corresponds to n subframes.</p> <p>This attribute may be used for RACH Optimization.</p> | {sf8, sf16, sf24, sf32, sf40, sf48, sf56, sf64} |

| | | |
|-------------------|---|---|
| earfcn | It is the frequency number for the central frequency. See 3GPP TS 36.104[14]. | See 3GPP TS 36.104[14]. |
| earfcnDl | Specifies the channel number for the central DL frequency. The mapping from channel number to physical frequency is described in 3GPP specification TS 36.101 [13] subclause 5.7.3. | See EARFCN in TS 36.101 [13] subclause 5.7.3 |
| earfcnUl | Specifies the channel number for the central UL frequency. The mapping from channel number to physical frequency is described in 3GPP specification TS 36.101 [13] subclause 5.7.3. | See EARFCN in TS 36.101 [13] subclause 5.7.3. |
| eNBId | Unambiguously identifies an eNodeB within a PLMN | See 3GPP TS 36.413[27], 36.300[4] |
| | | |
| hysteresisEutraA1 | Hysteresis applied to entry and leave condition of a report triggering event A1. Maps to the instance of the <i>hysteresis</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A1. This attribute may be used for Mobility Robustness Optimization. | 0 : 30 |
| hysteresisEutraA2 | Hysteresis applied to entry and leave condition of a report triggering event A2. Maps to the instance of the <i>hysteresis</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A2. This attribute may be used for Mobility Robustness Optimization. | 0 : 30 |
| hysteresisEutraA3 | Hysteresis applied to entry and leave condition of a report triggering event A3. Maps to the instance of the <i>hysteresis</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A3. This attribute may be used for Mobility Robustness Optimization. | 0 : 30 |
| hysteresisEutraA4 | Hysteresis applied to entry and leave condition of a report triggering event A4. Maps to the instance of the <i>hysteresis</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A4. This attribute may be used for Mobility Robustness Optimization. | 0 : 30 |
| hysteresisEutraA5 | Hysteresis applied to entry and leave condition of a report triggering event A5. Maps to the instance of the <i>hysteresis</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A5. This attribute may be used for Mobility Robustness Optimization. | 0 : 30 |
| hysteresisIratB1 | Hysteresis applied to entry and leave condition of the IRAT report triggering event B1. Maps to <i>hysteresis</i> IE specified in <i>ReportConfigInterRAT</i> IE in [10] corresponding to event B1. This attribute may be used for Mobility Robustness Optimization. | 0 :30 |

| | | |
|--------------------------------|---|------------------|
| hysteresisIratB2 | <p>Hysteresis applied to entry and leave condition of the IRAT report triggering event B2. Maps to <i>hysteresis</i> IE specified in <i>ReportConfigInterRAT</i> IE in [10] corresponding to event B2.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 :30 |
| id | <p>An attribute whose "name+value" can be used as an RDN when naming an instance of the object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance.</p> | |
| intraANRSwitch | <p>This attribute determines whether the intra E-UTRAN ANR function is activated or deactivated.</p> <p>If 'on', the intra E-UTRAN ANR function may add or remove intra E-UTRAN Neighbour Relations, i.e. add or remove <i>EUtranRelation</i> instances from <i>EUtranGenericCells</i> of this <i>ENBFunction</i>.</p> <p>If 'off', the intra E-UTRAN ANR Function must not add or remove Neighbour Relations, i.e. add or remove <i>EUtranRelation</i> instances from <i>EUtranGenericCells</i> of this <i>ENBFunction</i>.</p> | on, off |
| iRATANRSwitch | <p>This attribute determines whether the IRAT ANR function is activated or deactivated.</p> <p>If 'on', the IRAT ANR function may add or remove IRAT Neighbour Relations, i.e. add or remove <i>UtranRelation</i> or <i>GsmRelation</i> instances from <i>EUtranGenericCells</i> of this <i>ENBFunction</i>.</p> <p>If 'off', the IRAT ANR Function must not add or remove IRAT Neighbour Relations, i.e. add or remove <i>UtranRelation</i> or <i>GsmRelation</i> instances from <i>EUtranGenericCells</i> of this <i>ENBFunction</i>.</p> | on, off |
| isChangeForEnergySavingAllowed | <p>This attribute allows to <i>IRPManager</i> to prohibit or allow configuration changes of the cell for ESM purposes by the <i>IRPAgent</i>. This restriction also applies to instances name contained in such cells. Their attribute values can not be changed by the <i>IRPAgent</i>.</p> | yes, no |
| isCOAllowed | <p>This attribute allows to <i>IRPManager</i> to prohibit or allow configuration changes of the cell for cell outage compensation purposes by the <i>IRPAgent</i>. This restriction also applies to instances name contained in such cells. Their attribute values can not be changed by the <i>IRPAgent</i>.</p> | yes, no |
| isESCoveredBy | <p>The value of the attribute is configured by the <i>IRPmanager</i> and is not changed by the <i>IRPAgent</i>. It indicates whether the adjacentCell according to this planning provides no, partial or full coverage for the cell which name-contains the <i>EUtranRelation</i> instance.</p> <p>Adjacent cells with this attribute equal to 'yes' are recommended to be considered as candidate cells to take over the coverage when the original cell is about to be transferred to energySaving state. The entirety of adjacent cells with this property equal to 'partial' are recommended to be considered as entirety of candidate cells to take over the coverage when the original cell is about to be transferred to energySaving state.</p> | No, partial, yes |

| | | |
|------------------------------|---|--|
| isHOAllowed | <p>This indicates if HO is allowed or prohibited.</p> <p>If "yes", handover is allowed from source cell to target cell. The source cell is identified by the name-containing <code>EUtranGenericCell</code> or <code>UtranGenericCell</code> of the <code>EUtranRelation</code> that has the <code>isHOAllowed</code>. The target cell is referenced by the <code>EUtranRelation</code> that has this <code>isHOAllowed</code>.</p> <p>If "no", handover shall not be allowed.</p> | yes, no |
| isICICInformationSendAllowed | <p>This indicates if ICIC (Inter Cell Interference Coordination) load information message (see TS 36.423 [24] Section 9.1.2.1 LOAD INFORMATION) sending is allowed or prohibited.</p> <p>If "yes", ICIC load information message sending is allowed from source cell to target cell. The source cell is identified by the name-containing <code>EUtranGenericCell</code> of the <code>EUtranRelation</code> that has the <code>isICICInformationSendAllowed</code>. The target cell is referenced by the <code>EUtranRelation</code> that has this <code>isICICInformationSendAllowed</code>.</p> <p>If "no", ICIC load information message sending shall not be allowed.</p> | yes, no |
| isLBAllowed | <p>This indicates if load balancing is allowed or prohibited from source cell to target cell.</p> <p>If "yes", load balancing is allowed from source cell to target cell. The source cell is identified by the name-containing <code>EUtranGenericCell</code> of the <code>EUtranRelation</code> that has the <code>isLBAllowed</code>. The target cell is referenced by the <code>EUtranRelation</code> that has this <code>isLBAllowed</code>.</p> <p>If "no", load balancing shall be prohibited from source cell to target cell.</p> | yes, no |
| isRemoveAllowed | <p>This indicates if the subject <code>EUtranRelation</code> can be removed (deleted) or not.</p> <p>If "yes", the subject <code>EUtranRelation</code> instance can be removed (deleted).</p> <p>If "no", the subject <code>EUtranRelation</code> instance shall not be removed (deleted) by any entity but an <code>IRPManager</code>.</p> | yes, no |
| maximumTransmissionPower | This is the maximum possible for all downlink channels, used simultaneously in a cell, added together. | |
| maxNbrRNAllowed | This is an integer indicating the maximum number of RNs allowed to be connected. It is a number which can be configured by the operator to control the node/network load. | |
| mbsfnAreaId | This is the identifier of MBSFN Area. See TS 36.300[11] for MBSFN Area. | See 3GPP TS 36.443 [28] for <code>mbsfnAreald</code> |
| numberOfRaPreambles | <p>Number of non-dedicated random access preambles. Corresponds to parameter <code>numberOfRA-Preambles</code> specified in [10] and in [40]. Value <code>n4</code> corresponds to 4, <code>n8</code> corresponds to 8 and so on.</p> <p>This attribute may be used for RACH Optimization.</p> | { <code>n4,n8,n12,n16,n20,n24,n28,n32,n36,n40,n44,n48,n52,n56,n60,n64</code> } |

| | | |
|------------------------------------|---|---|
| partOfSectorPower | This is the requested part (i.e. %) of the total radio power available to the SectorEquipmentFunction. The requested % power should be allocated to the cell. | 1 : 100 |
| pb | P_B , which is described in Section 5.2 of TS 36.213 [25] | See 3GPP TS 36.213[25] |
| pci | This holds the Physical Cell Identity (PCI) of the cell (for NM-Centralized, EM-Centralized and Distributed PCI assignment cases). In the case of NM-Centralized PCI assignment, see TS 36.300, [11] subclause 22.3.5, IRPManager signals a specific value by writing this attribute. | See TS 36.211 [12] subclause 6.11 for legal values of pci. |
| pciList | This holds a list of physical cell identities that can be assigned to the pci attribute by eNB. The assignment algorithm is not specified. This attribute shall be supported if and only if the EM-Centralized or Distributed PCI Assignment is supported. See TS 32.500, ref [15] subclause 6.1.6. | See TS 36.211 [12] subclause 6.11 for legal values of pci. The number of pci in the list is 1 to 504. |
| plmnIdList | List of unique identities for PLMN. Note: A cell can broadcast up to 6 PLMN-id's. This is to support the case that one cell can be used by up to 6 operators' core networks. One member of plmnIdList is the primary PLMN Id. See TS 36.331 [10] section 6.2.2: SystemInformationBlockType1/cellAccessRelatedInformation/plmn-IdentityList is a SEQUENCE (SIZE (1..6)) | A list of at most six entries of PLMN Identifiers. The PLMN Identifier is composed of a Mobile Country Code (MCC) and a Mobile Network Code (MNC). See TS 23.003 [3] subclause 2.2 and 12.1. |
| pMax | This parameter is used to limit the allowed UE uplink transmission power on the serving EUTRA frequency. Value in dBm. Corresponds to parameter p-Max specified in SIB1 and SIB3 in [10]. This attribute may be used for RACH Optimization. | -30 : 33 |
| powerRampingStep | Power increase factor between subsequent random access preamble transmissions. Value in dB. Value dB2 corresponds to 2 dB and so on. Corresponds to parameter powerRampingStep specified in [10] and in [40]. This attribute may be used for RACH Optimization. | {dB0, dB2,dB4, dB6} |
| preambleInitialReceivedTargetPower | This parameter denotes the baseline for computation of the transmit power for random access power transmission. Corresponds to parameter preambleInitialReceivedTargetPower specified in [10] and in [40]. Value dBm-120 corresponds to -120 dBm and so on. This attribute may be used for RACH Optimization. | {dBm-120, dBm-118, dBm-116, dBm-114, dBm-112,dBm-110,dBm-108,dBm-106,dBm-104,dBm-102,dBm-100,dBm-98,dBm-96,dBm-94, dBm-92,dBm-90} |
| preambleTransMax | Maximum number of random access preamble transmissions. Corresponds to parameter preambleTransMax specified in [10] and in [40]. This attribute may be used for RACH Optimization. | {n3, n4, n5, n6, n7, n8, n10, n20, n50, n100, n200} |

| | | |
|--------------------|---|--|
| qciDscpMappingList | It is a list of mapping between QCI and DSCP, each mapping is a structure including the element QCI and DSCP; Wherein - QCI represents the number of the QCI (Ref. 3GPP TS 23.203[33]); - DSCP represents the DiffServ codepoint (Ref. 3GPP TS 23.207[34] and RFC 2474[35]). | For QCI, Ref. 3GPP TS 23.203[33]; For DSCP, Ref. RFC 2474[35] |
| qHyst | Hysteresis value applied to serving cell for evaluating cell ranking criteria. Value in dB. Corresponds to parameter q-Hyst specified in SIB3 in [10] and in [34]. This attribute may be used for Mobility Robustness Optimization. | {dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10, dB12, dB14, dB16, dB18, dB20, dB22, dB24} |
| qOffset | Offset applicable to a specific neighbouring cell used for evaluating the cell as a candidate for cell re-selection. Corresponds to parameter q-OffsetCell broadcast in SIB4 for intra-frequency cells and in SIB5 for inter-frequency cells, specified in [10]. This attribute may be used for Mobility Robustness Optimization. | {dB-24, dB-22, dB-20, dB-18, dB-16, dB-14, dB-12, dB-10, dB-8, dB-6, dB-5, dB-4, dB-3, dB-2, dB-1, dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10, dB12, dB14, dB16, dB18, dB20, dB22, dB24} |
| qOffsetCdma2000 | Indicates a CDMA2000-specific offset to be applied when evaluating triggering conditions for measurement reporting in connected mode. Corresponds to parameter offsetFreq included in the IE MeasObjectCDMA2000 specified in 3GPP TS 36.331. This value will apply to all CDMA2000 frequencies. This attribute may be used for Mobility Robustness Optimization. | -15..15 |
| qOffsetGeran | Indicates a GERAN-specific offset to be applied when evaluating triggering conditions for measurement reporting in connected mode. Corresponds to parameter offsetFreq included in the IE MeasObjectGERAN specified in 3GPP TS 36.331. . This value will apply to all GERAN frequencies. This attribute may be used for Mobility Robustness Optimization. | -15..15 |
| qOffsetUtra | Indicates a UTRA-specific offset to be applied when evaluating triggering conditions for measurement reporting in connected mode. Corresponds to parameter offsetFreq included in the IE MeasObjectUTRA specified in 3GPP TS 36.331. This value will apply to all UTRA frequencies. This attribute may be used for Mobility Robustness Optimization. | -15..15 |
| qQualMinUtra | Minimum required received Ec/Io level on this UTRA FDD carrier. Value in dB. Corresponds to parameter q-QualMin in SIB6 in [10] and in [30]. This attribute applies to all UTRA frequencies. This attribute may be used for Coverage and Capacity Optimization and ICIC | -24 :0 |

| | | |
|------------------------|---|---|
| qRxLevMinEUtraSib1 | Minimum required received RSRP level of a E-UTRA cell for cell selection. Actual value in dBm is obtained by multiplying by 2. Corresponds to parameter q-rxLevMin in SIB1 in [10] and in [34]. This attribute may be used for Coverage and Capacity Optimization and ICIC. | -70 :-22 |
| qRxLevMinEUtraSib3 | Minimum required received RSRP level for intra-frequency E-UTRA cell re-selection. Actual value in dBm is obtained by multiplying by 2. Corresponds to parameter q-rxLevMin in SIB3 in [10] and in [34]. This attribute may be used for Coverage and Capacity Optimization and ICIC. | -70 :-22 |
| qRxLevMinGeran | Minimum required received RSSI level on a GERAN frequency carrier for re-selection to a GERAN carrier. Actual value in dBm is value * 2 - 115. Corresponds to parameter q-rxLevMin in SIB7 in [10] and to RXLEV_ACCESS_MIN in [31]. This attribute applies to all GERAN frequencies. This attribute may be used for Coverage and Capacity Optimization and ICIC. | 0 : 63 |
| qRxLevMinUtra | Minimum required received RSCP level on a UTRA frequency carrier. Actual value in dBm is obtained by multiplying by 2 plus 1. Corresponds to parameter q-rxLevMin in SIB6 in [10] and in [30]. This attribute applies to all UTRA frequencies. This attribute may be used for Coverage and Capacity Optimization and ICIC. | -60 :-13 |
| referenceSignalPower | This defines the cell specific downlink reference signal transmit power, which is described in 3GPP TS 36.213[25] | See 3GPP TS 36.331[10] |
| relatedAntennaList | This is an attribute to list the DNs of AntennaFunction(s)(see TS 32.792[31]) that support the EUTranGenericCell. | See "relatedAntennaList" in Ref. 3GPP TS 32.792 [31] |
| relatedSectorEquipment | This is an attribute to the DN of SectorEquipmentFunction (see TS 32.792[31]) that support the EUTranGenericCell. | See "relatedSectorEquipment" in Ref. 3GPP TS 32.792 [31]. |
| relatedTmaList | This is an attribute to list the DNs of TmaFunction(s) (see TS 32.792[31]) that support the EUTranGenericCell. | See "relatedTmaList" in Ref. 3GPP TS 32.792 [31]. |
| responseWindowSize | Denotes the duration of the random access response window. Corresponds to parameter ra-ResponseWindowSize specified in 3GPP TS 36.331 section 6.3.2 and in 3GPP TS 36.321 section 5.1.4. Value sfn corresponds to n subframes. This attribute may be used for RACH Optimization. | Enum{sf2, sf3, sf4, sf5, sf6, sf7, sf8,sf10} |
| rootSequenceIndex | Logical root sequence index used to determine 64 physical RACH preamble sequences available in the cell. Corresponds to RACH_ROOT_SEQUENCE parameter defined in [10] and [12]. This attribute may be used for RACH Optimization. | 0 : 837 |
| servedRN | This attribute contains the DNs of one or more associated instances of RNFunction and ExternalRNFunction. | |
| servingCell | This attribute contains the DN of one associated instance of EutranGenericCell or ExternalEutranGenericCell. | |

| | | |
|---------------------------|---|--|
| sfAssignment | This is the uplink-downlink subframe configuration number of a TDD E-UTRAN cell. | See 3GPP TS 36.211[12]. |
| sharNetTceMappingInfoList | This attribute includes a list of elements. Each element is a list of shared PLMN Id (called "PLMN Target"), TCE ID and the corresponding TCE IP address. In case when several PLMNs and Logged MDT are supported, this attribute is used to translate from the TCE IP Address to TCE ID when a Logged MDT is ordered to the UE and to translate the TCE ID to TCE IP address when the UE has sent the log to the network. | See "Trace Collection Entity Address" and "Trace Collection Entity Id" in 3GPP TS 32.422 [25]. The "PLMN Target" shall be one of the PLMNs listed in <code>plmnIdList</code> . |
| sIntraSearch | Threshold for intra-frequency measurements. Actual value in dB is obtained by multiplying by 2. Corresponds to parameter <code>s-IntraSearch</code> specified in SIB3 in [10] and in [34]. This attribute may be used for Mobility Robustness Optimization. | 0: 31 |
| sizeOfRAPreamblesGroupA | Size of the random access preamble group A. Corresponds to parameter <code>sizeOfRA-PreamblesGroup</code> specified in [10] and [40]. This attribute may be used for RACH Optimization. | n4, n8, n12, n16, n20, n24, n28, n32, n36, n40, n44, n48, n52, n56, n60 |
| specialSfPatterns | This is the special subframe configuration number of a TDD E-UTRAN cell. | See 3GPP TS 36.211[12]. |
| tac | Common Tracking Area Code for the PLMNs. The identity used to identify tracking areas. | a) It is the Tracking Area Code (TAC). b) A cell can only broadcast one TAC. See TS 36.300 [11], section 10.1.7 (PLMNID and TAC relation). c) TAC is defined in TS 23.003 [3], section 19.4.2.3. |
| tceIDMappingInfoList | This attribute includes a list of TCE ID and the corresponding TCE IP address. It is used in Logged MDT case to provide the information to the eNodeB to get the corresponding TCE IP address when there is an MDT log received from the UE. This attribute is used if only one PLMN is supported.. | See 'Trace Collection Entity Address' and 'Trace Collection Entity Id' in 3GPP TS 32.422 [30]. |
| tCI | This is the Target Cell Identifier. It consists of E-UTRAN Cell Global Identifier (ECGI) and Physical Cell Identifier (PCI) of the target cell. The <code>EUTranRelation.tCI</code> identifies the target cell from the perspective of the <code>EUTranGenericCell</code> , the name-containing instance of the subject <code>EUTranRelation</code> instance. | The Target Cell Identifier is defined in TS 36.300 [11]. See TS 36.211 [12] subclause 6.11 for legal values of the PCI. |
| timeToTriggerEutraA1 | Time during which measurement report triggering condition needs to be met in order to trigger a measurement report for event A1. Maps to the <code>timeToTrigger</code> IE specified in <code>ReportConfigEUTRA</code> IE in [10] corresponding to event A1. Value <code>ms0</code> corresponds to 0 milliseconds etc. This attribute may be used for Mobility Robustness Optimization. | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |

| | | |
|----------------------|---|---|
| timeToTriggerEutraA2 | <p>Time during which measurement report triggering condition needs to be met in order to trigger a measurement report for event A2. Maps to the <i>timeToTrigger</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A2. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |
| timeToTriggerEutraA3 | <p>Time during which measurement report triggering condition needs to be met in order to trigger a measurement report for event A3. Maps to the <i>timeToTrigger</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A3. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |
| timeToTriggerEutraA4 | <p>Time during which measurement report triggering condition needs to be met in order to trigger a measurement report for event A4. Maps to the <i>timeToTrigger</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A4. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |
| timeToTriggerEutraA5 | <p>Time during which measurement report triggering condition needs to be met in order to trigger a measurement report for event A5. Maps to the <i>timeToTrigger</i> IE specified in <i>ReportConfigEUTRA</i> IE in [10] corresponding to event A5. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |
| timeToTriggerIratB1 | <p>Time during which IRAT measurement report triggering condition needs to be met in order to trigger IRAT measurement report for event B1. Maps to <i>timeToTrigger</i> IE specified in <i>ReportConfigInterRAT</i> IE in [10] corresponding to event B1. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |
| timeToTriggerIratB2 | <p>Time during which IRAT measurement report triggering condition needs to be met in order to trigger IRAT measurement report for event B2. Maps to <i>timeToTrigger</i> IE specified in <i>ReportConfigInterRAT</i> IE in [10] corresponding to event B2. Value ms0 corresponds to 0 milliseconds etc.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | {ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256, ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560, ms5120} |

| | | |
|----------------------|--|------------------------------------|
| tReselectionCdma2000 | <p>Cell reselection timer for reselection to a CDMA2000 band. Value in seconds. Corresponds to parameter t-ReselectionCDMA2000 specified in SIB8 in [10] and to TreselectionCDMA_HRPD or TreselectionCDMA_1xRTT in [34]</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 : 7 |
| tReselectionEutra | <p>Cell reselection timer for intra frequency E-UTRA cell reselection. Value in seconds. Corresponds to parameter t-ReselectionEUTRA specified in SIB3 in [10] and in [34].</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 : 7 |
| tReselectionGeran | <p>Cell reselection timer for reselection to a GERAN frequency carrier. Value in seconds. Corresponds to parameter t-ReselectionGERAN specified in SIB7 in [10] and to TreselectionGERA in [34].</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 : 7 |
| tReselectionUtra | <p>Cell reselection timer for reselection to a UTRA frequency carrier. Value in seconds. Corresponds to parameter t-ReselectionUTRA specified in SIB6 in [10] and in [34].</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 : 7 |
| tStoreUeContext | <p>The timer used for detection of too early HO. Corresponds to Tstore_UE_cntxt timer described in [11]. Value in 100 milliseconds.</p> <p>This attribute may be used for Mobility Robustness Optimization.</p> | 0 : 1023 |
| x2BlackList | <p>This is a list of DNs of ENBFunction and ExternalENBFunction. If the target node DN is a member of the source node's ENBFunction.x2BlackList, the source node is:</p> <ol style="list-style-type: none"> 1 Prohibited from sending X2 connection request to target node; 2 Forced to tear down established X2 connection to target node 3 Not allowed to accept incoming X2 connection request from target node. <p>The same DN may appear here and in ENBFunction.x2WhiteList. In such case, the DN in x2WhiteList shall be treated as if it is absent.</p> | |
| x2HOBlackList | <p>This is a list of DNs of ENBFunction. The ENBFunction.x2HOBlackList identifies a list of neighbour ENBFunction with whom the subject ENBFunction is prohibited to use X2 interface for HOs even if the X2 interface exists between them.</p> | |
| x2IpAddressList | <p>Represents one or more IP addresses used by ENBFunction for this ENBFunction's X2 Interface</p> | One or more IPv4 or IPv6 addresses |

| | | |
|-------------|---|--|
| x2WhiteList | <p>This is a list of DNs of ENBFunction and ExternalENBFunction. If the target node DN is a member of the source node"s ENBFunction.x2WhiteList, the source node :</p> <ul style="list-style-type: none"> - Is allowed to request the establishment of X2 connection with the target node; - Is not allowed to initiate the tear down of established X2 connection to target node <p>The same DN may appear here and in ENBFunction.x2BlackList. In such case, the DN here shall be treated as if it is absent.</p> | |
|-------------|---|--|

6.5.2 Constraints

None.

6.6 Common Notifications

6.6.1 Alarm and configuration notifications

| Name | Qualifier | Notes |
|--------------------------------|---------------------------------------|-------|
| notifyAckStateChanged | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyAttributeValueChange | O | |
| notifyChangedAlarm | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyClearedAlarm | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyNewAlarm | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyObjectCreation | O | |
| notifyObjectDeletion | O | |
| notifyComments | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyAlarmListRebuilt | See Alarm IRP (3GPP TS 32.111-2 [11]) | |
| notifyPotentialFaultyAlarmList | See Alarm IRP (3GPP TS 32.111-2 [11]) | |

Note that these notifications are issued based on occurrences on the IRPAgent IOC and not on occurrences on other IOCs.

6.6.2 Configuration notifications

| Name | Qualifier | Notes |
|----------------------------|-----------|-------|
| notifyAttributeValueChange | O | |
| notifyObjectCreation | O | |
| notifyObjectDeletion | O | |

Note that these notifications are issued based on occurrences on the IRPAgent IOC and not on occurrences on other IOCs.

6.7 System State Model

None.

Annex A (informative): Notifications during a Cell Outage Compensation

The following sequence diagrams and table show an example how notifications of IOC CellOutageCompensationInformation and other notifications are used to inform an IRPManager about the COC activities.

The sequence diagrams show the basic event flow, the table gives more details on selected, most relevant, content of the notifications.

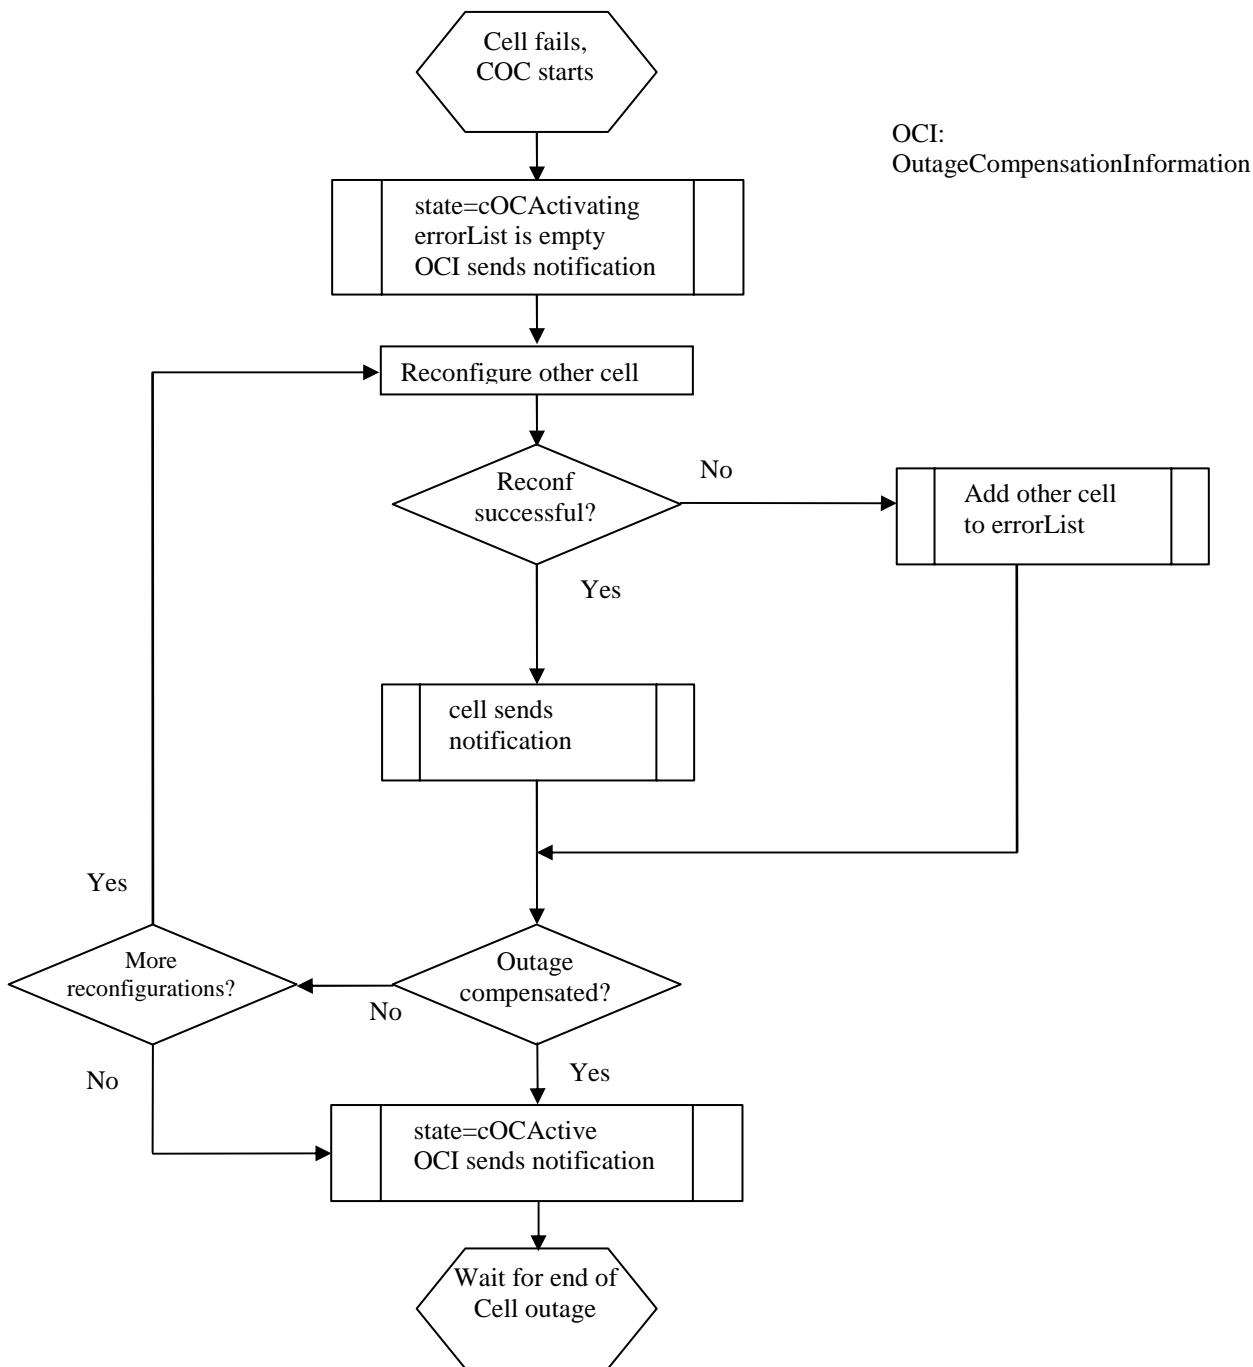


Figure A-1: Sequence diagram of COC, part 1

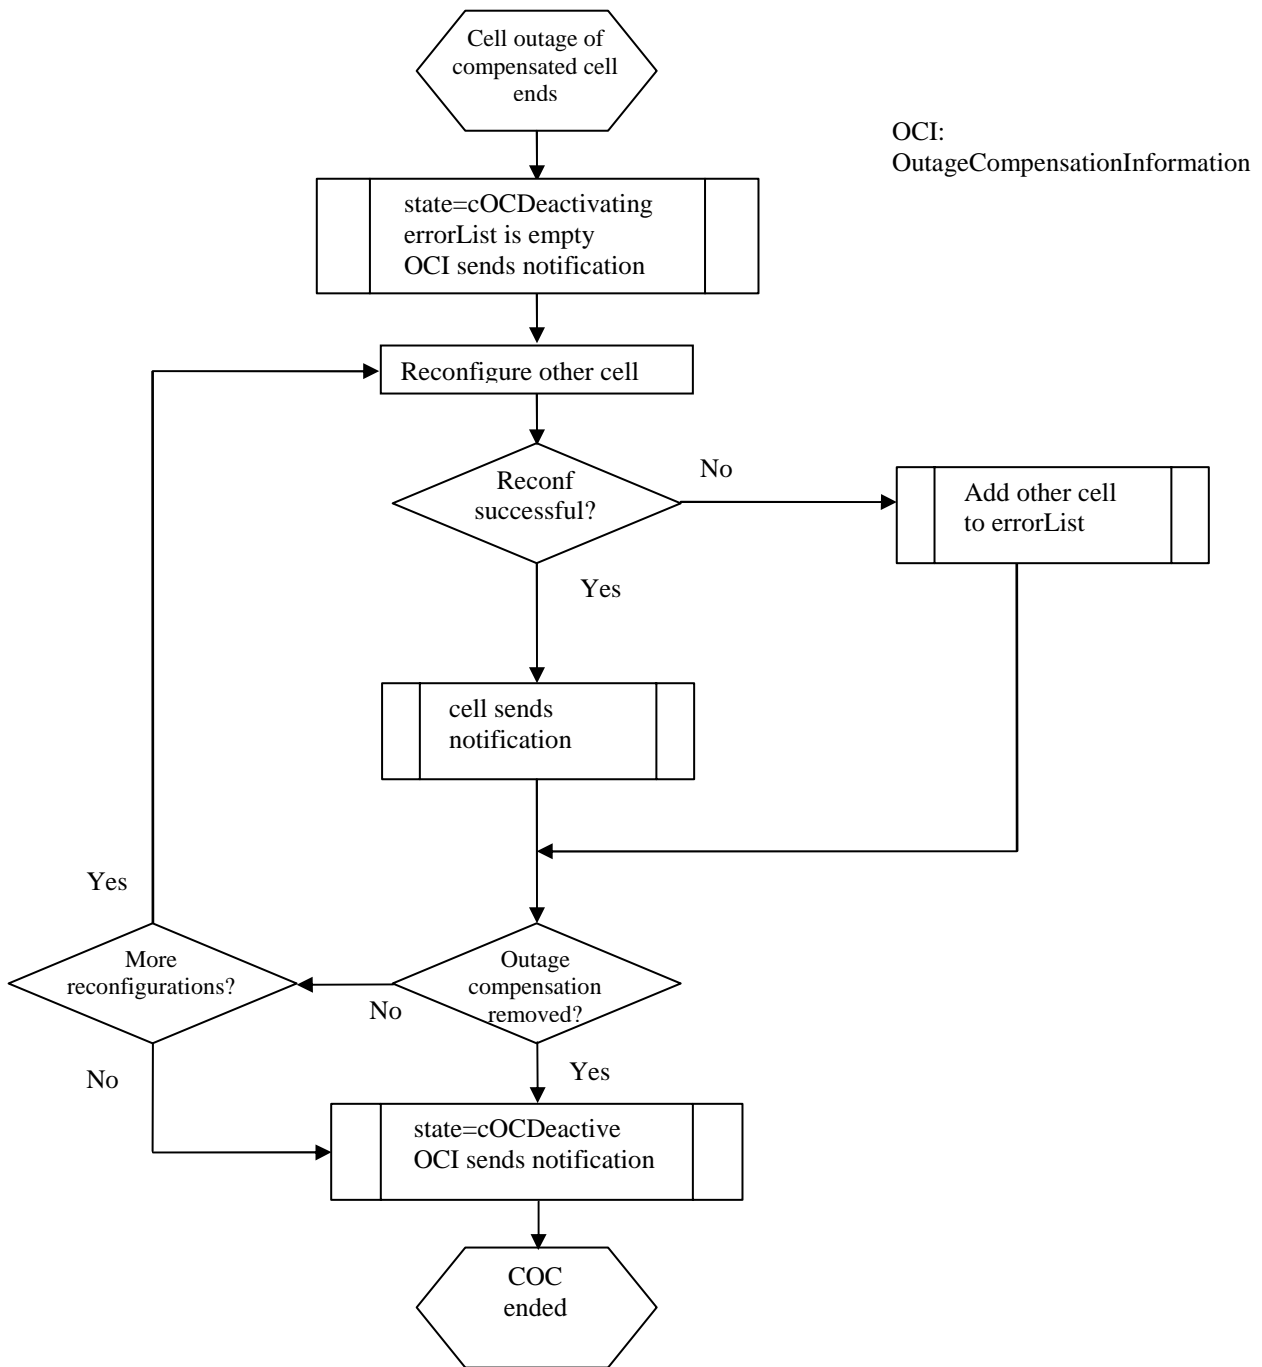


Figure A-2: Sequence diagram of COC, part 2

Legend for the table:

Notifications in *italic font* are not directly triggered by COC activities, but help to give a full picture.:

Notification content in **bold font** indicates a changed attribute value.

| Time | Event | Notification | Selected notification content *) |
|------|--|---|---|
| T1 | Outage of cell 1. COC is done for this cell. | <i>notifyNewAlarm, originated by EUTranGenericCell instance representing cell 1</i> <i>notifyAttributeValueChange of</i> | notificationId=notiAlCell1 correlatedNotifications={ } notificationId=COC1 |

| Time | Event | Notification | Selected notification content *) |
|-----------------------------|--|--|---|
| | | CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1. | correlatedNotifications={ notiAlCell1 }; cell1.cOCStatus.state = cOCActivating cell1.cOCStatus.errorList={ } |
| T2 | COC reconfigures cell 2 | notifyAttributeValueChange of EUTranGenericCell instance representing cell 2 | notificationId=avcCell2comp correlatedNotifications={ COC1 } cell2.cOCStatus.state = cOCCompensating |
| T3 | COC reconfigures cell 3 | notifyAttributeValueChange of EUTranGenericCell instance representing cell 3 | notificationId= avcCell3comp correlatedNotifications={ COC1 } cell3.cOCStatus.state = cOCCompensating |
| T4 | COC tries to reconfigure cell 4 without success | notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1 | notificationId=COC2 correlatedNotifications={ COC1 } cell1.cOCStatus.state = cOCActivating cell1.cOCStatus.errorList={cell4} |
| Case: COC successful | | | |
| T5a | COC function decides, that no further actions are necessary. | notifyAttributeValueChange of CellOutageCompensationInformation instance contained in EUTranGenericCell instance representing cell 1 | notificationId=COC5a correlatedNotifications={ COC1 } cell1.cOCStatus.state = cOCActive cell1.cOCStatus.errorList={cell4} |
| T6a | Outage of cell 1 ends | <i>notifyClearedAlarm, originated by EUTranGenericCell instance representing cell 1</i> notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1 | <i>notification Id= clearAlCell1</i> <i>correlatedNotifications={ notiAlCell1, COC1 }</i> Notification Id=COC6a correlatedNotifications={ COC1, COC5a, clearAlCell1 } cell1.cOCStatus.state = cOCDeactivating cell1.cOCStatus.errorList={ } |
| T7a | COC tries to reconfigure cell 2 without success | In case of unsuccessful reconfiguration: notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1 | Notification Id=COC7a correlatedNotifications={ COC1, COC5a, COC6a, clearAlCell1 } cell1.cOCStatus.state= cOCDeactivating; cell1.cOCStatus.errorList ={cell2} cell2.cOCStatus.state = cOCDeactive |
| T8a | COC reconfigures cell 3 | notifyAttributeValueChange of EUTranGenericCell instance representing cell 3 notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1. | notification Id= avcCell3decomp correlatedNotifications={ COC1, COC5a, avcCell3comp } Notification Id=COC8a correlatedNotifications={ COC1, clearAlCell1 } cell1.cOCStatus.state= cOCDeactive cell1.cOCStatus.errorList={cell2} cell3.cOCStatus.state = cOCDeactive |

| Time | Event | Notification | Selected notification content *) |
|---------------------------------|--|--|---|
| Case: COC not successful | | | |
| T5b | COC function decides, that compensation was not successful | notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1 | Notification Id=COC5b correlatedNotifications={ COC1 } cell1.cOCStatus.state= cOCActive cell1.cOCStatus.errorList={ cell4 } |
| T6b | Outage of cell 1 ends | <i>notifyClearedAlarm, originated by EUTranGenericCell instance representing cell 1</i> notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1 | <i>notification Id= clearAlCell1</i> <i>correlatedNotifications={ notiAlCell1, COC1 }</i> Notification Id=COC6b correlatedNotifications={ COC1, clearAlCell1 } cell1.cOCStatus.state= cOCDeactivating cell1.cOCStatus.errorList={ } |
| T7b | COC reconfigures cell 2 | notifyAttributeValueChange of EUTranGenericCell instance representing cell 2 | notification Id= avcCell2decomp correlatedNotifications={ COC1, COC5b, avcCell2comp } cell2.cOCStatus.state = cOCDeactive |
| T8b | COC reconfigures cell 3 | notifyAttributeValueChange of EUTranGenericCell instance representing cell 3 notifyAttributeValueChange of CellOutageCompensationInformation instance name contained in EUTranGenericCell instance representing cell 1. | notification Id= avcCell3decomp correlatedNotifications={ COC1, COC5b, avcCell3comp } Notification Id=COC8b correlatedNotifications={ COC1, clearAlCell1 } cell1.cOCStatus.state= cOCDeactive cell1.cOCStatus.errorList={ } cell3.cOCStatus.state = cOCDeactive |

*) Remarks:

There may be some content of the correlatedNotifications and/or additionalInformation field, which is not related to COC. This additional content is not shown for better readability and must be kept unchanged by COC. NotificationId's are only examples.

Annex B (informative): Change history

| Change history | | | | | | | |
|----------------|-------|-----------|-----|-----|--|--------|--------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| Dec 2008 | | | | | Presentation to SA for information | --- | 1.0.0 |
| Mar 2009 | SP-43 | SP-090074 | -- | -- | Presentation to SA for approval | 2.0.0 | 8.0.0 |
| Jun 2009 | SP-44 | SP-090408 | 001 | - | Cleanup, updated figures and improved definitions | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090289 | 002 | - | Clarify x2Whitelist definition | 8.0.0 | 8.0.0 |
| Jun 2009 | SP-44 | SP-090408 | 004 | - | Add the missing cellSize attribute in EUTranGenericCell IOC - align with 36.423 | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090408 | 006 | - | IOC Relations and UML updates | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090408 | 007 | - | Add missing IOCs in the Class Diagram | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090408 | 008 | - | Add the missing downlink power related attributes for EUTRAN Cell - align with 36.213 and 36.331 | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090289 | 003 | - | Add downlink power related attributes for EUTRAN Cell | 8.0.0 | 8.1.0 |
| Jun 2009 | SP-44 | SP-090290 | 005 | - | Add ICIC management attribute in EUTranRelation | 8.1.0 | 9.0.0 |
| Jun 2009 | SP-44 | SP-090408 | 009 | - | Add the missing downlink power related attributes for EUTRAN Cell - align with 36.213 and 36.331 | 8.1.0 | 9.0.0 |
| Sep 2009 | SP-45 | SP-090542 | 011 | - | Add missing attribute "id" | 9.0.0 | 9.1.0 |
| Sep 2009 | SP-45 | SP-090534 | 012 | - | Removing changes introduced by S5-092094 | 9.0.0 | 9.1.0 |
| Sep 2009 | SP-45 | SP-090542 | 014 | - | Correct Information relationship definitions | 9.0.0 | 9.1.0 |
| Sep 2009 | SP-45 | SP-090542 | 017 | - | Cleanup and improvements | 9.0.0 | 9.1.0 |
| Dec 2009 | SP-46 | SP-090719 | 018 | - | Add attributes to EUTranCellTDD and ExternalEUTranCellTDD | 9.1.0 | 9.2.0 |
| Dec 2009 | SP-46 | SP-090719 | 019 | - | Add load balancing control | 9.1.0 | 9.2.0 |
| Dec 2009 | SP-46 | SP-090719 | 020 | - | Remove the repeated definition of EP_RP_EPS | 9.1.0 | 9.2.0 |
| Dec 2009 | SP-46 | SP-090719 | 021 | - | Import QCISet IOC to E-UTRAN NRM IRP | 9.1.0 | 9.2.0 |
| Dec 2009 | SP-46 | SP-090719 | 022 | - | Indicate primary PLMN Id in plmnlDList attribute | 9.1.0 | 9.2.0 |
| Jan 2010 | -- | -- | -- | -- | Editorial correction (highlighting in 6.3.3.2) | 9.2.0 | 9.2.1 |
| Mar 2010 | SP-47 | SP-100035 | 024 | -- | Delete the redundant Proxy Classes ProxyGsmCell and ProxyUtranCell | 9.2.1 | 9.3.0 |
| Mar 2010 | SP-47 | SP-100035 | 025 | -- | Make tCI attribute of EUTranRelation IOC optional | 9.2.1 | 9.3.0 |
| Mar 2010 | SP-47 | SP-100036 | 027 | -- | Add the missing IOC ExternalSGWFunction that Proxy_FarEndNE can represent | 9.2.1 | 9.3.0 |
| Apr 2010 | | | | | Correction to history table (adds CR027) | 9.3.0 | 9.3.1 |
| Jun 2010 | SP-48 | SP-100246 | 028 | -- | Remove superfluous attribute farEndNelpAddr | 9.3.1 | 10.0.0 |
| Sep 2010 | SP-49 | SP-100489 | 029 | -- | Addition of eNBId and adjustment of cellIdentity | 10.0.0 | 10.1.0 |
| Sep 2010 | SP-49 | SP-100489 | 030 | -- | Add IOC MCEFunction and MBSFNArea | 10.0.0 | 10.1.0 |
| Sep 2010 | SP-49 | SP-100487 | 031 | -- | Remove cellType | 10.0.0 | 10.1.0 |
| Sep 2010 | SP-49 | SP-100488 | 032 | -- | Add associations and roles for Radio Equipment view | 10.0.0 | 10.1.0 |
| Dec 2010 | SP-50 | SP-100833 | 036 | -- | Correcting pci and pciList attributes definition - Align with 32.500 SON architecture definition | 10.1.0 | 10.2.0 |
| Dec 2010 | SP-50 | SP-100866 | 038 | 1 | Introduction of attributes to reflect the status of Energy Savin | 10.1.0 | 10.2.0 |
| Dec 2010 | SP-50 | SP-100833 | 041 | 1 | Adding Relay and Donor eNodeB NRM - Align with RAN2 TS 36.300 | 10.1.0 | 10.2.0 |
| Dec 2010 | SP-50 | SP-100751 | 042 | 2 | Adding IOC for energy saving properties | 10.1.0 | 10.2.0 |
| Dec 2010 | SP-50 | SP-100833 | 043 | -- | Add an attribute to IOC EUTranGenericCell to set allowed access class per cell | 10.1.0 | 10.2.0 |
| Dec 2010 | SP-50 | SP-100751 | 044 | -- | Adding NRM for "candidate cells" in Energy Saving Management (ESM) | 10.1.0 | 10.2.0 |
| Mar 2011 | SP-51 | SP-110095 | 045 | 2 | Add attributes to RNFunction in E-UTRAN Network Resource Model IRP Information Service | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110095 | 046 | 1 | Add qciDscpMapping IOC | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110095 | 047 | 1 | Add relay IOCs to be connected by the EP_RP_EPS by ENBFunction in E-UTRAN Network Resource Model IRP Information Service | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110100 | 050 | 3 | Add a new attribute into EUTranGenericCell object class to define a cell as not changeable by Energy Saving Management - Align with 32.551 ESM Concepts and requirements | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110095 | 053 | 2 | Correct Relay and Donor eNodeB model in E-UTRAN Network Resource Model IRP Information Service | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110100 | 054 | 1 | Correct ambiguous value usage on energySavingState | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110096 | 056 | 2 | Removing SectorEquipmentFunction from EUTRAN NRM | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110102 | 062 | 1 | Adding TCE address and TCE ID mapping information to ENBFunction | 10.2.0 | 10.3.0 |
| Mar 2011 | SP-51 | SP-110097 | 063 | 2 | Add a new object class to hold information about Cell Outage Compensation (COC) and report COC activities - Align with 32.541 | 10.2.0 | 10.3.0 |
| May 2011 | SP-52 | SP-110365 | 049 | 4 | Add new IOC EUTranCellINMCentralizedSON named by EUTranGenericCell and add attributes to EUTranRelation IOC | 10.3.0 | 10.4.0 |
| May 2011 | SP-52 | SP-110285 | 065 | - | Correct the description of tcellMappingInfoList (change RNC to eNodeB) | 10.3.0 | 10.4.0 |
| May 2011 | SP-52 | SP-110284 | 066 | - | Introduction of cellIndividualOffset in EUTranRelation | 10.3.0 | 10.4.0 |
| Sep 2011 | SP-53 | SP-110526 | 067 | - | Correction on the support condition of attribute cellIndividualOffset | 10.4.0 | 10.5.0 |
| Dec 2011 | SP-54 | SP-110719 | 069 | 2 | Add management of IRAT ANR from UTRAN to E-UTRAN | 10.5.0 | 11.0.0 |

| | | | | | | | |
|----------|-------|-----------|-----|----|--|--------|--------|
| Mar 2012 | SP-55 | SP-120057 | 076 | 1 | Add ANR switch management solution | 11.0.0 | 11.1.0 |
| JUn-2012 | SP-56 | SP-120358 | 077 | -- | Remove superflous containment in UML | 11.1.0 | 11.2.0 |
| Sep-2012 | SP-57 | SP-120573 | 081 | -- | Add support for Inter-RAT Energy Saving Management | 11.2.0 | 11.3.0 |
| Dic-2012 | SP-58 | SP-120800 | 084 | 1 | Add support for Inter-RAT ESM | 11.3.0 | 11.4.0 |
| | | SP-120783 | 085 | - | Correct the value range for partOfSectorPower | | |
| | | SP-120791 | 087 | 1 | Add new attribute to support SON coordination | | |
| | | SP-120796 | 092 | 1 | Addition of Network Sharing for MDT | | |

History

| Document history | | |
|-------------------------|---------------|-------------|
| V11.3.0 | October 2012 | Publication |
| V11.4.0 | February 2013 | Publication |
| | | |
| | | |
| | | |