

ETSI TS 136 355 V14.2.0 (2017-07)



**LTE;
Evolved Universal Terrestrial Radio Access (E-UTRA);
LTE Positioning Protocol (LPP)
(3GPP TS 36.355 version 14.2.0 Release 14)**



Reference

RTS/TSGR-0236355ve20

Keywords

LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
oneM2M logo is protected for the benefit of its Members.
GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under
<http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions and Abbreviations.....	11
3.1 Definitions	11
3.2 Abbreviations	12
4 Functionality of Protocol.....	13
4.1 General	13
4.1.1 LPP Configuration	13
4.1.2 LPP Sessions and Transactions.....	14
4.1.3 LPP Position Methods	14
4.1.4 LPP Messages	14
4.2 Common LPP Session Procedure	15
4.3 LPP Transport	16
4.3.1 Transport Layer Requirements	16
4.3.2 LPP Duplicate Detection	16
4.3.3 LPP Acknowledgement	16
4.3.3.1 General	16
4.3.3.2 Procedure related to Acknowledgement.....	16
4.3.4 LPP Retransmission.....	17
4.3.4.1 General	17
4.3.4.2 Procedure related to Retransmission	17
5 LPP Procedures	18
5.1 Procedures related to capability transfer	18
5.1.1 Capability Transfer procedure.....	18
5.1.2 Capability Indication procedure.....	19
5.1.3 Reception of LPP Request Capabilities	19
5.1.4 Transmission of LPP Provide Capabilities.....	20
5.2 Procedures related to Assistance Data Transfer.....	20
5.2.1 Assistance Data Transfer procedure.....	20
5.2.2 Assistance Data Delivery procedure	20
5.2.3 Transmission of LPP Request Assistance Data	21
5.2.4 Reception of LPP Provide Assistance Data	21
5.3 Procedures related to Location Information Transfer	21
5.3.1 Location Information Transfer procedure	21
5.3.2 Location Information Delivery procedure	22
5.3.3 Reception of Request Location Information	23
5.3.4 Transmission of Provide Location Information	23
5.4 Error Handling Procedures	23
5.4.1 General.....	23
5.4.2 Procedures related to Error Indication	23
5.4.3 LPP Error Detection.....	24
5.4.4 Reception of an LPP Error Message	24
5.5 Abort Procedure	24
5.5.1 General.....	24
5.5.2 Procedures related to Abort	24
5.5.3 Reception of an LPP Abort Message	25
6 Information Element Abstract Syntax Definition.....	25
6.1 General	25

6.2	LPP PDU Structure	26
–	<i>LPP-PDU-Definitions</i>	26
–	<i>LPP-Message</i>	26
–	<i>LPP-MessageBody</i>	27
–	<i>LPP-TransactionID</i>	27
6.3	Message Body IEs	28
–	<i>RequestCapabilities</i>	28
–	<i>ProvideCapabilities</i>	28
–	<i>RequestAssistanceData</i>	29
–	<i>ProvideAssistanceData</i>	29
–	<i>RequestLocationInformation</i>	30
–	<i>ProvideLocationInformation</i>	30
–	<i>Abort</i>	31
–	<i>Error</i>	31
6.4	Common IEs	31
6.4.1	Common Lower-Level IEs	32
–	<i>AccessTypes</i>	32
–	<i>ARFCN-ValueEUTRA</i>	32
–	<i>ARFCN-ValueUTRA</i>	32
–	<i>CarrierFreq-NB</i>	32
–	<i>CellGlobalIdEUTRA-AndUTRA</i>	33
–	<i>CellGlobalIdGERAN</i>	33
–	<i>ECGI</i>	34
–	<i>Ellipsoid-Point</i>	34
–	<i>Ellipsoid-PointWithUncertaintyCircle</i>	34
–	<i>EllipsoidPointWithUncertaintyEllipse</i>	35
–	<i>EllipsoidPointWithAltitude</i>	35
–	<i>EllipsoidPointWithAltitudeAndUncertaintyEllipsoid</i>	35
–	<i>EllipsoidArc</i>	35
–	<i>EPDUs-Sequence</i>	36
–	<i>HorizontalVelocity</i>	36
–	<i>HorizontalWithVerticalVelocity</i>	37
–	<i>HorizontalVelocityWithUncertainty</i>	37
–	<i>HorizontalWithVerticalVelocityAndUncertainty</i>	37
–	<i>LocationCoordinateTypes</i>	37
–	<i>Polygon</i>	38
–	<i>PositioningModes</i>	38
–	<i>VelocityTypes</i>	38
6.4.2	Common Positioning	38
–	<i>CommonIEsRequestCapabilities</i>	38
–	<i>CommonIEsProvideCapabilities</i>	39
–	<i>CommonIEsRequestAssistanceData</i>	39
–	<i>CommonIEsProvideAssistanceData</i>	39
–	<i>CommonIEsRequestLocationInformation</i>	39
–	<i>CommonIEsProvideLocationInformation</i>	43
–	<i>CommonIEsAbort</i>	44
–	<i>CommonIEsError</i>	44
6.5	Positioning Method IEs	45
6.5.1	OTDOA Positioning	45
6.5.1.1	OTDOA Assistance Data	45
–	<i>OTDOA-ProvideAssistanceData</i>	45
6.5.1.2	OTDOA Assistance Data Elements	46
–	<i>OTDOA-ReferenceCellInfo</i>	46
–	<i>PRS-Info</i>	47
–	<i>OTDOA-NeighbourCellInfoList</i>	48
–	<i>OTDOA-ReferenceCellInfoNB</i>	52
–	<i>PRS-Info-NB</i>	53
–	<i>OTDOA-NeighbourCellInfoListNB</i>	56
6.5.1.3	OTDOA Assistance Data Request	59
–	<i>OTDOA-RequestAssistanceData</i>	59
6.5.1.4	OTDOA Location Information	59
–	<i>OTDOA-ProvideLocationInformation</i>	59

6.5.1.5	OTDOA Location Information Elements	59
-	<i>OTDOA-SignalMeasurementInformation</i>	59
-	<i>OTDOA-SignalMeasurementInformation-NB</i>	62
-	<i>OTDOA-MeasQuality</i>	64
-	<i>AdditionalPath</i>	65
6.5.1.6	OTDOA Location Information Request	65
-	<i>OTDOA-RequestLocationInformation</i>	65
6.5.1.7	OTDOA Capability Information	66
-	<i>OTDOA-ProvideCapabilities</i>	66
6.5.1.8	OTDOA Capability Information Request	68
-	<i>OTDOA-RequestCapabilities</i>	68
6.5.1.9	OTDOA Error Elements	68
-	<i>OTDOA-Error</i>	68
-	<i>OTDOA-LocationServerErrorCauses</i>	68
-	<i>OTDOA-TargetDeviceErrorCauses</i>	68
6.5.2	A-GNSS Positioning	69
6.5.2.1	GNSS Assistance Data	69
-	<i>A-GNSS-ProvideAssistanceData</i>	69
-	<i>GNSS-CommonAssistData</i>	69
-	<i>GNSS-GenericAssistData</i>	69
6.5.2.2	GNSS Assistance Data Elements	70
-	<i>GNSS-ReferenceTime</i>	70
-	<i>GNSS-SystemTime</i>	71
-	<i>GPS-TOW-Assist</i>	72
-	<i>NetworkTime</i>	72
-	<i>GNSS-ReferenceLocation</i>	74
-	<i>GNSS-IonosphericModel</i>	75
-	<i>KlobucharModelParameter</i>	75
-	<i>NeQuickModelParameter</i>	76
-	<i>GNSS-EarthOrientationParameters</i>	76
-	<i>GNSS-TimeModelList</i>	77
-	<i>GNSS-DifferentialCorrections</i>	78
-	<i>GNSS-NavigationModel</i>	80
-	<i>StandardClockModelList</i>	82
-	<i>NAV-ClockModel</i>	83
-	<i>CNAV-ClockModel</i>	84
-	<i>GLONASS-ClockModel</i>	85
-	<i>SBAS-ClockModel</i>	85
-	<i>BDS-ClockModel</i>	86
-	<i>NavModelKeplerianSet</i>	86
-	<i>NavModelNAV-KeplerianSet</i>	87
-	<i>NavModelCNAV-KeplerianSet</i>	89
-	<i>NavModel-GLONASS-ECEF</i>	90
-	<i>NavModel-SBAS-ECEF</i>	91
-	<i>NavModel-BDS-KeplerianSet</i>	92
-	<i>GNSS-RealTimeIntegrity</i>	93
-	<i>GNSS-DataBitAssistance</i>	94
-	<i>GNSS-AcquisitionAssistance</i>	95
-	<i>GNSS-Almanac</i>	98
-	<i>AlmanacKeplerianSet</i>	99
-	<i>AlmanacNAV-KeplerianSet</i>	100
-	<i>AlmanacReducedKeplerianSet</i>	101
-	<i>AlmanacMidiAlmanacSet</i>	102
-	<i>AlmanacGLONASS-AlmanacSet</i>	103
-	<i>AlmanacECEF-SBAS-AlmanacSet</i>	104
-	<i>AlmanacBDS-AlmanacSet</i>	105
-	<i>GNSS-UTC-Model</i>	106
-	<i>UTC-ModelSet1</i>	106
-	<i>UTC-ModelSet2</i>	107
-	<i>UTC-ModelSet3</i>	108
-	<i>UTC-ModelSet4</i>	108
-	<i>UTC-ModelSet5</i>	109

-	<i>GNSS-AuxiliaryInformation</i>	110
-	<i>BDS-DifferentialCorrections</i>	111
-	<i>BDS-GridModelParameter</i>	112
6.5.2.3	<i>GNSS Assistance Data Request</i>	112
-	<i>A-GNSS-RequestAssistanceData</i>	112
-	<i>GNSS-CommonAssistDataReq</i>	113
-	<i>GNSS-GenericAssistDataReq</i>	113
6.5.2.4	<i>GNSS Assistance Data Request Elements</i>	114
-	<i>GNSS-ReferenceTimeReq</i>	114
-	<i>GNSS-ReferenceLocationReq</i>	114
-	<i>GNSS-IonosphericModelReq</i>	115
-	<i>GNSS-EarthOrientationParametersReq</i>	115
-	<i>GNSS-TimeModelListReq</i>	115
-	<i>GNSS-DifferentialCorrectionsReq</i>	116
-	<i>GNSS-NavigationModelReq</i>	116
-	<i>GNSS-RealTimeIntegrityReq</i>	118
-	<i>GNSS-DataBitAssistanceReq</i>	118
-	<i>GNSS-AcquisitionAssistanceReq</i>	119
-	<i>GNSS-AlmanacReq</i>	119
-	<i>GNSS-UTC-ModelReq</i>	119
-	<i>GNSS-AuxiliaryInformationReq</i>	120
-	<i>BDS-DifferentialCorrectionsReq</i>	120
-	<i>BDS-GridModelReq</i>	120
6.5.2.5	<i>GNSS Location Information</i>	121
-	<i>A-GNSS-ProvideLocationInformation</i>	121
6.5.2.6	<i>GNSS Location Information Elements</i>	121
-	<i>GNSS-SignalMeasurementInformation</i>	121
-	<i>MeasurementReferenceTime</i>	121
-	<i>GNSS-MeasurementList</i>	123
-	<i>GNSS-LocationInformation</i>	126
6.5.2.7	<i>GNSS Location Information Request</i>	127
-	<i>A-GNSS-RequestLocationInformation</i>	127
6.5.2.8	<i>GNSS Location Information Request Elements</i>	127
-	<i>GNSS-PositioningInstructions</i>	127
6.5.2.9	<i>GNSS Capability Information</i>	128
-	<i>A-GNSS-ProvideCapabilities</i>	128
6.5.2.10	<i>GNSS Capability Information Elements</i>	129
-	<i>GNSS-CommonAssistanceDataSupport</i>	129
-	<i>GNSS-ReferenceTimeSupport</i>	130
-	<i>GNSS-ReferenceLocationSupport</i>	130
-	<i>GNSS-IonosphericModelSupport</i>	130
-	<i>GNSS-EarthOrientationParametersSupport</i>	131
-	<i>GNSS-GenericAssistanceDataSupport</i>	131
-	<i>GNSS-TimeModelListSupport</i>	132
-	<i>GNSS-DifferentialCorrectionSupport</i>	132
-	<i>GNSS-NavigationModelSupport</i>	132
-	<i>GNSS-RealTimeIntegritySupport</i>	133
-	<i>GNSS-DataBitAssistanceSupport</i>	133
-	<i>GNSS-AcquisitionAssistanceSupport</i>	133
-	<i>GNSS-AlmanacSupport</i>	134
-	<i>GNSS-UTC-ModelSupport</i>	134
-	<i>GNSS-AuxiliaryInformationSupport</i>	135
-	<i>BDS-DifferentialCorrectionsSupport</i>	135
-	<i>BDS-GridModelSupport</i>	135
6.5.2.11	<i>GNSS Capability Information Request</i>	135
-	<i>A-GNSS-RequestCapabilities</i>	135
6.5.2.12	<i>GNSS Error Elements</i>	136
-	<i>A-GNSS-Error</i>	136
-	<i>GNSS-LocationServerErrorCauses</i>	136
-	<i>GNSS-TargetDeviceErrorCauses</i>	136
6.5.2.13	<i>Common GNSS Information Elements</i>	137
-	<i>GNSS-ID</i>	137

-	<i>GNSS-ID-Bitmap</i>	137
-	<i>GNSS-SignalID</i>	137
-	<i>GNSS-SignalIDs</i>	138
-	<i>SBAS-ID</i>	139
-	<i>SBAS-IDs</i>	139
-	<i>SV-ID</i>	139
6.5.3	Enhanced Cell ID Positioning.....	140
6.5.3.1	E-CID Location Information.....	140
-	<i>ECID-ProvideLocationInformation</i>	140
6.5.3.2	E-CID Location Information Elements	140
-	<i>ECID-SignalMeasurementInformation</i>	140
6.5.3.3	E-CID Location Information Request	141
-	<i>ECID-RequestLocationInformation</i>	141
6.5.3.4	E-CID Capability Information	142
-	<i>ECID-ProvideCapabilities</i>	142
6.5.3.5	E-CID Capability Information Request.....	143
-	<i>ECID-RequestCapabilities</i>	143
6.5.3.6	E-CID Error Elements.....	143
-	<i>ECID-Error</i>	143
-	<i>ECID-LocationServerErrorCauses</i>	143
-	<i>ECID-TargetDeviceErrorCauses</i>	143
6.5.4	Terrestrial Beacon System Positioning.....	144
6.5.4.1	TBS Location Information	144
-	<i>TBS-ProvideLocationInformation</i>	144
6.5.4.2	TBS Location Information Elements	144
-	<i>TBS-MeasurementInformation</i>	144
-	<i>MBS-BeaconMeasList</i>	145
6.5.4.3	TBS Location Information Request	146
-	<i>TBS-RequestLocationInformation</i>	146
6.5.4.4	TBS Capability Information.....	146
-	<i>TBS-ProvideCapabilities</i>	146
-	<i>MBS-AssistanceDataSupportList</i>	147
6.5.4.5	TBS Capability Information Request.....	147
-	<i>TBS-RequestCapabilities</i>	147
6.5.4.6	TBS Error Elements	147
-	<i>TBS-Error</i>	147
-	<i>TBS-LocationServerErrorCauses</i>	148
-	<i>TBS-TargetDeviceErrorCauses</i>	148
6.5.4.7	TBS Assistance Data.....	148
-	<i>TBS-ProvideAssistanceData</i>	148
6.5.4.8	TBS Assistance Data Elements	149
-	<i>TBS-AssistanceDataList</i>	149
-	<i>MBS-AlmanacAssistance</i>	149
-	<i>MBS-AcquisitionAssistance</i>	149
6.5.4.9	TBS Assistance Data Request.....	150
-	<i>TBS-RequestAssistanceData</i>	150
6.5.5	Sensor based Positioning	150
6.5.5.1	Sensor Location Information.....	150
-	<i>Sensor-ProvideLocationInformation</i>	150
6.5.5.2	Sensor Location Information Elements	150
-	<i>Sensor-MeasurementInformation</i>	150
6.5.5.3	Sensor Location Information Request.....	151
-	<i>Sensor-RequestLocationInformation</i>	151
6.5.5.4	Sensor Capability Information	151
-	<i>Sensor-ProvideCapabilities</i>	151
6.5.5.5	Sensor Capability Information Request	152
-	<i>Sensor-RequestCapabilities</i>	152
6.5.5.6	Sensor Error Elements.....	152
-	<i>Sensor-Error</i>	152
-	<i>Sensor-LocationServerErrorCauses</i>	153
-	<i>Sensor-TargetDeviceErrorCauses</i>	153
6.5.5.7	Sensor Assistance Data	153

–	<i>Sensor-ProvideAssistanceData</i>	153
6.5.5.8	Sensor Assistance Data Elements	153
–	<i>Sensor-AssistanceDataList</i>	153
6.5.5.9	Sensor Assistance Data Request	154
–	<i>Sensor-RequestAssistanceData</i>	154
6.5.6	WLAN-based Positioning.....	154
6.5.6.1	WLAN Location Information.....	154
–	<i>WLAN-ProvideLocationInformation</i>	154
6.5.6.2	WLAN Location Information Elements.....	154
–	<i>WLAN-MeasurementInformation</i>	154
6.5.6.3	WLAN Location Information Request.....	156
–	<i>WLAN-RequestLocationInformation</i>	156
6.5.6.4	WLAN Capability Information	156
–	<i>WLAN-ProvideCapabilities</i>	156
6.5.6.5	WLAN Capability Information Request	157
–	<i>WLAN-RequestCapabilities</i>	157
6.5.6.6	WLAN Error Elements	157
–	<i>WLAN-Error</i>	157
–	<i>WLAN-LocationServerErrorCauses</i>	158
–	<i>WLAN-TargetDeviceErrorCauses</i>	158
6.5.7	Bluetooth-based Positioning	161
6.5.7.1	Bluetooth Location Information.....	161
–	<i>BT-ProvideLocationInformation</i>	161
6.5.7.2	Bluetooth Location Information Elements	162
–	<i>BT-MeasurementInformation</i>	162
6.5.7.3	Bluetooth Location Information Request.....	162
–	<i>BT-RequestLocationInformation</i>	162
6.5.7.4	Bluetooth Capability Information	163
–	<i>BT-ProvideCapabilities</i>	163
6.5.7.5	Bluetooth Capability Information Request.....	163
–	<i>BT-RequestCapabilities</i>	163
6.5.7.6	BT Error Elements	164
–	<i>BT-Error</i>	164
–	<i>BT-LocationServerErrorCauses</i>	164
–	<i>BT-TargetDeviceErrorCauses</i>	164
–	<i>End of LPP-PDU-Definitions</i>	164
Annex A (informative):	Change History	166
History		169

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document contains the definition of the LTE Positioning Protocol (LPP).

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 36.305: "Stage 2 functional specification of User Equipment (UE) positioning in E-UTRAN".
- [3] 3GPP TS 23.271: "Functional stage 2 description of Location Services (LCS)".
- [4] IS-GPS-200, Revision D, Navstar GPS Space Segment/Navigation User Interfaces, March 7th, 2006.
- [5] IS-GPS-705, Navstar GPS Space Segment/User Segment L5 Interfaces, September 22, 2005.
- [6] IS-GPS-800, Navstar GPS Space Segment/User Segment L1C Interfaces, September 4, 2008.
- [7] IS-QZSS, Quasi Zenith Satellite System Navigation Service Interface Specifications for QZSS, Ver.1.1, July 31, 2009.
- [8] Galileo OS Signal in Space ICD (OS SIS ICD), Issue 1.2, February 2014, European Union.
- [9] Global Navigation Satellite System GLONASS Interface Control Document, Version 5.1, 2008.
- [10] Specification for the Wide Area Augmentation System (WAAS), US Department of Transportation, Federal Aviation Administration, DTFA01-96-C-00025, 2001.
- [11] RTCM-SC104, RTCM Recommended Standards for Differential GNSS Service (v.2.3), August 20, 2001.
- [12] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); "Radio Resource Control (RRC); Protocol specification".
- [13] 3GPP TS 25.331: "Radio Resource Control (RRC); Protocol Specification".
- [14] 3GPP TS 44.031: "Location Services (LCS); Mobile Station (MS) - Serving Mobile Location Centre (SMLC) Radio Resource LCS Protocol (RRLP)".
- [15] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [16] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".
- [17] 3GPP TS 36.214: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer – Measurements".
- [18] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".

- [19] 3GPP TS 23.003: "Numbering, addressing and identification".
- [20] OMA-TS-LPPe-V1_0, LPP Extensions Specification, Open Mobile Alliance.
- [21] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [22] ITU-T Recommendation X.691 (07/2002) "Information technology - ASN.1 encoding rules: Specification of Packed Encoding Rules (PER)" (Same as the ISO/IEC International Standard 8825-2).
- [23] BDS-SIS-ICD-2.0: "BeiDou Navigation Satellite System Signal In Space Interface Control Document Open Service Signal (Version 2.0)", December 2013.
- [24] ATIS-0500027: "Recommendations for Establishing Wide Scale Indoor Location Performance", May 2015.
- [25] Bluetooth Special Interest Group: "Bluetooth Core Specification v4.2", December 2014.
- [26] IEEE 802.11, Part 11: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".
- [27] IETF RFC 6225, "Dynamic Host Configuration Protocol Options for Coordinate-Based Location Configuration Information", July 2011.
- [28] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".
- [29] "Earth Gravitational Model 96 (EGM96)", National Geospatial-Intelligence Agency, NASA.

3 Definitions and Abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in [1], [2] and [3] apply. Other definitions are provided below.

Anchor carrier: In NB-IoT, a carrier where the UE assumes that NPSS/NSSS/NPBCH/SIB-NB are transmitted.

Location Server: a physical or logical entity (e.g., E-SMLC or SUPL SLP) that manages positioning for a target device by obtaining measurements and other location information from one or more positioning units and providing assistance data to positioning units to help determine this. A Location Server may also compute or verify the final location estimate.

NB-IoT: NB-IoT allows access to network services via E-UTRA with a channel bandwidth limited to 200 kHz.

Reference Source: a physical entity or part of a physical entity that provides signals (e.g., RF, acoustic, infra-red) that can be measured (e.g., by a Target Device) in order to obtain the location of a Target Device.

Target Device: the device that is being positioned (e.g., UE or SUPL SET).

Transmission Point (TP): A set of geographically co-located transmit antennas for one cell, part of one cell or one PRS-only TP. Transmission Points can include base station (eNodeB) antennas, remote radio heads, a remote antenna of a base station, an antenna of a PRS-only TP, etc. One cell can be formed by one or multiple transmission points. For a homogeneous deployment, each transmission point may correspond to one cell.

Observed Time Difference Of Arrival (OTDOA): The time interval that is observed by a target device between the reception of downlink signals from two different TPs. If a signal from TP 1 is received at the moment t_1 , and a signal from TP 2 is received at the moment t_2 , the OTDOA is $t_2 - t_1$.

PRS-only TP: A TP which only transmits PRS signals for PRS-based TBS positioning and is not associated with a cell.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply.

ADR	Accumulated Delta-Range
A-GNSS	Assisted-GNSS
AP	Access Point
ARFCN	Absolute Radio Frequency Channel Number
BDS	BeiDou Navigation Satellite System
BSSID	Basic Service Set Identifier
BTS	Base Transceiver Station (GERAN)
CID	Cell-ID (positioning method)
CNAV	Civil Navigation
CRS	Cell-specific Reference Signals
ECEF	Earth-Centred, Earth-Fixed
ECGI	Evolved Cell Global Identifier
ECI	Earth-Centred-Inertial
E-CID	Enhanced Cell-ID (positioning method)
EGNOS	European Geostationary Navigation Overlay Service
E-SMLC	Enhanced Serving Mobile Location Centre
E-UTRAN	Evolved Universal Terrestrial Radio Access Network
EOP	Earth Orientation Parameters
EPDU	External Protocol Data Unit
FDMA	Frequency Division Multiple Access
FEC	Forward Error Correction
FTA	Fine Time Assistance
GAGAN	GPS Aided Geo Augmented Navigation
GLONASS	GLObal'naya NAVigatsionnaya Sputnikovaya Sistema (Engl.: Global Navigation Satellite System)
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
ICD	Interface Control Document
IOD	Issue of Data
IS	Interface Specification
LLA	Latitude Longitude Altitude
LPP	LTE Positioning Protocol
LPPa	LTE Positioning Protocol Annex
LSB	Least Significant Bit
MBS	Metropolitan Beacon System
MO-LR	Mobile Originated Location Request
MSAS	Multi-functional Satellite Augmentation System
MSB	Most Significant Bit
msd	mean solar day
MT-LR	Mobile Terminated Location Request
NAV	Navigation
NB-IoT	NarrowBand Internet of Things
NICT	National Institute of Information and Communications Technology
NI-LR	Network Induced Location Request
NPRS	Narrowband Positioning Reference Signals
NRSRP	Narrowband Reference Signal Received Power
NRSRQ	Narrowband Reference Signal Received Quality
NTSC	National Time Service Center of Chinese Academy of Sciences
OTDOA	Observed Time Difference Of Arrival
PDU	Protocol Data Unit
PRB	Physical Resource Block
PRC	Pseudo-Range Correction
PRS	Positioning Reference Signals
PZ-90	Parametry Zemli 1990 Goda – Parameters of the Earth Year 1990
QZS	Quasi Zenith Satellite
QZSS	Quasi-Zenith Satellite System
QZST	Quasi-Zenith System Time
RF	Radio Frequency

RRC	Range-Rate Correction Radio Resource Control
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSTD	Reference Signal Time Difference
RTT	Round Trip Time
RU	Russia
SBAS	Space Based Augmentation System
SET	SUPL Enabled Terminal
SFN	System Frame Number
SLP	SUPL Location Platform
SSID	Service Set Identifier
SUPL	Secure User Plane Location
SV	Space Vehicle
TB	Terrestrial Beacon
TBS	Terrestrial Beacon System
TLM	Telemetry
TOD	Time Of Day
TOW	Time Of Week
TP	Transmission Point
UDRE	User Differential Range Error
ULP	User Plane Location Protocol
USNO	US Naval Observatory
UT1	Universal Time No.1
UTC	Coordinated Universal Time
WAAS	Wide Area Augmentation System
WGS-84	World Geodetic System 1984
WLAN	Wireless Local Area Network

4 Functionality of Protocol

4.1 General

4.1.1 LPP Configuration

LPP is used point-to-point between a location server (E-SMLC or SLP) and a target device (UE or SET) in order to position the target device using position-related measurements obtained by one or more reference sources. Figure 4.1.1-1 shows the configuration as applied to the control- and user-plane location solutions for E-UTRAN (as defined in [2] and [3]).

NB-IoT is a non backward compatible variant of E-UTRAN supporting a reduced set of functionality. In this specification, procedures and messages specified for the UE equally apply to the UE in NB-IoT.

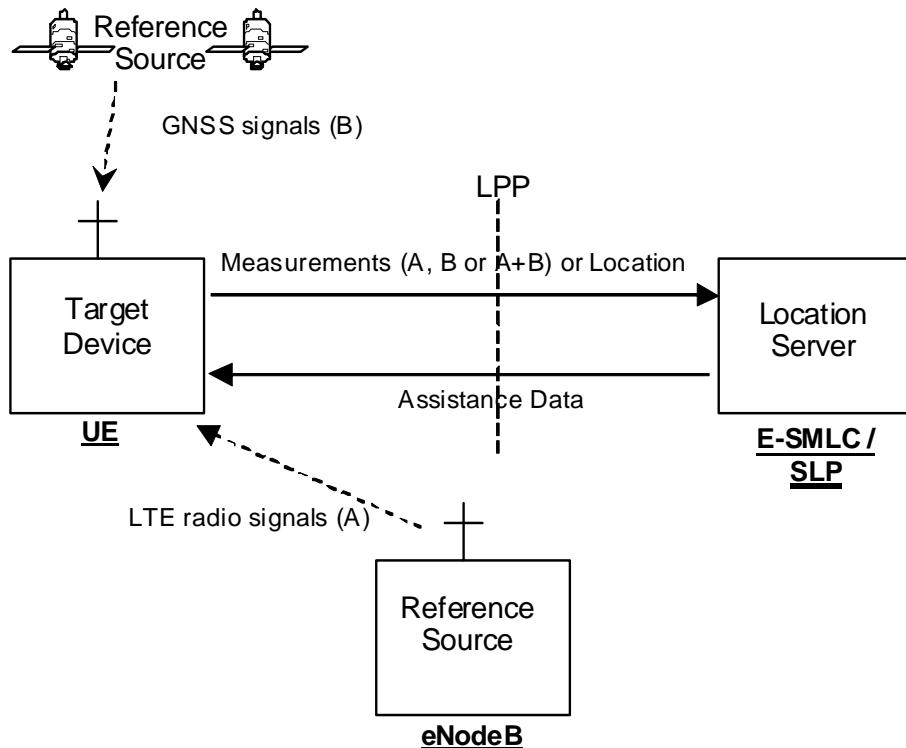


Figure 4.1.1-1: LPP Configuration for Control- and User-Plane Positioning in E-UTRAN

4.1.2 LPP Sessions and Transactions

An LPP session is used between a Location Server and the target device in order to obtain location related measurements or a location estimate or to transfer assistance data. A single LPP session is used to support a single location request (e.g., for a single MT-LR, MO-LR or NI-LR). Multiple LPP sessions can be used between the same endpoints to support multiple different location requests (as required by [3]). Each LPP session comprises one or more LPP transactions, with each LPP transaction performing a single operation (capability exchange, assistance data transfer, or location information transfer). In E-UTRAN the LPP transactions are realized as LPP procedures. The instigator of an LPP session will always instigate the first LPP transaction, but subsequent transactions may be instigated by either end. LPP transactions within a session may occur serially or in parallel. LPP transactions are indicated at the LPP protocol level with a transaction ID in order to associate messages with one another (e.g., request and response).

Messages within a transaction are linked by a common transaction identifier.

4.1.3 LPP Position Methods

Internal LPP positioning methods and associated signalling content are defined in this specification.

This version of the specification defines OTDOA, A-GNSS, E-CID, Barometric Sensor, TBS, WLAN, and Bluetooth positioning methods.

4.1.4 LPP Messages

Each LPP transaction involves the exchange of one or more LPP messages between the location server and the target device. The general format of an LPP message consists of a set of common fields followed by a body. The body (which may be empty) contains information specific to a particular message type. Each message type contains information specific to one or more positioning methods and/or information common to all positioning methods.

The common fields are as follows:

Field	Role
Transaction ID	Identify messages belonging to the same transaction
Transaction End Flag	Indicate when a transaction (e.g. one with periodic responses) has ended
Sequence Number	Enable detection of a duplicate LPP message at a receiver
Acknowledgement	Enable an acknowledgement to be requested and/or returned for any LPP message

NOTE: Use of the Transaction ID and Transaction End fields conform to the procedures in clause 5 and are independent of the means used to transport LPP messages (e.g., whether using a NAS MO-LR Request, NAS Generic Transport or user-plane solution).

The following message types are defined:

- Request Capabilities;
- Provide Capabilities;
- Request Assistance Data;
- Provide Assistance Data;
- Request Location Information;
- Provide Location Information;
- Abort;
- Error.

4.2 Common LPP Session Procedure

The purpose of this procedure is to support an LPP session comprising a sequence of LPP transactions. The procedure is described in Figure 4.2-1.

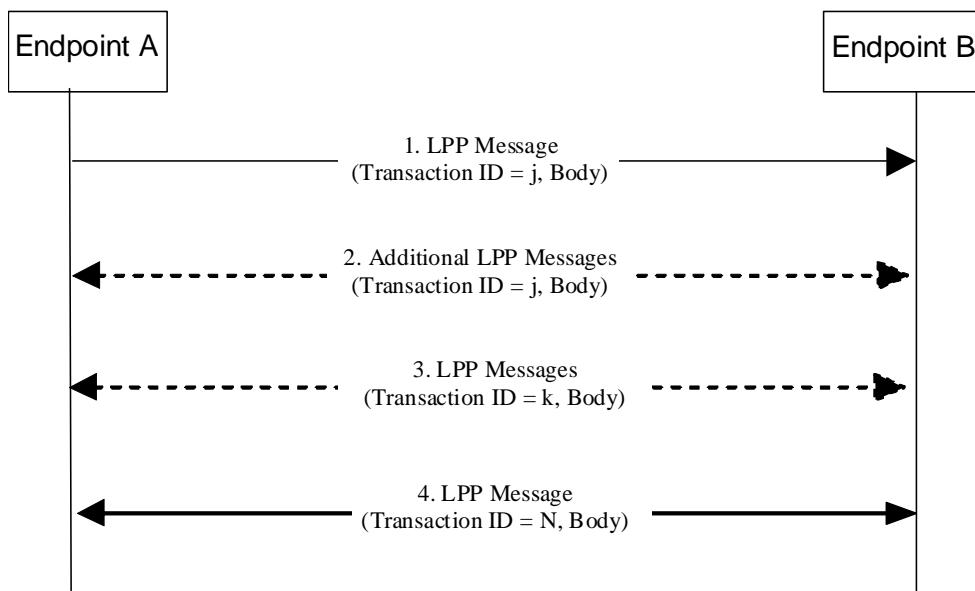


Figure 4.2-1 LPP Session Procedure

1. Endpoint A, which may be either the target or the server, initiates an LPP session by sending an LPP message for an initial LPP transaction j to the other endpoint B (which has an opposite role to A).
2. Endpoints A and B may exchange further messages to continue the transaction started in step 1.
3. Either endpoint may instigate further transactions by sending additional LPP messages.

4. A session is terminated by a final transaction N in which LPP messages will be exchanged between the two endpoints.

Within each transaction, all constituent messages shall contain the same transaction identifier. The last message sent in each transaction shall have the IE *endTransaction* set to TRUE. Transactions that occur in parallel shall use different transaction IDs; transaction IDs for completed transactions may be reused at any time after the final message of the previous transaction with the same ID is known to have been received.

4.3 LPP Transport

4.3.1 Transport Layer Requirements

LPP requires reliable, in-sequence delivery of LPP messages from the underlying transport layers. This section describes the transport capabilities that are available within LPP. A UE implementing LPP for the control-plane solution shall support LPP reliable transport (including all three of duplicate detection, acknowledgement, and retransmission).

LPP reliable transport functionality is not used in the user-plane solution.

The following requirements in subclauses 4.3.2, 4.3.3, and 4.3.4 for LPP reliable transport apply only when the capability is supported.

4.3.2 LPP Duplicate Detection

A sender shall include a sequence number in all LPP messages sent for a particular location session. The sequence number shall be distinct for different LPP messages sent in the same direction in the same location session (e.g., may start at zero in the first LPP message and increase monotonically in each succeeding LPP message). Sequence numbers used in the uplink and downlink are independent (e.g., can be the same).

A receiver shall record the most recent received sequence number for each location session. If a message is received carrying the same sequence number as that last received for the associated location session, it shall be discarded. Otherwise (i.e., if the sequence number is different or if no sequence number was previously received or if no sequence number is included), the message shall be processed.

Sending and receiving sequence numbers shall be deleted in a server when the associated location session is terminated and shall be deleted in a target device when there has been no activity for a particular location session for 10 minutes.

NOTE: For LPP control-plane use, a target device can be aware of a location session from information provided at the NAS level for downlink transport of an LPP message.

4.3.3 LPP Acknowledgement

4.3.3.1 General

Each LPP message may carry an acknowledgement request and/or an acknowledgement indicator. A LPP message including an acknowledgement request (i.e., that include the IE *ackRequested* set to TRUE) shall also include a sequence number. Upon reception of an LPP message which includes the IE *ackRequested* set to TRUE, a receiver returns an LPP message with an acknowledgement response (i.e., that includes the *ackIndicator* IE set to the same sequence number of the message being acknowledged). An acknowledgement response may contain no LPP message body (in which case only the sequence number being acknowledged is significant); alternatively, the acknowledgement may be sent in an LPP message along with an LPP message body. An acknowledgement is returned for each received LPP message that requested an acknowledgement including any duplicate(s). Once a sender receives an acknowledgement for an LPP message, and provided any included sequence number is matching, it is permitted to send the next LPP message. No message reordering is needed at the receiver since this stop-and-wait method of sending ensures that messages normally arrive in the correct order.

When an LPP message is transported via a NAS MO-LR request, the message does not request an acknowledgement.

4.3.3.2 Procedure related to Acknowledgement

Figure 4.3.3.2-1 shows the procedure related to acknowledgement.

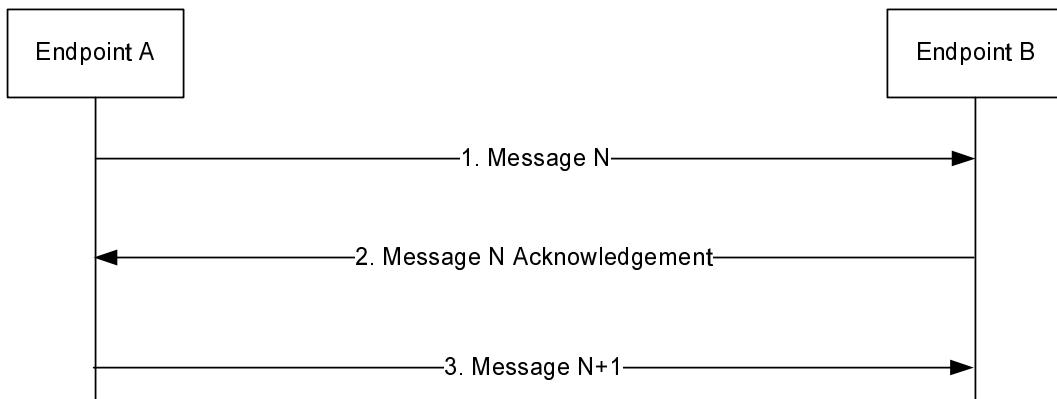


Figure 4.3.3.2-1: LPP Acknowledgement procedure

1. Endpoint A sends an LPP message N to Endpoint B which includes the IE *ackRequested* set to TRUE and a sequence number.
2. If LPP message N is received and Endpoint B is able to decode the *ackRequested* value and sequence number, Endpoint B shall return an acknowledgement for message N . The acknowledgement shall contain the IE *ackIndicator* set to the same sequence number as that in message N .
3. When the acknowledgement for LPP message N is received and provided the included *ackIndicator* IE matches the sequence number sent in message N , Endpoint A sends the next LPP message $N+1$ to Endpoint B when this message is available.

4.3.4 LPP Retransmission

4.3.4.1 General

This capability builds on the acknowledgement and duplicate detection capabilities. When an LPP message which requires acknowledgement is sent and not acknowledged, it is resent by the sender following a timeout period up to three times. If still unacknowledged after that, the sender aborts all LPP activity for the associated session. The timeout period is determined by the sender implementation but shall not be less than a minimum value of 250ms.

In addition, for NB-IoT the timeout period may be determined by the sender implementation based on e.g., the coverage level of the UE.

4.3.4.2 Procedure related to Retransmission

Figure 4.3.4.2-1 shows the procedure related to retransmission when combined with acknowledgement and duplicate detection.

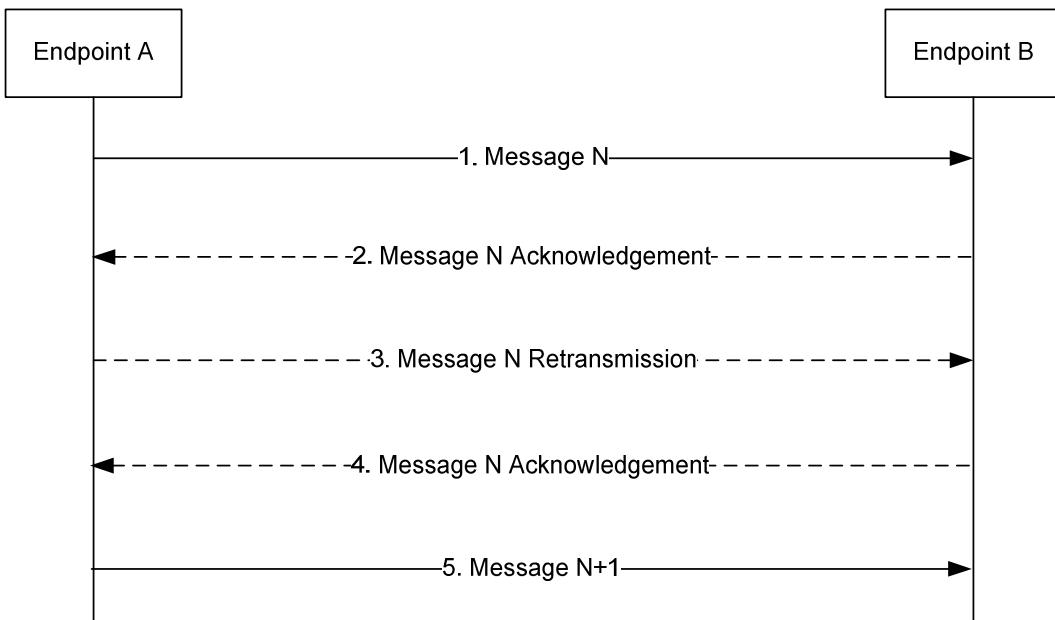


Figure 4.3.4.2-1: LPP Retransmission procedure

1. Endpoint A sends an LPP message N to Endpoint B for a particular location session and includes a request for acknowledgement along with a sequence number.
2. If LPP message N is received and Endpoint B is able to decode the *ackRequested* value and sequence number (regardless of whether the message body can be correctly decoded), Endpoint B shall return an acknowledgement for message N . If the acknowledgement is received by Endpoint A (such that the acknowledged message can be identified and sequence numbers are matching), Endpoint A skips steps 3 and 4.
3. If the acknowledgement in step 2 is not received after a timeout period, Endpoint A shall retransmit LPP message N and shall include the same sequence number as in step 1.
4. If LPP message N in step 3 is received and Endpoint B is able to decode the *ackRequested* value and sequence number (regardless of whether the message body can be correctly decoded and whether or not the message is considered a duplicate), Endpoint B shall return an acknowledgement. Steps 3 may be repeated one or more times if the acknowledgement in step 4 is not received after a timeout period by Endpoint A. If the acknowledgement in step 4 is still not received after sending three retransmissions, Endpoint A shall abort all procedures and activity associated with LPP support for the particular location session.
5. Once an acknowledgement in step 2 or step 4 is received, Endpoint A sends the next LPP message $N+1$ for the location session to Endpoint B when this message is available.

5 LPP Procedures

5.1 Procedures related to capability transfer

The purpose of the procedures that are grouped together in this section is to enable the transfer of capabilities from the target device to the server. Capabilities in this context refer to positioning and protocol capabilities related to LPP and the positioning methods supported by LPP.

These procedures instantiate the Capability Transfer transaction from 3GPP TS 36.305 [2].

5.1.1 Capability Transfer procedure

The Capability Transfer procedure is shown in Figure 5.1.1-1.

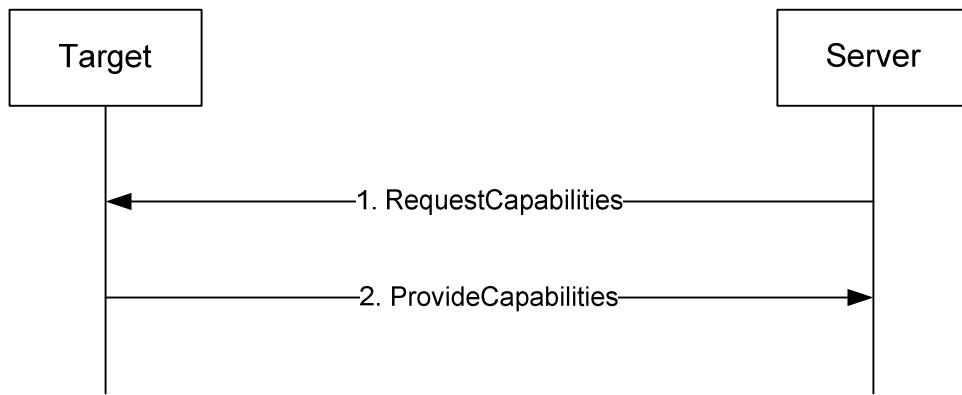


Figure 5.1.1-1: LPP Capability Transfer procedure

1. The server sends a *RequestCapabilities* message to the target. The server may indicate the types of capability needed.
2. The target responds with a *ProvideCapabilities* message to the server. The capabilities shall correspond to any capability types specified in step 1. This message shall include the *endTransaction* IE set to TRUE.

5.1.2 Capability Indication procedure

The Capability Indication procedure allows the target to provide unsolicited capabilities to the server and is shown in Figure 5.1.2-1.

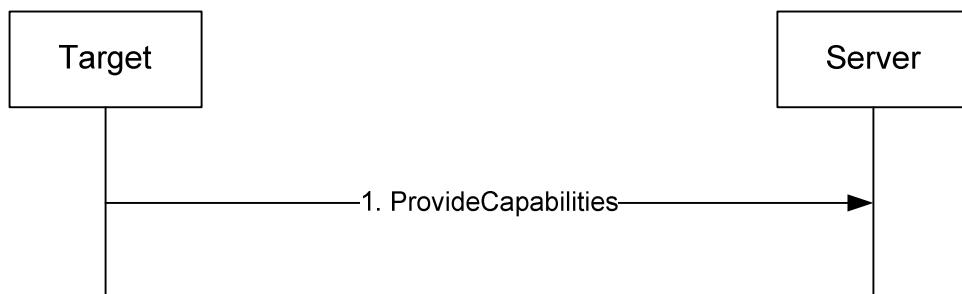


Figure 5.1.2-1: LPP Capability Indication procedure

1. The target sends a *ProvideCapabilities* message to the server. This message shall include the *endTransaction* IE set to TRUE.

5.1.3 Reception of LPP Request Capabilities

Upon receiving a *RequestCapabilities* message, the target device shall generate a *ProvideCapabilities* message as a response.

The target device shall:

- 1> for each positioning method for which a request for capabilities is included in the message:
- 2> if the target device supports this positioning method:
 - 3> include the capabilities of the device for that supported positioning method in the response message;
- 1> set the IE *LPP-TransactionID* in the response message to the same value as the IE *LPP-TransactionID* in the received message;
- 1> deliver the response message to lower layers for transmission.

5.1.4 Transmission of LPP Provide Capabilities

When triggered to transmit a *ProvideCapabilities* message, the target device shall:

- 1> for each positioning method whose capabilities are to be indicated:
- 2> set the corresponding IE to include the device's capabilities;
- 2> if OTDOA capabilities are to be indicated:
 - 3> include the IE *supportedBandListEUTRA*;
- 1> deliver the response to lower layers for transmission.

5.2 Procedures related to Assistance Data Transfer

The purpose of the procedures in this section is to enable the target to request assistance data from the server to assist in positioning, and to enable the server to transfer assistance data to the target in the absence of a request.

These procedures instantiate the Assistance Data Transfer transaction from 3GPP TS 36.305 [2].

5.2.1 Assistance Data Transfer procedure

The Assistance Data Transfer procedure is shown in Figure 5.2.1-1.

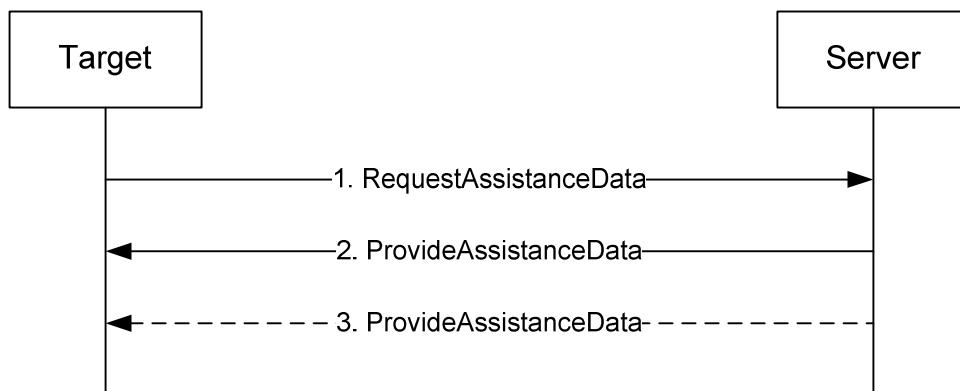


Figure 5.2.1-1: LPP Assistance data transfer procedure

1. The target sends a *RequestAssistanceData* message to the server.
2. The server responds with a *ProvideAssistanceData* message to the target containing assistance data. The transferred assistance data should match or be a subset of the assistance data requested in step 1. The server may also provide any not requested information that it considers useful to the target . If step 3 does not occur, this message shall set the *endTransaction* IE to TRUE.
3. The server may transmit one or more additional *ProvideAssistanceData* messages to the target containing further assistance data. The transferred assistance data should match or be a subset of the assistance data requested in step 1. The server may also provide any not requested information that it considers useful to the target. The last message shall include the *endTransaction* IE set to TRUE.

5.2.2 Assistance Data Delivery procedure

The Assistance Data Delivery procedure allows the server to provide unsolicited assistance data to the target and is shown in Figure 5.2.2-1.

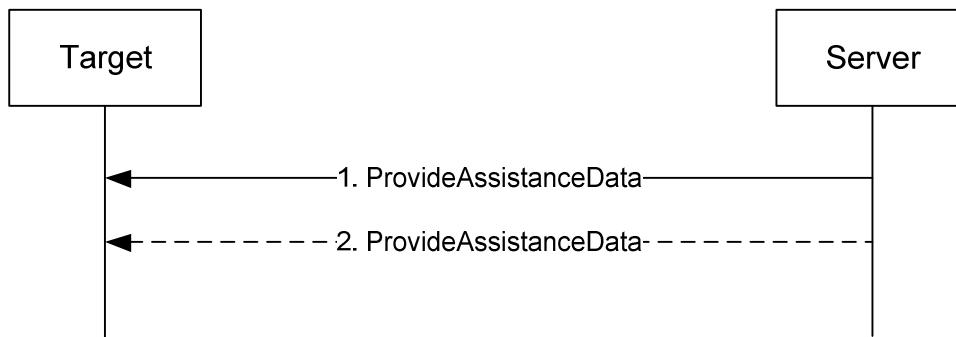


Figure 5.2.2-1: LPP Assistance data transfer procedure

1. The server sends a *ProvideAssistanceData* message to the target containing assistance data. If step 2 does not occur, this message shall set the *endTransaction* IE to TRUE.
2. The server may transmit one or more additional *ProvideAssistanceData* messages to the target containing additional assistance data. The last message shall include the *endTransaction* IE set to TRUE.

5.2.3 Transmission of LPP Request Assistance Data

When triggered to transmit a *RequestAssistanceData* message, the target device shall:

- 1> set the IEs for the positioning-method-specific request for assistance data to request the data indicated by upper layers.

5.2.4 Reception of LPP Provide Assistance Data

Upon receiving a *ProvideAssistanceData* message, the target device shall:

- 1> for each positioning method contained in the message:
2> deliver the related assistance data to upper layers.

5.3 Procedures related to Location Information Transfer

The purpose of the procedures in this section is to enable the server to request location measurement data and/or a location estimate from the target, and to enable the target to transfer location measurement data and/or a location estimate to a server in the absence of a request.

These procedures instantiate the Location Information Transfer transaction in 3GPP TS 36.305 [2].

NOTE: The service layer (e.g. NAS or OMA SUPL ULP) would be used to transfer information associated with a location request from a target to a server (MO-LR).

5.3.1 Location Information Transfer procedure

The Location Information Transfer procedure is shown in Figure 5.3.1-1.

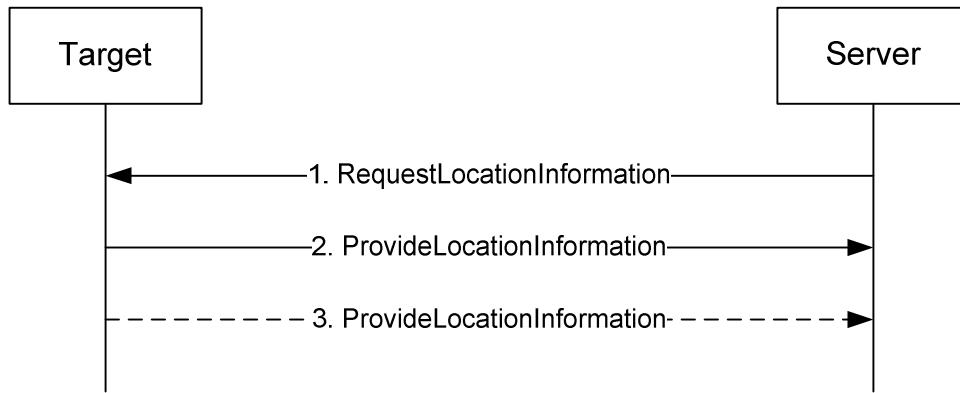


Figure 5.3.1-1: LPP Location Information transfer procedure

1. The server sends a *RequestLocationInformation* message to the target to request location information, indicating the type of location information needed and potentially the associated QoS.
2. The target sends a *ProvideLocationInformation* message to the server to transfer location information. The location information transferred should match or be a subset of the location information requested in step 1 unless the server explicitly allows additional location information. If step 3 does not occur, this message shall set the *endTransaction* IE to TRUE.
3. If requested in step 1, the target sends additional *ProvideLocationInformation* messages to the server to transfer location information. The location information transferred should match or be a subset of the location information requested in step 1 unless the server explicitly allows additional location information. The last message shall include the *endTransaction* IE set to TRUE.

5.3.2 Location Information Delivery procedure

The Location Information Delivery allows the target to provide unsolicited location information to the server. The procedure is shown in Figure 5.3.2-1.

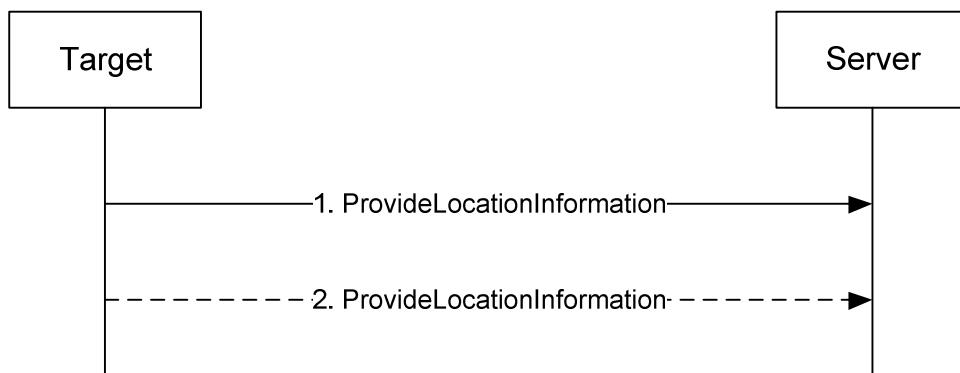


Figure 5.3.2-1: LPP Location Information Delivery procedure

1. The target sends a *ProvideLocationInformation* message to the server to transfer location information. If step 2 does not occur, this message shall set the *endTransaction* IE to TRUE.
2. The target may send one or more additional *ProvideLocationInformation* messages to the server containing additional location information data. The last message shall include the *endTransaction* IE set to TRUE.

5.3.3 Reception of Request Location Information

Upon receiving a *RequestLocationInformation* message, the target device shall:

- 1> if the requested information is compatible with the target device capabilities and configuration:
 - 2> include the requested information in a *ProvideLocationInformation* message;
 - 2> set the IE *LPP-TransactionID* in the response to the same value as the IE *LPP-TransactionID* in the received message;
 - 2> deliver the *ProvideLocationInformation* message to lower layers for transmission.
- 1> otherwise:
 - 2> if one or more positioning methods are included that the target device does not support:
 - 3> continue to process the message as if it contained only information for the supported positioning methods;
 - 3> handle the signaling content of the unsupported positioning methods by LPP error detection as in 5.4.3.

5.3.4 Transmission of Provide Location Information

When triggered to transmit *ProvideLocationInformation* message, the target device shall:

- 1> for each positioning method contained in the message:
 - 2> set the corresponding IE to include the available location information;
- 1> deliver the response to lower layers for transmission.

5.4 Error Handling Procedures

5.4.1 General

This sub-clause describes how a receiving entity (target device or location server) behaves in cases when it receives erroneous or unexpected data or detects that certain data are missing.

5.4.2 Procedures related to Error Indication

Figure 5.4.2-1 shows the Error indication procedure.

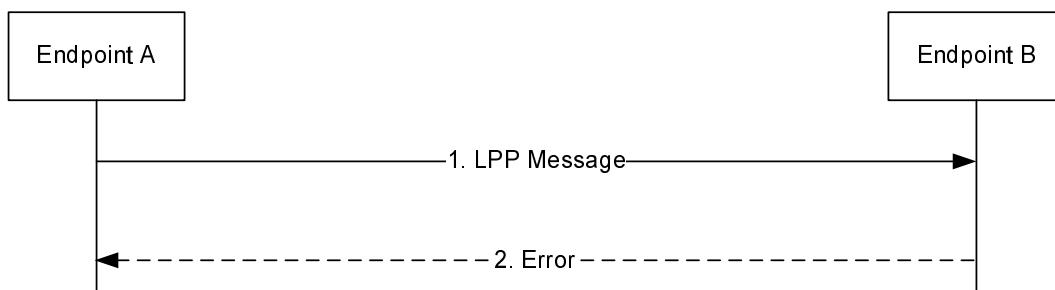


Figure 5.4.2-1: LPP Error Indication procedure

1. Endpoint A sends an LPP message to Endpoint B.
2. Endpoint B determines that the LPP message in step 1 contains an error. Endpoint B returns an *Error* message to Endpoint A indicating the error or errors and discards the message in step 1. If Endpoint B is able to determine that the erroneous LPP message in step 1 is an LPP Error or Abort Message, Endpoint B discards the message in step 1 without returning an *Error* message to Endpoint A.

5.4.3 LPP Error Detection

Upon receiving any LPP message, the receiving entity shall attempt to decode the message and verify the presence of any errors and:

- 1> if decoding errors are encountered:
 - 2> if the receiver can not determine that the received message is an LPP *Error* or *Abort* message:
 - 3> return an LPP *Error* message to the sender and include the received *LPP-TransactionID*, if this was decoded, and type of error;
 - 3> discard the received message and stop the error detection procedure;
- 1> if the message is a duplicate of a previously received message:
 - 2> discard the message and stop the error detection procedure;
- 1> if the *LPP-TransactionID* matches the *LPP-TransactionID* for a procedure that is still ongoing for the same session and the message type is invalid for the current state of the procedure:
 - 2> abort the ongoing procedure;
 - 2> return an LPP *Error* message to the sender and include the received transaction ID and type of error;
 - 2> discard the message and stop the error detection procedure;
- 1> if the message type is an LPP *RequestCapabilities* and some of the requested information is not supported:
 - 2> return any information that can be provided in a normal response.
- 1> if the message type is an LPP *RequestAssistanceData* or *RequestLocationInformation* and some or all of the requested information is not supported:
 - 2> return any information that can be provided in a normal response, which includes indications on other information that is not supported.

5.4.4 Reception of an LPP Error Message

Upon receiving an *Error* message, a device shall:

- 1> abort any ongoing procedure associated with the *LPP-TransactionID* if included in the received message.

The device may:

- 1> restart the aborted procedure taking into consideration the returned error information.


5.5 Abort Procedure

5.5.1 General

The purpose of the abort procedure is to allow the target device or location server to abort an ongoing procedure due to some unexpected event (e.g., cancellation of a location request by an LCS client). It can also be used to stop an ongoing procedure (e.g., periodic location reporting from the target device).

5.5.2 Procedures related to Abort

Figure 5.5.2-1 shows the Abort procedure.

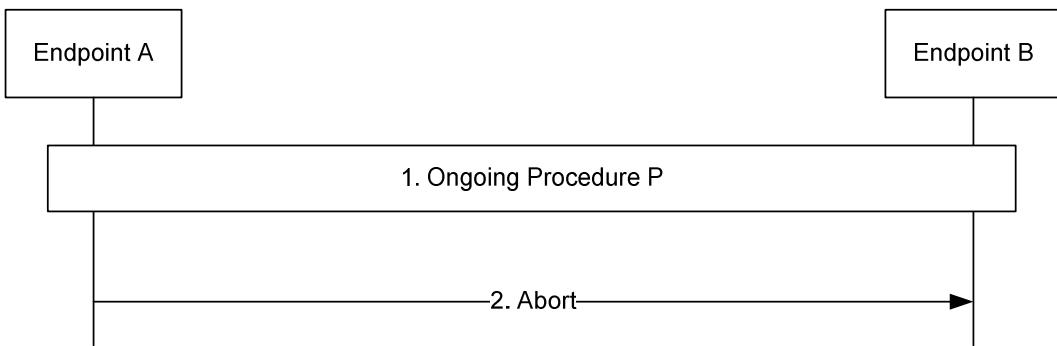**Figure 5.5.2-1: LPP Abort procedure**

1. A procedure P is ongoing between endpoints A and B.
2. Endpoint A determines that the procedure must be aborted and sends an *Abort* message to Endpoint B carrying the transaction ID for procedure P. Endpoint B aborts procedure P.

5.5.3 Reception of an LPP Abort Message

Upon receiving an *Abort* message, a device shall:

- 1> abort any ongoing procedure associated with the transaction ID indicated in the message.

6 Information Element Abstract Syntax Definition

6.1 General

The contents of each LPP message is specified in sub-clause 6.2 using ASN.1 to specify the message syntax and using tables when needed to provide further detailed information about the fields specified in the message syntax.

The ASN.1 in this section uses the same format and coding conventions as described in Annex A of [12].

Transfer syntax for LPP messages is derived from their ASN.1 definitions by use of Basic Packed Encoding Rules (BASIC-PER), Unaligned Variant, as specified in ITU-T Rec. X.691 [22]. The encoded LPP message always contains a multiple of 8 bits.

Transfer syntax for LPP IEs is derived from their ASN.1 definitions by use of Basic Packed Encoding Rules (BASIC-PER), Unaligned Variant, as specified in ITU-T Rec. X.691 [22]. The encoded LPP IE always contains a multiple of 8 bits. This applies when a single LPP IE is encoded as the basic production, i.e. for other purposes than encoding the LPP IE within an LPP message.

The need for fields to be present in a message or an abstract type, i.e., the ASN.1 fields that are specified as OPTIONAL in the abstract notation (ASN.1), is specified by means of comment text tags attached to the OPTIONAL statement in the abstract syntax. The meaning of each tag is specified in table 6.1-1. These tags are used in the downlink (server to target) direction only.

Table 6.1-1: Meaning of abbreviations used to specify the need for fields to be present

Abbreviation	Meaning
Cond <i>conditionTag</i>	<p><i>Conditionally present</i></p> <p>A field for which the need is specified by means of conditions. For each <i>conditionTag</i>, the need is specified in a tabular form following the ASN.1 segment. In case, according to the conditions, a field is not present, the target takes no action and where applicable shall continue to use the existing value (and/or the associated functionality) unless explicitly stated otherwise in the description of the field itself.</p>
Need OP	<p><i>Optionally present</i></p> <p>A field that is optional to signal. For downlink messages, the target is not required to take any special action on absence of the field beyond what is specified in the procedural text or</p>

Abbreviation	Meaning
	the field description table following the ASN.1 segment. The target behaviour on absence should be captured either in the procedural text or in the field description.
Need ON	<i>Optionally present, No action</i> A field that is optional to signal. If the message is received by the target, and in case the field is absent, the target takes no action and where applicable shall continue to use the existing value (and/or the associated functionality).
Need OR	<i>Optionally present, Release</i> A field that is optional to signal. If the message is received by the target, and in case the field is absent, the target shall discontinue/ stop using/ delete any existing value (and/ or the associated functionality).

When specifying information elements which are to be represented by BIT STRINGs, if not otherwise specifically stated in the field description of the concerned IE or elsewhere, the following principle applies with regards to the ordering of bits:

- The first bit (leftmost bit) contains the most significant bit (MSB);
- the last bit (rightmost bit) contains the least significant bit (LSB).

6.2 LPP PDU Structure

— *LPP-PDU-Definitions*

This ASN.1 segment is the start of the LPP PDU definitions.

```
-- ASN1START

LPP-PDU-Definitions {
itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
eps-Access (21) modules (3) lpp (7) version1 (1) lpp-PDU-Definitions (1) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ASN1STOP
```

— *LPP-Message*

The *LPP-Message* provides the complete set of information for an invocation or response pertaining to an LPP transaction.

```
-- ASN1START

LPP-Message ::= SEQUENCE {
    transactionID      LPP-TransactionID   OPTIONAL,    -- Need ON
    endTransaction     BOOLEAN,
    sequenceNumber     SequenceNumber      OPTIONAL,    -- Need ON
    acknowledgement     Acknowledgement    OPTIONAL,    -- Need ON
    lpp-MessageBody    LPP-MessageBody    OPTIONAL,    -- Need ON
}

SequenceNumber ::= INTEGER (0..255)

Acknowledgement ::= SEQUENCE {
    ackRequested     BOOLEAN,
    ackIndicator     SequenceNumber      OPTIONAL
}

-- ASN1STOP
```

LPP-Message field descriptions	
transactionID	This field is omitted if an <i>Ipp-MessageBody</i> is not present (i.e. in an LPP message sent only to acknowledge a previously received message) or if it is not available to the transmitting entity (e.g., in an <i>LPP-Error</i> message triggered by a message that could not be parsed). If present, this field shall be ignored at a receiver in an LPP message for which the <i>Ipp-MessageBody</i> is not present.
endTransaction	This field indicates whether an LPP message is the last message carrying an <i>Ipp-MessageBody</i> in a transaction (TRUE) or not last (FALSE).
sequenceNumber	This field may be included when LPP operates over the control plane and an <i>Ipp-MessageBody</i> is included but shall be omitted otherwise.
acknowledgement	This field is included in an LPP acknowledgement and in any LPP message requesting an acknowledgement when LPP operates over the control plane and is omitted otherwise
ackRequested	This field indicates whether an LPP acknowledgement is requested (TRUE) or not (FALSE). A value of TRUE may only be included when an <i>Ipp-MessageBody</i> is included.
ackIndicator	This field indicates the sequence number of the message being acknowledged.
Ipp-MessageBody	This field may be omitted in case the message is sent only to acknowledge a previously received message.

— *LPP-MessageBody*

The *LPP-MessageBody* identifies the type of an LPP message and contains all LPP information specifically associated with that type.

```
-- ASN1START

LPP-MessageBody ::= CHOICE {
    c1           CHOICE {
        requestCapabilities   RequestCapabilities,
        provideCapabilities   ProvideCapabilities,
        requestAssistanceData RequestAssistanceData,
        provideAssistanceData ProvideAssistanceData,
        requestLocationInformation RequestLocationInformation,
        provideLocationInformation ProvideLocationInformation,
        abort                 Abort,
        error                 Error,
        spare7 NULL, spare6 NULL, spare5 NULL, spare4 NULL,
        spare3 NULL, spare2 NULL, spare1 NULL, spare0 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

— *LPP-TransactionID*

The *LPP-TransactionID* identifies a particular LPP transaction and the initiator of the transaction.

```
-- ASN1START

LPP-TransactionID ::= SEQUENCE {
    initiator          Initiator,
    transactionNumber TransactionNumber,
    ...
}

Initiator ::= ENUMERATED {
    locationServer,
    targetDevice,
    ...
}

TransactionNumber ::= INTEGER (0..255)

-- ASN1STOP
```

6.3 Message Body IEs

– *RequestCapabilities*

The *RequestCapabilities* message body in a LPP message is used by the location server to request the target device capability information for LPP and the supported individual positioning methods.

```
-- ASN1START

RequestCapabilities ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            requestCapabilities-r9      RequestCapabilities-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture     SEQUENCE {}
    }
}

RequestCapabilities-r9-IEs ::= SEQUENCE {
    commonIEsRequestCapabilities      CommonIEsRequestCapabilities      OPTIONAL, -- Need ON
    a-gnss-RequestCapabilities       A-GNSS-RequestCapabilities      OPTIONAL, -- Need ON
    otdoa-RequestCapabilities        OTDOA-RequestCapabilities      OPTIONAL, -- Need ON
    ecid-RequestCapabilities         ECID-RequestCapabilities      OPTIONAL, -- Need ON
    epdu-RequestCapabilities         EPDU-Sequence                  OPTIONAL, -- Need ON
    ...
    [[ sensor-RequestCapabilities-r13 Sensor-RequestCapabilities-r13      OPTIONAL, -- Need ON
        tbs-RequestCapabilities-r13   TBS-RequestCapabilities-r13      OPTIONAL, -- Need ON
        wlan-RequestCapabilities-r13 WLAN-RequestCapabilities-r13      OPTIONAL, -- Need ON
        bt-RequestCapabilities-r13   BT-RequestCapabilities-r13      OPTIONAL, -- Need ON
    ]]
}

-- ASN1STOP
```

RequestCapabilities field descriptions

commonIEsRequestCapabilities

This IE is provided for future extensibility and should not be included in this version of the protocol.

– *ProvideCapabilities*

The *ProvideCapabilities* message body in a LPP message indicates the LPP capabilities of the target device to the location server.

```
-- ASN1START

ProvideCapabilities ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            provideCapabilities-r9      ProvideCapabilities-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture     SEQUENCE {}
    }
}

ProvideCapabilities-r9-IEs ::= SEQUENCE {
    commonIEsProvideCapabilities      CommonIEsProvideCapabilities      OPTIONAL,
    a-gnss-ProvideCapabilities       A-GNSS-ProvideCapabilities      OPTIONAL,
    otdoa-ProvideCapabilities        OTDOA-ProvideCapabilities      OPTIONAL,
    ecid-ProvideCapabilities         ECID-ProvideCapabilities      OPTIONAL,
    epdu-ProvideCapabilities         EPDU-Sequence                  OPTIONAL,
    ...
    [[ sensor-ProvideCapabilities-r13 Sensor-ProvideCapabilities-r13      OPTIONAL,
        tbs-ProvideCapabilities-r13   TBS-ProvideCapabilities-r13      OPTIONAL,
        wlan-ProvideCapabilities-r13 WLAN-ProvideCapabilities-r13      OPTIONAL,
        bt-ProvideCapabilities-r13   BT-ProvideCapabilities-r13      OPTIONAL
    ]]
}
```

```
}
-- ASN1STOP
```

***ProvideCapabilities* field descriptions**

commonIEsProvideCapabilities

This IE is provided for future extensibility and should not be included in this version of the protocol.

– *RequestAssistanceData*

The *RequestAssistanceData* message body in a LPP message is used by the target device to request assistance data from the location server.

```
-- ASN1START

RequestAssistanceData ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            requestAssistanceData-r9   RequestAssistanceData-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture   SEQUENCE {}
    }
}

RequestAssistanceData-r9-IEs ::= SEQUENCE {
    commonIEsRequestAssistanceData   CommonIEsRequestAssistanceData      OPTIONAL,
    a-gnss-RequestAssistanceData    A-GNSS-RequestAssistanceData      OPTIONAL,
    otdoa-RequestAssistanceData    OTDOA-RequestAssistanceData      OPTIONAL,
    epdu-RequestAssistanceData     EPDU-Sequence                   OPTIONAL,
    ...
    [[ sensor-RequestAssistanceData-r14           Sensor-RequestAssistanceData-r14      OPTIONAL,
      tbs-RequestAssistanceData-r14        TBS-RequestAssistanceData-r14      OPTIONAL,
      wlan-RequestAssistanceData-r14       WLAN-RequestAssistanceData-r14     OPTIONAL
    ]]
}

-- ASN1STOP
```

– *ProvideAssistanceData*

The *ProvideAssistanceData* message body in a LPP message is used by the location server to provide assistance data to the target device either in response to a request from the target device or in an unsolicited manner.

```
-- ASN1START

ProvideAssistanceData ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            provideAssistanceData-r9   ProvideAssistanceData-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture   SEQUENCE {}
    }
}

ProvideAssistanceData-r9-IEs ::= SEQUENCE {
    commonIEsProvideAssistanceData   CommonIEsProvideAssistanceData      OPTIONAL, -- Need ON
    a-gnss-ProvideAssistanceData    A-GNSS-ProvideAssistanceData      OPTIONAL, -- Need ON
    otdoa-ProvideAssistanceData    OTDOA-ProvideAssistanceData      OPTIONAL, -- Need ON
    epdu-Provide-Assistance-Data   EPDU-Sequence                   OPTIONAL, -- Need ON
    ...
    [[
      sensor-ProvideAssistanceData-r14       Sensor-ProvideAssistanceData-r14      OPTIONAL, -- Need ON
      tbs-ProvideAssistanceData-r14        TBS-ProvideAssistanceData-r14      OPTIONAL, -- Need ON
      wlan-ProvideAssistanceData-r14       WLAN-ProvideAssistanceData-r14     OPTIONAL, -- Need ON
    ]]
}

-- ASN1STOP
```

***ProvideAssistanceData* field descriptions**

commonIEsProvideAssistanceData

This IE is provided for future extensibility and should not be included in this version of the protocol.

- ***RequestLocationInformation***

The *RequestLocationInformation* message body in a LPP message is used by the location server to request positioning measurements or a position estimate from the target device.

```
-- ASN1START

RequestLocationInformation ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            requestLocationInformation-r9   RequestLocationInformation-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture     SEQUENCE {}
    }
}

RequestLocationInformation-r9-IEs ::= SEQUENCE {
    commonIEsRequestLocationInformation
        CommonIEsRequestLocationInformation OPTIONAL, -- Need ON
    a-gnss-RequestLocationInformation   A-GNSS-RequestLocationInformation OPTIONAL, -- Need ON
    ottdoa-RequestLocationInformation  OTDOA-RequestLocationInformation OPTIONAL, -- Need ON
    ecid-RequestLocationInformation   ECID-RequestLocationInformation OPTIONAL, -- Need ON
    epdu-RequestLocationInformation   EPDU-Sequence OPTIONAL, -- Need ON
    ...
    [
        sensor-RequestLocationInformation-r13
            Sensor-RequestLocationInformation-r13
                OPTIONAL, -- Need ON
        tbs-RequestLocationInformation-r13   TBS-RequestLocationInformation-r13 OPTIONAL, -- Need ON
        wlan-RequestLocationInformation-r13 WLAN-RequestLocationInformation-r13 OPTIONAL, -- Need ON
        bt-RequestLocationInformation-r13   BT-RequestLocationInformation-r13 OPTIONAL, -- Need ON
    ]
}
-- ASN1STOP
```

***RequestLocationInformation* field descriptions**

commonIEsRequestLocationInformation

This field specifies the location information type requested by the location server and optionally other configuration information associated with the requested location information. This field should always be included in this version of the protocol.

- ***ProvideLocationInformation***

The *ProvideLocationInformation* message body in a LPP message is used by the target device to provide positioning measurements or position estimates to the location server.

```
-- ASN1START

ProvideLocationInformation ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                  CHOICE {
            provideLocationInformation-r9   ProvideLocationInformation-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture     SEQUENCE {}
    }
}

ProvideLocationInformation-r9-IEs ::= SEQUENCE {
    commonIEsProvideLocationInformation
        CommonIEsProvideLocationInformation OPTIONAL,
```

```

a-gnss-ProvideLocationInformation    A-GNSS-ProvideLocationInformation   OPTIONAL,
otdoa-ProvideLocationInformation    OTDOA-ProvideLocationInformation  OPTIONAL,
ecid-ProvideLocationInformation    ECID-ProvideLocationInformation  OPTIONAL,
epdu-ProvideLocationInformation    EPDU-Sequence                  OPTIONAL,
...
[[[
sensor-ProvideLocationInformation-r13      Sensor-ProvideLocationInformation-r13
                                              OPTIONAL,
tbs-ProvideLocationInformation-r13      TBS-ProvideLocationInformation-r13  OPTIONAL,
wlan-ProvideLocationInformation-r13     WLAN-ProvideLocationInformation-r13 OPTIONAL,
bt-ProvideLocationInformation-r13       BT-ProvideLocationInformation-r13  OPTIONAL
]]]
}

-- ASN1STOP

```

Abort

The *Abort* message body in a LPP message carries a request to abort an ongoing LPP procedure.

```

-- ASN1START

Abort ::= SEQUENCE {
    criticalExtensions      CHOICE {
        c1                 CHOICE {
            abort-r9          Abort-r9-IES,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture  SEQUENCE {}
    }
}

Abort-r9-IES ::= SEQUENCE {
    commonIEsAbort           CommonIEsAbort          OPTIONAL, -- Need ON
    ...,
    epdu-Abort                EPDU-Sequence         OPTIONAL, -- Need ON
}

-- ASN1STOP

```

Error

The *Error* message body in a LPP message carries information concerning a LPP message that was received with errors.

```

-- ASN1START

Error ::= CHOICE {
    error-r9                 Error-r9-IES,
    criticalExtensionsFuture  SEQUENCE {}
}

Error-r9-IES ::= SEQUENCE {
    commonIEsError             CommonIEsError          OPTIONAL, -- Need ON
    ...,
    epdu-Error                 EPDU-Sequence         OPTIONAL, -- Need ON
}

-- ASN1STOP

```

6.4 Common IEs

Common IEs comprise IEs that are applicable to more than one LPP positioning method.

6.4.1 Common Lower-Level IEs

— *AccessTypes*

The IE *AccessTypes* is used to indicate several cellular access types using a bit map.

```
-- ASN1START
AccessTypes ::= SEQUENCE {
    accessTypes      BIT STRING { eutra      (0),
                                    utra       (1),
                                    gsm        (2),
                                    nb-iot     (3) } (SIZE (1..8)),
    ...
}
-- ASN1STOP
```

***AccessTypes* field descriptions**

accessTypes

This field specifies the cellular access type(s). This is represented by a bit string, with a one-value at the bit position means the particular access type is addressed; a zero-value means not addressed.

— *ARFCN-ValueEUTRA*

The IEs *ARFCN-ValueEUTRA* and *ARFCN-ValueEUTRA-v9a0* are used to indicate the ARFCN of the E-UTRA carrier frequency, as defined in [12].

```
-- ASN1START
ARFCN-ValueEUTRA ::= INTEGER (0..maxEARFCN)
ARFCN-ValueEUTRA-v9a0 ::= INTEGER (maxEARFCN-Plus1..maxEARFCN2)
ARFCN-ValueEUTRA-r14 ::= INTEGER (0..maxEARFCN2)
maxEARFCN           ::= 65535   -- Maximum value of EUTRA carrier frequency
maxEARFCN-Plus1     ::= 65536   -- Lowest value extended EARFCN range
maxEARFCN2          ::= 262143  -- Highest value extended EARFCN range
-- ASN1STOP
```

NOTE: For fields using the original value range, as defined by IE *ARFCN-ValueEUTRA* i.e. without suffix, value *maxEARFCN* indicates that the E-UTRA carrier frequency is indicated by means of an extension.

— *ARFCN-ValueUTRA*

The IE *ARFCN-ValueUTRA* is used to indicate the ARFCN of the UTRA carrier frequency, as defined in [13].

```
-- ASN1START
ARFCN-ValueUTRA ::= INTEGER (0..16383)
-- ASN1STOP
```

— *CarrierFreq-NB*

The IE *CarrierFreq-NB* is used to provide the NB-IoT carrier frequency, as defined in TS 36.101 [21].

```
-- ASN1START
CarrierFreq-NB-r14 ::= SEQUENCE {
    carrierFreq-r14      ARFCN-ValueEUTRA-r14,
```

```

carrierFreqOffset-r14      CarrierFreqOffsetNB-r14      OPTIONAL,
...
}

-- ASN1STOP

```

CarrierFreq-NB field descriptions

carrierFreq

This field specifies the ARFCN applicable for the NB-IoT carrier frequency as defined in TS 36.101 [21, Table 5.7.3-1].

carrierFreqOffset

This field specifies the offset of the NB-IoT channel number to EARFCN as defined in TS 36.101 [21].

- ***CarrierFreqOffsetNB***

The IE *CarrierFreqOffsetNB* is used to provide the offset of the NB-IoT channel number to EARFCN of a NB-IoT carrier.

```

-- ASN1START

CarrierFreqOffsetNB-r14 ::= ENUMERATED {
    v-10, v-9, v-8, v-7, v-6, v-5, v-4, v-3, v-2, v-1, v-0dot5,
    v0, v1, v2, v3, v4, v5, v6, v7, v8, v9
}

-- ASN1STOP

```

CarrierFreqOffsetNB field descriptions

CarrierFreqOffsetNB

This field specifies the offset of the NB-IoT channel number to EARFCN as defined in TS 36.101 [21]. Value v-10 means -10, v-9 means -9, and so on.

- ***CellGlobalIdEUTRA-AndUTRA***

The IE *CellGlobalIdEUTRA-AndUTRA* specifies the global Cell Identifier for E-UTRA or UTRA, the globally unique identity of a cell in E-UTRA or UTRA.

```

-- ASN1START

CellGlobalIdEUTRA-AndUTRA ::= SEQUENCE {
    plmn-Identity      SEQUENCE {
        mcc          SEQUENCE (SIZE (3))      OF INTEGER (0..9),
        mnc          SEQUENCE (SIZE (2..3))    OF INTEGER (0..9)
    },
    cellIdentity       CHOICE {
        eutra        BIT STRING (SIZE (28)),
        utra         BIT STRING (SIZE (32))
    },
    ...
}

-- ASN1STOP

```

CellGlobalIdEUTRA-AndUTRA field descriptions

plmn-Identity

This field identifies the PLMN of the cell as defined in [12].

cellIdentity

This field defines the identity of the cell within the context of the PLMN as defined in [12] and [13]. The size of the bit string allows for the 32-bit extended UTRAN cell ID; in case the cell ID is shorter, the first bits of the string are set to 0.

- ***CellGlobalIdGERAN***

The IE *CellGlobalIdGERAN* specifies the global Cell Identifier for GERAN, the globally unique identity of a cell in GERAN.

```
-- ASN1START
CellGlobalIdGERAN ::= SEQUENCE {
    plmn-Identity      SEQUENCE {
        mcc          SEQUENCE (SIZE (3))   OF INTEGER (0..9),
        mnc          SEQUENCE (SIZE (2..3)) OF INTEGER (0..9)
    },
    locationAreaCode   BIT STRING (SIZE (16)),
    cellIdentity      BIT STRING (SIZE (16)),
    ...
}
-- ASN1STOP
```

***CellGlobalIdGERAN* field descriptions**

plmn-Identity

This field identifies the PLMN of the cell.

locationAreaCode

This field is a fixed length code identifying the location area within a PLMN.

cellIdentity

This field specifies the cell Identifier which is unique within the context of the GERAN location area.

ECGI

The IE *ECGI* specifies the Evolved Cell Global Identifier (ECGI), the globally unique identity of a cell in E-UTRA [12].

NOTE: The IE *ECGI* is also used for NB-IoT access.

```
-- ASN1START
ECGI ::= SEQUENCE {
    mcc          SEQUENCE (SIZE (3))   OF INTEGER (0..9),
    mnc          SEQUENCE (SIZE (2..3)) OF INTEGER (0..9),
    cellidentity BIT STRING (SIZE (28))
}
-- ASN1STOP
```

Ellipsoid-Point

The IE *Ellipsoid-Point* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
Ellipsoid-Point ::= SEQUENCE {
    latitudeSign           ENUMERATED {north, south},
    degreesLatitude         INTEGER (0..8388607),           -- 23 bit field
    degreesLongitude        INTEGER (-8388608..8388607)       -- 24 bit field
}
-- ASN1STOP
```

Ellipsoid-PointWithUncertaintyCircle

The IE *Ellipsoid-PointWithUncertaintyCircle* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
Ellipsoid-PointWithUncertaintyCircle ::= SEQUENCE {
    latitudeSign           ENUMERATED {north, south},
    degreesLatitude         INTEGER (0..8388607),           -- 23 bit field
    degreesLongitude        INTEGER (-8388608..8388607),       -- 24 bit field
    uncertainty            INTEGER (0..127)
}
```

```
-- ASN1STOP
```

- *EllipsoidPointWithUncertaintyEllipse*

The IE *EllipsoidPointWithUncertaintyEllipse* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
EllipsoidPointWithUncertaintyEllipse ::= SEQUENCE {
    latitudeSign          ENUMERATED {north, south},
    degreesLatitude        INTEGER (0..8388607),           -- 23 bit field
    degreesLongitude       INTEGER (-8388608..8388607),      -- 24 bit field
    uncertaintySemiMajor   INTEGER (0..127),
    uncertaintySemiMinor  INTEGER (0..127),
    orientationMajorAxis  INTEGER (0..179),
    confidence            INTEGER (0..100)
}
-- ASN1STOP
```

- *EllipsoidPointWithAltitude*

The IE *EllipsoidPointWithAltitude* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
EllipsoidPointWithAltitude ::= SEQUENCE {
    latitudeSign          ENUMERATED {north, south},
    degreesLatitude        INTEGER (0..8388607),           -- 23 bit field
    degreesLongitude       INTEGER (-8388608..8388607),      -- 24 bit field
    altitudeDirection     ENUMERATED {height, depth},
    altitude              INTEGER (0..32767)                -- 15 bit field
}
-- ASN1STOP
```

- *EllipsoidPointWithAltitudeAndUncertaintyEllipsoid*

The IE *EllipsoidPointWithAltitudeAndUncertaintyEllipsoid* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
EllipsoidPointWithAltitudeAndUncertaintyEllipsoid ::= SEQUENCE {
    latitudeSign          ENUMERATED {north, south},
    degreesLatitude        INTEGER (0..8388607),           -- 23 bit field
    degreesLongitude       INTEGER (-8388608..8388607),      -- 24 bit field
    altitudeDirection     ENUMERATED {height, depth},
    altitude              INTEGER (0..32767),               -- 15 bit field
    uncertaintySemiMajor   INTEGER (0..127),
    uncertaintySemiMinor  INTEGER (0..127),
    orientationMajorAxis  INTEGER (0..179),
    uncertaintyAltitude   INTEGER (0..127),
    confidence            INTEGER (0..100)
}
-- ASN1STOP
```

- *EllipsoidArc*

The IE *EllipsoidArc* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START
EllipsoidArc ::= SEQUENCE {
    latitudeSign          ENUMERATED {north, south},
```

```

degreesLatitude           INTEGER (0..8388607),      -- 23 bit field
degreesLongitude          INTEGER (-8388608..8388607), -- 24 bit field
innerRadius               INTEGER (0..65535),        -- 16 bit field,
uncertaintyRadius         INTEGER (0..127),
offsetAngle               INTEGER (0..179),
includedAngle             INTEGER (0..179),
confidence                INTEGER (0..100)
}

-- ASN1STOP

```

— EPDU-Sequence

The *EPDU-Sequence* contains IEs that are defined externally to LPP by other organizations.

```

-- ASN1START

EPDU-Sequence ::= SEQUENCE (SIZE (1..maxEPDU)) OF EPDU

maxEPDU INTEGER ::= 16

EPDU ::= SEQUENCE {
    ePDU-Identifier      EPDU-Identifier,
    ePDU-Body            EPDU-Body
}

EPDU-Identifier ::= SEQUENCE {
    ePDU-ID              EPDU-ID,
    ePDU-Name             EPDU-Name      OPTIONAL,
    ...
}

EPDU-ID ::= INTEGER (1..256)

EPDU-Name ::= VisibleString (SIZE (1..32))

EPDU-Body ::= OCTET STRING

-- ASN1STOP

```

EPDU-Sequence field descriptions

EPDU-ID

This field provides a unique integer ID for the externally defined positioning method. Its value is assigned to the external entity that defines the EPDU. See table External PDU Identifier Definition for a list of external PDU identifiers defined in this version of the specification.

EPDU-Name

This field provides an optional character encoding which can be used to provide a quasi-unique name for an external PDU – e.g., by containing the name of the defining organization and/or the name of the associated public or proprietary standard for the EPDU.

EPDU-Body

The content and encoding of this field are defined externally to LPP.

External PDU Identifier Definition

EPDU-ID	EPDU Defining entity	Method name	Reference
1	OMA LOC	OMA LPP extensions (LPPe)	OMA-TS-LPPe-V1_0 [20]

— HorizontalVelocity

The IE *HorizontalVelocity* is used to describe a velocity shape as defined in 3GPP TS 23.032 [15].

```

-- ASN1START

HorizontalVelocity ::= SEQUENCE {
    bearing                INTEGER(0..359),
    horizontalSpeed         INTEGER(0..2047)
}

```

```
}
-- ASN1STOP
```

– *HorizontalWithVerticalVelocity*

The IE *HorizontalWithVerticalVelocity* is used to describe a velocity shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

HorizontalWithVerticalVelocity ::= SEQUENCE {
    bearing                  INTEGER(0..359),
    horizontalSpeed          INTEGER(0..2047),
    verticalDirection        ENUMERATED{upward, downward},
    verticalSpeed            INTEGER(0..255)
}
-- ASN1STOP
```

– *HorizontalVelocityWithUncertainty*

The IE *HorizontalVelocityWithUncertainty* is used to describe a velocity shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

HorizontalVelocityWithUncertainty ::= SEQUENCE {
    bearing                  INTEGER(0..359),
    horizontalSpeed          INTEGER(0..2047),
    uncertaintySpeed         INTEGER(0..255)
}
-- ASN1STOP
```

– *HorizontalWithVerticalVelocityAndUncertainty*

The IE *HorizontalWithVerticalVelocityAndUncertainty* is used to describe a velocity shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

HorizontalWithVerticalVelocityAndUncertainty ::= SEQUENCE {
    bearing                  INTEGER(0..359),
    horizontalSpeed          INTEGER(0..2047),
    verticalDirection        ENUMERATED{upward, downward},
    verticalSpeed            INTEGER(0..255),
    horizontalUncertaintySpeed  INTEGER(0..255),
    verticalUncertaintySpeed  INTEGER(0..255)
}
-- ASN1STOP
```

– *LocationCoordinateTypes*

The IE *LocationCoordinateTypes* defines a list of possible geographic shapes as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

LocationCoordinateTypes ::= SEQUENCE {
    ellipsoidPoint                BOOLEAN,
    ellipsoidPointWithUncertaintyCircle  BOOLEAN,
    ellipsoidPointWithUncertaintyEllipse  BOOLEAN,
    polygon                        BOOLEAN,
    ellipsoidPointWithAltitude      BOOLEAN,
    ellipsoidPointWithAltitudeAndUncertaintyEllipsoid  BOOLEAN,
    ellipsoidArc                   BOOLEAN,
    ...
}
```

```
-- ASN1STOP
```

– *Polygon*

The IE *Polygon* is used to describe a geographic shape as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

Polygon ::= SEQUENCE (SIZE (3..15)) OF PolygonPoints

PolygonPoints ::= SEQUENCE {
    latitudeSign          ENUMERATED {north, south},
    degreesLatitude        INTEGER (0..8388607),
    degreesLongitude       INTEGER (-8388608..8388607)      -- 23 bit field
}
-- ASN1STOP
```

– *PositioningModes*

The IE *PositioningModes* is used to indicate several positioning modes using a bit map.

```
-- ASN1START

PositioningModes ::= SEQUENCE {
    posModes      BIT STRING {
        standalone (0),
        ue-based   (1),
        ue-assisted (2) } (SIZE (1..8)),
    ...
}
-- ASN1STOP
```

***PositioningModes* field descriptions**

posModes

This field specifies the positioning mode(s). This is represented by a bit string, with a one-value at the bit position means the particular positioning mode is addressed; a zero-value means not addressed.

– *VelocityTypes*

The IE *VelocityTypes* defines a list of possible velocity shapes as defined in 3GPP TS 23.032 [15].

```
-- ASN1START

VelocityTypes ::= SEQUENCE {
    horizontalVelocity           BOOLEAN,
    horizontalWithVerticalVelocity BOOLEAN,
    horizontalVelocityWithUncertainty BOOLEAN,
    horizontalWithVerticalVelocityAndUncertainty BOOLEAN,
    ...
}
-- ASN1STOP
```

6.4.2 Common Positioning

– *CommonIEsRequestCapabilities*

The *CommonIEsRequestCapabilities* carries common IEs for a Request Capabilities LPP message Type.

```
-- ASN1START

CommonIEsRequestCapabilities ::= SEQUENCE {
```

```

}
-- ASN1STOP

```

CommonIEsProvideCapabilities

The *CommonIEsProvideCapabilities* carries common IEs for a Provide Capabilities LPP message Type.

```

-- ASN1START
CommonIEsProvideCapabilities ::= SEQUENCE {
    ...
}
-- ASN1STOP

```

CommonIEsRequestAssistanceData

The *CommonIEsRequestAssistanceData* carries common IEs for a Request Assistance Data LPP message Type.

```

-- ASN1START
CommonIEsRequestAssistanceData ::= SEQUENCE {
    primaryCellID      ECGI      OPTIONAL,   -- Cond EUTRA
    ...
}
-- ASN1STOP

```

Conditional presence	Explanation
EUTRA	The field is mandatory present for E-UTRA or NB-IoT access. The field shall be omitted for non-EUTRA and non-NB-IoT user plane support.

CommonIEsRequestAssistanceData field descriptions

primaryCellID

This parameter identifies the current primary cell for the target device.

CommonIEsProvideAssistanceData

The *CommonIEsProvideAssistanceData* carries common IEs for a Provide Assistance Data LPP message Type.

```

-- ASN1START
CommonIEsProvideAssistanceData ::= SEQUENCE {
    ...
}
-- ASN1STOP

```

CommonIEsRequestLocationInformation

The *CommonIEsRequestLocationInformation* carries common IEs for a Request Location Information LPP message Type.

```

-- ASN1START
CommonIEsRequestLocationInformation ::= SEQUENCE {
    locationInformationType      LocationInformationType,
    triggeredReporting           TriggeredReportingCriteria OPTIONAL,   -- Cond ECID
    periodicalReporting          PeriodicalReportingCriteria OPTIONAL,   -- Need ON
    additionalInformation         AdditionalInformation    OPTIONAL,   -- Need ON
    qos                           QoS                  OPTIONAL,   -- Need ON
    environment                   Environment    OPTIONAL,   -- Need ON
}
-- ASN1STOP

```

```

locationCoordinateTypes      LocationCoordinateTypes      OPTIONAL,   -- Need ON
velocityTypes                VelocityTypes            OPTIONAL,   -- Need ON
...
[[ messageSizeLimitNB-r14   MessageSizeLimitNB-r14    OPTIONAL   -- Need ON
]]
}

LocationInformationType ::= ENUMERATED {
  locationEstimateRequired,
  locationMeasurementsRequired,
  locationEstimatePreferred,
  locationMeasurementsPreferred,
  ...
}

PeriodicalReportingCriteria ::= SEQUENCE {
  reportingAmount           ENUMERATED {
    ral, ra2, ra4, ra8, ral6, ra32,
    ra64, ra-Infinity
  } DEFAULT ra-Infinity,
  reportingInterval          ENUMERATED {
    noPeriodicalReporting, ri0-25,
    ri0-5, ril, ri2, ri4, ri8, ril6, ri32, ri64
  }
}

TriggeredReportingCriteria ::= SEQUENCE {
  cellChange                 BOOLEAN,
  reportingDuration          ReportingDuration,
  ...
}

ReportingDuration ::= INTEGER (0..255)

AdditionalInformation ::= ENUMERATED {
  onlyReturnInformationRequested,
  mayReturnAdditionalInformation,
  ...
}

QoS ::= SEQUENCE {
  horizontalAccuracy          HorizontalAccuracy      OPTIONAL,   -- Need ON
  verticalCoordinateRequest    BOOLEAN,
  verticalAccuracy             VerticalAccuracy        OPTIONAL,   -- Need ON
  responseTime                 ResponseTime          OPTIONAL,   -- Need ON
  velocityRequest              BOOLEAN,
  ...
[[ responseTimeNB-r14         ResponseTimeNB-r14    OPTIONAL   -- Need ON
]]
}

HorizontalAccuracy ::= SEQUENCE {
  accuracy                   INTEGER(0..127),
  confidence                 INTEGER(0..100),
  ...
}

VerticalAccuracy ::= SEQUENCE {
  accuracy                   INTEGER(0..127),
  confidence                 INTEGER(0..100),
  ...
}

ResponseTime ::= SEQUENCE {
  time                       INTEGER (1..128),
  ...
[[ responseTimeEarlyFix-r12   INTEGER (1..128)    OPTIONAL   -- Need ON
]]
}

ResponseTimeNB-r14 ::= SEQUENCE {
  timeNB-r14                 INTEGER (1..512),
  responseTimeEarlyFixNB-r14  INTEGER (1..512)    OPTIONAL,   -- Need ON
  ...
}

Environment ::= ENUMERATED {

```

```

    badArea,
    notBadArea,
    mixedArea,
    ...
}

MessageSizeLimitNB-r14 ::= SEQUENCE {
    measurementLimit-r14           INTEGER (1..512)      OPTIONAL,      -- Need ON
    ...
}

-- ASN1STOP

```

Conditional presence	Explanation
<i>ECID</i>	The field is optionally present, need ON, if ECID is requested. Otherwise it is not present.

CommonIEsRequestLocationInformation field descriptions

locationInformationType

This IE indicates whether the server requires a location estimate or measurements. For '*locationEstimateRequired*', the target device shall return a location estimate if possible, or indicate a location error if not possible. For '*locationMeasurementsRequired*', the target device shall return measurements if possible, or indicate a location error if not possible. For '*locationEstimatePreferred*', the target device shall return a location estimate if possible, but may also or instead return measurements for any requested position methods for which a location estimate is not possible. For '*locationMeasurementsPreferred*', the target device shall return location measurements if possible, but may also or instead return a location estimate for any requested position methods for which return of location measurements is not possible.

triggeredReporting

This IE indicates that triggered reporting is requested and comprises the following subfields:

- ***cellChange***: If this field is set to TRUE, the target device provides requested location information each time the primary cell has changed.
- ***reportingDuration***: Maximum duration of triggered reporting in seconds. A value of zero is interpreted to mean an unlimited (i.e. "infinite") duration. The target device should continue triggered reporting for the *reportingDuration* or until an LPP Abort or LPP Error message is received.

The *triggeredReporting* field should not be included by the location server and shall be ignored by the target device if the *periodicalReporting* IE or *responseTime* IE or *responseTimeNB* IE is included in *CommonIEsRequestLocationInformation*.

periodicalReporting

This IE indicates that periodic reporting is requested and comprises the following subfields:

- ***reportingAmount*** indicates the number of periodic location information reports requested. Enumerated values correspond to 1, 2, 4, 8, 16, 32, 64, or infinite/indefinite number of reports. If the *reportingAmount* is '*infinite/indefinite*', the target device should continue periodic reporting until an LPP Abort message is received. The value '*ra1*' shall not be used by a sender.
- ***reportingInterval*** indicates the interval between location information reports and the response time requirement for the first location information report. Enumerated values ri0-25, ri0-5, ri1, ri2, ri4, ri8, ri16, ri32, ri64 correspond to reporting intervals of 1, 2, 4, 8, 10, 16, 20, 32, and 64 seconds, respectively. Measurement reports containing no measurements or no location estimate are required when a *reportingInterval* expires before a target device is able to obtain new measurements or obtain a new location estimate. The value '*noPeriodicalReporting*' shall not be used by a sender.

additionalInformation

This IE indicates whether a target device is allowed to return additional information to that requested. If this IE indicates '*onlyReturnInformationRequested*' then the target device shall not return any additional information to that requested by the server. If this IE indicates '*mayReturnAdditionalInformation*' then the target device may return additional information to that requested by the server. If a location estimate is returned, any additional information is restricted to that associated with a location estimate (e.g. might include velocity if velocity was not requested but cannot include measurements). If measurements are returned, any additional information is restricted to additional measurements (e.g. might include E-CID measurements if A-GNSS measurements were requested but not E-CID measurements).

<i>CommonIEsRequestLocationInformation</i> field descriptions	
<i>qos</i>	<p>This IE indicates the quality of service and comprises a number of sub-fields. In the case of measurements, some of the sub-fields apply to the location estimate that could be obtained by the server from the measurements provided by the target device assuming that the measurements are the only sources of error. Fields are as follows:</p> <ul style="list-style-type: none"> - <i>horizontalAccuracy</i> indicates the maximum horizontal error in the location estimate at an indicated confidence level. The ‘accuracy’ corresponds to the encoded uncertainty as defined in 3GPP TS 23.032 [15] and ‘confidence’ corresponds to confidence as defined in 3GPP TS 23.032 [15]. - <i>verticalCoordinateRequest</i> indicates whether a vertical coordinate is required (TRUE) or not (FALSE). - <i>verticalAccuracy</i> indicates the maximum vertical error in the location estimate at an indicated confidence level and is only applicable when a vertical coordinate is requested. The ‘accuracy’ corresponds to the encoded uncertainty altitude as defined in 3GPP TS 23.032 [15] and ‘confidence’ corresponds to confidence as defined in 3GPP TS 23.032 [15]. - <i>responseTime</i> <ul style="list-style-type: none"> - <i>time</i> indicates the maximum response time as measured between receipt of the <i>RequestLocationInformation</i> and transmission of a <i>ProvideLocationInformation</i>. This is given as an integer number of seconds between 1 and 128. If the <i>periodicalReporting</i> IE is included in <i>CommonIEsRequestLocationInformation</i>, this field should not be included by the location server and shall be ignored by the target device (if included). - <i>responseTimeEarlyFix</i> indicates the maximum response time as measured between receipt of the <i>RequestLocationInformation</i> and transmission of a <i>ProvideLocationInformation</i> containing early location measurements or an early location estimate. This is given as an integer number of seconds between 1 and 128. When this IE is included, a target should send a <i>ProvideLocationInformation</i> (or more than one <i>ProvideLocationInformation</i> if location information will not fit into a single message) containing early location information according to the <i>responseTimeEarlyFix</i> IE and a subsequent <i>ProvideLocationInformation</i> (or more than one <i>ProvideLocationInformation</i> if location information will not fit into a single message) containing final location information according to the <i>time</i> IE. A target shall omit sending a <i>ProvideLocationInformation</i> if the early location information is not available at the expiration of the time value in the <i>responseTimeEarlyFix</i> IE. A server should set the <i>responseTimeEarlyFix</i> IE to a value less than that for the <i>time</i> IE. A target shall ignore the <i>responseTimeEarlyFix</i> IE if its value is not less than that for the <i>time</i> IE. - <i>velocityRequest</i> indicates whether velocity (or measurements related to velocity) is requested (TRUE) or not (FALSE). - <i>responseTimeNB</i> <ul style="list-style-type: none"> If the <i>periodicalReporting</i> IE or <i>responseTime</i> IE is included in <i>CommonIEsRequestLocationInformation</i>, this field should not be included by the location server and shall be ignored by the target device (if included). - <i>timeNB</i> indicates the maximum response time as measured between receipt of the <i>RequestLocationInformation</i> and transmission of a <i>ProvideLocationInformation</i>. This is given as an integer number of seconds between 1 and 512. - <i>responseTimeEarlyFixNB</i> indicates the maximum response time as measured between receipt of the <i>RequestLocationInformation</i> and transmission of a <i>ProvideLocationInformation</i> containing early location measurements or an early location estimate. This is given as an integer number of seconds between 1 and 512. When this IE is included, a target should send a <i>ProvideLocationInformation</i> (or more than one <i>ProvideLocationInformation</i> if location information will not fit into a single message) containing early location information according to the <i>responseTimeEarlyFixNB</i> IE and a subsequent <i>ProvideLocationInformation</i> (or more than one <i>ProvideLocationInformation</i> if location information will not fit into a single message) containing final location information according to the <i>timeNB</i> IE. A target shall omit sending a <i>ProvideLocationInformation</i> if the early location information is not available at the expiration of the time value in the <i>responseTimeEarlyFixNB</i> IE. A server should set the <i>responseTimeEarlyFixNB</i> IE to a value less than that for the <i>timeNB</i> IE. A target shall ignore the <i>responseTimeEarlyFixNB</i> IE if its value is not less than that for the <i>timeNB</i> IE.
All QoS requirements shall be obtained by the target device to the degree possible but it is permitted to return a response that does not fulfill all QoS requirements if some were not attainable. The single exception is <i>time</i> and <i>timeNB</i> which shall always be fulfilled – even if that means not fulfilling other QoS requirements.	
A target device supporting NB-IoT access shall support the <i>responseTimeNB</i> IE.	
<i>environment</i>	<p>This field provides the target device with information about expected multipath and non line of sight (NLOS) in the current area. The following values are defined:</p> <ul style="list-style-type: none"> - badArea: possibly heavy multipath and NLOS conditions (e.g. bad urban or urban). - notBadArea: no or light multipath and usually LOS conditions (e.g. suburban or rural). - mixedArea: environment that is mixed or not defined. <p>If this field is absent, a default value of ‘mixedArea’ applies.</p>
<i>locationCoordinateTypes</i>	<p>This field provides a list of the types of location estimate that the target device may return when a location estimate is obtained by the target.</p>

<i>CommonIEsRequestLocationInformation</i> field descriptions		
velocityTypes		
This fields provides a list of the types of velocity estimate that the target device may return when a velocity estimate is obtained by the target.		
messageSizeLimitNB		
This field provides an octet limit on the amount of location information a target device can return.		
<ul style="list-style-type: none"> - measurementLimit indicates the maximum amount of location information the target device should return in response to the <i>RequestLocationInformation</i> message received from the location server. <p>The limit applies to the overall size of the LPP message at LPP level (LPP Provide Location Information), and is specified in steps of 100 octets. The message size limit is then given by the value provided in <i>measurementLimit</i> times 100 octets.</p>		

– *CommonIEsProvideLocationInformation*

The *CommonIEsProvideLocationInformation* carries common IEs for a Provide Location Information LPP message Type.

```
-- ASN1START

CommonIEsProvideLocationInformation ::= SEQUENCE {
    locationEstimate          LocationCoordinates      OPTIONAL,
    velocityEstimate          Velocity                 OPTIONAL,
    locationError              LocationError            OPTIONAL,
    ...
    [[ 'earlyFixReport-r12'     EarlyFixReport-r12      OPTIONAL
    ]],
    [[ 'locationSource-r13'     LocationSource-r13      OPTIONAL,
        locationTimestamp-r13   UTCTime                OPTIONAL
    ]]
}

LocationCoordinates ::= CHOICE {
    ellipsoidPoint           Ellipsoid-Point,
    ellipsoidPointWithUncertaintyCircle Ellipsoid-PointWithUncertaintyCircle,
    ellipsoidPointWithUncertaintyEllipse EllipsoidPointWithUncertaintyEllipse,
    polygon                   Polygon,
    ellipsoidPointWithAltitude EllipsoidPointWithAltitude,
    ellipsoidPointWithAltitudeAndUncertaintyEllipsoid EllipsoidPointWithAltitudeAndUncertaintyEllipsoid,
    ellipsoidArc              EllipsoidArc,
    ...
}

Velocity ::= CHOICE {
    horizontalVelocity         HorizontalVelocity,
    horizontalWithVerticalVelocity HorizontalWithVerticalVelocity,
    horizontalVelocityWithUncertainty HorizontalVelocityWithUncertainty,
    horizontalWithVerticalVelocityAndUncertainty HorizontalWithVerticalVelocityAndUncertainty,
    ...
}

LocationError ::= SEQUENCE {
    locationfailurecause       LocationFailureCause,
    ...
}

LocationFailureCause ::= ENUMERATED {
    undefined,
    requestedMethodNotSupported,
    positionMethodFailure,
    periodicLocationMeasurementsNotAvailable,
    ...
}

EarlyFixReport-r12 ::= ENUMERATED {
    noMoreMessages,
    moreMessagesOnTheWay
}

LocationSource-r13 ::= BIT STRING { a-gnss          (0),
                                         wlan            (1),
                                         bt              (2),
                                         ...
}
```

```

tbs          ( 3 ),
sensor      ( 4 ) } (SIZE(1..16))

-- ASN1STOP

```

***CommonIEsProvideLocationInformation* field descriptions**

locationEstimate

This field provides a location estimate using one of the geographic shapes defined in 3GPP TS 23.032 [15]. Coding of the values of the various fields internal to each geographic shape follow the rules in [15]. The conditions for including this field are defined for the *locationInformationType* field in a Request Location Information message.

velocityEstimate

This field provides a velocity estimate using one of the velocity shapes defined in 3GPP TS 23.032 [15]. Coding of the values of the various fields internal to each velocity shape follow the rules in [15].

locationError

This field shall be included if and only if a location estimate and measurements are not included in the LPP PDU. The field includes information concerning the reason for the lack of location information. The *LocationFailureCause* ‘*periodicLocationMeasurementsNotAvailable*’ shall be used by the target device if periodic location reporting was requested, but no measurements or location estimate are available when *the reportingInterval* expired.

earlyFixReport

This field shall be included if and only if the *ProvideLocationInformation* message contains early location measurements or an early location estimate. The target device shall set the values of this field as follows:

- *noMoreMessages*: This is the only or last *ProvideLocationInformation* message used to deliver the entire set of early location information.
- *moreMessagesOnTheWay*: This is one of multiple *ProvideLocationInformation* messages used to deliver the entire set of early location information (if early location information will not fit into a single message).

locationSource

This field provides the source positioning technology for the location estimate. NOTE: In this version of the specification, the entry ‘*tbs*’ is used only for TBS positioning based on MBS signals.

locationTimestamp

This field provides the UTC time when the location estimate is valid and should take the form of YYMMDDhhmmssZ.

CommonIEsAbort

The *CommonIEsAbort* carries common IEs for an Abort LPP message Type.

```

-- ASN1START

CommonIEsAbort ::= SEQUENCE {
    abortCause      ENUMERATED {
        undefined,
        stopPeriodicReporting,
        targetDeviceAbort,
        networkAbort,
        ...
    }
}

-- ASN1STOP

```

***CommonIEsAbort* field descriptions**

abortCause

This IE defines the request to abort an ongoing procedure. The abort cause ‘*stopPeriodicReporting*’ should be used by the location server to stop any ongoing location reporting configured as *periodicalReporting* or *triggeredReporting* in the *CommonIEsRequestLocationInformation*.

CommonIEsError

The *CommonIEsError* carries common IEs for an Error LPP message Type.

```

-- ASN1START

CommonIEsError ::= SEQUENCE {
    errorCause      ENUMERATED {
        undefined,
        lppMessageHeaderError,

```

```

    lppMessageBodyError,
    epduError,
    incorrectDataValue,
    ...
}

-- ASN1STOP

```

***CommonIEsError* field descriptions**

errorCause

This IE defines the cause for an error. '*lppMessageHeaderError*', '*lppMessageBodyError*' and '*epduError*' is used if a receiver is able to detect a coding error in the LPP header (i.e., in the common fields), LPP message body or in an EPDU, respectively.

6.5 Positioning Method IEs

6.5.1 OTDOA Positioning

This subclause defines the information elements for downlink OTDOA positioning, which includes TBS positioning based on PRS signals [2].

6.5.1.1 OTDOA Assistance Data

— *OTDOA-ProvideAssistanceData*

The IE *OTDOA-ProvideAssistanceData* is used by the location server to provide assistance data to enable UE-assisted downlink OTDOA. It may also be used to provide OTDOA positioning specific error reason.

Throughout Section 6.5.1, "assistance data reference cell" refers to the cell defined by the IE *OTDOA-ReferenceCellInfo* and "NB-IoT assistance data reference cell" refers to the cell defined by the IE *OTDOA-ReferenceCellInfoNB* (see section 6.5.1.2). "RSTD reference cell" applies only in Section 6.5.1.5.

If both IEs, *OTDOA-ReferenceCellInfo* and *OTDOA-ReferenceCellInfoNB* are included in *OTDOA-ProvideAssistanceData*, the assistance data reference cell and NB-IoT assistance data reference cell correspond to the same cell, and the target device may assume that PRS and NPRS antenna ports are quasi co-located, as defined in [16].

Throughout Section 6.5.1, the term "cell" refers to "transmission point (TP)", unless distinguished in the field description.

NOTE 1: The location server should include at least one cell for which the SFN can be obtained by the target device, e.g. the serving cell, in the assistance data, either as the assistance data reference cell or in the neighbour cell list. Otherwise the target device will be unable to perform the OTDOA measurement and the positioning operation will fail.

NOTE 2: Due to support of cells containing multiple TPs and PRS-only TPs not associated with cells, the term "cell" as used in section 6.5.1 may not always correspond to a cell for the E-UTRAN.

NOTE 3: For NB-IoT access, due to support of NPRS on multiple carriers, the term "cell" as used in section 6.5.1 refers to the anchor carrier, unless otherwise stated.

```

-- ASN1START

OTDOA-ProvideAssistanceData ::= SEQUENCE {
    otdoa-ReferenceCellInfo          OTDOA-ReferenceCellInfo           OPTIONAL,   -- Need ON
    otdoa-NeighbourCellInfo         OTDOA-NeighbourCellInfoList    OPTIONAL,   -- Need ON
    otdoa-Error                      OTDOA-Error                   OPTIONAL,   -- Need ON
    ...
    [
        otdoa-ReferenceCellInfoNB-r14 OTDOA-ReferenceCellInfoNB-r14    OPTIONAL,   -- Need ON
        otdoa-NeighbourCellInfoNB-r14 OTDOA-NeighbourCellInfoListNB-r14 OPTIONAL,   -- Need ON
    ]
}

```

-- ASN1STOP

6.5.1.2 OTDOA Assistance Data Elements

– OTDOA-ReferenceCellInfo

The IE *OTDOA-ReferenceCellInfo* is used by the location server to provide assistance data reference cell information for OTDOA assistance data. The slot number offsets and expected RSTDs in *OTDOA-NeighbourCellInfoList* are provided relative to the cell defined by this IE. If *earfcnRef* of this assistance data reference cell is different from that of the serving cell, the LPP layer shall inform lower layers to start performing inter-frequency RSTD measurements with this cell and provide to lower layers the information about this assistance data reference cell, e.g. EARFCN and PRS positioning occasion information.

NOTE: The location server should always include the PRS configuration of the assistance data reference and neighbour cells. Otherwise the UE may not meet the accuracy requirements as defined in [18].

-- ASN1START

```

OTDOA-ReferenceCellInfo ::= SEQUENCE {
    physCellId                INTEGER (0..503),
    cellGlobalId               ECGI                  OPTIONAL,      -- Need ON
    earfcnRef                 ARFCN-ValueEUTRA   OPTIONAL,      -- Cond NotSameAsServ0
    antennaPortConfig          ENUMERATED {ports1-or-2, ports4, ...}
                                OPTIONAL,      -- Cond NotSameAsServ1
    cpLength                  ENUMERATED {normal, extended, ...},
    prsInfo                   PRS-Info              OPTIONAL,      -- Cond PRS
    ...
    [[ earfcnRef-v9a0          ARFCN-ValueEUTRA-v9a0   OPTIONAL,      -- Cond NotSameAsServ2
    ]],
    [[ tpId-r14                INTEGER (0..4095)        OPTIONAL,      -- Need ON
      cpLengthCRS-r14          ENUMERATED {normal, extended, ...}
                                OPTIONAL,      -- Cond CRS
      sameMBSFNconfigRef-r14  BOOLEAN               OPTIONAL,      -- Need ON
      dlBandwidth-r14          ENUMERATED {n6, n15, n25, n50, n75, n100}
                                OPTIONAL,      -- Cond NotSameAsServ3
      addPRSconfigRef-r14     SEQUENCE (SIZE (1..maxAddPRSconfig-r14)) OF PRS-Info
                                OPTIONAL,      -- Need ON
    ]]
}

maxAddPRSconfig-r14        INTEGER ::= 2

-- ASN1STOP

```

Conditional presence	Explanation
<i>NotSameAsServ0</i>	This field is absent if <i>earfcnRef-v9a0</i> is present. Otherwise, the field is mandatory present if the EARFCN of the OTDOA assistance data reference cell is not the same as the EARFCN of the target devices's current primary cell.
<i>NotSameAsServ1</i>	The field is mandatory present if the antenna port configuration of the OTDOA assistance data reference cell is not the same as the antenna port configuration of the target devices's current primary cell.
<i>NotSameAsServ2</i>	The field is absent if <i>earfcnRef</i> is present. Otherwise, the field is mandatory present if the EARFCN of the OTDOA assistance data reference cell is not the same as the EARFCN of the target devices's current primary cell.
<i>PRS</i>	The field is mandatory present if positioning reference signals are available in the assistance data reference cell [16]; otherwise it is not present.
<i>CRS</i>	The field is optionally present, need ON, if <i>prsInfo</i> is present. Otherwise it is not present.
<i>NotSameAsServ3</i>	The field is mandatory present if the downlink bandwidth configuration of the assistance data reference cell is not the same as the downlink bandwidth configuration of the target decivces's current primary cell and if PRS frequency hopping is used in the assistance data reference cell [16]; otherwise it is not present.

OTDOA-ReferenceCellInfo field descriptions

physCellId

This field specifies the physical cell identity of the assistance data reference cell, as defined in [12].

OTDOA-ReferenceCellInfo field descriptions		
cellGlobalId		
This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the assistance data reference cell, as defined in [12]. The server should include this field if it considers that it is needed to resolve ambiguity in the cell indicated by <i>physCellId</i> .		
earfcnRef		
This field specifies the EARFCN of the assistance data reference cell.		
antennaPortConfig		
This field specifies whether 1 (or 2) antenna port(s) or 4 antenna ports for cell specific reference signals (CRS) are used in the assistance data reference cell.		
cpLength		
This field specifies the cyclic prefix length of the assistance data reference cell PRS if the <i>prsInfo</i> field is present, otherwise this field specifies the cyclic prefix length of the assistance data reference cell CRS.		
prsInfo		
This field specifies the first PRS configuration of the assistance data reference cell.		
tpld		
This field specifies an identity of the transmission point. This field together with the <i>physCellId</i> and/or <i>prsID</i> may be used to identify the transmission point in case the same physical cell ID is shared by multiple transmission points.		
cpLengthCRS		
This field specifies the cyclic prefix length of the assistance data reference cell CRS. If this field is present, the target device may assume the CRS and PRS antenna ports of the assistance data reference cell are quasi co-located (as defined in [16]).		
sameMBSFNconfigRef		
This field indicates whether the MBSFN subframe configuration of the assistance data reference cell is the same as the current primary cell of the target device. TRUE means the same, and FALSE means not the same.		
dlBandwidth		
This field specifies the downlink bandwidth configuration of the assistance data reference cell, N _{RB} in downlink, see TS 36.101 [21, table 5.6-1]. n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on.		
addPRSconfigRef		
This field specifies the additional (second and possibly third) PRS configuration(s) of the assistance data reference cell.		

– PRS-Info

The IE *PRS-Info* provides the information related to the configuration of PRS in a cell.

```
-- ASN1START

PRS-Info ::= SEQUENCE {
    prs-Bandwidth      ENUMERATED { n6, n15, n25, n50, n75, n100, ... },
    prs-ConfigurationIndex  INTEGER (0..4095),
    numDL-Frames       ENUMERATED {sf-1, sf-2, sf-4, sf-6, ..., sf-add-v1420},
    ...
    prs-MutingInfo-r9   CHOICE {
        po2-r9            BIT STRING (SIZE(2)),
        po4-r9            BIT STRING (SIZE(4)),
        po8-r9            BIT STRING (SIZE(8)),
        po16-r9           BIT STRING (SIZE(16)),
        ...
        po32-v1420         BIT STRING (SIZE(32)),
        po64-v1420         BIT STRING (SIZE(64)),
        po128-v1420        BIT STRING (SIZE(128)),
        po256-v1420        BIT STRING (SIZE(256)),
        po512-v1420        BIT STRING (SIZE(512)),
        po1024-v1420       BIT STRING (SIZE(1024))
    }                                OPTIONAL,          -- Need OP
    [ prsID-r14             INTEGER (0..4095)          OPTIONAL,          -- Need ON
      add-numDL-Frames-r14  INTEGER (1..160)           OPTIONAL,          -- Cond sf-add
      prsOccGroupLen-r14   ENUMERATED {g2, g4, g8, g16, g32, g64, g128,...} OPTIONAL,          -- Cond Occ-Grp
      prsHoppingInfo-r14   CHOICE {
          nb2-r14          INTEGER (0.. maxAvailNarrowBands-Minus1-r14),
          nb4-r14          SEQUENCE (SIZE (3))
                           OF INTEGER (1.. maxAvailNarrowBands-Minus1-r14)
                           OPTIONAL           -- Cond PRS-FH
      }
    ]
}

maxAvailNarrowBands-Minus1-r14      INTEGER ::= 15 -- Maximum number of narrowbands minus 1
-- ASN1STOP
```

Conditional presence	Explanation
<i>sf-add</i>	The field is mandatory present if the <i>numDL-Frames</i> field has the value ' <i>sf-add</i> '; otherwise it is not present.
<i>Occ-Grp</i>	The field is mandatory present if a PRS occasion group is configured; otherwise it is not present.
<i>PRS-FH</i>	The field is mandatory present if frequency hopping is used for PRS; otherwise it is not present.

PRS-Info field descriptions	
<i>prs-Bandwidth</i>	This field specifies the bandwidth that is used to configure the positioning reference signals on. Enumerated values are specified in number of resource blocks (n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on) and define 1.4, 3, 5, 10, 15 and 20 MHz bandwidth.
<i>prs-ConfigurationIndex</i>	This field specifies the positioning reference signals configuration index I_{PRS} as defined in [16].
<i>numDL-Frames</i>	This field specifies the number of consecutive downlink subframes N_{PRS} with positioning reference signals, as defined in [16]. Enumerated values define 1, 2, 4, or 6 consecutive downlink subframes. The value <i>sf-add</i> indicates that N_{PRS} is provided in the field <i>add-numDL-Frames</i> .
<i>prs-MutingInfo</i>	This field specifies the PRS muting configuration of the cell. The PRS muting configuration is defined by a periodic PRS muting sequence with periodicity T_{REP} where T_{REP} , counted in the number of PRS occasion groups [18], can be 2, 4, 8, 16, 32, 64, 128, 256, 512, or 1024 which is also the length of the selected bit string that represents this PRS muting sequence. If a bit in the PRS muting sequence is set to "0", then the PRS is muted in all the PRS occasions in the corresponding PRS occasion group. A PRS occasion group comprises one or more PRS occasions as indicated by <i>prsOccGroupLen</i> , each of N_{PRS} downlink positioning subframes as defined in [16]. The first bit of the PRS muting sequence corresponds to the first PRS occasion group that starts after the beginning of the assistance data reference cell SFN=0. The sequence is valid for all subframes after the target device has received the <i>prs-MutingInfo</i> . If this field is not present the target device may assume that the PRS muting is not in use for the cell. When the SFN of the assistance data reference cell is not known to the UE and <i>prs-MutingInfo</i> is provided for a cell in the <i>OTDOA-NeighbourCellInfoList</i> IE, the UE may assume no PRS is transmitted by that cell. When the UE receives a T_{REP} -bit muting pattern together with a PRS periodicity T_{PRS} for the same cell which exceeds 10240 subframes (i.e., $T_{REP} \times T_{PRS} > 10240$ subframes), the UE shall assume an n-bit muting pattern based on the first n-bits, where $n = 10240/T_{PRS}$.
<i>prsid</i>	This field specifies the PRS-ID as defined in [16].
<i>add-numDL-Frames</i>	This field specifies the number of consecutive downlink subframes N_{PRS} with positioning reference signals, as defined in [16]. Integer values define 1, 2, 3, ..., 160 consecutive downlink subframes.
<i>prsOccGroupLen</i>	This field specifies the length of the PRS occasion group. Enumerated values define 2, 4, 8, 16, 32, 64 or 128, and the product of the PRS periodicity T_{PRS} from the <i>prs-ConfigurationIndex</i> and the PRS occasion group length cannot exceed 1280. If omitted, the PRS occasion group length is 1.
<i>prsHoppingInfo</i>	This field specifies the PRS frequency hopping configuration [16]. The choice nb2 indicates hopping between 2 narrowbands; the choice nb4 indicates hopping between 4 narrowbands. The first PRS positioning occasion of the first PRS occasion group that starts after the beginning of SFN=0 of the assistance data reference cell is located at the centre of the system bandwidth. The frequency band of each subsequent PRS occasion is indicated by nb2 or nb4, respectively, which defines the narrowband index n_{NB} as specified in TS 36.211 [16]. If this field is absent, no PRS frequency hopping is used.

– *OTDOA-NeighbourCellInfoList*

The IE *OTDOA-NeighbourCellInfoList* is used by the location server to provide neighbour cell information for OTDOA assistance data. If the target device is not capable of supporting additional neighbour cells (as indicated by the absence of the IE *additionalNeighbourCellInfoList* in *OTDOA-ProvideCapabilities*), the set of cells in the *OTDOA-NeighbourCellInfoList* is grouped per frequency layer and in the decreasing order of priority for measurement to be performed by the target device, with the first cell in the list being the highest priority for measurement and with the same *earfcn* not appearing in more than one instance of *OTDOA-NeighbourFreqInfo*.

If the target device is capable of supporting additional neighbour cells (as indicated by the presence of the IE *additionalNeighbourCellInfoList* in *OTDOA-ProvideCapabilities*), the list may contain all cells (up to 3x24 cells) belonging to the same frequency layer or cells from different frequency layers with the first cell in the list still being the highest priority for measurement.

The prioritization of the cells in the list is left to server implementation. The target device should provide the available measurements in the same order as provided by the server.

If inter-frequency neighbour cells are included in *OTDOA-NeighbourCellInfoList*, where an inter-frequency is a E-UTRA frequency which is different from the E-UTRA serving cell frequency, the LPP layer shall inform lower layers to start performing inter-frequency RSTD measurements for these neighbour cells and also provide to lower layers the information about these neighbour cells, e.g. EARFCN and PRS positioning occasion information.

```
-- ASN1START

OTDOA-NeighbourCellInfoList ::= SEQUENCE (SIZE (1..maxFreqLayers)) OF OTDOA-NeighbourFreqInfo
OTDOA-NeighbourFreqInfo ::= SEQUENCE (SIZE (1..24)) OF OTDOA-NeighbourCellInfoElement

OTDOA-NeighbourCellInfoElement ::= SEQUENCE {
    physCellId                      INTEGER (0..503),
    cellGlobalId                     ECGI                  OPTIONAL,      -- Need ON
    earfcn                           ARFCN-ValueEUTRA   OPTIONAL,      -- Cond NotSameAsRef0
    cpLength                          ENUMERATED {normal, extended, ...}
                                    OPTIONAL,      -- Cond NotSameAsRef1
    prsInfo                           PRS-Info              OPTIONAL,      -- Cond NotSameAsRef2
    antennaPortConfig                ENUMERATED {ports-1-or-2, ports-4, ...}
                                    OPTIONAL,      -- Cond NotSameAsRef3
    slotNumberOffset                 INTEGER (0..19)     OPTIONAL,      -- Cond NotSameAsRef4
    prs-SubframeOffset               INTEGER (0..1279)   OPTIONAL,      -- Cond InterFreq
    expectedRSTD                      INTEGER (0..16383),
    expectedRSTD-Uncertainty        INTEGER (0..1023),
    ...
    [[ earfcn-v9a0                   ARFCN-ValueEUTRA-v9a0  OPTIONAL,      -- Cond NotSameAsRef5
    ]],
    [[ tpId-r14                      INTEGER (0..4095)    OPTIONAL,      -- Need ON
    prs-only-tp-r14                 ENUMERATED { true }   OPTIONAL,      -- Cond TBS
    cpLengthCRS-r14                 ENUMERATED { normal, extended, ... }
                                    OPTIONAL,      -- Cond CRS
    sameMBSFNconfigNeighbour-r14   BOOLEAN              OPTIONAL,      -- Need ON
    dlBandwidth-r14                 ENUMERATED {n6, n15, n25, n50, n75, n100}
                                    OPTIONAL,      -- Cond NotSameAsRef6
    addPRSconfigNeighbour-r14      SEQUENCE (SIZE (1..maxAddPRSconfig-r14)) OF
                                    Add-PRSconfigNeighbourElement-r14
                                    OPTIONAL,      -- Need ON
    ]]
}

Add-PRSconfigNeighbourElement-r14 ::= SEQUENCE {
    add-prsInfo-r14                 PRS-Info              OPTIONAL,      -- Cond NotSameAsRef7
    ...
}

maxFreqLayers      INTEGER ::= 3

-- ASN1STOP
```

Conditional presence	Explanation
<i>NotSameAsRef0</i>	The field is absent if <i>earfcn-v9a0</i> is present. If <i>earfcn-v9a0</i> is not present, the field is mandatory present if the EARFCN is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef1</i>	The field is mandatory present if the cyclic prefix length is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef2</i>	The field is mandatory present if the first PRS configuration is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef3</i>	The field is mandatory present if the antenna port configuration is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef4</i>	The field is mandatory present if the slot timing is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef5</i>	The field is absent if <i>earfcn</i> is present. If <i>earfcn</i> is not present, the field is mandatory present if the EARFCN is not the same as for the assistance data reference cell; otherwise it is not present.
<i>InterFreq</i>	The field is optionally present, need OP, if the EARFCN is not the same as for the assistance data reference cell; otherwise it is not present.
<i>TBS</i>	The field is mandatory present if the <i>OTDOA-NeighbourCellInfoElement</i> is provided for a PRS-only TP; otherwise it is not present.
<i>CRS</i>	The field is optionally present, need ON, if <i>prsInfo</i> is present. Otherwise it is not present.
<i>NotSameAsRef6</i>	The field is mandatory present if PRS frequency hopping is used on this neighbour cell [16] and if the downlink bandwidth configuration is not the same as for the assistance data reference cell; otherwise it is not present.
<i>NotSameAsRef7</i>	The field is mandatory present if any instance of the additional PRS configurations of <i>addPRSconfigNeighbour</i> is not the same as the corresponding instance of the additional PRS configuration of the <i>addPRSconfigRef</i> for the assistance data reference cell; otherwise it is not present.

OTDOA-NeighbourCellInfoList field descriptions

<i>physCellId</i>	This field specifies the physical cell identity of the neighbour cell, as defined in [12].
<i>cellGlobalId</i>	This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the neighbour cell, as defined in [12]. The server should provide this field if it considers that it is needed to resolve any ambiguity in the cell identified by <i>physCellId</i> .
<i>earfcn</i>	This field specifies the EARFCN of the neighbour cell.
<i>cpLength</i>	This field specifies the cyclic prefix length of the neigbour cell PRS if PRS are present in this neighbour cell, otherwise this field specifies the cyclic prefix length of CRS in this neighbour cell.
<i>prsInfo</i>	This field specifies the first PRS configuration of the neighbour cell. When the EARFCN of the neighbour cell is the same as for the assistance data reference cell, the target device may assume that each PRS positioning occasion in the neighbour cell at least partially overlaps with a PRS positioning occasion in the assistance data reference cell where the maximum offset between the transmitted PRS positioning occasions may be assumed to not exceed half a subframe. When the EARFCN of the neighbour cell is the same as for the assistance data reference cell, the target may assume that this cell has the same PRS periodicity (T_{PRS}) as the assistance data reference cell.
<i>antennaPortConfig</i>	This field specifies whether 1 (or 2) antenna port(s) or 4 antenna ports for cell specific reference signals are used.
<i>slotNumberOffset</i>	This field specifies the slot number offset at the transmitter between this cell and the assistance data reference cell. The <i>slotNumberOffset</i> together with the current slot number of the assistance data reference cell may be used to calculate the current slot number of this cell which may further be used to generate the CRS sequence by the target device. The offset corresponds to the number of full slots counted from the beginning of a radio frame of the assistance data reference cell to the beginning of the closest subsequent radio frame of this cell. If this field is absent, the slot timing is the same as for the assistance data reference cell.
<i>prs-SubframeOffset</i>	This field specifies the offset between the first PRS subframe of the first PRS occasion group of the first PRS configuration in the assistance data reference cell on the reference carrier frequency layer and the first PRS subframe in the closest subsequent PRS occasion group of the PRS configuration with the longest PRS occasion group periodicity (NOTE) of this cell on the other carrier frequency layer. The value is given in number of full sub-frames. If the EARFCN is not the same as for the assistance data reference cell and the field is not present but PRS are available on this cell, the receiver shall consider the PRS subframe offset for this cell to be 0.

<i>OTDOA-NeighbourCellInfoList</i> field descriptions	
<i>expectedRSTD</i>	If PRS is transmitted: This field indicates the RSTD value that the target device is expected to measure between this cell and the assistance data reference cell. The <i>expectedRSTD</i> field takes into account the expected propagation time difference as well as transmit time difference of PRS positioning occasions between the two cells. The RSTD value can be negative and is calculated as (<i>expectedRSTD</i> -8192). The resolution is $3 \times T_s$, with $T_s=1/(15000*2048)$ seconds.
If PRS is not transmitted: This field indicates the RSTD value that the target device is expected to measure between this cell and the assistance data reference cell. The <i>expectedRSTD</i> field takes into account the expected propagation time difference as well as transmit time difference between the two cells. The RSTD value can be negative and is calculated as (<i>expectedRSTD</i> -8192). The resolution is $3 \times T_s$, with $T_s=1/(15000*2048)$ seconds.	
<i>expectedRSTD-Uncertainty</i>	
If PRS is transmitted: This field indicates the uncertainty in <i>expectedRSTD</i> value. The uncertainty is related to the location server's a-priori estimation of the target device location. The <i>expectedRSTD</i> and <i>expectedRSTD-Uncertainty</i> together define the search window for the target device. The scale factor of the <i>expectedRSTD-Uncertainty</i> field is $3 \times T_s$, with $T_s=1/(15000*2048)$ seconds. The target device may assume that the beginning of the PRS occasion group of the PRS configuration with the longest PRS occasion group periodicity (NOTE) of the neighbour cell is received within the search window of size $[- \text{expectedRSTD-Uncertainty} \times 3 \times T_s, \text{expectedRSTD-Uncertainty} \times 3 \times T_s]$ centered at $T_{\text{REF}} + 1 \text{ millisecond} \times N + (\text{expectedRSTD}-8192) \times 3 \times T_s$, where T_{REF} is the reception time of the beginning of the first PRS occasion group of the first PRS configuration of the assistance data reference cell at the target device antenna connector, $N = 0$ when the EARFCN of the neighbour cell is equal to that of the assistance data reference cell, and $N = \text{prs-SubframeOffset}$ otherwise. If PRS is not transmitted: This field indicates the uncertainty in <i>expectedRSTD</i> value. The uncertainty is related to the location server's a-priori estimation of the target device location. The <i>expectedRSTD</i> and <i>expectedRSTD-Uncertainty</i> together define the search window for the target device. The scale factor of the <i>expectedRSTD-Uncertainty</i> field is $3 \times T_s$, with $T_s=1/(15000*2048)$ seconds. If T_x is the reception time of the beginning of the subframe X of the assistance data reference cell at the target device antenna connector, the target device may assume that the beginning of the closest subframe of this neighbour cell to subframe X is received within the search window of size $[- \text{expectedRSTD-Uncertainty} \times 3 \times T_s, \text{expectedRSTD-Uncertainty} \times 3 \times T_s]$ centered at $T_x + (\text{expectedRSTD}-8192) \times 3 \times T_s$.	
<i>tpId</i>	
This field specifies an identity of the transmission point. This field together with the <i>physCellId</i> and/or <i>prsID</i> may be used to identify the transmission point in case the same physical cell ID is shared by multiple transmission points.	
<i>prs-only-tp</i>	
This field, if present, indicates that the <i>OTDOA-NeighbourCellInfoElement</i> is provided for a PRS-only TP. For the purpose of RSTD measurements from a PRS-only TP, the target device shall not assume any other signals or physical channels are present other than PRS [28]. For the purpose of RSTD measurements from a PRS-only TP, the target device shall use the <i>physCellId</i> only for PRS generation, and only if no PRS-ID is provided for this TP.	

<i>OTDOA-NeighbourCellInfoList</i> field descriptions	
<i>cpLengthCRS</i>	This field specifies the cyclic prefix length of this assistance data neighbour cell CRS. If this field is present, the target device may assume the CRS and PRS antenna ports of this assistance data neighbour cell are quasi co-located (as defined in [16]).
<i>sameMBSFNconfigNeighbour</i>	This field indicates whether the MBSFN subframe configuration of the neighbour cell is the same as the current primary cell of the target device. TRUE means the same, and FALSE means not the same.
<i>dlBandwidth</i>	This field specifies the downlink bandwidth configuration of the neighbour cell, NRB in downlink, see TS 36.101 [21, table 5.6-1]. n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on.
<i>addPRSconfigNeighbour</i>	<p>This field specifies the additional (second and possibly third) PRS configuration(s) of the neighbour cell. When the EARFCN of the neighbour cell is the same as for the assistance data reference cell, the target device may assume that each PRS positioning occasion in each instance of <i>addPRSconfigNeighbour</i> in the neighbour cell at least partially overlaps with a PRS positioning occasion of the same instance of <i>addPRSconfigRef</i> in the assistance data reference cell where the maximum offset between the transmitted PRS positioning occasions may be assumed to not exceed half a subframe.</p> <p>When the EARFCN of the neighbour cell is the same as for the assistance data reference cell, the target may assume that each instance of <i>addPRSconfigNeighbour</i> of this cell has the same PRS periodicity (T_{PRS}) as the corresponding instance of <i>addPRSconfigRef</i> of the assistance data reference cell.</p>

NOTE: If this cell has more than one PRS configuration with equal longest PRS occasion group periodicity (i.e., PRS occasion group length times T_{PRS}), the first such configuration is referenced. In order to avoid ambiguity for frequency hopping, a PRS occasion group should contain at least 2 PRS occasions with hopping between 2 narrowbands and at least 4 PRS occasions with hopping between 4 narrowbands.

— *OTDOA-ReferenceCellInfoNB*

The IE *OTDOA-ReferenceCellInfoNB* is used by the location server to provide NB-IoT assistance data reference cell information for OTDOA assistance data.

```
-- ASN1START

OTDOA-ReferenceCellInfoNB-r14 ::= SEQUENCE {
    physCellIdNB-r14           INTEGER (0..503)          OPTIONAL,   -- Cond NoPRS-AD1
    cellGlobalIdNB-r14          ECGI                   OPTIONAL,   -- Cond NoPRS-AD2
    carrierFreqRef-r14          CarrierFreq-NB-r14    OPTIONAL,   -- Cond NotSameAsServ1
    earfcn-r14                  ARFCN-ValueEUTRA-r14  OPTIONAL,   -- Cond Inband
    eutra-NumCRS-Ports-r14     ENUMERATED {ports1-or-2, ports4}
                               OPTIONAL,   -- Cond NoPRS-AD3
    otdoa-SIB1-NB-repetitions-r14 ENUMERATED { r4, r8, r16 } OPTIONAL,   -- Cond NotSameAsServ2
    nprsInfo-r14                PRS-Info-NB-r14        OPTIONAL,   -- Cond NPRS
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
NoPRS-AD1	This field is mandatory present if the <i>OTDOA-ReferenceCellInfo</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> , or if the <i>OTDOA-ReferenceCellInfo</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> and the narrowband physical layer cell identity is not the same as the physical cell identity provided in <i>OTDOA-ReferenceCellInfo</i> IE. Otherwise it is not present.
NoPRS-AD2	This field is optionally present, need ON, if the <i>OTDOA-ReferenceCellInfo</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> , or if the <i>OTDOA-ReferenceCellInfo</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> and the global cell identity is not the same as provided in <i>OTDOA-ReferenceCellInfo</i> IE.
NotSameAsServ1	This field is mandatory present if the carrier frequency of the NB-IoT assistance data reference cell is not the same as the carrier frequency of the target devices's current serving NB-IoT cell. Otherwise it is not present.
Inband	This field is mandatory present, if the NPRS is configured within the LTE spectrum allocation (inband deployment). Otherwise it is not present.
NoPRS-AD3	This field is mandatory present if the <i>OTDOA-ReferenceCellInfo</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> and if the NB-IoT assistance data reference cell is deployed within the LTE spectrum allocation (inband deployment). Otherwise it is not present.
NotSameAsServ2	This field is mandatory present, if NPRS configuration Part B only is configured on the NB-IoT assistance data reference cell, and if the repetition number of SIB1-NB of the NB-IoT assistance data reference cell is not the same as the repetition number of SIB1-NB of the target devices's current serving NB-IoT cell. Otherwise it is not present.
NPRS	The field is mandatory present if narrowband positioning reference signals are available in the assistance data reference cell [16]; otherwise it is not present.

OTDOA-ReferenceCellInfoNB field descriptions

physCellIdNB	This field specifies the narrowband physical layer cell identity of the NB-IoT assistance data reference cell, as defined in [12]. If this field is absent and if the <i>OTDOA-ReferenceCellInfo</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> the narrowband physical layer cell identity is the same as the <i>physCellId</i> provided in <i>OTDOA-ReferenceCellInfo</i> IE.
cellGlobalIdNB	This field specifies the global cell identity of the NB-IoT assistance data reference cell, as defined in [12]. If this field is absent and if the <i>OTDOA-ReferenceCellInfo</i> IE with <i>cellGlobalId</i> is included in <i>OTDOA-ProvideAssistanceData</i> , the global cell identity is the same as provided in <i>OTDOA-ReferenceCellInfo</i> IE.
carrierFreqRef	This field specifies the carrier frequency of the NB-IoT assistance data reference cell.
earfcn	This field specifies the EARFCN of the E-UTRAN frequency, in which the NB-IoT cell is deployed.
eutra-NumCRS-Ports	This field specifies whether 1 (or 2) antenna port(s) or 4 antenna ports for cell specific reference signals (CRS) are used in the NB-IoT assistance data reference cell. If this field is absent and if the <i>OTDOA-ReferenceCellInfo</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> , the number of CRS antenna ports is the same as provided in <i>OTDOA-ReferenceCellInfo</i> IE.
otdoa-SIB1-NB-repetitions	This field specifies the repetition number of SIB1-NB of the NB-IoT assistance data reference cell. Enumerated values r4 correspond to 4 repetitions, r8 to 8 repetitions, and r16 to 16 repetitions. Note, when NPRS configuration Part B only is configured on the NB-IoT assistance data reference cell (i.e., anchor carrier), <i>nprs-NumSF</i> does also count/include subframes containing NPSS, NSSS, NPBCH, or SIB1-NB, but the UE can assume that no NPRS are transmitted in these subframes [16].
nprsInfo	This field specifies the NPRS configuration of the NB-IoT assistance data reference cell.

— PRS-Info-NB

The IE *PRS-Info-NB* provides the information related to the configuration of NPRS in a cell. If *PRS-Info-NB* includes configurations for multiple NPRS carrier frequencies, the target device may assume the antenna ports for the NPRS carrier are quasi co-located, as defined in [16].

```
-- ASN1START
PRS-Info-NB-r14 ::= SEQUENCE (SIZE (1..maxCarrier-r14)) OF NPRS-Info-r14
NPRS-Info-r14 ::= SEQUENCE {
    operationModeInfoNPRS-r14   ENUMERATED { inband, standalone },
    nprs-carrier-r14           OPTIONAL,      -- Cond Standalone/Guardband
```

```

nprsSequenceInfo-r14      INTEGER (0..174)    OPTIONAL,   -- Cond Inband
nprsID-r14                INTEGER (0..4095)   OPTIONAL,   -- Cond NPRS-ID
partA-r14                 SEQUENCE {
  nprsBitmap-r14          CHOICE {
    subframePattern10-r14  BIT STRING (SIZE (10)),
    subframePattern40-r14  BIT STRING (SIZE (40))
  },
  nprs-MutingInfoA-r14    CHOICE {
    po2-r14                BIT STRING (SIZE(2)),
    po4-r14                BIT STRING (SIZE(4)),
    po8-r14                BIT STRING (SIZE(8)),
    pol6-r14               BIT STRING (SIZE(16)),
    ...
  }
  ...
}
partB-r14                 SEQUENCE {
  nprs-Period-r14         ENUMERATED { ms160, ms320, ms640, ms1280, ... },
  nprs-startSF-r14        ENUMERATED { zero, one-eighth, two-eighths, three-eighths,
                                         four-eighths, five-eighths, six-eighths,
                                         seven-eighths, ... },
  nprs-NumSF-r14          ENUMERATED { sf10, sf20, sf40, sf80, sf160, sf320,
                                         sf640, sf1280, ... },
  nprs-MutingInfoB-r14    CHOICE {
    po2-r14                BIT STRING (SIZE(2)),
    po4-r14                BIT STRING (SIZE(4)),
    po8-r14                BIT STRING (SIZE(8)),
    pol6-r14               BIT STRING (SIZE(16)),
    ...
  }
  ...
}
maxCarrier-r14   INTEGER ::= 5
-- ASN1STOP

```

Conditional presence	Explanation
<i>Standalone/Guardband</i>	This field is mandatory present, if the NPRS is configured in standalone or guardband operation mode. Otherwise it is not present.
<i>Inband</i>	This field is mandatory present, if the NPRS is configured within the LTE spectrum allocation (inband deployment) and the LTE carrier frequency is not provided in the assistance data. Otherwise it is not present.
<i>NPRS-ID</i>	The field is mandatory present, if the NPRS is generated based on the NPRS-ID [16], different from the PCI. Otherwise the field is not present.
<i>MutingA</i>	The field is mandatory present, if muting is used for the NPRS Part A configuration. Otherwise the field is not present.
<i>PartA</i>	The field is mandatory present, if NPRS is configured based on a bitmap of subframes which are not NB-IoT DL subframes (i.e., invalid DL subframes) (Part A configuration). Otherwise the field is not present.
<i>MutingB</i>	The field is mandatory present, if muting is used for the NPRS Part B configuration. Otherwise the field is not present.
<i>PartB</i>	The field is mandatory present, if NPRS is configured based on a NPRS period, a NPRS subframe offset, and a number of consecutive NPRS downlink subframes per positioning occasion (Part B configuration). Otherwise the field is not present. If NPRS configuration Part A and Part B are both configured, then a subframe contains NPRS if both configurations indicate that it contains NPRS.

PRS-Info-NB field descriptions

operationModelInfoNPRS

This field specifies the operation mode of the NPRS carrier. The value 'standalone' indicates standalone or guardband operation mode.

nprs-carrier

This field specifies the NB-IoT carrier frequency for the NPRS.

nprsSequenceInfo

This field specifies the index of the PRB containing the NPRS as defined in the table *nprsSequenceInfo* to E-UTRA PRB index relation below.

nprsID

This field specifies the NPRS-ID as defined in [16].

PRS-Info-NB field descriptions			
subframePattern10, subframePattern40			
This field specifies the NPRS subframe Part A configuration over 10ms or 40ms. Subframes not containing NPRS are indicated with value '0' in the bitmap; subframes containing NPRS are indicated with value '1' in the bitmap. The first/leftmost bit corresponds to the subframe #0 of the radio frame satisfying SFN mod x = 0, where x is the size of the bit string divided by 10.			
nprs-MutingInfoA			
This field specifies the NPRS muting configuration of the NB-IoT carrier Part A configuration. The NPRS muting configuration is defined by a periodic NPRS muting sequence with periodicity T_{REP} where T_{REP} , counted in the number of NPRS positioning occasions, can be 2, 4, 8, or 16 which is also the length of the selected bit string that represents this NPRS muting sequence. If a bit in the NPRS muting sequence is set to '0', then the NPRS is muted in the corresponding NPRS positioning occasion. A NPRS positioning occasion for Part A comprises one radio frame (i.e., 10 subframes). The first/leftmost bit of the NPRS muting sequence corresponds to the first NPRS positioning occasion that starts after the beginning of the NB-IoT assistance data reference cell SFN=0. The sequence is valid for all subframes after the target device has received the <i>nprs-MutingInfoA</i> . When the SFN of the NB-IoT assistance data reference cell is not known to the target device and <i>nprs-MutingInfoA</i> is provided for a cell in the OTDOA-NeighbourCellInfoListNB IE, the target device may assume no NPRS is transmitted by that cell.			
nprs-Period			
This field specifies the NPRS occasion period T_{NPRS} [16]. Enumerated values correspond to 160ms, 320ms, 640ms, and 1280ms.			
nprs-startSF			
This field specifies the subframe offset α_{NPRS} [16]. Enumerated values correspond to α of 0, 1/8, 2/8, 3/8, 4/8, 5/8, 6/8, or 7/8.			
nprs-NumSF			
This field specifies the number of consecutive downlink subframes N_{NPRS} in one NPRS positioning occasion [16]. Enumerated values correspond to 10, 20, 40, 80, 160, 320, 640, and 1280 subframes.			
When the target device receives a <i>nprs-NumSF</i> which exceeds the <i>nprs-Period</i> (i.e., $N_{NPRS} > T_{NPRS}$), the target device may assume no NPRS is transmitted by that cell.			
nprs-MutingInfoB			
This field specifies the NPRS muting configuration of the NB-IoT carrier Part B configuration. The NPRS muting configuration is defined by a periodic NPRS muting sequence with periodicity T_{REP} where T_{REP} , counted in the number of NPRS positioning occasions, can be 2, 4, 8, or 16 which is also the length of the selected bit string that represents this NPRS muting sequence. If a bit in the NPRS muting sequence is set to '0', then the NPRS is muted in the corresponding NPRS positioning occasion. A NPRS positioning occasion for Part B comprises N_{NPRS} consecutive downlink positioning subframes, where N_{NPRS} is given by the <i>nprs-NumSF</i> field. The first/leftmost bit of the NPRS muting sequence corresponds to the first NPRS positioning occasion that starts after the beginning of the NB-IoT assistance data reference cell SFN=0. The sequence is valid for all subframes after the target device has received the <i>nprs-MutingInfoB</i> . When the SFN of the NB-IoT assistance data reference cell is not known to the UE and <i>nprs-MutingInfoB</i> is provided for a cell in the OTDOA-NeighbourCellInfoListNB IE, the target device may assume no NPRS is transmitted by that cell.			
When the UE receives a T_{REP} -bit muting pattern together with a NPRS periodicity T_{NPRS} for the same carrier which exceeds 10240 subframes (i.e., $T_{REP} \times T_{NPRS} > 10240$ subframes), the target device shall assume an n-bit muting pattern based on the first n bits, where $n = 10240/T_{NPRS}$.			

***nprsSequenceInfo* to E-UTRA PRB index relation**

<i>nprsSequenceInfo</i>	E-UTRA PRB index n'_{PRB} for odd number of N_{RB}^{DL} [16]	<i>nprsSequenceInfo</i>	E-UTRA PRB index n'_{PRB} for even number of N_{RB}^{DL} [16]
0 - 74	-37, -36, ..., 37	75 – 174	-50, -49, ..., 49

NOTE: Based on the above relation, in inband deployment, the carrier frequency of the NPRS carrier (f_{NB-IoT}) can be calculated as follows:

$$f_{NB-IoT} = \begin{cases} f_{EUTRA} + 7.5 + 180 \cdot n'_{PRB} & \text{if } nprsSequenceInfo \leq 74 \text{ and } n'_{PRB} > 0 \\ f_{EUTRA} - 7.5 + 180 \cdot n'_{PRB} & \text{if } nprsSequenceInfo \leq 74 \text{ and } n'_{PRB} < 0 \\ f_{EUTRA} + 180 \cdot n'_{PRB} & \text{if } nprsSequenceInfo \leq 74 \text{ and } n'_{PRB} = 0 \\ f_{EUTRA} + 97.5 + 180 \cdot n'_{PRB} & \text{if } nprsSequenceInfo \geq 75 \text{ and } n'_{PRB} \geq 0 \\ f_{EUTRA} - 97.5 + 180 \cdot (n'_{PRB} + 1) & \text{if } nprsSequenceInfo \geq 75 \text{ and } n'_{PRB} < 0 \end{cases}$$

Where f_{EUTRA} is derived from earfcn according to TS 36.101 [21, 5.7.3]

OTDOA-NeighbourCellInfoListNB

The IE *OTDOA-NeighbourCellInfoListNB* is used by the location server to provide NB-IoT neighbour cell information for OTDOA assistance data.

```
-- ASN1START

OTDOA-NeighbourCellInfoListNB-r14 ::= SEQUENCE (SIZE (1..maxCells-r14)) OF
                                         OTDOA-NeighbourCellInfoNB-r14

OTDOA-NeighbourCellInfoNB-r14 ::= SEQUENCE {
    physCellIdNB-r14           INTEGER (0..503)      OPTIONAL,      -- Cond NoPRS-AD1
    cellGlobalIdNB-r14          ECGI                  OPTIONAL,      -- Cond NoPRS-AD2
    carrierFreq-r14              CarrierFreq-NB-r14   OPTIONAL,      -- Cond NotSameAsRef1
    earfcn-r14                  ARFCN-ValueEUTRA-r14 OPTIONAL,      -- Cond Inband
    eutra-NumCRS-Ports-r14      ENUMERATED {ports-1-or-2, ports-4, ...} OPTIONAL,      -- Cond NotsameAsRef2
    otdoa-SIB1-NB-repetitions-r14 ENUMERATED { r4, r8, r16 }      OPTIONAL,      -- Cond NotSameAsRef3
    nprsInfo-r14                 PRS-Info-NB-r14     OPTIONAL,      -- Cond NotsameAsRef4
    nprs-slotNumberOffset-r14    INTEGER (0..19)       OPTIONAL,      -- Cond NotsameAsRef5
    nprs-SFN-Offset-r14          INTEGER (0..63)       OPTIONAL,      -- Cond NotsameAsRef6
    nprs-SubframeOffset-r14     INTEGER (0..1279)     OPTIONAL,      -- Need OP
    expectedRSTD-r14             INTEGER (0..16383)    OPTIONAL,      -- Cond NoPRS-AD3
    expectedRSTD-Uncertainty-r14 INTEGER (0..1023)     OPTIONAL,      -- Cond NoPRS-AD3
    prsNeighbourCellIndex-r14   INTEGER (1..72)       OPTIONAL,      -- Cond PRS-AD
    ...
}

maxCells-r14      INTEGER ::= 72

-- ASN1STOP
```

Conditional presence	Explanation
NoPRS-AD1	This field is mandatory present if the <i>OTDOA-NeighbourCellInfoList</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> , or if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> and the narrowband physical layer cell identity of this cell is not the same as the physical cell identity of the corresponding cell (as indicated by <i>prsNeighbourCellIndex</i>) in <i>OTDOA-NeighbourCellInfoList</i> IE.
NoPRS-AD2	This field is optionally present, need ON, if the <i>OTDOA-NeighbourCellInfoList</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> , or if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> and the global cell identity of this cell is not the same as for the corresponding cell (as indicated by <i>prsNeighbourCellIndex</i>) in <i>OTDOA-NeighbourCellInfoList</i> IE.
Inband	This field is mandatory present, if the NPRS is configured within the LTE spectrum allocation (inband deployment). Otherwise it is not present.
NotSameAsRef1	The field is mandatory present if the carrier frequency is not the same as for the NB-IoT assistance data reference cell; otherwise it is not present.
NotSameAsRef2	The field is mandatory present if this cell is deployed within the LTE spectrum allocation (inband deployment) and if the number of E-UTRA CRS antenna ports is not the same as for the NB-IoT assistance data reference cell; otherwise it is not present.
NotSameAsRef3	This field is mandatory present if NPRS configuration Part B only is configured on this neighbour cell, and if the repetition number of SIB1-NB of this neighbor cell is not the same as the repetition number of SIB1-NB of the NB-IoT assistance data reference cell. Otherwise it is not present.
NotSameAsRef4	The field is mandatory present, if the NPRS configuration is not the same as for the NB-IoT assistance data reference cell; otherwise it is not present.
NotSameAsRef5	The field is mandatory present if the slot timing is not the same as for the NB-IoT assistance data reference cell; otherwise it is not present.
NotSameAsRef6	The field is mandatory present if the frame timing is not the same as for the NB-IoT assistance data reference cell; otherwise it is not present.
NoPRS-AD3	This field is mandatory present if the <i>OTDOA-NeighbourCellInfoList</i> IE is not included in <i>OTDOA-ProvideAssistanceData</i> , or if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> and <i>prsNeighbourCellIndex</i> is absent for this cell.
PRS-AD	This field is optionally present, need OP, if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i> ; otherwise it is not present.

OTDOA-NeighbourCellInfoListNB field descriptions

physCellIdNB

This field specifies the narrowband physical cell identity of the NB-IoT neighbour cell, as defined in [12]. If this field is absent and if the *OTDOA-NeighbourCellInfoList* IE is included in *OTDOA-ProvideAssistanceData* the narrowband physical layer cell identity is the same as the *physCellId* provided for the corresponding cell (as indicated by *prsNeighbourCellIndex*) in *OTDOA-NeighbourCellInfoList* IE.

cellGlobalIdNB

This field specifies the global cell ID of the NB-IoT neighbour cell, as defined in [12]. If this field is absent and if the *OTDOA-NeighbourCellInfoList* IE with *cellGlobalId* is included in *OTDOA-ProvideAssistanceData*, the global cell identity of the NB-IoT neighbour cell is the same as provided for the corresponding cell (as indicated by *prsNeighbourCellIndex*) in *OTDOA-NeighbourCellInfoList* IE.

carrierFreq

This field specifies the carrier frequency of the NB-IoT neighbour cell.

earfcn

This field specifies the EARFCN of the E-UTRAN frequency, in which the NB-IoT cell is deployed.

eutra-NumCRS-Ports

This field specifies whether 1 (or 2) antenna port(s) or 4 antenna ports for cell specific reference signals are used.

otdoa-SIB1-NB-repetitions

This field specifies the repetition number of SIB1-NB of the neighbour cell. Enumerated values r4 correspond to 4 repetitions, r8 to 8 repetitions, and r16 to 16 repetitions.

Note, when NPRS configuration Part B only is configured on this NB-IoT neighbour cell (i.e., anchor carrier), *nprs-NumSF* does also count/include subframes containing NPSS, NSSS, NPBCH, or SIB1-NB, but the UE can assume that no NPRS are transmitted in these subframes [16].

<i>OTDOA-NeighbourCellInfoListNB</i> field descriptions	
<i>nprsInfo</i>	<p>This field specifies the NPRS configuration of the NB-IoT neighbour cell.</p> <p>When the carrier frequency of the NB-IoT neighbour cell is the same as for the NB-IoT assistance data reference cell, the target device may assume that each NPRS positioning occasion for each NPRS carrier frequency in the neighbour cell at least partially overlaps with a NPRS positioning occasion for each NPRS carrier frequency in the NB-IoT assistance data reference cell where the maximum offset between the transmitted NPRS positioning occasions may be assumed to not exceed half a subframe.</p> <p>When the carrier frequency of the neighbour cell is the same as for the NB-IoT assistance data reference cell, and NPRS configuration Part B is configured, the target may assume that this cell has the same NPRS periodicity (T_{NPRS}) as the assistance data reference cell for each NPRS carrier frequency.</p>
<i>nprs-slotNumberOffset</i>	<p>This field specifies the slot number offset at the transmitter between this cell and the NB-IoT assistance data reference cell. The offset corresponds to the number of full slots counted from the beginning of a radio frame of the NB-IoT assistance data reference cell to the beginning of the closest subsequent radio frame of this cell. If this field is absent, the slot timing is the same as for the NB-IoT assistance data reference cell.</p>
<i>nprs-SFN-Offset</i>	<p>This field specifies the SFN offset (modulo 64) at the transmitter between this cell and the NB-IoT assistance data reference cell. The offset corresponds to the number of full radio frames counted from the beginning of a radio frame #0 of the NB-IoT assistance data reference cell to the beginning of the closest subsequent radio frame #0 of this cell. The UE may use this field together with the <i>nprs-slotNumberOffset</i> and <i>otdoa-SIB1-NB-repetitions</i> to determine the SIB1-NB subframes of this neighbour cell.</p>
<i>nprs-SubframeOffset</i>	<p>This field specifies the offset between the first NPRS subframe in the NB-IoT assistance data reference cell (NOTE 1) and the first NPRS subframe in the closest subsequent NPRS positioning occasion of the NPRS carrier with the longest NPRS periodicity of this cell (NOTE 2). The value is given in number of full sub-frames. If this field is not present, the receiver shall consider the NPRS subframe offset to be 0.</p>
<i>expectedRSTD</i>	<p>This field indicates the RSTD value that the target device is expected to measure between this cell and the NB-IoT assistance data reference cell. The <i>expectedRSTD</i> field takes into account the expected propagation time difference as well as transmit time difference of NPRS positioning occasions between the two cells. The RSTD value can be negative and is calculated as (<i>expectedRSTD-8192</i>). The resolution is $3 \times T_s$, with $T_s = 1/(15000 * 2048)$ seconds. If this field is absent and if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i>, the expected RSTD is the same as provided in <i>OTDOA-NeighbourCellInfoList</i> IE for the corresponding cell (as indicated by <i>prsNeighbourCellIndex</i>).</p>
<i>expectedRSTD-Uncertainty</i>	<p>This field indicates the uncertainty in <i>expectedRSTD</i> value. The uncertainty is related to the location server's a-priori estimation of the target device location. The <i>expectedRSTD</i> and <i>expectedRSTD-Uncertainty</i> together define the search window for the target device.</p> <p>The scale factor of the <i>expectedRSTD-Uncertainty</i> field is $3 \times T_s$, with $T_s = 1/(15000 * 2048)$ seconds.</p> <p>If this field is absent and if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i>, the expected RSTD uncertainty is the same as provided in <i>OTDOA-NeighbourCellInfoList</i> IE for the corresponding cell (as indicated by <i>prsNeighbourCellIndex</i>).</p> <p>The target device may assume that the beginning of the NPRS positioning occasion of the NPRS carrier with the longest NPRS periodicity of the neighbour cell (NOTE 2) is received within the search window of size $[-\text{expectedRSTD-Uncertainty} \times 3 \times T_s, \text{expectedRSTD-Uncertainty} \times 3 \times T_s]$ centered at $T_{REF} + 1 \text{ millisecond} \times N + (\text{expectedRSTD-8192}) \times 3 \times T_s$, where T_{REF} is the reception time of the beginning of the NPRS positioning occasion of the NB-IoT assistance data reference cell (NOTE 1) at the target device antenna connector, and $N = \text{nprs-SubframeOffset}$.</p>
<i>prsNeighbourCellIndex</i>	<p>This field contains an index of the entry in IE <i>OTDOA-NeighbourCellInfoList</i>. Value 1 corresponds to the first cell in <i>OTDOA-NeighbourCellInfoList</i>, value 2 to the second, and so on. If this field is absent, and if the <i>OTDOA-NeighbourCellInfoList</i> IE is included in <i>OTDOA-ProvideAssistanceData</i>, it means there is no corresponding cell in <i>OTDOA-NeighbourCellInfoList</i> IE for this cell.</p> <p>The target device may assume the antenna ports of the PRS of the cell indicated by <i>prsNeighbourCellIndex</i> and the NPRS of this cell are quasi co-located, as defined in [16].</p>

NOTE 1: If the NB-IoT assistance data reference cell (i.e., anchor carrier) has no NPRS configured, the first NPRS carrier in *PRS-Info-NB* is referenced.

NOTE 2: "Cell" in this context may not necessarily be the anchor carrier. If this "cell" has more than one NPRS carrier with equal longest periodicity, the first such NPRS carrier in *PRS-Info-NB* is referenced. The length of a NPRS positioning occasion for Part A in this context is the length of the *nprsBitmap* bit string.

6.5.1.3 OTDOA Assistance Data Request

- *OTDOA-RequestAssistanceData*

The IE *OTDOA-RequestAssistanceData* is used by the target device to request assistance data from a location server.

```
-- ASN1START

OTDOA-RequestAssistanceData ::= SEQUENCE {
    physCellId      INTEGER (0..503),
    ...
    [
        adType-r14   BIT STRING { prs (0), nprs (1) } (SIZE (1..8))      OPTIONAL
    ]
}

-- ASN1STOP
```

OTDOA-RequestAssistanceData field descriptions

physCellId

This field specifies the physical cell identity of the current primary cell of the target device.

adType

This field specifies the assistance data requested. This is represented by a bit string, with a one-value at the bit position means the particular assistance data is requested; a zero-value means not requested.

Bit 0 indicates that PRS assistance data are requested, bit 1 indicates that NPRS assistance data are requested.

6.5.1.4 OTDOA Location Information

- *OTDOA-ProvideLocationInformation*

The IE *OTDOA-ProvideLocationInformation* is used by the target device to provide OTDOA location measurements to the location server. It may also be used to provide OTDOA positioning specific error reason.

```
-- ASN1START

OTDOA-ProvideLocationInformation ::= SEQUENCE {
    otdoaSignalMeasurementInformation  OTDOA-SignalMeasurementInformation  OPTIONAL,
    otdoa-Error                      OTDOA-Error                      OPTIONAL,
    ...
    [
        otdoaSignalMeasurementInformation-NB-r14    OTDOA-SignalMeasurementInformation-NB-r14
    OPTIONAL
    ]
}

-- ASN1STOP
```

6.5.1.5 OTDOA Location Information Elements

- *OTDOA-SignalMeasurementInformation*

The IE *OTDOA-SignalMeasurementInformation* is used by the target device to provide RSTD measurements to the location server. The RSTD measurements are provided for a neighbour cell and the RSTD reference cell, both of which are provided in the IE *OTDOA-ProvideAssistanceData*. The RSTD reference cell may or may not be the same as the assistance data reference cell provided in *OTDOA-ReferenceCellInfo* or *OTDOA-ReferenceCellInfoNB*. If the target device stops reporting inter-frequency RSTD measurements, where the inter-frequency RSTD measurement is an OTDOA RSTD measurement with at least one cell on a frequency different from the serving cell frequency, the LPP layer shall inform lower layers that inter-frequency RSTD measurements are stopped.

NOTE 1: If there are more than 24 *NeighbourMeasurementElement* to be sent, the target device may send them in multiple *ProvideLocationInformation* messages, as described under sub-clause 5.3.

NOTE 2: If NPRS/PRS antenna ports are quasi co-located, the target device provides a single RSTD measurement for the quasi co-located antenna ports of NPRS/PRS.

```
-- ASN1START

OTDOA-SignalMeasurementInformation ::= SEQUENCE {
    systemFrameNumber      BIT STRING (SIZE (10)),
    physCellIdRef          INTEGER (0..503),
    cellGlobalIdRef        ECGI                      OPTIONAL,
    earfcnRef              ARFCN-ValueEUTRA       OPTIONAL,
    referenceQuality       OTDOA-MeasQuality     OPTIONAL,
    neighbourMeasurementList NeighbourMeasurementList,
    ...
    [[ earfcnRef-v9a0       ARFCN-ValueEUTRA-v9a0   OPTIONAL   -- Cond NotSameAsRef0
    ]],
    [[ tpIdRef-r14          INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer0
    prsIdRef-r14          INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer1
    additionalPathsRef-r14 AdditionalPathList-r14    OPTIONAL,
    nprsIdRef-r14          INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer2
    carrierFreqOffsetNB-Ref-r14 CarrierFreqOffsetNB-r14 OPTIONAL   -- Cond NB-IoT
    hyperSFN-r14           BIT STRING (SIZE (10))   OPTIONAL   -- Cond H-SFN
    ]]
}

NeighbourMeasurementList ::= SEQUENCE (SIZE(1..24)) OF NeighbourMeasurementElement

NeighbourMeasurementElement ::= SEQUENCE {
    physCellIdNeighbour    INTEGER (0..503),
    cellGlobalIdNeighbour  ECGI                      OPTIONAL,
    earfcnNeighbour        ARFCN-ValueEUTRA       OPTIONAL   -- Cond NotSameAsRef2
    rstd                   INTEGER (0..12711),
    rstd-Quality           OTDOA-MeasQuality,
    ...
    [[ earfcnNeighbour-v9a0 ARFCN-ValueEUTRA-v9a0   OPTIONAL   -- Cond NotSameAsRef3
    ]],
    [[ tpIdNeighbour-r14   INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer0
    prsIdNeighbour-r14   INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer1
    delta-rstd-r14         INTEGER (0..5)          OPTIONAL,
    additionalPathsNeighbour-r14 AdditionalPathList-r14    OPTIONAL,
    nprsIdNeighbour-r14   INTEGER (0..4095)        OPTIONAL   -- Cond ProvidedByServer2
    carrierFreqOffsetNB-Neighbour-r14 CarrierFreqOffsetNB-r14 OPTIONAL   -- Cond NB-IoT
    ]]
}

AdditionalPathList-r14 ::= SEQUENCE (SIZE(1..maxPaths-r14)) OF AdditionalPath-r14

maxPaths-r14    INTEGER ::= 2

-- ASN1STOP
```

Conditional presence	Explanation
<i>NotSameAsRef0</i>	The field is absent if the corresponding <i>earfcnRef-v9a0</i> is present. Otherwise, the target device shall include this field if the EARFCN of the RSTD reference cell is not the same as the EARFCN of the assistance data reference cell provided in the OTDOA assistance data.
<i>NotSameAsRef1</i>	The field is absent if the corresponding <i>earfcnRef</i> is present. Otherwise, the target device shall include this field if the EARFCN of the RSTD reference cell is not the same as the EARFCN of the assistance data reference cell provided in the OTDOA assistance data.
<i>NotSameAsRef2</i>	The field is absent if the corresponding <i>earfcnNeighbour-v9a0</i> is present. Otherwise, the target device shall include this field if the EARFCN of this neighbour cell is not the same as the <i>earfcnRef</i> for the RSTD reference cell.
<i>NotSameAsRef3</i>	The field is absent if the corresponding <i>earfcnNeighbour</i> is present. Otherwise, the target device shall include this field if the EARFCN of this neighbour cell is not the same as the <i>earfcnRef</i> for the RSTD reference cell.
<i>ProvidedByServer0</i>	The target device shall include this field if a <i>tpId</i> for this transmission point is included in the <i>OTDOA-ProvideAssistanceData</i> . Otherwise the field is absent.
<i>ProvidedByServer1</i>	The target device shall include this field if a <i>prsID</i> for this transmission point is included in the <i>OTDOA-ProvideAssistanceData</i> . Otherwise the field is absent.
<i>ProvidedByServer2</i>	The target device shall include this field if an <i>nprsID</i> for this cell is included in the <i>OTDOA-ProvideAssistanceData</i> and if this cell is a NB-IoT only cell (without associated LTE PRS cell). Otherwise the field is absent.
<i>NB-IoT</i>	The target device shall include this field if the cell is a NB-IoT only cell (without associated LTE PRS cell). Otherwise the field is absent.
<i>H-SFN</i>	The target device shall include this field if it was able to determine a hyper SFN of the RSTD reference cell.

<i>OTDOA-SignalMeasurementInformation</i> field descriptions	
<i>systemFrameNumber</i>	This field specifies the SFN of the RSTD reference cell containing the starting subframe of the PRS or NPRS positioning occasion if PRS or NPRS are available on the RSTD reference cell, or subframe of the CRS for RSTD measurements if PRS and NPRS are not available on the RSTD reference cell during which the most recent neighbour cell RSTD measurement was performed. In case of more than a single PRS configuration on the RSTD reference cell, the first PRS configuration is referenced.
<i>physCellIdRef</i>	This field specifies the physical cell identity of the RSTD reference cell.
<i>cellGlobalIdRef</i>	This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the RSTD reference cell. The target shall provide this IE if it knows the ECGI of the RSTD reference cell.
<i>earfcnRef</i>	This field specifies the EARFCN of the RSTD reference cell.
<i>referenceQuality</i>	This field specifies the target device's best estimate of the quality of the TOA measurement from the RSTD reference cell, $T_{SubframeRxRef}$, where $T_{SubframeRxRef}$ is the time of arrival of the signal from the RSTD reference cell.
<i>neighbourMeasurementList</i>	This list contains the measured RSTD values for neighbour cells together with the RSTD reference cell, along with quality for each measurement.
<i>tpIdRef</i>	This field specifies the transmission point ID of the RSTD reference cell.
<i>prsIdRef</i>	This field specifies the PRS-ID of the first PRS configuration of the RSTD reference cell.
<i>additionalPathsRef</i>	This field specifies one or more additional detected path timing values for the RSTD reference cell, relative to the path timing used for determining the <i>rstd</i> value. If this field was requested but is not included, it means the UE did not detect any additional path timing values.
<i>nprsIdRef</i>	This field specifies the NPRS-ID of the RSTD reference cell.
<i>carrierFreqOffsetNB-Ref</i>	This field specifies the offset of the NB-IoT channel number to EARFCN given by <i>earfcnRef</i> as defined in TS 36.101 [21].
<i>hyperSFN</i>	This field specifies the hyper SFN as defined in [12] of the RSTD reference cell for the <i>systemFrameNumber</i> .
<i>physCellIdNeighbour</i>	This field specifies the physical cell identity of the neighbour cell for which the RSTDs are provided.

<i>OTDOA-SignalMeasurementInformation</i> field descriptions	
<i>cellGlobalIdNeighbour</i>	This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the neighbour cell for which the RSTDs are provided. The target device shall provide this IE if it was able to determine the ECGI of the neighbour cell at the time of measurement.
<i>earfcnNeighbour</i>	This field specifies the EARFCN of the neighbour cell used for the RSTD measurements.
<i>rstd</i>	This field specifies the relative timing difference between this neighbour cell and the RSTD reference cell, as defined in [17]. Mapping of the measured quantity is defined as in [18] subclause 9.1.10.3.
<i>rstd-Quality</i>	This field specifies the target device's best estimate of the quality of the measured <i>rstd</i> .
<i>tpIdNeighbour</i>	This field specifies the transmission point ID for the neighbour cell for which the RSTDs are provided.
<i>prsIdNeighbour</i>	This field specifies the PRS-ID of the first PRS configuration of the neighbour cell for which the RSTDs are provided.
<i>delta-rstd</i>	This field specifies the higher-resolution RSTD Δ_{RSTD} as defined in [18] subclause 9.1.10.4. Mapping of the measured quantity is defined as in [18] subclause 9.1.10.4.
<i>additionalPathsNeighbour</i>	This field specifies one or more additional detected path timing values for the neighbour cell, relative to the path timing used for determining the <i>rstd</i> value. If this field was requested but is not included, it means the UE did not detect any additional path timing values.
<i>nprsIdNeighbour</i>	This field specifies the NPRS-ID of the neighbour cell for which the RSTDs are provided.
<i>carrierFreqOffsetNB-Neighbour</i>	This field specifies the offset of the NB-IoT channel number to EARFCN given by <i>earfcnNeighbour</i> as defined in TS 36.101 [21].

— *OTDOA-SignalMeasurementInformation-NB*

The IE *OTDOA-SignalMeasurementInformation-NB* is used by the target device to provide RSTD measurements to the location server. The RSTD measurements are provided for a neighbour cell and the RSTD reference cell, both of which are provided in the IE *OTDOA-ProvideAssistanceData*. The RSTD reference cell may or may not be the same as the assistance data reference cell provided in *OTDOA-ReferenceCellInfo* or *OTDOA-ReferenceCellInfoNB*. If the target device stops reporting inter-frequency RSTD measurements, where the inter-frequency RSTD measurement is an OTDOA RSTD measurement with at least one cell on a frequency different from the serving cell frequency, the LPP layer shall inform lower layers that inter-frequency RSTD measurements are stopped.

NOTE 1: If there are more than 24 *NeighbourMeasurementElement-NB* to be sent, the target device may send them in multiple *ProvideLocationInformation* messages, as described under sub-clause 5.3.

NOTE 2: If NPRS/PRS antenna ports are quasi co-located, the target device provides a single RSTD measurement for the quasi co-located antenna ports of NPRS/PRS.

```
-- ASN1START

OTDOA-SignalMeasurementInformation-NB-r14 ::= SEQUENCE {
    systemFrameNumber-r14           BIT STRING (SIZE (10)),
    physCellIdRef-r14                INTEGER (0..503),
    cellGlobalIdRef-r14              ECGI                                OPTIONAL,
    earfcnRef-r14                   ARFCN-ValueEUTRA-r14          OPTIONAL,   -- Cond NotSameAsRef0
    referenceQuality-r14             OTDOA-MeasQuality            OPTIONAL,
    neighbourMeasurementList-r14     NeighbourMeasurementList-NB-r14,
    tpIdRef-r14                     INTEGER (0..4095)               OPTIONAL,   -- Cond ProvidedByServer0
    prsIdRef-r14                     INTEGER (0..4095)               OPTIONAL,   -- Cond ProvidedByServer1
    additionalPathsRef-r14           AdditionalPathList-r14        OPTIONAL,
    nprsIdRef-r14                   INTEGER (0..4095)               OPTIONAL,   -- Cond ProvidedByServer2
    carrierFreqOffsetNB-Ref-r14      CarrierFreqOffsetNB-r14       OPTIONAL,   -- Cond NB-IoT
    hyperSFN-r14                    BIT STRING (SIZE (10))          OPTIONAL,   -- Cond H-SFN
    ...
}

NeighbourMeasurementList-NB-r14 ::= SEQUENCE (SIZE(1..24)) OF NeighbourMeasurementElement-NB-r14

NeighbourMeasurementElement-NB-r14 ::= SEQUENCE {
    physCellIdNeighbour-r14        INTEGER (0..503),
    cellGlobalIdNeighbour-r14      ECGI                                OPTIONAL,
```

```

earfcnNeighbour-r14      ARFCN-ValueEUTRA-r14   OPTIONAL,    -- Cond NotSameAsRef2
rstd-r14                  INTEGER (0..12711),    OTDOA-MeasQuality,
rstd-Quality-r14          INTEGER (0..4095)      OPTIONAL,    -- Cond ProvidedByServer0
tpIdNeighbour-r14        INTEGER (0..4095)      OPTIONAL,    -- Cond ProvidedByServer1
prsIdNeighbour-r14        INTEGER (0..4095)      OPTIONAL,
delta-rstd-r14            INTEGER (0..5)       OPTIONAL,
additionalPathsNeighbour-r14 AdditionalPathList-r14 OPTIONAL,    -- Cond ProvidedByServer2
nprsIdNeighbour-r14      INTEGER (0..4095)      OPTIONAL,
carrierFreqOffsetNB-Neighbour-r14 CarrierFreqOffsetNB-r14 OPTIONAL,    -- Cond NB-IoT
...
}

-- ASN1STOP

```

Conditional presence	Explanation
<i>NotSameAsRef0</i>	The target device shall include this field if the EARFCN of the RSTD reference cell is not the same as the EARFCN of the assistance data reference cell provided in the OTDOA assistance data.
<i>NotSameAsRef2</i>	The target device shall include this field if the EARFCN of this neighbour cell is not the same as the <i>earfcnRef</i> for the RSTD reference cell.
<i>ProvidedByServer0</i>	The target device shall include this field if a <i>tpId</i> for this transmission point is included in the <i>OTDOA-ProvideAssistanceData</i> . Otherwise the field is absent.
<i>ProvidedByServer1</i>	The target device shall include this field if a <i>prsID</i> for this transmission point is included in the <i>OTDOA-ProvideAssistanceData</i> . Otherwise the field is absent.
<i>ProvidedByServer2</i>	The target device shall include this field if an <i>nprsID</i> for this cell is included in the <i>OTDOA-ProvideAssistanceData</i> and if this cell is a NB-IoT only cell (without associated LTE PRS cell). Otherwise the field is absent.
<i>NB-IoT</i>	The target device shall include this field if the cell is a NB-IoT only cell (without associated LTE PRS cell). Otherwise the field is absent.
<i>H-SFN</i>	The target device shall include this field if it was able to determine a hyper SFN of the RSTD reference cell.

OTDOA-SignalMeasurementInformation-NB field descriptions

systemFrameNumber

This field specifies the SFN of the RSTD reference cell containing the starting subframe of the PRS or NPRS positioning occasion if PRS or NPRS are available on the RSTD reference cell, or subframe of the CRS for RSTD measurements if PRS and NPRS are not available on the RSTD reference cell during which the most recent neighbour cell RSTD measurement was performed.

In case of more than a single PRS configuration on the RSTD reference cell, the first PRS configuration is referenced.

physCellIdRef

This field specifies the physical cell identity of the RSTD reference cell.

cellGlobalIdRef

This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the RSTD reference cell. The target shall provide this IE if it knows the ECGI of the RSTD reference cell.

earfcnRef

This field specifies the EARFCN of the RSTD reference cell.

referenceQuality

This field specifies the target device's best estimate of the quality of the TOA measurement from the RSTD reference cell, $T_{SubframeRxRef}$, where $T_{SubframeRxRef}$ is the time of arrival of the signal from the RSTD reference cell.

neighbourMeasurementList

This list contains the measured RSTD values for neighbour cells together with the RSTD reference cell, along with quality for each measurement.

tpIdRef

This field specifies the transmission point ID of the RSTD reference cell.

prsIdRef

This field specifies the PRS-ID of the first PRS configuration of the RSTD reference cell.

additionalPathsRef

This field specifies one or more additional detected path timing values for the RSTD reference cell, relative to the path timing used for determining the *rstd* value. If this field was requested but is not included, it means the UE did not detect any additional path timing values.

<i>OTDOA-SignalMeasurementInformation-NB</i> field descriptions	
<i>nprsidRef</i>	This field specifies the NPRS-ID of the RSTD reference cell.
<i>carrierFreqOffsetNB-Ref</i>	This field specifies the offset of the NB-IoT channel number to EARFCN given by <i>earfcnRef</i> as defined in TS 36.101 [21].
<i>hyperSFN</i>	This field specifies the hyper SFN as defined in [12] of the RSTD reference cell for the <i>systemFrameNumber</i> .
<i>physCellIdNeighbour</i>	This field specifies the physical cell identity of the neighbour cell for which the RSTDs are provided.
<i>cellGlobalIdNeighbour</i>	This field specifies the ECGI, the globally unique identity of a cell in E-UTRA, of the neighbour cell for which the RSTDs are provided. The target device shall provide this IE if it was able to determine the ECGI of the neighbour cell at the time of measurement.
<i>earfcnNeighbour</i>	This field specifies the EARFCN of the neighbour cell used for the RSTD measurements.
<i>rstd</i>	This field specifies the relative timing difference between this neighbour cell and the RSTD reference cell, as defined in [17]. Mapping of the measured quantity is defined as in [18] subclause 9.1.10.3.
<i>rstd-Quality</i>	This field specifies the target device's best estimate of the quality of the measured <i>rstd</i> .
<i>tpldNeighbour</i>	This field specifies the transmission point ID for the neighbour cell for which the RSTDs are provided.
<i>prsIdNeighbour</i>	This field specifies the PRS-ID of the first PRS configuration of the neighbour cell for which the RSTDs are provided.
<i>delta-rstd</i>	This field specifies the higher-resolution RSTD Δ_{RSTD} as defined in [18] subclause 9.1.10.4. Mapping of the measured quantity is defined as in [18] subclause 9.1.10.4.
<i>additionalPathsNeighbour</i>	This field specifies one or more additional detected path timing values for the neighbour cell, relative to the path timing used for determining the <i>rstd</i> value. If this field was requested but is not included, it means the UE did not detect any additional path timing values.
<i>nprsidNeighbour</i>	This field specifies the NPRS-ID of the neighbour cell for which the RSTDs are provided.
<i>carrierFreqOffsetNB-Neighbour</i>	This field specifies the offset of the NB-IoT channel number to EARFCN given by <i>earfcnNeighbour</i> as defined in TS 36.101 [21].

— *OTDOA-MeasQuality*

```
-- ASN1START
OTDOA-MeasQuality ::= SEQUENCE {
    error-Resolution      BIT STRING (SIZE (2)),
    error-Value           BIT STRING (SIZE (5)),
    error-NumSamples      BIT STRING (SIZE (3))          OPTIONAL,
    ...
}
-- ASN1STOP
```

<i>OTDOA-MeasQuality</i> field descriptions	
<i>error-Resolution</i>	This field specifies the resolution R used in <i>error-Value</i> field. The encoding on two bits is as follows:
'00'	5 meters
'01'	10 meters
'10'	20 meters
'11'	30 meters.

***OTDOA-MeasQuality* field descriptions**

error-Value

This field specifies the target device's best estimate of the uncertainty of the OTDOA (or TOA) measurement.

The encoding on five bits is as follows:

'00000'	0	to	(R*1-1) meters
'00001'	R*1	to	(R*2-1) meters
'00010'	R*2	to	(R*3-1) meters

...

'11111' R*31 meters or more;

where R is the resolution defined by *error-Resolution* field.

E.g., R=20 m corresponds to 0-19 m, 20-39 m,...,620+ m.

error-NumSamples

If the *error-Value* field provides the sample uncertainty of the OTDOA (or TOA) measurement, this field specifies how many measurements have been used by the target device to determine this (i.e., sample size). Following 3 bit encoding is used:

'000'	Not the baseline metric
'001'	5-9
'010'	10-14
'011'	15-24
'100'	25-34
'101'	35-44
'110'	45-54
'111'	55 or more.

In case of the value '000', the *error-Value* field contains the target device's best estimate of the uncertainty of the OTDOA (or TOA) measurement not based on the baseline metric. E.g., other measurements such as signal-to-noise-ratio or signal strength can be utilized to estimate the *error-Value*.

If this field is absent, the value of this field is '000'.

AdditionalPath

The IE *AdditionalPath* is used by the target device to provide information about additional paths in association to the RSTD measurements in the form of a relative time difference and a quality value. The additional path *relativeTimeDifference* is the detected path timing relative to the detected path timing used for the *rstd* value [17], and each additional path can be associated with a quality value *path-Quality*.

```
-- ASN1START
AdditionalPath-r14 ::= SEQUENCE {
    relativeTimeDifference-r14   INTEGER (-256..255),
    path-Quality-r14           OTDOA-MeasQuality
                                OPTIONAL,
}
-- ASN1STOP
```

***AdditionalPath* field descriptions**

relativeTimeDifference

This field specifies the additional detected path timing relative to the detected path timing used for the *rstd* value in units of 0.5 Ts, with Ts=1/(15000*2048) seconds. A positive value indicates that the particular path is later in time than the detected path used for RSTD; a negative value indicates that the particular path is earlier in time than the detected path used for RSTD.

path-Quality

This field specifies the target device's best estimate of the quality of the detected timing of the additional path.

6.5.1.6 OTDOA Location Information Request

OTDOA-RequestLocationInformation

The IE *OTDOA-RequestLocationInformation* is used by the location server to request OTDOA location measurements from a target device. Details of the required measurements (e.g. details of assistance data reference cell and neighbour cells) are conveyed in the *OTDOA-ProvideAssistanceData* IE in a separate Provide Assistance Data message.

```
-- ASN1START
```

```

OTDOA-RequestLocationInformation ::= SEQUENCE {
    assistanceAvailability      BOOLEAN,
    ...
    [[
        multipathRSTD-r14      ENUMERATED { requested }      OPTIONAL,      -- Need ON
        maxNoOfRSTDmeas-r14    INTEGER (1..32)           OPTIONAL,      -- Need ON
    ]]
}

-- ASN1STOP

```

OTDOA-RequestLocationInformation field descriptions

assistanceAvailability

This field indicates whether the target device may request additional OTDOA assistance data from the server. TRUE means allowed and FALSE means not allowed.

multipathRSTD

This field, if present, indicates that the target device is requested to report additional detected path timing information per RSTD reference and neighbour cell.

maxNoOfRSTDmeas

This field, if present, indicates the maximum number of *NeighbourMeasurementElement* fields (i.e., RSTD measurements) the target device can provide in *OTDOA-SignalMeasurementInformation*.

6.5.1.7 OTDOA Capability Information

– *OTDOA-ProvideCapabilities*

The IE *OTDOA-ProvideCapabilities* is used by the target device to indicate its capability to support OTDOA and to provide its OTDOA positioning capabilities to the location server.

```

-- ASN1START

OTDOA-ProvideCapabilities ::= SEQUENCE {
    otdoa-Mode      BIT STRING { ue-assisted          (0),
                                ue-assisted-NB-r14   (1) } (SIZE (1..8)),
    ...
    supportedBandListEUTRA      SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA      OPTIONAL,
    supportedBandListEUTRA-v9a0 SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA-v9a0
                                OPTIONAL,
    interFreqRSTDmeasurement-r10 ENUMERATED { supported }                  OPTIONAL,
    additionalNeighbourCellInfoList-r10 ENUMERATED { supported }                  OPTIONAL,
    prs-id-r14                 ENUMERATED { supported }                  OPTIONAL,
    tp-separation-via-muting-r14 ENUMERATED { supported }                  OPTIONAL,
    additional-prs-config-r14   ENUMERATED { supported }                  OPTIONAL,
    prs-based-tbs-r14          ENUMERATED { supported }                  OPTIONAL,
    additionalPathsReport-r14  ENUMERATED { supported }                  OPTIONAL,
    densePrsConfig-r14         ENUMERATED { supported }                  OPTIONAL,
    maxSupportedPrsBandwidth-r14 ENUMERATED { n6, n15, n25, n50, n75, n100, ... } OPTIONAL,
    prsOccGroup-r14            ENUMERATED { supported }                  OPTIONAL,
    prsFrequencyHopping-r14   ENUMERATED { supported }                  OPTIONAL,
    maxSupportedPrsConfigs-r14 ENUMERATED { c2, c3 }                  OPTIONAL,
    periodicalReporting-r14   ENUMERATED { supported }                  OPTIONAL,
    multiPrbNprs-r14          ENUMERATED { supported }                  OPTIONAL,
    idleStateForMeasurements-r14 ENUMERATED { required }                  OPTIONAL
}

maxBands INTEGER ::= 64

SupportedBandEUTRA ::= SEQUENCE {
    bandEUTRA             INTEGER (1..maxFBI)
}

SupportedBandEUTRA-v9a0 ::= SEQUENCE {
    bandEUTRA-v9a0        INTEGER (maxFBI-Plus1..maxFBI2)      OPTIONAL
}

maxFBI      ::= 64 -- Maximum value of frequency band indicator
maxFBI-Plus1 ::= 65 -- lowest value extended FBI range
maxFBI2     ::= 256 -- highest value extended FBI range

-- ASN1STOP

```

OTDOA-ProvideCapabilities field descriptions	
otdoa-Mode	This field specifies the OTDOA mode(s) supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular OTDOA mode is supported; a zero-value means not supported. A zero-value in all bit positions in the bit string means OTDOA positioning method is not supported by the target device. ue-assisted: Bit 0 indicates that the target device supports UE-assisted OTDOA and LTE PRS. ue-assisted-NB: Bit 1 indicates that the target device supports UE-assisted OTDOA and NB-IoT NPRS.
SupportedBandEUTRA	This field specifies the frequency bands for which the target device supports RSTD measurements. One entry corresponding to each supported E-UTRA band as defined in TS 36.101 [21]. In case the target device includes <i>bandEUTRA-v9a0</i> , the target device shall set the corresponding entry of <i>bandEUTRA</i> (i.e. without suffix) to <i>maxFBI</i> .
interFreqRSTDmeasurement	This field, if present, indicates that the target device supports inter-frequency RSTD measurements within and between the frequency bands indicated in <i>SupportedBandEUTRA</i> .
additionalNeighbourCellInfoList	This field, if present, indicates that the target device supports up to 3x24 <i>OTDOA-NeighbourCellInfoElement</i> in <i>OTDOA-NeighbourCellInfoList</i> in <i>OTDOA-ProvideAssistanceData</i> without any restriction for the <i>earfcn</i> in each <i>OTDOA-NeighbourCellInfoElement</i> as specified in subclause 6.5.1.2.
prs-id	This field, if present, indicates that the target device supports PRS generation based on the PRS-ID as specified in [16] and support for TP-ID in <i>OTDOA-ReferenceCellInfo</i> and <i>OTDOA-NeighbourCellInfoList</i> .
tp-separation-via-muting	This field, if present, indicates that the target device supports RSTD measurements for cells which have associated transmission points (e.g., Remote Radio Heads) within the cell coverage and where these associated transmission points have the same physical cell identity as the associated cell, and where these transmission points are identified via a different muting pattern. The field also indicates support for TP-ID in <i>OTDOA-ReferenceCellInfo</i> and <i>OTDOA-NeighbourCellInfoList</i> .
additional-prs-config	This field, if present, indicates that the target device supports additional PRS configurations. The additional PRS configuration in <i>PRS-Info</i> IE comprise: - support for <i>prs-ConfigurationIndex</i> > 2399; - support for <i>N_{PRS}</i> values in addition to 1, 2, 4 and 6 (<i>add-numDL-Frames in PRS-Info</i>); - support for muting bit string lengths > 16 bits.
prs-based-tbs	This field, if present, indicates that the target device supports RSTD measurements for PRS-only TPs.
additionalPathsReport	This field, if present, indicates that the target device supports reporting of timing information for additional detected paths for RSTD reference and each neighbour cell.
densePrsConfig	This field, if present, indicates that the target device supports a subset of the additional PRS configurations associated with capability <i>additional-prs-config</i> which comprises: - support for <i>prs-ConfigurationIndex</i> > 2404; - support for <i>N_{PRS}</i> values of 10, 20, 40, 80 and 160 (in addition to 1, 2, 4 and 6). In case <i>additional-prs-config</i> is present, this field is not present.
maxSupportedPrsBandwidth	This field, if present, indicates the maximum PRS bandwidth supported by the target device. Enumerated value <i>n6</i> corresponds to 6 resource blocks, <i>n15</i> to 15 resource blocks and so on. If this field is not present, the target device is assumed to support the PRS bandwidth associated with the target device type, which for LTE devices including Cat-M1/M2 is 100 resource blocks and for NB-IoT devices is 1 resource block.
prsOccGroup	This field, if present, indicates that the target device supports PRS occasion groups, which implies that each bit of a configured muting pattern applies per PRS occasion group.
prsFrequencyHopping	This field, if present, indicates that the target device supports PRS occasion frequency hopping, as specified in [16].
maxSupportedPrsConfigs	This field, if present, indicates that the target device supports multiple PRS configurations per cell. Enumerated value <i>c2</i> indicates support for up to 2 configurations; <i>c3</i> indicates support for up to 3 configurations.
periodicalReporting	This field, if present, indicates that the target device supports <i>periodicalReporting</i> of RSTD measurements. If this field is absent, the location server may assume that the target device does not support <i>periodicalReporting</i> in <i>CommonIEsRequestLocationInformation</i> .
multiPrbNprs	This field, if present, indicates that the target device supports NPRS configuration in more than one resource block (i.e., <i>maxCarrier</i> in <i>PRS-Info-NB</i> greater 1).
idleStateForMeasurements	This field, if present, indicates that the target device requires idle state to perform RSTD measurements.

Editor's Note: Whether the capability *multiPrbNprs* is needed or not is FFS.

6.5.1.8 OTDOA Capability Information Request

- *OTDOA-RequestCapabilities*

The IE *OTDOA-RequestCapabilities* is used by the location server to request the capability of the target device to support OTDOA and to request OTDOA positioning capabilities from a target device.

```
-- ASN1START
OTDOA-RequestCapabilities ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

6.5.1.9 OTDOA Error Elements

- *OTDOA-Error*

The IE *OTDOA-Error* is used by the location server or target device to provide OTDOA error reasons to the target device or location server, respectively.

```
-- ASN1START
OTDOA-Error ::= CHOICE {
    locationServerErrorCauses      OTDOA-LocationServerErrorCauses,
    targetDeviceErrorCauses        OTDOA-TargetDeviceErrorCauses,
    ...
}
-- ASN1STOP
```

- *OTDOA-LocationServerErrorCauses*

The IE *OTDOA-LocationServerErrorCauses* is used by the location server to provide OTDOA error reasons to the target device.

```
-- ASN1START
OTDOA-LocationServerErrorCauses ::= SEQUENCE {
    cause      ENUMERATED { undefined,
                           assistanceDataNotSupportedByServer,
                           assistanceDataSupportedButCurrentlyNotAvailableByServer,
                           ...
                           },
    ...
}
-- ASN1STOP
```

- *OTDOA-TargetDeviceErrorCauses*

The IE *OTDOA-TargetDeviceErrorCauses* is used by the target device to provide OTDOA error reasons to the location server.

```
-- ASN1START
OTDOA-TargetDeviceErrorCauses ::= SEQUENCE {
    cause      ENUMERATED { undefined,
                           assistance-data-missing,
                           unableToMeasureReferenceCell,
```

```

        unableToMeasureAnyNeighbourCell,
        attemptedButUnableToMeasureSomeNeighbourCells,
        ...
    },
    ...
}

-- ASN1STOP

```

6.5.2 A-GNSS Positioning

6.5.2.1 GNSS Assistance Data

- *A-GNSS-ProvideAssistanceData*

The IE *A-GNSS-ProvideAssistanceData* is used by the location server to provide assistance data to enable UE-based and UE-assisted A-GNSS. It may also be used to provide GNSS positioning specific error reasons.

```

-- ASN1START

A-GNSS-ProvideAssistanceData ::= SEQUENCE {
    gnss-CommonAssistData           GNSS-CommonAssistData
    gnss-GenericAssistData          GNSS-GenericAssistData
    gnss-Error                      A-GNSS-Error
    ...
}

-- ASN1STOP

```

- *GNSS-CommonAssistData*

The IE *GNSS-CommonAssistData* is used by the location server to provide assistance data which can be used for any GNSS (e.g., GPS, Galileo, GLONASS, BDS, etc.).

```

-- ASN1START

GNSS-CommonAssistData ::= SEQUENCE {
    gnss-ReferenceTime              GNSS-ReferenceTime
    gnss-ReferenceLocation          GNSS-ReferenceLocation
    gnss-IonosphericModel           GNSS-IonosphericModel
    gnss-EarthOrientationParameters GNSS-EarthOrientationParameters
    ...
}

-- ASN1STOP

```

- *GNSS-GenericAssistData*

The IE *GNSS-GenericAssistData* is used by the location server to provide assistance data for a specific GNSS (e.g., GPS, Galileo, GLONASS, BDS, etc.). The specific GNSS for which the provided assistance data are applicable is indicated by the IE *GNSS-ID* and (if applicable) by the IE *SBAS-ID*. Assistance for up to 16 GNSSs can be provided.

```

-- ASN1START

GNSS-GenericAssistData ::= SEQUENCE (SIZE (1..16)) OF GNSS-GenericAssistDataElement

GNSS-GenericAssistDataElement ::= SEQUENCE {
    gnss-ID                         GNSS-ID,
    sbas-ID                         SBAS-ID
    gnss-TimeModels                  GNSS-TimeModelList
    gnss-DifferentialCorrections    GNSS-DifferentialCorrections
    gnss-NavigationModel             GNSS-NavigationModel
    gnss-RealTimeIntegrity           GNSS-RealTimeIntegrity
    gnss-DataBitAssistance           GNSS-DataBitAssistance
    gnss-AcquisitionAssistance      GNSS-AcquisitionAssistance
    gnss-Almanac                      GNSS-Almanac
    gnss-UTC-Model                   GNSS-UTC-Model
    ...
}

-- ASN1STOP

```

```

gnss-AuxiliaryInformation      GNSS-AuxiliaryInformation      OPTIONAL,   -- Need ON
...
[ [
    bds-DifferentialCorrections-r12      BDS-DifferentialCorrections-r12 OPTIONAL,   -- Cond GNSS-ID-BDS
    bds-GridModel-r12                    BDS-GridModelParameter-r12  OPTIONAL,   -- Cond GNSS-ID-BDS
  ]
}

-- ASN1STOP

```

Conditional presence	Explanation
GNSS-ID-SBAS	The field is mandatory present if the <i>GNSS-ID</i> = <i>sbas</i> ; otherwise it is not present.
GNSS-ID-BDS	The field may be present if the <i>GNSS-ID</i> = <i>bds</i> ; otherwise it is not present.

6.5.2.2 GNSS Assistance Data Elements

— GNSS-ReferenceTime

The IE *GNSS-ReferenceTime* is used by the location server to provide the GNSS specific system time with uncertainty and the relationship between GNSS system time and network air-interface timing of the eNodeB/NodeB/BTS transmission in the reference cell.

If the IE *networkTime* is present, the IEs *gnss-SystemTime* and *networkTime* provide a valid relationship between GNSS system time and air-interface network time, as seen at the approximate location of the target device, i.e. the propagation delay from the the eNodeB/NodeB/BTS to the target device shall be compensated for by the location server. Depending on implementation, the relation between GNSS system time and air-interface network time may have varying accuracy. The uncertainty of this timing relation is provided in the IE *referenceTimeUnc*. If the propagation delay from the eNodeB/NodeB/BTS to the target device is not accurately known, the location server shall use the best available approximation of the propagation delay and take the corresponding delay uncertainty into account in the calculation of the IE *referenceTimeUnc*.

If the IE *networkTime* is not present, the IE *gnssSystemTime* is an estimate of current GNSS system time at time of reception of the IE *GNSS-ReferenceTime* by the target device. The location server should achieve an accuracy of +/- 3 seconds for this estimate including allowing for the transmission delay between the location server and the target device. Note that the target device should further compensate *gnss-SystemTime* for the time between the reception of *GNSS-ReferenceTime* and the time when the *gnss-SystemTime* is used.

The location server shall provide a value for the *gnss-TimeID* only for GNSSs supported by the target device.

The IE *GNSS-ReferenceTimeForOneCell* can be provided multiple times (up to 16) to provide fine time assistance for several (neighbour) cells.

```

-- ASN1START

GNSS-ReferenceTime ::= SEQUENCE {
  gnss-SystemTime          GNSS-SystemTime,
  referenceTimeUnc         INTEGER (0..127)           OPTIONAL,   -- Cond noFTA
  gnss-ReferenceTimeForCells SEQUENCE (SIZE (1..16)) OF
    GNSS-ReferenceTimeForOneCell OPTIONAL,   -- Need ON
}
...
GNSS-ReferenceTimeForOneCell ::= SEQUENCE {
  networkTime               NetworkTime,
  referenceTimeUnc          INTEGER (0..127),
  bsAlign                   ENUMERATED {true}   OPTIONAL,
}
...
-- ASN1STOP

```

Conditional presence	Explanation
<i>noFTA</i>	The field may be present if <i>gnss-ReferenceTimeForCells</i> is absent; otherwise it is not present.

GNSS-ReferenceTime field descriptions	
gnss-SystemTime	This field provides the specific GNSS system time.
networkTime	This field specifies the cellular network time at the epoch corresponding to <i>gnss-SystemTime</i> .
referenceTimeUnc	This field provides the accuracy of the relation between <i>gnssSystemTime</i> and <i>networkTime</i> time if IE <i>networkTime</i> is provided. When IE <i>networkTime</i> is not provided, this field can be included to provide the accuracy of the provided <i>gnssSystemTime</i> . If GNSS TOD is the given GNSS time, then the true GNSS time, corresponding to the provided network time as observed at the target device location, lies in the interval [GNSS TOD - <i>referenceTimeUnc</i> , GNSS TOD + <i>referenceTimeUnc</i>]. The uncertainty <i>r</i> , expressed in microseconds, is mapped to a number <i>K</i> , with the following formula: $r = C^*((1+x)^K - 1)$ with C = 0.5 and x = 0.14. To encode any higher value of uncertainty than that corresponding in the above formula to K=127, the same value, K=127, shall also be used. The uncertainty is then coded on 7 bits, as the binary encoding of K. Example values for the <i>referenceTimeUnc</i> Format: see table K to uncertainty relation below.
bsAlign	This flag, if present, indicates that the transmission timings of all cells sharing, depending on the RAT, the same carrier frequency and Tracking Area/Location Area/Routing Area as the cell indicated, are frame aligned. This information allows the target device to derive the GNSS - cellular time relation for any of these cells based on the timing relation information provided in GNSS-ReferenceTime. The flag should be set consistently in all these cells. This flag does not guarantee SFN alignment.

K to uncertainty relation

Value of K	Value of uncertainty
0	0 nanoseconds
1	70 nanoseconds
2	149.8 nanoseconds
-	-
50	349.62 microseconds
-	-
127	≥ 8.43 seconds

— GNSS-SystemTime

```
-- ASN1START
GNSS-SystemTime ::= SEQUENCE {
    gnss-TimeID                               GNSS-ID,
    gnss-DayNumber                            INTEGER (0..32767),
    gnss-TimeOfDay                            INTEGER (0..86399),
    gnss-TimeOfDayFrac-msec                  INTEGER (0..999)      OPTIONAL, -- Need ON
    notificationOfLeapSecond                BIT STRING (SIZE(2))  OPTIONAL, -- Cond gnss-TimeID-glonass
    gps-TOW-Assist                           GPS-TOW-Assist        OPTIONAL, -- Cond gnss-TimeID-gps
    ...
}
-- ASN1STOP
```

Conditional presence	Explanation
gnss-TimeID-glonass	The field may be present if <i>gnss-TimeID</i> =`glonass'; otherwise it is not present.
gnss-TimeID-gps	The field may be present if <i>gnss-TimeID</i> =`gps'; otherwise it is not present.

GNSS-SystemTime field descriptions	
gnss-TimeID	This field specifies the GNSS for which the <i>GNSS-SystemTime</i> is provided.

GNSS-SystemTime field descriptions

gnss-DayNumber

This field specifies the sequential number of days (with day count starting at 0) from the origin of the GNSS System Time as follows:

- GPS, QZSS, SBAS – Days from January 6th 1980 00:00:00 UTC (USNO);
- Galileo – Days from Galileo System Time (GST) start epoch, defined as 13 seconds before midnight between 21st August and 22nd August 1999; i.e., GST was equal to 13 seconds at August 22nd 1999 00:00:00 UTC;
- GLONASS – Days from December 31st 1995 21:00:00 UTC (SU), which is local UTC Moscow January 1st 1996 00:00:00, defined as UTC(SU) + 3 hours in [9];
- BDS – Days from January 1st 2006 00:00:00 UTC (NTSC).

gnss-TimeOfDay

This field specifies the integer number of seconds from the GNSS day change.

gnss-TimeOfDayFrac-msec

This field specifies the fractional part of the *gnssTimeOfDay* field in 1-milli-seconds resolution. The total GNSS TOD is *gnss-TimeOfDay* + *gnssTimeOfDayFrac-msec*.

notificationOfLeapSecond

This field specifies the notification of forthcoming leap second correction, as defined by parameter KP in [9, Table 4.7].

gps-TOW-Assist

This field contains several fields in the Telemetry (TLM) Word and Handover Word (HOW) that are currently being broadcast by the respective GPS satellites. Combining this information with GPS TOW enables the target device to know the entire 1.2-second (60-bit) pattern of TLM and HOW that is transmitted at the start of each six-second NAV subframe by the particular GPS satellite.

GPS-TOW-Assist

```
-- ASN1START

GPS-TOW-Assist ::= SEQUENCE (SIZE(1..64)) OF GPS-TOW-AssistElement

GPS-TOW-AssistElement ::= SEQUENCE {
    satelliteID      INTEGER (1..64),
    tlmWord          INTEGER (0..16383),
    antiSpoof        INTEGER (0..1),
    alert            INTEGER (0..1),
    tlmRsvdBits     INTEGER (0..3),
    ...
}

-- ASN1STOP
```

GPS-TOW-Assist field descriptions

satelliteID

This field identifies the satellite for which the *GPS-TOW-Assist* is applicable. This field is identical to the GPS PRN Signal No. defined in [4].

tlmWord

This field contains a 14-bit value representing the Telemetry Message (TLM) being broadcast by the GPS satellite identified by the particular *satelliteID*, with the MSB occurring first in the satellite transmission, as defined in [4].

antiSpoof

This field contains the Anti-Spoof flag that is being broadcast by the GPS satellite identified by *satelliteID*, as defined in [4].

alert

This field contains the Alert flag that is being broadcast by the GPS satellite identified by *satelliteID*, as defined in [4].

tlmRsvdBits

This field contains the two reserved bits in the TLM Word being broadcast by the GPS satellite identified by *satelliteID*, with the MSB occurring first in the satellite transmission, as defined in [4].

NetworkTime

```
-- ASN1START

NetworkTime ::= SEQUENCE {
    secondsFromFrameStructureStart      INTEGER(0..12533),
    fractionalSecondsFromFrameStructureStart  INTEGER(0..3999999),
    frameDrift                          INTEGER (-64..63)   OPTIONAL, -- Cond GNSSsynch
    cellID      CHOICE {
        eUTRA      SEQUENCE {
```

```

physCellId          INTEGER (0..503),
cellGlobalIdEUTRA CellGlobalIdEUTRA-AndUTRA   OPTIONAL,    -- Need ON
earfcn             ARFCN-ValueEUTRA,
...
[[ earfcn-v9a0      ARFCN-ValueEUTRA-v9a0 OPTIONAL -- Cond EARFCN-max
]]
},
uTRA    SEQUENCE {
mode    CHOICE {
fdd     SEQUENCE {
primary-CPICH-Info  INTEGER (0..511),
...
},
tdd     SEQUENCE {
cellParameters      INTEGER (0..127),
...
},
},
cellGlobalIdUTRA  CellGlobalIdEUTRA-AndUTRA   OPTIONAL,    -- Need ON
uarfcn             ARFCN-ValueUTRA,
...
},
gSM    SEQUENCE {
bcchCarrier        INTEGER (0..1023),
bsic               INTEGER (0..63),
cellGlobalIdGERAN CellGlobalIdGERAN           OPTIONAL,    -- Need ON
...
},
...
nBIoT-r14  SEQUENCE {
nbPhysCellId-r14  INTEGER (0..503),
nbCellGlobalId-r14 ECGI                  OPTIONAL,    -- Need ON
nbCarrierFreq-r14 CarrierFreq-NB-r14,
...
},
}
...
}

-- ASN1STOP

```

Conditional presence	Explanation
<i>EARFCN-max</i>	The field is mandatory present if the corresponding <i>earfcn</i> (i.e. without suffix) is set to <i>maxEARFCN</i> . Otherwise the field is not present.
<i>GNSSsynch</i>	The field is present and set to 0 if <i>NetworkTime</i> is synchronized to <i>gnss-SystemTime</i> ; otherwise the field is optionally present, need OR.

<i>NetworkTime</i> field descriptions	
<i>secondsFromFrameStructureStart</i>	
This field specifies the number of seconds from the beginning of the longest frame structure in the corresponding air interface.	
In case of E-UTRA, the SFN cycle length is 10.24 seconds.	
In case of UTRA, the SFN cycle length is 40.96 seconds.	
In case of GSM, the hyperframe length is 12533.76 seconds.	
In case of NB-IoT, the Hyper-SFN cycle lengths is 10485.76 seconds.	
<i>fractionalSecondsFromFrameStructureStart</i>	
This field specifies the fractional part of the <i>secondsFromFrameStructureStart</i> in 250 ns resolution.	
The total time since the particular frame structure start is <i>secondsFromFrameStructureStart</i> + <i>fractionalSecondsFromFrameStructureStart</i>	
<i>frameDrift</i>	
This field specifies the drift rate of the GNSS-network time relation with scale factor 2^{-30} seconds/second, in the range from -5.9605e-8 to +5.8673e-8 sec/sec.	
<i>cellID</i>	
This field specifies the cell for which the GNSS–network time relation is provided.	
<i>physCellId</i>	
This field specifies the physical cell identity of the reference cell (E-UTRA), as defined in [12], for which the GNSS network time relation is provided.	
<i>cellGlobalIdEUTRA</i>	
This field specifies the Evolved Cell Global Identifier (ECGI), the globally unique identity of a cell in E-UTRA, of the reference cell for the GNSS-network time relation, as defined in [12].	
<i>earfcn</i>	
This field specifies E-ARFCN of the reference cell for the GNSS-network time relation (E-UTRA). In case the server includes <i>earfcn-v9a0</i> , the server shall set the corresponding <i>earfcn</i> (i.e. without suffix) to <i>maxEARFCN</i> .	
<i>primary-CPICH-Info</i>	
This field specifies the physical cell identity of the reference cell (UTRA) for the GNSS-network time relation, as defined in [13].	
<i>cellParameters</i>	
This field specifies the physical cell identity of the reference cell (UTRA) for the GNSS-network time relation, as defined in [13].	
<i>cellGlobalIdUTRA</i>	
The filed specifies the global UTRAN Cell Identifier, the globally unique identity of a cell in UTRA, of the reference cell for the GNSS-network time relation, as defined in [13].	
<i>uarfcn</i>	
This field specifies ARFCN of the reference cell for the GNSS-network time relation (UTRA).	
<i>bccCarrier</i>	
This field specifies the absolute GSM RF channel number of the BCCH of the reference base station (GERAN) for the GNSS-network time relation, as defined in [14].	
<i>bsic</i>	
This field specifies the Base Station Identity Code of the reference base station (GERAN) for the GNSS-network time relation, as defined in [14].	
<i>cellGlobalIdGERAN</i>	
This field specifies the Cell Global Identification (CGI), the globally unique identity of a cell in GERAN, of the reference base station for the GNSS-network time relation.	
<i>nbPhysCellId</i>	
This field specifies the narrowband physical layer cell identity of the NB-IoT reference cell, as defined in [12], for which the GNSS network time relation is provided.	
<i>nbCellGlobalId</i>	
This field specifies the global cell identifier of the NB-IoT reference cell for which the GNSS-network time relation is provided, as defined in [12].	
<i>nbCarrierFreq</i>	
This field specifies the carrier frequency of the NB-IoT reference cell for which the GNSS-network time relation is provided.	

– *GNSS-ReferenceLocation*

The IE *GNSS-ReferenceLocation* is used by the location server to provide the target device with a-priori knowledge of its location in order to improve GNSS receiver performance. The IE *GNSS-ReferenceLocation* is provided in WGS-84 reference system.

```
-- ASN1START
GNSS-ReferenceLocation ::= SEQUENCE {
    threeDlocation          EllipsoidPointWithAltitudeAndUncertaintyEllipsoid,
```

```

}
...
-- ASN1STOP

```

— *GNSS-IonosphericModel*

The IE *GNSS-IonosphericModel* is used by the location server to provide parameters to model the propagation delay of the GNSS signals through the ionosphere. Proper use of these fields allows a single-frequency GNSS receiver to remove parts of the ionospheric delay from the pseudorange measurements. Two Ionospheric Models are supported: The Klobuchar model as defined in [4], and the NeQuick model as defined in [8].

```

-- ASN1START

GNSS-IonosphericModel ::= SEQUENCE {
    klobucharModel          KlobucharModelParameter      OPTIONAL,   -- Need ON
    neQuickModel             NeQuickModelParameter       OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP

```

— *KlobucharModelParameter*

```

-- ASN1START

KlobucharModelParameter ::= SEQUENCE {
    dataID           BIT STRING (SIZE (2)),
    alfa0            INTEGER (-128..127),
    alfa1            INTEGER (-128..127),
    alfa2            INTEGER (-128..127),
    alfa3            INTEGER (-128..127),
    beta0            INTEGER (-128..127),
    beta1            INTEGER (-128..127),
    beta2            INTEGER (-128..127),
    beta3            INTEGER (-128..127),
    ...
}

-- ASN1STOP

```

KlobucharModelParameter field descriptions

dataID

When *dataID* has the value ‘11’ it indicates that the parameters have been generated by QZSS, and the parameters have been specialized and are applicable within the area defined in [7]. When *dataID* has the value ‘01’ it indicates that the parameters have been generated by BDS, and UE shall use these parameters according to the description given in 5.2.4.7 in [23]. When *dataID* has the value ‘00’ it indicates the parameters are applicable worldwide [4,7]. All other values for *dataID* are reserved.

alpha0

This field specifies the α_0 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{-30} seconds.

alpha1

This field specifies the α_1 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{-27} seconds/semi-circle.

alpha2

This field specifies the α_2 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{-24} seconds/semi-circle².

alpha3

This field specifies the α_3 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{-24} seconds/semi-circle³.

beta0

This field specifies the β_0 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{11} seconds.

beta1

This field specifies the β_1 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{14} seconds/semi-circle.

KlobucharModelParameter field descriptions

beta2

This field specifies the β_2 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{16} seconds/semi-circle².

beta3

This field specifies the β_3 parameter of the Klobuchar model, as specified in [4], [23].
Scale factor 2^{16} seconds/semi-circle³.

- **NeQuickModelParameter**

```
-- ASN1START
```

```
NeQuickModelParameter ::= SEQUENCE {
    ai0           INTEGER (0..2047),
    ai1           INTEGER (-1024..1023),
    ai2           INTEGER (-8192..8191),
    ionoStormFlag1 INTEGER (0..1)      OPTIONAL,    -- Need OP
    ionoStormFlag2 INTEGER (0..1)      OPTIONAL,    -- Need OP
    ionoStormFlag3 INTEGER (0..1)      OPTIONAL,    -- Need OP
    ionoStormFlag4 INTEGER (0..1)      OPTIONAL,    -- Need OP
    ionoStormFlag5 INTEGER (0..1)      OPTIONAL,    -- Need OP
    ...
}
```

```
-- ASN1STOP
```

NeQuickModelParameter field descriptions

ai0

Effective Ionisation Level 1st order parameter.
Scale factor 2^{-2} Solar Flux Units (SFUs), [8] section 5.1.6.

ai1

Effective Ionisation Level 2nd order parameter.
Scale factor 2^{-8} Solar Flux Units/degree, [8] section 5.1.6.

ai2

Effective Ionisation Level 3rd order parameter.
Scale factor 2^{-15} Solar Flux Units/degree², [8] section 5.1.6.

ionoStormFlag1, ionoStormFlag2, ionoStormFlag3, ionoStormFlag4, ionoStormFlag5

These fields specify the ionosphere disturbance flags (1,...,5) for five different regions as described in [8], section 5.1.6. If the ionosphere disturbance flag for a region is not present the target device shall treat the ionosphere disturbance condition as unknown.

- **GNSS-EarthOrientationParameters**

The IE *GNSS-EarthOrientationParameters* is used by the location server to provide parameters to construct the ECEF and ECI coordinate transformation as defined in [4]. The IE *GNSS-EarthOrientationParameters* indicates the relationship between the Earth's rotational axis and WGS-84 reference system.

```
-- ASN1START
```

```
GNSS-EarthOrientationParameters ::= SEQUENCE {
    teop          INTEGER (0..65535),
    pmX          INTEGER (-1048576..1048575),
    pmXdot       INTEGER (-16384..16383),
    pmY          INTEGER (-1048576..1048575),
    pmYdot       INTEGER (-16384..16383),
    deltaUT1     INTEGER (-1073741824..1073741823),
    deltaUT1dot  INTEGER (-262144..262143),
    ...
}
```

```
-- ASN1STOP
```

GNSS-EarthOrientationParameters field descriptions

teop

This field specifies the EOP data reference time in seconds, as specified in [4].
Scale factor 2^4 seconds.

<i>GNSS-EarthOrientationParameters</i> field descriptions	
<i>pmX</i>	This field specifies the X-axis polar motion value at reference time in arc-seconds, as specified in [4]. Scale factor 2^{-20} arc-seconds.
<i>pmXdot</i>	This field specifies the X-axis polar motion drift at reference time in arc-seconds/day, as specified in [4]. Scale factor 2^{-21} arc-seconds/day.
<i>pmY</i>	This field specifies the Y-axis polar motion value at reference time in arc-seconds, as specified in [4]. Scale factor 2^{-20} arc-seconds.
<i>pmYdot</i>	This field specifies the Y-axis polar motion drift at reference time in arc-seconds/day, as specified in [4]. Scale factor 2^{-21} arc-seconds/day.
<i>deltaUT1</i>	This field specifies the UT1-UTC difference at reference time in seconds, as specified in [4]. Scale factor 2^{-24} seconds.
<i>deltaUT1dot</i>	This field specifies the Rate of UT1-UTC difference at reference time in seconds/day, as specified in [4]. Scale factor 2^{-25} seconds/day.

— *GNSS-TimeModelList*

The IE *GNSS-TimeModelList* is used by the location server to provide the GNSS-GNSS system time offset between the GNSS system time indicated by IE *GNSS-ID* in IE *GNSS-GenericAssistDataElement* to the GNSS system time indicated by IE *gnss-TO-ID*. Several *GNSS-TimeModelElement* IEs can be included with different *gnss-TO-ID* fields.

```
-- ASN1START

GNSS-TimeModelList ::= SEQUENCE (SIZE (1..15)) OF GNSS-TimeModelElement

GNSS-TimeModelElement ::= SEQUENCE {
    gnss-TimeModelRefTime      INTEGER (0..65535),
    tA0                         INTEGER (-67108864..67108863),
    tA1                         INTEGER (-4096..4095)           OPTIONAL,   -- Need ON
    tA2                         INTEGER (-64..63)            OPTIONAL,   -- Need ON
    gnss-TO-ID                  INTEGER (1..15),
    weekNumber                  INTEGER (0..8191)           OPTIONAL,   -- Need ON
    deltaT                      INTEGER (-128..127)          OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```

<i>GNSS-TimeModelElement</i> field descriptions	
<i>gnss-TimeModelRefTime</i>	This field specifies the reference time of week for <i>GNSS-TimeModelElement</i> and it is given in GNSS specific system time. Scale factor 2^4 seconds.
<i>tA0</i>	This field specifies the bias coefficient of the <i>GNSS-TimeModelElement</i> . Scale factor 2^{-35} seconds.
<i>tA1</i>	This field specifies the drift coefficient of the <i>GNSS-TimeModelElement</i> . Scale factor of 2^{-51} seconds/second.
<i>tA2</i>	This field specifies the drift rate correction coefficient of the <i>GNSS-TimeModelElement</i> . Scale factor of 2^{-68} seconds/second ² .
<i>gnss-TO-ID</i>	This field specifies the GNSS system time of the GNSS for which the <i>GNSS-TimeModelElement</i> is applicable. <i>GNSS-TimeModelElement</i> contains parameters to convert GNSS system time from the system indicated by <i>GNSS-ID</i> to GNSS system time indicated by <i>gnss-TO-ID</i> . The conversion is defined in [4,5,6]. See table of <i>gnss-TO-ID</i> to Indication relation below.
<i>weekNumber</i>	This field specifies the reference week of the <i>GNSS-TimeModelElement</i> given in GNSS specific system time. Scale factor 1 week.

GNSS-TimeModelElement field descriptions

deltaT

This field specifies the integer number of seconds of the GNSS-GNSS time offset provided in the GNSS-TimeModelElement.
Scale factor 1 second.

gnss-TO-ID to Indication relation

Value of gnss-TO-ID	Indication
1	GPS
2	Galileo
3	QZSS
4	GLONASS
5	BDS
6-15	reserved

— GNSS-DifferentialCorrections

The IE *GNSS-DifferentialCorrections* is used by the location server to provide differential GNSS corrections to the target device for a specific GNSS. Differential corrections can be provided for up to 3 signals per GNSS.

```
-- ASN1START

GNSS-DifferentialCorrections ::= SEQUENCE {
    dgnss-RefTime      INTEGER (0..3599),
    dgnss-SgnTypeList  DGNSS-SgnTypeList,
    ...
}

DGNSS-SgnTypeList ::= SEQUENCE (SIZE (1..3)) OF DGNSS-SgnTypeElement

DGNSS-SgnTypeElement ::= SEQUENCE {
    gnss-SignalID      GNSS-SignalID,
    gnss-StatusHealth   INTEGER (0..7),
    dgnss-SatList       DGNSS-SatList,
    ...
}

DGNSS-SatList ::= SEQUENCE (SIZE (1..64)) OF DGNSS-CorrectionsElement

DGNSS-CorrectionsElement ::= SEQUENCE {
    svID                SV-ID,
    iod                 BIT STRING (SIZE(11)),
    udre                INTEGER (0..3),
    pseudoRangeCor     INTEGER (-2047..2047),
    rangeRateCor       INTEGER (-127..127),
    udreGrowthRate     INTEGER (0..7)           OPTIONAL, -- Need ON
    udreValidityTime   INTEGER (0..7)           OPTIONAL, -- Need ON
    ...
}

-- ASN1STOP
```

GNSS-DifferentialCorrections field descriptions

dgnss-RefTime

This field specifies the time for which the DGNSS corrections are valid, modulo 1 hour. *dgnss-RefTime* is given in GNSS specific system time.
Scale factor 1-second.

dgnss-SgnTypeList

This list includes differential correction data for different GNSS signal types, identified by *GNSS-SignalID*.

<i>GNSS-DifferentialCorrections</i> field descriptions	
<i>gnss-StatusHealth</i>	<p>This field specifies the status of the differential corrections. The values of this field and their respective meanings are defined as in table <i>gnss-StatusHealth</i> Value to Indication relation below.</p> <p>The first six values in this field indicate valid differential corrections. When using the values described below, the "UDRE Scale Factor" value is applied to the UDRE values contained in the element. The purpose is to indicate an estimate in the amount of error in the corrections.</p> <p>The value "110" indicates that the source of the differential corrections (e.g., reference station or external DGNSS network) is currently not being monitored. The value "111" indicates that the corrections provided by the source are invalid, as judged by the source.</p>
<i>dgnss-SatList</i>	This list includes differential correction data for different GNSS satellites, identified by <i>SV-ID</i> .
<i>iod</i>	This field specifies the Issue of Data field which contains the identity for the <i>GNSS-NavigationModel</i> .
<i>udre</i>	<p>This field provides an estimate of the uncertainty ($1-\sigma$) in the corrections for the particular satellite. The value in this field shall be multiplied by the UDRE Scale Factor in the <i>gnss-StatusHealth</i> field to determine the final UDRE estimate for the particular satellite. The meanings of the values for this field are shown in the table <i>udre</i> Value to Indication relation below.</p> <p><i>pseudoRangeCor</i></p> <p>This field specifies the correction to the pseudorange for the particular satellite at <i>dgnss-RefTime</i>, t_0. The value of this field is given in meters and the scale factor is 0.32 meters in the range of ± 655.04 meters. The method of calculating this field is described in [11].</p> <p>If the location server has received a request for GNSS assistance data from a target device which included a request for the GNSS Navigation Model and DGNSS, the location server shall determine, for each satellite, if the navigation model stored by the target device is still suitable for use with DGNSS corrections and if so and if DGNSS corrections are supported the location server should send DGNSS corrections without including the GNSS Navigation Model.</p> <p>The <i>iod</i> value sent for a satellite shall always be the IOD value that corresponds to the navigation model for which the pseudo-range corrections are applicable.</p> <p>The target device shall only use the <i>pseudoRangeCor</i> value when the IOD value received matches its available navigation model.</p> <p>Pseudo-range corrections are provided with respect to GNSS specific geodetic datum (e.g., PZ-90.02 if <i>GNSS-ID</i> indicates GLONASS).</p> <p>Scale factor 0.32 meters.</p> <p><i>rangeRateCor</i></p> <p>This field specifies the rate-of-change of the pseudorange correction for the particular satellite, using the satellite ephemeris and clock corrections identified by the <i>iod</i> field. The value of this field is given in meters per second and the resolution is 0.032 meters/sec in the range of ± 4.064 meters/sec. For some time $t_1 > t_0$, the corrections for <i>iod</i> are estimated by</p> $\text{PRC}(t_1, \text{IOD}) = \text{PRC}(t_0, \text{IOD}) + \text{RRC}(t_0, \text{IOD}) \cdot (t_1 - t_0),$ <p>and the target device uses this to correct the pseudorange it measures at t_1, $\text{PR}_m(t_1, \text{IOD})$, by</p> $\text{PR}(t_1, \text{IOD}) = \text{PR}_m(t_1, \text{IOD}) + \text{PRC}(t_1, \text{IOD}).$ <p>The location server shall always send the RRC value that corresponds to the PRC value that it sends. The target device shall only use the RRC value when the <i>iod</i> value received matches its available navigation model.</p> <p>Scale factor 0.032 meters/second.</p> <p><i>udreGrowthRate</i></p> <p>This field provides an estimate of the growth rate of uncertainty ($1-\sigma$) in the corrections for the particular satellite identified by <i>SV-ID</i>. The estimated UDRE at time value specified in the <i>udreValidityTime</i> t_1 is calculated as follows:</p> $\text{UDRE}(t_0+t_1) = \text{UDRE}(t_0) \times \text{udreGrowthRate},$ <p>where t_0 is the DGNSS Reference Time <i>dgnss-RefTime</i> for which the corrections are valid, t_1 is the <i>udreValidityTime</i> field, $\text{UDRE}(t_0)$ is the value of the <i>udre</i> field, and <i>udreGrowthRate</i> field is the factor as shown in the table Value of <i>udreGrowthRate</i> to Indication relation below.</p> <p><i>udreValidityTime</i></p> <p>This field specifies the time when the <i>udreGrowthRate</i> field applies and is included if <i>udreGrowthRate</i> is included. The meaning of the values for this field is as shown in the table Value of <i>udreValidityTime</i> to Indication relation below.</p>

***gnss-StatusHealth* Value to Indication relation**

<i>gnss-StatusHealth Value</i>	Indication
000	UDRE Scale Factor = 1.0
001	UDRE Scale Factor = 0.75
010	UDRE Scale Factor = 0.5
011	UDRE Scale Factor = 0.3
100	UDRE Scale Factor = 0.2
101	UDRE Scale Factor = 0.1
110	Reference Station Transmission Not Monitored

111	Data is invalid - disregard
-----	-----------------------------

udre Value to Indication relation

<i>udre Value</i>	<i>Indication</i>
00	UDRE \leq 1.0 m
01	1.0 m < UDRE \leq 4.0 m
10	4.0 m < UDRE \leq 8.0 m
11	8.0 m < UDRE

Value of udreGrowthRate to Indication relation

<i>Value of udreGrowthRate</i>	<i>Indication</i>
000	1.5
001	2
010	4
011	6
100	8
101	10
110	12
111	16

Value of udreValidityTime to Indication relation

<i>Value of udreValidityTime</i>	<i>Indication [seconds]</i>
000	20
001	40
010	80
011	160
100	320
101	640
110	1280
111	2560

– *GNSS-NavigationModel*

The IE *GNSS-NavigationModel* is used by the location server to provide precise navigation data to the GNSS capable target device. In response to a request from a target device for GNSS Assistance Data, the location server shall determine whether to send the navigation model for a particular satellite to a target device based upon factors like the T-Toe limit specified by the target device and any request from the target device for DGNSS (see also *GNSS-DifferentialCorrections*). GNSS Orbit Model can be given in Keplerian parameters or as state vector in Earth-Centered Earth-Fixed coordinates, dependent on the *GNSS-ID* and the target device capabilities. The meaning of these parameters is defined in relevant ICDs of the particular GNSS and GNSS specific interpretations apply. For example, GPS and QZSS use the same model parameters but some parameters have a different interpretation [7].

```
-- ASN1START

GNSS-NavigationModel ::= SEQUENCE {
    nonBroadcastIndFlag      INTEGER (0..1),
    gnss-SatelliteList       GNSS-NavModelSatelliteList,
    ...
}

GNSS-NavModelSatelliteList ::= SEQUENCE (SIZE(1..64)) OF GNSS-NavModelSatelliteElement

GNSS-NavModelSatelliteElement ::= SEQUENCE {
    svID                  SV-ID,
    svHealth               BIT STRING (SIZE(8)),
    iod                   BIT STRING (SIZE(11)),
    gnss-ClockModel        GNSS-ClockModel,
    gnss-OrbitModel         GNSS-OrbitModel,
```

```

    ...
    [ [ svHealthExt-v1240 BIT STRING (SIZE(4)) ] ]
}

GNSS-ClockModel ::= CHOICE {
    standardClockModelList StandardClockModelList, -- Model-1
    nav-ClockModel          NAV-ClockModel,        -- Model-2
    cnav-ClockModel          CNAV-ClockModel,       -- Model-3
    glonass-ClockModel       GLONASS-ClockModel,     -- Model-4
    sbas-ClockModel          SBAS-ClockModel,       -- Model-5
    ...
    bds-ClockModel-r12      BDS-ClockModel-r12      -- Model-6
}

GNSS-OrbitModel ::= CHOICE {
    keplerianSet             NavModelKeplerianSet,   -- Model-1
    nav-KeplerianSet          NavModelNAV-KeplerianSet, -- Model-2
    cnav-KeplerianSet         NavModelCNAV-KeplerianSet, -- Model-3
    glonass-ECEF              NavModel-GLONASS-ECEF,     -- Model-4
    sbas-ECEF                NavModel-SBAS-ECEF,       -- Model-5
    ...
    bds-KeplerianSet-r12    NavModel-BDS-KeplerianSet-r12 -- Model-6
}

-- ASN1STOP

```

GNSS-NavigationModel field descriptions

nonBroadcastIndFlag

This field indicates if the *GNSS-NavigationModel* elements are not derived from satellite broadcast data or are given in a format not native to the GNSS. A value of 0 means the *GNSS-NavigationModel* data elements correspond to GNSS satellite broadcasted data; a value of 1 means the *GNSS-NavigationModel* data elements are not derived from satellite broadcast.

gnss-SatelliteList

This list provides ephemeris and clock corrections for GNSS satellites indicated by *SV-ID*.

svHealth

This field specifies the satellite's current health. The health values are GNSS system specific. The interpretation of *svHealth* depends on the *GNSS-ID* and is as shown in table GNSS to *svHealth* Bit String(8) relation below.

iod

This field specifies the Issue of Data and contains the identity for GNSS Navigation Model.

In case of broadcasted GPS NAV ephemeris, the *iod* contains the IODC as described in [4].

In case of broadcasted Modernized GPS ephemeris, the *iod* contains the 11-bit parameter *t_{oe}* as defined in [4, Table 30-II] [6, Table 3.5-1].

In case of broadcasted SBAS ephemeris, the *iod* contains the 8 bits Issue of Data as defined in [10] Message Type 9.

In case of broadcasted QZSS QZS-L1 ephemeris, the *iod* contains the IODC as described in [7].

In case of broadcasted QZSS QZS-L1C/L2C/L5 ephemeris, the *iod* contains the 11-bit parameter *t_{oe}* as defined in [7].

In case of broadcasted GLONASS ephemeris, the *iod* contains the parameter *t_b* as defined in [9].

In the case of broadcasted Galileo ephemeris, the *iod* contains the IOD index as described in [8].

In the case of broadcasted BDS ephemeris, the *iod* contains 11 MSB bits of the *t_{oe}* as defined in [23].

The interpretation of *iod* depends on the *GNSS-ID* and is as shown in table GNSS to *iod* Bit String(11) relation below.

svHealthExt

This field specifies the satellite's additional current health. The health values are GNSS system specific. The interpretation of *svHealthExt* depends on the *GNSS-ID* and is as shown in table GNSS to *svHealthExt* Bit String(4) relation below.

GNSS to *svHealth* Bit String(8) relation

GNSS	svHealth Bit String(8)							
	Bit 1 (MSB)	Bit 2	Bit 3	Bit 4	Bit 5	Bit 6	Bit 7	Bit 8 (LSB)
GPS L1/CA ⁽¹⁾	SV Health [4]						'0' (reserved)	'0' (reserved)
Modernized GPS ⁽²⁾	L1C Health [6]	L1 Health [4,5]	L2 Health [4,5]	L5 Health [4,5]	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)
SBAS ⁽³⁾	Ranging On(0),Off(1) [10]	Corrections On(0),Off(1) [10]	Integrity On(0),Off(1)[10]	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)
QZSS ⁽⁴⁾ QZS-L1	SV Health [7]						'0' (reserved)	'0' (reserved)
QZSS ⁽⁵⁾	L1C Health	L1 Health	L2 Health	L5 Health	'0'	'0'	'0'	'0'

QZS-L1C/L2C/L5	[7]	[7]	[7]	[7]	(reserved)	(reserved)	(reserved)	(reserved)
GLONASS	B _n (MSB) [9, page 30]	F _T [9, Table 4.4]			'0' (reserved)	'0' (reserved)	'0' (reserved)	
Galileo [8, section 5.1.9.3]	E5a Data Validity Status	E5b Data Validity Status	E1-B Data Validity Status	E5a Signal Health Status		'0' (reserved)	'0' (reserved)	'0' (reserved)
BDS [23]	B1I Health (SatH1) [23]	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)	'0' (reserved)
Note 1: If GNSS-ID indicates 'gps', and GNSS Orbit Model-2 is included, this interpretation of svHealth applies. Note 2: If GNSS-ID indicates 'gps', and GNSS Orbit Model-3 is included, this interpretation of svHealth applies. If a certain signal is not supported on the satellite indicated by SV-ID, the corresponding health bit shall be set to '1' (i.e., signal can not be used). Note 3: svHealth in case of GNSS-ID indicates 'sbas' includes the 5 LSBs of the Health included in GEO Almanac Message Parameters (Type 17) [10]. Note 4: If GNSS-ID indicates 'qzss', and GNSS Orbit Model-2 is included, this interpretation of svHealth applies. Note 5: If GNSS-ID indicates 'qzss', and GNSS Orbit Model-3 is included, this interpretation of svHealth applies.								

GNSS to iod Bit String(11) relation

GNSS	iod Bit String(11)																		
	Bit 1 (MSB)	Bit 2	Bit 3	Bit 4	Bit 5	Bit 6	Bit 7	Bit 8	Bit 9	Bit 10	Bit 11 (LSB)								
GPS L1/CA	'0'	Issue of Data, Clock [4]																	
Modernized GPS	t _{oe} (seconds, scale factor 300, range 0 – 604500) [4,5,6]																		
SBAS	'0'	'0'	'0'	Issue of Data ([10], Message Type 9)															
QZSS QZS-L1	'0'	Issue of Data, Clock [7]																	
QZSS QZS-L1C/L2C/L5	t _{oe} (seconds, scale factor 300, range 0 – 604500) [7]																		
GLONASS	'0'	'0'	'0'	'0'	t _b (minutes, scale factor 15) [9]														
Galileo	'0'	IODnav [8]																	
BDS	11 MSB bits of t _{oe} (seconds, scale factor 512, range 0 – 604672) [23]																		

GNSS to svHealthExt Bit String(4) relation

GNSS	svHealthExt Bit String(4)			
	Bit 1 (MSB)	Bit 2	Bit 3	Bit 4 (LSB)
Galileo [8, section 5.1.9.3]	E5b Signal Health Status			E1-B Signal Health Status

StandardClockModelList

```
-- ASN1START

StandardClockModelList ::= SEQUENCE (SIZE(1..2)) OF StandardClockModelElement

StandardClockModelElement ::= SEQUENCE {
  stanClockToc      INTEGER (0..16383),
  stanClockAF2      INTEGER (-32..31),
  stanClockAF1      INTEGER (-1048576..1048575),
  stanClockAF0      INTEGER (-1073741824..1073741823),
  stanClockTgd      INTEGER (-512..511)           OPTIONAL, -- Need ON
  sisa              INTEGER (0..255),
  stanModelID       INTEGER (0..1)                OPTIONAL, -- Need ON
  ...
}

-- ASN1STOP
```

<i>StandardClockModelList</i> field descriptions	
<i>standardClockModelList</i>	
<i>gnss-ClockModel</i> Model-1 contains one or two clock model elements. If included, clock Model-1 shall be included once or twice depending on the target device capability.	
If the target device is supporting multiple Galileo signals, the location server shall include both F/Nav and I/Nav clock models in <i>gnss-ClockModel</i> if the location server assumes the target device to perform location information calculation using multiple signals.	
<i>stanClockToc</i>	
Parameter t_{oc} defined in [8]. Scale factor 60 seconds.	
<i>stanClockAF2</i>	
Parameter a_{f2} defined in [8]. Scale factor 2^{-59} seconds/second ² .	
<i>stanClockAF1</i>	
Parameter a_{f1} defined in [8]. Scale factor 2^{-46} seconds/second.	
<i>stanClockAFO</i>	
Parameter a_{f0} defined in [8]. Scale factor 2^{-34} seconds.	
<i>stanClockTgd</i>	
Parameter T_{GD} , Broadcast Group Delay (BGD), defined in [8]. Scale factor 2^{-32} seconds. This field is required if the target device supports only single frequency Galileo signal.	
<i>sisa</i>	
Signal-In-Space Accuracy (SISA), defined in [8] section 5.1.11.	
<i>stanModelID</i>	
This field specifies the identity of the clock model according to the table Value of <i>stanModelID</i> to Identity relation below. This field is required if the location server includes both F/Nav and I/Nav Galileo clock models in <i>gnss-ClockModel</i> .	

Value of *stanModelID* to Identity relation

Value of <i>stanModelID</i>	Identity
0	I/Nav (E1,E5b)
1	F/Nav (E1,E5a)

— NAV-ClockModel

```
-- ASN1START
NAV-ClockModel ::= SEQUENCE {
    navToc          INTEGER (0..37799),
    navaf2          INTEGER (-128..127),
    navaf1          INTEGER (-32768..32767),
    navaf0          INTEGER (-2097152..2097151),
    navTgd          INTEGER (-128..127),
    ...
}
-- ASN1STOP
```

<i>NAV-ClockModel</i> field descriptions	
<i>navToc</i>	
Parameter t_{oc} , time of clock (seconds) [4,7] Scale factor 2^4 seconds.	
<i>navaf2</i>	
Parameter a_{f2} , clock correction polynomial coefficient (sec/sec ²) [4,7]. Scale factor 2^{-55} seconds/second ² .	
<i>navaf1</i>	
Parameter a_{f1} , clock correction polynomial coefficient (sec/sec) [4,7]. Scale factor 2^{-43} seconds/second.	
<i>navaf0</i>	
Parameter a_{f0} , clock correction polynomial coefficient (seconds) [4,7]. Scale factor 2^{-31} seconds.	

<i>NAV-ClockModel</i> field descriptions

cnavTgd

Parameter T_{GD} , group delay (seconds) [4,7].
Scale factor 2^{-31} seconds.

— *CNAV-ClockModel*

```
-- ASN1START
```

```
CNAV-ClockModel ::= SEQUENCE {
    cnavToc          INTEGER (0..2015),
    cnavTop          INTEGER (0..2015),
    cnavURA0         INTEGER (-16..15),
    cnavURA1         INTEGER (0..7),
    cnavURA2         INTEGER (0..7),
    cnavAf2          INTEGER (-512..511),
    cnavAf1          INTEGER (-524288..524287),
    cnavAf0          INTEGER (-33554432..33554431),
    cnavTgd          INTEGER (-4096..4095),
    cnavISCI1cp      INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    cnavISCI1cd      INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    cnavISCI1ca      INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    cnavISCI1c2      INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    cnavISCI15i5     INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    cnavISCI15q5     INTEGER (-4096..4095)           OPTIONAL, -- Need ON
    ...
}
```

```
-- ASN1STOP
```

<i>CNAV-ClockModel</i> field descriptions
--

cnavToc

Parameter t_{oc} , clock data reference time of week (seconds) [4,5,6,7].
Scale factor 300 seconds.

cnavTop

Parameter t_{op} , clock data predict time of week (seconds) [4,5,6,7].
Scale factor 300 seconds

cnavURA0

Parameter URA_{oc} Index, SV clock accuracy index (dimensionless) [4,5,6,7].

cnavURA1

Parameter URA_{oc1} Index, SV clock accuracy change index (dimensionless) [4,5,6,7].

cnavURA2

Parameter URA_{oc2} Index, SV clock accuracy change rate index (dimensionless) [4,5,6,7].

cnavAf2

Parameter a_{f2-n} , SV clock drift rate correction coefficient (sec/sec²) [4,5,6,7].
Scale factor 2^{-60} seconds/second².

cnavAf1

Parameter a_{f1-n} , SV clock drift correction coefficient (sec/sec) [4,5,6,7].
Scale factor 2^{-48} seconds/second.

cnavAf0

Parameter a_{f0-n} , SV clock bias correction coefficient (seconds) [4,5,6,7].
Scale factor 2^{-35} seconds.

cnavTgd

Parameter T_{GD} , Group delay correction (seconds) [4,5,6,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L1c signal.

cnavISCI1cp

Parameter ISC_{L1CP} , inter signal group delay correction (seconds) [6,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L1c signal.

cnavISCI1cd

Parameter ISC_{L1CD} , inter signal group delay correction (seconds) [6,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L1c signal.

cnavISCI1ca

Parameter ISC_{L1CA} , inter signal group delay correction (seconds) [4,5,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L1CA signal.

CNAV-ClockModel field descriptions

cnavISC12c

Parameter ISC_{L2C} , inter signal group delay correction (seconds) [4,5,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L2c signal.

cnavISC15i5

Parameter ISC_{L5i5} , inter signal group delay correction (seconds) [5,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L5 signal.

cnavISC15q5

Parameter ISC_{L5Q5} , inter signal group delay correction (seconds) [5,7].
Scale factor 2^{-35} seconds.

The location server should include this field if the target device is GPS capable and supports the L5 signal.

— GLONASS-ClockModel

```
-- ASN1START

GLONASS-ClockModel ::= SEQUENCE {
    gloTau      INTEGER (-2097152..2097151),
    gloGamma    INTEGER (-1024..1023),
    gloDeltaTau INTEGER (-16..15)           OPTIONAL, -- Need ON
    ...
}

-- ASN1STOP
```

GLONASS-ClockModel field descriptions
--

gloTau

Parameter $\tau_n(t_b)$, satellite clock offset (seconds) [9].
Scale factor 2^{-30} seconds.

gloGamma

Parameter $\gamma_n(t_b)$, relative frequency offset from nominal value (dimensionless) [9].
Scale factor 2^{-40} .

gloDeltaTau

Parameter $\Delta\tau_n$, time difference between transmission in G2 and G1 (seconds) [9].
Scale factor 2^{-30} seconds.

The location server should include this parameter if the target device is dual frequency GLONASS receiver capable.

— SBAS-ClockModel

```
-- ASN1START

SBAS-ClockModel ::= SEQUENCE {
    sbasTo       INTEGER (0..5399),
    sbasAgfo    INTEGER (-2048..2047),
    sbasAgf1    INTEGER (-128..127),
    ...
}

-- ASN1STOP
```

SBAS-ClockModel field descriptions

sbasTo

Parameter t_0 [10].
Scale factor 16 seconds.

sbasAgfo

Parameter a_{Gf0} [10].
Scale factor 2^{-31} seconds.

sbasAgf1

Parameter a_{Gf1} [10].
Scale factor 2^{-40} seconds/second.

— *BDS-ClockModel*

```
-- ASN1START

BDS-ClockModel-r12 ::= SEQUENCE {
    bdsAODC-r12      INTEGER (0..31),
    bdsToc-r12       INTEGER (0..131071),
    bdsA0-r12        INTEGER (-8388608..8388607),
    bdsA1-r12        INTEGER (-2097152..2097151),
    bdsA2-r12        INTEGER (-1024..1023),
    bdsTgd1-r12      INTEGER (-512..511),
    ...
}

-- ASN1STOP
```

BDS-ClockModel field descriptions

bdsAODC

Parameter Age of Data, Clock (AODC), see [23, Table 5-6].

bdsToc

Parameter T_{oc} , Time of clock (seconds) [23].

Scale factor 2^3 seconds.

bdsA0

Parameter a_0 , Clock correction polynomial coefficient (seconds) [23].

Scale factor 2^{-33} seconds.

bdsA1

Parameter a_1 , Clock correction polynomial coefficient (sec/sec) [23].

Scale factor 2^{-50} sec/sec.

bdsA2

Parameter a_2 , Clock correction polynomial coefficient (sec/sec²) [23].

Scale factor 2^{-66} sec/sec².

bdsTgd1

Parameter Equipment group delay differential T_{GD1} [23].

Scale factor is 0.1 nanosecond.

— *NavModelKeplerianSet*

```
-- ASN1START

NavModelKeplerianSet ::= SEQUENCE {
    keplerToe      INTEGER (0 .. 16383),
    keplerW        INTEGER (-2147483648..2147483647),
    keplerDeltaN   INTEGER (-32768..32767),
    keplerM0       INTEGER (-2147483648..2147483647),
    keplerOmegaDot INTEGER (-8388608..8388607),
    keplerE        INTEGER (0..4294967295),
    keplerIDot     INTEGER (-8192..8191),
    keplerAPowerHalf INTEGER (0..4294967295),
    keplerI0       INTEGER (-2147483648..2147483647),
    keplerOmega0   INTEGER (-2147483648..2147483647),
    keplerCrs      INTEGER (-32768..32767),
    keplerCis      INTEGER (-32768..32767),
    keplerCus      INTEGER (-32768..32767),
    keplerCrc      INTEGER (-32768..32767),
    keplerCic      INTEGER (-32768..32767),
    keplerCuc      INTEGER (-32768..32767),
    ...
}

-- ASN1STOP
```

NavModelKeplerianSet field descriptions

keplerToe

Parameter t_{oe} , time-of-ephemeris in seconds [8].

Scale factor 60 seconds.

keplerW

Parameter ω , argument of perigee (semi-circles) [8].

Scale factor 2^{-31} semi-circles.

<i>NavModelKeplerianSet</i> field descriptions	
<i>keplerDeltaN</i>	Parameter Δn , mean motion difference from computed value (semi-circles/sec) [8]. Scale factor 2^{-43} semi-circles/second.
<i>keplerM0</i>	Parameter M_0 , mean anomaly at reference time (semi-circles) [8]. Scale factor 2^{-31} semi-circles.
<i>keplerOmegaDot</i>	Parameter $\Omega_{\text{MEGA}}\dot{\theta}$, rate of change of right ascension (semi-circles/sec) [8]. Scale factor 2^{-43} semi-circles/second.
<i>keplerE</i>	Parameter e , eccentricity [8]. Scale factor 2^{-33} .
<i>KeplerIDot</i>	Parameter $I\dot{o}$, rate of change of inclination angle (semi-circles/sec) [8]. Scale factor 2^{-43} semi-circles/second.
<i>keplerAPowerHalf</i>	Parameter \sqrt{a} , square root of semi-major Axis in (meters) $^{\frac{1}{2}}$ [8]. Scale factor 2^{-19} meters $^{\frac{1}{2}}$.
<i>keplerI0</i>	Parameter i_0 , inclination angle at reference time (semi-circles) [8]. Scale factor 2^{-31} semi-circles.
<i>keplerOmega0</i>	Parameter $\Omega_{\text{MEGA}}(0)$, longitude of ascending node of orbit plane at weekly epoch (semi-circles) [8]. Scale factor 2^{-31} semi-circles.
<i>keplerCrs</i>	Parameter C_{rs} , amplitude of the sine harmonic correction term to the orbit radius (meters) [8]. Scale factor 2^{-5} meters.
<i>keplerCis</i>	Parameter C_{is} , amplitude of the sine harmonic correction term to the angle of inclination (radians) [8]. Scale factor 2^{-29} radians.
<i>keplerCus</i>	Parameter C_{us} , amplitude of the sine harmonic correction term to the argument of latitude (radians) [8]. Scale factor 2^{-29} radians.
<i>keplerCrc</i>	Parameter C_{rc} , amplitude of the cosine harmonic correction term to the orbit radius (meters) [8]. Scale factor 2^{-5} meters.
<i>keplerCic</i>	Parameter C_{ic} , amplitude of the cosine harmonic correction term to the angle of inclination (radians) [8]. Scale factor 2^{-29} radians.
<i>keplerCuc</i>	Parameter C_{uc} , amplitude of the cosine harmonic correction term to the argument of latitude (radians) [8]. Scale factor 2^{-29} radians.

– *NavModelNAV-KeplerianSet*

```
-- ASN1START

NavModelNAV-KeplerianSet ::= SEQUENCE {
    navURA      INTEGER (0..15),
    navFitFlag  INTEGER (0..1),
    navToe      INTEGER (0..37799),
    navOmega    INTEGER (-2147483648..2147483647),
    navDeltaN   INTEGER (-32768..32767),
    navM0       INTEGER (-2147483648..2147483647),
    navOmegaADot INTEGER (-8388608..8388607),
    navE        INTEGER (0..4294967295),
    navIDot     INTEGER (-8192..8191),
    navAPowerHalf INTEGER (0..4294967295),
    navI0       INTEGER (-2147483648..2147483647),
    navOmegaA0  INTEGER (-2147483648..2147483647),
    navCrs     INTEGER (-32768..32767),
    navCis     INTEGER (-32768..32767),
    navCus     INTEGER (-32768..32767),
    navCrc     INTEGER (-32768..32767),
    navCic     INTEGER (-32768..32767),
    navCuc     INTEGER (-32768..32767),
    addNAVparam SEQUENCE {
```

```

    ephemCodeOnL2      INTEGER (0..3),
    ephemL2Pflag       INTEGER (0..1),
    ephemSF1Rsvd       SEQUENCE {
        reserved1      INTEGER (0..8388607),   -- 23-bit field
        reserved2      INTEGER (0..16777215), -- 24-bit field
        reserved3      INTEGER (0..16777215), -- 24-bit field
        reserved4      INTEGER (0..65535)     -- 16-bit field
    },
    ephemAODA         INTEGER (0..31)
} OPTIONAL,      -- Need ON
...
}

-- ASN1STOP

```

NavModelNAV-KeplerianSet field descriptions

navURA

Parameter URA Index, SV accuracy (dimensionless) [4,7].

navFitFlag

Parameter Fit Interval Flag, fit interval indication (dimensionless) [4,7]

navToe

Parameter t_{oe} , time of ephemeris (seconds) [4,7].

Scale factor 2^4 seconds.

navOmega

Parameter ω , argument of perigee (semi-circles) [4,7].

Scale factor 2^{31} semi-circles.

navDeltaN

Parameter Δn , mean motion difference from computed value (semi-circles/sec) [4,7].

Scale factor 2^{-43} semi-circles/second.

navMO

Parameter M_0 , mean anomaly at reference time (semi-circles) [4,7].

Scale factor 2^{31} semi-circles.

navOmegaADot

Parameter $\dot{\Omega}$, rate of right ascension (semi-circles/sec) [4,7].

Scale factor 2^{-43} semi-circles/second.

navE

Parameter e , eccentricity (dimensionless) [4,7].

Scale factor 2^{-33} .

navIDot

Parameter IDOT, rate of inclination angle (semi-circles/sec) [4,7].

Scale factor 2^{-43} semi-circles/second.

navAPowerHalf

Parameter \sqrt{A} , square root of semi-major axis (meters^{1/2}) [4,7].

Scale factor 2^{19} meters^{1/2}.

navI0

Parameter i_0 , inclination angle at reference time (semi-circles) [4,7].

Scale factor 2^{31} semi-circles.

navOmegaAO

Parameter Ω_0 , longitude of ascending node of orbit plane at weekly epoch (semi-circles) [4,7].

Scale factor 2^{31} semi-circles.

navCrs

Parameter C_{rs} , amplitude of sine harmonic correction term to the orbit radius (meters) [4,7].

Scale factor 2^{-5} meters.

navCis

Parameter C_{is} , amplitude of sine harmonic correction term to the angle of inclination (radians) [4,7].

Scale factor 2^{-29} radians.

navCus

Parameter C_{us} , amplitude of sine harmonic correction term to the argument of latitude (radians) [4,7].

Scale factor 2^{-29} radians.

navCrc

Parameter C_{rc} , amplitude of cosine harmonic correction term to the orbit radius (meters) [4,7].

Scale factor 2^{-5} meters.

navCic

Parameter C_{ic} , amplitude of cosine harmonic correction term to the angle of inclination (radians) [4,7].

Scale factor 2^{-29} radians.

NavModelNAV-KeplerianSet field descriptions

navCuc

Parameter C_{uc} , amplitude of cosine harmonic correction term to the argument of latitude (radians) [4,7].
Scale factor 2^{-29} radians.

addNAVparam

These fields include data and reserved bits in the GPS NAV message [4,14].
These additional navigation parameters, if provided by the location server, allow the target device to perform data wipe-off similar to what is done by the target device with the *GNSS-DataBitAssistance*.

NavModelCNAV-KeplerianSet

-- ASN1START

```
NavModelCNAV-KeplerianSet ::= SEQUENCE {
    cnavTop          INTEGER (0..2015),
    cnavURAindex    INTEGER (-16..15),
    cnavDeltaA       INTEGER (-33554432..33554431),
    cnavAdot        INTEGER (-16777216..16777215),
    cnavDeltaNo      INTEGER (-65536..65535),
    cnavDeltaNoDot   INTEGER (-4194304..4194303),
    cnavMo           INTEGER (-4294967296..4294967295),
    cnavE            INTEGER (0..8589934591),
    cnavOmega        INTEGER (-4294967296..4294967295),
    cnavOMEGA0      INTEGER (-4294967296..4294967295),
    cnavDeltaOmegaDot INTEGER (-65536..65535),
    cnavIo           INTEGER (-4294967296..4294967295),
    cnavIoDot        INTEGER (-16384..16383),
    cnavCis          INTEGER (-32768..32767),
    cnavCic          INTEGER (-32768..32767),
    cnavCrs          INTEGER (-8388608..8388607),
    cnavCrc          INTEGER (-8388608..8388607),
    cnavCus          INTEGER (-1048576..1048575),
    cnavCuc          INTEGER (-1048576..1048575),
    ...
}
```

-- ASN1STOP

NavModelCNAV-KeplerianSet field descriptions

cnavTop

Parameter t_{top} , data predict time of week (seconds) [4,5,6,7].
Scale factor 300 seconds.

cnavURAindex

Parameter URA_{oe} Index, SV accuracy (dimensionless) [4,5,6,7].

cnavDeltaA

Parameter ΔA , semi-major axis difference at reference time (meters) [4,5,6,7].
Scale factor 2^{-9} meters.

cnavAdot

Parameter \dot{A} , change rate in semi-major axis (meters/sec) [4,5,6,7].
Scale factor 2^{-21} meters/sec.

cnavDeltaNo

Parameter Δn_0 , mean motion difference from computed value at reference time (semi-circles/sec) [4,5,6,7].
Scale factor 2^{-44} semi-circles/second.

cnavDeltaNoDot

Parameter $\dot{\Delta n}_0$, rate of mean motion difference from computed value (semi-circles/sec²) [4,5,6,7].
Scale factor 2^{-57} semi-circles/second².

cnavMo

Parameter M_{0-n} , mean anomaly at reference time (semi-circles) [4,5,6,7].
Scale factor 2^{-32} semi-circles.

cnavE

Parameter e_n , eccentricity (dimensionless) [4,5,6,7].
Scale factor 2^{-34} .

cnavOmega

Parameter ω_n , argument of perigee (semi-circles) [4,5,6,7].
Scale factor 2^{-32} semi-circles.

<i>NavModelCNAV-KeplerianSet</i> field descriptions	
<i>cnavOMEGA0</i>	Parameter Ω_{0-n} , reference right ascension angle (semi-circles) [4,5,6,7]. Scale factor 2^{-32} semi-circles.
<i>cnavDeltaOmegaDot</i>	Parameter $\dot{\Omega}$, rate of right ascension difference (semi-circles/sec) [4,5,6,7]. Scale factor 2^{-44} semi-circles/second.
<i>cnavI0</i>	Parameter i_{0-n} , inclination angle at reference time (semi-circles) [4,5,6,7]. Scale factor 2^{-32} semi-circles.
<i>cnavI0Dot</i>	Parameter \dot{i}_{0-n} , rate of inclination angle (semi-circles/sec) [4,5,6,7]. Scale factor 2^{-44} semi-circles/second..
<i>cnavCis</i>	Parameter C_{is-n} , amplitude of sine harmonic correction term to the angle of inclination (radians) [4,5,6,7]. Scale factor 2^{-30} radians.
<i>cnavCic</i>	Parameter C_{ic-n} , amplitude of cosine harmonic correction term to the angle of inclination (radians) [4,5,6,7]. Scale factor 2^{-30} radians.
<i>cnavCrs</i>	Parameter C_{rs-n} , amplitude of sine harmonic correction term to the orbit radius (meters) [4,5,6,7]. Scale factor 2^{-8} meters.
<i>cnavCrc</i>	Parameter C_{rc-n} , amplitude of cosine harmonic correction term to the orbit radius (meters) [4,5,6,7]. Scale factor 2^{-8} meters.
<i>cnavCus</i>	Parameter C_{us-n} , amplitude of the sine harmonic correction term to the argument of latitude (radians) [4,5,6,7]. Scale factor 2^{-30} radians.
<i>cnavCuc</i>	Parameter C_{uc-n} , amplitude of cosine harmonic correction term to the argument of latitude (radians) [4,5,6,7]. Scale factor 2^{-30} radians.

– *NavModel-GLONASS-ECEF*

```
-- ASN1START
```

```
NavModel-GLONASS-ECEF ::= SEQUENCE {
    gloEn          INTEGER (0..31),
    gloP1          BIT STRING (SIZE(2)),
    gloP2          BOOLEAN,
    gloM           INTEGER (0..3),
    gloX           INTEGER (-67108864..67108863),
    gloXdot        INTEGER (-8388608..8388607),
    gloXdotdot    INTEGER (-16..15),
    gloY           INTEGER (-67108864..67108863),
    gloYdot        INTEGER (-8388608..8388607),
    gloYdotdot    INTEGER (-16..15),
    gloZ           INTEGER (-67108864..67108863),
    gloZdot        INTEGER (-8388608..8388607),
    gloZdotdot    INTEGER (-16..15),
    ...
}
```

```
-- ASN1STOP
```

<i>NavModel-GLONASS-ECEF</i> field descriptions	
<i>gloEn</i>	Parameter E_n , age of data (days) [9]. Scale factor 1 days.
<i>gloP1</i>	Parameter P1, time interval between two adjacent values of t_b (minutes) [9].
<i>gloP2</i>	Parameter P2, change of t_b flag (dimensionless) [9].
<i>gloM</i>	Parameter M, type of satellite (dimensionless) [9].

NavModel-GLOASS-ECEF field descriptions	
<i>gloX</i>	Parameter $x_n(t_b)$, x-coordinate of satellite at time t_b (kilometers) [9]. Scale factor 2^{11} kilometers.
<i>gloXdot</i>	Parameter $\dot{x}_n(t_b)$, x-coordinate of satellite velocity at time t_b (kilometers/sec) [9]. Scale factor 2^{20} kilometers/second.
<i>gloXdotdot</i>	Parameter $\ddot{x}_n(t_b)$, x-coordinate of satellite acceleration at time t_b (kilometers/sec ²) [9]. Scale factor 2^{30} kilometers/second ² .
<i>gloY</i>	Parameter $y_n(t_b)$, y-coordinate of satellite at time t_b (kilometers) [9]. Scale factor 2^{11} kilometers.
<i>gloYdot</i>	Parameter $\dot{y}_n(t_b)$, y-coordinate of satellite velocity at time t_b (kilometers/sec) [9]. Scale factor 2^{20} kilometers/second.
<i>gloYdotdot</i>	Parameter $\ddot{y}_n(t_b)$, y-coordinate of satellite acceleration at time t_b (kilometers/sec ²) [9]. Scale factor 2^{30} kilometers/second ² .
<i>gloZ</i>	Parameter $z_n(t_b)$, z-coordinate of satellite at time t_b (kilometers) [9]. Scale factor 2^{11} kilometers.
<i>gloZdot</i>	Parameter $\dot{z}_n(t_b)$, z-coordinate of satellite velocity at time t_b (kilometers/sec) [9]. Scale factor 2^{20} kilometers/second.
<i>gloZdotdot</i>	Parameter $\ddot{z}_n(t_b)$, z-coordinate of satellite acceleration at time t_b (kilometers/sec ²) [9]. Scale factor 2^{30} kilometers/second ² .

— NavModel-SBAS-ECEF

```
-- ASN1START

NavModel-SBAS-ECEF ::= SEQUENCE {
    sbasTo                  INTEGER (0..5399)                                OPTIONAL,   -- Cond ClockModel
    sbasAccuracy            BIT STRING (SIZE(4)),
    sbasXg                  INTEGER (-536870912..536870911),
    sbasYg                  INTEGER (-536870912..536870911),
    sbasZg                  INTEGER (-16777216..16777215),
    sbasXgDot               INTEGER (-65536..65535),
    sbasYgDot               INTEGER (-65536..65535),
    sbasZgDot               INTEGER (-131072..131071),
    sbasXgDotDot            INTEGER (-512..511),
    sbagYgDotDot            INTEGER (-512..511),
    sbasZgDotDot            INTEGER (-512..511),
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>ClockModel</i>	This field is mandatory present if <i>gnss-ClockModel Model-5</i> is not included; otherwise it is not present.

NavModel-SBAS-ECEF field descriptions	
<i>sbasTo</i>	Parameter t_0 , time of applicability (seconds) [10]. Scale factor 16 seconds.

<i>NavModel-SBAS-ECEF field descriptions</i>	
<i>sbasAccuracy</i>	Parameter Accuracy, (dimensionless) [10].
<i>sbasXg</i>	Parameter X_G , (meters) [10]. Scale factor 0.08 meters.
<i>sbasYg</i>	Parameter Y_G , (meters) [10]. Scale factor 0.08 meters.
<i>sbasZg</i>	Parameter Z_G , (meters) [10]. Scale factor 0.4 meters.
<i>sbasXgDot</i>	Parameter X_G , Rate-of-Change, (meters/sec) [10]. Scale factor 0.000625 meters/second.
<i>sbasYgDot</i>	Parameter Y_G , Rate-of-Change, (meters/sec) [10] Scale factor 0.000625 meters/second.
<i>sbasZgDot</i>	Parameter Z_G , Rate-of-Change, (meters/sec) [10]. Scale factor 0.004 meters/second.
<i>sbasXgDotDot</i>	Parameter X_G , Acceleration, (meters/sec ²) [10]. Scale factor 0.0000125 meters/second ² .
<i>sbasYgDotDot</i>	Parameter Y_G , Acceleration, (meters/sec ²) [10]. Scale factor 0.0000125 meters/second ² .
<i>sbasZgDotDot</i>	Parameter Z_G Acceleration, (meters/sec ²) [10]. Scale factor 0.0000625 meters/second ² .

– *NavModel-BDS-KeplerianSet*

```
-- ASN1START

NavModel-BDS-KeplerianSet-r12 ::= SEQUENCE {
    bdsAODE-r12          INTEGER (0..31),
    bdsURAI-r12          INTEGER (0..15),
    bdsToe-r12            INTEGER (0..131071),
    bdsAPowerHalf-r12    INTEGER (0..4294967295),
    bdsE-r12              INTEGER (0..4294967295),
    bdsW-r12              INTEGER (-2147483648..2147483647),
    bdsDeltaN-r12         INTEGER (-32768..32767),
    bdsM0-r12              INTEGER (-2147483648..2147483647),
    bdsOmega0-r12         INTEGER (-2147483648..2147483647),
    bdsOmegaDot-r12       INTEGER (-8388608..8388607),
    bdsI0-r12              INTEGER (-2147483648..2147483647),
    bdsIDot-r12            INTEGER (-8192..8191),
    bdsCuc-r12             INTEGER (-131072..131071),
    bdsCus-r12             INTEGER (-131072..131071),
    bdsCrc-r12             INTEGER (-131072..131071),
    bdsCrs-r12             INTEGER (-131072..131071),
    bdsCic-r12             INTEGER (-131072..131071),
    bdsCis-r12             INTEGER (-131072..131071),
    ...
}

-- ASN1STOP
```

<i>NavModel-BDS-KeplerianSet</i> field descriptions	
bdsAODE	Parameter Age of Data, Ephemeris (AODE), see [23, Table 5-8].
bdsURAI	Parameter URA Index, URA is used to describe the signal-in-space accuracy in meters as defined in [23].
bdsToe	Parameter t_{oe} , Ephemeris reference time (seconds) [23]. Scale factor 2^3 seconds.
bdsAPowerHalf	Parameter $A^{1/2}$, Square root of semi-major axis (meters $^{1/2}$) [23]. Scale factor 2^{-19} meters $^{1/2}$.
bdsE	Parameter e, Eccentricity , dimensionless [23]. Scale factor 2^{-33} .
bdsW	Parameter ω , Argument of perigee (semi-circles) [23]. Scale factor 2^{-31} semi-circles.
bdsDeltaN	Parameter Δn , Mean motion difference from computed value (semi-circles/sec) [23]. Scale factor 2^{-43} semi-circles/sec.
bdsMO	Parameter M_0 , Mean anomaly at reference time (semi-circles) [23]. Scale factor 2^{-31} semi-circles.
bdsOmega0	Parameter Ω_0 , Longitude of ascending node of orbital of plane computed according to reference time (semi-circles) [23]. Scale factor 2^{-31} semi-circles.
bdsOmegaDot	Parameter $\dot{\Omega}$, Rate of right ascension (semi-circles/sec) [23]. Scale factor 2^{-43} semi-circles/sec.
bdsI0	Parameter i_0 , Inclination angle at reference time (semi-circles) [23] Scale factor 2^{-31} semi-circles.
bdsIDot	Parameter I_{dot} , Rate of inclination angle (semi-circles/sec) [23]. Scale factor 2^{-43} semi-circles/sec.
bdsCuc	Parameter C_{uc} , Amplitude of cosine harmonic correction term to the argument of latitude (radians) [23]. Scale factor 2^{-31} radians.
bdsCus	Parameter C_{us} , Amplitude of sine harmonic correction term to the argument of latitude (radians) [23]. Scale factor 2^{-31} radians.
bdsCrc	Parameter C_{rc} , Amplitude of cosine harmonic correction term to the orbit radius (meters) [23]. Scale factor 2^{-6} meters.
bdsCrs	Parameter C_{rs} , Amplitude of sine harmonic correction term to the orbit radius (meters) [23]. Scale factor 2^{-6} meters.
bdsCic	Parameter C_{ic} , Amplitude of cosine harmonic correction term to the angle of inclination (radians) [23]. Scale factor 2^{-31} radians.
bdsCis	Parameter C_{is} , Amplitude of sine harmonic correction term to the angle of inclination (radians) [23]. Scale factor 2^{-31} radians.

– *GNSS-RealTimeIntegrity*

The IE *GNSS-RealTimeIntegrity* is used by the location server to provide parameters that describe the real-time status of the GNSS constellations. *GNSS-RealTimeIntegrity* data communicates the health of the GNSS signals to the mobile in real-time.

The location server shall always transmit the *GNSS-RealTimeIntegrity* with the current list of unhealthy signals (i.e., not only for signals/SVs currently visible at the reference location), for any GNSS positioning attempt and whenever GNSS assistance data are sent. If the number of bad signals is zero, then the *GNSS-RealTimeIntegrity* IE shall be omitted.

```
-- ASN1START

GNSS-RealTimeIntegrity ::= SEQUENCE {
    gnss-BadSignalList  GNSS-BadSignalList,
    ...
}

GNSS-BadSignalList ::= SEQUENCE (SIZE(1..64)) OF BadSignalElement

BadSignalElement ::= SEQUENCE {
    badSVID           SV-ID,
    badSignalID       GNSS-SignalIDs OPTIONAL, -- Need OP
    ...
}

-- ASN1STOP
```

***GNSS-RealTimeIntegrity* field descriptions**

gnss-BadSignalList

This field specifies a list of satellites with bad signal or signals.

badSVID

This field specifies the GNSS SV-ID of the satellite with bad signal or signals.

badSignalID

This field identifies the bad signal or signals of a satellite. This is represented by a bit string in *GNSS-SignalIDs*, with a one-value at a bit position means the particular GNSS signal type of the SV is unhealthy; a zero-value means healthy. Absence of this field means that all signals on the specific SV are bad.

GNSS-DataBitAssistance

The IE *GNSS-DataBitAssistance* is used by the location server to provide data bit assistance data for specific satellite signals for data wipe-off. The data bits included in the assistance data depends on the GNSS and its signal.

```
-- ASN1START

GNSS-DataBitAssistance ::= SEQUENCE {
    gnss-TOD           INTEGER (0..3599),
    gnss-TODfrac        INTEGER (0..999)      OPTIONAL, -- Need ON
    gnss-DataBitsSatList  GNSS-DataBitsSatList,
    ...
}

GNSS-DataBitsSatList ::= SEQUENCE (SIZE(1..64)) OF GNSS-DataBitsSatElement

GNSS-DataBitsSatElement ::= SEQUENCE {
    svid               SV-ID,
    gnss-DataBitsSgnList  GNSS-DataBitsSgnList,
    ...
}

GNSS-DataBitsSgnList ::= SEQUENCE (SIZE(1..8)) OF GNSS-DataBitsSgnElement

GNSS-DataBitsSgnElement ::= SEQUENCE {
    gnss-SignalType     GNSS-SignalID,
    gnss-DataBits        BIT STRING (SIZE (1..1024)),
    ...
}

-- ASN1STOP
```

***GNSS-DataBitAssistance* field descriptions**

gnss-TOD

This field specifies the reference time of the first bit of the data in *GNSS-DataBitAssistance* in integer seconds in GNSS specific system time, modulo 1 hour.

Scale factor 1 second.

gnss-TODfrac

This field specifies the fractional part of the *gnss-TOD* in 1-milli-second resolution.
Scale factor 1 millisecond. The total GNSS TOD is *gnss-TOD* + *gnss-TODfrac*.

gnss-DataBitsSatList

This list specifies the data bits for a particular GNSS satellite *SV-ID* and signal *GNSS-SignalID*.

<i>GNSS-DataBitAssistance</i> field descriptions	
svID	This field specifies the GNSS SV-ID of the satellite for which the <i>GNSS-DataBitAssistance</i> is given.
gnss-SignalType	This field identifies the GNSS signal type of the <i>GNSS-DataBitAssistance</i> .
gnss-DataBits	Data bits are contained in GNSS system and data type specific format. In case of GPS L1 C/A, it contains the NAV data modulation bits as defined in [4]. In case of Modernized GPS L1C, it contains the encoded and interleaved modulation symbols as defined in [6] section 3.2.3.1. In case of Modernized GPS L2C, it contains either the NAV data modulation bits, the FEC encoded NAV data modulation symbols, or the FEC encoded CNAV data modulation symbols, dependent on the current signal configuration of this satellite as defined in [4, Table 3-III]. In case of Modernized GPS L5, it contains the FEC encoded CNAV data modulation symbols as defined in [5]. In case of SBAS, it contains the FEC encoded data modulation symbols as defined in [10]. In case of QZSS QZS-L1, it contains the NAV data modulation bits as defined in [7] section 5.2. In case of QZSS QZS-L1C, it contains the encoded and interleaved modulation symbols as defined in [7] section 5.3. In case of QZSS QZS-L2C, it contains the encoded modulation symbols as defined in [7] section 5.5. In case of QZSS QZS-L5, it contains the encoded modulation symbols as defined in [7] section 5.6. In case of GLONASS, it contains the 100 sps differentially Manchester encoded modulation symbols as defined in [9] section 3.3.2.2. In case of Galileo, it contains the FEC encoded and interleaved modulation symbols. The logical levels 1 and 0 correspond to signal levels -1 and +1, respectively. In case of BDS, it contains the encoded and interleaved modulation symbols as defined in [23, section 5.1.3].

GNSS-AcquisitionAssistance

The IE *GNSS-AcquisitionAssistance* is used by the location server to provide parameters that enable fast acquisition of the GNSS signals. Essentially, these parameters describe the range and derivatives from respective satellites to the reference location at the reference time *GNSS-SystemTime* provided in IE *GNSS-ReferenceTime*.

Whenever *GNSS-AcquisitionAssistance* is provided by the location server, the IE *GNSS-ReferenceTime* shall be provided as well. E.g., even if the target device request for assistance data includes only a request for *GNSS-AcquisitionAssistance*, the location server shall also provide the corresponding IE *GNSS-ReferenceTime*.

Figure 6.5.2.2-1 illustrates the relation between some of the fields, using GPS TOW as exemplary reference.

```
-- ASN1START

GNSS-AcquisitionAssistance ::= SEQUENCE {
    gnss-SignalID           GNSS-SignalID,
    gnss-AcquisitionAssistList   GNSS-AcquisitionAssistList,
    ...
    confidence-r10          INTEGER (0..100)      OPTIONAL    -- Need ON
}

GNSS-AcquisitionAssistList ::= SEQUENCE (SIZE(1..64)) OF GNSS-AcquisitionAssistElement

GNSS-AcquisitionAssistElement ::= SEQUENCE {
    svID                  SV-ID,
    doppler0              INTEGER (-2048..2047),
    doppler1              INTEGER (0..63),
    dopplerUncertainty    INTEGER (0..4),
    codePhase              INTEGER (0..1022),
    intCodePhase           INTEGER (0..127),
    codePhaseSearchWindow  INTEGER (0..31),
    azimuth                INTEGER (0..511),
    elevation              INTEGER (0..127),
    ...
    codePhase1023          BOOLEAN            OPTIONAL,    -- Need OP
    dopplerUncertaintyExt-r10 ENUMERATED { d60,
                                             d80,
                                             d100,
                                             d120,
                                             noInformation, ... }    OPTIONAL    -- Need ON
}
```

```
}
```

-- ASN1STOP

GNSS-AcquisitionAssistance field descriptions

gnss-SignalID

This field specifies the GNSS signal for which the acquisition assistance are provided.

gnss-AcquisitionAssistList

These fields provide a list of acquisition assistance data for each GNSS satellite.

confidence

This field specifies the confidence level of the reference location area or volume used to calculate the acquisition assistance parameters (search windows). A high percentage value (e.g., 98% or more) indicates to the target device that the provided search windows are reliable. The location server should include this field to indicate the confidence level of the provided information.

svID

This field specifies the GNSS SV-ID of the satellite for which the *GNSS-AcquisitionAssistance* is given.

doppler0

This field specifies the Doppler (0th order term) value. A positive value in Doppler defines the increase in satellite signal frequency due to velocity towards the target device. A negative value in Doppler defines the decrease in satellite signal frequency due to velocity away from the target device. Doppler is given in unit of m/s by multiplying the Doppler value in Hz by the nominal wavelength of the assisted signal.

Scale factor 0.5 m/s in the range from -1024 m/s to +1023.5 m/s.

doppler1

This field specifies the Doppler (1st order term) value. A positive value defines the rate of increase in satellite signal frequency due to acceleration towards the target device. A negative value defines the rate of decrease in satellite signal frequency due to acceleration away from the target device.

Scale factor 1/210 m/s² in the range from -0.2 m/s² to +0.1 m/s².

Actual value of Doppler (1st order term) is calculated as $(-42 + \text{doppler1}) * 1/210 \text{ m/s}^2$, with *doppler1* in the range of 0...63.

dopplerUncertainty

This field specifies the Doppler uncertainty value. It is defined such that the Doppler experienced by a stationary target device is in the range [Doppler-Doppler Uncertainty] to [Doppler+Doppler Uncertainty]. Doppler Uncertainty is given in unit of m/s by multiplying the Doppler Uncertainty value in Hz by the nominal wavelength of the assisted signal.

Defined values: 2.5 m/s, 5 m/s, 10 m/s, 20 m/s, 40 m/s as encoded by an integer *n* in the range 0-4 according to:

$$2^{-n}(40) \text{ m/s}; n = 0 - 4.$$

If the *dopplerUncertaintyExt* field is present, the target device that supports the *dopplerUncertaintyExt* shall ignore this field.

codePhase

This field together with the *codePhase1023* field specifies the code phase, in units of milli-seconds, in the range from 0 to 1 millisecond scaled by the nominal chipping rate of the GNSS signal, where increasing values of the field signify increasing predicted signal code phases, as seen by a receiver at the reference location at the reference time. The reference location would typically be an apriori estimate of the target device location.

Scale factor 2^{10} ms in the range from 0 to $(1-2^{10})$ ms.

Note: The value $(1-2^{10})$ ms is encoded using the *codePhase1023* IE.

intCodePhase

This field contains integer code phase (expressed modulo 128 ms). The satellite integer milli-seconds code phase currently being transmitted at the reference time, as seen by a receiver at the reference location is calculated as reference time (expressed in milli-seconds) minus (*intCodePhase* + (nx128 ms)), as shown in Figure 6.5.2.2-1, with *n* = ...-2,-1,0,1,2....

Scale factor 1 ms in the range from 0 to 127 ms.

codePhaseSearchWindow

This field contains the code phase search window. The code phase search window accounts for the uncertainty in the estimated target device location but not any uncertainty in reference time. It is defined such that the expected code phase is in the range [Code Phase–Code Phase Search Window] to [Code Phase+Code Phase Search Window] given in units of milli-seconds.

Range 0-31, mapping according to the table *codePhaseSearchWindow* Value to Interpretation Code Phase Search Window [ms] relation shown below.

azimuth

This field specifies the azimuth angle. An angle of *x* degrees means the satellite azimuth *a* is in the range (*x* ≤ *a* < *x*+0.703125) degrees.

Scale factor 0.703125 degrees.

elevation

This field specifies the elevation angle. An angle of *y* degrees means the satellite elevation *e* is in the range (*y* ≤ *e* < *y*+0.703125) degrees.

Scale factor 0.703125 degrees.

<i>GNSS-AcquisitionAssistance</i> field descriptions	
<i>codePhase1023</i>	This field if set to TRUE indicates that the code phase has the value $1023 \times 2^{-10} = (1-2^{-10})$ ms. This field may only be set to TRUE if the value provided in the <i>codePhase</i> IE is 1022. If this field is set to FALSE, the code phase is the value provided in the <i>codePhase</i> IE in the range from 0 to $(1 - 2 \times 2^{-10})$ ms. If this field is not present and the <i>codePhase</i> IE has the value 1022, the target device may assume that the code phase is between $(1 - 2 \times 2^{-10})$ and $(1 - 2^{-10})$ ms.
<i>dopplerUncertaintyExt</i>	If this field is present, the target device that supports this field shall ignore the <i>dopplerUncertainty</i> field. The location server should include this field only if supported by the target device.
	This field specifies the Doppler uncertainty value. It is defined such that the Doppler experienced by a stationary target device is in the range [Doppler–Doppler Uncertainty] to [Doppler+Doppler Uncertainty]. Doppler Uncertainty is given in unit of m/s by multiplying the Doppler Uncertainty value in Hz by the nominal wavelength of the assisted signal. Enumerated values define 60 m/s, 80 m/s, 100 m/s, 120 ms, and "No Information".

codePhaseSearchWindow Value to Interpretation Code Phase Search Window [ms] relation

codePhaseSearchWindow Value	Interpretation Code Phase Search Window [ms]
'00000'	No information
'00001'	0,002
'00010'	0,004
'00011'	0,008
'00100'	0,012
'00101'	0,016
'00110'	0,024
'00111'	0,032
'01000'	0,048
'01001'	0,064
'01010'	0,096
'01011'	0,128
'01100'	0,164
'01101'	0,200
'01110'	0,250
'01111'	0,300
'10000'	0,360
'10001'	0,420
'10010'	0,480
'10011'	0,540
'10100'	0,600
'10101'	0,660
'10110'	0,720
'10111'	0,780
'11000'	0,850
'11001'	1,000
'11010'	1,150
'11011'	1,300
'11100'	1,450
'11101'	1,600
'11110'	1,800
'11111'	2,000

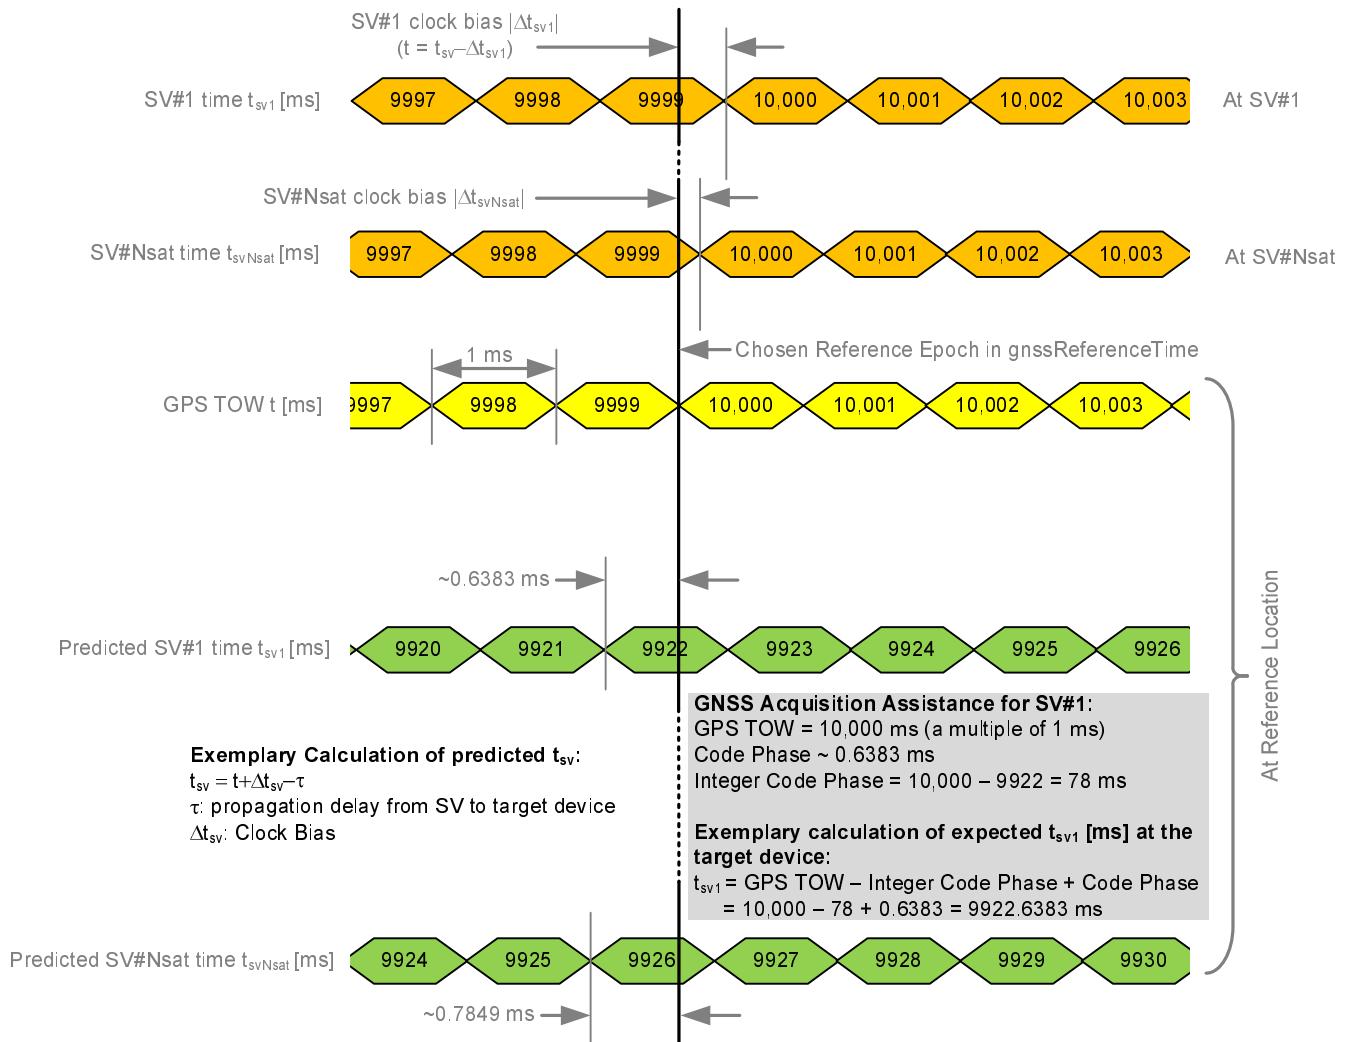


Figure 6.5.2.2-1: Exemplary calculation of some GNSS Acquisition Assistance fields.

GNSS-Almanac

The IE *GNSS-Almanac* is used by the location server to provide the coarse, long-term model of the satellite positions and clocks. The meaning of these parameters is defined in relevant ICDs of the particular GNSS and GNSS specific interpretations apply. For example, GPS and QZSS use the same model parameters but some parameters have a different interpretation [7]. *GNSS-Almanac* is useful for receiver tasks that require coarse accuracy, such as determining satellite visibility. The model is valid for up to a few weeks, typically. Since it is a long-term model, the field should be provided for all satellites available in the GNSS constellation (i.e., not only for SVs visible at the reference location and including SVs flagged as unhealthy in almanac). The *completeAlmanacProvided* field indicates whether or not the location server provided almanacs for the complete GNSS constellation.

```
-- ASN1START

GNSS-Almanac ::= SEQUENCE {
    weekNumber           INTEGER (0..255)      OPTIONAL,   -- Need ON
    toa                  INTEGER (0..255)      OPTIONAL,   -- Need ON
    ioda                INTEGER (0..3)        OPTIONAL,   -- Need ON
    completeAlmanacProvided BOOLEAN,
    gnss-AlmanacList     GNSS-AlmanacList,
    ...
    [[ 'toa-ext-v1240'          INTEGER (256..1023) OPTIONAL,   -- Need ON
      'ioda-ext-v1240'         INTEGER (4..15)    OPTIONAL,   -- Need ON
    ]]
}

GNSS-AlmanacList ::= SEQUENCE (SIZE(1..64)) OF GNSS-AlmanacElement

GNSS-AlmanacElement ::= CHOICE {
```

```

keplerianAlmanacSet          AlmanacKeplerianSet,      -- Model-1
keplerianNAV-Almanac         AlmanacNAV-KeplerianSet,  -- Model-2
keplerianReducedAlmanac     AlmanacReducedKeplerianSet, -- Model-3
keplerianMidiAlmanac        AlmanacMidiAlmanacSet,   -- Model-4
keplerianGLONASS             AlmanacGLONASS-AlmanacSet, -- Model-5
ecef-SBAS-Almanac           AlmanacECEF-SBAS-AlmanacSet, -- Model-6
...
keplerianBDS-Almanac-r12    AlmanacBDS-AlmanacSet-r12 -- Model-7
}

-- ASN1STOP

```

GNSS-Almanac field descriptions

weekNumber

This field specifies the almanac reference week number in GNSS specific system time to which the almanac reference time *toa* is referenced, modulo 256 weeks. This field is required for non-GLONASS GNSS.

Note, in case of Galileo, the almanac reference week number *WN_a* natively contains only the 2 LSB's [8, section 5.1.10].

toa, toa-ext

In case of *GNSS-ID* does not indicate Galileo, this field specifies the almanac reference time given in GNSS specific system time, in units of seconds with a scale factor of 2^{12} . *toa* is required for non-GLONASS GNSS.

In case of *GNSS-ID* does indicate Galileo, this field specifies the almanac reference time given in GNSS specific system time, in units of seconds with a scale factor of 600 seconds. Either *toa* or *toa-ext* is required for Galileo GNSS.

iota, iota-ext

This field specifies the issue of data. Either *iota* or *iota-ext* is required for Galileo GNSS.

completeAlmanacProvided

If set to TRUE, the *gnss-AlmanacList* contains almanacs for the complete GNSS constellation indicated by *GNSS-ID*.

gnss-AlmanacList

This list contains the almanac model for each GNSS satellite in the GNSS constellation.

AlmanacKeplerianSet

```

-- ASN1START

AlmanacKeplerianSet ::= SEQUENCE {
    svID                  SV-ID,
    kepAlmanacE            INTEGER (0..2047),
    kepAlmanacDeltaI       INTEGER (-1024..1023),
    kepAlmanacOmegaDot     INTEGER (-1024..1023),
    kepSV-StatusINAV       BIT STRING (SIZE (4)),
    kepSV-StatusFNAV       BIT STRING (SIZE (2))           OPTIONAL, -- Need ON
    kepAlmanacAPowerHalf   INTEGER (-4096..4095),
    kepAlmanacOmega0        INTEGER (-32768..32767),
    kepAlmanacW             INTEGER (-32768..32767),
    kepAlmanacM0            INTEGER (-32768..32767),
    kepAlmanacAF0           INTEGER (-32768..32767),
    kepAlmanacAF1           INTEGER (-4096..4095),
    ...
}

-- ASN1STOP

```

AlmanacKeplerianSet field descriptions

svID

This field identifies the satellite for which the GNSS Almanac Model is given.

kepAlmanacE

Parameter e, eccentricity, dimensionless [8].

Scale factor 2^{-16} .

kepAlmanacDeltaI

Parameter $\dot{\Omega}$, inclination at reference time relative to $i_0=56^\circ$; semi-circles [8].

Scale factor 2^{-14} semi-circles.

kepAlmanacOmegaDot

Parameter $\dot{\Omega}$, rate of change of right ascension (semi-circles/sec) [8].

Scale factor 2^{-33} semi-circles/seconds.

kepSV-StatusINAV

This field contains the I/NAV signal health status [8, section 5.1.10], E5b_{HS} and E1-B_{HS}, where E5b_{HS} occupies the 2 MSBs in *kepSV-Status/NAV*, and E1-B_{HS} the two LSBs.

<i>AlmanacKeplerianSet</i> field descriptions	
<i>kepSV-StatusFNAV</i>	This field contains the F/NAV signal health status [8, section 5.1.10] ,E5a _{HS} . If the target device is supporting multiple Galileo signals, the location server shall include this field.
<i>kepAlmanacAPowerHalf</i>	Parameter $\Delta(a^{1/2})$, difference with respect to the square root of the nominal semi-major axis, (meters) ^{1/2} [8]. Scale factor 2 ⁻⁹ meters $\frac{1}{2}$.
<i>kepAlmanacOmega0</i>	Parameter OMEGA ₀ , longitude of ascending node of orbital plane at weekly epoch (semi-circles) [8]. Scale factor 2 ⁻¹⁵ semi-circles.
<i>kepAlmanacW</i>	Parameter ω , argument of perigee (semi-circles) [8]. Scale factor 2 ⁻¹⁵ semi-circles.
<i>kepAlmanacM0</i>	Parameter M ₀ , mean anomaly at reference time (semi-circles) [8]. Scale factor 2 ⁻¹⁵ semi-circles.
<i>kepAlmanacAF0</i>	Parameter afo, satellite clock correction bias, seconds [8]. Scale factor 2 ⁻¹⁹ seconds.
<i>kepAlmanacAF1</i>	Parameter af ₁ , satellite clock correction linear, sec/sec [8]. Scale factor 2 ⁻³⁸ seconds/second.

— *AlmanacNAV-KeplerianSet*

```
-- ASN1START

AlmanacNAV-KeplerianSet ::= SEQUENCE {
    svID,
    navAlmE,
    navAlmDeltaI,
    navAlmOMEGADOT,
    navAlmSVHealth,
    navAlmSqrta,
    navAlmOMEGAo,
    navAlmOmega,
    navAlmMo,
    navAlmaf0,
    navAlmaf1
    ...
}

-- ASN1STOP
```

<i>AlmanacNAV-KeplerianSet</i> field descriptions	
<i>svID</i>	This field identifies the satellite for which the GNSS Almanac Model is given.
<i>navAlmE</i>	Parameter e, eccentricity, dimensionless [4,7]. Scale factor 2 ⁻²¹ .
<i>navAlmDeltaI</i>	Parameter δi , correction to inclination, semi-circles [4,7]. Scale factor 2 ⁻¹⁹ semi-circles.
<i>navAlmOMEGADOT</i>	Parameter $\dot{\Omega}$, rate of right ascension, semi-circles/sec [4,7]. Scale factor 2 ⁻³⁸ semi-circles/second.
<i>navAlmSVHealth</i>	Parameter SV Health, satellite health [4,7].
<i>navAlmSqrtA</i>	Parameter \sqrt{A} , square root of the semi-major axis, meters ^{1/2} [4,7] Scale factor 2 ⁻¹¹ meters ^{1/2} .
<i>navAlmOMEGAo</i>	Parameter Ω_0 , longitude of ascending node of orbit plane at weekly epoch, semi-circles [4,7]. Scale factor 2 ⁻²³ semi-circles.
<i>navAlmOmega</i>	Parameter ω , argument of perigee semi-circles [4,7]. Scale factor 2 ⁻²³ semi-circles.
<i>navAlmMo</i>	Parameter M_0 , mean anomaly at reference time semi-circles [4,7]. Scale factor 2 ⁻²³ semi-circles.
<i>navAlmaf0</i>	Parameter a_{f0} , apparent satellite clock correction seconds [4,7]. Scale factor 2 ⁻²⁰ seconds.
<i>navAlmaf1</i>	Parameter a_{f1} , apparent satellite clock correction sec/sec [4,7]. Scale factor 2 ⁻³⁸ semi-circles seconds/second.

— *AlmanacReducedKeplerianSet*

```
-- ASN1START

AlmanacReducedKeplerianSet ::= SEQUENCE {
    svID                      SV-ID,
    redAlmDeltaA               INTEGER (-128..127),
    redAlmOmega0                INTEGER (-64..63),
    redAlmPhi0                  INTEGER (-64..63),
    redAlmL1Health              BOOLEAN,
    redAlmL2Health              BOOLEAN,
    redAlmL5Health              BOOLEAN,
    ...
}

-- ASN1STOP
```

<i>AlmanacReducedKeplerianSet</i> field descriptions	
svID	This field identifies the satellite for which the GNSS Almanac Model is given.
redAlmDeltaA	Parameter δ_A , meters [4,5,6,7]. Scale factor 2^{-9} meters.
redAlmOmega0	Parameter Ω_0 , semi-circles [4,5,6,7]. Scale factor 2^{-6} semi-circles.
redAlmPhi0	Parameter Φ_0 , semi-circles [4,5,6,7]. Scale factor 2^{-6} semi-circles.
redAlmL1Health	Parameter L1 Health, dimensionless [4,5,6,7].
redAlmL2Health	Parameter L2 Health, dimensionless [4,5,6,7].
redAlmL5Health	Parameter L5 Health, dimensionless [4,5,6,7].

— *AlmanacMidiAlmanacSet*

```
-- ASN1START

AlmanacMidiAlmanacSet ::= SEQUENCE {
    svID                      SV-ID,
    midiAlmE                  INTEGER (0..2047),
    midiAlmDeltaI              INTEGER (-1024..1023),
    midiAlmOmegaDot            INTEGER (-1024..1023),
    midiAlmSqrtA               INTEGER (0..131071),
    midiAlmOmega0               INTEGER (-32768..32767),
    midiAlmOmega                INTEGER (-32768..32767),
    midiAlmMo                  INTEGER (-32768..32767),
    midiAlmaf0                 INTEGER (-1024..1023),
    midiAlmaf1                 INTEGER (-512..511),
    midiAlmL1Health             BOOLEAN,
    midiAlmL2Health             BOOLEAN,
    midiAlmL5Health             BOOLEAN,
    ...
}

-- ASN1STOP
```

AlmanacMidiAlmanacSet field descriptions	
svID	This field identifies the satellite for which the GNSS Almanac Model is given.
midiAlmE	Parameter e, dimensionless [4,5,6,7]. Scale factor 2 ⁻¹⁶ .
midiAlmDelta	Parameter δ_i , semi-circles [4,5,6,7]. Scale factor 2 ⁻¹⁴ semi-circles.
midiAlmOmegaDot	Parameter $\dot{\Omega}_i$, semi-circles/sec [4,5,6,7]. Scale factor 2 ⁻³³ semi-circles/second.
midiAlmSqrtA	Parameter \sqrt{A}_i , meters ^{1/2} [4,5,6,7]. Scale factor 2 ⁻⁴ meters ^{1/2} .
midiAlmOmega0	Parameter Ω_0 , semi-circles [4,5,6,7]. Scale factor 2 ⁻¹⁵ semi-circles.
midiAlmOmega	Parameter ω , semi-circles [4,5,6,7]. Scale factor 2 ⁻¹⁵ semi-circles.
midiAlmMo	Parameter M_0 , semi-circles [4,5,6,7]. Scale factor 2 ⁻¹⁵ semi-circles.
midiAlmaf0	Parameter a_{f0} , seconds [4,5,6,7]. Scale factor 2 ⁻²⁰ seconds.
midiAlmaf1	Parameter a_{f1} , sec/sec [4,5,6,7]. Scale factor 2 ⁻³⁷ seconds/second.
midiAlmL1Health	Parameter L1 Health, dimensionless [4,5,6,7].
midiAlmL2Health	Parameter L2 Health, dimensionless [4,5,6,7].
midiAlmL5Health	Parameter L5 Health, dimensionless [4,5,6,7].

— AlmanacGLONASS-AlmanacSet

```
-- ASN1START

AlmanacGLONASS-AlmanacSet ::= SEQUENCE {
    gloAlm-NA                INTEGER (1..1461),
    gloAlmnA                 INTEGER (1..24),
    gloAlmHA                 INTEGER (0..31),
    gloAlmLambdaA             INTEGER (-1048576..1048575),
    gloAlmtlambdaA            INTEGER (0..2097151),
    gloAlmDeltaIa              INTEGER (-131072..131071),
    gloAlmDeltaTA              INTEGER (-2097152..2097151),
    gloAlmDeltaTdotA           INTEGER (-64..63),
    gloAlmEpsilonA              INTEGER (0..32767),
    gloAlmOmegaA               INTEGER (-32768..32767),
    gloAlmTauA                INTEGER (-512..511),
    gloAlmCA                  INTEGER (0..1),
    gloAlmMA                  BIT STRING (SIZE(2))          OPTIONAL, -- Need ON
    ...
}

-- ASN1STOP
```

<i>AlmanacGLONASS-AlmanacSet</i> field descriptions	
<i>gloAlm-NA</i>	Parameter N^A , days [9]. Scale factor 1 days.
<i>gloAlmna</i>	Parameter n^A , dimensionless [9].
<i>gloAlmHA</i>	Parameter H_n^A , dimensionless [9].
<i>gloAlmLambdaA</i>	Parameter λ_n^A , semi-circles [9]. Scale factor 2^{-20} semi-circles.
<i>gloAlmtlambdaA</i>	Parameter $t_{\lambda n}^A$, seconds [9]. Scale factor 2^{-5} seconds.
<i>gloAlmDeltala</i>	Parameter Δi_n^A , semi-circles [9]. Scale factor 2^{-20} semi-circles.
<i>gloAlmDeltaTA</i>	Parameter ΔT_n^A , sec/orbit period [9]. Scale factor 2^{-9} seconds/orbit period.
<i>gloAlmDeltaTdotA</i>	Parameter $\Delta T_{_DOT}n^A$, sec/orbit period ² [9]. Scale factor 2^{-14} seconds/orbit period ² .
<i>gloAlmEpsilonA</i>	Parameter ϵ_n^A , dimensionless [9]. Scale factor 2^{-20} .
<i>gloAlmOmegaA</i>	Parameter ω_n^A , semi-circles [9]. Scale factor 2^{-15} semi-circles.
<i>gloAlmTauA</i>	Parameter τ_n^A , seconds [9]. Scale factor 2^{-18} seconds.
<i>gloAlmCA</i>	Parameter C_n^A , dimensionless [9].
<i>gloAlmMA</i>	Parameter M_n^A , dimensionless [9]. This parameter is present if its value is nonzero; otherwise it is not present.

— *AlmanacECEF-SBAS-AlmanacSet*

-- ASN1START

```
AlmanacECEF-SBAS-AlmanacSet ::= SEQUENCE {
    sbasAlmDataID      INTEGER (0..3),
    svID                SV-ID,
    sbasAlmHealth       BIT STRING (SIZE(8)),
    sbasAlmXg           INTEGER (-16384..16383),
    sbasAlmYg           INTEGER (-16384..16383),
    sbasAlmZg           INTEGER (-256..255),
    sbasAlmXgdot        INTEGER (-4..3),
    sbasAlmYgDot        INTEGER (-4..3),
    sbasAlmZgDot        INTEGER (-8..7),
    sbasAlmTo            INTEGER (0..2047),
    ...
}
```

-- ASN1STOP

<i>AlmanacECEF-SBAS-AlmanacSet</i> field descriptions	
<i>sbasAlmDataID</i>	Parameter Data ID, dimensionless [10].
<i>svID</i>	This field identifies the satellite for which the GNSS Almanac Model is given.
<i>sbasAlmHealth</i>	Parameter Health, dimensionless [10].
<i>sbasAlmXg</i>	Parameter X _G , meters [10]. Scale factor 2600 meters.
<i>sbasAlmYg</i>	Parameter Y _G , meters [10]. Scale factor 2600 meters.
<i>sbasAlmZg</i>	Parameter Z _G , meters [10]. Scale factor 26000 meters.
<i>sbasAlmXgdot</i>	Parameter X _G Rat-of-Change, meters/sec [10]. Scale factor 10 meters/second.
<i>sbasAlmYgDot</i>	Parameter Y _G Rate-of-Change, meters/sec [10]. Scale factor 10 meters/second.
<i>sbasAlmZgDot</i>	Parameter Z _G Rate-of-Change, meters/sec [10]. Scale factor 40.96 meters/second.
<i>sbasAlmTo</i>	Parameter t ₀ , seconds [10]. Scale factor 64 meters/seconds.

— *AlmanacBDS-AlmanacSet*

```
-- ASN1START

AlmanacBDS-AlmanacSet-r12 ::= SEQUENCE {
    svID                      SV-ID,
    bdsAlmToa-r12              INTEGER (0..255)                                OPTIONAL,   -- Cond NotSameForAllSV
    bdsAlmSqrtA-r12            INTEGER (0..16777215),
    bdsAlmE-r12                INTEGER (0..131071),
    bdsAlmW-r12                INTEGER (-8388608..8388607),
    bdsAlmM0-r12               INTEGER (-8388608..8388607),
    bdsAlmOmega0-r12            INTEGER (-8388608..8388607),
    bdsAlmOmegaDot-r12          INTEGER (-65536..65535),
    bdsAlmDeltaI-r12            INTEGER (-32768..32767),
    bdsAlmA0-r12                INTEGER (-1024..1023),
    bdsAlmA1-r12                INTEGER (-1024..1023),
    bdsSvHealth-r12             BIT STRING (SIZE(9))                                OPTIONAL,   -- Cond SV-ID
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>NotSameForAllSV</i>	This field may be present if the t _{oa} is not the same for all SVs; otherwise it is not present and the t _{oa} is provided in <i>GNSS-Almanac</i> .
<i>SV-ID</i>	This field is mandatory present if <i>SV-ID</i> is between 0 and 29; otherwise it is not present.

<i>AlmanacBDS-AlmanacSet</i> field descriptions	
svID	This field identifies the satellite for which the GNSS Almanac Model is given.
bdsAlmToa	Parameter t_{oa} , Almanac reference time(seconds) [23] Scale factor 2^{12} seconds.
bdsAlmSqrtA	Parameter $A^{1/2}$, Square root of semi-major axis (meters $^{1/2}$) [23] Scale factor 2^{-11} meters $^{1/2}$.
bdsAlmE	Parameter e, Eccentricity , dimensionless [23] Scale factor 2^{-21} .
bdsAlmW	Parameter ω , Argument of Perigee (semi-circles) [23] Scale factor 2^{-23} semi-circles.
bdsAlmM0	Parameter M_0 , Mean anomaly at reference time (semi-circles) [23] Scale factor 2^{-23} semi-circles.
bdsAlmOmega0	Parameter Ω_0 , Longitude of ascending node of orbital plane computed according to reference time (semi-circles) [23] Scale factor 2^{-23} semi-circles.
bdsAlmOmegaDot	Parameter $\dot{\Omega}$, Rate of right ascension (semi-circles/sec) [23] Scale factor 2^{-38} semi-circles/sec.
bdsAlmDeltaI	Parameter δ_i , Correction of orbit reference inclination at reference time (semi-circles) [23] Scale factor 2^{-19} semi-circles.
bdsAlmA0	Parameter a_0 , Satellite clock bias (seconds) [23] Scale factor 2^{-20} seconds.
bdsAlmA1	Parameter a_1 , Satellite clock rate (sec/sec) [23] Scale factor 2^{-38} sec/sec.
bdsSvHealth	This field indicates satellites health information as defined in [23] Table 5-15. The left most bit is the MSB.

— *GNSS-UTC-Model*

The IE *GNSS-UTC-Model* is used by the location server to provide several sets of parameters needed to relate GNSS system time to Universal Time Coordinate (UTC), as defined in [4], [5], [6], [7], [8], [9], [10], [23].

The UTC time standard, UTC(k), is GNSS specific. E.g., if *GNSS-ID* indicates GPS, *GNSS-UTC-Model* contains a set of parameters needed to relate GPS system time to UTC(USNO); if *GNSS-ID* indicates QZSS, *GNSS-UTC-Model* contains a set of parameters needed to relate QZST to UTC(NICT); if *GNSS-ID* indicates GLONASS, *GNSS-UTC-Model* contains a set of parameters needed to relate GLONASS system time to UTC(RU); if *GNSS-ID* indicates SBAS, *GNSS-UTC-Model* contains a set of parameters needed to relate SBAS network time for the SBAS indicated by *SBAS-ID* to the UTC standard defined by the UTC Standard ID; if *GNSS-ID* indicates BDS, *GNSS-UTC-Model* contains a set of parameters needed to relate BDS system time to UTC (NTSC).

```
-- ASN1START

GNSS-UTC-Model ::= CHOICE {
    utcModel11      UTC-ModelSet1,          -- Model-1
    utcModel12      UTC-ModelSet2,          -- Model-2
    utcModel13      UTC-ModelSet3,          -- Model-3
    utcModel14      UTC-ModelSet4,          -- Model-4
    ...
    utcModel15-r12   UTC-ModelSet5-r12     -- Model-5
}

-- ASN1STOP
```

— *UTC-ModelSet1*

```
-- ASN1START
```

```

UTC-ModelSet1 ::= SEQUENCE {
    gnss-Utc-A1      INTEGER (-8388608..8388607),
    gnss-Utc-A0      INTEGER (-2147483648..2147483647),
    gnss-Utc-Tot     INTEGER (0..255),
    gnss-Utc-WNT     INTEGER (0..255),
    gnss-Utc-DeltaTls INTEGER (-128..127),
    gnss-Utc-WNlsf   INTEGER (0..255),
    gnss-Utc-DN      INTEGER (-128..127),
    gnss-Utc-DeltaTlsf INTEGER (-128..127),
    ...
}

-- ASN1STOP

```

UTC-ModelSet1 field descriptions

gnss-Utc-A1

Parameter A₁, scale factor 2⁻⁵⁰ seconds/second [4,7,8].

gnss-Utc-A0

Parameter A₀, scale factor 2⁻³⁰ seconds [4,7,8].

gnss-Utc-Tot

Parameter t_{tot}, scale factor 2¹² seconds [4,7,8].

gnss-Utc-WNT

Parameter WN_t, scale factor 1 week [4,7,8].

gnss-Utc-DeltaTls

Parameter Δt_{LS}, scale factor 1 second [4,7,8].

gnss-Utc-WNlsf

Parameter WN_{LSF}, scale factor 1 week [4,7,8].

gnss-Utc-DN

Parameter DN, scale factor 1 day [4,7,8].

gnss-Utc-DeltaTlsf

Parameter Δt_{LSF}, scale factor 1 second [4,7,8].

UTC-ModelSet2

```

-- ASN1START

UTC-ModelSet2 ::= SEQUENCE {
    utcA0          INTEGER (-32768..32767),
    utcA1          INTEGER (-4096..4095),
    utcA2          INTEGER (-64..63),
    utcDeltaTls    INTEGER (-128..127),
    utcTot         INTEGER (0..65535),
    utcWNot        INTEGER (0..8191),
    utcWNlsf       INTEGER (0..255),
    utcDN          BIT STRING (SIZE(4)),
    utcDeltaTlsf   INTEGER (-128..127),
    ...
}

-- ASN1STOP

```

UTC-ModelSet2 field descriptions

utcA0

Parameter A_{0-n}, bias coefficient of GNSS time scale relative to UTC time scale (seconds) [4,5,6,7].
Scale factor 2⁻³⁵ seconds.

utcA1

Parameter A_{1-n}, drift coefficient of GNSS time scale relative to UTC time scale (sec/sec) [4,5,6,7].
Scale factor 2⁻⁵¹ seconds/second.

utcA2

Parameter A_{2-n}, drift rate correction coefficient of GNSS time scale relative to UTC time scale (sec/sec²) [4,5,6,7].
Scale factor 2⁻⁶⁸ seconds/second².

utcDeltaTls

Parameter Δt_{LS}, current or past leap second count (seconds) [4,5,6,7].
Scale factor 1 second.

utcTot

Parameter t_{tot}, time data reference time of week (seconds) [4,5,6,7].
Scale factor 2⁴ seconds.

<i>UTC-ModelSet2 field descriptions</i>	
<i>utcWNot</i>	Parameter WN _{ot} , time data reference week number (weeks) [4,5,6,7]. Scale factor 1 week.
<i>utcWNLsf</i>	Parameter WN _{LSF} , leap second reference week number (weeks) [4,5,6,7]. Scale factor 1 week.
<i>utcDN</i>	Parameter DN, leap second reference day number (days) [4,5,6,7]. Scale factor 1 day.
<i>utcDeltaTlsf</i>	Parameter Δt _{LSF} , current or future leap second count (seconds) [4,5,6,7]. Scale factor 1 second.

— *UTC-ModelSet3*

```
-- ASN1START

UTC-ModelSet3 ::= SEQUENCE {
    nA              INTEGER (1..1461),
    tauC            INTEGER (-2147483648..2147483647),
    b1              INTEGER (-1024..1023)                      OPTIONAL, -- Cond GLONASS-M
    b2              INTEGER (-512..511)                        OPTIONAL, -- Cond GLONASS-M
    kp              BIT STRING (SIZE(2))                     OPTIONAL, -- Cond GLONASS-M
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
GLONASS-M	The field is mandatory present if GLONASS-M satellites are present in the current GLONASS constellation; otherwise it is not present.

<i>UTC-ModelSet3 field descriptions</i>	
<i>nA</i>	Parameter N ^A , callendar day number within four-year period beginning since the leap year (days) [9]. Scale factor 1 day.
<i>tauc</i>	Parameter τ _c , GLONASS time scale correction to UTC(SU) (seconds) [9]. Scale factor 2 ⁻³¹ seconds.
<i>b1</i>	Parameter B1, coefficient to determine ΔUT1 (seconds) [9]. Scale factor 2 ⁻¹⁰ seconds.
<i>b2</i>	Parameter B2, coefficient to determine ΔUT1 (seconds/msd) [9]. Scale factor 2 ⁻¹⁶ seconds/msd.
<i>kp</i>	Parameter KP, notification of expected leap second correction (dimensionless) [9].

— *UTC-ModelSet4*

```
-- ASN1START

UTC-ModelSet4 ::= SEQUENCE {
    utcA1wnt          INTEGER (-8388608..8388607),
    utcA0wnt          INTEGER (-2147483648..2147483647),
    utcTot            INTEGER (0..255),
    utcWNt            INTEGER (0..255),
    utcDeltaTls       INTEGER (-128..127),
    utcWNLsf          INTEGER (0..255),
    utcDN             INTEGER (-128..127),
    utcDeltaTlsf      INTEGER (-128..127),
    utcStandardID     INTEGER (0..7),
    ...
}
```

-- ASN1STOP

UTC-ModelSet4 field descriptions	
utcA1wnt	Parameter A _{1WNT} , sec/sec ([10], Message Type 12). Scale factor 2 ⁻⁵⁰ seconds/second.
utcA0wnt	Parameter A _{0WNT} , seconds ([10], Message Type 12). Scale factor 2 ⁻³⁰ seconds.
utcTot	Parameter tot, seconds ([10], Message Type 12). Scale factor 2 ¹² seconds.
utcWNt	Parameter WN _t , weeks ([10], Message Type 12). Scale factor 1 week.
utcDeltaTls	Parameter Δt _{LS} , seconds ([10], Message Type 12). Scale factor 1 second.
utcWNlsf	Parameter WN _{LSF} , weeks ([10], Message Type 12). Scale factor 1 week.
utcDN	Parameter DN, days ([10], Message Type 12). Scale factor 1 day.
utcDeltaTlsf	Parameter Δt _{LSF} , seconds ([10], Message Type 12). Scale factor 1 second.
utcStandardID	If GNSS-ID indicates 'sbas', this field indicates the UTC standard used for the SBAS network time indicated by SBAS-ID to UTC relation as defined in the table Value of UTC Standard ID to UTC Standard relation shown below ([10], Message Type 12).

Value of UTC Standard ID to UTC Standard relation

Value of UTC Standard ID	UTC Standard
0	UTC as operated by the Communications Research Laboratory (CRL), Tokyo, Japan
1	UTC as operated by the National Institute of Standards and Technology (NIST)
2	UTC as operated by the U. S. Naval Observatory (USNO)
3	UTC as operated by the International Bureau of Weights and Measures (BIPM)
4-7	Reserved for future definition

UTC-ModelSet5

-- ASN1START

```
UTC-ModelSet5-r12 ::= SEQUENCE {
    utcA0-r12      INTEGER (-2147483648..2147483647),
    utcA1-r12      INTEGER (-8388608..8388607),
    utcDeltaTls-r12 INTEGER (-128..127),
    utcWNlsf-r12   INTEGER (0..255),
    utcDN-r12      INTEGER (0..255),
    utcDeltaTlsf-r12 INTEGER (-128..127),
    ...
}
```

-- ASN1STOP

UTC-ModelSet5 field descriptions	
utcA0	Parameter A _{0UTC} , BDS clock bias relative to UTC, seconds [23]. Scale factor 2 ⁻³⁰ seconds.

<i>UTC-ModelSet5 field descriptions</i>	
<i>utcA1</i>	Parameter $A_{1\text{UTC}}$, BDS clock rate relative to UTC, sec/sec [23]. Scale factor 2^{-50} sec/sec.
<i>utcDeltaTls</i>	Parameter Δt_{LS} , delta time due to leap seconds before the new leap second effective, seconds [23]. Scale factor 1 second.
<i>utcWNlsf</i>	Parameter WN_{LSF} , week number of the new leap second, weeks [23]. Scale factor 1 week.
<i>utcDN</i>	Parameter DN , day number of week of the new leap second, days [23]. Scale factor 1 day.
<i>utcDeltaTlsf</i>	Parameter Δt_{LSF} , delta time due to leap seconds after the new leap second effective, seconds [23]. Scale factor 1 second.

— *GNSS-AuxiliaryInformation*

The IE *GNSS-AuxiliaryInformation* is used by the location server to provide additional information dependent on the *GNSS-ID*. If *GNSS-AuxiliaryInformation* is provided together with other satellite dependent GNSS assistance data (i.e., any of *GNSS-DifferentialCorrections*, *GNSS-NavigationModel*, *GNSS-DataBitAssistance*, or *GNSS-AcquisitionAssistance* IEs), the *GNSS-AuxiliaryInformation* should be provided for the same satellites and in the same LPP message as the other satellite dependent GNSS assistance data.

```
-- ASN1START

GNSS-AuxiliaryInformation ::= CHOICE {
    gnss-ID-GPS      GNSS-ID-GPS,
    gnss-ID-GLONASS  GNSS-ID-GLONASS,
    ...
}

GNSS-ID-GPS ::= SEQUENCE (SIZE(1..64)) OF GNSS-ID-GPS-SatElement

GNSS-ID-GPS-SatElement ::= SEQUENCE {
    svID              SV-ID,
    signalsAvailable  GNSS-SignalIDs,
    ...
}

GNSS-ID-GLONASS ::= SEQUENCE (SIZE(1..64)) OF GNSS-ID-GLONASS-SatElement

GNSS-ID-GLONASS-SatElement ::= SEQUENCE {
    svID              SV-ID,
    signalsAvailable  GNSS-SignalIDs,
    channelNumber     INTEGER (-7..13)      OPTIONAL,          -- Cond FDMA
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>FDMA</i>	The field is mandatory present if the GLONASS SV indicated by <i>svID</i> broadcasts FDMA signals; otherwise it is not present.

<i>GNSS-AuxiliaryInformation</i> field descriptions	
<i>gnss-ID-GPS</i>	This choice may only be present if <i>GNSS-ID</i> indicates GPS.
<i>gnss-ID-GLONASS</i>	This choice may only be present if <i>GNSS-ID</i> indicates GLONASS.
<i>svID</i>	This field specifies the GNSS SV for which the <i>GNSS-AuxiliaryInformation</i> is given.
<i>signalsAvailable</i>	This field indicates the ranging signals supported by the satellite indicated by <i>svID</i> . This field is given as a bit string as defined in <i>GNSS-SignalIDs</i> for a particular GNSS. If a bit is set to '1' it indicates that the satellite identified by <i>svID</i> transmits ranging signals according to the signal correspondence in <i>GNSS-SignalIDs</i> . If a bit is set to '0' it indicates that the corresponding signal is not supported on the satellite identified by <i>svID</i> .
<i>channelNumber</i>	This field indicates the GLONASS carrier frequency number of the satellite identified by <i>svID</i> , as defined in [9].

BDS-DifferentialCorrections

The IE *BDS-DifferentialCorrections* is used by the location server to provide differential corrections to the target device.

```
-- ASN1START

BDS-DifferentialCorrections-r12 ::= SEQUENCE {
    dbds-RefTime-r12           INTEGER (0..3599),
    bds-SgnTypeList-r12         BDS-SgnTypeList-r12,
    ...
}

BDS-SgnTypeList-r12 ::= SEQUENCE (SIZE (1..3)) OF BDS-SgnTypeElement-r12

BDS-SgnTypeElement-r12 ::= SEQUENCE {
    gnss-SignalID               GNSS-SignalID           OPTIONAL, -- Need ON
    dbds-CorrectionList-r12     DBDS-CorrectionList-r12,
    ...
}

DBDS-CorrectionList-r12 ::= SEQUENCE (SIZE (1..64)) OF DBDS-CorrectionElement-r12

DBDS-CorrectionElement-r12 ::= SEQUENCE {
    svID                         SV-ID,
    bds-UDREI-r12                INTEGER (0..15),
    bds-RURAI-r12                INTEGER (0..15),
    bds-ECC-DeltaT-r12            INTEGER (-4096..4095),
    ...
}

-- ASN1STOP
```

<i>BDS-DifferentialCorrections</i> field descriptions	
<i>dbds-RefTime</i>	This field specifies the time for which the differential corrections are valid, modulo 1 hour. <i>dbds-RefTime</i> is given in BDS system time. Scale factor 1-second.
<i>bds-UDREI</i>	This field indicates user differential range error information by user differential range error index (UDREI) as defined in [23], 5.3.3.7.2.
<i>bds-RURAI</i>	This field indicates Regional User Range Accuracy (RURA) information by Regional User Range Accuracy Index (UDREI) as defined in [23, 5.3.3.6].
<i>bds-ECC-DeltaT</i>	This field indicates the BDS differential correction information which is expressed in equivalent clock correction (Δt). Add the value of Δt to the observed pseudo-range to correct the effect caused by the satellite clock offset and ephemeris error. Value -4096 means the Δt is not available. The scale factor is 0.1 meter.

BDS-GridModelParameter

```
-- ASN1START

BDS-GridModelParameter-r12 ::= SEQUENCE {
    bds-RefTime-r12      INTEGER (0..3599),
    gridIonList-r12      GridIonList-r12,
    ...
}

GridIonList-r12 ::= SEQUENCE (SIZE (1..320)) OF GridIonElement-r12

GridIonElement-r12 ::= SEQUENCE {
    iga-ID-r12           INTEGER (1..320),
    dt-r12                INTEGER (0..511),
    givei-r12             INTEGER (0..15) ,
    ...
}

-- ASN1STOP
```

***BDS-GridModelParameter* field descriptions**

bds-RefTime

This field specifies the time for which the grid model parameters are valid, modulo 1 hour. *bds-RefTime* is given in BDS system time.

Scale factor 1-second.

gridIonList

This list provides ionospheric grid point information for each grid point. Up to 16 instances are used in this version of the specification. The values 17 to 320 are reserved for future use.

iga-ID

This field indicates the ionospheric grid point (IGP) number as defined in [23, 5.3.3.8].

dt

This field indicates *dt* as defined in [23, 5.3.3.8.1], i.e. the vertical delay at the corresponding IGP indicated by *iga-ID*. The scale factor is 0.125 meter.

givei

This field indicates the Grid Ionospheric Vertical Error Index (GIVEI) which is used to describe the delay correction accuracy at ionospheric grid point indicated by *iga-ID*, the mapping between GIVEI and GIVE is defined in [23, 5.3.3.8.2].

6.5.2.3 GNSS Assistance Data Request

A-GNSS-RequestAssistanceData

The IE *A-GNSS-RequestAssistanceData* is used by the target device to request GNSS assistance data from a location server.

```
-- ASN1START

A-GNSS-RequestAssistanceData ::= SEQUENCE {
    gnss-CommonAssistDataReq      GNSS-CommonAssistDataReq      OPTIONAL, -- Cond CommonADReq
    gnss-GenericAssistDataReq     GNSS-GenericAssistDataReq   OPTIONAL, -- Cond GenADReq
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>CommonADReq</i>	The field is mandatory present if the target device requests <i>GNSS-CommonAssistData</i> ; otherwise it is not present.
<i>GenADReq</i>	This field is mandatory present if the target device requests <i>GNSS-GenericAssistData</i> for one or more specific GNSS; otherwise it is not present.

— GNSS-CommonAssistDataReq

The IE *GNSS-CommonAssistDataReq* is used by the target device to request assistance data that are applicable to any GNSS from a location server.

```
-- ASN1START

GNSS-CommonAssistDataReq ::= SEQUENCE {
    gnss-ReferenceTimeReq           GNSS-ReferenceTimeReq
                                    OPTIONAL, -- Cond RefTimeReq
    gnss-ReferenceLocationReq       GNSS-ReferenceLocationReq
                                    OPTIONAL, -- Cond RefLocReq
    gnss-IonosphericModelReq       GNSS-IonosphericModelReq
                                    OPTIONAL, -- Cond IonoModReq
    gnss-EarthOrientationParametersReq  GNSS-EarthOrientationParametersReq
                                    OPTIONAL, -- Cond EOPReq
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>RefTimeReq</i>	The field is mandatory present if the target device requests <i>GNSS-ReferenceTime</i> ; otherwise it is not present.
<i>RefLocReq</i>	This field is mandatory present if the target device requests <i>GNSS-ReferenceLocation</i> ; otherwise it is not present.
<i>IonoModReq</i>	This field is mandatory present if the target device requests <i>GNSS-IonosphericModel</i> ; otherwise it is not present.
<i>EOPReq</i>	This field is mandatory present if the target device requests <i>GNSS-EarthOrientationParameters</i> ; otherwise it is not present.

— GNSS-GenericAssistDataReq

The IE *GNSS-GenericAssistDataReq* is used by the target device to request assistance data from a location server for one or more specific GNSS (e.g., GPS, Galileo, GLONASS, BDS, etc.). The specific GNSS for which the assistance data are requested is indicated by the IE *GNSS-ID* and (if applicable) by the IE *SBAS-ID*. Assistance for up to 16 GNSSs can be requested.

```
-- ASN1START

GNSS-GenericAssistDataReq ::= SEQUENCE (SIZE (1..16)) OF GNSS-GenericAssistDataReqElement

GNSS-GenericAssistDataReqElement ::= SEQUENCE {
    gnss-ID                  GNSS-ID,
    sbas-ID                  SBAS-ID
                                    OPTIONAL, -- Cond GNSS-ID-SBAS
    gnss-TimeModelsReq        GNSS-TimeModelListReq
                                    OPTIONAL, -- Cond TimeModReq
    gnss-DifferentialCorrectionsReq  GNSS-DifferentialCorrectionsReq
                                    OPTIONAL, -- Cond DGNSS-Req
    gnss-NavigationModelReq   GNSS-NavigationModelReq
                                    OPTIONAL, -- Cond NavModReq
    gnss-RealTimeIntegrityReq GNSS-RealTimeIntegrityReq
                                    OPTIONAL, -- Cond RTIReq
    gnss-DataBitAssistanceReq GNSS-DataBitAssistanceReq
                                    OPTIONAL, -- Cond DataBitsReq
    gnss-AcquisitionAssistanceReq  GNSS-AcquisitionAssistanceReq
                                    OPTIONAL, -- Cond AcquAssistReq
    gnss-AlmanacReq            GNSS-AlmanacReq
                                    OPTIONAL, -- Cond AlmanacReq
    gnss-UTCModelReq           GNSS-UTC-ModelReq
                                    OPTIONAL, -- Cond UTCModReq
    gnss-AuxiliaryInformationReq  GNSS-AuxiliaryInformationReq
                                    OPTIONAL, -- Cond AuxInfoReq
    ...
    [
        bds-DifferentialCorrectionsReq-r12
            BDS-DifferentialCorrectionsReq-r12
                OPTIONAL, -- Cond DBDS-Req
        bds-GridModelReq-r12
            BDS-GridModelReq-r12
                OPTIONAL -- Cond BDS-GridModReq
    ]
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>GNSS-ID-SBAS</i>	The field is mandatory present if the <i>GNSS-ID</i> = <i>sbas</i> ; otherwise it is not present.
<i>TimeModReq</i>	The field is mandatory present if the target device requests <i>GNSS-TimeModelList</i> ; otherwise it is not present.

Conditional presence	Explanation
DGNSS-Req	The field is mandatory present if the target device requests <i>GNSS-DifferentialCorrections</i> ; otherwise it is not present.
NavModReq	The field is mandatory present if the target device requests <i>GNSS-NavigationModel</i> ; otherwise it is not present.
RTIReq	The field is mandatory present if the target device requests <i>GNSS-RealTimeIntegrity</i> ; otherwise it is not present.
DataBitsReq	The field is mandatory present if the target device requests <i>GNSS-DataBitAssistance</i> ; otherwise it is not present.
AcquAssistReq	The field is mandatory present if the target device requests <i>GNSS-AcquisitionAssistance</i> ; otherwise it is not present.
AlmanacReq	The field is mandatory present if the target device requests <i>GNSS-Almanac</i> ; otherwise it is not present.
UTCModReq	The field is mandatory present if the target device requests <i>GNSS-UTCMODEL</i> ; otherwise it is not present.
AuxInfoReq	The field is mandatory present if the target device requests <i>GNSS-AuxiliaryInformation</i> ; otherwise it is not present.
DBDS-Req	The field is mandatory present if the target device requests <i>BDS-DifferentialCorrections</i> ; otherwise it is not present. This field may only be present if gnss-ID indicates 'bds'.
BDS-GridModReq	The field is mandatory present if the target device requests <i>BDS-GridModel</i> ; otherwise it is not present. This field may only be present if gnss-ID indicates 'bds'.

6.5.2.4 GNSS Assistance Data Request Elements

- *GNSS-ReferenceTimeReq*

The IE *GNSS-ReferenceTimeReq* is used by the target device to request the *GNSS-ReferenceTime* assistance from the location server.

```
-- ASN1START
GNSS-ReferenceTimeReq ::= SEQUENCE {
    gnss-TimeReqPrefList      SEQUENCE (SIZE (1..8)) OF GNSS-ID,
    gps-TOW-assistReq         BOOLEAN                               OPTIONAL, -- Cond gps
    notOfLeapSecReq           BOOLEAN                               OPTIONAL, -- Cond glonass
    ...
}
-- ASN1STOP
```

Conditional presence	Explanation
<i>gps</i>	The field is mandatory present if <i>gnss-TimeReqPrefList</i> includes a <i>GNSS-ID= 'gps'</i> ; otherwise it is not present.
<i>glonass</i>	The field is mandatory present if <i>gnss-TimeReqPrefList</i> includes a <i>GNSS-ID= 'glonass'</i> ; otherwise it is not present.

<i>GNSS-ReferenceTimeReq</i> field descriptions	
<i>gnss-TimeReqPrefList</i>	This field is used by the target device to request the system time for a specific GNSS, specified by GNSS-ID in the order of preference. The first GNSS-ID in the list is the most preferred GNSS for reference time, the second GNSS-ID is the second most preferred, etc.
<i>gps-TOW-assistReq</i>	This field is used by the target device to request the <i>gps-TOW-Assist</i> field in <i>GNSS-SystemTime</i> . TRUE means requested.
<i>notOfLeapSecReq</i>	This field is used by the target device to request the <i>notificationOfLeapSecond</i> field in <i>GNSS-SystemTime</i> . TRUE means requested.

- *GNSS-ReferenceLocationReq*

The IE *GNSS-ReferenceLocationReq* is used by the target device to request the *GNSS-ReferenceLocation* assistance from the location server.

```
-- ASN1START
GNSS-ReferenceLocationReq ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

– *GNSS-IonosphericModelReq*

The IE *GNSS-IonosphericModelReq* is used by the target device to request the *GNSS-IonosphericModel* assistance from the location server.

```
-- ASN1START
GNSS-IonosphericModelReq ::= SEQUENCE {
    klobucharModelReq      BIT STRING (SIZE(2))      OPTIONAL, -- Cond klobuchar
    neQuickModelReq        NULL                  OPTIONAL, -- Cond nequick
    ...
}
-- ASN1STOP
```

Conditional presence	Explanation
<i>klobuchar</i>	The field is mandatory present if the target device requests <i>klobucharModel</i> ; otherwise it is not present. The BIT STRING defines the dataID requested, defined in IE <i>KlobucharModelParameter</i> .
<i>nequick</i>	The field is mandatory present if the target device requests <i>neQuickModel</i> ; otherwise it is not present.

– *GNSS-EarthOrientationParametersReq*

The IE *GNSS-EarthOrientationParametersReq* is used by the target device to request the *GNSS-EarthOrientationParameters* assistance from the location server.

```
-- ASN1START
GNSS-EarthOrientationParametersReq ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

– *GNSS-TimeModelListReq*

The IE *GNSS-TimeModelListReq* is used by the target device to request the *GNSS-TimeModelElement* assistance from the location server.

```
-- ASN1START
GNSS-TimeModelListReq ::= SEQUENCE (SIZE(1..15)) OF GNSS-TimeModelElementReq

GNSS-TimeModelElementReq ::= SEQUENCE {
    gnss-TO-IDsReq   INTEGER (1..15),
    deltaTreq        BOOLEAN,
    ...
}
-- ASN1STOP
```

GNSS-TimeModelElementReq field descriptions

gnss-TO-IDsReq

This field specifies the requested *gnss-TO-ID*. The meaning and encoding is the same as the *gnss-TO-ID* field in the *GNSS-TimeModelElement* IE.

***GNSS-TimeModelElementReq* field descriptions**

deltaTreq

This field specifies whether or not the location server is requested to include the *deltaT* field in the *GNSS-TimeModelElement* IE. TRUE means requested.

— *GNSS-DifferentialCorrectionsReq*

The IE *GNSS-DifferentialCorrectionsReq* is used by the target device to request the *GNSS-DifferentialCorrections* assistance from the location server.

```
-- ASN1START

GNSS-DifferentialCorrectionsReq ::= SEQUENCE {
    dgnss-SignalsReq      GNSS-SignalIDs,
    dgnss-ValidityTimeReq BOOLEAN,
    ...
}

-- ASN1STOP
```

***GNSS-DifferentialCorrectionsReq* field descriptions**

dgnss-SignalsReq

This field specifies the GNSS Signal(s) for which the *GNSS-DifferentialCorrections* are requested. A one-value at a bit position means DGNSS corrections for the specific signal are requested; a zero-value means not requested. The target device shall set a maximum of three bits to value 'one'.

dgnss-ValidityTimeReq

This field specifies whether the *udreGrowthRate* and *udreValidityTime* in *GNSS-DifferentialCorrections* are requested or not. TRUE means requested.

— *GNSS-NavigationModelReq*

The IE *GNSS-NavigationModelReq* is used by the target device to request the *GNSS-NavigationModel* assistance from the location server.

```
-- ASN1START

GNSS-NavigationModelReq ::= CHOICE {
    storedNavList      StoredNavListInfo,
    reqNavList         ReqNavListInfo,
    ...
}

StoredNavListInfo ::= SEQUENCE {
    gnss-WeekOrDay        INTEGER (0..4095),
    gnss-Toe              INTEGER (0..255),
    t-toeLimit           INTEGER (0..15),
    satListRelatedDataList SatListRelatedDataList OPTIONAL,
    ...
}

SatListRelatedDataList ::= SEQUENCE (SIZE (1..64)) OF SatListRelatedDataElement

SatListRelatedDataElement ::= SEQUENCE {
    svID                SV-ID,
    iod                 BIT STRING (SIZE(11)),
    clockModelID        INTEGER (1..8)          OPTIONAL,
    orbitModelID        INTEGER (1..8)          OPTIONAL,
    ...
}

ReqNavListInfo ::= SEQUENCE {
    svReqList            BIT STRING (SIZE (64)),
    clockModelID-PrefList SEQUENCE (SIZE (1..8)) OF INTEGER (1..8)      OPTIONAL,
    orbitModelID-PrefList SEQUENCE (SIZE (1..8)) OF INTEGER (1..8)      OPTIONAL,
    addNavparamReq       BOOLEAN               OPTIONAL, -- Cond orbitModelID-2
    ...
}
```

-- ASN1STOP

Conditional presence	Explanation
<i>orbitModelID-2</i>	The field is mandatory present if <i>orbitModelID-PrefList</i> is absent or includes a Model-ID = '2'; otherwise it is not present.

GNSS-NavigationModelReq field descriptions***storedNavList***

This list provides information to the location server about which GNSS-NavigationModel data the target device has currently stored for the particular GNSS indicated by *GNSS-ID*.

reqNavList

This list provides information to the location server which GNSS-NavigationModel data are requested by the target device.

gnss-WeekOrDay

If *GNSS-ID* does not indicate 'glonass', this field defines the GNSS Week number of the assistance currently held by the target device.

If *GNSS-ID* is set to 'glonass', this field defines the calendar number of day within the four-year interval starting from 1st of January in a leap year, as defined by the parameter N_T in [9] of the assistance currently held by the target device.

gnss-Toe

If *GNSS-ID* does not indicate 'glonass', this field defines the GNSS time of ephemeris in hours of the latest ephemeris set contained by the target device.

If *GNSS-ID* is set to 'glonass', this field defines the time of ephemeris in units of 15 minutes of the latest ephemeris set contained by the target device (range 0 to 95 representing time values between 0 and 1425 minutes). In this case, values 96 to 255 shall not be used by the sender.

t-toeLimit

If *GNSS-ID* does not indicate 'glonass', this IE defines the ephemeris age tolerance of the target device in units of hours.

If *GNSS-ID* is set to 'glonass', this IE defines the ephemeris age tolerance of the target device in units of 30 minutes.

satListRelatedDataList

This list defines the clock and orbit models currently held by the target device for each SV. This field is not included if the target device does not have any stored clock and orbit models for any SV.

svID

This field identifies the particular GNSS satellite.

iod

This field identifies the issue of data currently held by the target device.

clockModelID, orbitModelID

These fields define the clock and orbit model number currently held by the target device. If these fields are absent, the default interpretation of the table *GNSS-ID* to *clockModelID* & *orbitModelID* relation below applies.

svReqList

This field defines the SV for which the navigation model assistance is requested. Each bit position in this BIT STRING represents a *SV-ID*. Bit 0 represents *SV-ID=0* and bit 63 represents *SV-ID=63*. A one-value at a bit position means the navigation model data for the corresponding *SV-ID* is requested, a zero-value means not requested.

clockModelIDPrefList, orbitModelID-PrefList

These fields define the Model-IDs of the clock and orbit models that the target device wishes to obtain in the order of preference. The first Model-ID in the list is the most preferred model, the second Model-ID the second most preferred, etc. If these fields are absent, the default interpretation of the table *GNSS-ID* to *clockModelID-PrefList* & *orbitModelIDPrefList* relation below applies.

addNavparamReq

This field specifies whether the location server is requested to include the *addNAVparam* fields in *GNSS-NavigationModel* IE (*NavModel-NAVKepplerianSet* field) or not. TRUE means requested.

GNSS-ID to *clockModelID* & *orbitModelID* relation

<i>GNSS-ID</i>	<i>clockModelID</i>	<i>orbitModelID</i>
gps	2	2
sbas	5	5
qzss	2	2
galileo	1	1
glonass	4	4
bds	6	6

GNSS-ID to clockModelID-PrefList & orbitModelID-PrefList relation

GNSS-ID	clockModelID-PrefList	orbitModelID-PrefList
gps	Model-2	Model-2
sbas	Model-5	Model-5
qzss	Model-2	Model-2
galileo	Model-1	Model-1
glonass	Model-4	Model-4
bds	Model-6	Model-6

– *GNSS-RealTimeIntegrityReq*

The IE *GNSS-RealTimeIntegrityReq* is used by the target device to request the *GNSS-RealTimeIntegrity* assistance from the location server.

```
-- ASN1START

GNSS-RealTimeIntegrityReq ::= SEQUENCE {
    ...
}

-- ASN1STOP
```

– *GNSS-DataBitAssistanceReq*

The IE *GNSS-DataBitAssistanceReq* is used by the target device to request the *GNSS-DataBitAssistance* assistance from the location server.

```
-- ASN1START

GNSS-DataBitAssistanceReq ::= SEQUENCE {
    gnss-TOD-Req           INTEGER (0..3599),
    gnss-TOD-FracReq        INTEGER (0..999)      OPTIONAL,
    dataBitInterval          INTEGER (0..15),
    gnss-SignalType          GNSS-SignalIDs,
    gnss-DataBitsReq         GNSS-DataBitsReqSatList OPTIONAL,
    ...
}

GNSS-DataBitsReqSatList ::= SEQUENCE (SIZE(1..64)) OF GNSS-DataBitsReqSatElement

GNSS-DataBitsReqSatElement ::= SEQUENCE {
    svID                  SV-ID,
    ...
}

-- ASN1STOP
```

GNSS-DataBitAssistanceReq field descriptions

gnss-TOD-Req

This field specifies the reference time for the first data bit requested in GNSS specific system time, modulo 1 hour.
Scale factor 1 second.

gnss-TOD-FracReq

This field specifies the fractional part of *gnss-TOD-Req* in 1-milli-second resolution.
Scale factor 1 millisecond.

dataBitInterval

This field specifies the time length for which the Data Bit Assistance is requested. The *GNSS-DataBitAssistance* shall be relative to the time interval (*gnss-TOD-Req*, *gnss-TOD-Req* + *dataBitInterval*).

The *dataBitInterval* r , expressed in seconds, is mapped to a binary number K with the following formula:

$$r = 0.1 \times 2^K$$

Value K=15 means that the time interval is not specified.

gnss-SignalType

This field specifies the GNSS Signal(s) for which the *GNSS-DataBitAssistance* are requested. A one-value at a bit position means *GNSS-DataBitAssistance* for the specific signal is requested; a zero-value means not requested.

gnss-DataBitsReq

This list contains the SV-IDs for which the *GNSS-DataBitAssistance* is requested.

— *GNSS-AcquisitionAssistanceReq*

The IE *GNSS-AcquisitionAssistanceReq* is used by the target device to request the *GNSS-AcquisitionAssistance* assistance from the location server.

```
-- ASN1START
GNSS-AcquisitionAssistanceReq ::= SEQUENCE {
    gnss-SignalID-Req      GNSS-SignalID,
    ...
}
-- ASN1STOP
```

***GNSS-AcquisitionAssistanceReq* field descriptions**

gnss-SignalID-Req

This field specifies the GNSS signal type for which *GNSSAcquisitionAssistance* is requested.

— *GNSS-AlmanacReq*

The IE *GNSS-AlmanacReq* is used by the target device to request the *GNSS-Almanac* assistance from the location server.

```
-- ASN1START
GNSS-AlmanacReq ::= SEQUENCE {
    modelID          INTEGER(1..8)   OPTIONAL,
    ...
}
-- ASN1STOP
```

***GNSS-AlmanacReq* field descriptions**

modelID

This field specifies the Almanac Model ID requested. If this field is absent, the default interpretation as in the table *GNSS-ID* to *modelID* relation below applies.

GNSS-ID to *modelID* relation

<i>GNSS-ID</i>	<i>modelID</i>
gps	2
sbas	6
qzss	2
galileo	1
glonass	5
bds	7

— *GNSS-UTC-ModelReq*

The IE *GNSS-UTC-ModelReq* is used by the target device to request the *GNSS-UTC-Model* assistance from the location server.

```
-- ASN1START
GNSS-UTC-ModelReq ::= SEQUENCE {
    modelID          INTEGER(1..8)   OPTIONAL,
    ...
}
-- ASN1STOP
```

***GNSS-UTC-ModelReq* field descriptions**

modelID

This field specifies the *GNSS-UTCMODEL* set requested. If this field is absent, the default interpretation as in the table *GNSS-ID* to *modelID* relation below applies.

***GNSS-ID* to *modelID* relation**

<i>GNSS-ID</i>	<i>modelID</i>
gps	1
sbas	4
qzss	1
galileo	1
glonass	3
bds	5

– *GNSS-AuxiliaryInformationReq*

The IE *GNSS-AuxiliaryInformationReq* is used by the target device to request the *GNSS-AuxiliaryInformation* assistance from the location server.

```
-- ASN1START
GNSS-AuxiliaryInformationReq ::= SEQUENCE {
  ...
}
-- ASN1STOP
```

– *BDS-DifferentialCorrectionsReq*

The IE *BDS-DifferentialCorrectionsReq* is used by the target device to request the *BDS-DifferentialCorrections* assistance from the location server.

```
-- ASN1START
BDS-DifferentialCorrectionsReq-r12 ::= SEQUENCE {
  dgnss-SignalsReq          GNSS-SignalIDs,
  ...
}
-- ASN1STOP
```

***BDS-DifferentialCorrectionsReq* field descriptions**

dgnss-SignalsReq

This field specifies the BDS Signal(s) for which the *BDS-DifferentialCorrections* are requested. A one-value at a bit position means BDS differential corrections for the specific signal are requested; a zero-value means not requested. The target device shall set a maximum of three bits to value 'one'.

– *BDS-GridModelReq*

The IE *BDS-GridModelReq* is used by the target device to request the *BDS-GridModel* assistance from the location server.

```
-- ASN1START
BDS-GridModelReq-r12 ::= SEQUENCE {
  ...
}
-- ASN1STOP
```

6.5.2.5 GNSS Location Information

- *A-GNSS-ProvideLocationInformation*

The IE *A-GNSS-ProvideLocationInformation* is used by the target device to provide location measurements (e.g., pseudo-ranges, location estimate, velocity) to the location server, together with time information. It may also be used to provide GNSS positioning specific error reason.

```
-- ASN1START

A-GNSS-ProvideLocationInformation ::= SEQUENCE {
    gnss-SignalMeasurementInformation   GNSS-SignalMeasurementInformation      OPTIONAL,
    gnss-LocationInformation          GNSS-LocationInformation           OPTIONAL,
    gnss-Error                      A-GNSS-Error                     OPTIONAL,
    ...
}

-- ASN1STOP
```

6.5.2.6 GNSS Location Information Elements

- *GNSS-SignalMeasurementInformation*

The IE *GNSS-SignalMeasurementInformation* is used by the target device to provide GNSS signal measurement information to the location server and GNSS-network time association if requested by the location server. This information includes the measurements of code phase, Doppler, C/N₀ and optionally accumulated carrier phase, also called accumulated deltarange (ADR), which enable the UE-assisted GNSS method where position is computed in the location server. Figure 6.5.2.6-1 illustrates the relation between some of the fields.

```
-- ASN1START

GNSS-SignalMeasurementInformation ::= SEQUENCE {
    measurementReferenceTime        MeasurementReferenceTime,
    gnss-MeasurementList           GNSS-MeasurementList,
    ...
}

-- ASN1STOP
```

GNSS-SignalMeasurementInformation field descriptions

measurementReferenceTime

This field specifies the GNSS system time for which the information provided in *gnss-MeasurementList* is valid. It may also include network time, if requested by the location server and supported by the target device.

gnss-MeasurementList

This field provides GNSS signal measurement information for up to 16 GNSSs.

- *MeasurementReferenceTime*

The IE *MeasurementReferenceTime* is used to specify the time when the measurements provided in *A-GNSS-ProvideLocationInformation* are valid. It may also include GNSS-network time association, in which case reported measurements shall be valid for the cellular frame boundary defined in the network time association.

```
-- ASN1START

MeasurementReferenceTime ::= SEQUENCE {
    gnss-TOD-msec      INTEGER (0..3599999),
    gnss-TOD-frac      INTEGER (0..3999)           OPTIONAL,
    gnss-TOD-unc       INTEGER (0..127)            OPTIONAL,
    gnss-TimeID        GNSS-ID,
    networkTime        CHOICE {
        eUTRA      SEQUENCE {
            physCellId     INTEGER (0..503),
            cellGlobalId   CellGlobalIdEUTRA-AndUTRA   OPTIONAL,
            systemFrameNumber BIT STRING (SIZE (10)),
            ...
    }
}
```

```

        },
        uTRA      SEQUENCE {
          mode           CHOICE {
            fdd           SEQUENCE {
              primary-CPICH-Info   INTEGER (0..511),
              ...
              },
              tdd           SEQUENCE {
                cellParameters   INTEGER (0..127),
                ...
                }
              },
              cellGlobalId    CellGlobalIdEUTRA-AndUTRA
              referenceSystemFrameNumber OPTIONAL,
              INTEGER (0..4095),
              ...
            },
            gSM       SEQUENCE {
              bcchCarrier   INTEGER (0..1023),
              bsic          INTEGER (0..63),
              cellGlobalId  CellGlobalIdGERAN
              referenceFrame SEQUENCE {
                referenceFN    INTEGER (0..65535),
                referenceFNMSB  INTEGER (0..63)   OPTIONAL,
                ...
              },
              deltaGNSS-TOD  INTEGER (0 .. 127)   OPTIONAL,
              ...
            },
            ...
            nbIoT-r14    SEQUENCE {
              nbPhysCellId-r14  INTEGER (0..503),
              nbCellGlobalId-r14 ECGI
              OPTIONAL,
              sfn-r14         BIT STRING (SIZE (10)),
              hyperSFN-r14    BIT STRING (SIZE (10))   OPTIONAL,
              ...
            }
            OPTIONAL,
          ...
        }
        -- ASN1STOP
      
```

***MeasurementReferenceTime* field descriptions**

gnss-TOD-msec

This field specifies the GNSS TOD for which the measurements and/or location estimate are valid. The 22 bits of GNSS TOD are the least significant bits. The most significant bits shall be derived by the location server to unambiguously derive the GNSS TOD.

The value for GNSS TOD is derived from the GNSS specific system time indicated in *gnss-TimeID* rounded down to the nearest millisecond unit.

Scale factor 1 millisecond.

gnss-TOD-frac

This field specifies the fractional part of the GNSS TOD in 250 ns resolution. The total GNSS TOD is given by *gnss-TOD-msec* + *gnss-TOD-frac*.

Scale factor 250 nanoseconds.

gnss-TOD-unc

This field provides the accuracy of the relation GNSS-network time when GNSS-network time association is provided. When GNSS-network time association is not provided, this element can be included to provide the accuracy of the reported *gnss-TOD-msec*.

If GNSS TOD is the given GNSS time, then the true GNSS time, corresponding to the provided network time if applicable, as observed at the target device location, lies in the interval [GNSS TOD – *gnss-TOD-unc*, GNSS TOD + *gnss-TOD-unc*].

The uncertainty *r*, expressed in microseconds, is mapped to a number *K*, with the following formula:

$$r = C^*((1+x)^K - 1)$$

with *C* = 0.5 and *x* = 0.14. To encode any higher value of uncertainty than that corresponding in the above formula to *K*=127, the same value, *K*=127, shall also be used. The uncertainty is then coded on 7 bits, as the binary encoding of *K*. Examples of *gnss-TOD-unc* value are as in the table Value of *K* to Value of uncertainty relation below.

This field shall be included if the target device provides GNSS-network time relationship.

gnss-TimeID

This field specifies the GNSS system time for which the *gnss-TOD-msec* (and *gnss-TOD-frac* if applicable) is provided.

MeasurementReferenceTime field descriptions	
networkTime	These fields specify the network time event which the GNSS TOD time stamps. This field shall be included if the target device provides GNSS-network time relationship.
physCellId	This field identifies the reference cell, as defined in [12], that is used for the GNSS-network time relation.
cellGlobalId	This field specifies the globally unique cell identifier (Evolved Cell Global Identifier (ECGI) in E-UTRA, global UTRAN Cell Identifier in UTRA, or Cell Global Identification (CGI) in GERAN) of the reference cell, as defined in [12] for E-UTRA and [13] for UTRA, for which the GNSS network time relation is provided.
systemFrameNumber	This field specifies the system frame number in E-UTRA which the GNSS time time stamps, as defined in [12].
mode	This field identifies the reference cell for the GNSS-network time relation, as defined in [13].
referenceSystemFrameNumber	This field specifies the system frame number in UTRA, as defined in [13], which is used for time stamping.
bcchCarrier, bsic	This field identifies the reference cell for the GNSS-network time relation in GERAN, as defined in [14].
referenceFN, referenceFNMSB	These fields specify the frame number in GERAN which the GNSS time time stamps, as defined in [14]. The time of the reference frame boundary is as observed by the target device, i.e. without Timing Advance compensation. The <i>referenceFNMSB</i> field indicates the most significant bits of the frame number of the reference BTS corresponding to the <i>GNSS-MeasurementList</i> . Starting from the complete GSM frame number denoted FN, the target device calculates Reference FN MSB as $\text{Reference FN MSB} = \text{floor}(FN/42432)$ The complete GSM frame number FN can then be reconstructed in the location server by combining the fields <i>referenceFN</i> with <i>referenceFNMSB</i> in the following way $FN = \text{referenceFNMSB} * 42432 + \text{referenceFN}$
deltaGNSS-TOD	This field specifies the difference in milliseconds between <i>gnss-TOD-msec</i> reported and the milli-second part of the SV time <i>tsv_1</i> of the first SV in the list reported from the target device, as defined in [14]. The <i>deltaGNSS-TOD</i> is defined as $\text{deltaGNSS-TOD} = \text{gnss-TOD-msec} - \text{fix}(\text{tsv}_1)$ where <i>fix()</i> denotes rounding to the nearest integer towards zero.
nbPhysCellId	This field identifies the reference cell, as defined in [12] that is used for the GNSS-network time relation.
nbCellGlobalId	This field specifies the global cell identifier of the NB-IoT reference cell, as defined in [12], for which the GNSS network time relation is provided.
sfn	This field specifies the system frame number in NB-IoT which the GNSS time time stamps, as defined in [12].
hyperSFN	This field specifies the hyper-SFN in NB-IoT which the GNSS time time stamps, as defined in [12].

Value of K to Value of uncertainty relation

Value of K	Value of uncertainty
0	0 microseconds
1	0.07 microseconds
2	0.1498 microseconds
-	-
50	349.62 microseconds
-	-
127	≥ 8430000 microseconds

GNSS-MeasurementList

The IE *GNSS-MeasurementList* is used by the target device to provide measurements of code phase, Doppler, C/N₀ and optionally accumulated carrier phase, also called accumulated deltarange (ADR).

```
-- ASN1START
GNSS-MeasurementList ::= SEQUENCE (SIZE(1..16)) OF GNSS-MeasurementForOneGNSS
GNSS-MeasurementForOneGNSS ::= SEQUENCE {
```

```

gnss-ID          GNSS-ID,
gnss-SgnMeasList   GNSS-SgnMeasList,
...
}

GNSS-SgnMeasList ::= SEQUENCE (SIZE(1..8)) OF GNSS-SgnMeasElement

GNSS-SgnMeasElement ::= SEQUENCE {
    gnss-SignalID      GNSS-SignalID,
    gnss-CodePhaseAmbiguity INTEGER (0..127)      OPTIONAL,
    gnss-SatMeasList    GNSS-SatMeasList,
...
}

GNSS-SatMeasList ::= SEQUENCE (SIZE(1..64)) OF GNSS-SatMeasElement

GNSS-SatMeasElement ::= SEQUENCE {
    svID        SV-ID,
    cNo         INTEGER (0..63),
    mpathDet    ENUMERATED {notMeasured (0), low (1), medium (2), high (3), ...},
    carrierQualityInd INTEGER (0..3)      OPTIONAL,
    codePhase    INTEGER (0..2097151),
    integerCodePhase  INTEGER (0..127)      OPTIONAL,
    codePhaseRMSError INTEGER (0..63),
    doppler     INTEGER (-32768..32767)    OPTIONAL,
    adr         INTEGER (0..33554431)      OPTIONAL,
...
}

-- ASN1STOP

```

GNSS-MeasurementList field descriptions

gnss-ID

This field identifies the GNSS constellation on which the GNSS signal measurements were measured. Measurement information for up to 16 GNSSs can be included.

gnss-SgnMeasList

This list provides GNSS signal measurement information for up to 8 GNSS signal types per GNSS.

gnss-SignalID

This field identifies the signal on which GNSS signal measurement parameters were measured.

gnss-CodePhaseAmbiguity

This field provides the ambiguity of the code phase measurement. It is given in units of milli-seconds in the range between 0 and 127 milli-seconds.

The total code phase for a satellite k (Satk) is given modulo this *gnss-CodePhaseAmbiguity* and is reconstructed with:

$$\text{Code_Phase_Tot}(\text{Satk}) = \text{codePhase}(\text{Satk}) + \text{integerCodePhase}(\text{Satk}) + n * \text{gnss-CodePhaseAmbiguity}, n=0,1,2,\dots$$

If there is no code phase ambiguity, the *gnss-CodePhaseAmbiguity* shall be set to 0.

The field is optional. If *gnss-CodePhaseAmbiguity* is absent, the default value is 1 milli-second.

gnss-SatMeasList

This list provides GNSS signal measurement information for up to 64 GNSS satellites.

svID

This field identifies the satellite on which the GNSS signal measurements were measured.

cNo

This field provides an estimate of the carrier-to-noise ratio of the received signal from the particular satellite. The target device shall set this field to the value of the satellite C/N₀, as referenced to the antenna connector, in units of 1 dB-Hz, in the range from 0 to 63 dB-Hz.

Scale factor 1 dB-Hz.

mpathDet

This field contains the multipath indicator value, defined in the table Value of mpathDet to Multipath Indication relation below.

carrierQualityInd

This field indicates the quality of a carrier phase measurement. The LSB indicates the data polarity, that is, if the data from a specific satellite is received inverted, this is indicated by setting the LSB value to '1'. In the case the data is not inverted, the LSB is set to '0'. The MSB indicates if accumulation of the carrier phase has been continuous, that is, without cycle slips since the previous measurement report. If the carrier phase accumulation has been continuous, the MSB value is set to '1X'. Otherwise, the MSB is set to '0X'.

This field is optional but shall be included if the *adr* field is included. See table Bit toPolarity Indication relation below.

codePhase

This field contains the whole and fractional value of the code-phase measurement made by the target device for the particular satellite signal at the time of measurement in the units of ms. GNSS specific code phase measurements (e.g. chips) are converted into unit of ms by dividing the measurements by the nominal values of the measured signal chipping rate.

Scale factor 2⁻²¹ milli-seconds, in the range from 0 to (1-2⁻²¹) milli-seconds.

<i>GNSS-MeasurementList</i> field descriptions	
<i>integerCodePhase</i>	This field indicates the integer milli-second part of the code phase that is expressed modulo the <i>gnss-CodePhaseAmbiguity</i> . The value of the ambiguity is given in the <i>gnss-CodePhaseAmbiguity</i> field. The <i>integerCodePhase</i> is optional. If <i>integerCodePhase</i> is absent, the default value is 0 milli-second. Scale factor 1 milli-second, in the range from 0 to 127 milli-seconds.
<i>codePhaseRMSError</i>	This field contains the pseudorange RMS error value. This parameter is specified according to a floating-point representation shown in the table below.
<i>doppler</i>	This field contains the Doppler measured by the target device for the particular satellite signal. This information can be used to compute the 3-D velocity of the target device. Doppler measurements are converted into unit of m/s by multiplying the Doppler measurement in Hz by the nominal wavelength of the measured signal. Scale factor 0.04 meter/seconds. This field is optional, but shall be included, if the <i>velocityRequest</i> in <i>CommonIEsRequestLocationInformation</i> is set to TRUE.
<i>adr</i>	This field contains the ADR measurement measured by the target device for the particular satellite signal. This information can be used to compute the 3-D velocity or high-accuracy position of the target device. ADR measurements are converted into units of meter by multiplying the ADR measurement by the nominal wavelength of the measured signal. Scale factor 2^{10} meters, in the range from 0 to 32767.5 meters. This field is optional, but shall be included, if the <i>adrMeasReq</i> in <i>GNSS-PositioningInstructions</i> is set to TRUE and if ADR measurements are supported by the target device (i.e., <i>adr-Support</i> is set to TRUE in <i>A-GNSS-ProvideCapabilities</i>).

Value of *mpathDet* to Multipath Indication relation

Value of <i>mpathDet</i>	Multipath Indication
00	Not measured
01	Low, MP error < 5m
10	Medium, 5m < MP error < 43m
11	High, MP error > 43m

Bit toPolarity Indication relation

Value	Polarity Indication
0	Data Direct, carrier phase not continuous
1	Data Inverted, carrier phase not continuous
2	Data Direct, carrier phase continuous
3	Data Inverted, carrier phase continuous

floating-point representation

Index	Mantissa	Exponent	Floating-Point value, x_i	Pseudorange value, P
0	000	000	0.5	$P < 0.5$
1	001	000	0.5625	$0.5 \leq P < 0.5625$
i	x	y	$0.5 * (1 + x/8) * 2^y$	$x_{i-1} \leq P < x_i$
62	110	111	112	$104 \leq P < 112$
63	111	111	--	$112 \leq P$

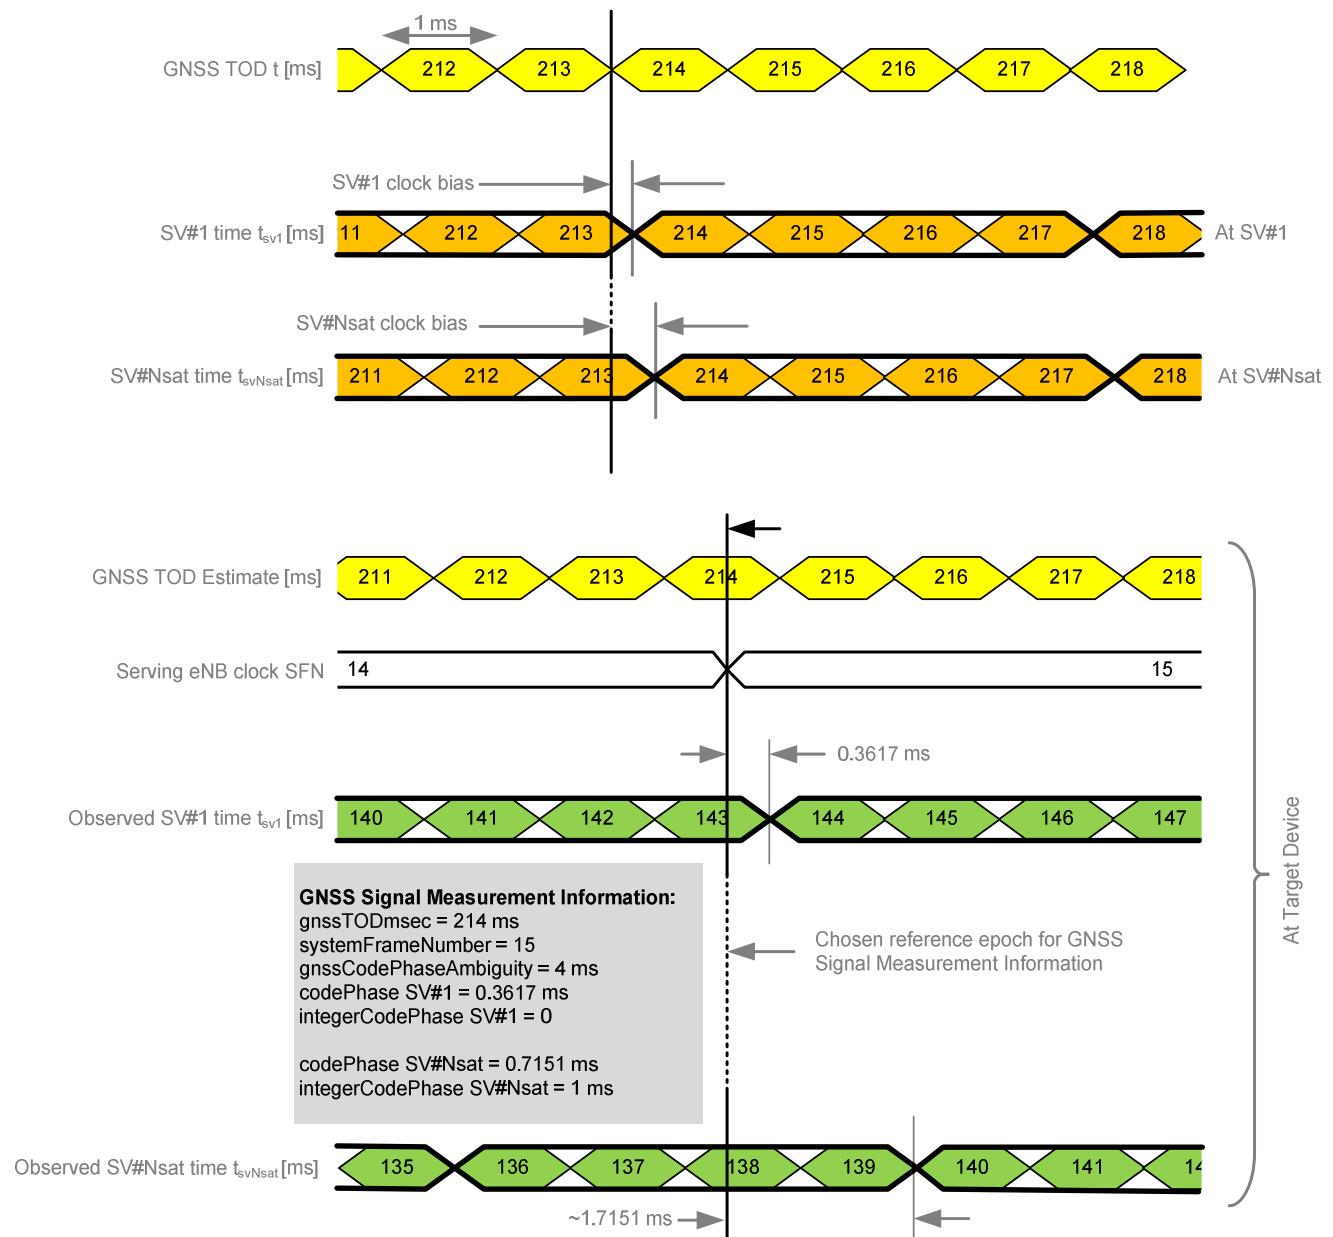


Figure 6.5.2.6-1: Exemplary calculation of some GNSS Signal Measurement Information fields.

– GNSS-LocationInformation

The IE *GNSS-LocationInformation* is included by the target device when location and optionally velocity information derived using GNSS or hybrid GNSS and other measurements is provided to the location server.

```

-- ASN1START

GNSS-LocationInformation ::= SEQUENCE {
    measurementReferenceTime      MeasurementReferenceTime,
    gnss-List                     GNSS-ID-Bitmap,
    ...
}

-- ASN1STOP

```

<i>GNSS-LocationInformation</i> field descriptions	
<i>measurementReferenceTime</i>	This field specifies the GNSS system time for which the location estimate and optionally velocity are valid. It may also include GNSS-network time relationship, if requested by the location server and supported by the target device.
<i>gnss-List</i>	This field provides a list of satellite systems used by the target device to calculate the location estimate and velocity estimate, if included. This is represented by a bit string in <i>GNSS-ID-Bitmap</i> , with a one-value at the bit position means the particular method has been used; a zero-value means not used.

6.5.2.7 GNSS Location Information Request

- ***A-GNSS-RequestLocationInformation***

The IE *A-GNSS-RequestLocationInformation* is used by the location server to request location information from the target device using GNSS.

```
-- ASN1START

A-GNSS-RequestLocationInformation ::= SEQUENCE {
    gnss-PositioningInstructions      GNSS-PositioningInstructions,
    ...
}

-- ASN1STOP
```

6.5.2.8 GNSS Location Information Request Elements

- ***GNSS-PositioningInstructions***

The IE *GNSS-PositioningInstructions* is used to provide GNSS measurement instructions.

```
-- ASN1START

GNSS-PositioningInstructions ::= SEQUENCE {
    gnss-Methods          GNSS-ID-Bitmap,
    fineTimeAssistanceMeasReq   BOOLEAN,
    adrMeasReq           BOOLEAN,
    multiFreqMeasReq      BOOLEAN,
    assistanceAvailability BOOLEAN,
    ...
}

-- ASN1STOP
```

<i>GNSS-PositioningInstructions</i> field descriptions	
<i>gnssMethods</i>	This field indicates the satellite systems allowed by the location server. This is represented by a bit string in <i>GNSS-ID-Bitmap</i> , with a one-value at the bit position means the particular GNSS is allowed; a zero-value means not allowed. The target device shall not request assistance data or report or obtain measurements for systems that are not indicated in this bit map. At least one of the bits in this bit map shall be set to value one.
<i>fineTimeAssistanceMeasReq</i>	This field indicates whether the target device is requested to report GNSS-network time association. TRUE means requested.
<i>adrMeasReq</i>	This field indicates whether the target device is requested to include ADR measurements in <i>GNSS-MeasurementList</i> IE or not. TRUE means requested.
<i>multiFreqMeasReq</i>	This field indicates whether the target device is requested to report measurements on multiple supported GNSS signal types in <i>GNSS-MeasurementList</i> IE or not. TRUE means requested.
<i>assistanceAvailability</i>	This field indicates whether the target device may request additional GNSS assistance data from the server. TRUE means allowed and FALSE means not allowed.

6.5.2.9 GNSS Capability Information

– A-GNSS-ProvideCapabilities

The IE A-GNSS-Provide-Capabilities is used by the target device to indicate its capability to support A-GNSS and to provide its A-GNSS location capabilities (e.g., GNSSs and assistance data supported) to the location server.

```
-- ASN1START

A-GNSS-ProvideCapabilities ::= SEQUENCE {
    gnss-SupportList           GNSS-SupportList          OPTIONAL,
    assistanceDataSupportList  AssistanceDataSupportList OPTIONAL,
    locationCoordinateTypes    LocationCoordinateTypes  OPTIONAL,
    velocityTypes               VelocityTypes            OPTIONAL,
    ...
    [[ periodicalReportingNotSupported-r14
        PositioningModes          OPTIONAL,
        idleStateForMeasurements-r14
        ENUMERATED { required }    OPTIONAL
    ]]
}

GNSS-SupportList ::= SEQUENCE (SIZE(1..16)) OF GNSS-SupportElement

GNSS-SupportElement ::= SEQUENCE {
    gnss-ID                  GNSS-ID,
    sbas-IDs                 SBAS-IDs             OPTIONAL, -- Cond GNSS-ID-SBAS
    agnss-Modes               PositioningModes,
    gnss-Signals              GNSS-SignalIDs,
    fta-MeasSupport          SEQUENCE {
        cellTime      AccessTypes,
        mode          PositioningModes,
        ...
    }                         OPTIONAL, -- Cond fta
    adr-Support              BOOLEAN,
    velocityMeasurementSupport BOOLEAN,
    ...
}

AssistanceDataSupportList ::= SEQUENCE {
    gnss-CommonAssistanceDataSupport   GNSS-CommonAssistanceDataSupport,
    gnss-GenericAssistanceDataSupport  GNSS-GenericAssistanceDataSupport,
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>GNSS-ID-SBAS</i>	The field is mandatory present if the <i>GNSS-ID</i> = <i>sbas</i> ; otherwise it is not present.
<i>fta</i>	The field is mandatory present if the target device supports the reporting of fine time assistance measurements; otherwise it is not present.

A-GNSS-ProvideCapabilities field descriptions

gnss-SupportList

This field specifies the list of GNSS supported by the target device and the target device capabilities associated with each of the supported GNSS. This field shall be present if the *gnss-SupportListReq* in the A-GNSS - RequestCapabilities IE is set to TRUE and if the target device supports the A-GNSS positioning method. If the IE A-GNSS-Provide-Capabilities is provided unsolicited, this field shall be included if the target device supports the assisted GNSS positioning method.

gnss-ID

This field specifies the GNSS supported by the target device for which the capabilities in *GNSS-SupportElement* are provided.

sbas-IDs

This field specifies the SBAS(s) supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular SBAS is supported; a zero-value means not supported.

agnss-Modes

This field specifies the GNSS mode(s) supported by the target device for the GNSS indicated by *gnss-ID*. This is represented by a bit string, with a one-value at the bit position means the particular GNSS mode is supported; a zero-value means not supported.

A-GNSS-ProvideCapabilities field descriptions	
gnss-Signals	This field specifies the GNSS signal(s) supported by the target device for the GNSS indicated by <i>gnss-ID</i> . This is represented by a bit string, with a one-value at the bit position means the particular GNSS signal type is supported; a zero-value means not supported.
fta-MeasSupport	This field specifies that the target device is capable of performing fine time assistance measurements (i.e., GNSS-cellular time association reporting). The <i>cellTime</i> field specifies for which cellular network(s) this capability is supported. This is represented by a bit string, with a one-value at the bit position means FTA measurements for the specific cellular network time is supported; a zero-value means not supported. The <i>mode</i> field specifies for which GNSS mode(s) FTA measurements are supported by the target device. This is represented by a bit string, with a one-value at the bit position means FTA measurements for the GNSS mode is supported; a zero-value means not supported.
adr-Support	This field specifies whether the target device supports ADR measurement reporting. TRUE means supported.
velocityMeasurementSupport	This field specifies whether the target device supports measurement reporting related to velocity. TRUE means supported.
assistanceDataSupportList	This list defines the assistance data and assistance data choices supported by the target device. This field shall be present if the <i>assistanceDataSupportListReq</i> in the A-GNSS-RequestCapabilities IE is set to TRUE and if the target device supports GNSS assistance data. If the IE A-GNSS-Provide-Capabilities is provided unsolicited, this field shall be included if the target device supports any GNSS assistance data.
locationCoordinateTypes	This parameter identifies the geographical location coordinate types that a target device supports for GNSS. TRUE indicates that a location coordinate type is supported and FALSE that it is not. This field shall be present if the <i>locationVelocityTypesReq</i> in the A-GNSS-RequestCapabilities IE is set to TRUE and if the target device supports UE-based or standalone GNSS positioning method. If the IE A-GNSS-Provide-Capabilities is provided unsolicited, this field shall be included if the target device supports UE-based or standalone GNSS positioning method.
velocityTypes	This parameter identifies the velocity types that a target device supports for GNSS. TRUE indicates that a velocity type is supported and FALSE that it is not. FALSE for all velocity types indicates that velocity reporting is not supported. This field shall be present if the <i>locationVelocityTypesReq</i> in the A-GNSS-RequestCapabilities IE is set to TRUE and if the target device supports UE-based or standalone GNSS positioning method. If the IE A-GNSS-Provide-Capabilities is provided unsolicited, this field shall be included if the target device supports UE-based or standalone GNSS positioning method.
periodicalReportingNotSupported	This field, if present, specifies the positioning modes for which the target device does not support <i>periodicalReporting</i> . This is represented by a bit string, with a one-value at the bit position means <i>periodicalReporting</i> for the positioning mode is not supported; a zero-value means supported. If this field is absent, the location server may assume that the target device supports <i>periodicalReporting</i> in <i>CommonIEsRequestLocationInformation</i> for each supported positioning mode.
idleStateForMeasurements	This field, if present, indicates that the target device requires idle state to perform GNSS measurements.

6.5.2.10 GNSS Capability Information Elements

- **GNSS-CommonAssistanceDataSupport**

The IE *GNSS-CommonAssistanceDataSupport* is used by the target device to provide information on supported GNSS common assistance data types to the location server.

```
-- ASN1START

GNSS-CommonAssistanceDataSupport ::= SEQUENCE {
    gnss-ReferenceTimeSupport          GNSS-ReferenceTimeSupport
                                         OPTIONAL, -- Cond RefTimeSup
    gnss-ReferenceLocationSupport      GNSS-ReferenceLocationSupport
                                         OPTIONAL, -- Cond RefLocSup
    gnss-IonosphericModelSupport       GNSS-IonosphericModelSupport
                                         OPTIONAL, -- Cond IonoModSup
    gnss-EarthOrientationParametersSupport GNSS-EarthOrientationParametersSupport
                                         OPTIONAL, -- Cond EOPSup
    ...
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>RefTimeSup</i>	The field is mandatory present if the target device supports <i>GNSS-ReferenceTime</i> ; otherwise it is not present.
<i>RefLocSup</i>	This field is mandatory present if the target device supports <i>GNSS-ReferenceLocation</i> ; otherwise it is not present.
<i>IonoModSup</i>	This field is mandatory present if the target device supports <i>GNSS-IonosphericModel</i> ; otherwise it is not present.
<i>EOPSup</i>	This field is mandatory present if the target device supports <i>GNSS-EarthOrientationParameters</i> ; otherwise it is not present.

– GNSS-ReferenceTimeSupport

```
-- ASN1START
GNSS-ReferenceTimeSupport ::= SEQUENCE {
    gnss-SystemTime      GNSS-ID-Bitmap,
    fta-Support          AccessTypes
                                OPTIONAL, -- Cond fta
}
-- ASN1STOP
```

Conditional presence	Explanation
<i>fta</i>	The field is mandatory present if the target device supports fine time assistance in <i>GNSSReferenceTime</i> IE; otherwise it is not present.

GNSS-ReferenceTimeSupport field descriptions

gnss-SystemTime

This field specifies the GNSS system time(s) supported by the target device. This is represented by a bit string in *GNSS-ID-Bitmap*, with a one-value at the bit position means the particular GNSS system time is supported; a zero-value means not supported.

fta-Support

This field specifies that the target device supports fine time assistance (i.e., GNSS-cellular time association) in *GNSS-ReferenceTime* IE. This is represented by a bit string in *AccessTypes*, with a one-value at the bit position means FTA for the specific cellular network time is supported; a zero-value means not supported.

– GNSS-ReferenceLocationSupport

```
-- ASN1START
GNSS-ReferenceLocationSupport ::= SEQUENCE {
}
-- ASN1STOP
```

– GNSS-IonosphericModelSupport

```
-- ASN1START
GNSS-IonosphericModelSupport ::= SEQUENCE {
    ionoModel      BIT STRING {
        klobuchar   (0),
        neQuick     (1) } (SIZE (1..8)),
}
-- ASN1STOP
```

***GNSS-IonosphericModelSupport* field descriptions**

ionoModel

This field specifies the ionospheric model(s) supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular ionospheric model is supported; a zero-value means not supported.

GNSS-EarthOrientationParametersSupport

```
-- ASN1START
GNSS-EarthOrientationParametersSupport ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

GNSS-GenericAssistanceDataSupport

The IE *GNSS-GenericAssistanceDataSupport* is used by the target device to provide information on supported GNSS generic assistance data types to the location server for each supported GNSS.

```
-- ASN1START
GNSS-GenericAssistanceDataSupport ::= SEQUENCE (SIZE (1..16)) OF GNSS-GenericAssistDataSupportElement

GNSS-GenericAssistDataSupportElement ::= SEQUENCE {
    gnss-ID                                GNSS-ID,
    sbas-ID                                 SBAS-ID           OPTIONAL, -- Cond GNSS-ID-SBAS
    gnss-TimeModelsSupport                  GNSS-TimeModelListSupport   OPTIONAL, -- Cond TimeModSup
    gnss-DifferentialCorrectionsSupport    GNSS-DifferentialCorrectionsSupport OPTIONAL, -- Cond DGNSS-Sup
    gnss-NavigationModelSupport            GNSS-NavigationModelSupport  OPTIONAL, -- Cond NavModSup
    gnss-RealTimeIntegritySupport          GNSS-RealTimeIntegritySupport OPTIONAL, -- Cond RTISup
    gnss-DataBitAssistanceSupport          GNSS-DataBitAssistanceSupport OPTIONAL, -- Cond DataBitsSup
    gnss-AcquisitionAssistanceSupport     GNSS-AcquisitionAssistanceSupport OPTIONAL, -- Cond AcquAssistSup
    gnss-AlmanacSupport                   GNSS-AlmanacSupport        OPTIONAL, -- Cond AlmanacSup
    gnss-UTC-ModelSupport                 GNSS-UTC-ModelSupport       OPTIONAL, -- Cond UTCModSup
    gnss-AuxiliaryInformationSupport      GNSS-AuxiliaryInformationSupport OPTIONAL, -- Cond AuxInfoSup
    ...
    [
        bds-DifferentialCorrectionsSupport-r12
            BDS-DifferentialCorrectionsSupport-r12
                OPTIONAL, -- Cond DBDS-Sup
        bds-GridModelSupport-r12
            BDS-GridModelSupport-r12
                OPTIONAL -- Cond BDS-GridModSup
    ]
}
-- ASN1STOP
```

Conditional presence	Explanation
<i>GNSS-ID-SBAS</i>	The field is mandatory present if the <i>GNSS-ID</i> = <i>sbas</i> ; otherwise it is not present.
<i>TimeModSup</i>	The field is mandatory present if the target device supports <i>GNSS-TimeModelList</i> ; otherwise it is not present.
<i>DGNSS-Sup</i>	The field is mandatory present if the target device supports <i>GNSS-DifferentialCorrections</i> ; otherwise it is not present.
<i>NavModSup</i>	The field is mandatory present if the target device supports <i>GNSS-NavigationModel</i> ; otherwise it is not present.
<i>RTISup</i>	The field is mandatory present if the target device supports <i>GNSS-RealTimeIntegrity</i> ; otherwise it is not present.

Conditional presence	Explanation
<i>DataBitsSup</i>	The field is mandatory present if the target device supports <i>GNSS-DataBitAssistance</i> ; otherwise it is not present.
<i>AcquAssistSup</i>	The field is mandatory present if the target device supports <i>GNSS-AcquisitionAssistance</i> ; otherwise it is not present.
<i>AlmanacSup</i>	The field is mandatory present if the target device supports <i>GNSS-Almanac</i> ; otherwise it is not present.
<i>UTCModSup</i>	The field is mandatory present if the target device supports <i>GNSS-UTC-Model</i> ; otherwise it is not present.
<i>AuxInfoSup</i>	The field is mandatory present if the target device supports <i>GNSS-AuxiliaryInformation</i> ; otherwise it is not present.
<i>DBDS-Sup</i>	The field is mandatory present if the target device supports <i>BDS-DifferentialCorrections</i> ; otherwise it is not present. This field may only be present if gnss-ID indicates 'bds'.
<i>BDS-GridModSup</i>	The field is mandatory present if the target device supports <i>BDS-GridModel</i> ; otherwise it is not present. This field may only be present if gnss-ID indicates 'bds'.

– *GNSS-TimeModelListSupport*

```
-- ASN1START
GNSS-TimeModelListSupport ::= SEQUENCE {
  ...
}
-- ASN1STOP
```

– *GNSS-DifferentialCorrectionSupport*

```
-- ASN1START
GNSS-DifferentialCorrectionsSupport ::= SEQUENCE {
  gnssSignalIDs      GNSS-SignalIDs,
  dgnsValidityTimeSup BOOLEAN,
  ...
}
-- ASN1STOP
```

GNSS-DifferentialCorrectionsSupport field descriptions

gnssSignalIDs

This field specifies the GNSS signal types for which differential corrections are supported by the target device. This is represented by a bit string in *GNSS-SignalIDs*, with a one-value at the bit position means differential corrections for the particular GNSS signal type is supported; a zero-value means not supported.

dgnss-ValidityTimeSup

This field specifies if the target device supports estimation of UDRE based on growth rate and validity time for differential corrections. TRUE means supported.

– *GNSS-NavigationModelSupport*

```
-- ASN1START
GNSS-NavigationModelSupport ::= SEQUENCE {
  clockModel     BIT STRING { model1-1      (0),
                                model1-2      (1),
                                model1-3      (2),
                                model1-4      (3),
                                model1-5      (4),
                                model1-6      (5) } (SIZE (1..8))      OPTIONAL,
  orbitModel     BIT STRING { model1-1      (0),
                                model1-2      (1),
                                model1-3      (2),
                                model1-4      (3),
                                model1-5      (4),
                                model1-6      (5) } (SIZE (1..8))      OPTIONAL,
  ...
}
```

-- ASN1STOP

GNSS-NavigationModelSupport field descriptions

clockModel

This field specifies the *gnss-ClockModel* choice(s) in *GNSS-NavigationModel* IE supported by the target device for the GNSS indicated by *GNSS-ID*. This is represented by a bit string, with a one-value at the bit position means the particular clock model is supported; a zero-value means not supported.
 If the target device supports GPS and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-2.
 If the target device supports SBAS and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-5.
 If the target device supports QZSS and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-2.
 If the target device supports Galileo and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-1.
 If the target device supports GLONASS and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-4.
 If the target device supports BDS and *GNSS-NavigationModel* assistance, it shall support *clockModel* Model-6.
 If this field is absent, the target device supports the mandatory (native) *clockModel* choice only as listed above for the GNSS indicated by *GNSS-ID*.

orbitModel

This field specifies the *gnss-OrbitModel* choice(s) in *GNSS-NavigationModel* IE supported by the target device for the GNSS indicated by *GNSS-ID*. This is represented by a bit string, with a one-value at the bit position means the particular orbit model is supported; a zero-value means not supported.
 If the target device supports GPS and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-2.
 If the target device supports SBAS and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-5.
 If the target device supports QZSS and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-2.
 If the target device supports Galileo and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-1.
 If the target device supports GLONASS and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-4.
 If the target device supports BDS and *GNSS-NavigationModel* assistance, it shall support *orbitModel* Model-6.
 If this field is absent, the target device supports the mandatory (native) *orbitModel* choice only as listed above for the GNSS indicated by *GNSS-ID*.

- ***GNSS-RealTimeIntegritySupport***

-- ASN1START

```
GNSS-RealTimeIntegritySupport ::= SEQUENCE {
  ...
}
```

-- ASN1STOP

- ***GNSS-DataBitAssistanceSupport***

-- ASN1START

```
GNSS-DataBitAssistanceSupport ::= SEQUENCE {
  ...
}
```

-- ASN1STOP

- ***GNSS-AcquisitionAssistanceSupport***

-- ASN1START

```
GNSS-AcquisitionAssistanceSupport ::= SEQUENCE {
  ...
  confidenceSupport-r10          ENUMERATED { true }      OPTIONAL,
  dopplerUncertaintyExtSupport-r10 ENUMERATED { true }      OPTIONAL
}
```

-- ASN1STOP

GNSS-AcquisitionAssistanceSupport field descriptions

confidenceSupport

If this field is present, the target device supports the *confidence* field in GNSS-AcquisitionAssistance.

dopplerUncertaintyExtSupport

If this field is present, the target device supports the *dopplerUncertaintyExt* field in GNSS-AcquisitionAssistance.

— **GNSS-AlmanacSupport**

-- ASN1START

```
GNSS-AlmanacSupport ::= SEQUENCE {
    almanacModel     BIT STRING { model-1      (0),
                                model-2      (1),
                                model-3      (2),
                                model-4      (3),
                                model-5      (4),
                                model-6      (5),
                                model-7      (6) } (SIZE (1..8))      OPTIONAL,
}
...
-- ASN1STOP
```

GNSS-AlmanacSupport field descriptions

almanacModel

This field specifies the *almanacModel* choice(s) in GNSS-Almanac IE supported by the target device for the GNSS indicated by *GNSS-ID*. This is represented by a bit string, with a one-value at the bit position means the particular almanac model is supported; a zero-value means not supported.

If the target device supports GPS and GNSS-Almanac assistance, it shall support Model-2.

If the target device supports SBAS and GNSS-Almanac assistance, it shall support Model-6.

If the target device supports QZSS and GNSS-Almanac assistance, it shall support Model-2.

If the target device supports Galileo and GNSS-Almanac assistance, it shall support Model-1.

If the target device supports GLONASS and GNSS-Almanac assistance, it shall support Model-5.

If the target device supports BDS and GNSS-Almanac assistance, it shall support Model-7.

If this field is absent, the target device supports the mandatory (native) *almanacModel* choice only as listed above for the GNSS indicated by *GNSS-ID*.

— **GNSS-UTC-ModelSupport**

-- ASN1START

```
GNSS-UTC-ModelSupport ::= SEQUENCE {
    utc-Model      BIT STRING { model-1      (0),
                                model-2      (1),
                                model-3      (2),
                                model-4      (3),
                                model-5      (4) } (SIZE (1..8))      OPTIONAL,
}
...
-- ASN1STOP
```

GNSS-UTC-ModelSupport field descriptions

utc-Model

This field specifies the GNSS-UTC-Model choice(s) in GNSS-UTC-Model IE supported by the target device for the GNSS indicated by *GNSS-ID*. This is represented by a bit string, with a one-value at the bit position means the particular UTC model is supported; a zero-value means not supported.

If the target device supports GPS and GNSS-UTC-Model assistance, it shall support Model-1.

If the target device supports SBAS and GNSS-UTC-Model assistance, it shall support Model-4.

If the target device supports QZSS and GNSS-UTC-Model assistance, it shall support Model-1.

If the target device supports Galileo and GNSS-UTC-Model assistance, it shall support Model-1.

If the target device supports GLONASS and GNSS-UTC-Model assistance, it shall support Model-3.

If the target device supports BDS and GNSS-UTC-Model assistance, it shall support Model-5.

If this field is absent, the target device supports the mandatory (native) *utc-Model* choice only as listed above for the GNSS indicated by *GNSS-ID*.

- *GNSS-AuxiliaryInformationSupport*

```
-- ASN1START
GNSS-AuxiliaryInformationSupport ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

- *BDS-DifferentialCorrectionsSupport*

```
-- ASN1START
BDS-DifferentialCorrectionsSupport-r12 ::= SEQUENCE {
    gnssSignalIDs          GNSS-SignalIDs,
    ...
}
-- ASN1STOP
```

<i>BDS-DifferentialCorrectionsSupport</i> field descriptions
--

gnssSignalIDs

This field specifies the BDS signal types for which differential corrections are supported by the target device. This is represented by a bit string in *GNSS-SignalIDs*, with a one-value at the bit position means differential corrections for the particular BDS signal type is supported; a zero-value means not supported.

- *BDS-GridModelSupport*

```
-- ASN1START
BDS-GridModelSupport-r12 ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

6.5.2.11 GNSS Capability Information Request

- *A-GNSS-RequestCapabilities*

The IE *A-GNSS-Request-Capabilities* is used by the location server to request A-GNSS location capabilities (e.g., GNSSs and assistance data supported) from the target device.

```
-- ASN1START
A-GNSS-RequestCapabilities ::= SEQUENCE {
    gnss-SupportListReq      BOOLEAN,
    assistanceDataSupportListReq  BOOLEAN,
    locationVelocityTypesReq   BOOLEAN,
    ...
}
-- ASN1STOP
```

<i>A-GNSS-RequestCapabilities</i> field descriptions
--

gnss-SupportListReq

This field specifies whether the target device is requested to include the *gnss-SupportList* field in the *A-GNSS-ProvideCapabilities* IE or not. TRUE means requested.

assistanceDataSupportListReq

This field specifies whether the target device is requested to include the *assistanceDataSupportList* field in the *A-GNSS-ProvideCapabilities* IE or not. TRUE means requested.

A-GNSS-RequestCapabilities field descriptions***locationVelocityTypesReq***

This field specifies whether the target device is requested to include the *locationCoordinateTypes* field and *velocityTypes* field in the *A-GNSS-ProvideCapabilities* IE or not. TRUE means requested.

6.5.2.12 GNSS Error Elements**– A-GNSS-Error**

The IE *A-GNSS-Error* is used by the location server or target device to provide GNSS error reasons.

```
-- ASN1START

A-GNSS-Error ::= CHOICE {
    locationServerErrorCauses           GNSS-LocationServerErrorCauses,
    targetDeviceErrorCauses            GNSS-TargetDeviceErrorCauses,
    ...
}

-- ASN1STOP
```

– GNSS-LocationServerErrorCauses

The IE *GNSS-LocationServerErrorCauses* is used by the location server to provide GNSS error reasons to the target device.

```
-- ASN1START

GNSS-LocationServerErrorCauses ::= SEQUENCE {
    cause      ENUMERATED {
        undefined,
        undeliveredAssistanceDataIsNotSupportedByServer,
        undeliveredAssistanceDataIsSupportedButCurrentlyNotAvailableByServer,
        undeliveredAssistanceDataIsPartlyNotSupportedAndPartlyNotAvailableByServer,
        ...
    },
    ...
}

-- ASN1STOP
```

– GNSS-TargetDeviceErrorCauses

The IE *GNSS-TargetDeviceErrorCauses* is used by the target device to provide GNSS error reasons to the location server.

```
-- ASN1START

GNSS-TargetDeviceErrorCauses ::= SEQUENCE {
    cause      ENUMERATED {
        undefined,
        thereWereNotEnoughSatellitesReceived,
        assistanceDataMissing,
        notAllRequestedMeasurementsPossible,
        ...
    },
    fineTimeAssistanceMeasurementsNotPossible      NULL      OPTIONAL,
    adrMeasurementsNotPossible                    NULL      OPTIONAL,
    multiFrequencyMeasurementsNotPossible       NULL      OPTIONAL,
    ...
}

-- ASN1STOP
```

<i>GNSS-TargetDeviceErrorCauses</i> field descriptions

cause

This field provides a GNSS specific error cause. If the cause value is '*notAllRequestedMeasurementsPossible*', the target device was not able to provide all requested GNSS measurements (but may be able to report a location estimate or location measurements). In this case, the target device should include any of the '*fineTimeAssistanceMeasurementsNotPossible*', '*adrMeasurementsNotPossible*', or '*multiFrequencyMeasurementsNotPossible*' fields, as applicable.

6.5.2.13 Common GNSS Information Elements

- ***GNSS-ID***

The IE *GNSS-ID* is used to indicate a specific GNSS.

```
-- ASN1START

GNSS-ID ::= SEQUENCE {
    gnss-id          ENUMERATED{ gps, sbas, qzss, galileo, glonass, ..., bds },
    ...
}

-- ASN1STOP
```

- ***GNSS-ID-Bitmap***

The IE *GNSS-ID-Bitmap* is used to indicate several GNSSs using a bit map.

```
-- ASN1START

GNSS-ID-Bitmap ::= SEQUENCE {
    gnss-ids        BIT STRING {
        gps           (0),
        sbas          (1),
        qzss          (2),
        galileo       (3),
        glonass       (4),
        bds           (5) } (SIZE (1..16)),
    ...
}

-- ASN1STOP
```

<i>GNSS-ID-Bitmap</i> field descriptions

gnss-ids

This field specifies the GNSS(s). This is represented by a bit string, with a one-value at the bit position means the particular GNSS is addressed; a zero-value means not addressed.

- ***GNSS-SignalID***

The IE *GNSS-SignalID* is used to indicate a specific GNSS signal type. The interpretation of *GNSS-SignalID* depends on the *GNSS-ID*.

```
-- ASN1START

GNSS-SignalID ::= SEQUENCE {
    gnss-SignalID      INTEGER (0 .. 7),
    ...
}

-- ASN1STOP
```

GNSS-SignalID field descriptions

gnss-SignalID

This field specifies a particular GNSS signal. The interpretation of *gnss-SignalID* depends on the *GNSS-ID* and is as shown in the table System to Value & Explanation relation below.

System to Value & Explanation relation

System	Value	Explanation
GPS	0	GPS L1 C/A
	1	GPS L1C
	2	GPS L2C
	3	GPS L5
	4-7	Reserved
SBAS	0	L1
	1-7	Reserved
QZSS	0	QZS-L1
	1	QZS-L1C
	2	QZS-L2C
	3	QZS-L5
	4-7	Reserved
GLONASS	0	GLONASS G1
	1	GLONASS G2
	2	GLONASS G3
	3-7	Reserved
Galileo	0	Galileo E1
	1	Galileo E5A
	2	Galileo E5B
	3	Galileo E6
	4	Galileo E5A + E5B
	5-7	Reserved
BDS	0	B1I
	1-7	Reserved

— **GNSS-SignalIDs**

The IE *GNSSSignal-IDs* is used to indicate several GNSS signals using a bit map. The interpretation of *GNSSSignal-IDs* depends on the *GNSS-ID*.

```
-- ASN1START
GNSS-SignalIDs ::= SEQUENCE {
    gnss-SignalIDs      BIT STRING (SIZE(8)),
    ...
}
-- ASN1STOP
```

GNSS-SignalIDs field descriptions
--

gnss-SignalIDs

This field specifies one or several GNSS signals using a bit map. A one-value at the bit position means the particular signal is addressed; a zero-value at the particular bit position means the signal is not addressed. The interpretation of the bit map in *gnssSignalIDs* depends on the *GNSS-ID* and is shown in the table below.
Unfilled table entries indicate no assignment and shall be set to zero.

interpretation of the bit map in *gnssSignalIDs*

GNSS	Bit 1 (MSB)	Bit 2	Bit 3	Bit 4	Bit 5	Bit 6	Bit 7	Bit 8 (LSB)
GPS	L1 C/A	L1C	L2C	L5				
SBAS	L1							
QZSS	QZS-L1	QZS- L1C	QZS- L2C	QZS-L5				
GLONASS	G1	G2	G3					
Galileo	E1	E5a	E5b	E6	E5a+E5b			
BDS	B1I							

— *SBAS-ID*

The IE *SBAS-ID* is used to indicate a specific SBAS.

```
-- ASN1START

SBAS-ID ::= SEQUENCE {
    sbas-id      ENUMERATED { waas, egnos, msas, gagan, ... },
    ...
}

-- ASN1STOP
```

— *SBAS-IDs*

The IE *SBAS-IDs* is used to indicate several SBASs using a bit map.

```
-- ASN1START

SBAS-IDs ::= SEQUENCE {
    sbas-IDs      BIT STRING {
        waas          (0),
        egnos         (1),
        msas          (2),
        gagan         (3) } (SIZE (1..8)),
    ...
}

-- ASN1STOP
```

SBAS-IDs field descriptions

sbas-IDs

This field specifies one or several SBAS(s) using a bit map. A one-value at the bit position means the particular SBAS is addressed; a zero-value at the particular bit position means the SBAS is not addressed.

— *SV-ID*

The IE *SV-ID* is used to indicate a specific GNSS satellite. The interpretation of *SV-ID* depends on the *GNSS-ID*.

```
-- ASN1START

SV-ID ::= SEQUENCE {
    satellite-id   INTEGER(0..63),
    ...
}

-- ASN1STOP
```

SV-ID field descriptions

satellite-id

This field specifies a particular satellite within a specific GNSS. The interpretation of *satellite-id* depends on the *GNSS-ID* see the table below.

interpretation of *satellite-id*

System	Value of <i>satellite-id</i>	Interpretation of <i>satellite-id</i>
GPS	'0' – '62' '63'	Satellite PRN Signal No. 1 to 63 Reserved
SBAS	'0' – '38' '39' – '63'	Satellite PRN Signal No. 120 to 158 Reserved
QZSS	'0' – '4' '5' – '63'	Satellite PRN Signal No. 193 to 197 Reserved
GLONASS	'0' – '23' '24' – '63'	Slot Number 1 to 24 Reserved
Galileo	'0' – '35' '36' – '63'	Code No. 1 to 36 Reserved
BDS	'0' – '36' '37' – '63'	Satellite ranging code number signal No.1 to 37 [23] Reserved

6.5.3 Enhanced Cell ID Positioning

6.5.3.1 E-CID Location Information

- *ECID-ProvideLocationInformation*

The IE *ECID-ProvideLocationInformation* is used by the target device to provide E-CID location measurements to the location server. It may also be used to provide ECID positioning specific error reason.

```
-- ASN1START

ECID-ProvideLocationInformation ::= SEQUENCE {
    ecid-SignalMeasurementInformation    ECID-SignalMeasurementInformation      OPTIONAL,
    ecid-Error                          ECID-Error                           OPTIONAL,
    ...
}

-- ASN1STOP
```

6.5.3.2 E-CID Location Information Elements

- *ECID-SignalMeasurementInformation*

The IE *ECID-SignalMeasurementInformation* is used by the target device to provide various UE-measurements to the location server.

```
-- ASN1START

ECID-SignalMeasurementInformation ::= SEQUENCE {
    primaryCellMeasuredResults  MeasuredResultsElement  OPTIONAL,
    measuredResultsList         MeasuredResultsList,
    ...
}

MeasuredResultsList ::= SEQUENCE (SIZE(1..32)) OF MeasuredResultsElement

MeasuredResultsElement ::= SEQUENCE {
    physCellId        INTEGER (0..503),
    cellGlobalId     CellGlobalIdEUTRA-AndUTRA      OPTIONAL,
    arfcnEUTRA       ARFCN-ValueEUTRA,
    systemFrameNumber
                    BIT STRING (SIZE (10))          OPTIONAL,
    rsrp-Result      INTEGER (0..97)                 OPTIONAL,
    rsrq-Result      INTEGER (0..34)                 OPTIONAL,
    ue-RxTxTimeDiff INTEGER (0..4095)               OPTIONAL,
    ...,
    [[ arfcnEUTRA-v9a0      ARFCN-ValueEUTRA-v9a0   OPTIONAL      -- Cond EARFCN-max
    ]],
    [[ nrsrp-Result-r14    INTEGER (0..113)            OPTIONAL,
```

```

nrsrq-Result-r14      INTEGER (0..74)           OPTIONAL,
carrierFreqOffsetNB-r14
                      CarrierFreqOffsetNB-r14   OPTIONAL,      -- Cond NB-IoT
hyperSFN-r14          BIT STRING (SIZE (10))    OPTIONAL
}

-- ASN1STOP

```

Conditional presence	Explanation
<i>EARFCN-max</i>	The field is mandatory present if the corresponding <i>arfcnEUTRA</i> (i.e. without suffix) is set to <i>maxEARFCN</i> . Otherwise the field is not present.
<i>NB-IoT</i>	The field is mandatory present if the measured cell is a NB-IoT cell. Otherwise it is not present.

<i>ECID-SignalMeasurementInformation</i> field descriptions	
<i>primaryCellMeasuredResults</i>	This field contains measurements for the primary cell, when the target device reports measurements for both primary cell and neighbour cells. This field shall be omitted when the target device reports measurements for the primary cell only, in which case the measurements the primary cell is reported in the <i>measuredResultsList</i> .
<i>measuredResultsList</i>	This list contains the E-CID measurements for up to 32 cells.
<i>physCellId</i>	This field specifies the physical cell identity of the measured cell.
<i>cellGlobalId</i>	This field specifies cell global ID of the measured cell. The target device shall provide this field if it was able to determine the ECGI of the measured cell at the time of measurement.
<i>arfcnEUTRA</i>	This field specifies the ARFCN of the measured E-UTRA carrier frequency, as defined in [12]. In case the target device includes <i>arfcnEUTRA-v9a0</i> , the target device shall set the corresponding <i>arfcnEUTRA</i> (i.e. without suffix) to <i>maxEARFCN</i> .
<i>systemFrameNumber</i>	This field specifies the system frame number of the measured cell during which the measurements have been performed. The target device shall include this field if it was able to determine the SFN of the cell at the time of measurement.
<i>rsrp-Result</i>	This field specifies the reference signal received power (RSRP) measurement, as defined in [12],[17].
<i>rsrq-Result</i>	This field specifies the reference signal received quality (RSRQ) measurement, as defined in [12],[17].
<i>ue-RxTxTimeDiff</i>	This field specifies the UE Rx-Tx time difference measurement, as defined in [17]. It is provided only for measurements on the UE's primary cell. Measurement report mapping is according to 3GPP TS 36.133 [18].
<i>nrsrp-Result</i>	This field specifies the narrowband reference signal received power (NRSRP) measurement, as defined in [17]. Measurement report mapping is according to TS 36.133 [18].
<i>nrsrq-Result</i>	This field specifies the narrowband reference signal received quality (NRSRQ) measurement, as defined in [17]. Measurement report mapping is according to TS 36.133 [18].
<i>carrierFreqOffsetNB</i>	This field specifies the offset of the NB-IoT channel number to ARFCN given by <i>arfcnEUTRA</i> as defined in TS 36.101 [21].
<i>hyperSFN</i>	This field specifies the hyper-SFN of the measured cell during which the measurements have been performed. The target device shall include this field if it was able to determine the hyper-SFN of the cell at the time of measurement.

6.5.3.3 E-CID Location Information Request

– *ECID-RequestLocationInformation*

The IE *ECID-RequestLocationInformation* is used by the location server to request E-CID location measurements from a target device.

```
-- ASN1START
```

```

ECID-RequestLocationInformation ::= SEQUENCE {
    requestedMeasurements      BIT STRING {
        rsrpReq          (0),
        rsrqReq          (1),
        ueRxTxReq        (2),
        nrsrpReq-r14     (3),
        nrsrqReq-r14     (4)} (SIZE(1..8)),
    ...
}
-- ASN1STOP

```

***ECID-RequestLocationInformation* field descriptions**

requestedMeasurements

This field specifies the E-CID measurements requested. This is represented by a bit string, with a one-value at the bit position means the particular measurement is requested; a zero-value means not requested.

6.5.3.4 E-CID Capability Information

- ***ECID-ProvideCapabilities***

The IE *ECID-ProvideCapabilities* is used by the target device to indicate its capability to support E-CID and to provide its E-CID location capabilities to the location server.

```

-- ASN1START
ECID-ProvideCapabilities ::= SEQUENCE {
    ecid-MeasSupported  BIT STRING {
        rsrpSup          (0),
        rsrqSup          (1),
        ueRxTxSup        (2),
        nrsrpSup-r14     (3),
        nrsrqSup-r14     (4)} (SIZE(1..8)),
    ...
    [[ ueRxTxSupTDD-r13
    ]],
    [[ periodicalReporting-r14
        triggeredReporting-r14
        idleStateForMeasurements-r14
    ]]
}
-- ASN1STOP

```

***ECID-Provide-Capabilities* field descriptions**

ecid-MeasSupported

This field specifies the E-CID measurements supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular measurement is supported; a zero-value means not supported. A zero-value in all bit positions in the bit string means only the basic Cell ID positioning method is supported by the target device.

If the UE Rx-Tx time difference measurement is supported by the target device (i.e., *ueRxTxSup* field is set to one), it means that the UE supports the UE Rx-Tx time difference measurement reporting via both LPP signaling and RRC signalling.

If a target device doesn't support LPP, the E-SMLC may assume the target device can not report the UE Rx-Tx time difference measurement results via RRC signalling.

ueRxTxSupTDD

This field, if present, indicates that any UE Rx-Tx time difference measurement reporting for TDD from the target device includes the $N_{TAoffset}$ according to [16][17] and uses the UE Rx-Tx time difference measurement report mapping for TDD as specified in 3GPP TS 36.133 [18]. This field may only be included if the *ueRxTxSup* field in *ecid-MeasSupported* is set to value one.

periodicalReporting

This field, if present, indicates that the target device supports *periodicalReporting* of ECID measurements. If this field is absent, the location server may assume that the target device does not support *periodicalReporting* in *CommonIEsRequestLocationInformation*.

triggeredReporting

This field, if present, indicates that the target device supports *triggeredReporting* for the *cellChange* event. If this field is absent, the location server may assume that the target device does not support *triggeredReporting* in *CommonIEsRequestLocationInformation*.

<i>ECID-Provide-Capabilities</i> field descriptions
--

idleStateForMeasurements

This field, if present, indicates that the target device requires idle state to perform ECID measurements.

6.5.3.5 E-CID Capability Information Request

- ***ECID-RequestCapabilities***

The IE *ECID-RequestCapabilities* is used by the location server to request E-CID positioning capabilities from a target device.

```
-- ASN1START
ECID-RequestCapabilities ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

6.5.3.6 E-CID Error Elements

- ***ECID-Error***

The IE *ECID-Error* is used by the location server or target device to provide E-CID error reasons to the target device or location server, respectively.

```
-- ASN1START
ECID-Error ::= CHOICE {
    locationServerErrorCauses           ECID-LocationServerErrorCauses,
    targetDeviceErrorCauses            ECID-TargetDeviceErrorCauses,
    ...
}
-- ASN1STOP
```

- ***ECID-LocationServerErrorCauses***

The IE *ECID-LocationServerErrorCauses* is used by the location server to provide E-CID error reasons to the target device.

```
-- ASN1START
ECID-LocationServerErrorCauses ::= SEQUENCE {
    cause      ENUMERATED { undefined,
                           ...
                           },
    ...
}
-- ASN1STOP
```

- ***ECID-TargetDeviceErrorCauses***

The IE *ECID-TargetDeviceErrorCauses* is used by the target device to provide E-CID error reasons to the location server.

```
-- ASN1START
ECID-TargetDeviceErrorCauses ::= SEQUENCE {
    cause      ENUMERATED { undefined,
                           requestedMeasurementNotAvailable,
                           notAllRequestedMeasurementsPossible,
                           ...
                           },
    ...
}
```

```

        },
      rsrpMeasurementNotPossible      NULL      OPTIONAL,
      rsrqMeasurementNotPossible     NULL      OPTIONAL,
      ueRxTxMeasurementNotPossible  NULL      OPTIONAL,
      ...
      [
        nrsrpMeasurementNotPossible-r14    NULL      OPTIONAL,
        nrsrqMeasurementNotPossible-r14   NULL      OPTIONAL
      ]
}

-- ASN1STOP

```

***ECID-TargetDeviceErrorCauses* field descriptions**

cause

This field provides a ECID specific error cause. If the cause value is '*notAllRequestedMeasurementsPossible*', the target device was not able to provide all requested ECID measurements (but may be able to provide some measurements). In this case, the target device should include any of the '*rsrpMeasurementNotPossible*', '*rsrqMeasurementNotPossible*', '*ueRxTxMeasurementNotPossible*', '*nrsrpMeasurementNotPossible*', or '*nrsrqMeasurementNotPossible*' fields, as applicable.

6.5.4 Terrestrial Beacon System Positioning

6.5.4.1 TBS Location Information

- *TBS-ProvideLocationInformation*

The IE *TBS-ProvideLocationInformation* is used by the target device to provide TBS location measurements to the location server. It may also be used to provide TBS positioning specific error reason.

```

-- ASN1START

TBS-ProvideLocationInformation-r13 ::= SEQUENCE {
  tbs-MeasurementInformation-r13          TBS-MeasurementInformation-r13      OPTIONAL,
  tbs-Error-r13                          TBS-Error-r13                      OPTIONAL,
  ...
}

-- ASN1STOP

```

6.5.4.2 TBS Location Information Elements

- *TBS-MeasurementInformation*

The IE *TBS-MeasurementInformation* is used by the target device to provide TBS location measurements to the location server.

```

-- ASN1START

TBS-MeasurementInformation-r13 ::= SEQUENCE {
  measurementReferenceTime-r13       UTCTime                           OPTIONAL,
  mbs-SgnMeasList-r13              MBS-BeaconMeasList-r13        OPTIONAL, -- Cond MBS
  ...
}

-- ASN1STOP

```

Conditional presence	Explanation
MBS	The field is mandatory present if the <i>TBS-MeasurementInformation</i> is provided for an MBS system; otherwise it is not present.

TBS-MeasurementInformation field descriptions***measurementReferenceTime***

This field provides the UTC time when the TBS measurements are performed and should take the form of YYMMDDhhmmssZ.

mbs-SgnMeasList

This field provides the MBS measurements for up to 64 MBS beacons.

MBS-BeaconMeasList

The IE *MBS-BeaconMeasList* is used by the target device to provide MBS location measurements to the location server, as defined in the MBS ICD [24].

```
-- ASN1START

MBS-BeaconMeasList-r13 ::= SEQUENCE (SIZE(1..64)) OF MBS-BeaconMeasElement-r13

MBS-BeaconMeasElement-r13 ::= SEQUENCE {
    transmitterID-r13           INTEGER (0..32767),
    codePhase-r13                INTEGER (0..2097151),
    codePhaseRMSError-r13        INTEGER (0..63),
    ...
    [[ rssi-r14                 INTEGER (-130..-30)      OPTIONAL
    ]]
}

-- ASN1STOP
```

MBS-BeaconMeasList field descriptions***transmitterID***

This field contains the MBS transmitter identifier.

codePhase

This field contains the value of the code-phase measurement made by the target device for the particular beacon signal at the time of measurement in the units of ms. MBS specific code phase measurements (e.g. chips) are converted into unit of ms by dividing the measurements by the nominal values of the measured signal chipping rate. Scale factor 2^{-21} milli-seconds, in the range from 0 to $(1-2^{-21})$ milli-seconds.

codePhaseRMSError

This field contains the pseudorange RMS error value. This parameter is specified according to a floating-point representation shown in the table below.

rssi

This field provides an estimate of the received signal strength from the MBS beacon as referenced to the UE antenna connector.

If the estimated received signal strength for the MBS beacon is less than -130 dBm, the UE shall report an RSSI value of -130. If the estimated received signal strength for the MBS beacon is greater than -30 dBm, the UE shall report an RSSI value of -30.

Scale factor 1 dBm.

floating-point representation

Index	Mantissa	Exponent	Floating-Point value, x_i	Pseudorange value, P [m]
0	000	000	0.5	$P < 0.5$
1	001	000	0.5625	$0.5 \leq P < 0.5625$
i	x	y	$0.5 * (1 + x/8) * 2^y$	$x_{i-1} \leq P < x_i$
62	110	111	112	$104 \leq P < 112$
63	111	111	--	$112 \leq P$

6.5.4.3 TBS Location Information Request

- *TBS-RequestLocationInformation*

The IE *TBS-RequestLocationInformation* is used by the location server to request location information for TBS-based methods from the target device.

```
-- ASN1START

TBS-RequestLocationInformation-r13 ::= SEQUENCE {
    mbsSgnMeasListReq-r13      BOOLEAN,
    ...
    [[ mbsAssistanceAvailability-r14      BOOLEAN
        mbsRequestedMeasurements-r14      BIT STRING {
            rssi                  (0) } (SIZE(1..8)) ] OPTIONAL, -- Need ON
    ]]
}

-- ASN1STOP
```

TBS-RequestLocationInformation field descriptions

mbsSgnMeasListReq

This field indicates whether the target device is requested to report MBS measurements in *TBS-MeasurementInformation* IE or not. TRUE means requested.

mbsAssistanceAvailability

This field indicates whether the target device may request additional MBS assistance data from the server. TRUE means allowed and FALSE means not allowed.

mbsRequestedMeasurements

This field indicates the additional MBS measurements requested and may only be included if *mbsSgnMeasListReq* is set to TRUE. This field is represented by a bit string, with a one-value at the bit position means the particular measurement is requested; a zero-value means not requested. The following measurement requests can be included.

rssi: Beacon signal strength at the target

6.5.4.4 TBS Capability Information

- *TBS-ProvideCapabilities*

The IE *TBS-ProvideCapabilities* is used by the target device to indicate its capability to support TBS and to provide its TBS location capabilities to the location server.

```
-- ASN1START

TBS-ProvideCapabilities-r13 ::= SEQUENCE {
    tbs-Modes-r13          BIT STRING { standalone      (0),
                                         ue-assisted     (1),
                                         ue-based       (2) } (SIZE (1..8)),
    ...
    [[ mbs-AssistanceDataSupportList-r14      MBS-AssistanceDataSupportList-r14      OPTIONAL,
        periodicalReportingSupported-r14      PositioningModes           OPTIONAL,
        mbs-ConfigSupport-r14      BIT STRING { tb1      (0),
                                                tb2      (1),
                                                tb3      (2),
                                                tb4      (3) } (SIZE (1..8)) ] OPTIONAL,
        mbs-IdleStateForMeasurements-r14      ENUMERATED { required }           OPTIONAL
    ]]
}

-- ASN1STOP
```

TBS-ProvideCapabilities field descriptions

tbs-Modes

This field specifies the TBS mode(s) supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular TBS mode is supported; a zero-value means not supported.

TBS-ProvideCapabilities field descriptions	
mbs-AssistanceDataSupportList	
This list defines the MBS assistance data supported by the target device. This field shall be present if the target device supports MBS assistance data.	
periodicalReportingSupported	
This field, if present, specifies the positioning modes for which the target device supports <i>periodicalReporting</i> . This is represented by a bit string, with a one-value at the bit position means <i>periodicalReporting</i> for the positioning mode is supported; a zero-value means not supported. If this field is absent, the location server may assume that the target device does not support <i>periodicalReporting</i> in <i>CommonIEsRequestLocationInformation</i> .	
mbs-ConfigSupport	
This field specifies the MBS configurations supported by the target device. This field shall be present if the target device supports MBS [24].	
mbs-IdleStateForMeasurements	
This field, if present, indicates that the target device requires idle state to perform MBS measurements.	

- *MBS-AssistanceDataSupportList*

The IE *MBS-AssistanceDataSupportList* is used by the target device to indicate its capability to support MBS Assistance Data and to provide its capabilities to the location server.

```
-- ASN1START

MBS-AssistanceDataSupportList-r14 ::= SEQUENCE {
    mbs-AcquisitionAssistanceDataSupport-r14      BOOLEAN,
    mbs-AlmanacAssistanceDataSupport-r14          BOOLEAN,
    ...
}

-- ASN1STOP
```

MBS-AssistanceDataSupportList field descriptions	
mbs-AcquisitionAssistanceDataSupport	
This field specifies whether the target device supports MBS Acquisition Assistance Data. TRUE means supported.	
mbs-AlmanacAssistanceDataSupport	
This field specifies whether the target device supports MBS Almanac Assistance Data. TRUE means supported.	

6.5.4.5 TBS Capability Information Request

- *TBS-RequestCapabilities*

The IE *TBS-RequestCapabilities* is used by the location server to request TBS positioning capabilities from a target device.

```
-- ASN1START

TBS-RequestCapabilities-r13 ::= SEQUENCE {
    ...
}

-- ASN1STOP
```

6.5.4.6 TBS Error Elements

- *TBS-Error*

The IE *TBS-Error* is used by the location server or target device to provide TBS error reasons to the target device or location server, respectively.

```
-- ASN1START

TBS-Error-r13 ::= CHOICE {
    locationServerErrorCauses-r13      TBS-LocationServerErrorCauses-r13,
    targetDeviceErrorCauses-r13       TBS-TargetDeviceErrorCauses-r13,
```

```

}
-- ASN1STOP

```

TBS-LocationServerErrorCauses

The IE *TBS-LocationServerErrorCauses* is used by the location server to provide error reasons for TBS positioning to the target device.

```

-- ASN1START
TBS-LocationServerErrorCauses-r13 ::= SEQUENCE {
    cause-r13      ENUMERATED { undefined,
                                ...,
                                assistanceDataNotSupportedByServer-v1420,
                                assistanceDataSupportedButCurrentlyNotAvailableByServer-v1420
                            },
    ...
}
-- ASN1STOP

```

TBS-TargetDeviceErrorCauses

The IE *TBS-TargetDeviceErrorCauses* is used by the target device to provide error reasons for TBS positioning to the location server.

```

-- ASN1START
TBS-TargetDeviceErrorCauses-r13 ::= SEQUENCE {
    cause-r13      ENUMERATED { undefined,
                                thereWereNotEnoughMBSBeaconsReceived,
                                ...,
                                assistanceDataMissing-v1420
                            },
    ...
}
-- ASN1STOP

```

***TBS-TargetDeviceErrorCauses* field descriptions**

cause

This field provides a TBS specific error cause.

6.5.4.7 TBS Assistance Data

TBS-ProvideAssistanceData

The IE *TBS-ProvideAssistanceData* is used by the location server to provide assistance data to assist in position estimation at the UE (e.g. for UE-based mode) and/or to expedite the acquisition of TBS signals. It may also be used to provide TBS positioning specific error reasons.

```

-- ASN1START
TBS-ProvideAssistanceData-r14 ::= SEQUENCE {
    tbs-AssistanceDataList-r14   TBS-AssistanceDataList-r14  OPTIONAL,    -- Need ON
    tbs-Error-r14                TBS-Error-r13            OPTIONAL,    -- Need ON
    ...
}
-- ASN1STOP

```

6.5.4.8 TBS Assistance Data Elements

- **TBS-AssistanceDataList**

The IE *TBS-AssistanceDataList* is used by the location server to provide the TBS specific assistance data to the UE.

```
-- ASN1START

TBS-AssistanceDataList-r14 ::= SEQUENCE {
    mbs-AssistanceDataList-r14      MBS-AssistanceDataList-r14      OPTIONAL, -- Need ON
    ...
}

MBS-AssistanceDataList-r14 ::= SEQUENCE (SIZE (1..maxMBS-r14)) OF MBS-AssistanceDataElement-r14

MBS-AssistanceDataElement-r14 ::= SEQUENCE {
    mbs-AlmanacAssistance-r14      MBS-AlmanacAssistance-r14      OPTIONAL, -- Need ON
    mbs-AcquisitionAssistance-r14   MBS-AcquisitionAssistance-r14   OPTIONAL, -- Need ON
    ...
}

maxMBS-r14      INTEGER ::= 64

-- ASN1STOP
```

- **MBS-AlmanacAssistance**

The IE *MBS-AlmanacAssistance* is used by the location server to provide LLA of MBS transmitters to enable position estimation at the UE.

```
-- ASN1START

MBS-AlmanacAssistance-r14 ::= SEQUENCE {
    transmitterID-r14           INTEGER (0..32767),
    transmitterLatitude-r14     BIT STRING (SIZE (26)),
    transmitterLongitude-r14   BIT STRING (SIZE (27)),
    transmitterAltitude-r14    BIT STRING (SIZE (15)),
    timeCorrection-r14          INTEGER (0..25)   OPTIONAL, -- Need ON
    ...
}

-- ASN1STOP
```

MBS-AlmanacAssistance field descriptions	
transmitterID	This field specifies the MBS transmitter ID [24].
transmitterLatitude	This field specifies latitude of the MBS transmitter, degrees. Scale factor $4/2^{20}$ decimal degrees, added to -90° . Valid range -90° to 90° [24].
transmitterLongitude	This field specifies longitude of the MBS transmitter, degrees. Scale factor $4/2^{20}$ decimal degrees, added to -180° . Valid range -180° to 180° [24].
transmitterAltitude	This field specifies altitude of the MBS transmitter, meters. Scale factor 0.29 meters, added to -500 meters. Valid range -500 to 9002.43 meters [24].
timeCorrection	This field contains the residual timing error for a particular beacon, in units of nano-seconds, in the range from 0 to 25. This field is used for UE-based mode only, by subtracting from the <i>codePhase</i> measurement made by the target device [24].

- **MBS-AcquisitionAssistance**

The IE *MBS-AcquisitionAssistance* is used by the location server to provide parameters that support acquisition of the MBS signals [24].

```
-- ASN1START
```

```
MBS-AcquisitionAssistance-r14 ::= SEQUENCE {
    transmitterID-r14           INTEGER (0..32767)           OPTIONAL,   -- Need ON
    mbsConfiguration-r14          ENUMERATED {tb1, tb2, tb3, tb4, ...} OPTIONAL,   -- Need ON
    pnCodeIndex-r14              INTEGER (1..128)            OPTIONAL,   -- Need ON
    freq-r14                     INTEGER (919750000..927250000) OPTIONAL,   -- Need ON
    ...
}
-- ASN1STOP
```

MBS-AcquisitionAssistance field descriptions

transmitterID

This field contains the MBS transmitter identifier [24].

mbsConfiguration

This field specifies MBS configuration as defined in the MBS ICD [24].

pnCodeIndex

This field specifies the index of the MBS PN code [24].

freq

This field specifies the MBS signal center frequency in units of Hz [24].

6.5.4.9 TBS Assistance Data Request

- ***TBS-RequestAssistanceData***

The IE *TBS-RequestAssistanceData* is used by the target device to request TBS assistance data from a location server.

```
-- ASN1START
TBS-RequestAssistanceData-r14 ::= SEQUENCE {
    mbs-AlmanacAssistanceDataReq-r14      BOOLEAN,
    mbs-AcquisitionAssistanceDataReq-r14   BOOLEAN,
    ...
}
-- ASN1STOP
```

6.5.5 Sensor based Positioning

6.5.5.1 Sensor Location Information

- ***Sensor-ProvideLocationInformation***

The IE *Sensor-ProvideLocationInformation* is used by the target device to provide location information for sensor-based methods to the location server. It may also be used to provide sensor specific error reason.

```
-- ASN1START
Sensor-ProvideLocationInformation-r13 ::= SEQUENCE {
    sensor-MeasurementInformation-r13      Sensor-MeasurementInformation-r13      OPTIONAL,
    sensor-Error-r13                      Sensor-Error-r13                      OPTIONAL,
    ...
}
-- ASN1STOP
```

6.5.5.2 Sensor Location Information Elements

- ***Sensor-MeasurementInformation***

The IE *Sensor-MeasurementInformation* is used by the target device to provide UE sensor measurements to the location server.

```
-- ASN1START

Sensor-MeasurementInformation-r13 ::= SEQUENCE {
    measurementReferenceTime-r13           UTCTime
    uncompensatedBarometricPressure-r13     INTEGER (30000..115000)      OPTIONAL,
    ...
    [ [
        uncertainty-r14                   SEQUENCE {
            range-r14                  INTEGER (0..1000),
            confidence-r14             INTEGER (1..100)
        }
    ]
}

-- ASN1STOP
```

Conditional presence	Explanation
<i>Barometer</i>	The field is mandatory present if the <i>Sensor-MeasurementInformation</i> is provided for barometric pressure; otherwise it is not present.

***Sensor-MeasurementInformation* field descriptions**

measurementReferenceTime

This field provides the UTC time when the sensor measurements are performed and should take the form of YYMMDDhhmmssZ.

uncompensatedBarometricPressure

This field provides the uncompensated barometric pressure as measured by the UE sensor, in units of Pa.

uncertainty

This field provides the expected range for the pressure measurement in units of Pa and the confidence as a percentage that the true pressure lies in a range of (measurement – range) to (measurement + range).

6.5.5.3 Sensor Location Information Request

– *Sensor-RequestLocationInformation*

The IE *Sensor-RequestLocationInformation* is used by the location server to request location information for sensor-based methods from a target device.

```
-- ASN1START

Sensor-RequestLocationInformation-r13 ::= SEQUENCE {
    uncompensatedBarometricPressureReq-r13      BOOLEAN,
    ...
    [ [ assistanceAvailability-r14              BOOLEAN      OPTIONAL      -- Need ON
    ]
}

-- ASN1STOP
```

***Sensor-RequestLocationInformation* field descriptions**

uncompensatedBarometricPressureReq

This field indicates whether the target device is requested to report Barometric pressure measurements in *Sensor-MeasurementInformation* IE or not. TRUE means requested.

assistanceAvailability

This field indicates whether the target device may request additional Sensor assistance data from the server. TRUE means allowed and FALSE means not allowed.

6.5.5.4 Sensor Capability Information

– *Sensor-ProvideCapabilities*

The IE *Sensor-ProvideCapabilities* is used by the target device to provide capabilities for sensor-based methods from to the location server.

```
-- ASN1START

Sensor-ProvideCapabilities-r13 ::= SEQUENCE {
    sensor-Modes-r13           BIT STRING {
        standalone      (0),
        ue-assisted     (1),
        ue-based        (2) } (SIZE (1..8)),
    ...
    [[ sensor-AssistanceDataSupportList-r14
        periodicalReportingSupported-r14
        idleStateForMeasurements-r14
    ]]
}

Sensor-AssistanceDataSupportList-r14 ::= SEQUENCE {
    ...
}

-- ASN1STOP
```

Sensor-ProvideCapabilities field descriptions

sensor-Modes

This field specifies the sensor mode(s) supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular sensor mode is supported; a zero-value means not supported.

sensor-AssistanceDataSupportList

This field specifies a list of sensor assistance data supported by the target device. This field shall be present if the target device supports assistance data for Barometric pressure sensor.

periodicalReportingSupported

This field, if present, specifies the positioning modes for which the target device supports *periodicalReporting*. This is represented by a bit string, with a one-value at the bit position means *periodicalReporting* for the positioning mode is supported; a zero-value means not supported. If this field is absent, the location server may assume that the target device does not support *periodicalReporting* in *CommonIEsRequestLocationInformation*.

idleStateForMeasurements

This field, if present, indicates that the target device requires idle state to perform sensor measurements.

6.5.5.5 Sensor Capability Information Request

- ***Sensor-RequestCapabilities***

The IE *Sensor-RequestCapabilities* is used by the location server to request capabilities for sensor-based methods from the target device.

```
-- ASN1START

Sensor-RequestCapabilities-r13 ::= SEQUENCE {
    ...
}

-- ASN1STOP
```

6.5.5.6 Sensor Error Elements

- ***Sensor-Error***

The IE *Sensor-Error* is used by the location server or target device to provide Sensor Error Reasons to the target device or location server, respectively.

```
-- ASN1START

Sensor-Error-r13 ::= CHOICE {
    locationServerErrorCauses-r13      Sensor-LocationServerErrorCauses-r13,
    targetDeviceErrorCauses-r13       Sensor-TargetDeviceErrorCauses-r13,
    ...
}

-- ASN1STOP
```

– *Sensor-LocationServerErrorCauses*

The IE *Sensor-LocationServerErrorCauses* is used by the location server to provide error reasons for Sensor positioning to the target device.

```
-- ASN1START

Sensor-LocationServerErrorCauses-r13 ::= SEQUENCE {
    cause-r13      ENUMERATED { undefined,
                                ...,
                                assistanceDataNotSupportedByServer-v1420,
                                assistanceDataSupportedButCurrentlyNotAvailableByServer-v1420
                            },
    ...
}

-- ASN1STOP
```

– *Sensor-TargetDeviceErrorCauses*

The IE *Sensor-TargetDeviceErrorCauses* is used by the target device to provide error reasons for Sensor positioning to the location server.

```
-- ASN1START

Sensor-TargetDeviceErrorCauses-r13 ::= SEQUENCE {
    cause-r13      ENUMERATED { undefined,
                                ...,
                                assistanceDataMissing-v1420
                            },
    ...
}

-- ASN1STOP
```

6.5.5.7 Sensor Assistance Data

– *Sensor-ProvideAssistanceData*

The IE *Sensor-ProvideAssistanceData* is used by the location server to provide assistance data to assist in altitude computation at the UE (e.g. for UE-based mode). It may also be used to provide Sensor positioning specific error reasons.

```
-- ASN1START

Sensor-ProvideAssistanceData-r14 ::= SEQUENCE {
    sensor-AssistanceDataList-r14      Sensor-AssistanceDataList-r14      OPTIONAL, -- Need ON
    sensor-Error-r14                  Sensor-Error-r13                OPTIONAL, -- Need ON
    ...
}

-- ASN1STOP
```

6.5.5.8 Sensor Assistance Data Elements

– *Sensor-AssistanceDataList*

The IE *Sensor-AssistanceDataList* is used by the location server to provide the Sensor specific assistance data to the UE.

```
-- ASN1START

Sensor-AssistanceDataList-r14 ::= SEQUENCE {
```

```

refPressure-r14      INTEGER (-20000..10000),
refPosition-r14      EllipsoidPointWithAltitudeAndUncertaintyEllipsoid   OPTIONAL,    -- Need ON
refTemperature-r14   INTEGER (-64..63)                                     OPTIONAL,    -- Need ON
...
}

-- ASN1STOP

```

Sensor-AssistanceDataList field descriptions

refPressure

This field specifies the atmospheric pressure (Pa) nominal at sea level, EGM96 [29] to the target. The scale factor is 1 Pa. The value is added to the nominal pressure of 101325 Pa.

refPosition

This field specifies the reference position at which the pressure measurement is made, as an ellipsoid point with altitude and uncertainty ellipsoid.

refTemperature

Local temperature measurement at the reference where the pressure measurement is made. The scale factor 1K. The value is added to 273K.

6.5.5.9 Sensor Assistance Data Request

- *Sensor-RequestAssistanceData*

The IE *Sensor-RequestAssistanceData* is used by the target device to request Sensor assistance data from a location server.

```

-- ASN1START

Sensor-RequestAssistanceData-r14 ::= SEQUENCE {
  ...
}

-- ASN1STOP

```

6.5.6 WLAN-based Positioning

This section defines support for positioning using measurements related to WLAN access points.

6.5.6.1 WLAN Location Information

- *WLAN-ProvideLocationInformation*

The IE *WLAN-ProvideLocationInformation* is used by the target device to provide measurements for one or more WLANs to the location server. It may also be used to provide WLAN positioning specific error reason.

```

-- ASN1START

WLAN-ProvideLocationInformation-r13 ::= SEQUENCE {
  wlan-MeasurementInformation-r13   WLAN-MeasurementInformation-r13   OPTIONAL,
  wlan-Error-r13                   WLAN-Error-r13                 OPTIONAL,
  ...
}

-- ASN1STOP

```

6.5.6.2 WLAN Location Information Elements

- *WLAN-MeasurementInformation*

```

-- ASN1START

WLAN-MeasurementInformation-r13 ::= SEQUENCE {

```

```

measurementReferenceTime-r13          UTCTime
wlan-MeasurementList-r13            WLAN-MeasurementList-r13      OPTIONAL,
                                    OPTIONAL,
}
WLAN-MeasurementList-r13 ::= SEQUENCE (SIZE(1..maxWLAN-AP-r13)) OF WLAN-MeasurementElement-r13

WLAN-MeasurementElement-r13 ::= SEQUENCE {
    wlan-AP-Identifier-r13      WLAN-AP-Identifier-r13,
    rssi-r13                   INTEGER (-127..128)           OPTIONAL,
    rtt-r13                    WLAN-RTT-r13             OPTIONAL,
    apChannelFrequency-r13     INTEGER (0..256)           OPTIONAL,
    servingFlag-r13            BOOLEAN                  OPTIONAL,
}
WLAN-AP-Identifier-r13 ::= SEQUENCE {
    bssid-r13                 OCTET STRING (SIZE (6)),
    ssid-r13                  OCTET STRING (SIZE (1..32))   OPTIONAL,
}
WLAN-RTT-r13 ::= SEQUENCE {
    rttValue-r13              INTEGER (0..16777215),
    rttUnits-r13               ENUMERATED { microseconds,
                                              hundredsofnanoseconds,
                                              tensofnanoseconds,
                                              nanoseconds,
                                              tenthsofnanoseconds,
                                              ... },
    rttAccuracy-r13            INTEGER (0..255)           OPTIONAL,
}
maxWLAN-AP-r13                  INTEGER ::= 64
-- ASN1STOP

```

***WLAN-MeasurementInformation* field descriptions**

measurementReferenceTime

This field provides the UTC time when the WLAN measurements are performed and should take the form of YYMMDDhhmmssZ.

wlan-MeasurementList

This field provides the WLAN measurements for up to 64 WLAN APs.

wlan-AP-Identifier

This field provides the BSSID and optionally the SSID of the wireless network served by the WLAN AP [26].

rssi

This field provides the AP signal strength (RSSI) of a beacon frame, probe response frame or measurement pilot frame measured at the target in dBm as defined in Table 6-7 of [26].

rtt

This field provides the measured round trip time between the target device and WLAN AP and optionally the accuracy expressed as the standard deviation of the delay. Units for each of these are 1000ns, 100ns, 10ns, 1ns, and 0.1ns.

apChannelFrequency

This field provides the AP channel number identification of the reported WLAN AP.

servingFlag

This parameter indicates whether a set of WLAN AP measurements were obtained for a serving WLAN AP (TRUE) or a non-serving WLAN AP (FALSE). A target device with multiple radio support may indicate more than one type of serving access for the same time instant.

rttValue

This field specifies the Round Trip Time (RTT) measurement between the target device and WLAN AP in units given by the field *rttUnits*.

rttUnits

This field specifies the Units for the fields *rttValue* and *rttAccuracy*. The available Units are 1000ns, 100ns, 10ns, 1ns, and 0.1ns.

rttAccuracy

This field provides the estimated accuracy of the provided *rttValue* expressed as the standard deviation in units given by the field *rttUnits*.

6.5.6.3 WLAN Location Information Request

- *WLAN-RequestLocationInformation*

The IE *WLAN-RequestLocationInformation* is used by the location server to request WLAN measurements from a target device.

```
-- ASN1START

WLAN-RequestLocationInformation-r13 ::= SEQUENCE {
    requestedMeasurements-r13    BIT STRING {
        rssi                  (0),
        rtt                   (1) } (SIZE(1..8)),
    ...
    [[ assistanceAvailability-r14   BOOLEAN           OPTIONAL -- Need ON
    ]]
}

-- ASN1STOP
```

WLAN-RequestLocationInformation field descriptions

requestedMeasurements

This field specifies the WLAN measurements requested. This is represented by a bit string, with a one-value at the bit position means the particular measurement is requested; a zero-value means not requested. The following measurement requests can be included.

rssi: AP signal strength at the target
rtt: Round Trip Time between target and AP

assistanceAvailability

This field indicates whether the target device may request additional WLAN assistance data from the server. TRUE means allowed and FALSE means not allowed.

6.5.6.4 WLAN Capability Information

- *WLAN-ProvideCapabilites*

The IE *WLAN-ProvideCapabilites* is used by the target device to provide its capabilities for WLAN positioning to the location server.

```
-- ASN1START

WLAN-ProvideCapabilities-r13 ::= SEQUENCE {
    wlan-Modes-r13          BIT STRING { standalone      (0),
                                             ue-assisted     (1),
                                             ue-based       (2) } (SIZE (1..8)),
    wlan-MeasSupported-r13  BIT STRING {
        rssi-r13            (0),
        rtt-r13             (1) } (SIZE(1..8)),
    ...
    [[ wlan-AP-AD-Supported-r14
          BIT STRING { ap-identifier   (0),
                        ap-location     (1) } (SIZE (1..8))
                         OPTIONAL,
          periodicalReportingSupported-r14 PositioningModes
          idleStateForMeasurements-r14 ENUMERATED { required } OPTIONAL
      ]]
}

-- ASN1STOP
```

<i>WLAN-ProvideCapabilities</i> field descriptions	
wlan-Modes	This field specifies the WLAN mode(s) supported by the target device. This is represented by a bit string, with a one value at the bit position means the WLAN mode is supported; a zero value means not supported.
wlan-MeasSupported	This field specifies the measurements supported by the target device when accessing a WLAN. This is represented by a bit string, with a one-value at the bit position means the particular measurement is supported; a zero-value means not supported. A zero-value in all bit positions in the bit string means only the basic WLAN positioning method is supported by the target device which is reporting of the WLAN identity. The following bits are assigned for the indicated measurements. rssi: AP signal strength at the target rtt: Round Trip Time between target and AP
wlan-AP-AD-Supported	This field specifies the WLAN AP assistance data supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular assistance data is supported; a zero-value means not supported. A zero-value in all bit positions or absence of this field means no assistance data is supported. The following bits are assigned for the indicated assistance data. ap-identifier: WLAN AP identity information ap-location: WLAN AP location information
periodicalReportingSupported	This field, if present, specifies the positioning modes for which the target device supports <i>periodicalReporting</i> . This is represented by a bit string, with a one value at the bit position means <i>periodicalReporting</i> for the positioning mode is supported; a zero value means not supported. If this field is absent, the location server may assume that the target device does not support <i>periodicalReporting</i> in <i>CommonIEsRequestLocationInformation</i> .
idleStateForMeasurements	This field, if present, indicates that the target device requires idle state to perform WLAN measurements.

6.5.6.5 WLAN Capability Information Request

- ***WLAN-RequestCapabilities***

The IE *WLAN-RequestCapabilities* is used by the location server to request WLAN positioning capabilities information from a target device.

```
-- ASN1START
WLAN-RequestCapabilities-r13 ::= SEQUENCE {
  ...
}
-- ASN1STOP
```

6.5.6.6 WLAN Error Elements

- ***WLAN-Error***

The IE *WLAN-Error* is used by the location server or target device to provide error reasons for WLAN positioning to the target device or location server, respectively.

```
-- ASN1START
WLAN-Error-r13 ::= CHOICE {
  locationServerErrorCauses-r13      WLAN-LocationServerErrorCauses-r13,
  targetDeviceErrorCauses-r13        WLAN-TargetDeviceErrorCauses-r13,
  ...
}
-- ASN1STOP
```

— *WLAN-LocationServerErrorCauses*

The IE *WLAN-LocationServerErrorCauses* is used by the location server to provide error reasons for WLAN positioning to the target device.

```
-- ASN1START

WLAN-LocationServerErrorCauses-r13 ::= SEQUENCE {
    cause-r13                               ENUMERATED {undefined,
    ...,
    requestedADNotAvailable-v1420,
    notAllrequestedADAvailable-v1420
    },
    ...
    [ [ apLocationDataUnavailable-r14        NULL      OPTIONAL      -- Need ON
    ]
}

-- ASN1STOP
```

WLAN-LocationServerErrorCauses field descriptions

cause

This field provides a WLAN AP specific error cause for the server applicable to provision of assistance data. If the cause value is '*requestedADNotAvailable*', none of the requested assistance data could be provided and no further information needs to be included. If the cause value is '*notAllRequestedADAvailable*', the server was able to provide some but not all requested WLAN AP assistance data. In this case, the server should include any of the specific error indications as applicable. Note that inclusion of these fields is applicable when some of the associated information can be provided for some WLAN APs but not for all WLAN APs.

— *WLAN-TargetDeviceErrorCauses*

The IE *WLAN-TargetDeviceErrorCauses* is used by the target device to provide error reasons for WLAN positioning to the location server.

```
-- ASN1START

WLAN-TargetDeviceErrorCauses-r13 ::= SEQUENCE {
    cause-r13                               ENUMERATED {undefined,
    ...,
    requestedMeasurementsNotAvailable,
    notAllrequestedMeasurementsPossible,
    ...
    },
    wlan-AP-RSSI-MeasurementNotPossible-r13   NULL      OPTIONAL,
    wlan-AP-RTT-MeasurementNotPossible-r13     NULL      OPTIONAL,
    ...
}

-- ASN1STOP
```

WLAN-TargetDeviceErrorCauses field descriptions

cause

This field provides a WLAN specific error cause. If the cause value is '*notAllRequestedMeasurementsPossible*', the target device was not able to provide all requested WLAN measurements (but may be able to provide some measurements). In this case, the target device should include any of the '*wlan-AP-RSSI-MeasurementNotPossible*', '*wlan-AP-RTT-MeasurementNotPossible*' fields, as applicable.

6.5.6.7 WLAN Assistance Data

— *WLAN-ProvideAssistanceData*

The IE *WLAN-ProvideAssistanceData* is used by the location server to provide assistance data to enable UE-based and UE-assisted WLAN positioning. It may also be used to provide WLAN positioning specific error reason.

```
-- ASN1START
```

```

WLAN-ProvideAssistanceData-r14 ::= SEQUENCE {
    wlan-DataSet-r14      SEQUENCE (SIZE (1..maxWLAN-DataSets-r14)) OF WLAN-DataSet-r14
                                         OPTIONAL,   -- Need ON
    wlan-Error-r14         WLAN-Error-r13
                                         OPTIONAL,   -- Need ON
    ...
}

maxWLAN-DataSets-r14      INTEGER ::= 8
-- ASN1STOP

```

WLAN-ProvideAssistanceData field descriptions

wlan-DataSet

This field provides data for sets of WLAN APs.

wlan-Error

This field provides error information and may be included when a Provide Assistance Data is sent in response to a Request Assistance Data. It is allowed to include both a *wlan-DataSet* field and a *wlan-Error* field (e.g. when only some requested WLAN assistance data is provided).

6.5.6.8 WLAN Assistance Data Elements

- ***WLAN-DataSet***

The IE *WLAN-DataSet* is used by the location server to provide WLAN AP information for one set of WLAN APs.

```

-- ASN1START

WLAN-DataSet-r14 ::= SEQUENCE {
    wlan-AP-List-r14      SEQUENCE (SIZE (1..maxWLAN-AP-r14)) OF WLAN-AP-Data-r14,
    supportedChannels-11a-r14    SupportedChannels-11a-r14    OPTIONAL,   -- Need ON
    supportedChannels-11bg-r14   SupportedChannels-11bg-r14   OPTIONAL,   -- Need ON
    ...
}

SupportedChannels-11a-r14 ::= SEQUENCE {
    ch34-r14      BOOLEAN,
    ch36-r14      BOOLEAN,
    ch38-r14      BOOLEAN,
    ch40-r14      BOOLEAN,
    ch42-r14      BOOLEAN,
    ch44-r14      BOOLEAN,
    ch46-r14      BOOLEAN,
    ch48-r14      BOOLEAN,
    ch52-r14      BOOLEAN,
    ch56-r14      BOOLEAN,
    ch60-r14      BOOLEAN,
    ch64-r14      BOOLEAN,
    ch149-r14     BOOLEAN,
    ch153-r14     BOOLEAN,
    ch157-r14     BOOLEAN,
    ch161-r14     BOOLEAN
}

SupportedChannels-11bg-r14 ::= SEQUENCE {
    ch1-r14      BOOLEAN,
    ch2-r14      BOOLEAN,
    ch3-r14      BOOLEAN,
    ch4-r14      BOOLEAN,
    ch5-r14      BOOLEAN,
    ch6-r14      BOOLEAN,
    ch7-r14      BOOLEAN,
    ch8-r14      BOOLEAN,
    ch9-r14      BOOLEAN,
    ch10-r14     BOOLEAN,
    ch11-r14     BOOLEAN,
    ch12-r14     BOOLEAN,
    ch13-r14     BOOLEAN,
    ch14-r14     BOOLEAN
}

maxWLAN-AP-r14      INTEGER ::= 128

```

-- ASN1STOP

WLAN-DataSet field descriptions

wlan-AP-List

This field provides information for WLAN APs in the data set.

supportedChannels-11a

This field defines the superset of all channels supported by all WLAN APs in the data set of type 801.11a (5GHz band).

supportedChannels-11bg

This field defines the superset of all channels supported by all WLAN APs in the data set of type 801.11b or 802.11g (2.4 GHz band).

WLAN-AP-Data

The IE *WLAN-AP-Data* is used by the location server to provide information for one WLAN AP as part of WLAN AP assistance data.

-- ASN1START

```

WLAN-AP-Data-r14 ::= SEQUENCE {
    wlan-AP-Identifier-r14           WLAN-AP-Identifier-r13,
    wlan-AP-Location-r14             WLAN-AP-Location-r14           OPTIONAL,   -- Need ON
    ...
}

WLAN-AP-Location-r14 ::= SEQUENCE {
    locationDataLCI-r14              LocationDataLCI-r14,
    ...
}

LocationDataLCI-r14 ::= SEQUENCE {
    latitudeUncertainty-r14          BIT STRING (SIZE (6)),
    latitude-r14                     BIT STRING (SIZE (34)),
    longitudeUncertainty-r14         BIT STRING (SIZE (6)),
    longitude-r14                    BIT STRING (SIZE (34)),
    altitudeUncertainty-r14          BIT STRING (SIZE (6))      OPTIONAL,   -- Need ON
    altitude-r14                     BIT STRING (SIZE (30))     OPTIONAL,   -- Need ON
    datum-r14                        BIT STRING (SIZE (8)),
    ...
}

```

-- ASN1STOP

WLAN-AP-Data field descriptions

wlan-AP-Location

- **locationDataLCI**

This field provides the location of the WLAN AP in the form of Location Configuration Information (LCI) defined in [27] and includes the following subfields:

latitudeUncertainty: 6-bits quantifying the amount of uncertainty in latitude. A value of 0 is reserved to indicate that the uncertainty is unknown; values greater than 34 are reserved. Its relation with the corresponding value in degrees is expressed with the following formula:

$$\text{latitudeUncertainty} = 8 - \text{ceil}(\log_2(\text{uncertainty in degrees}))$$

latitude: A 34-bits fixed point value consisting of 9-bits of integer and 25-bits of fraction indicating the Latitude (+/- 90 degrees) of the AP.

longitudeUncertainty: 6-bits quantifying the amount of uncertainty in longitude. A value of 0 is reserved to indicate that the uncertainty is unknown; values greater than 34 are reserved. Its relation with the corresponding value in degrees is expressed with the following formula:

$$\text{longitudeUncertainty} = 8 - \text{ceil}(\log_2(\text{uncertainty in degrees}))$$

longitude: A 34-bits fixed point value consisting of 9-bits of integer and 25-bits of fraction indicating the Longitude (+/- 180 degrees) of the AP.

altitudeUncertainty: 6-bits value quantifying the amount of uncertainty in the altitude value. A value of 0 is reserved to indicate that the uncertainty is unknown; values greater than 30 are reserved. Its relation with the corresponding value in meters is expressed with the following formula:

<i>WLAN-AP-Data</i> field descriptions	
altitude:	altitudeUncertainty = 21 - ceil(log2(uncertainty in meters)) A 30-bit fixed point value consisting of 22-bits of integer and 8-bits of fraction indicating the altitude of the AP in meters.
datum:	3-bits indicating the map datum used for the coordinates. Defined codes are: 1: World Geodetic System 1984 (WGS-84) 2: North American Datum 1983 (NAD-83) with North American Vertical Datum 1988 (NAVD-88) 3: North American Datum 1983 (NAD-83) with Mean Lower Low Water (MLLW) vertical datum.

6.5.6.9 WLAN Assistance Data Request

- *WLAN-RequestAssistanceData*

The IE *WLAN-RequestAssistanceData* is used by the target device to request WLAN assistance data from a location server.

```
-- ASN1START

WLAN-RequestAssistanceData-r14 ::= SEQUENCE {
    requestedAD-r14      BIT STRING { ap-identifier      (0),
                                         ap-location        (1) }      (SIZE (1..8)),
    visibleAPs-r14        SEQUENCE (SIZE (1..maxVisibleAPs-r14)) OF WLAN-AP-Identifier-r13
    OPTIONAL,
    wlan-AP-StoredData-r14 SEQUENCE (SIZE (1..maxKnownAPs-r14)) OF WLAN-AP-Identifier-r13
    OPTIONAL,
    ...
}

maxVisibleAPs-r14      INTEGER ::= 32
maxKnownAPs-r14        INTEGER ::= 2048

-- ASN1STOP
```

<i>WLAN-RequestAssistanceData</i> field descriptions	
<i>requestedAD</i>	This field specifies the WLAN AP assistance data requested. This is represented by a bit string, with a one-value at the bit position means the particular assistance data is requested; a zero-value means not requested. The following assistance data types are included:
ap-identifier:	WLAN AP identity information
ap-location:	WLAN AP location information
<i>visibleAPs</i>	This field enables a target to indicate to a server the identities of currently visible WLAN APs. This may assist a server to provide assistance data for WLAN APs nearby to the target. A target shall provide visible APs in order of received signal strength with the AP with the highest signal strength provided first.
<i>wlan-AP-StoredData</i>	This field enables a target to indicate to a server the identities of WLAN APs for which the target has stored assistance data received previously from the server. This may enable the server to avoid resending data for the same APs.

6.5.7 Bluetooth-based Positioning

6.5.7.1 Bluetooth Location Information

- *BT-ProvideLocationInformation*

The IE *BT-ProvideLocationInformation* is used by the target device to provide measurements for one or more Bluetooth beacons to the location server. It may also be used to provide Bluetooth positioning specific error reason.

```
-- ASN1START

BT-ProvideLocationInformation-r13 ::= SEQUENCE {
```

```

bt-MeasurementInformation-r13      BT-MeasurementInformation-r13   OPTIONAL,
bt-Error-r13                      BT-Error-r13           OPTIONAL,
...
}

-- ASN1STOP

```

6.5.7.2 Bluetooth Location Information Elements

- *BT-MeasurementInformation*

```

-- ASN1START

BT-MeasurementInformation-r13 ::= SEQUENCE {
    measurementReferenceTime-r13      UTCTime                  OPTIONAL,
    bt-MeasurementList-r13            BT-MeasurementList-r13  OPTIONAL,
    ...
}

BT-MeasurementList-r13 ::= SEQUENCE (SIZE(1..maxBT-Beacon-r13)) OF BT-MeasurementElement-r13

BT-MeasurementElement-r13 ::= SEQUENCE {
    btAddr-r13                      BIT STRING (SIZE (48)),
    rssi-r13                         INTEGER (-128..127)        OPTIONAL,
    ...
}

maxBT-Beacon-r13                 INTEGER ::= 32

-- ASN1STOP

```

<i>BT-MeasurementInformation</i> field descriptions	
<i>measurementReferenceTime</i>	This field provides the UTC time when the Bluetooth measurements are performed and should take the form of YYMMDDhhmmssZ.
<i>bt-MeasurementList</i>	This field provides the Bluetooth measurements for up to 32 Bluetooth beacons.
<i>btAddr</i>	This field specifies the Bluetooth public address of the Bluetooth beacon [25].
<i>rssi</i>	This field provides the beacon received signal strength indicator (RSSI) in dBm.

6.5.7.3 Bluetooth Location Information Request

- *BT-RequestLocationInformation*

The IE *BT-RequestLocationInformation* is used by the location server to request Bluetooth measurements from a target device.

```

-- ASN1START

BT-RequestLocationInformation-r13 ::= SEQUENCE {
    requestedMeasurements-r13  BIT STRING {
                                rssi          (0) } (SIZE(1..8)),
    ...
}

-- ASN1STOP

```

<i>BT-RequestLocationInformation</i> field descriptions
--

requestedMeasurements

This field specifies the Bluetooth measurements requested. This is represented by a bit string, with a one-value at the bit position means the particular measurement is requested; a zero-value means not requested. The following measurement requests can be included.

rssi: Bluetooth beacon signal strength at the target

6.5.7.4 Bluetooth Capability Information

- ***BT-ProvideCapabilities***

The IE *BT-ProvideCapabilites* is used by the target device to provide its capabilities for Bluetooth positioning to the location server.

```
-- ASN1START

BT-ProvideCapabilities-r13 ::= SEQUENCE {
    bt-Modes-r13          BIT STRING { standalone      (0),
                                         ue-assisted     (1) }      (SIZE (1..8)),
    bt-MeasSupported-r13   BIT STRING { rssi-r13        (0) }      (SIZE (1..8)),
    ...
    [
        idleStateForMeasurements-r14
            ENUMERATED { required }                      OPTIONAL,
        periodicalReportingSupported-r14
            PositioningModes                           OPTIONAL
    ]
}
-- ASN1STOP
```

<i>BT-ProvideCapabilities</i> field descriptions

bt-Modes

This field specifies the Bluetooth mode(s) supported by the target device. This is represented by a bit string, with a one value at the bit position means the Bluetooth mode is supported; a zero value means not supported.

bt-MeasSupported

This field specifies the Bluetooth measurements supported by the target device. This is represented by a bit string, with a one-value at the bit position means the particular measurement is supported; a zero-value means not supported. A zero-value in all bit positions in the bit string means only the basic Bluetooth positioning method is supported by the target device which is reporting of the Bluetooth beacon identity. The following bits are assigned for the indicated measurements.

rssi: Bluetooth beacon signal strength at the target device

idleStateForMeasurements

This field, if present, indicates that the target device requires idle state to perform BT measurements.

periodicalReportingSupported

This field, if present, specifies the positioning modes for which the target device supports *periodicalReporting*. This is represented by a bit string, with a one value at the bit position means *periodicalReporting* for the positioning mode is supported; a zero value means not supported. If this field is absent, the location server may assume that the target device does not support *periodicalReporting* in *CommonIEsRequestLocationInformation*.

6.5.7.5 Bluetooth Capability Information Request

- ***BT-RequestCapabilities***

The IE *BT-RequestCapabilites* is used by the location server to request Bluetooth positioning capabilities from a target device.

```
-- ASN1START

BT-RequestCapabilities-r13 ::= SEQUENCE {
    ...
}
-- ASN1STOP
```

6.5.7.6 BT Error Elements

- *BT-Error*

The IE *BT-Error* is used by the location server or target device to provide error reasons for Bluetooth positioning to the target device or location server, respectively.

```
-- ASN1START

BT-Error-r13 ::= CHOICE {
    locationServerErrorCauses-r13      BT-LocationServerErrorCauses-r13,
    targetDeviceErrorCauses-r13        BT-TargetDeviceErrorCauses-r13,
    ...
}

-- ASN1STOP
```

- *BT-LocationServerErrorCauses*

The IE *BT-LocationServerErrorCauses* is used by the location server to provide error reasons for Bluetooth positioning to the target device.

```
-- ASN1START

BT-LocationServerErrorCauses-r13 ::= SEQUENCE {
    cause-r13                      ENUMERATED {undefined, ...},
    ...
}

-- ASN1STOP
```

- *BT-TargetDeviceErrorCauses*

The IE *BT-TargetDeviceErrorCauses* is used by the target device to provide error reasons for Bluetooth positioning to the location server.

```
-- ASN1START

BT-TargetDeviceErrorCauses-r13 ::= SEQUENCE {
    cause-r13                      ENUMERATED {undefined,
                                                requestedMeasurementsNotAvailable,
                                                notAllRequestedMeasurementsPossible,
                                                ...},
    bt-Beacon-rssiMeasurementNotPossible-r13   NULL      OPTIONAL,
    ...
}

-- ASN1STOP
```

<i>BT-TargetDeviceErrorCauses</i> field descriptions
cause This field provides a Bluetooth specific error cause. If the cause value is ' <i>notAllRequestedMeasurementsPossible</i> ', the target device was not able to provide all requested Bluetooth measurements (but may be able to provide some measurements). In this case, the target device should include ' <i>bt-Beacon-rssiMeasurementNotPossible</i> ' field.

- *End of LPP-PDU-Definitions*

```
-- ASN1START

END

-- ASN1STOP
```

Annex A (informative):
Change History

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Cat	Subject/Comment	New version
2009-10	RAN2 #67bis	R2-096252				RAN2 agreed TS 36.355 v0.1.0	0.1.0
2009-11	RAN2 #68	R2-097492				RAN2 agreed TS 36.355 v2.0.0	2.0.0
2009-12	RP-46	RP-091208				RAN #46 approval of TS 36.355	9.0.0
2010-03	RP-47	RP-100304	0001	-		Clarification on Position location	9.1.0
	RP-47	RP-100304	0002	-		Clarification on UE Rx-Tx time difference supporting capability	9.1.0
	RP-47	RP-100304	0003	2		Completion of LPP common material	9.1.0
	RP-47	RP-100304	0004	5		Completion of OTDOA in LPP	9.1.0
	RP-47	RP-100304	0006	-		Provision of Frame Drift Information in Network Time	9.1.0
	RP-47	RP-100304	0007	-		Clarification of measurement reference point	9.1.0
	RP-47	RP-100304	0010	-		GNSS-Differential Corrections Support	9.1.0
	RP-47	RP-100304	0011	-		BSAlign Indication in GNSS Reference Time	9.1.0
	RP-47	RP-100304	0012	1		Changes to reflect LPP ASN.1 review	9.1.0
	RP-47	RP-100304	0013	1		Introduction of LPP reliability sublayer	9.1.0
	RP-47	RP-100304	0015	-		LPP error procedures and conditions	9.1.0
	RP-47	RP-100304	0016	-		Triggered Location Information Transfer due to Cell Change	9.1.0
2010-06	RP-48	RP-100558	0018	2		Addition of need codes to optional LPP information elements	9.2.0
	RP-48	RP-100558	0019	1		Miscellaneous corrections to LPP stage 3	9.2.0
	RP-48	RP-100558	0020	1		Small corrections to LPP specification	9.2.0
	RP-48	RP-100558	0021	-		Clarifications of OTDOA parameters	9.2.0
	RP-48	RP-100558	0022	1		Signalling support for PRS muting in OTDOA	9.2.0
	-	-	-	-		Two times capital R replaced by lower case r in "MeasuredResultsElement" (undoing not intended change)	9.2.1
2010-09	RP-49	RP-100852	0024	-		Addition of an EPDU to an LPP Error and LPP Abort	9.3.0
	RP-49	RP-100852	0026	-		Division of LPP into Separate ASN.1 Modules with a Global Identifier	9.3.0
	RP-49	RP-100852	0028	-		Proposed Corrections to LPP Reliable Transport	9.3.0
	RP-49	RP-100852	0029	-		Proposed Corrections to the PeriodicalReportingCriteria in LPP	9.3.0
	RP-49	RP-100852	0030	1		Various corrections and clarifications to LPP	9.3.0
	RP-49	RP-100852	0031	-		Support of functional components for LPP reliable transport	9.3.0
	RP-49	RP-100852	0032	1		Introduction of EPDU ID requested by OMA LOC	9.3.0
	RP-49	RP-100852	0035	1		Several corrections in LPP	9.3.0
	RP-49	RP-100852	0036	-		Clarification to Assistance Data Transfer Procedure	9.3.0
2010-12	RP-50	RP-101207	0037	-		Correction of reliable transport terminology in description of LPP-Message	9.4.0
	RP-50	RP-101207	0038	-		One cell with known SFN in OTDOA assistance data	9.4.0
	RP-50	RP-101207	0039	1		UE frequency capability for LPP	9.4.0
	RP-50	RP-101207	0041	-		Correction to LPP reliable transport	9.4.0
	RP-50	RP-101207	0042	-		Correction to LPP Error procedure	9.4.0
	RP-50	RP-101207	0043	-		Addition of missing reference to LPPe	9.4.0
	RP-50	RP-101207	0044	2		Correction to the OTDOA assistance data	9.4.0
	RP-50	RP-101226	0040	-		Update of 'serving cell' terminology in 36.355	10.0.0
2011-03	RP-51	RP-110269	0046	-		Editorial corrections to 36.355	10.1.0
	RP-51	RP-110269	0048	-		Removal of FFS for retransmission timer in LPP	10.1.0
	RP-51	RP-110269	0050	-		Correction to code phase encoding in GNSS acquisition assistance	10.1.0
	RP-51	RP-110269	0052	1		Clarification on SFN provided with OTDOA measurement	10.1.0
	RP-51	RP-110269	0053	1		Introduction of OTDOA inter-freq RSTD measurement indication procedure	10.1.0
	RP-51	RP-110269	0057	-		Small corrections in 36.355	10.1.0
	RP-51	RP-110269	0058	3		Further corrections to the OTDOA assistance data	10.1.0
2011-06	RP-52	RP-110830	0060	-		Clarifications to description of OTDOA positioning fields	10.2.0
2011-09	RP-53	RP-111279	0062	1		Various corrections to LPP	10.3.0
	RP-53	RP-111279	0064	-		Mandatory support of PRS for OTDOA measurements	10.3.0
2011-12	RP-54	RP-111709	0066	-		Clarification of packed encoding rules of LPP	10.4.0
	RP-54	RP-111709	0068	-		Clarification of first bit in BIT STRING definitions	10.4.0
2012-06	RP-56	RP-120808	0071	-		Usage of additionalInformation IE	10.5.0
2012-09	RP-57	RP-121424	0074	2		Corrections to GNSS Acquisition Assistance Data	10.6.0
	RP-57	-	-	-		Upgrade to the Release 11 - no technical change	11.0.0
2012-12	RP-58	RP-121931	0077	-		Correcting the referencing of QoS parameters	11.1.0
	RP-58	RP-121931	0080	-		Correction to missing field description in GNSS-AcquisitionAssistance IE	11.1.0
2013-03	RP-59	RP-130237	0083	1		Extending E-UTRA Frequency Band and EARFCN value range	11.2.0
	RP-59	RP-130230	0086	-		Correction to PRS Muting Configuration	11.2.0
2013-06	RP-60	RP-130803	0088	-		Correction for ASN.1 errors from CR0083r1	11.3.0
	RP-60	RP-130803	0091	-		Correction to integer code phase field description in GNSS Acquisition Assistance	11.3.0
	RP-60	RP-130803	0093	-		Correction to serving cell terminology	11.3.0
	RP-60	RP-130803	0094	-		Encoding of LPP IEs	11.3.0
2013-09	RP-61	RP-131314	0098	-		Correction on svReqList	11.4.0

2013-12	RP-62	RP-131984	0103	-		Correction to missing capability indication for inter-frequency RSTD measurements	11.5.0
	RP-62	RP-131984	0107	1		Correction to Galileo assistance data elements	11.5.0
	RP-62	RP-132000	0104	1		Stage 3 CR of TS 36.355 for introducing BDS in LTE	12.0.0
	RP-62	RP-131984	0108	-		Correction to Galileo assistance data elements	12.0.0
2014-03	RP-63	RP-140342	0112	1		Clarification to gnss-DayNumber	12.1.0
2014-06	RP-64	RP-140871	0119	-		Signaling of OTDOA Neighbour Cell Information and Measurements	12.2.0
2014-12	RP-66	RP-142114	0122	-		Correction to Galileo Assistance Data	12.3.0
	RP-66	RP-142114	0123	-		Addition of an Early Position Fix to LPP	12.3.0
	RP-66	RP-142120	0124	-		BDS update to version 2.0	12.3.0
2015-03	RP-67	RP-150369	0126	2		Correction of GLONASS system time	12.4.0
	RP-67	RP-150376	0125	1		LPP clean-up	12.4.0
2015-12	RP-70	RP-152055	0134	1		Correction to the definition of Need codes	12.5.0
2015-12	RP-70	RP-152068	0137	3		RAT-Independent positioning enhancements	13.0.0
2016-03	RP-71	RP-160463	0138	1		Correction to GLONASS IOD value range	13.1.0
	RP-71	RP-160470	0140	1		r13 Information Element correction	13.1.0
	RP-71	RP-160470	0141	-		WLAN AP Identifier correction	13.1.0
	RP-71	RP-160470	0142	1		LPP clean-up	13.1.0
2016-09	RP-73	RP-161750	0143	4		Correction of ECID positioning for TDD	13.2.0
2016-12	RP-74	RP-162317	0160	1		Clarification of WLAN RSSI value range	13.3.0
2016-12	RP-74	RP-162326	0155	1		CR for 36.355 Further Indoor positioning enhancements	14.0.0
	RP-74	RP-162327	0157	-		Barometric Pressure Uncertainty IEs	14.0.0
	RP-74	RP-162326	0161	1		Introduction of Further Indoor Positioning Enhancements	14.0.0
2017-03	RP-75	RP-170636	0162	3	B	Introduction of positioning for further enhanced MTC	14.1.0
	RP-75	RP-170642	0163	-	C	Addition of periodical and triggered reporting capability signalling	14.1.0
	RP-75	RP-170642	0165	2	F	Further Indoor positioning enhancements corrections	14.1.0
	RP-75	RP-170637	0166	-	B	Introduction of positioning support for NB-IoT	14.1.0
2017-06	RP-76	RP-171224	0169	3	F	Compact Signal Measurement Information for OTDOA	14.2.0
	RP-76	RP-171223	0171	1	F	Correction to PRS Subframe Offset	14.2.0
	RP-76	RP-171223	0173	1	F	Correction to SFN time stamp in OTDOA Signal Measurement Information	14.2.0
	RP-76	RP-171223	0174	1	F	Correction to OTDOA capabilities	14.2.0
	RP-76	RP-171224	0175	1	F	Correction to NPRS	14.2.0
	RP-76	RP-171225	0176	2	F	LPP clean-up	14.2.0
	RP-76	RP-171224	0177	-	F	Corrections to number of NPRS carriers and ECID measurements for NB-IoT	14.2.0
	RP-76	RP-171224	0178	1	F	Removal of FFS for retransmission timer in LPP	14.2.0
	RP-76	RP-171224	0181	1	F	Signalling optimisation for NB-IoT Enhancements	14.2.0

History

Document history		
V14.1.0	April 2017	Publication
V14.2.0	July 2017	Publication