

# ETSI TS 145 005 V11.1.0 (2012-10)



**Digital cellular telecommunications system (Phase 2+);  
Radio transmission and reception  
(3GPP TS 45.005 version 11.1.0 Release 11)**



---

**Reference**

RTS/TSGG-0145005vb10

---

**Keywords**

GSM

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2012.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.  
**3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and  
of the 3GPP Organizational Partners.  
**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

# Contents

|   |    |
|---|----|
| Intellectual Property Rights .....  | 2  |
| Foreword.....   | 2  |
| Foreword.....   | 10 |
| 1 Scope .....   | 11 |
| 1.1 References .....  | 12 |
| 1.2 Abbreviations .....   | 13 |
| 1.3 Definitions .....   | 13 |
| 2 Frequency bands and channel arrangement.....  | 14 |
| 3 Reference configuration .....   | 16 |
| 4 Transmitter characteristics .....   | 17 |
| 4.1 Output power.....   | 17 |
| 4.1.1 Mobile Station .....  | 17 |
| 4.1.2 Base station.....   | 21 |
| 4.1.2.1 Additional requirements for PCS 1 900 and MXM 1900 Base stations.....                   | 23 |
| 4.1.2.2 Additional requirements for GSM 850 and MXM 850 Base stations .....                     | 23 |
| 4.1.2.3 Additional requirements for GSM 700 Base stations.....                                  | 23 |
| 4.2 Output RF spectrum .....  | 24 |
| 4.2.1 Spectrum due to the modulation and wide band noise.....                                   | 24 |
| 4.2.1.1 General requirements for all types of Base stations and MS.....                         | 24 |
| 4.2.1.2 Additional requirements for multicarrier BTS .....                                      | 25 |
| 4.2.1.3 Tables for spectrum requirements due to modulation and wideband noise.....              | 25 |
| 4.2.1.4 Exceptions for spectrum due to modulation and wideband noise .....                      | 29 |
| 4.2.1.4.1 Mobile Stations and Base Transceiver Stations except multicarrier BTS .....           | 29 |
| 4.2.1.4.2 Multicarrier BTS .....  | 30 |
| 4.2.2 Spectrum due to switching transients .....  | 31 |
| 4.2.2.1 General requirements .....  | 31 |
| a) Mobile Station:.....   | 32 |
| b) Base transceiver station:.....   | 32 |
| 4.3 Spurious emissions .....  | 32 |
| 4.3.1 Principle of the specification .....  | 33 |
| 4.3.2 Base Transceiver Station .....  | 34 |
| 4.3.2.1 General requirements .....  | 34 |
| 4.3.2.2 Additional requirements for co-existence with GSM systems on other frequency bands..... | 35 |
| 4.3.2.3 Additional requirements for co-existence with 3 G .....                                 | 36 |
| 4.3.3 Mobile Station .....  | 37 |
| 4.3.3.1 Mobile Station GSM 400, T-GSM 810, GSM 900 and DCS 1 800.....                           | 37 |
| 4.3.3.2 Mobile Station GSM 700, GSM 850 and PCS 1 900.....                                      | 38 |
| 4.4 Radio frequency tolerance.....  | 39 |
| 4.5 Output level dynamic operation .....  | 39 |
| 4.5.1 Base Transceiver Station .....  | 39 |
| 4.5.2 Mobile Station .....  | 40 |
| 4.6 Modulation accuracy .....   | 40 |
| 4.6.1 GMSK modulation.....  | 40 |
| 4.6.2 QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM modulations .....                                   | 40 |
| 4.6.2.1 RMS EVM .....   | 41 |
| 4.6.2.1.1 MS requirements .....   | 41 |
| 4.6.2.1.2 Requirements for BTS.....   | 41 |
| 4.6.2.2 Origin Offset Suppression.....  | 42 |
| 4.6.2.3 Peak EVM.....   | 42 |
| 4.6.2.4 95:th percentile.....   | 42 |
| 4.7 Intermodulation attenuation.....  | 43 |
| 4.7.1 Base transceiver station .....  | 43 |
| 4.7.2 Intra BTS intermodulation attenuation .....   | 43 |

|           |  |    |
|-----------|--|----|
| 4.7.2.1   | GSM 400, GSM 900, DCS 1800.....  | 43 |
| a)        | Requirements for BTS except multicarrier BTS.....                              | 43 |
| b)        | Requirements for multicarrier BTS .....  | 43 |
| 4.7.2.2   | MXM 850 and MXM 1900 .....   | 44 |
| 4.7.2.3   | GSM 700, GSM 850 and PCS 1900.....   | 44 |
| a)        | Requirements for BTS except multicarrier BTS.....                              | 44 |
| b)        | Requirements for multicarrier BTS .....  | 45 |
| c)        | Additional requirements for all BTS .....                                      | 45 |
| 4.7.3     | Void .....   | 45 |
| 4.7.4     | Mobile PBX (GSM 900 only).....   | 45 |
| 5         | Receiver characteristics .....   | 45 |
| 5.1       | Blocking characteristics .....   | 46 |
| 5.1.1     | Definitions of applicable frequency ranges .....                               | 46 |
| 5.1.2     | Requirements for MS.....   | 47 |
| 5.1.3     | Requirements for BTS .....   | 48 |
| 5.1.4     | Signal levels of blocking signal .....   | 49 |
| 5.1.5     | Micro- and pico-BTS .....  | 54 |
| 5.2       | AM suppression characteristics .....   | 54 |
| 5.2.1     | Requirements for MS.....   | 54 |
| 5.2.2     | Requirements for BTS .....   | 54 |
| 5.3       | Intermodulation characteristics .....  | 55 |
| 5.3.1     | Requirements for MS.....   | 55 |
| 5.3.2     | Requirements for BTS .....   | 55 |
| 5.4       | Spurious emissions .....   | 56 |
| 6         | Transmitter/receiver performance .....   | 56 |
| a)        | MS conditions .....  | 56 |
| b)        | BTS conditions .....   | 57 |
| 6.1       | Nominal Error Rates (NER) .....  | 57 |
| 6.1.1     | GMSK modulation.....   | 58 |
| 6.1.1.1   | General performance requirements .....   | 58 |
| 6.1.1.2   | Requirements for MS .....  | 58 |
| 6.1.1.3   | Requirements for BTS.....  | 58 |
| 6.1.2     | QPSK/8-PSK modulation .....  | 59 |
| 6.1.2.1   | Requirements for MS .....  | 59 |
| 6.1.2.2   | Requirements for BTS.....  | 59 |
| 6.1.3     | 16-QAM/32-QAM modulation.....  | 60 |
| 6.1.3.1   | Requirements for MS .....  | 60 |
| 6.1.3.2   | Requirements for BTS.....  | 61 |
| 6.2       | Reference sensitivity level.....   | 61 |
| 6.2.1     | Circuit-switched channels.....   | 61 |
| 6.2.1a    | Reference performance in VAMOS mode .....                                      | 64 |
| 6.2.2     | Packet-switched channels .....   | 65 |
| 6.2.3     | Flexible Layer One .....   | 67 |
| 6.2.4     | Repeated associated control channel performance .....                          | 67 |
| 6.2.5     | Enhanced MS receiver performance .....   | 67 |
| 6.2.6     | Additional performance conditions.....   | 68 |
| 6.3       | Reference interference level .....   | 69 |
| 6.3.1     | GMSK modulated speech channels and associated control channels .....           | 69 |
| 6.3.2     | Co-channel reference interference performance .....                            | 69 |
| 6.3.2.1   | MS requirements .....  | 69 |
| 6.3.2.2   | BTS requirements .....   | 69 |
| 6.3.3     | Adjacent channel reference interference performance .....                      | 70 |
| 6.3.3.1   | Normal symbol rate used .....  | 70 |
| 6.3.3.1.1 | MS requirements .....  | 70 |
| 6.3.3.1.2 | BTS requirements.....  | 71 |
| 6.3.3.2   | Higher symbol rate used: .....   | 71 |
| 6.3.3.2.1 | MS requirements .....  | 71 |
| 6.3.3.2.2 | BTS requirements.....  | 71 |
| 6.3.4     | Reference interference performance – signal levels .....                       | 72 |
| 6.3.5     | Additional reference interference performance requirements and conditions..... | 73 |

|  |  |            |
|--|--|------------|
| 6.4  | Erroneous frame indication performance .....                                 | 75         |
| 6.5  | Random access and paging performance at high input levels .....              | 76         |
| 6.6  | Frequency hopping performance under interference conditions .....            | 76         |
| 6.7  | Incremental Redundancy Performance for EGPRS and EGPRS2 MS .....             | 76         |
| <b>Annex A (informative): Spectrum characteristics (spectrum due to the modulation) .....</b>                    |  | <b>162</b> |
| <b>Annex B (normative): Transmitted power level versus time .....</b>  |  | <b>170</b> |
| <b>Annex C (normative): Propagation conditions.....</b>  |  | <b>176</b> |
| C.1  | Simple wideband propagation model .....                                      | 176        |
| C.2  | Doppler spectrum types.....  | 176        |
| C.3  | Propagation models .....   | 177        |
| C.3.1  | Typical case for rural area (RAx): (6 tap setting).....                      | 177        |
| C.3.2  | Typical case for hilly terrain (HTx): (12 tap setting).....                  | 177        |
| C.3.3  | Typical case for urban area (TUx): (12 tap setting).....                     | 178        |
| C.3.4  | Profile for equalization test (EQx): (6 tap setting) .....                   | 178        |
| C.3.5  | Typical case for very small cells (Tix): (2 tap setting).....                | 178        |
| <b>Annex D (normative): Environmental conditions .....</b>   |  | <b>179</b> |
| D.1  | General .....  | 179        |
| D.2  | Environmental requirements for the MSs.....                                  | 179        |
| D.2.1  | Temperature (GSM 400, GSM 900 and DCS 1 800) .....                           | 179        |
| D.2.1.1  | Environmental Conditions (PCS 1 900, GSM 850 and GSM 700).....               | 179        |
| D.2.2  | Voltage .....  | 179        |
| D.2.3  | Vibration (GSM 400, GSM 900 and DCS 1 800) .....                             | 180        |
| D.2.3.1  | Vibration (PCS 1 900, GSM 850 and GSM 700).....                              | 180        |
| D.3  | Environmental requirements for the BSS equipment.....                        | 180        |
| D.3.1  | Environmental requirements for the BSS equipment .....                       | 181        |
| <b>Annex E (normative): Repeater characteristics .....</b>   |  | <b>182</b> |
| E.1  | Introduction .....   | 182        |
| E.2  | Spurious emissions .....   | 182        |
| E.3  | Intermodulation products .....   | 183        |
| E.4  | Out of band gain.....  | 183        |
| E.5  | Frequency error and modulation accuracy .....                                | 183        |
| E.5.1  | Frequency error .....  | 183        |
| E.5.2  | Modulation accuracy at GMSK modulation.....                                  | 184        |
| E.5.3  | Modulation accuracy at 8-PSK, 16-QAM, 32-QAM, QPSK and AQPSK modulation..... | 184        |
| <b>Annex F (normative): Antenna Feeder Loss Compensator Characteristics (GSM 400, GSM 900 and DCS 1800).....</b> |  | <b>186</b> |
| F.1  | Introduction .....   | 186        |
| F.2  | Transmitting path .....  | 186        |
| F.2.1  | Maximum output power .....   | 186        |
| F.2.2  | Gain .....   | 187        |
| F.2.3  | Burst transmission characteristics .....                                     | 187        |
| F.2.4  | Phase error.....   | 187        |
| F.2.5  | Frequency error .....  | 188        |
| F.2.6  | Group delay .....  | 188        |
| F.2.7  | Spurious emissions .....   | 188        |
| F.2.8  | VSWR .....   | 189        |
| F.2.9  | Stability .....  | 189        |
| F.3  | Receiving path.....  | 189        |

|   |   |            |
|---|---|------------|
| F.3.1   | Gain .....  | 189        |
| F.3.2   | Noise figure .....  | 189        |
| F.3.3   | Group delay .....   | 189        |
| F.3.4   | Intermodulation performance .....   | 189        |
| F.3.5   | VSWR .....  | 189        |
| F.3.6   | Stability .....   | 189        |
| F.4   | Guidelines (informative) .....  | 189        |
| <b>Annex G (normative): Calculation of Error Vector Magnitude .....</b>   |   | <b>191</b> |
| <b>Annex H (normative): Requirements on Location Measurement Unit .....</b>                                       |   | <b>193</b> |
| H.1   | TOA LMU Requirements .....  | 193        |
| H.1.1   | Void .....  | 193        |
| H.1.2   | LMU characteristics .....   | 193        |
| H.1.2.1   | Blocking characteristics .....  | 193        |
| H.1.2.2   | AM suppression characteristics .....  | 193        |
| H.1.2.3   | Intermodulation characteristics .....   | 194        |
| H.1.2.4   | Spurious emissions .....  | 194        |
| H.1.3   | Time-of-Arrival Measurement Performance .....                                       | 194        |
| H.1.3.1   | Sensitivity Performance .....   | 194        |
| H.1.3.2   | Interference Performance .....  | 195        |
| H.1.3.3   | Multipath Performance .....   | 196        |
| H.1.4   | Radio Interface Timing Measurement Performance .....                                | 196        |
| H.2   | E-OTD LMU Requirements .....  | 196        |
| H.2.1   | LMU Characteristics .....   | 196        |
| H.2.1.1   | Blocking characteristics .....  | 197        |
| H.2.1.2   | AM suppression characteristics .....  | 197        |
| H.2.1.3   | Intermodulation characteristics .....   | 197        |
| H.2.2   | Sensitivity and Interference Performance .....                                      | 197        |
| H.2.2.1   | Sensitivity Performance .....   | 197        |
| H.2.2.2   | Interference Performance .....  | 198        |
| H.2.2.3   | Multipath Performance .....   | 198        |
| <b>Annex I (normative): E-OTD Mobile Station Requirements .....</b>   |   | <b>200</b> |
| I.1   | Introduction .....  | 200        |
| I.2   | Sensitivity and Interference Performance .....                                      | 200        |
| I.2.1   | Sensitivity Performance .....   | 200        |
| I.2.2   | Interference Performance .....  | 201        |
| I.2.3   | Multipath Performance .....   | 201        |
| <b>Annex J (informative): Guidance on the Usage of Dynamic ARFCN Mapping .....</b>                                |   | <b>202</b> |
| J.1   | Introduction .....  | 202        |
| J.2   | Dynamic allocation of GSM 400, GSM 800, GSM 900, DCS 1800 and PCS 1900 ARFCNs ..... | 202        |
| J.3   | Controlling changes in dynamic mapping .....  | 202        |
| <b>Annex K (normative): Reference TFCs for FLO .....</b>  |   | <b>204</b> |
| <b>Annex L (normative): Reference Test Scenarios for DARP .....</b>   |   | <b>206</b> |
| <b>Annex M (normative): Minimum Performance Requirements for Assisted Global Positioning System (A-GPS) .....</b> |   | <b>208</b> |
| M.1   | General .....   | 208        |
| M.1.1   | Abbreviations .....   | 208        |
| M.1.2   | Measurement parameters .....  | 208        |
| M.1.2.1   | MS based A-GPS measurement parameters .....   | 208        |
| M.1.2.2   | MS assisted A-GPS measurement parameters .....                                      | 208        |
| M.1.3   | Response time .....   | 208        |

|  |  |            |
|--|--|------------|
| M.1.4  | Time assistance .....  | 208        |
| M.1.4.1  | Use of fine time assistance.....   | 209        |
| M.1.4.2  | 2D position error.....   | 209        |
| M.2  | A-GPS minimum performance requirements.....                              | 209        |
| M.2.1  | Sensitivity.....   | 209        |
| M.2.1.1  | Coarse time assistance .....   | 209        |
| M.2.1.1.1  | Minimum Requirements (Coarse time assistance).....                       | 210        |
| M.2.1.2  | Fine time assistance .....   | 210        |
| M.2.1.2.1  | Minimum Requirements (Fine time assistance).....                         | 210        |
| M.2.2  | Nominal Accuracy.....  | 210        |
| M.2.2.1  | Minimum requirements (nominal accuracy).....                             | 211        |
| M.2.3  | Dynamic Range.....   | 211        |
| M.2.3.1  | Minimum requirements (dynamic range) .....                               | 211        |
| M.2.4  | Multi-Path scenario .....  | 211        |
| M.2.4.1  | Minimum Requirements (multi-path scenario).....                          | 212        |
| M.2.5  | Moving scenario and periodic location .....                              | 212        |
| M.2.5.1  | Minimum Requirements (moving scenario and periodic location).....        | 213        |
| M.3  | Test conditions .....  | 213        |
| M.3.1  | General .....  | 213        |
| M.3.1.1  | Parameter values.....  | 213        |
| M.3.1.2  | Time assistance.....   | 214        |
| M.3.1.3  | GPS Reference Time .....   | 214        |
| M.3.1.4  | Reference and MS locations .....   | 214        |
| M.3.1.5  | Satellite constellation and assistance data.....                         | 214        |
| M.3.1.6  | Atmospheric delays.....  | 214        |
| M.3.1.7  | GSM Frequency and frequency error.....                                   | 215        |
| M.3.1.8  | Information elements .....   | 215        |
| M.3.1.9  | GPS signals.....   | 215        |
| M.3.1.10   | RESET MS POSITIONING STORED INFORMATION Message .....                    | 215        |
| M.4  | Propagation Conditions .....   | 215        |
| M.4.1  | Static propagation conditions .....                                      | 215        |
| M.4.2  | Multi-path Case G1 .....   | 215        |
| M.5  | Measurement sequence chart.....  | 216        |
| M.5.1  | General .....  | 216        |
| M.5.2  | MS Based A-GPS Measurement Sequence Chart .....                          | 216        |
| M.5.3  | MS Assisted A-GPS Measurement Sequence Chart .....                       | 217        |
| M.6  | Assistance data required for testing.....                                | 218        |
| M.6.1  | Introduction .....   | 218        |
| M.6.2  | Information elements required for MS-based.....                          | 218        |
| M.6.3  | Information elements available for MS-assisted .....                     | 219        |
| M.7  | Converting MS-assisted measurement reports into position estimates ..... | 221        |
| M.7.1  | Introduction .....   | 221        |
| M.7.2  | MS measurement reports.....  | 221        |
| M.7.3  | Weighted Least Squares (WLS) position solution.....                      | 222        |
| <b>Annex N (normative): Reference Test Scenarios for DARP Phase II (MSRD).....</b>   |  | <b>224</b> |
| N.1  | Interferer configurations .....  | 224        |
| N.2  | Correlation and antenna gain imbalance.....                              | 225        |
| N.3  | Testing MSRD terminal conformance to legacy requirements.....            | 226        |
| <b>Annex O (normative): Minimum Performance Requirements for Assisted Galileo and Additional Navigation Satellite Systems (A-GANSS).....</b> |  | <b>228</b> |
| O.1  | General .....  | 228        |
| O.1.1  | Abbreviations .....  | 228        |
| O.1.2  | Measurement parameters.....  | 228        |
| O.1.2.1  | MS based A-GANSS measurement parameters.....                             | 228        |



|   |   |            |
|---|---|------------|
| O.1.2.2   | MS assisted A-GANSS measurement parameters .....                  | 228        |
| O.1.3   | Response time .....   | 228        |
| O.1.4   | Time assistance .....   | 229        |
| O.1.4.1   | Use of fine time assistance.....                                  | 229        |
| O.1.5   | Error definitions .....   | 229        |
| O.2   | A-GANSS minimum performance requirements .....                    | 230        |
| O.2.1   | Sensitivity.....  | 230        |
| O.2.1.1   | Coarse time assistance .....                                      | 230        |
| O.2.1.1.1   | Minimum Requirements (Coarse time assistance).....                | 231        |
| O.2.1.2   | Fine time assistance .....  | 231        |
| O.2.1.2.1   | Minimum Requirements (Fine time assistance).....                  | 231        |
| O.2.2   | Nominal Accuracy.....   | 232        |
| O.2.2.1   | Minimum requirements (nominal accuracy) .....                     | 232        |
| O.2.3   | Dynamic Range .....   | 233        |
| O.2.3.1   | Minimum requirements (dynamic range) .....                        | 233        |
| O.2.4   | Multi-Path scenario .....   | 233        |
| O.2.4.1   | Minimum Requirements (multi-path scenario).....                   | 234        |
| O.2.5   | Moving scenario and periodic location .....                       | 234        |
| O.2.5.1   | Minimum Requirements (moving scenario and periodic location)..... | 235        |
| O.3   | Test conditions .....   | 236        |
| O.3.1   | General .....   | 236        |
| O.3.1.1   | Parameter values .....  | 236        |
| O.3.1.2   | Time assistance .....   | 236        |
| O.3.1.3   | GANSS Reference Time.....   | 236        |
| O.3.1.4   | Reference and MS locations .....                                  | 236        |
| O.3.1.5   | Satellite constellation and assistance data.....                  | 237        |
| O.3.1.6   | Atmospheric delays.....   | 237        |
| O.3.1.7   | Sensors .....   | 237        |
| O.3.1.8   | Information elements .....  | 237        |
| O.3.1.9   | GNSS signals .....  | 237        |
| O.3.1.10  | RESET MS POSITIONING STORED INFORMATION Message .....             | 237        |
| O.3.2   | GNSS System Time Offsets .....                                    | 238        |
| O.4   | Propagation Conditions .....                                      | 238        |
| O.4.1   | Static propagation conditions .....                               | 238        |
| O.4.2   | Multi-path case .....   | 238        |
| O.7.1   | Introduction .....  | 243        |
| O.7.2   | MS measurement reports.....                                       | 243        |
| O.7.3   | Weighted Least Squares (WLS) position solution.....               | 245        |
| <b>Annex P (normative): Minimum receiver performance requirements for MSR BS.....</b>   |   | <b>247</b> |
| P.1   | Reference Sensitivity and interference performance.....           | 247        |
| P.2   | Other receiver characteristics .....                              | 247        |
| P.2.1   | Blocking characteristics .....                                    | 247        |
| P.2.2   | Intermodulation characteristics .....                             | 247        |
| P.2.3   | AM suppression.....   | 248        |
| <b>Annex Q(normative): Reference Test Scenarios for Voice services over Adaptive Multi-user channels on One Slot (VAMOS).....</b> |   | <b>249</b> |
| Q.1   | Interferer configurations in downlink .....                       | 249        |
| Q.2   | Interferer configurations in uplink.....                          | 250        |
| Q.3   | Sensitivity test configuration in downlink .....                  | 251        |
| Q.4   | Sensitivity test configuration in uplink .....                    | 251        |
| Q.5   | Time and frequency offset in uplink.....                          | 251        |
| Q.6   | VAMOS DTX scenario in downlink .....                              | 251        |

**Annex R (informative):**      **Change history** .....253  
History .....263

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document defines the requirements for the transceiver of the pan-European digital cellular telecommunications systems GSM.

Requirements are defined for two categories of parameters:

- those that are required to provide compatibility between the radio channels, connected either to separate or common antennas, that are used in the system. This category also includes parameters providing compatibility with existing systems in the same or adjacent frequency bands;
- those that define the transmission quality of the system.

The present document defines RF characteristics for the Mobile Station (MS) and Base Station System (BSS). The BSS will contain Base Transceiver Stations (BTS), which can be normal BTS, micro-BTS or pico-BTS. The precise measurement methods are specified in 3GPP TS 51.010 and 3GPP TS 51.021.

Unless otherwise stated, the requirements defined in this EN apply to the full range of environmental conditions specified for the equipment (see annex D).

In the present document some relaxations are introduced for GSM 400 MSs, GSM 900 MSs, GSM 700 MSs and GSM 850 MSs which pertain to power class 4 or 5 (see subclause 4.1.1). In the present document these Mobile Stations are referred to as "small MS".

MSs may operate on more than one of the frequency bands specified in clause 2. These MSs are referred to as "Multi band MSs" in this EN. Multi band MSs shall meet all requirements for each of the bands supported. The relaxation on GSM 400 MSs, GSM 900 MSs, GSM 700 MSs and GSM 850 MSs for a "small MS" are also valid for a multi band MS if it complies with the definition of a small MS.

The RF characteristics of repeaters are defined in annex E of this EN. Annexes D and E are the only clauses of this EN applicable to repeaters. Annex E does not apply to the MS or BSS. The precise measurement methods for repeaters are specified in 3GPP TS 51.026 [35].

The present document also includes specification information for mixed mode operation at 850 MHz and 1900 MHz. (MXM 850 and MXM 1900). 850 MHz and 1900 MHz mixed-mode is defined as a network that deploys both 30 kHz RF carriers and 200 kHz RF carriers in geographic regions where the Federal Communications Commission (FCC) regulations are applied or adopted.

The requirements for a MS in a mixed-mode system, MXM 850 and MXM 1900, correspond to the requirements for GSM 850 MS and PCS 1900 MS respectively.

Annex M defines the minimum performance requirements for A-GPS for MSs that support A-GPS. Annex M does not apply to the BSS.

The present document also includes specific requirements for multicarrier BTS, wherever explicitly stated in the text, that apply for all classes of multicarrier BTS if nothing else is stated. All other requirements designated for BTS and normal BTS apply if not otherwise stated. The multicarrier BTS classes have relaxed requirements in the areas of Tx spurious emissions, intermodulation attenuation and, when multicarrier receiver is included, Rx blocking. Usage of multicarrier BTSs in some geographical regions might be subject to regulatory restrictions to protect other radio systems operating in bands of adjacent frequency assignments, in particular for all safety related applications like railway applications. In areas where such systems coexist with multicarrier BTSs, the received interference power originating from multicarrier BTSs might have to be limited.

The document also includes entry points in some tables for the multicarrier BTS requirements to which TS 37.104 [33] for Multi-Standard Radio Base Stations (MSR BS) is referring to as specific GSM/EDGE single-RAT requirements not covered by the general requirements. These entry points are marked with <sup>M)</sup> and, as described in a note in each applicable table, identify the relevant column(s) that are applicable as MSR BS requirements. In general the requirements for multicarrier BTS equipped with multicarrier receiver also apply to Multi-Standard Radio Base Stations. The GSM requirements for Multi-Standard Radio Base Stations are defined for GSM 850, GSM 900, DCS 1800 and PCS 1900 only. Requirements for other frequency bands and MXM base stations are excluded. Annex P defines the minimum performance for the receiver in MSR BS. For equipment not declared as MSR BS the <sup>M)</sup> indications can be ignored.

## 1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: 'Vocabulary for 3GPP Specifications'.
- [1A] 3GPP TS 25.144: 'User Equipment (UE) and Mobile Station (MS) Over the Air Performance Requirements'.
- [1B] 3GPP TS 34.114: 'User Equipment (UE) / Mobile Station (MS) Over The Air (OTA) antenna performance; Conformance testing'.
- [2] 3GPP TR 43.030: 'Radio network planning aspects'.
- [3] 3GPP TS 43.052: 'GSM Cordless Telephony System (CTS); Lower layers of the CTS radio interface; Stage 2'.
- [4] 3GPP TS 43.059: 'Functional Stage 2 description of Location Services in GERAN'.
- [5] 3GPP TS 43.064: 'General Packet Radio Service (GPRS); GPRS Radio Interface Stage 2'.
- [6] 3GPP TS 44.014: 'Individual equipment type requirements and interworking; Special conformance testing functions'.
- [7] 3GPP TS 44.018: 'Mobile radio interface layer 3 specification; Radio Resource Control Protocol'.
- [7A] 3GPP TS 44.031: 'Mobile Station (MS) - Serving Mobile Location Centre (SMLC) Radio Resource LCS Protocol (RRLP)'.
- [8] 3GPP TS 44.071: 'Mobile radio interface layer 3 Location Services (LCS) specification'.
- [9] 3GPP TS 45.001: 'Physical layer on the radio path General description'.
- [10] 3GPP TS 45.002: 'Multiplexing and multiple access on the radio path'.
- [11] 3GPP TS 45.003: 'Channel coding'.
- [12] 3GPP TS 45.004: 'Modulation'.
- [13] 3GPP TS 45.008: 'Radio subsystem link control'.
- [14] 3GPP TS 45.010: 'Radio subsystem synchronization'.
- [15] 3GPP TS 45.050: 'Background for Radio Frequency (RF) requirements'.
- [16] 3GPP TS 51.010: 'Mobile Station (MS) conformity specification'.
- [17] 3GPP TS 51.011: 'Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface'.
- [18] 3GPP TS 51.021: 'Base Station System (BSS) equipment specification; Radio aspects'.
- [19] ITU-T Recommendation O.153: 'Basic parameters for the measurement of error performance at bit rates below the primary rate'.

- [20] ETSI EN 300 019-1-3: 'Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-3: Classification of environmental conditions Stationary use at weather protected locations'.
- [21] ETSI EN 300 019-1-4: 'Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-4: Classification of environmental conditions Stationary use at non-weather protected locations'.
- [22] FCC Title 47 CFR Part 24: 'Personal Communication Services', Subpart E "Broadband services'.
- [23] ITU-T Recommendation O.151 (1992): 'Error performance measuring equipment operating at the primary rate and above'.
- [24] TIA/EIA-136-C: 'TDMA Third Generation Wireless'.
- [25] IEC publication 68-2-1: 'Environmental Testing; Part 2; Tests – Test A: Cold'.
- [26] IEC publication 68-2-2: 'Basic Environmental Testing Procedures; Part 2; Tests - Tests B: Dry heat'.
- [27] IEC publication 68-2-36: 'Basic Environmental Testing Procedures; Part 2: Tests; Test Fdb: Random vibration wide band – Reproducibility Medium'.
- [28] FCC Title 47 CFR Part 22: 'Public Mobile Services'.
- [29] FCC Title 47 CFR Part 27: 'Miscellaneous Wireless Services'. Subpart C 'Technical Standards'.
- [30] ICD-GPS 200, Navstar GPS Space Segment/Navigation User Interfaces, Rev. C.
- [31] P. Axelrad, R.G. Brown, "GPS Navigation Algorithms", in Chapter 9 of "Global Positioning System: Theory and Applications", Volume 1, B.W. Parkinson, J.J. Spilker (Ed.), Am. Inst. of Aeronautics and Astronautics Inc., 1996.
- [32] S.K. Gupta, "Test and Evaluation Procedures for the GPS User Equipment", ION-GPS Red Book, Volume 1, p. 119.
- [33] 3GPP TS 37.104: 'Multi-Standard (MSR) Base Station (BS) radio transmission and reception'.
- [34] ITU-R SM.329: 'Unwanted emissions in the spurious domain'.
- [35] 3GPP TS 51.026: 'Base Station System (BSS) equipment specification; Part 4: Repeaters'.

## 1.2 Abbreviations

Abbreviations used in the present document are listed in 3GPP TR 21.905.

In addition to abbreviations in 3GPP TR 21.905, the following abbreviations are applied:

|          |  |
|----------|--|
| SCPIR    | Sub Channel Power Imbalance Ratio (see 3GPP TS 45.004) |
| SCPIR_DL | Sub Channel Power Imbalance Ratio on DownLink          |
| SCPIR_UL | Sub Channel Power Imbalance Ratio on UpLink            |

## 1.3 Definitions

For the purposes of the present document, the following terms and definitions apply.

**Subchannel power imbalance ratio on downlink:** in the downlink, the subchannel power imbalance ratio is the SCPIR as defined in 3GPP TS 45.004.

NOTE: Information bits of *VAMOS subchannel 2* and *VAMOS subchannel 1* respectively modulate the quadrature component and inphase component of the AQPSK symbols (see 3GPP TS 45.002).

**Subchannel power imbalance ratio on uplink:** the ratio of the average received uplink power of *VAMOS subchannel 2* ( $P_{u2}$ ) to the average received uplink power of *VAMOS subchannel 1* ( $P_{u1}$ ) expressed as  $10 \cdot \log_{10}(P_{u2}/P_{u1})$  dB.

**VAMOS I/II MS:** Mobile Station supporting VAMOS level I/II respectively (see 3GPP TS 24.008).

**Minimum carrier frequency spacing:** minimum spacing between the centre frequencies of simultaneously transmitted or received GSM carriers of a BTS belonging to a multicarrier BTS class.

---

## 2 Frequency bands and channel arrangement

i) T-GSM 380 band:

- for T-GSM 380, the system is required to operate in the following band:
  - 380,2 MHz to 389,8 MHz: mobile transmit, base receive;
  - 390,2 MHz to 399,8 MHz base transmit, mobile receive.

ii) T-GSM 410 band:

- for T-GSM 410, the system is required to operate in the following band:
  - 410,2 MHz to 419,8 MHz: mobile transmit, base receive;
  - 420,2 MHz to 429,8 MHz base transmit, mobile receive.

iii) GSM 450 Band:

- for GSM 450, the system is required to operate in the following band:
  - 450,4 MHz to 457,6 MHz: mobile transmit, base receive;
  - 460,4 MHz to 467,6 MHz base transmit, mobile receive.

iv) GSM 480 Band;

- for GSM 480, the system is required to operate in the following band:
  - 478,8 MHz to 486 MHz: mobile transmit, base receive;
  - 488,8 MHz to 496 MHz base transmit, mobile receive.

v) GSM 710 Band:

- for GSM 710, the system is required to operate in the following band:
  - 698 MHz to 716 MHz: mobile transmit, base receive;
  - 728 MHz to 746 MHz: base transmit, mobile receive.

vi) GSM 750 Band:

- for GSM 750, the system is required to operate in the following band:
  - 747 MHz to 763 MHz: base transmit, mobile receive;
  - 777 MHz to 793 MHz: mobile transmit, base receive.

vii) T-GSM 810 Band:

- for T-GSM 810, the system is required to operate in the following band:
  - 806 MHz to 821 MHz: mobile transmit, base receive;
  - 851 MHz to 866 MHz: base transmit, mobile receive.

viii) GSM 850 Band:

- for GSM 850, the system is required to operate in the following band:

- 824 MHz to 849 MHz: mobile transmit, base receive;
  - 869 MHz to 894 MHz: base transmit, mobile receive.
- ix) Standard or primary GSM 900 Band, P-GSM:
- for Standard GSM 900 band, the system is required to operate in the following frequency band:
    - 890 MHz to 915 MHz: mobile transmit, base receive;
    - 935 MHz to 960 MHz: base transmit, mobile receive.
- x) Extended GSM 900 Band, E-GSM (includes Standard GSM 900 band):
- for Extended GSM 900 band, the system is required to operate in the following frequency band:
    - 880 MHz to 915 MHz: mobile transmit, base receive;
    - 925 MHz to 960 MHz: base transmit, mobile receive.
- xi) Railways GSM 900 Band, R-GSM (includes Standard and Extended GSM 900 Band);
- for Railways GSM 900 band, the system is required to operate in the following frequency band:
    - 876 MHz to 915 MHz: mobile transmit, base receive;
    - 921 MHz to 960 MHz: base transmit, mobile receive.
- xii) Void;
- xiii) DCS 1 800 Band:
- for DCS 1 800, the system is required to operate in the following band:
    - 1 710 MHz to 1 785 MHz: mobile transmit, base receive;
    - 1 805 MHz to 1 880 MHz: base transmit, mobile receive.
- xiv) PCS 1 900 Band:
- for PCS 1 900, the system is required to operate in the following band:
    - 1 850 MHz to 1 910 MHz: mobile transmit, base receive;
    - 1 930 MHz to 1 990 MHz base transmit, mobile receive.

NOTE 1: The term GSM 400 is used for any GSM system, which operates in any 400 MHz band, including T-GSM 380.

NOTE 2: The term GSM 700 is used for any GSM system, which operates in any 700 MHz band.

NOTE 3: The term GSM 850 is used for any GSM system which operates in any 850 MHz band but excluding T-GSM 810.

NOTE 4: The term GSM 900 is used for any GSM system, which operates in any 900 MHz band.

NOTE 5: The BTS may cover a complete band, or the BTS capabilities may be restricted to a subset only, depending on the operator needs.

For T-GSM 810 the requirements for GSM 900 shall apply, apart for those parameters for which a separate requirement exists.

Operators may implement networks that operates on a combination of the frequency bands above to support multi band mobile terminals.

The channel spacing is 200 kHz.



The carrier frequency is designated by the absolute radio frequency channel number (ARFCN). If we call  $F_l(n)$  the frequency value of the carrier ARFCN  $n$  in the lower band, and  $F_u(n)$  the corresponding frequency value in the upper band, we have for the dynamically mapped ARFCNs:

**Table 2-1 Dynamically mapped ARFCN**

|           |                                       |                     |                        |
|-----------|---------------------------------------|---------------------|------------------------|
| T-GSM 380 | $F_l(n) = 380.2 + 0.2 \cdot (n-x+y)$  | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 10$ |
| T-GSM 410 | $F_l(n) = 410.2 + 0.2 \cdot (n-x+y)$  | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 10$ |
| T-GSM 810 | $F_l(n) = 806.2 + 0.2 \cdot (n-x+y)$  | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 45$ |
| GSM 710   | $F_l(n) = 698.2 + 0.2 \cdot (n-x+y)$  | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 30$ |
| GSM 750   | $F_l(n) = 747.2 + 0.2 \cdot (n-x+y)$  | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 30$ |
| DCS 1 800 | $F_l(n) = 1710.2 + 0.2 \cdot (n-x+y)$ | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 95$ |
| PCS 1 900 | $F_l(n) = 1850.2 + 0.2 \cdot (n-x+y)$ | $x \leq n \leq x+z$ | $F_u(n) = F_l(n) + 80$ |

where the applicable band is indicated by the GSM\_Band parameter,  $x = \text{ARFCN\_FIRST}$ ,  $y = \text{BAND\_OFFSET}$  and  $z = \text{ARFCN\_RANGE}$  (See 3GPP TS 44.018). Parameters defining carrier frequencies not belonging to the indicated band shall not be considered erroneous.

Information about dynamic mapping is provided by System Information type 15 or Packet System Information type 8 if PBCCH exists, and optionally by System Information type 14. Dynamic ARFCN mapping shall be valid for the whole PLMN. Dynamic mapping has priority over the fixed designation of carrier frequencies. The support of dynamic ARFCN mapping is optional for all other mobile stations except those supporting GSM 700 and T-GSM.

$F_l(n)$  and  $F_u(n)$  for all other ARFCNs:

**Table 2-2 Fixed designation of ARFCN**

|           |   |   |                        |
|-----------|---|---|------------------------|
| P-GSM 900 | $F_l(n) = 890 + 0.2 \cdot n$  | $1 \leq n \leq 124$                           | $F_u(n) = F_l(n) + 45$ |
| E-GSM 900 | $F_l(n) = 890 + 0.2 \cdot n$<br>$F_l(n) = 890 + 0.2 \cdot (n-1024)$ | $0 \leq n \leq 124$<br>$975 \leq n \leq 1023$ | $F_u(n) = F_l(n) + 45$ |
| R-GSM 900 | $F_l(n) = 890 + 0.2 \cdot n$<br>$F_l(n) = 890 + 0.2 \cdot (n-1024)$ | $0 \leq n \leq 124$<br>$955 \leq n \leq 1023$ | $F_u(n) = F_l(n) + 45$ |
| DCS 1 800 | $F_l(n) = 1710.2 + 0.2 \cdot (n-512)$                               | $512 \leq n \leq 885$                         | $F_u(n) = F_l(n) + 95$ |
| PCS 1 900 | $F_l(n) = 1850.2 + 0.2 \cdot (n-512)$                               | $512 \leq n \leq 810$                         | $F_u(n) = F_l(n) + 80$ |
| GSM 450   | $F_l(n) = 450.6 + 0.2 \cdot (n-259)$                                | $259 \leq n \leq 293$                         | $F_u(n) = F_l(n) + 10$ |
| GSM 480   | $F_l(n) = 479 + 0.2 \cdot (n-306)$                                  | $306 \leq n \leq 340$                         | $F_u(n) = F_l(n) + 10$ |
| GSM 850   | $F_l(n) = 824.2 + 0.2 \cdot (n-128)$                                | $128 \leq n \leq 251$                         | $F_u(n) = F_l(n) + 45$ |

Frequencies are in MHz.

A multi-band MS shall interpret ARFCN numbers 512 to 810 as either DCS 1800 or PCS 1900 frequencies according to the parameter BAND\_INDICATOR when received in other than the DCS 1800 or PCS 1900 bands. If received in the DCS 1800 or PCS 1900 bands, those ARFCN numbers shall be interpreted as frequencies in the same band. The BAND\_INDICATOR is broadcast on BCCH, PBCCH and SACCH. The most recently received value shall be applied by the mobile station. If the parameter is not broadcast, the default value is DCS 1800 frequencies.

### 3 Reference configuration

The reference configuration for the radio subsystem is described in 3GPP TS 45.001.

The micro-BTS is different from a normal BTS in two ways. Firstly, the range requirements are much reduced whilst the close proximity requirements are more stringent. Secondly, the micro-BTS is required to be small and cheap to allow external street deployment in large numbers. Because of these differences the micro-BTS needs a different set of RF parameters to be specified. Where the RF parameters are not different for the micro-BTS the normal BTS parameters shall apply.

The pico-BTS is an extension of the micro-BTS concept to the indoor environments. The very low delay spread, low speed, and small cell sizes give rise to a need for a different set of RF parameters to be specified.

Multicarrier BTS is a BTS characterized by the ability to, in addition to single carrier operation, process two or more carriers in common active RF components simultaneously, either in multicarrier transmitter only or, in both multicarrier

transmitter and multicarrier receiver. The multicarrier BTS is divided into the Wide Area, Medium Range and Local Area classes for different deployment conditions. The requirements for normal BTS applies to all classes of multicarrier BTS unless otherwise stated in this specification.

The vendor shall declare if the multicarrier BTS supports non-contiguous frequency allocation, defined as an allocation where two groups of frequencies are separated with at least 5.4 MHz carrier separation between the innermost carriers. The term maximum Base Station RF bandwidth defines the maximum RF bandwidth in which a multicarrier BTS either transmits or transmits and receives multiple carriers simultaneously.

## 4 Transmitter characteristics

Throughout this clause, unless otherwise stated, requirements are given in terms of power levels at the antenna connector of the equipment. For equipment with integral antenna only, a reference antenna with 0 dBi gain shall be assumed.

For GMSK modulation, the term output power refers to the measure of the power when averaged over the useful part of the burst (see annex B).

For QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM modulation, the term output power refers to a measure that, with sufficient accuracy, is equivalent to the long term average of the power when taken over the useful part of the burst as specified in 3GPP TS 45.002 with any fixed TSC and with random encrypted bits.

The term peak hold refers to a measurement where the maximum is taken over a sufficient time that the level would not significantly increase if the holding time were longer.

NOTE: From a system perspective the over the air antenna performance is relevant. To determine the MS over the air performance the Total Radiated Power has been defined. Its definition can be found in 3GPP TS 25.144, and a test method is specified in 3GPP TS 34.114.

### 4.1 Output power

#### 4.1.1 Mobile Station

The MS maximum output power and lowest power control level shall be, according to its class, as defined in the following tables.

i) MS maximum output power

Table 4.1-1 MS maximum power at GMSK modulation

| Power class | GSM 400 & GSM 900 & GSM 850 & GSM 700<br>Nominal Maximum output power | DCS 1 800<br>Nominal Maximum output power | PCS 1 900<br>Nominal Maximum output power | Tolerance (dB)<br>for conditions |         |
|-------------|---|---|---|----------------------------------|---------|
|             |   |   |   | normal                           | extreme |
| 1           | -----   | 1 W (30 dBm)                              | 1 W (30 dBm)                              | ±2                               | ±2,5    |
| 2           | 8 W (39 dBm)  | 0,25 W (24 dBm)                           | 0,25 W (24 dBm)                           | ±2                               | ±2,5    |
| 3           | 5 W (37 dBm)  | 4 W (36 dBm)                              | 2 W (33 dBm)                              | ±2                               | ±2,5    |
| 4           | 2 W (33 dBm)  |   |   | ±2                               | ±2,5    |
| 5           | 0,8 W (29 dBm)  |   |   | ±2                               | ±2,5    |

Table 4.1-2 MS maximum power at other modulations

| Power class | GSM 400 and GSM 900 & GSM 850 & GSM 700<br>Nominal Maximum output Power | GSM 400 and GSM 900 & GSM 850 & GSM 700<br>Tolerance (dB) for conditions |         | DCS 1 800<br>Nominal Maximum output power | PCS 1 900<br>Nominal Maximum output power | DCS 1 800 & PCS 1 900<br>Tolerance (dB) for conditions |         |
|-------------|---|--|---------|---|---|--|---------|
|             |   | normal   | extreme |   |   | Power  | Power   |
| E1          | 33 dBm  | ±2   | ±2,5    | 30 dBm                                    | 30 dBm                                    | ±2   | ±2,5    |
| E2          | 27 dBm  | ±3   | ±4      | 26 dBm                                    | 26 dBm                                    | -4/+3  | -4,5/+4 |
| E3          | 23 dBm  | ±3   | ±4      | 22 dBm                                    | 22 dBm                                    | ±3   | ±4      |

The maximum power for power class E1-E3 is corrected for the different modulations according to the table below

Table 4.1-3 Correction factor of maximum power for different modulations in table 4.1-2

| Modulation | Correction factor (dB) |
|------------|------------------------|
| QPSK       | 0                      |
| 8-PSK      | 0                      |
| 16-QAM     | -2                     |
| 32-QAM     | -2                     |

NOTE: In the case and only in the case of EGPRS2-B with the spectrally wide pulse shaping filter and the tight spectrum requirement at 400 kHz offset from the carrier (see section 4.2.1), the actual maximum output power may be up to 2 dB lower than the lower limit of the maximum output power's tolerance range defined by the power class table above and the correction factors of this table. In this case and only in this case, the MS need not use the highest power control level or the two highest power control levels for the respective modulation.

Maximum output power for GMSK in any one band shall always be equal to or higher than maximum output power for all other modulations for the same equipment in the same band.

A multi band MS has a combination of the power class in each band of operation from the table above. Any combination may be used.

The PCS 1 900, including its actual antenna gain, shall not exceed a maximum of 2 Watts (+33 dBm) EIRP per the applicable FCC rules for wideband PCS services [FCC Part 24, Subpart E, Section 24.232]. Power Class 3 is restricted to transportable or vehicular mounted units.

For GSM 850 MS, including its actual antenna gain, shall not exceed a maximum of 7 Watts (+38,5 dBm) ERP per the applicable FCC rules for public mobile services. [FCC Part 22, Subpart H, Section 22.913]

For GSM 700 MS, including its actual antenna gain, shall not exceed a maximum of 3 Watts (+35 dBm) ERP for handheld devices and maximum of 30 Watts (+45 dBm) ERP for other mobile devices per the applicable FCC rules. [FCC Part 27, Subpart C, Section 27.50].

ii) The different power control levels needed for adaptive power control (see 3GPP TS 45.008) shall have the nominal output power as defined in the tables below, starting from the power control level for the lowest nominal output power up to the power control level for the maximum nominal output power corresponding to the class of the particular MS as defined in the tables above. Whenever a power control level commands the MS to use a nominal output power equal to or greater than the maximum nominal output power for the power class of the MS, the nominal output power transmitted shall be the maximum nominal output power for the MS class, and the tolerance specified for that class (see tables 4.1-1, 4.1-2 and 4.1-3 above) shall apply.

**Table 4.1-4a MS power control levels**  
**GSM 400, GSM 900, GSM 850 and GSM 700**

| Power control level | Nominal Output power (dBm) | Tolerance (dB) for conditions |         |
|---------------------|----------------------------|-------------------------------|---------|
|                     |                            | normal                        | extreme |
| 0-2                 | 39                         | ±2                            | ±2,5    |
| 3                   | 37                         | ±3                            | ±4      |
| 4                   | 35                         | ±3                            | ±4      |
| 5                   | 33                         | ±3                            | ±4      |
| 6                   | 31                         | ±3                            | ±4      |
| 7                   | 29                         | ±3                            | ±4      |
| 8                   | 27                         | ±3                            | ±4      |
| 9                   | 25                         | ±3                            | ±4      |
| 10                  | 23                         | ±3                            | ±4      |
| 11                  | 21                         | ±3                            | ±4      |
| 12                  | 19                         | ±3                            | ±4      |
| 13                  | 17                         | ±3                            | ±4      |
| 14                  | 15                         | ±3                            | ±4      |
| 15                  | 13                         | ±3                            | ±4      |
| 16                  | 11                         | ±5                            | ±6      |
| 17                  | 9                          | ±5                            | ±6      |
| 18                  | 7                          | ±5                            | ±6      |
| 19-31               | 5                          | ±5                            | ±6      |

**Table 4.1-4b MS power control levels**  
**DCS 1 800**

| Power control level | Nominal Output power (dBm) | Tolerance (dB) for conditions |         |
|---------------------|----------------------------|-------------------------------|---------|
|                     |                            | normal                        | extreme |
| 29                  | 36                         | ±2                            | ±2,5    |
| 30                  | 34                         | ±3                            | ±4      |
| 31                  | 32                         | ±3                            | ±4      |
| 0                   | 30                         | ±3                            | ±4      |
| 1                   | 28                         | ±3                            | ±4      |
| 2                   | 26                         | ±3                            | ±4      |
| 3                   | 24                         | ±3                            | ±4      |
| 4                   | 22                         | ±3                            | ±4      |
| 5                   | 20                         | ±3                            | ±4      |
| 6                   | 18                         | ±3                            | ±4      |
| 7                   | 16                         | ±3                            | ±4      |
| 8                   | 14                         | ±3                            | ±4      |
| 9                   | 12                         | ±4                            | ±5      |
| 10                  | 10                         | ±4                            | ±5      |
| 11                  | 8                          | ±4                            | ±5      |
| 12                  | 6                          | ±4                            | ±5      |
| 13                  | 4                          | ±4                            | ±5      |
| 14                  | 2                          | ±5                            | ±6      |
| 15-28               | 0                          | ±5                            | ±6      |

NOTE 1: For DCS 1 800, the power control levels 29, 30 and 31 are not used when transmitting the parameter MS\_TXPWR\_MAX\_CCH on BCCH, for cross phase compatibility reasons. If levels greater than 30 dBm are required from the MS during a random access attempt, then these shall be decoded from parameters broadcast on the BCCH as described in 3GPP TS 45.008.

Furthermore, the difference in output power actually transmitted by the MS between two power control levels where the difference in nominal output power indicates an increase of 2 dB (taking into account the restrictions due to power class), shall be  $+2 \pm 1,5$  dB. Similarly, if the difference in output power actually transmitted by the MS between two power control levels where the difference in nominal output power indicates a decrease of 2 dB (taking into account the restrictions due to power class), shall be  $-2 \pm 1,5$  dB.

NOTE 2: A 2 dB nominal difference in output power can exist for non-adjacent power control levels e.g. power control levels 18 and 22 for GSM 400 and GSM 900; power control levels 31 and 0 for class 3 DCS 1 800 and power control levels 3 and 6 for class 4 GSM 400 and GSM 900.

A change from any power control level to any power control level may be required by the base transmitter. The maximum time to execute this change is specified in 3GPP TS 45.008.

**Table 4.1-4c MS power control levels**

**PCS 1 900**

| Power Control Level | Output Power (dBm) | Tolerance (dB) for conditions |                    |
|---------------------|--------------------|-------------------------------|--------------------|
|                     |                    | Normal                        | Extreme            |
| 22-29               | Reserved           | Reserved                      | Reserved           |
| 30                  | 33                 | ±2 dB                         | ±2,5 dB            |
| 31                  | 32                 | ±2 dB                         | ±2,5 dB            |
| 0                   | 30                 | ±3 dB <sup>1</sup>            | ±4 dB <sup>1</sup> |
| 1                   | 28                 | ±3 dB                         | ±4 dB              |
| 2                   | 26                 | ±3 dB                         | ±4 dB              |
| 3                   | 24                 | ±3 dB <sup>1</sup>            | ±4 dB <sup>1</sup> |
| 4                   | 22                 | ±3 dB                         | ±4 dB              |
| 5                   | 20                 | ±3 dB                         | ±4 dB              |
| 6                   | 18                 | ±3 dB                         | ±4 dB              |
| 7                   | 16                 | ±3 dB                         | ±4 dB              |
| 8                   | 14                 | ±3 dB                         | ±4 dB              |
| 9                   | 12                 | ±4 dB                         | ±5 dB              |
| 10                  | 10                 | ±4 dB                         | ±5 dB              |
| 11                  | 8                  | ±4 dB                         | ±5 dB              |
| 12                  | 6                  | ±4 dB                         | ±5 dB              |
| 13                  | 4                  | ±4 dB                         | ±5 dB              |
| 14                  | 2                  | ±5 dB                         | ±6 dB              |
| 15                  | 0                  | ±5 dB                         | ±6 dB              |
| 16-21               | Reserved           | Reserved                      | Reserved           |

NOTE: Tolerance for MS Power Classes 1 and 2 is ±2 dB normal and ±2,5 dB extreme at Power Control Levels 0 and 3 respectively.

The output power actually transmitted by the MS at each of the power control levels shall form a monotonic sequence, and the interval between power steps shall be 2 dB ± 1,5 dB except for the step between power control levels 30 and 31 where the interval is 1 dB ± 1 dB.

The MS transmitter may be commanded by the BTS to change from any power control level to any other power control level. The maximum time to execute this change is specified in 3GPP TS 45.008.

For CTS transmission, the nominal maximum output power of the MS shall be restricted to:

- 11 dBm (0,015 W) in GSM 900 i.e. power control level 16;
- 12 dBm (0,016 W) in DCS 1 800 i.e. power control level 9.

iii) In order to manage mobile terminal heat dissipation resulting from transmission on multiple uplink timeslots, the mobile station may reduce its maximum output power by up to the following values:

**Table 4.1-5 MS power reduction when transmitting on multiple uplink timeslots**

| Number of timeslots in uplink assignment | Permissible nominal reduction of maximum output power, (dB) |
|--|---|
| 1  | 0   |
| 2  | 3,0   |
| 3  | 4,8   |
| 4  | 6,0   |
| 5  | 7,0   |
| 6  | 7,8   |
| 7  | 8,5   |
| 8  | 9,0   |

The actual supported maximum output power shall be in the range indicated by the parameters XXX\_MULTISLOT\_POWER\_PROFILE (See 3GPP TS 24.008) for n assigned uplink timeslots:

$$a \leq \text{MS maximum output power} \leq \min(\text{MAX\_PWR}, a + b)$$

Where:

$$a = \min(\text{MAX\_PWR}, \text{MAX\_PWR} + \text{XXX\_MULTISLOT\_POWER\_PROFILE} - 10\log(n));$$

MAX\_PWR equals to the MS maximum output power according to the relevant power class;

XXX\_MULTISLOT\_POWER\_PROFILE refers either to GMSK\_MULTISLOT\_POWER PROFILE or 8-PSK\_MULTISLOT\_POWER\_PROFILE depending on the modulation type concerned, and

XXX\_MULTISLOT\_POWER\_PROFILE 0 = 0 dB;  
 XXX\_MULTISLOT\_POWER\_PROFILE 1 = 2 dB;  
 XXX\_MULTISLOT\_POWER\_PROFILE 2 = 4 dB;  
 XXX\_MULTISLOT\_POWER\_PROFILE 3 = 6 dB.

For DCS 1800 and PCS 1900 frequency bands b = 3 dB, for all other bands b = 2 dB.

For QPSK, 16-QAM and 32-QAM modulations 8-PSK\_MULTISLOT\_POWER\_PROFILE shall apply, corrected for the difference in MAX\_PWR for each modulation.

The supported maximum output power for each number of uplink timeslots shall form a monotonic sequence. The maximum reduction of maximum output power from an assignment of n uplink timeslots to an assignment of n+1 uplink timeslots shall be equal to the difference of maximum permissible nominal reduction of maximum output power for the corresponding number of timeslots, as defined in the table 4.1-5 above.

As an exception, in case of a multislot uplink assignment, the first power control step down from the maximum output power is allowed to be in the range 0...2 dB.

In case the MS transmits on more uplink slots than assigned (e.g. due to a polling response, see 3GPP TS 44.060), the MS may reduce uplink power as above for a multislot uplink configuration but as a function of the number of active uplink slots on a TDMA frame basis.

On a multislot uplink configuration the MS may restrict the interslot output power control range to a 10 dB window, on a TDMA frame basis. On those timeslots where the ordered power level is more than 10 dB lower than the applied power level of the highest power timeslot, the MS shall transmit at a lowest possible power level within 10 dB range from the highest applied power level, if not transmitting at the actual ordered power level.

## 4.1.2 Base station

### a) Requirements for base stations except multicarrier BTS

For a normal BTS, the maximum output power measured at the input of the BSS Tx combiner, shall be, according to its class, as defined in the following table.

**Table 4.1-6 Normal BTS power classes**

| GSM 400 & GSM 900 & GSM 850 & MXM 850 and GSM 700 |                      | DCS 1 800 & PCS 1 900 & MXM 1900 |                      |
|---|----------------------|----------------------------------|----------------------|
| TRX power class                                   | Maximum output power | TRX power class                  | Maximum output power |
| 1   | 320 - (< 640) W      | 1                                | 20 - (< 40) W        |
| 2   | 160 - (< 320) W      | 2                                | 10 - (< 20) W        |
| 3   | 80 - (< 160) W       | 3                                | 5 - (< 10) W         |
| 4   | 40 - (< 80) W        | 4                                | 2,5 - (< 5) W        |
| 5   | 20 - (< 40) W        |                                  |                      |
| 6   | 10 - (< 20) W        |                                  |                      |
| 7   | 5 - (< 10) W         |                                  |                      |
| 8   | 2,5 - (< 5) W        |                                  |                      |

For a micro-BTS or a pico-BTS, the maximum output power per carrier measured at the antenna connector after all stages of combining shall be, according to its class, defined in the following table.

**Table 4.1-7 Micro BTS and Pico BTS power classes**

| GSM 900 & GSM 850 & MXM 850 and GSM 700 micro and pico-BTS |                      | DCS 1 800 & PCS 1 900 & MXM 1900 micro and pico-BTS |                      |
|--|----------------------|---|----------------------|
| TRX power class  | Maximum output power | TRX power class                                     | Maximum output power |
| <b>Micro</b>   |                      | <b>Micro</b>  |                      |
| M1   | (> 19) - 24 dBm      | M1  | (> 27) - 32 dBm      |
| M2   | (> 14) - 19 dBm      | M2  | (> 22) - 27 dBm      |
| M3   | (> 9) - 14 dBm       | M3  | (> 17) - 22 dBm      |
| <b>Pico</b>  |                      | <b>Pico</b>   |                      |
| P1   | (> 13) - 20 dBm      | P1  | (> 16) - 23 dBm      |

For BTS supporting QPSK, AQPSK, 8-PSK, 16-QAM and/or 32-QAM the manufacturer shall declare the maximum output power capability for GMSK and for each additionally supported combination of modulation and symbol rate.

The TRX power class is defined by the highest single carrier output power capability for any modulation.

## b) Requirements for multicarrier BTS

For BTS belonging to a multicarrier BTS class, the manufacturer shall declare the maximum output power per carrier in case that all carriers are operated at the same nominal output power. The declaration shall be given for each modulation and for all supported number of carriers up to the maximum number on each antenna port. Additionally, the maximum total power supported shall be declared.

The maximum total output power measured at the antenna connector after all stages of combining shall be as declared by the manufacturer but within the limits of the multicarrier BTS class, specified in table 4.1-8.

**Table 4.1-8 Multicarrier BTS classes**

| All bands   |   |
|---|---|
| Multicarrier BTS class  | Total output power limit per antenna port |
| Wide Area   | (NOTE 2)                                  |
| Medium Range  | [38] dBm                                  |
| Local Area  | [24] dBm                                  |
| NOTE 1: Medium Range and Local Area classes are not applicable for MXM 850 and MXM 1900 |   |
| NOTE 2: There is no upper power limit for the Wide Area multicarrier BTS                |   |

### c) Requirements for all types of base stations

The tolerance of the actual maximum output power of the BTS for each supported modulation shall be  $\pm 2$  dB under normal conditions and  $\pm 2,5$  dB under extreme conditions. Settings shall be provided to allow the output power to be reduced from the maximum level for the modulation with the highest output power capability in at least six steps of nominally 2 dB with an accuracy of  $\pm 1$  dB for each modulation to allow a fine adjustment of the coverage by the network operator. In addition, the actual absolute output power for each supported modulation at each static RF power step (N), with the exception below for the highest RF power level for 8-PSK, AQPSK, QPSK, 16-QAM and 32-QAM shall be  $2 \cdot N$  dB below the absolute output power at static RF power step 0 for the modulation with the highest output power capability with a tolerance of  $\pm 3$  dB under normal conditions and  $\pm 4$  dB under extreme conditions. The static RF power step 0 shall be the actual output power according to the TRX power class.

As an option the BSS can utilize downlink RF power control. In addition to the static RF power steps described above, the BSS may then for each supported modulation utilize up to 15 steps of power control levels with a step size of  $2 \text{ dB} \pm 1,5 \text{ dB}$ , in addition the actual absolute output power for each supported modulation at each power control level (N), with the exception below for the highest power level for QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM, shall be  $2 \cdot N$  dB below the absolute output power at power control level 0 for the modulation with the highest output power capability with a tolerance of  $\pm 3$  dB under normal conditions and  $\pm 4$  dB under extreme conditions. The power control level 0 shall be the set output power according to the TRX power class and the six power settings defined above.

The output power for GMSK, QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM shall be nominally the same for any supported static RF power step and power control level. An exception is allowed for the maximum output power levels of respectively QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM which may be lower than the GMSK output power for the same power step or power control level. The nominal size of the first step down from the respective maximum power level of QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM may be in the range  $0 \dots 2$  dB. The output power for the GMSK, QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM at this power control level shall still be considered the same when required in 3GPP TS 45.008. The output power of QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM for the remaining power steps or power control levels shall be the same as the GMSK power for the corresponding power step or power control level within a tolerance of  $\pm 1$  dB. The number of static RF power steps and the total number of power control steps may be different for GMSK and other modulations.

Network operators or manufacturers may also specify the BTS output power including any Tx combiner, according to their needs.

#### 4.1.2.1 Additional requirements for PCS 1 900 and MXM 1900 Base stations

The BTS transmitter maximum rated output power per carrier, measured at the input of the transmitter combiner, shall be, according to its TRX power class, as defined in the table 4.1-6 above. The base station output power may also be specified by the manufacturer or system operator at a different reference point (e.g. after transmitter combining).

The maximum radiated power from the BTS, including its antenna system, shall not exceed a maximum of 1 640 W EIRP, equivalent to 1 000 W ERP, per the applicable FCC rules for wideband PCS services [FCC part 24, subpart E, section 24.237].

#### 4.1.2.2 Additional requirements for GSM 850 and MXM 850 Base stations

The BTS transmitter maximum rated output power per carrier, measured at the input of the transmitter combiner, shall be, according to its TRX power class, as defined in the table 4.1-6 above. The base station output power may also be specified by the manufacturer or system operator at a different reference point (e.g. after transmitter combining).

The maximum radiated power from the BTS, including its antenna system, shall not exceed a maximum of 500 W ERP, per the applicable FCC rules for public mobile services [FCC part 22, subpart H, section 22.913].

#### 4.1.2.3 Additional requirements for GSM 700 Base stations

The BTS transmitter maximum rated output power per carrier, measured at the input of the transmitter combiner, shall be, according to its TRX power class, as defined in the table 4.1-6 above. The base station output power may also be specified by the manufacturer or system operator at a different reference point (e.g. after transmitter combining).

The maximum radiated power from the BTS, including its antenna system, shall not exceed a maximum 1000 W ERP for GSM 700 BTS per the applicable FCC rules [FCC Part 27, Subpart C, Section 27.50]



## 4.2 Output RF spectrum

The specifications contained in this subclause apply to both BTS and MS, in frequency hopping as well as in non frequency hopping mode, except that beyond 1800 kHz offset from the carrier the BTS is not tested in frequency hopping mode.

Due to the bursty nature of the signal, the output RF spectrum results from two effects:

- the modulation process;
- the power ramping up and down (switching transients).

The two effects are specified separately; the measurement method used to analyse separately those two effects is specified in 3GPP TS 51.010 and 3GPP TS 51.021. It is based on the "ringing effect" during the transients, and is a measurement in the time domain, at each point in frequency.

The limits specified thereunder are based on a 5-pole synchronously tuned measurement filter.

Unless otherwise stated, for the BTS, only one transmitter is active for the tests of this subclause.

### 4.2.1 Spectrum due to the modulation and wide band noise

#### 4.2.1.1 General requirements for all types of Base stations and MS

The output RF modulation spectrum is specified in the tables in 4.2.1.3. A mask representation of this specification is shown in annex A. This specification applies for all RF channels supported by the equipment.

The specification applies to the entire of the relevant transmit band and up to 2 MHz either side.

The specification shall be met under the following measurement conditions:

- for BTS up to 1800 kHz from the carrier and for MS in all cases:
  - zero frequency scan, filter bandwidth and video bandwidth of 30 kHz up to 1800 kHz from the carrier and 100 kHz at 1800 kHz and above from the carrier, with averaging done over 50 % to 90 % of the useful part of the transmitted bursts, excluding the midamble, and then averaged over at least 200 such burst measurements. Above 1800 kHz from the carrier only measurements centred on 200 kHz multiples are taken with averaging over 50 bursts.
- for BTS at 1800 kHz and above from the carrier:
  - swept measurement with filter and video bandwidth of 100 kHz, minimum sweep time of 75 ms, averaging over 200 sweeps. All slots active, frequency hopping disabled.
- when tests are done in frequency hopping mode, the averaging shall include only bursts transmitted when the hopping carrier corresponds to the nominal carrier of the measurement. The specifications then apply to the measurement results for any of the hopping frequencies.

The figures in tables ax), bx) and cx) in 4.2.1.3, at the vertically listed power level (dBm) and at the horizontally listed frequency offset from the carrier (kHz), are then the maximum allowed level (dB) relative to a measurement in 30 kHz on the carrier.

**NOTE:** This approach of specification has been chosen for convenience and speed of testing. It does however require careful interpretation if there is a need to convert figures in the tables in subclause 4.2.1.3 into spectral density values, in that only part of the power of the carrier is used as the relative reference, and in addition different measurement bandwidths are applied at different offsets from the carrier. Appropriate conversion factors for this purpose are given in 3GPP TS 45.050.

For the BTS, the power level is the "actual absolute output power" defined in subclause 4.1.2. If the power level falls between two of the values in the tables in subclause 4.2.1.3, the requirement shall be determined by linear interpolation.

#### 4.2.1.2 Additional requirements for multicarrier BTS

In case of multicarrier BTS, the requirements for spectrum due to modulation and wideband noise are based on the superposition of the single carrier spectrum requirements for all active carriers taking the different frequency offsets from each carrier into account. In addition to the measurements on a single carrier (4.2.1.1), the output spectrum shall be measured for frequency offsets between 400 kHz above the uppermost and below the lowermost carrier, respectively, and 10 MHz outside the transmit band with all carriers operating at full power at minimum carrier frequency spacing as well as with the carriers distributed across the declared maximum Base Station RF bandwidth as described in 3GPP TS 51.021 [18], specified for the BSS configuration under test. The following requirements apply:

- Depending on the active carrier number  $N$ , for frequency offsets higher than or equal to 1.8 MHz, the value of the spectrum due to modulation and wideband noise given for the measurement with single carrier may not increase by more than calculated from the expression  $10 \cdot \log(N)$  dB, or fulfil the requirement according to the applicable multicarrier BTS class in subclause 4.7.2, whichever less stringent.
- For frequency offsets less than 1.8 MHz, the unwanted emission must not exceed a mask defined by the cumulation of the spectrum due to modulation and wideband noise from each carrier as well as the possibly occurring IM products.
- In addition, a number of allowable exceptions are defined as stated in vi) and vii).

NOTE: This approach has been chosen to limit the wideband noise in the multicarrier operation by aligning with the performance of normal BTSs transmitting several carriers. These BTSs use combiner stages to feed the antenna which leads to a degradation of the noise performance at the antenna in the way as specified above. Above 1.8 MHz frequency offset a generic expression as stated above is applied. For a frequency offset below 1.8 MHz there is no corresponding simple generic expression as the spectrum will be dependent on the output power, carrier spacing as well as the number of active carriers.

In case of non-contiguous frequency allocation and a multicarrier BTS supporting non-contiguous frequency allocations as defined in clause 3, spectrum due to modulation and wideband noise shall be measured for frequency offsets above the uppermost carrier and frequency offsets below the lowermost carrier as specified above depending on the total number of active carriers  $N$ . In addition it shall be measured inbetween the two frequency groups with the first frequency group located at carrier frequency  $A$  and lower frequencies and a second frequency group located at carrier frequency  $B$  and higher frequencies, where the bandwidth  $(B - A)$  specifies the bandwidth between the innermost carriers  $A$  and  $B$ . The following requirements apply for the range between the two frequency groups:

- Depending on the active carrier number  $N$ , for frequency offsets higher than or equal to 1.8 MHz both above the uppermost carrier  $A$  of the lower frequency group and below the lowermost carrier  $B$  of the upper frequency group the value of the spectrum due to modulation and wideband noise given for the measurement of the closest carrier of the innermost carriers  $A$  and  $B$  may not increase by more than calculated from the expression  $10 \cdot \log(N)$  dB, or fulfil the requirement according to the applicable multicarrier BTS class in subclause 4.7.2, whichever less stringent.
- For frequency offsets less than 1.8 MHz above the uppermost carrier  $A$  of the lower frequency group or below the lowermost carrier  $B$  of the upper frequency group, the unwanted emission must not exceed a mask defined by the cumulation of the spectrum due to modulation and wideband noise from each of the  $N$  carriers and the IM products.
- In addition, a number of allowable exceptions are defined as stated in vii) and viii).

#### 4.2.1.3 Tables for spectrum requirements due to modulation and wideband noise

Two types of requirements are specified, depending on symbol-rate and pulse-shaping filter used:

Case 1: Normal symbol rate using linearised GMSK pulse-shaping filter and higher symbol rate using spectrally narrow pulse shaping filter

Case 2: Higher symbol rate using spectrally wide pulse shaping filter

For definition of pulse-shaping filters, see 3GPP TS 45.004.

The spectrally narrow pulse shaping filter in Case 1 and the spectrally wide pulse shaping filter in Case 2 are in this specification referred to as narrow and wide pulse shaping filter respectively.

a1) GSM 400 and GSM 900 and GSM 850 and GSM 700 MS:

| Case 1 | Power level | 100  | 200 | 250  | 400 | ≥ 600<br>< 1 800 | ≥ 1 800<br>< 3 000 | ≥ 3 000<br>< 6 000 | ≥ 6 000 |  |
|--------|-------------|------|-----|------|-----|------------------|--------------------|--------------------|---------|--|
|        | ≥ 39        | +0,5 | -30 | -33  | -60 | -66              | -69                | -71                | -77     |  |
| 37     | +0,5        | -30  | -33 | -60  | -64 | -67              | -69                | -75                |         |  |
| 35     | +0,5        | -30  | -33 | -60  | -62 | -65              | -67                | -73                |         |  |
| ≤ 33   | +0,5        | -30  | -33 | -60* | -60 | -63              | -65                | -71                |         |  |

| Case 2 | Power level | [100]   | [200]   | [250]    | [400]    | [600] | ≥ [800]<br>< 1 800 | ≥ 1 800<br>< 3 000 | ≥ 3 000<br>< 6 000 | ≥ 6 000 |
|--------|-------------|---------|---------|----------|----------|-------|--------------------|--------------------|--------------------|---------|
|        | ≥ 39        | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55] | [-60]              | [-63]              | [-65]              | [-71]   |
| 37     | [+0,5]      | [-12.3] | [-25]** | [-40]*** | [-55]    | [-60] | [-63]              | [-65]              | [-71]              |         |
| 35     | [+0,5]      | [-12.3] | [-25]** | [-40]*** | [-55]    | [-60] | [-63]              | [-65]              | [-71]              |         |
| ≤ 33   | [+0,5]      | [-12.3] | [-25]** | [-40]*** | [-55]    | [-60] | [-63]              | [-65]              | [-71]              |         |

NOTE: \* For equipment supporting QPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -54 dB.  
 NOTE: \*\* The requirement shall be [tbd] when the wideband pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).  
 NOTE: \*\*\* the requirement shall be [tbd] when the wide pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).

Note: GSM 700 MS shall also comply to the requirements in the applicable FCC rules [FCC Part 27, Subpart C, Section 27.53]. This may introduce more stringent requirements in frequency bands defined for public safety services.

a2) GSM 400, GSM 900, GSM 850, MXM 850 and GSM 700 normal BTS:

| Case 1 | Power level | 100  | 200 | 250  | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000 |
|--------|-------------|------|-----|------|------|------------------|--------------------|--------------------|---------|
|        | ≥ 43        | +0,5 | -30 | -33  | -60* | -70              | -73                | -75                | -80     |
| 41     | +0,5        | -30  | -33 | -60* | -68  | -71              | -73                | -80                |         |
| 39     | +0,5        | -30  | -33 | -60* | -66  | -69              | -71                | -80                |         |
| 37     | +0,5        | -30  | -33 | -60* | -64  | -67              | -69                | -80                |         |
| 35     | +0,5        | -30  | -33 | -60* | -62  | -65              | -67                | -80                |         |
| ≤ 33   | +0,5        | -30  | -33 | -60* | -60  | -63              | -65                | -80                |         |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: The requirements in this table also apply to multicarrier BTS when one carrier is active, for the listed frequency bands.  
 NOTE 3: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

Note: GSM 700 BTS shall also comply to the requirements in the applicable FCC rules [FCC Part 27, Subpart C, Section 27.53]. This may introduce more stringent requirements in frequency bands defined for public safety services.

a3) GSM 900 and GSM 850 and MXM 850 and GSM 700 micro-BTS:

| Case 1 | Power level | 100  | 200 | 250 | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800 |
|--------|-------------|------|-----|-----|------|------------------|--------------------|---------|
|        | ≤ 33        | +0,5 | -30 | -33 | -60* | -60              | -63                | -70     |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

Note: GSM 700 micro-BTS shall also comply to the requirements in the applicable FCC rules [FCC Part 27, Subpart C, Section 27.53]. This may introduce more stringent requirements in frequency bands defined for public safety services.

a4) GSM 900 and GSM 850 and MXM 850 and GSM 700 pico-BTS:

|        | Power level | 100  | 200 | 250 | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000 |
|--------|-------------|------|-----|-----|------|------------------|--------------------|--------------------|---------|
| Case 1 | ≤ 20        | +0,5 | -30 | -33 | -60* | -60              | -63                | -70                | -80     |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

Note: GSM 700 pico-BTS shall also comply to the requirements in the applicable FCC rules [FCC Part 27, Subpart C, Section 27.53]. This may introduce more stringent requirements in frequency bands defined for public safety services.

b1) DCS 1 800 MS:

|        | Power Level | 100     | 200     | 250      | 400      | ≥ 600<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000            |                    |         |
|--------|-------------|---------|---------|----------|----------|------------------|--------------------|--------------------|--------------------|---------|
| Case 1 | ≥ 36        | +0,5    | -30     | -33      | -60      | -60              | -71                | -79                |                    |         |
|        | 34          | +0,5    | -30     | -33      | -60      | -60              | -69                | -77                |                    |         |
|        | 32          | +0,5    | -30     | -33      | -60      | -60              | -67                | -75                |                    |         |
|        | 30          | +0,5    | -30     | -33      | -60*     | -60              | -65                | -73                |                    |         |
|        | 28          | +0,5    | -30     | -33      | -60*     | -60              | -63                | -71                |                    |         |
|        | 26          | +0,5    | -30     | -33      | -60*     | -60              | -61                | -69                |                    |         |
|        | ≤ 24        | +0,5    | -30     | -33      | -60*     | -60              | -59                | -67                |                    |         |
| Case 2 | Power Level | [100]   | [200]   | [250]    | [400]    | [600]            | ≥ [800]<br>< 1 800 | ≥ 1 800<br>< 3 000 | ≥ 3 000<br>< 6 000 | ≥ 6 000 |
|        | ≥ 36        | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 34          | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 32          | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 30          | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 28          | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 26          | [+0,5]  | [-12.3] | [-25]**  | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
| ≤ 24   | [+0,5]      | [-12.3] | [-25]** | [-40]*** | [-55]    | [-60]            | [-63]              | [-65]              | [-71]              |         |

NOTE: \* For equipment supporting QPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -54 dB.  
 NOTE: \*\* The requirement shall be [tbd] when the wideband pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).  
 NOTE: \*\*\* the requirement shall be [tbd] when the wide pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).

b2) DCS 1 800 normal BTS:

|        | Power level | 100  | 200 | 250 | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000 |
|--------|-------------|------|-----|-----|------|------------------|--------------------|--------------------|---------|
| Case 1 | ≥ 43        | +0,5 | -30 | -33 | -60* | -70              | -73                | -75                | -80     |
|        | 41          | +0,5 | -30 | -33 | -60* | -68              | -71                | -73                | -80     |
|        | 39          | +0,5 | -30 | -33 | -60* | -66              | -69                | -71                | -80     |
|        | 37          | +0,5 | -30 | -33 | -60* | -64              | -67                | -69                | -80     |
|        | 35          | +0,5 | -30 | -33 | -60* | -62              | -65                | -67                | -80     |
|        | ≤ 33        | +0,5 | -30 | -33 | -60* | -60              | -63                | -65                | -80     |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: The requirements in this table also apply to multicarrier BTS when one carrier is active, for the DCS 1 800 band.  
 NOTE 3: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

b3) DCS 1 800 micro-BTS:

|        | Power level | 100  | 200 | 250 | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800 |
|--------|-------------|------|-----|-----|------|------------------|--------------------|---------|
| Case 1 | 35          | +0,5 | -30 | -33 | -60* | -62              | -65                | -76     |
|        | ≤ 33        | +0,5 | -30 | -33 | -60* | -60              | -63                | -76     |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

b4) DCS 1 800 pico-BTS:

|        | Power level | 100  | 200 | 250 | 400  | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000 |
|--------|-------------|------|-----|-----|------|------------------|--------------------|--------------------|---------|
| Case 1 | ≤ 23        | +0,5 | -30 | -33 | -60* | -60              | -63                | -76                | -80     |

NOTE 1: \* For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.  
 NOTE 2: In case of AQPSK the requirements in this table apply to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS.

c1) PCS 1 900 MS:

|        | Power level | 100    | 200     | 250     | 400      | ≥ 600<br>< 1 200 | ≥ 1 200<br>< 1 800 | ≥ 1 800<br>< 6 000 | ≥ 6 000            |         |
|--------|-------------|--------|---------|---------|----------|------------------|--------------------|--------------------|--------------------|---------|
| Case 1 | ≥ 33        | +0,5   | -30     | -33     | -60      | -60              | -60                | -68                | -76                |         |
|        | 32          | +0,5   | -30     | -33     | -60      | -60              | -60                | -67                | -75                |         |
|        | 30          | +0,5   | -30     | -33     | -60*     | -60              | -60                | -65                | -73                |         |
|        | 28          | +0,5   | -30     | -33     | -60*     | -60              | -60                | -63                | -71                |         |
|        | 26          | +0,5   | -30     | -33     | -60*     | -60              | -60                | -61                | -69                |         |
|        | ≤ 24        | +0,5   | -30     | -33     | -60*     | -60              | -60                | -59                | -67                |         |
| Case 2 | Power level | [100]  | [200]   | [250]   | [400]    | [600]            | ≥ [800]<br>< 1 800 | ≥ 1 800<br>< 3 000 | ≥ 3 000<br>< 6 000 | ≥ 6 000 |
|        | ≥ 33        | [+0,5] | [-12.3] | [-25]** | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 32          | [+0,5] | [-12.3] | [-25]** | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 30          | [+0,5] | [-12.3] | [-25]** | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 28          | [+0,5] | [-12.3] | [-25]** | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |
|        | 26          | [+0,5] | [-12.3] | [-25]** | [-40]*** | [-55]            | [-60]              | [-63]              | [-65]              | [-71]   |

NOTE: \* For equipment supporting QPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -54 dB.  
 NOTE: \*\* The requirement shall be [tbd] when the wideband pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).  
 NOTE: \*\*\* the requirement shall be [tbd] when the wide pulse shaping filter with the tight spectrum mask is indicated (see Pulse Format Information Element in 3GPP TS 44.060).

c2) PCS 1 900 & MXM 1900 normal BTS:

|  | Power level | 100  | 200 | 250 | 400  | $\geq 600$<br>$< 1\,200$ | $\geq 1\,200$<br>$< 1\,800$ | $\geq 1\,800$<br>$< 6\,000$ | $\geq 6\,000$ |
|--|-------------|------|-----|-----|------|--------------------------|-----------------------------|-----------------------------|---------------|
| Case 1   | $\geq 43$   | +0,5 | -30 | -33 | -60* | -70                      | -73                         | -75                         | -80           |
|  | 41          | +0,5 | -30 | -33 | -60* | -68                      | -71                         | -73                         | -80           |
|  | 39          | +0,5 | -30 | -33 | -60* | -66                      | -69                         | -71                         | -80           |
|  | 37          | +0,5 | -30 | -33 | -60* | -64                      | -67                         | -69                         | -80           |
|  | 35          | +0,5 | -30 | -33 | -60* | -62                      | -65                         | -67                         | -80           |
|  | $\leq 33$   | +0,5 | -30 | -33 | -60* | -60                      | -63                         | -65                         | -80           |
| NOTE 1: * For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.          |             |      |     |     |      |                          |                             |                             |               |
| NOTE 2: The requirements in this table also apply to multicarrier BTS when one carrier is active, for the PCS 1 900 band.          |             |      |     |     |      |                          |                             |                             |               |
| NOTE 3: In case of AQPSK the requirements in this table apply to all values of $\alpha$ (see 3GPP TS 45.004) supported by the BTS. |             |      |     |     |      |                          |                             |                             |               |

c3) PCS 1 900 & MXM 1900 micro-BTS:

|  | Power level | 100  | 200 | 250 | 400  | $\geq 600$<br>$< 1\,200$ | $\geq 1\,200$<br>$< 1\,800$ | $\geq 1\,800$ |
|--|-------------|------|-----|-----|------|--------------------------|-----------------------------|---------------|
| Case 1   | 35          | +0,5 | -30 | -33 | -60* | -62                      | -65                         | -76           |
|  | $\leq 33$   | +0,5 | -30 | -33 | -60* | -60                      | -63                         | -76           |
| NOTE 1: * For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.          |             |      |     |     |      |                          |                             |               |
| NOTE 2: In case of AQPSK the requirements in this table apply to all values of $\alpha$ (see 3GPP TS 45.004) supported by the BTS. |             |      |     |     |      |                          |                             |               |

c4) PCS 1 900 and MXM 1900 pico-BTS:

|  | Power level | 100  | 200 | 250 | 400  | $\geq 600$<br>$< 1\,200$ | $\geq 1\,200$<br>$< 1\,800$ | $\geq 1\,800$ |
|--|-------------|------|-----|-----|------|--------------------------|-----------------------------|---------------|
| Case 1   | $\leq 23$   | +0,5 | -30 | -33 | -60* | -60                      | -63                         | -76           |
| NOTE 1: * For equipment supporting QPSK, AQPSK, 8-PSK, 16-QAM or 32-QAM, the requirement for these modulations is -56 dB.          |             |      |     |     |      |                          |                             |               |
| NOTE 2: In case of AQPSK the requirements in this table apply to all values of $\alpha$ (see 3GPP TS 45.004) supported by the BTS. |             |      |     |     |      |                          |                             |               |

#### 4.2.1.4 Exceptions for spectrum due to modulation and wideband noise

##### 4.2.1.4.1 Mobile Stations and Base Transceiver Stations except multicarrier BTS

The following exceptions shall apply, using the same measurement conditions as specified above.

- i) In the combined range 600 kHz to 6 MHz above and below the carrier, in up to three bands of 200 kHz width centred on a frequency which is an integer multiple of 200 kHz, exceptions at up to -36 dBm are allowed.
- ii) Above 6 MHz offset from the carrier in up to 12 bands of 200 kHz width centred on a frequency which is an integer multiple of 200 kHz, exceptions at up to -36 dBm are allowed. For the BTS only one transmitter is active for this test.

Using the same measurement conditions as specified above, if a requirement in tables ax), bx) and cx) is tighter than the limit given in the following, the latter shall be applied instead.

- iii) For MS:

**Table 4.2-1 Exceptions for MS wideband noise level**

| Frequency offset from the carrier | GSM 400 & GSM 900 & GSM 850 & GSM 700 | DCS 1 800 & PCS 1 900 |
|-----------------------------------|---------------------------------------|-----------------------|
| < 600 kHz                         | -36 dBm                               | -36 dBm               |
| ≥ 600 kHz, < 1 800 kHz            | -51 dBm                               | -56 dBm               |
| ≥ 1 800 kHz                       | -46 dBm                               | -51 dBm               |

iv) For normal but not for multicarrier BTS, whereby the levels given here in dB are relative to the output power of the BTS at the lowest static power level measured in 30 kHz:

**Table 4.2-2 Exceptions for normal BTS wideband noise level**

| Frequency offset from the carrier | GSM 400 & GSM 900 & GSM 850 & MXM 850 & GSM 700 | DCS 1 800 & PCS 1 900 & MXM 1900 |
|-----------------------------------|---|----------------------------------|
| < 1 800 kHz                       | max {-88 dB, -65 dBm}                           | max {-88 dB, -57 dBm}            |
| ≥ 1 800 kHz                       | max {-83 dB, -65 dBm}                           | max {-83 dB, -57 dBm}            |

v) For micro and pico -BTS, at 1 800 kHz and above from the carrier:

**Table 4.2-3 Exceptions for micro and pico BTS wideband noise level**

| Power Class | GSM 900 & GSM 850 & MXM 850 & GSM 700 | DCS 1 800 & PCS 1 900 & MXM 1900 |
|-------------|---------------------------------------|----------------------------------|
| M1          | -59 dBm                               | -57 dBm                          |
| M2          | -64 dBm                               | -62 dBm                          |
| M3          | -69 dBm                               | -67 dBm                          |
| P1          | -68dBm                                | -65dBm                           |

#### 4.2.1.4.2 Multicarrier BTS

Using the same measurement conditions as specified above for multicarrier BTS, following exceptions are allowed for BTS belonging to a multicarrier BTS class when one or more carriers are active:

vi) At offsets between 600 kHz above the uppermost and below the lowermost carrier, respectively, and 10 MHz outside the transmit band, in bands of 200 kHz width centered on a frequency, which is an integer multiple of 200 kHz, exceptions are allowed for N active carriers at  $M = 18 + 3 * (N - 1)$  or up to maximum 40 bands, whichever the lowest. All exceptions are measured in 100 kHz bandwidth, averaged over the 200 kHz band and may be up to exception level in table 4.2-3a. In addition, all exceptions within the relevant transmit band and up to four exceptions at offsets up to 2 MHz from the respective band edges, may be up to -70 dBc relative to the carrier measured in a bandwidth of 100 kHz, or exception level in table 4.2-3a, whichever less stringent.

**Table 4.2-3a Exception levels for multicarrier BTS wideband noise**

| Multicarrier BTS Class | Exception level for wideband noise | Lower limit for wideband noise |
|------------------------|------------------------------------|--------------------------------|
| Wide Area              | -36 dBm                            | -47 dBm                        |
| Medium Range           | [-42] dBm                          | [-53] dBm                      |
| Local Area             | [-50] dBm                          | [-61] dBm                      |

vii) At offsets larger than 600 kHz from the carrier, if a requirement in tables a2), b2) and c2), adjusted according to applicable multicarrier BTS requirements, is more stringent than lower limit in table 4.2-3a, the latter requirement shall be applied instead.

viii) The following applies in case of a non-contiguous frequency allocation as defined in clause 3: The same total number of exceptions M for N active carriers apply as given in vi) including the range of frequency offsets between 0.6 MHz above the uppermost carrier of the lower frequency group and 0.6 MHz below the lowermost carrier of the upper frequency group.

## 4.2.2 Spectrum due to switching transients

### 4.2.2.1 General requirements

Those effects are also measured in the time domain and the specifications assume the following measurement conditions: zero frequency scan, filter bandwidth 30 kHz, peak hold, and video bandwidth 100 kHz.

In case of the multicarrier BTS class, the measurement of the switching transients outside the BTS transmit band is covered by a measurement procedure stated in subclause 4.3 (Spurious emissions). For measurements of switching transients inside the transmit band, the measurement is performed with a single active carrier at maximum declared power..

The example of a waveform due to a burst as seen in a 30 kHz filter offset from the carrier is given thereunder (figure 1).

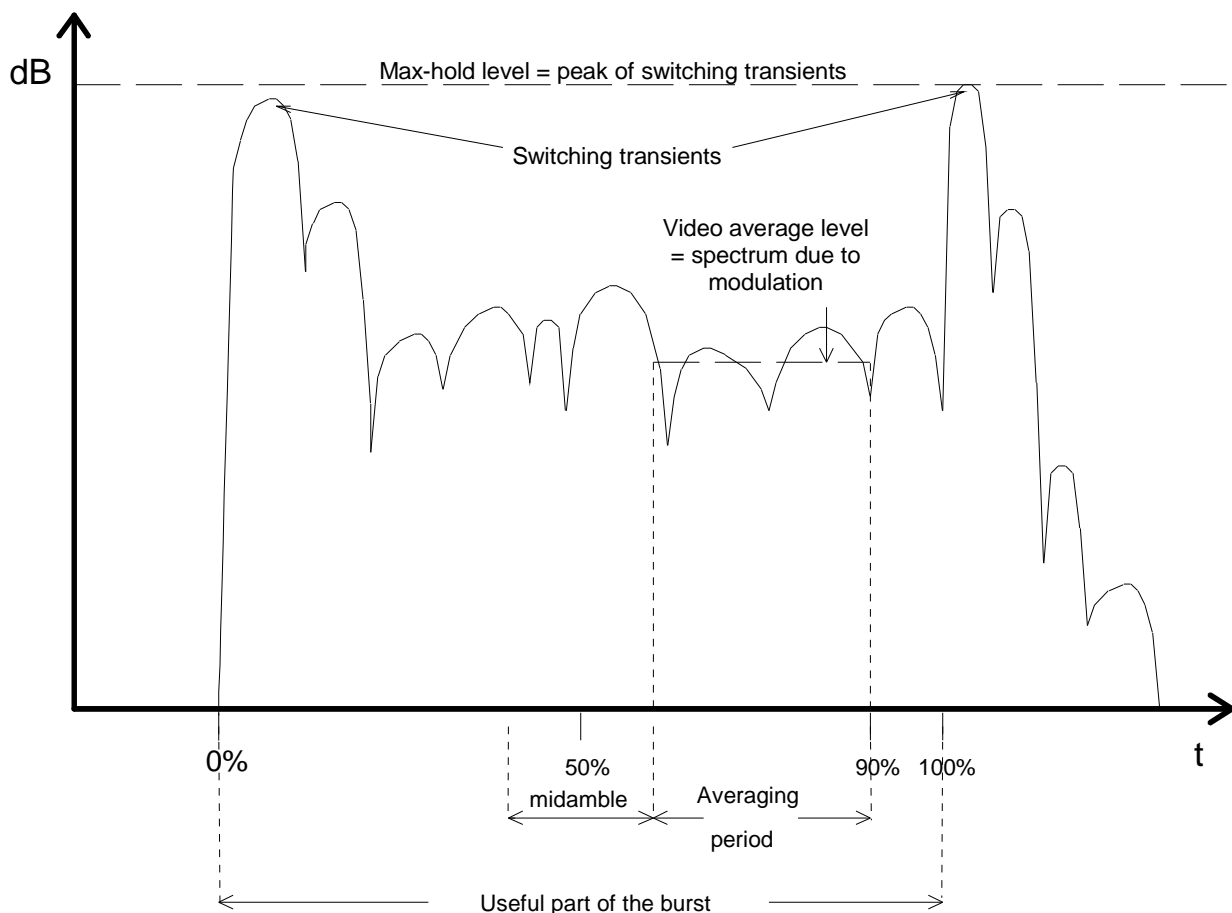


Figure 4.2-1: Example of a time waveform due to a burst as seen in a 30 kHz filter offset from the carrier



## a) Mobile Station:

**Table 4.2-4a Requirements for switching transients - MS**

| Power level | Maximum level measured |         |           |           |
|-------------|------------------------|---------|-----------|-----------|
|             | 400 kHz                | 600 kHz | 1 200 kHz | 1 800 kHz |
| 39 dBm      | -21 dBm                | -26 dBm | -32 dBm   | -36 dBm   |
| ≤ 37 dBm    | -23 dBm                | -26 dBm | -32 dBm   | -36 dBm   |

NOTE 1: The relaxation's for power level 39 dBm is in line with the modulated spectra and thus causes negligible additional interference to an analogue system by a GSM signal.

NOTE 2: The near-far dynamics with this specification has been estimated to be approximately 58 dB for MS operating at a power level of 8 W or 49 dB for MS operating at a power level of 1 W. The near-far dynamics then gradually decreases by 2 dB per power level down to 32 dB for MS operating in cells with a maximum allowed output power of 20 mW or 29 dB for MS operating at 10 mW.

NOTE 3: The possible performance degradation due to switching transient leaking into the beginning or the end of a burst, was estimated and found to be acceptable with respect to the BER due to cochannel interference (C/I).

## b) Base transceiver station:

The maximum level measured, after any filters and combiners, at the indicated offset from the carrier, is:

**Table 4.2-4b Requirements for switching transients - BTS**

|   | Maximum level measured |         |           |           |
|---|------------------------|---------|-----------|-----------|
|   | 400 kHz                | 600 kHz | 1 200 kHz | 1 800 kHz |
| GSM 400 & GSM 900 & GSM 850 & MXM 850 & GSM 700 (GMSK)                        | -57 dBc                | -67 dBc | -74 dBc   | -74 dBc   |
| GSM 400 & GSM 900 & GSM 850 & MXM 850 & GSM 700 (QPSK, 8-PSK, 16-QAM, 32-QAM) | -52 dBc                | -62 dBc | -74 dBc   | -74 dBc   |
| DCS 1 800 & PCS 1 900 & MXM 1900 (GMSK)                                       | -50 dBc                | -58 dBc | -66 dBc   | -66 dBc   |
| DCS 1 800 & PCS 1 900 & MXM 1900 (QPSK, 8-PSK, 16-QAM, 32-QAM)                | -50 dBc                | -58 dBc | -66 dBc   | -66 dBc   |

Or -36 dBm, whichever is the higher.

dBc means relative to the output power at the BTS, measured at the same point and in a filter bandwidth of at least 300 kHz.

NOTE 4: Some of the above requirements are different from those specified in subclause 4.3.2.

## 4.3 Spurious emissions

The limits specified thereunder are based on a 5-pole synchronously tuned measurement filter.

In addition to the requirements of this section, the PCS 1 900 & MXM 1900 BTS and PCS 1 900 MS shall also comply with the applicable limits for spurious emissions established by the FCC rules for wideband PCS services [FCC Title 47 CFR Part 24].

In addition to the requirements of this section, the GSM 850 & MXM 850 BTS and GSM 850 MS shall also comply with the applicable limits for spurious emissions established by the FCC rules for public mobile services [FCC Part 22, Subpart H].

In addition to the requirements of this section, the GSM 700 BTS and GSM 700 MS shall also comply with the applicable limits for spurious emissions established by the FCC [FCC Part 27, Subpart C, Section 27.53].

Note: This may introduce more stringent requirements than specified in this subclause for frequency bands dedicated for public safety services.

### 4.3.1 Principle of the specification

In this subclause, the spurious transmissions (whether modulated or unmodulated) and the switching transients are specified together by measuring the peak power in a given bandwidth at various frequencies. The bandwidth is increased as the frequency offset between the measurement frequency and, either the carrier, or the edge of the MS or BTS transmit band, increases. The effect for spurious signals of widening the measurement bandwidth is to reduce the allowed total spurious energy per MHz. The effect for switching transients is to effectively reduce the allowed level of the switching transients (the peak level of a switching transient increases by 6 dB for each doubling of the measurement bandwidth). The conditions are specified in the tables 4.3-1 and 4.3-2, a peak-hold measurement being assumed.

In case of multicarrier BTS, instead of a peak-hold measurement an average measurement is assumed. Furthermore, the measurement configuration as defined in 4.2.1 for multicarrier BTS shall be applied.

The measurement conditions for radiated and conducted spurious are specified separately in 3GPP TS 51.010 and 3GPP TS 51.02x series. The frequency bands where these are actually measured may differ from one type to the other (see 3GPP TS 51.010 and 3GPP TS 51.02x series).

a) Measurement bandwidth for inband measurements of spurious emissions

**Table 4.3-1 Measurement bandwidth for inband measurements**

| Band                   | Frequency offset<br>(offset from carrier) | Measurement bandwidth |
|------------------------|---|-----------------------|
| relevant transmit band | $\geq 1,8$ MHz                            | 30 kHz                |
|                        | $\geq 6$ MHz                              | 100 kHz               |

b) Measurement bandwidth for out-of-band measurements of spurious emissions

**Table 4.3-2 Measurement bandwidth for out-of-band measurements**

| Band   | Frequency offset                                 | Measurement bandwidth             |
|--|--|-----------------------------------|
| 100 kHz to 50 MHz  | -  | 10 kHz                            |
| 50 MHz to 500 MHz and outside the relevant transmit band   | (offset from edge of the relevant transmit band) |                                   |
|  | $\geq 2$ MHz                                     | 30 kHz                            |
|  | $\geq 5$ MHz                                     | 100 kHz                           |
| 500 MHz to 1000 MHz and outside the relevant transmit band | (offset from edge of the relevant transmit band) |                                   |
|  | $\geq 2$ MHz                                     | 30 kHz                            |
|  | $\geq 5$ MHz                                     | 100 kHz                           |
|  | $\geq 10$ MHz                                    | 300 kHz                           |
|  | $\geq 20$ MHz                                    | 1 MHz                             |
|  | $\geq 30$ MHz                                    | 3 MHz                             |
| Above 1000 MHz and outside the relevant transmit band      | (offset from edge of the relevant transmit band) |                                   |
|  | $\geq 2$ MHz                                     | 30 kHz                            |
|  | $\geq 5$ MHz                                     | 100 kHz                           |
|  | $\geq 10$ MHz                                    | 300 kHz / 1 MHz <sup>(note)</sup> |
|  | $\geq 20$ MHz                                    | 1 MHz                             |
|  | $\geq 30$ MHz                                    | 3 MHz                             |

NOTE: 1 MHz measurement bandwidth applies only to BTS belonging to a multicarrier BTS class.

The measurement settings assumed correspond, for the resolution bandwidth to the value of the measurement bandwidth in the table, and for the video bandwidth to approximately three times this value.

NOTE: For radiated spurious emissions for MS with antenna connectors, and for all spurious emissions for MS with integral antennas, the specifications currently only apply to the frequency band 30 MHz to 4 GHz. The specification and method of measurement outside this band are under consideration.

c) Relation to definitions and requirements in CEPT/ERC/REC 74-01 and ITU-R SM.329

In this subclause for all equipment the term Spurious emission out-of-band is used for all spurious transmissions outside the relevant transmit band (whether modulated or unmodulated), comprised of contributions from noise, intermodulation and non-harmonic emissions. For multicarrier BTS the definition of the requirements are aligned with the definitions in ITU-R SM.329 [34] and REC 74-01 in that

- Unwanted emissions in multicarrier operation are specified in subclause 4.2.1 (including the reference to intermodulation subclause 4.7.2) in present specification, both for inband and out-of band emissions from 0 MHz up to  $2 \cdot BW$  frequency offset from edge of relevant transmit frequency band.
- Minimum required frequency allocation for each operator is assumed to be 5 MHz, i.e. BW is 5 MHz.
- Spurious emissions according to REC 74-01 definition are specified in subclause 4.3.2 from  $2 \cdot BW = 10$  MHz and higher frequency offsets. The 10 MHz spurious domain boundary applies also for larger transmitter bandwidths.
- In addition there is an upper limit for the unwanted emissions from 0 to 10 MHz frequency offset outside the relevant transmit band edge according to 4.3.2.1.
- The relevant transmit bands are defined in clause 2.

## 4.3.2 Base Transceiver Station

### 4.3.2.1 General requirements

i) The power measured in the conditions specified in subclause 4.3.1a shall be no more than -36 dBm. In case of multicarrier BTS, the requirements in subclause 4.2.1 for single carrier operation apply for the case of declared maximum output power.

ii) The power measured in the conditions specified in subclause 4.3.1b shall be no more than:

**Table 4.3-3 Requirements for spurious emissions – out of relevant transmit band**

| Band               | Frequency offset outside relevant transmit band | All BTS except multicarrier BTS<br>Maximum power limit | Multicarrier BTS<br>Maximum power limit      |  |            |
|--------------------|---|--|--|--|------------|
|                    |   |  | Wide Area                                    | Medium Range                                   | Local Area |
| 9 kHz to 1 GHz     | $\geq 2$ MHz                                    | -36 dBm (250 nW)                                       | -25 dBm                                      | [-33] dBm                                      | [-46] dBm  |
|                    | $\geq 5$ MHz                                    | -36 dBm  | -20-4,2*<br>( $\Delta f - 5$ ) dBm<br>(Note) | [-28-2,6*<br>( $\Delta f - 5$ ) dBm<br>(Note)] | [-41] dBm  |
|                    | $\geq 10$ MHz                                   | -36 dBm  | -36 dBm                                      | [-36] dBm                                      | [-36] dBm  |
| 1 GHz to 12.75 GHz | $\geq 2$ MHz                                    | -30 dBm (1 $\mu$ W)                                    | -25 dBm                                      | [-33] dBm                                      | [-45] dBm  |
|                    | $\geq 5$ MHz                                    | -30 dBm  | -20-3*<br>( $\Delta f - 5$ ) dBm<br>(Note)   | [-28-1,4*<br>( $\Delta f - 5$ ) dBm<br>(Note)] | [-40] dBm  |

|  |               |         |         |           |           |
|--|---------------|---------|---------|-----------|-----------|
|  | $\geq 10$ MHz | -30 dBm | -30 dBm | [-30] dBm | [-30] dBm |
| Note: $\Delta f$ is the frequency offset outside relevant transmit band in MHz |               |         |         |           |           |

In case of multicarrier BTS, for frequency offsets between 0 and 10 MHz, the most stringent requirements of the requirements in the table above and the requirements in subclause 4.2.1 for multicarrier BTS with more than one carrier active apply.

In addition, applicable protection of critical services, in frequency bands outside the relevant TX band needs to be considered and measures taken to assure uninterrupted operation, according to additional requirements as defined by the regional regulator.

NOTE 1: For radiated spurious emissions for BTS, the specifications currently only apply to the frequency band 30 MHz to 4 GHz. The specification and method of measurement outside this band are under consideration.

iii) In the BTS receive band, the power measured using the conditions specified in subclause 4.2.1, with a filter and video bandwidth of 100 kHz shall be no more than :

**Table 4.3-4 Requirements for spurious emissions – BTS receive band**

|                               | <b>GSM 900 &amp; GSM 850 &amp; MXM 850 &amp; GSM 700 (dBm)</b> | <b>DCS 1800 &amp; PCS 1900 &amp; MXM 1900 (dBm)</b> |
|-------------------------------|--|---|
| Normal BTS                    | -98  | -98   |
| Micro BTS M1                  | -91  | -96   |
| Micro BTS M2                  | -86  | -91   |
| Micro BTS M3                  | -81  | -86   |
| Pico BTS P1                   | -70  | -80   |
| R-GSM 900 BTS                 | -89  |   |
| Wide Area multicarrier BTS    | -98  | -98   |
| Medium Range multicarrier BTS | [-91]  | [-91]   |
| Local Area multicarrier BTS   | [-84]  | [-84]   |

These values assume a 30 dB coupling loss between transmitter and receiver. If BTSs of different classes are co-sited, the coupling loss must be increased by the difference between the corresponding values from the table above.

iv) In case of BTSs belonging to a multicarrier BTS class, the measurement of the spurious emissions outside the BTS transmit band shall be conducted for the case of maximum supported number of carriers at maximum nominal power for each carrier while performing burst on/off keying. For measurements inside the relevant transmit band the measurement conditions and requirement in 4.2.1 regarding operation with one carrier active apply.

#### 4.3.2.2 Additional requirements for co-existence with GSM systems on other frequency bands

i) For co-existence in the same geographic area, the powers measured in the conditions specified in subclause 4.2.1, with a filter and video bandwidth of 100 kHz, shall be no more than specified in table below:

**Table 4.3-5 Requirements for spurious emissions – co-existence with GSM systems on other frequency bands**

| <b>For co-existence with BTS:</b> | <b>Frequency band</b>                    | <b>Power measured (dBm)</b> | <b>Required for BTS (Note 3)</b>       |
|-----------------------------------|--|-----------------------------|--|
| GSM 900                           | 921 – 960 MHz                            | $\leq -57$                  | T-GSM 810, GSM 400 & DCS 1800          |
| DCS 1800                          | 1805 – 1880 MHz                          | $\leq -47$                  | T-GSM 810, GSM 400 & GSM 900           |
| GSM 400                           | 460.4 – 467.6 MHz and 488.8 – 496.0 MHz. | $\leq -57$                  | T-GSM 810, GSM 900 & DCS 1800 (Note 1) |
| PCS 1900 & MXM 1900               | 1930 – 1990 MHz                          | $\leq -47$                  | GSM 700, GSM 850, MXM 850              |

|                   |                                    |            |  |
|-------------------|------------------------------------|------------|--|
| GSM 850 & MXM 850 | 869 - 894 MHz                      | $\leq -57$ | GSM 700, PCS 1900 & MXM 1900<br>(Note 2)             |
| GSM 700           | 728 – 746 MHz and<br>747 – 763 MHz | $\leq -57$ | GSM 850, MXM 850,<br>PCS 1900 & MXM 1900<br>(Note 2) |
| T-GSM 810         | 851 – 866 MHz                      | $\leq -57$ | GSM 400, GSM 900 &<br>DCS 1800                       |

NOTE 1: These requirements should also be applied to GSM 900 and DCS 1800 BTS built to a HW specification for R98 or earlier.

NOTE 2: These requirements should also be applied to GSM 850 & MXM 850 BTS and PCS 1900 & MXM 1900 BTS built to a HW specification for R99 or earlier.

NOTE 3: These requirements should also be applied to any additional combination of BTSs in different frequency bands operating in the same geographic area.

ii) Measures must be taken for mutual protection of receivers when BTS of different bands are co-sited.

NOTE 4: Thus, for this case, then the power measured from the BTS transmitter in the conditions specified in subclause 4.2.1, with a filter and video bandwidth of 100 kHz should be no more than the values in the table 4.3-4 in subclause 4.3.2.1, assuming the coupling losses stated in the same subclause, to protect co-sited BTS receivers for

- GSM 400 in the bands 450.4 – 457.6 MHz and 478.8 – 486.0 MHz
- T-GSM 810 in the band 806– 821 MHz
- GSM 900 in the band 876 – 915 MHz
- DCS 1800 in the band 1710 – 1785 MHz
- PCS 1900 or MXM 1900 in the band 1850 – 1910 MHz
- GSM 850 or MXM 850 in the band 824 – 849 MHz
- GSM 700 in the bands 698 – 716 MHz and 777 – 793 MHz

#### 4.3.2.3 Additional requirements for co-existence with 3 G

i) In geographic areas where GSM and UTRA networks are deployed, the power measured in the conditions specified in subclause 4.2.1, with a filter and video bandwidth of 100 kHz shall be no more than:

**Table 4.3-6 Requirements for spurious emissions – co-existence with 3 G systems on other frequency bands**

| Band (MHz)                    | power (dBm) | Note                  |
|-------------------------------|-------------|-----------------------|
| 832 - 862                     | -62         | E-UTRA/FDD BS Rx band |
| 791 - 821                     | -62         | E-UTRA/FDD UE Rx band |
| 1880 - 1920 <sup>(Note)</sup> | -62         | E-UTRA/TDD band       |
| 1900 – 1920                   | -62         | UTRA/TDD band         |
| 1920 – 1980                   | -62         | UTRA/FDD BS Rx band   |
| 2010 – 2025                   | -62         | UTRA/TDD band         |
| 2110 – 2170                   | -62         | UTRA/FDD UE Rx band   |

|                                   |     |                       |
|-----------------------------------|-----|-----------------------|
| 2300 - 2400                       | -62 | E-UTRA/TDD band       |
| 2500 – 2570                       | -62 | E-UTRA/FDD BS Rx band |
| 2570-2620                         | -62 | E-UTRA/TDD band       |
| 2620-2690                         | -62 | E-UTRA/FDD UE Rx band |
| Note: Only if regionally required |     |                       |

ii) When GSM and UTRA BS are co-located, the power measured in the conditions specified in subclause 4.2.1, with a filter and video bandwidth of 100 kHz shall be no more than:

**Table 4.3-7 Requirements for spurious emissions – co-located BTS with 3 G BS on other frequency bands**

| Band (MHz)  | power (dBm)                 |                  |              |            | Note                  |
|---|-----------------------------|------------------|--------------|------------|-----------------------|
|   | BTS except multicarrier BTS | Multicarrier BTS |              |            |                       |
|   |                             | Wide Area        | Medium Range | Local Area |                       |
| 832 - 862   | -96                         | -96              | [-91]        | [-88]      | E-UTRA/FDD BS Rx band |
| 791 - 821   | -62                         | -62              | [-62]        | [-62]      | E-UTRA/FDD UE Rx band |
| 1880 - 1920 <sup>(Note 1)</sup>   | -96                         | -96              | [-91]        | [-88]      | E-UTRA/TDD band       |
| 1900 – 1920   | -96                         | -96              | [-91]        | [-88]      | UTRA/TDD band         |
| 1920 – 1980   | -96                         | -96              | [-91]        | [-88]      | UTRA/FDD BS Rx band   |
| 2010 – 2025   | -96                         | -96              | [-91]        | [-88]      | UTRA/TDD band         |
| 2110 – 2170   | -62                         | -62              | [-62]        | [-62]      | UTRA/FDD UE Rx band   |
| 2300 - 2400   | -96                         | -96              | [-91]        | [-88]      | E-UTRA/TDD band       |
| 2500 – 2570   | -96                         | -96              | [-91]        | [-88]      | E-UTRA/FDD BS Rx band |
| 2570-2620   | -96                         | -96              | [-91]        | [-88]      | E-UTRA/TDD band       |
| 2620-2690   | -62                         | -62              | [-62]        | [-62]      | E-UTRA/FDD UE Rx band |
| Note 1: Only if regionally required.  |                             |                  |              |            |                       |
| Note 2: Multicarrier BTS values assume a 30 dB coupling loss between transmitter and receiver. If co-located with base station of a different class, the coupling loss must be increased by the difference between the corresponding values from the table. |                             |                  |              |            |                       |

Note 1: The requirements in this subclause should also be applied to BTS built to a hardware specification for R98 or earlier. For a BTS built to a hardware specification for R98 or earlier, with an 8-PSK capable transceiver installed, the 8-PSK transceiver shall meet the R99 requirement.

### 4.3.3 Mobile Station

#### 4.3.3.1 Mobile Station GSM 400, T-GSM 810, GSM 900 and DCS 1 800

i) The power measured in the conditions specified in subclause 4.3.1a, for a MS when assigned a channel, shall be no more than -36 dBm. For R-GSM 900 MS except small MS the corresponding limit shall be -42 dBm.

ii) The power measured in the conditions specified in subclause 4.3.1b for a MS, when assigned a channel, shall be no more than (see also note in subclause 4.3.1b above):

- 250 nW (-36 dBm) in the frequency band 9 kHz to 1 GHz;
- 1  $\mu$ W (-30 dBm) in the frequency band 1 GHz to 12,75 GHz.

The power measured in a 100 kHz bandwidth for a MS, when not assigned a channel (idle mode), shall be no more than (see also note in subclause 4.3.1 above):

- 2 nW (-57 dBm) in the frequency bands 9 kHz to 1 000 MHz;
- 20 nW (-47 dBm) in the frequency bands 1 - 12.75 GHz,

with the following exceptions:

- -76 dBm in the frequency band 832 to 862 MHz;
- 1.25 nW (-59 dBm) in the frequency band 880 MHz to 915 MHz;
- 5 nW (-53 dBm) in the frequency band 1,71 GHz to 1,785 GHz;
- -76 dBm in the frequency bands 1900 – 1920 MHz, 1920 – 1980 MHz, 2010 – 2025 MHz, 2110 - 2170 MHz and 2300 – 2400 MHz;
- -76 dBm in the frequency bands 2500-2570 MHz, 2570-2620 MHz and 2620-2690 MHz.

NOTE: The idle mode spurious emissions in the receive band are covered by the case for MS assigned a channel (see below).

iii) When assigned a channel, the power emitted by the MS, when measured using the measurement conditions specified in subclause 4.2.1, but with averaging over at least 50 burst measurements, with a filter and video bandwidth of 100 kHz, for measurements centred on 200 kHz multiples shall be no more than:

- -62 dBm in the bands 390.2 - 400 MHz and 420.2 - 430 MHz for T-GSM 380 and T-GSM 410 MS only;
- -67 dBm in the bands 460.4 – 467.6 MHz and 488.8 - 496 MHz for GSM400 MS only;
- -66 dBm in the band 791 - 821 MHz
- -79 dBm in the band 851- 866 MHz for T-GSM 810 MS only;
- -60 dBm in the band 921 - 925 MHz for R-GSM MS only;
- -67 dBm in the band 925 - 935 MHz;
- -79 dBm in the band 935 –960 MHz;
- -71 dBm in the band 1805 - 1880 MHz;
- -66 dBm in the bands 1900 - 1920 MHz, 1920 - 1980 MHz, 2010 - 2025 MHz, 2110 - 2170 MHz and 2300 – 2400 MHz.

As exceptions up to five measurements with a level up to -36 dBm are permitted in each of the bands 791 MHz to 821 MHz, 851MHz to 866 MHz, 925 MHz to 960 MHz, 1 805 MHz to 1 880 MHz, 1900 - 1920 MHz, 1920 - 1980 MHz, 2010 - 2025 MHz, and 2110 - 2170 MHz for each ARFCN used in the measurements. For GSM 400 MS, in addition, exceptions up to three measurements with a level up to -36 dBm are permitted in each of the bands 460,4 MHz to 467,6 MHz and 488,8 MHz to 496 MHz for each ARFCN used in the measurements.

When hopping, this applies to each set of measurements, grouped by the hopping frequencies as described in subclause 4.2.1.

#### 4.3.3.2 Mobile Station GSM 700, GSM 850 and PCS 1 900

i) The peak power measured in the conditions specified in subclause 4.3.1a, for a MS when assigned a channel, shall be no more than -36 dBm.

ii) The peak power measured in the conditions specified in subclause 4.3.1b for a MS, when assigned a channel, shall be no more than:

- -36 dBm in the frequency band 9 kHz to 1 GHz;
- -30 dBm in all other frequency bands 1 GHz to 12,75 GHz.

The peak power measured in a 100 kHz bandwidth for a mobile, when not assigned a channel (idle mode), shall be no more than:

- -57 dBm in the frequency bands 9 kHz to 1000 MHz;
- -53 dBm in the frequency band 1 850 MHz to 1 910 MHz;
- -47 dBm in all other frequency bands 1 GHz to 12,75 GHz.

iii) The power emitted by the MS in a 100 kHz bandwidth using the measurement techniques for modulation and wide band noise (subclause 4.2.1) shall not exceed:

- -73 dBm in the frequency band 728 MHz to 736 MHz
- -66 dBm in the frequency band 791 MHz to 806 MHz
- -79 dBm in the frequency band 736 MHz to 746 MHz
- -79 dBm in the frequency band 747 MHz to 757 MHz
- -73 dBm in the frequency band 757 MHz to 763 MHz
- -79 dBm in the frequency band 869 MHz to 894 MHz;
- -71 dBm in the frequency band 1 930 MHz to 1 990 MHz.

A maximum of five exceptions with a level up to -36 dBm are permitted in each of the band 728 MHz to 746 MHz, 747 MHz to 763 MHz, 791 MHz to 806 MHz, 869 MHz to 894 MHz and 1 930 MHz to 1 990 MHz for each ARFCN used in the measurements.

## 4.4 Radio frequency tolerance

The radio frequency tolerance for the base transceiver station and the MS is defined in 3GPP TS 45.010.

## 4.5 Output level dynamic operation

NOTE: The term "any transmit band channel" is used here to mean:

- any RF channel of 200 kHz bandwidth centred on a multiple of 200 kHz which is within the relevant transmit band.

### 4.5.1 Base Transceiver Station

The BTS shall be capable of not transmitting a burst in a time slot not used by a logical channel or where DTX applies. The output power relative to time when sending a burst is shown in annex B. The reference level 0 dB corresponds to the output power level according to subclause 4. In the case where the bursts in two (or several) consecutive time slots are actually transmitted, at the same frequency, the template of annex B shall be respected during the useful part of each burst and at the beginning and the end of the series of consecutive bursts. The output power during the guard period between every two consecutive active timeslots shall not exceed the level allowed for the useful part of the first timeslot, or the level allowed for the useful part of the second timeslot plus 3 dB, whichever is the highest. The residual output power, if a timeslot is not activated, shall be maintained at, or below, a level of -30 dBc on the frequency channel in use. All emissions related to other frequency channels shall be in accordance with the wide band noise and spurious emissions requirements.

A measurement bandwidth of at least 300 kHz is assumed.



## 4.5.2 Mobile Station

The output power can be reduced by steps of 2 dB as listed in subclause 4.1.

The transmitted power level relative to time when sending a burst is shown in annex B. The reference level 0 dB corresponds to the output power level according to subclause 4. In the case of Multislot Configurations where the bursts in two or more consecutive time slots are actually transmitted at the same frequency, the template of annex B shall be respected during the useful part of each burst and at the beginning and the end of the series of consecutive bursts. The output power during the period between the useful parts of every two consecutive active timeslots shall not exceed the level allowed for the useful part of the first timeslot, or the level allowed for the useful part of the second timeslot plus 3 dB, whichever is the highest. As an exception, in the case of a normal burst being transmitted with a high timing advance immediately after an access burst, a minimum of 8.25 symbol guard period shall be allowed for the MS power ramping and the useful part requirements for the concerned bursts are allowed to be adjusted correspondingly. The timing of the transmitted burst is specified in 3GPP TS 45.010. Between the active bursts, the residual output power shall be maintained at, or below, the level of:

- -59 dBc or -54 dBm, whichever is the greater for GSM 400, GSM 900, GSM 850 and GSM 700, except for the time slot preceding the active slot, for which the allowed level is -59 dBc or -36 dBm whichever is the greater;
- -48 dBc or -48 dBm, whichever is the greater for DCS 1 800 and PCS 1 900;

in any transmit band channel.

A measurement bandwidth of at least 300 kHz is assumed.

The transmitter, when in idle mode, will respect the conditions of subclause 4.3.3.

## 4.6 Modulation accuracy

### 4.6.1 GMSK modulation

When transmitting a burst, the phase accuracy of the signal, relative to the theoretical modulated waveforms as specified in 3GPP TS 45.004, is specified in the following way.

For any 148-bits subsequence of the 511-bits pseudo-random sequence, defined in CCITT Recommendation O.153 fascicle IV.4, the phase error trajectory on the useful part of the burst (including tail bits), shall be measured by computing the difference between the phase of the transmitted waveform and the phase of the expected one. The RMS phase error (difference between the phase error trajectory and its linear regression on the active part of the time slot) shall not be greater than  $5^\circ$  with a maximum peak deviation during the useful part of the burst less than  $20^\circ$ .

NOTE: Using the encryption (ciphering mode) is an allowed means to generate the pseudo-random sequence.

The burst timing of the modulated carrier in the active part of the time slot shall be chosen to ensure that all the modulating bits in the useful part of the burst (see 3GPP TS 45.004) influence the output phase in a time slot.

### 4.6.2 QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM modulations

The modulation accuracy is defined by the error vector between the vector representing the actual transmitted signal and the vector representing the error-free modulated signal. The magnitude of the error vector is called Error Vector Magnitude (EVM). For definition of the different measures of EVM, see annex G.

When transmitting a burst, the magnitude of the error vector of the signal, relative to the theoretical modulated waveforms as specified in 3GPP TS 45.004, is specified in the following way.

The magnitude of the error vector shall be computed by measuring the error vector between the vector representing the transmitted waveform and the vector representing the ideal one on the useful part of the burst (excluding tail symbols). When measuring the error vector a receive filter at baseband shall be used, defined as

- a raised-cosine filter with roll-off 0,25 and single side-band 6 dB bandwidth 90 kHz for normal symbol rate and for higher symbol-rate using narrow pulse-shaping filter.

- a raised-cosine filter with roll-off 0,25 and single side-band 6 dB bandwidth 108 kHz for higher symbol-rate using wide pulse-shaping filter.

The measurement filter is windowed by multiplying its impulse response by a raised cosine window given as:

$$w(t) = \begin{cases} 1, & 0 \leq |t| \leq 1.5T \\ 0.5 \left( 1 + \cos \left[ \pi (|t| - 1.5T) / 2.25T \right] \right), & 1.5T \leq |t| \leq 3.75T \\ 0, & |t| \geq 3.75T \end{cases}$$

where  $T$  is the normal symbol period.

The transmitted waveforms shall be Normal Bursts for QPSK, AQPSK, 8-PSK, 16-QAM and 32-QAM as defined in 3GPP TS 45.002, with encrypted bits generated using consecutive bits from the 32767 bit length pseudo random sequence defined in ITU-T Recommendation O.151 (1992).

## 4.6.2.1 RMS EVM

### 4.6.2.1.1 MS requirements

When transmitting a burst, the magnitude of the error vector of the signal, relative to the theoretical modulated waveforms as specified in 3GPP TS 45.004, is specified in the following way:

- The RMS EVM per burst is measured under the duration of at least 200 bursts.
- The measured RMS EVM over the useful part of any burst, excluding tail bits, shall not exceed;

**Table 4.6-1 EVM requirements for MS**

|                          | Normal symbol rate |        | Higher symbol rate |        |        |
|--------------------------|--------------------|--------|--------------------|--------|--------|
|                          | 8-PSK              | 16-QAM | QPSK               | 16-QAM | 32-QAM |
| under normal conditions  | 9,0 %              | 7,0%   | [9,0 %]            | [tbd]  | [tbd]  |
| under extreme conditions | 10,0 %             | 8,0%   | [10,0 %]           | [tbd]  | [tbd]  |

### 4.6.2.1.2 Requirements for BTS

When transmitting a burst, the magnitude of the error vector of the signal, relative to the theoretical modulated waveforms as specified in 3GPP TS 45.004, is specified in the following way:

- The RMS EVM per burst is measured under the duration of at least 200 bursts.
  - The measured RMS EVM over the useful part of any burst, excluding tail bits, shall not exceed;
- i) after any active element and excluding the effect of any passive combining equipment:

**Table 4.6-2a EVM requirements for BTS before combining**

|                         | Normal symbol rate                         |       |        |        | Higher symbol rate |        |        |
|-------------------------|--|-------|--------|--------|--------------------|--------|--------|
|                         | AQPSK                                      | 8-PSK | 16-QAM | 32-QAM | QPSK               | 16-QAM | 32-QAM |
| under normal conditions | 7,0 % <sup>1)</sup><br>5,0 % <sup>2)</sup> | 7,0 % | 5,0 %  | 5,0 %  | 7,0 %              | 4,0 %  | 4,0 %  |
| under extreme           | 8,0 % <sup>1)</sup>                        | 8,0 % | 6,0 %  | 6,0 %  | 8,0 %              | 5,0 %  | 5,0 %  |

|   |                     |  |  |  |  |  |  |
|---|---------------------|--|--|--|--|--|--|
| conditions  | 6,0 % <sup>2)</sup> |  |  |  |  |  |  |
| Note 1: Applicable for absolute SCPIR_DL values $\leq 8,0$ dB |                     |  |  |  |  |  |  |
| Note 2: Applicable for absolute SCPIR_DL values $> 8,0$ dB    |                     |  |  |  |  |  |  |

ii) after any active element and including the effect of passive combining equipment:

**Table 4.6-2b EVM requirements for BTS after combining**

|   | Normal symbol rate                         |       |        |        | Higher symbol rate |        |        |
|---|--|-------|--------|--------|--------------------|--------|--------|
|   | AQPSK                                      | 8-PSK | 16-QAM | 32-QAM | QPSK               | 16-QAM | 32-QAM |
| under normal conditions                                       | 8,0 % <sup>1)</sup><br>6,0 % <sup>2)</sup> | 8,0 % | 6,0 %  | 6,0 %  | 8,0 %              | 5,5 %  | 5,5 %  |
| under extreme conditions                                      | 9,0 % <sup>1)</sup><br>7,0 % <sup>2)</sup> | 9,0 % | 7,0 %  | 7,0 %  | 9,0 %              | 6,5 %  | 6,5 %  |
| Note 1: Applicable for absolute SCPIR_DL values $\leq 8,0$ dB |  |       |        |        |                    |        |        |
| Note 2: Applicable for absolute SCPIR_DL values $> 8,0$ dB    |  |       |        |        |                    |        |        |

The RMS EVM per burst is measured under the duration of at least 200 bursts.

#### 4.6.2.2 Origin Offset Suppression

The origin offset shall be measured over at least 200 bursts. For each burst a value shall be calculated using the formula for the origin offset suppression shown in annex G, but before taking the logarithm the average over the number of bursts shall be computed. Then this average shall be transferred to dB scale and the resulting origin offset suppression shall exceed

- 30 dB for MS and
- 35 dB for all types of BTS

under normal and extreme conditions.

#### 4.6.2.3 Peak EVM

The peak value of EVM is the peak error deviation within a burst, measured at each symbol interval, averaged over at least 200 bursts to reflect the transient nature of the peak deviation. The bursts shall have a minimum distance in time of 7 idle timeslots between them. The peak EVM values are acquired during the useful part of the burst, excluding tail bits.

- The measured peak EVM values shall be  $\leq 30$  % for MS under normal and extreme conditions.
- The measured peak EVM values shall be  $\leq 22$  % for all types of BTS under normal and extreme conditions. The effect of any passive combining equipment is excluded.

#### 4.6.2.4 95:th percentile

The 95:th percentile is the point where 95% of the individual EVM values, measured at each symbol interval, is below that point. That is, only 5% of the symbols are allowed to have an EVM exceeding the 95:th-percentile point. The EVM values are acquired during the useful part of the burst, excluding tail bits, over 200 bursts.

- The measured 95:th-percentile value shall be  $\leq 15$  % for MS under normal and extreme conditions.

- The measured 95:th-percentile value shall be  $\leq 11$  % for all types of BTS under normal and extreme conditions. The effect of any combining equipment is excluded.

## 4.7 Intermodulation attenuation

The intermodulation attenuation is the ratio of the power level of the wanted signal to the power level of an intermodulation component. It is a measure of the capability of the transmitter to inhibit the generation of signals in its non-linear elements caused by the presence of the carrier and an interfering signal reaching the transmitter via the antenna, or by non linear combining and amplification of multiple carriers.

### 4.7.1 Base transceiver station

An interfering CW signal shall be applied to the transmit antenna port, within the relevant BTS TX band at a frequency offset of  $\geq 800$  kHz, and with a power level 30 dB below the power level of the wanted signal.

The intermodulation products shall meet the requirements in subclause 4.7.2.

### 4.7.2 Intra BTS intermodulation attenuation

In a BTS intermodulation may be caused by combining several RF channels or amplification of multiple carriers to feed a single antenna, or when operating them in the close vicinity of each other.

i) The BTS shall be configured with each transmitter operating at the maximum allowed power, with a full complement of transceivers and with modulation applied.

The requirement specified for the multicarrier BTS shall apply for all supported configurations of the multicarrier BTS independently of the number of active carriers, assuming equal power distribution between all carriers, and independently of the modulation type.

ii) For the measurement in the transmit band the equipment shall be operated at equal and minimum carrier frequency spacing as well as with the carriers distributed across the declared maximum Base Station RF bandwidth as described in 3GPP TS 51.021 [18], specified for the BSS configuration under test.

iii) For the measurement in the receive band the equipment shall be operated with such a channel configuration that at least 3rd order intermodulation products fall into the receive band.

#### 4.7.2.1 GSM 400, GSM 900, DCS 1800

##### a) Requirements for BTS except multicarrier BTS

All the following requirements relate to frequency offsets from the uppermost and lowermost carriers. The peak hold value of intermodulation components over a timeslot, shall not exceed -70 dBc or -36 dBm, whichever is the less stringent, for frequency offsets between 6 MHz and the edge of the relevant Tx band measured in a 300 kHz bandwidth. 1 in 100 timeslots may fail this test by up to a level of 10 dB. For offsets between 600 kHz to 6 MHz the requirements and the measurement technique is that specified in subclause 4.2.1.

The other requirements of subclause 4.3.2 in the band 9 kHz to 12,75 GHz shall still be met.

##### b) Requirements for multicarrier BTS

In case of multicarrier BTS, the average power measured in a 600 kHz band centered at the centre frequency of intermodulation components over a timeslot shall not exceed -70 dBc or limit specified in table 4.7-1, or the requirements specified in subclause 4.2.1, whichever is less stringent, for frequency offsets between 0.6 MHz from the outermost carrier and 10 MHz outside the edge of the relevant Tx band. In addition in a 600 kHz band centered at the centre frequencies of the third order intermodulation components the power of the intermodulation components may increase up to -60 dBc or -36 dBm, whichever is less stringent. The measurement bandwidth for both the carrier and the intermodulation products is 300 kHz for offsets larger than 6 MHz, 100 kHz for offsets between 1.8 and 6 MHz and 30 kHz for offsets below 1.8 MHz.

**Table 4.7-1 Intermodulation lower limit**

| Maximum power per carrier | Measured IM power |
|---------------------------|-------------------|
| > 33 dBm                  | -36 dBm           |
| > [24] dBm and ≤ 33 dBm   | -41 dBm           |
| ≤ [24] dBm)               | [-46] dBm         |

For multicarrier BTS the intermodulation products shall never exceed -16 dBm, measured in 100 kHz bandwidth, as defined in ITU-R Recommendation SM.329, s4.3 and Annex 7.

The other requirements of subclause 4.3.2 in the band 9 kHz to 12,75 GHz shall still be met.

#### 4.7.2.2 MXM 850 and MXM 1900

The following requirements apply to MXM 850 and MXM 1900 BTSs which include ANSI-136 [TIA/EIA-136-C] 30 kHz carriers, in addition to the 200 kHz carriers specified in the present document. All the following requirements relate to frequency offsets from the uppermost and lowermost carriers. The average value of intermodulation components, for frequency offsets > 1,2 MHz to the edge of the relevant Tx band, shall not exceed:

- 60 dBc, measured in a 30 kHz bandwidth, relative to the average power of the 30 kHz channel carrier, measured in a 30 kHz bandwidth, using normal power averaging (per [TIA/EIA-136-C] part 280), and
- 60 dBc, measured in a 200 kHz bandwidth, relative to the 200 kHz carrier average power, measured in a 300 kHz bandwidth and averaged over a timeslot.

In addition to the requirements of this section, the MXM 850 BTS and MXM 1900 BTS shall also comply with the applicable limits for spurious emissions established by the FCC rules for public mobile services [FCC Part 22, Subpart H] and FCC rules for wideband PCS services [FCC Title 47 CFR Part 24] respectively.

NOTE 1: In some areas, to avoid uncoordinated system impacts, it may be beneficial to use a more stringent value. -70 dBc rms is suggested.

NOTE 2: For testing reasons, a MXM 1900 normal BTS fulfilling the PCS 1900 normal BTS requirements or a MXM 850 normal BTS fulfilling GSM 850 normal BTS requirements in this subclause may be considered fulfilling the requirements for MXM 1900 normal BTS or MXM 850 normal BTS respectively.

#### 4.7.2.3 GSM 700, GSM 850 and PCS 1900

##### a) Requirements for BTS except multicarrier BTS

All the following requirements relate to frequency offsets from the uppermost and lowermost carriers. For frequency offsets > 1,8 MHz to the edge of the relevant Tx band, measured in 300 kHz bandwidth the average value of intermodulation components over a timeslot shall not exceed -70 dBc relative to the per carrier power or -46 dBm, whichever is the less stringent. For offsets between 600 kHz and 1,8 MHz, the measurement technique and requirements are those specified in subclause 4.2.1, except for offsets between 1,2 MHz and 1,8 MHz, where the value of intermodulation components shall not exceed the requirements in subclause 4.2.1 or -70 dBc whichever less stringent.

The other requirements of subclause 4.3.2 in the band 9 kHz to 12,75 GHz shall still be met.

In regions where additional protection between uncoordinated systems is required by national regulatory agencies, the intermodulation components for frequency offsets > 1,2 MHz may be up to -60 dBc, if not violating the national regulation requirements.

## b) Requirements for multicarrier BTS

In case of multicarrier BTS, the average power measured in a 600 kHz band centered at centre frequency of intermodulation components over a timeslot shall not exceed -70 dBc or limit specified in table 4.7-1, or the requirements specified in subclause 4.2.1, whichever is less stringent, for frequency offsets between 0.6 MHz from the outermost carrier and 10 MHz outside the edge of the relevant Tx band. In addition, in a 600 kHz band centered at the centre frequencies of the third order intermodulation components the power of the intermodulation components may increase up to -60 dBc or -36 dBm, whichever is less stringent. The measurement bandwidth for both the carrier and the intermodulation products is 300 kHz for offsets larger than 6 MHz, 100 kHz for offsets between 1.8 and 6 MHz and 30 kHz for offsets below 1.8 MHz. The intermodulation products shall never exceed -16 dBm, measured in 100 kHz bandwidth, as defined in ITU-R Recommendation SM.329, sub-clause 4.3 and Annex 7.

The other requirements of subclause 4.3.2 in the band 9 kHz to 12,75 GHz shall still be met.

## c) Additional requirements for all BTS

The PCS 1900, GSM 850 and GSM 700 BTS shall also comply with the applicable limits for spurious emissions established by the FCC rules for wideband PCS services [FCC Title 47 CFR Part 24], FCC rules for public mobile services [FCC Part 22, Subpart H] and FCC rules for miscellaneous wireless communication services [FCC Part 27, Subpart C] respectively, or similar national requirements with comparable limits and rules.

### 4.7.3 Void

### 4.7.4 Mobile PBX (GSM 900 only)

In a mobile PBX intermodulation may be caused when operating transmitters in the close vicinity of each other. The intermodulation specification for mobile PBXs (GSM 900 only) shall be that stated in subclause 4.7.2.

---

## 5 Receiver characteristics

In this clause, the requirements are given in terms of power levels at the antenna connector of the receiver. Equipment with integral antenna may be taken into account by converting these power level requirements into field strength requirements, assuming a 0 dBi gain antenna. This means that the tests on equipment on integral antenna will consider fields strengths (E) related to the power levels (P) specified, by the following formula (derived from the formula  $E = P + 20\log F_{(\text{MHz})} + 77,2$ ):

|                        |   |   |                              |
|------------------------|---|---|------------------------------|
| assuming F = 405 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 129,3$ | for T-GSM 380 and T-GSM 410; |
| assuming F = 460 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 130,5$ | for GSM 400;                 |
| assuming F = 722 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 134,4$ | for GSM 710;                 |
| assuming F = 770 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 134,9$ | for GSM 750;                 |
| assuming F = 831 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 135,6$ | for T-GSM 810;               |
| assuming F = 859 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 135,9$ | for GSM 850;                 |
| assuming F = 925 MHz   | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 136,5$ | for GSM 900;                 |
| assuming F = 1 795 MHz | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 142,3$ | for DCS 1 800;               |
| assuming F = 1 920 MHz | : | $E \text{ (dB}\mu\text{V/m)} = P \text{ (dBm)} + 142,9$ | for PCS 1 900.               |

Static propagation conditions are assumed in all cases, for both wanted and unwanted signals. For subclauses 5.1 and 5.2, values given in dBm are indicative, and calculated assuming a 50 ohms impedance.

NOTE: From a system perspective the over the air antenna performance is relevant. To determine the MS over the air performance the Total Radiated Sensitivity has been defined. Its definition can be found in 3GPP TS 25.144, and a test method is specified in 3GPP TS 34.114.

## 5.1 Blocking characteristics

### 5.1.1 Definitions of applicable frequency ranges

The blocking characteristics of the receiver are specified separately for in-band and out-of-band performance as identified in the following tables.

**Table 5.1-1a Definition of in-band and out-of-band frequency range – 900 MHz band**

| Frequency band  | Frequency range (MHz) |                   |                   |                |
|-----------------|-----------------------|-------------------|-------------------|----------------|
|                 | GSM 900               |                   | E-GSM 900         | R-GSM 900      |
|                 | MS                    | BTS <sup>M)</sup> | BTS <sup>M)</sup> | BTS            |
| in-band         | 915 - 980             | 870 - 925         | 860 - 925         | 856 - 921      |
| out-of-band (a) | 0,1 - < 915           | 0,1 - < 870       | 0,1 - < 860       | 0,1 - < 856    |
| out-of-band (b) | N/A                   | N/A               | N/A               | N/A            |
| out-of band (c) | N/A                   | N/A               | N/A               | N/A            |
| out-of band (d) | > 980 - 12,750        | > 925 - 12,750    | > 925 - 12,750    | > 921 - 12,750 |

Note: Columns applicable to MSR are marked <sup>M)</sup>

**Table 5.1-1b Definition of in-band and out-of-band frequency range – 810 MHz band**

| Frequency band  | Frequency range (MHz) |                |
|-----------------|-----------------------|----------------|
|                 | T-GSM 810             |                |
|                 | MS                    | BTS            |
| in-band         | 831 to 886            | 786 to 831     |
| out-of-band (a) | 0,1 - <831            | 0,1 - <786     |
| out-of-band (b) | N/A                   | N/A            |
| out-of band (c) | N/A                   | N/A            |
| out-of band (d) | > 886 - 12,750        | > 831 - 12,750 |

**Table 5.1-1c Definition of in-band and out-of-band frequency range – 1800 MHz band**

| Frequency band  | Frequency range (MHz) |                   |
|-----------------|-----------------------|-------------------|
|                 | DCS 1 800             |                   |
|                 | MS                    | BTS <sup>M)</sup> |
| in-band         | 1 785 - 1 920         | 1 690 - 1 805     |
| out-of-band (a) | 0,1 - 1705            | 0,1 - < 1 690     |
| out-of-band (b) | > 1 705 - < 1 785     | N/A               |
| out-of band (c) | > 1 920 - 1 980       | N/A               |
| out-of band (d) | > 1 980 - 12,750      | > 1 805 - 12,750  |

Note: Columns applicable to MSR are marked <sup>M)</sup>

**Table 5.1-1d Definition of in-band and out-of-band frequency range – 1900 MHz band**

| Frequency band  | Frequency range (MHz) |  |
|-----------------|-----------------------|--|
|                 | PCS 1 900 MS          | PCS 1 900 & MXM 1900 BTS <sup>M)</sup> |
| in-band         | 1910 - 2010           | 1830 - 1930                            |
| out-of-band (a) | 0,1 - < 1830          | 0,1 - < 1830                           |
| out-of-band (b) | 1830 - < 1910         | N/A                                    |
| out-of band (c) | > 2010 - 2070         | N/A                                    |
| out-of band (d) | > 2070 - 12,750       | > 1930 - 12,750                        |

Note: Columns applicable to MSR BS are marked <sup>M)</sup>

Table 5.1-1e Definition of in-band and out-of-band frequency range – 850 MHz band

| Frequency band  | Frequency range (MHz) |                                     |
|-----------------|-----------------------|-------------------------------------|
|                 | GSM 850 MS            | GSM 850 & MXM 850 BTS <sup>M)</sup> |
| in-band         | 849 - 914             | 804 - 869                           |
| out-of-band (a) | 0,1 - < 849           | 0,1 - < 804                         |
| out-of-band (b) | N/A                   | N/A                                 |
| out-of band (c) | N/A                   | N/A                                 |
| out-of band (d) | > 914- 12,750         | > 869 - 12,750                      |

Note: Columns applicable to MSR BS are marked<sup>M)</sup>

Table 5.1-1f Definition of in-band and out-of-band frequency range – 400 MHz band

| Frequency band  | Frequency range (MHz) |                  |                  |                  |
|-----------------|-----------------------|------------------|------------------|------------------|
|                 | GSM 450               |                  | GSM 480          |                  |
|                 | MS                    | BTS              | MS               | BTS              |
| in-band         | 457,6 – 473,6         | 444,4 – 460,4    | 486,0 – 502,0    | 472,8 – 488,8    |
| out-of-band (a) | 0,1 - < 457,6         | 0,1 - < 444,4    | 0,1 - < 486,0    | 0,1 - < 472,8    |
| out-of-band (b) | N/A                   | N/A              | N/A              | N/A              |
| out-of band (c) | N/A                   | N/A              | N/A              | N/A              |
| out-of band (d) | > 473,6 - 12,750      | > 460,4 - 12,750 | > 502,0 - 12,750 | > 488,8 - 12,750 |

Table 5.1-1g Definition of in-band and out-of-band frequency range – T-GSM 400 MHz band

| Frequency band  | Frequency range (MHz) |                  |                  |                  |
|-----------------|-----------------------|------------------|------------------|------------------|
|                 | T-GSM 380             |                  | T-GSM 410        |                  |
|                 | MS                    | BTS              | MS               | BTS              |
| in-band         | 389.6 – 405.6         | 374.4 – 390.4    | 419.6 – 435.6    | 404.4 – 420.4    |
| out-of-band (a) | 0.1 - < 390.4         | 0.1 - < 374.4    | 0.1 - < 420.4    | 0.1 - < 404.4    |
| out-of-band (b) | N/A                   | N/A              | N/A              | N/A              |
| out-of band (c) | N/A                   | N/A              | N/A              | N/A              |
| out-of band (d) | > 405.6 - 12,750      | > 390.4 - 12,750 | > 435.6 - 12,750 | > 420.4 - 12,750 |

NOTE: Although the T-GSM 380 and T-GSM 410 bands are 10 MHz wide, because a transition band of at least 2 MHz is needed, a maximum allocation is limited to approximately 8 MHz within the 10 MHz band. The allocated frequencies may be selected from any part of the band consistent with this transition band.

Table 5.1-1h Definition of in-band and out-of-band frequency range – 700 MHz band

| Frequency band  | Frequency range (MHz) |                | Frequency range (MHz) |                |
|-----------------|-----------------------|----------------|-----------------------|----------------|
|                 | GSM 710               |                | GSM 750               |                |
|                 | MS                    | BTS            | MS                    | BTS            |
| in-band         | 716 - 766             | 678 - 728      | 727 - 777             | 763 – 813      |
| out-of-band (a) | 0,1 - < 716           | 0,1 - < 678    | 0,1 - < 727           | 0,1 - < 762    |
| out-of-band (b) | N/A                   | N/A            | N/A                   | N/A            |
| out-of band (c) | N/A                   | N/A            | N/A                   | N/A            |
| out-of band (d) | > 766- 12,750         | > 728 - 12,750 | > 777- 12,750         | > 813 - 12,750 |

## 5.1.2 Requirements for MS.

The reference sensitivity performance as specified in tables 1, 1a, 1c, and 1e, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver:

- for all MS, a useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK) at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2;
- a continuous, static sine wave signal at a level as in the table below and at a frequency (f) which is an integer multiple of 200 kHz.

with the following exceptions, called spurious response frequencies:



- a) GSM 900 MS, GSM 850 MS and GSM 700 MS: in band, for a maximum of six occurrences (which if grouped shall not exceed three contiguous occurrences per group);
- DCS 1 800 and PCS 1 900 MS: in band, for a maximum of twelve occurrences (which if grouped shall not exceed three contiguous occurrences per group);
- GSM 400 MS: in band, for a maximum of three occurrences;
- b) out of band, for a maximum of 24 occurrences (which if below  $f_0$  and grouped shall not exceed three contiguous occurrences per group).

where the above performance shall be met when the continuous sine wave signal (f) is set to a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm).

NOTE: For testing reasons, a MXM 1900 normal BTS fulfilling the PCS 1900 normal BTS requirements in this paragraph may be considered fulfilling the requirements for MXM 1900 normal BTS.

### 5.1.3 Requirements for BTS

The reference sensitivity performance as specified in tables 1, 1a, 1b and 1d, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver:

- for BTS excluding multicarrier BTS equipped with multicarrier receiver on all frequency bands, excluding normal BTS on the GSM 700 and GSM 850 bands, and excluding MXM 850 and MXM 1900 normal BTS, a useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK), at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2.
- for normal BTS and multicarrier BTS equipped with multicarrier receiver on the GSM 700 and GSM 850 bands and MXM 850 and MXM 1900 normal BTS, a useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK), symbol rate and specified pulse shaping filter, at frequency  $f_0$ , 1 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2.
- for multicarrier BTS equipped with multicarrier receiver on all frequency bands excluding multicarrier BTS on the GSM 700 and GSM 850 bands, a useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK), at frequency  $f_0$ , at a signal level according to table 5.1-2a.2 above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2
- a continuous, static sine wave signal at a level as in the table 5.1-2a below and at a frequency (f) which is an integer multiple of 200 kHz. For normal BTS and multicarrier BTS on the GSM 700 and GSM 850 bands, and MXM 850 and MXM 1900 normal BTS at inband frequency offsets  $\geq 3\ 000$  kHz this signal is GMSK modulated by any 148-bit sequence of the 511-bit pseudo random bit sequence, defined in CCITT Recommendation O.153 fascicle IV.4,

with the following exceptions, called spurious response frequencies:

- a) GSM 900 BTS, GSM 850 BTS, GSM 700 BTS, MXM 850 BTS,,: in band, for a maximum of six occurrences (which if grouped shall not exceed three contiguous occurrences per group);
- DCS 1 800, PCS 1 900 BTS and MXM 1900 BTS: in band, for a maximum of twelve occurrences (which if grouped shall not exceed three contiguous occurrences per group);
- GSM 400 BTS: in band, for a maximum of three occurrences;
- b) out of band, for a maximum of 24 occurrences (which if below  $f_0$  and grouped shall not exceed three contiguous occurrences per group).

where the above performance shall be met when the continuous sine wave signal (f) is set to a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm).

If more than one wanted signal frequency is considered, the maximum number of allowed occurrences for the spurious response frequencies applies separately to each wanted signal frequency.

In case of multicarrier BTS equipped with multicarrier receiver the requirements apply when up to the maximum number of supported useful, modulated input signals with equal power level, at least separated by minimum carrier frequency spacing, is simultaneously received within the declared maximum Base Station RF bandwidth.

NOTE: For testing reasons, a MXM 1900 normal BTS fulfilling the PCS 1900 normal BTS requirements in this paragraph may be considered fulfilling the requirements for MXM 1900 normal BTS.

### 5.1.4 Signal levels of blocking signal

Table 5.1-2a Blocking signal level requirements except multicarrier BTS with multicarrier receiver

| Frequency<br>band                   | GSM 400, T-GSM 810, P-, E- and R-GSM 900 |     |                     |     |                     |     | DCS 1 800 & PCS 1 900 |     |                     |     |  |
|-------------------------------------|--|-----|---------------------|-----|---------------------|-----|-----------------------|-----|---------------------|-----|--|
|                                     | other MS                                 |     | small MS            |     | BTS                 |     | MS                    |     | BTS                 |     |  |
|                                     | dB $\mu$ V<br>(emf)                      | dBm | dB $\mu$ V<br>(emf) | dBm | dB $\mu$ V<br>(emf) | dBm | dB $\mu$ V<br>(emf)   | dBm | dB $\mu$ V<br>(emf) | dBm |  |
| in-band                             |  |     |                     |     |                     |     |                       |     |                     |     |  |
| 600 kHz $\leq  f-f_0  <$<br>800 kHz | 75                                       | -38 | 70                  | -43 | 87                  | -26 | 70                    | -43 | 78                  | -35 |  |
| 800 kHz $\leq  f-f_0  <$<br>1,6 MHz | 80                                       | -33 | 70                  | -43 | 97                  | -16 | 70                    | -43 | 88                  | -25 |  |
| 1,6 MHz $\leq  f-f_0  <$<br>3 MHz   | 90                                       | -23 | 80                  | -33 | 97                  | -16 | 80                    | -33 | 88                  | -25 |  |
| 3 MHz $\leq  f-f_0 $                | 90                                       | -23 | 90                  | -23 | 100                 | -13 | 87                    | -26 | 88                  | -25 |  |
| out-of-band                         |  |     |                     |     |                     |     |                       |     |                     |     |  |
| (a) (Note 3)                        | 113                                      | 0   | 113                 | 0   | 121                 | 8   | 113                   | 0   | 113                 | 0   |  |
| (b)                                 | -  | -   | -                   | -   | -                   | -   | 101                   | -12 | -                   | -   |  |
| (c)                                 | -  | -   | -                   | -   | -                   | -   | 101                   | -12 | -                   | -   |  |
| (d) (Note 3)                        | 113                                      | 0   | 113                 | 0   | 121                 | 8   | 113                   | 0   | 113                 | 0   |  |

NOTE 1:  $f$  refers to the interfering blocker signal and  $f_0$  refers to the wanted signal being considered.  
NOTE 2: For definition of small MS, see subclause 1.1.  
NOTE 3: These requirements are applicable for general co-existence. More stringent requirements apply in other frequency bands when co-location capability is declared for any band(s), see table 5.1-5a.

Table 5.1-2a.1 Blocking signal level requirements for multicarrier BTS with multicarrier receiver

| Frequency<br>band                   | GSM 400, T-GSM 810, P- and E-GSM 900 <sup>(NOTE 2)</sup> |     |                     |       |                     |       | DCS 1 800 & PCS 1 900 |     |                     |       |                     |       |
|-------------------------------------|--|-----|---------------------|-------|---------------------|-------|-----------------------|-----|---------------------|-------|---------------------|-------|
|                                     | Wide Area  |     | Medium Range        |       | Local Area          |       | Wide Area             |     | Medium Range        |       | Local Area          |       |
|                                     | dB $\mu$ V<br>(emf)                                      | dBm | dB $\mu$ V<br>(emf) | dBm   | dB $\mu$ V<br>(emf) | dBm   | dB $\mu$ V<br>(emf)   | dBm | dB $\mu$ V<br>(emf) | dBm   | dB $\mu$ V<br>(emf) | dBm   |
| in-band                             |  |     |                     |       |                     |       |                       |     |                     |       |                     |       |
| 600 kHz $\leq  f-f_0  <$<br>800 kHz | 78   | -35 | [83]                | [-30] | [91]                | [-22] | 78                    | -35 | [83]                | [-30] | [91]                | [-22] |
| 800 kHz $\leq  f-f_0  <$<br>1,6 MHz | 97   | -16 | [98]                | [-15] | [106]               | [-7]  | 88                    | -25 | [93]                | [-20] | [101]               | [-12] |
| 1,6 MHz $\leq  f-f_0  <$<br>3 MHz   | 97   | -16 | [98]                | [-15] | [106]               | [-7]  | 88                    | -25 | [93]                | [-20] | [101]               | [-12] |
| 3 MHz $\leq  f-f_0 $                | 97   | -16 | [98]                | [-15] | [106]               | [-7]  | 88                    | -25 | [93]                | [-20] | [101]               | [-12] |
| out-of-band                         |  |     |                     |       |                     |       |                       |     |                     |       |                     |       |
| (a) (Note 4)                        | 98   | -15 | [98]                | [-15] | [98]                | [-15] | 98                    | -15 | [98]                | [-15] | [98]                | [-15] |
| (b)                                 | -  | -   | -                   | -     | -                   | -     | -                     | -   | -                   | -     | -                   | -     |
| (c)                                 | -  | -   | -                   | -     | -                   | -     | -                     | -   | -                   | -     | -                   | -     |
| (d) (Note 4)                        | 98   | -15 | [98]                | [-15] | [98]                | [-15] | 98                    | -15 | [98]                | [-15] | [98]                | [-15] |

NOTE 1:  $f$  refers to the interfering blocker signal and  $f_0$  refers to the wanted signal being considered. In case of more than one wanted signal being considered  $f_0$  refers to each wanted signal.  
NOTE 2: For inband requirements and frequency offsets  $800 \text{ kHz} \leq |f-f_0|$ , the performance according to table 5.1-2a.2 shall be met at an input level or input level for reference performance, whichever applicable, as specified in subclause 6.2.  
The relaxed values for multicarrier BTS are not applicable for GSM-R usage.  
NOTE 3: These requirements are applicable for general co-existence. More stringent requirements apply in other frequency

bands when co-location capability is declared for any band(s), see table 5.1-5b.  
 NOTE 4: For MSR Wide area BS the requirements for Wide area multicarrier BTS with multicarrier receiver apply. For MSR Medium range BS the requirements for Medium range multicarrier BTS with multicarrier receiver apply. For MSR Local area BS the requirements for Local area multicarrier BTS with multicarrier receiver apply.

**Table 5.1-2a.2 Blocking signal level requirements for multicarrier BTS with multicarrier receiver**

| Wide Area                      |             | Medium Range                       |             | Local Area                        |             |
|--------------------------------|-------------|------------------------------------|-------------|-----------------------------------|-------------|
| Blocking signal level          | Degradation | Blocking signal level              | Degradation | Blocking signal level             | Degradation |
| $\leq -25$ dBm                 | +3 dB       | $\leq [-20]$ dBm                   | +3 dB       | $\leq [-12]$ dBm                  | +3 dB       |
| $> -25$ dBm and $\leq -20$ dBm | +8 dB       | $> [-20]$ dBm and $\leq [-15]$ dBm | +8 dB       | $> [-12]$ dBm and $\leq [-7]$ dBm | +12 dB      |
| $> -20$ dBm and $\leq -16$ dBm | +12 dB      | -                                  | -           | -                                 | -           |

The following exceptions to the level of the sine wave signal (f) in the above tables 5.1-2a and 5.1-2a.1 shall apply:

**Table 5.1-2b Exceptions to Blocking requirements**

|  |                       |
|--|-----------------------|
| for E-GSM MS, in the band 905 MHz to 915 MHz   | -5 dBm                |
| for R-GSM 900 MS, in the band 880 MHz to 915 MHz   | -5 dBm                |
| for R-GSM 900 small MS, in the band 876 MHz to 915 MHz   | -7 dBm                |
| for GSM 450 small MS, in the band 450,4 MHz to 457,6 MHz   | -5 dBm                |
| for GSM 480 small MS, in the band 478,8 MHz to 486 MHz   | -5 dBm                |
| for T-GSM 810 small MS, in the band 811 MHz to 821 MHz   | -5 dBm                |
| for GSM 900 and E-GSM 900 BTS, in the band 925 MHz to 935 MHz  | 0 dBm <sup>M)</sup>   |
| for R-GSM 900 BTS at offsets $600 \text{ kHz} \leq \text{abs}(f-f_0) < 3 \text{ MHz}$ , in the band 876 MHz to 880 MHz | Level reduced by 5 dB |
| NOTE: Exceptions applicable to MSR BS are marked <sup>M)</sup>   |                       |

The following table gives the figures for the small MS for the T-GSM 380 and T-GSM 410 bands:

**Table 5.1-3 Blocking signal level requirements for T-GSM bands – MS**

| Frequency band                                   | T-GSM 380 and T-GSM 410 small MS |     |
|--|----------------------------------|-----|
|  | dB $\mu$ V (emf)                 | dBm |
| in-band  |                                  |     |
| $600 \text{ kHz} \leq  f-f_0  < 800 \text{ kHz}$ | 70                               | -43 |
| $800 \text{ kHz} \leq  f-f_0  < 1,6 \text{ MHz}$ | 70                               | -43 |
| $1,6 \text{ MHz} \leq  f-f_0  < 3 \text{ MHz}$   | 80                               | -33 |
| $3 \text{ MHz} \leq  f-f_0 $                     | 90                               | -23 |
| out-of-band                                      |                                  |     |
| (a)  | 90                               | -23 |
| (b)  | -                                | -   |
| (c)  | -                                | -   |
| (d)  | 90                               | -23 |

**Table 5.1-4 Blocking signal level requirements for GSM 700 band, GSM 850 band and PCS 1900 band including MXM BTS, but excluding multicarrier BTS with multicarrier receiver**

| Frequency<br><br>band               | GSM 850 &<br>GSM 700 MS |     | GSM 850 &<br>MXM 850 &<br>GSM 700 BTS<br>except<br>multicarrier<br>BTS |     | MXM 1900 BTS  |     |
|-------------------------------------|-------------------------|-----|--|-----|---------------|-----|
|                                     | dBµV<br>(emf)           | dBm | dBµV<br>(emf)  | dBm | dBµV<br>(emf) | dBm |
| in-band                             |                         |     |  |     |               |     |
| 600 kHz $\leq  f-f_0  <$<br>800 kHz | 70                      | -43 | 76   | -37 | 70            | -43 |
| 800 kHz $\leq  f-f_0  <$<br>1,6 MHz | 70                      | -43 | 78   | -35 | 75            | -38 |
| 1,6 MHz $\leq  f-f_0  <$ 3 MHz      | 80                      | -33 | 80   | -33 | 80            | -33 |
| 3 MHz $\leq  f-f_0 $                | 90                      | -23 | 80   | -33 | 80            | -33 |
| out-of-band                         |                         |     |  |     |               |     |
| (a) (Note 2)                        | 113                     | 0   | 121  | 8   | 113           | 0   |
| (b)                                 | -                       | -   | -  | -   | -             | -   |
| (c)                                 | -                       | -   | -  | -   | -             | -   |
| (d) (Note 2)                        | 113                     | 0   | 121  | 8   | 113           | 0   |

NOTE 1: f refers to the interfering blocker signal and fo refers to the wanted signal being considered.

NOTE 2: These requirements are applicable for general co-existence. More stringent requirements apply in other frequency bands when co-location capability is declared for any band(s), see table 5.1-5a.

**Table 5.1-4a Blocking signal level requirements for GSM 700 band, GSM 850 band and PCS 1900 band for multicarrier BTS with multicarrier receiver**

| Frequency<br>band                     | GSM 850 & & MXM 850 & GSM 700 BTS <sup>(M)</sup> |     |               |       |               |       |
|---------------------------------------|--|-----|---------------|-------|---------------|-------|
|                                       | Wide Area  |     | Medium Range  |       | Local Area    |       |
|                                       | dBµV<br>(emf)                                    | dBm | dBµV<br>(emf) | dBm   | dBµV<br>(emf) | dBm   |
| in-band                               |  |     |               |       |               |       |
| 600 kHz $\leq  f-f_0  <$<br>< 800 kHz | 76   | -37 | [81]          | [-32] | [89]          | [-24] |
| 800 kHz $\leq  f-f_0  <$<br>< 1,6 MHz | 78   | -35 | [83]          | [-30] | [91]          | [-22] |
| 1,6 MHz $\leq  f-f_0  <$<br>< 3 MHz   | 80   | -33 | [85]          | [-28] | [93]          | [-20] |
| 3 MHz $\leq  f-f_0 $                  | 80   | -33 | [85]          | [-28] | [93]          | [-20] |
| out-of-band                           |  |     |               |       |               |       |
| (a) (Note 1)                          | 98   | -15 | [98]          | [-15] | [98]          | [-15] |
| (b)                                   | -  | -   | -             | -     | -             | -     |
| (c)                                   | -  | -   | -             | -     | -             | -     |
| (d) (Note 1)                          | 98   | -15 | [98]          | [-15] | [98]          | [-15] |

NOTE 1: These requirements are applicable for general co-existence. More stringent requirements apply in other frequency bands when co-location capability is declared for any band(s), see table 5.1-5b.

NOTE 2: Requirements applicable to MSR BS are in columns marked <sup>(M)</sup>

**Table 5.1-5a Blocking requirement for BTS except multicarrier BTS with multicarrier receiver when co-located with BS in other frequency bands**

| For co-locating with BTS   | Frequency band                                      | Blocking signal level              |       |                                 |       |
|--|---|------------------------------------|-------|---------------------------------|-------|
|  |   | GSM 400, 900, 700, 850 and MXM 850 |       | DCS 1800, PCS 1900 and MXM 1900 |       |
|  |   | dB $\mu$ V (emf)                   | (dBm) | dB $\mu$ V (emf)                | (dBm) |
| GSM 900  | 921 – 960 MHz                                       | 121                                | +8    | 113                             | 0     |
| DCS 1800   | 1805 – 1880 MHz                                     | 121                                | +8    | 113                             | 0     |
| GSM 400  | 460.4 – 467.6 MHz and 488.8 – 496.0 MHz.            | 121                                | +8    | 113                             | 0     |
| PCS 1900 & MXM 1900  | 1930 – 1990 MHz                                     | 121                                | +8    | 113                             | 0     |
| GSM 850 & MXM 850  | 869 - 894 MHz                                       | 121                                | +8    | 113                             | 0     |
| GSM 700  | 728 – 746 MHz and 747 – 763 MHz <sup>(Note 2)</sup> | 121                                | +8    | 113                             | 0     |
| T-GSM 810  | 851 – 866 MHz                                       | 121                                | +8    | 113                             | 0     |
| E-UTRA/FDD Band 20   | 832 – 862 MHz                                       | 121                                | +8    | 113                             | 0     |
| E-UTRA/TDD Band 39   | 1880 – 1920 MHz <sup>(Note 1)</sup>                 | 121                                | +8    | 113                             | 0     |
| UTRA/TDD Band a)   | 1900 – 1920 MHz and 2010 – 2025 MHz                 | 121                                | +8    | 113                             | 0     |
| UTRA/FDD Band 1  | 2110 – 2170 MHz                                     | 121                                | +8    | 113                             | 0     |
| E-UTRA/TDD Band 40   | 2300 – 2400 MHz                                     | 121                                | +8    | 113                             | 0     |
| UTRA TDD Band d) or E-UTRA Band 38   | 2570-2620 MHz                                       | 121                                | +8    | 113                             | 0     |
| E-UTRA/FDD Band 7  | 2620-2690 MHz                                       | 121                                | +8    | 113                             | 0     |
| Note 1: Only if regionally required<br>Note 2: Except for a BTS operating in 747-756 MHz band, these requirements do not apply when the interfering signal falls within the uplink operating band or in the 10 MHz immediately outside the uplink operating band.<br>For a BTS operating in 747-756 MHz band the requirements do not apply when the interfering signal falls within the frequency range 768-797 MHz. |   |                                    |       |                                 |       |

If the multicarrier BTS, operating in any of the defined frequency bands, is declared as capable of co-locating with BTS in another frequency band the following requirements apply:

**Table 5.1-5b Blocking requirement for multicarrier BTS with multicarrier receiver when co-located with BS in other frequency bands**

| For co-locating with BTS:             | Frequency band   | Blocking signal level |       |                  |       |                  |       |
|---------------------------------------|--|-----------------------|-------|------------------|-------|------------------|-------|
|                                       |  | Wide Area             |       | Medium Range     |       | Local Area       |       |
|                                       |  | dB $\mu$ V (emf)      | (dBm) | dB $\mu$ V (emf) | (dBm) | dB $\mu$ V (emf) | (dBm) |
| GSM 900                               | 921 – 960 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| DCS 1800                              | 1805 – 1880 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| GSM 400                               | 460.4 – 467.6 MHz and<br>488.8 – 496.0 MHz.  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| PCS 1900 & MXM 1900                   | 1930 – 1990 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| GSM 850 & MXM 850                     | 869 - 894 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| GSM 700                               | 728 – 746 MHz and<br>747 – 763 MHz <sup>(c)</sup>  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| T-GSM 810                             | 851 – 866 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| E-UTRA/FDD Band 20                    | 832 – 862 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| E-UTRA/TDD Band 39                    | 1880 – 1920 MHz<br>(Note 1)  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| UTRA/TDD Band a)                      | 1900 – 1920 MHz and<br>2010 – 2025 MHz   | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| UTRA/FDD Band 1                       | 2110 – 2170 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| E-UTRA/TDD Band 40                    | 2300 – 2400 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| UTRA TDD Band d) or<br>E-UTRA Band 38 | 2570-2620 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| E-UTRA/FDD Band 7                     | 2620-2690 MHz  | 129                   | +16   | [121]            | [+8]  | [107]            | [-6]  |
| Note 1:                               | Only if regionally required  |                       |       |                  |       |                  |       |
| Note 2:                               | Except for a BTS operating in 747-756 MHz band, these requirements do not apply when the interfering signal falls within the uplink operating band or in the 10 MHz immediately outside the uplink operating band.<br>For a BTS operating in 747-756 MHz band band the requirements do not apply when the interfering signal falls within the frequency range 768-797 MHz. |                       |       |                  |       |                  |       |
| Note 3:                               | For MSR BS the requirements for Multicarrier BTS are applicable.   |                       |       |                  |       |                  |       |
| Note 4:                               | Multicarrier BTS values assume a 30 dB coupling loss between transmitter and receiver. If co-sited with base station of a different class, the coupling loss must be increased by the difference between the corresponding values from the table.  |                       |       |                  |       |                  |       |

## 5.1.5 Micro- and pico-BTS

The blocking characteristics of the micro-BTS receiver are specified for in-band and out-of-band performance. The out-of-band blocking remains the same as a normal BTS and the in-band blocking performance shall be no worse than in the table below.

**Table 5.1-6 Blocking requirements for micro and pico BTS– levels of interfering signal**

| Frequency band                   | GSM 900, GSM 850, GSM 850 and GSM 700 micro and pico-BTS |          |          |          | DCS 1 800, PCS 1900 and GSM 1900 micro and pico-BTS |          |          |          |
|----------------------------------|--|----------|----------|----------|---|----------|----------|----------|
|                                  | M1 (dBm)   | M2 (dBm) | M3 (dBm) | P1 (dBm) | M1 (dBm)  | M2 (dBm) | M3 (dBm) | P1 (dBm) |
| in-band                          |  |          |          |          |   |          |          |          |
| 600 kHz $\leq  f-f_0  < 800$ kHz | -31  | -26      | -21      | -34      | -40   | -35      | -30      | -41      |
| 800 kHz $\leq  f-f_0  < 1,6$ MHz | -21  | -16      | -11      | -34      | -30   | -25      | -20      | -41      |
| 1,6 MHz $\leq  f-f_0  < 3$ MHz   | -21  | -16      | -11      | -26      | -30   | -25      | -20      | -31      |
| 3 MHz $\leq  f-f_0 $             | -21  | -16      | -11      | -18      | -30   | -25      | -20      | -23      |

The blocking performance for the pico-BTS attempts, for the scenario of a close proximity uncoordinated MS, to balance the impact due to blocking by the MS with that due to wideband noise overlapping the wanted signal.

## 5.2 AM suppression characteristics

### 5.2.1 Requirements for MS

The reference sensitivity performance as specified in tables 1, 1a, 1c and 1e, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver.

- A useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK) and symbol rate, at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2.
- A single frequency ( $f$ ), in the relevant receive band,  $|f-f_0| > 6$  MHz, which is an integer multiple of 200 kHz, a GSM TDMA signal modulated in GMSK and by any 148-bit sequence of the 511-bit pseudo random bit sequence, defined in CCITT Recommendation O.153 fascicle IV.4, at a level as defined in table 5.2-6. The interferer shall have one timeslot active and the frequency shall be at least 2 channels separated from any identified spurious response. The transmitted bursts shall be synchronized to but delayed in time between 61 and 86 bit periods relative to the bursts of the wanted signal.

NOTE: When testing this requirement, a notch filter may be necessary to ensure that the co-channel performance of the receiver is not compromised.

### 5.2.2 Requirements for BTS

The reference sensitivity performance as specified in tables 1, 1a, 1b and 1d, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver.

- A useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK), at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2. In case of multicarrier BTS equipped with multicarrier receiver the requirements also apply when up to the maximum number of supported useful, modulated (GMSK or 8PSK) input signals, at least separated by minimum carrier frequency spacing, with equal power level is simultaneously received within the declared maximum Base Station RF bandwidth.
- A single frequency ( $f$ ), in the relevant receive band,  $|f-f_0| > 6$  MHz, which is an integer multiple of 200 kHz, a GSM TDMA signal modulated in GMSK and by any 148-bit sequence of the 511-bit pseudo random bit sequence, defined in CCITT Recommendation O.153 fascicle IV.4, at a level as defined in table 5.2-6. The interferer shall have one timeslot active and the frequency shall be at least 2 channels separated from any

identified spurious response. The transmitted bursts shall be synchronized to but delayed in time between 61 and 86 bit periods relative to the bursts of the wanted signal.

NOTE: When testing this requirement, a notch filter may be necessary to ensure that the co-channel performance of the receiver is not compromised.

**Table 5.2-6 Requirements for AM suppression**

|           | MS<br>(dBm) | BTS<br>(dBm) | Multicarrier BTS <sup>M)</sup> |                       |                     | Micro and pico-BTS |             |             |             |
|-----------|-------------|--------------|--------------------------------|-----------------------|---------------------|--------------------|-------------|-------------|-------------|
|           |             |              | Wide Area<br>(dBm)             | Medium Range<br>(dBm) | Local Area<br>(dBm) | M1<br>(dBm)        | M2<br>(dBm) | M3<br>(dBm) | P1<br>(dBm) |
| GSM 400   | -31         | -31          | -31                            | [-26]                 | [-18]               | **                 | **          | **          | **          |
| GSM 900   | -31         | -31          | -31                            | [-26]                 | [-18]               | -34                | -29         | -24         | -21         |
| GSM 850   | -31         | -31          | -31                            | [-26]                 | [-18]               | -34                | -29         | -24         | -21         |
| MXM 850   | -           | -33          | -33                            | -                     | -                   | -34                | -29         | -24         | -21         |
| GSM 700   | -31         | -31          | -31                            | [-26]                 | [-18]               | -34                | -29         | -24         | -21         |
| DCS 1 800 | -31         | -35          | -35                            | [-30]                 | [-22]               | -33                | -28         | -23         | -26         |
| PCS 1 900 | -31         | -35          | -35                            | [-30]                 | [-22]               | -33                | -28         | -23         | -26         |
| MXM 1900  | -           | -35          | -35                            | -                     | -                   | -33                | -28         | -23         | -26         |

NOTE 1: \*\* These BTS types are not defined.  
NOTE 2: Requirements applicable to MSR BS are in columns marked <sup>M)</sup>.

## 5.3 Intermodulation characteristics

### 5.3.1 Requirements for MS

The reference sensitivity performance as specified in tables 1, 1a, 1c and 1e, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver:

- a useful signal, modulated with the relevant supported modulation (GMSK or 8-PSK) at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2;
- a continuous, static sine wave signal at frequency  $f_1$  and a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm):
  - for small MSs on the GSM 400, GSM 900, GSM 850 and GSM 700 frequency bands, and DCS 1 800 and PCS 1 900 MS this value is relaxed to 64 dB $\mu$ V (emf) (i.e. -49 dBm);
  - for the DCS 1 800 class 3 MS this value is relaxed to 68 dB $\mu$ V (emf) (i.e. -45 dBm);
- any 148-bits subsequence of the 511-bits pseudo-random sequence, defined in CCITT Recommendation O.153 fascicle IV.4 GMSK modulating a signal at frequency  $f_2$ , and a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm):
  - for small MSs on the GSM 400, GSM 900 GSM 850 and GSM 700 frequency bands, and DCS 1 800 and PCS 1 900 MS this value is relaxed to 64 dB $\mu$ V (emf) (i.e. -49 dBm);
  - for the DCS 1 800 class 3 MS this value is relaxed to 68 dB $\mu$ V (emf) (i.e. -45 dBm);

such that  $f_0 = 2f_1 - f_2$  and  $|f_2 - f_1| = 800$  kHz.

NOTE: For subclauses 5.2 and 5.3 instead of any 148-bits subsequence of the 511-bits pseudo-random sequence, defined in CCITT Recommendation O.153 fascicle IV.4, it is also allowed to use a more random pseudo-random sequence.

### 5.3.2 Requirements for BTS

The reference sensitivity performance as specified in tables 1, 1a, 1b and 1d, adjusted by the correction factors of table 6.2-4, shall be met when the following signals are simultaneously input to the receiver:



- a useful signal, modulated with the relevant supported modulation (GMSK, 8-PSK), symbol rate and specified pulse shaping filter, at frequency  $f_0$ , 3 dB above the reference sensitivity level or input level for reference performance, whichever applicable, as specified in subclause 6.2;
- a continuous, static sine wave signal at frequency  $f_1$  and a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm):
  - for DCS 1 800, PCS 1 900 and MXM 1900 BTS this value is relaxed to 64 dB $\mu$ V (emf) (i.e. -49 dBm);
- any 148-bits subsequence of the 511-bits pseudo-random sequence, defined in CCITT Recommendation O.153 fascicle IV.4 GMSK modulating a signal at frequency  $f_2$ , and a level of 70 dB $\mu$ V (emf) (i.e. -43 dBm):
  - and DCS 1 800, PCS 1 900 and MXM 1900 BTS this value is relaxed to 64 dB $\mu$ V (emf) (i.e. -49 dBm);

such that  $f_0 = 2f_1 - f_2$  and  $|f_2 - f_1| = 800$  kHz.

For a multicarrier BTS equipped with multicarrier receiver, interfering signals shall be adjusted by 0 dB, [+2] dB or [+5] dB for the Wide Area, Medium Range and Local Area classes, respectively.

NOTE: For subclauses 5.2 and 5.3 instead of any 148-bits subsequence of the 511-bits pseudo-random sequence, defined in CCITT Recommendation O.153 fascicle IV.4, it is also allowed to use a more random pseudo-random sequence.

## 5.4 Spurious emissions

The spurious emissions for a BTS receiver, measured in the conditions specified in subclause 4.3.1, shall be no more than:

- 2 nW (-57 dBm) in the frequency band 9 kHz to 1 GHz;
- 20 nW (-47 dBm) in the frequency band 1 GHz to 12.75 GHz.

NOTE: For radiated spurious emissions for the BTS, the specifications currently only apply to the frequency band 30 MHz to 4 GHz. The specification and method of measurement outside this band are under consideration.

---

# 6 Transmitter/receiver performance

This clause aims at specifying the receiver performance, taking into account that transmitter errors must not occur, and that the transmitter shall be tested separately (see subclause 4.6). All the values given are valid if any of the features: discontinuous transmission (DTx), discontinuous reception (DRx), or slow frequency hopping (SFH) are used or not. The received power levels under multipath fading conditions given are the mean powers of the sum of the individual paths.

## a) MS conditions

In order to assess the error rate performance that is described in this clause it is required for a mobile equipment to have a "loop back" facility by which the equipment transmits back the same information that it decoded, in the same mode. This facility is specified in 3GPP TS 44.014. In this clause power levels are given also in terms of field strength, assuming a 0 dBi gain antenna, to apply for the test of MS with integral antennas.

For MS single antenna receiver is always applied.

The requirements specified in this clause shall be met by a MS in CTS mode. In particular the requirement of subclause 6.6 on frequency hopping performance shall be met by a MS performing CTS frequency hopping (as specified in 3GPP TS 45.002 subclause 6.2).

The requirements for the receiver performance in non-static channels with 16QAM, 32QAM and QPSK modulations are specified for training sequence 6 (TSC-6, as defined in 3GPP TS 45.002).

In case of VAMOS mode, one of the *VAMOS subchannels* (see 3GPP TS 45.001) shall use training sequence 5 from TSC set 1 (and is referred to as *VAMOS subchannel 1*) and the other *VAMOS subchannel* shall use training sequence 5

from TSC set 2 (and is referred to as *VAMOS subchannel 2*). The requirements for the receiver performance for speech and control channels in VAMOS mode shall be met on VAMOS subchannel 1 and VAMOS subchannel 2 when the values of SCPIR\_DL specified in tables 1s, 1t, 1u, 2aa and 2ab are used for the AQPSK signal.

## b) BTS conditions

In the case of base transceiver stations the values apply for measurement at the connection with the antenna of the BTS, including any external multicoupler.

The Rx performance requirements of BTS for modulation schemes using higher symbol rate are based on input signals using wide pulse shaping filter unless otherwise stated. When the wanted input signal is such a signal, it is called Wanted signal Wide.

When the wanted input signal for BTS is using the higher symbol rate with narrow pulse shaping filter, it is called Wanted signal Narrow.

For channels with higher symbol rate the requirements for BTS for non-static propagation conditions are specified with RX diversity with two antennas applied and without RX diversity in the cases where the BTS has only one antenna port. The RX diversity requirements are specified for no correlation or gain imbalance between the two receive branches.

The requirements for the receiver performance in non-static channels with 16QAM, 32QAM and QPSK modulations are specified for training sequence 6 (TSC-6, as defined in 3GPP TS 45.002).

For speech and control channels in VAMOS mode, the requirements for BTS are specified only for non-static propagation conditions. These requirements are with RX diversity with two antennas with no correlation or gain imbalance between the two receive branches.

Unless explicitly stated, the requirements specified for GMSK modulated channels are applicable only for channels that are not in VAMOS mode.

In case of VAMOS mode, one of the *VAMOS subchannels* shall use training sequence 5 from TSC set 1 (and is referred to as *VAMOS subchannel 1*) and the other *VAMOS subchannel* shall use training sequence 5 from TSC set 2 (and is referred to as *VAMOS subchannel 2*). For the cases where SCPIR is not equal to 0 dB, the *VAMOS subchannel 2* shall have lower power than *VAMOS subchannel 1*. The requirements for the receiver performance for speech and control channels in *VAMOS mode* in tables 1v and 2ac are applicable for both *VAMOS subchannels* (see 3GPP TS 45.001).

In case of multicarrier BTS equipped with multicarrier receiver, the stated performance at each receiver antenna port connected to a multicarrier receiver shall be achieved for any of the wanted input signals at the specified power level when receiving up to the maximum supported number of wanted signals at equal power within the declared maximum Base Station RF bandwidth at the receiver antenna connector. The stated performance shall be achieved for requirements specifying an input level of each wanted signal up to and including -40 dBm. For requirements specifying a higher input level of each wanted signal, the stated performance applies for the total peak input level to the multicarrier BTS equipped with multicarrier receiver being not greater than the peak level when receiving a single wanted carrier for the same requirement. The stated performance shall be achieved provided that the frequency spacing between each wanted signal and each other signal that is not a dedicated interferer for that wanted signal is at least 600 kHz.

NOTE: Minimum receiver performance requirements for multicarrier base station declared as multistandard radio base station are defined in Annex P.

## 6.1 Nominal Error Rates (NER)

This subclause describes the transmission requirements in terms of error rates in nominal conditions i.e. without interference. The relevant propagation conditions appear in annex C.

## 6.1.1 GMSK modulation

### 6.1.1.1 General performance requirements

Under the following propagation conditions and with an input level of 20 dB above the reference sensitivity level, the chip error rate, equivalent to the bit error rate of the non protected bits (e.g., TCH/FS class II, TCH/AHS class II or CS-4) shall have the following limits:

- static channel:  $BER \leq 10^{-4}$ ;
- EQ50 channel:  $BER \leq 3 \%$ ;

except for GSM 400, where the following limits applies:

- static channel:  $BER \leq 10^{-4}$ ;
- EQ100 channel:  $BER \leq 3 \%$ ;

and for GSM 700, where the following limits applies:

- static channel:  $BER \leq 10^{-4}$ ;
- EQ60 channel:  $BER \leq 3 \%$ .

### 6.1.1.2 Requirements for MS

The performance in 6.1.1.1 shall be maintained up to -40 dBm input level for static and multipath conditions.

This performance shall also be maintained by the MS under frequency hopping conditions, for input levels up to -40 dBm in timeslots on the C0 carrier, with equal input levels in timeslots on non C0 carriers up to 30 dB less than on the C0 carrier.

NOTE: This scenario may exist when BTS downlink power control and frequency hopping are used.

For static conditions, a bit error rate of  $10^{-3}$  shall also be maintained by the MS under frequency hopping conditions, for input levels on the C0 carrier of up to -15 dBm for GSM 400, GSM 900, GSM 850 and GSM 700, -23 dBm for DCS 1 800 and PCS 1 900, with equal input levels on non C0 carriers, up to 30 dB less than on the C0 carrier.

Furthermore, for static conditions, a bit error rate of  $10^{-3}$  shall be maintained

- up to -15 dBm for GSM 400, GSM 900, GSM 850, GSM 700 MS,
- up to -23 dBm for DCS 1 800 and PCS 1 900 MS.

### 6.1.1.3 Requirements for BTS

This performance shall be maintained up to -40 dBm input level for static and multipath conditions.

Furthermore, for static conditions, a bit error rate of  $10^{-3}$  shall be maintained up to

- -15 dBm for GSM 400, GSM 900, GSM 850, MXM 850 and GSM 700 BTS excluding multicarrier BTS equipped with multicarrier receiver,
- -18 dBm for GSM 400, GSM 700, GSM 850 and E-GSM 900 for multicarrier BTS equipped with multicarrier receiver,
- -23 dBm for DCS 1 800, PCS 1 900, MXM 1900 BTS including multicarrier BTS.

For the pico-BTS the nominal error rates need only be met in the static channel.

For pico-BTS, for static conditions, a bit error rate of  $10^{-3}$  shall be maintained with input levels up to -5 dBm for GSM 900, GSM 850 MXM 850 and GSM 700, and -14 dBm for DCS 1 800, PCS 1 900 and MXM 1900.

For a multicarrier BTS equipped with multicarrier receiver, the input level for bit error rate of  $10^{-3}$  shall be adjusted by 0 dB, [+4] dB or [+9] dB for the Wide Area, Medium Range and Local Area classes, respectively.

## 6.1.2 QPSK/8-PSK modulation

### 6.1.2.1 Requirements for MS

For static propagation conditions, the chip error rate, equivalent to the bit error rate of the uncoded data bits shall have the following limits for input levels specified below:

- MS: BER  $\leq 10^{-4}$  for levels  $\geq -82$  dBm.

This performance shall be maintained for MS, up to -40 dBm input level. The low level limit for other equipment shall be adjusted according to correction table 6.2-4 in subclause 6.2.

NOTE 1: Uncoded data bits refer to the encrypted bits of a burst, extracted by the receiver without any signal processing improvement from encoding/decoding of the signal.

This performance shall also be maintained by the MS under frequency hopping conditions, for input levels up to -40 dBm in timeslots on the C0 carrier, with equal input levels in timeslots on non C0 carriers up to 30 dB less than on the C0 carrier.

NOTE 2: This scenario may exist when BTS downlink power control and frequency hopping are used.

Furthermore, a bit error rate of  $10^{-3}$  shall be maintained by MS for input levels up to -26 dBm.

For static conditions, a bit error rate of  $10^{-3}$  shall also be maintained by the MS under frequency hopping conditions, for input levels on the C0 carrier of up to -26 dBm at QPSK or 8-PSK, with equal input levels on non C0 carriers, up to 30 dB less than on the C0 carrier.

In addition, when the frequency of the input QPSK or 8-PSK modulated signal is randomly offset, on a burst-by-burst basis, by the maximum frequency error specified in 3GPP TS 45.010 (for MS the pico-BTS frequency error in subclause 5.1 applies), the performance shall fulfil the following limits for Static channel:

- for input levels specified below up to -40 dBm:
  - GSM 400, GSM 700, GSM 850 and GSM 900 MS: BER  $\leq 10^{-4}$  for levels  $\geq -82$  dBm;
  - DCS 1800 and PCS 1900 MS: BER  $\leq 10^{-3}$  for levels  $\geq -82$  dBm.

For each burst, the sign of the frequency offset is chosen according to a 511-bit pseudo-random sequence, defined in ITU-T Recommendation O.153. This is also valid for consecutive timeslots in a multislot MS.

For other equipment the low signal level limit shall be adjusted according to correction table 6.2-4 in subclause 6.2.

### 6.1.2.2 Requirements for BTS

The RX performance requirements of BTS for modulation schemes using higher symbol rate apply to all specified pulse shaping filter used for the input signal.

For static propagation conditions, the chip error rate, equivalent to the bit error rate of the uncoded data bits shall have the following limits for input levels specified below:

- BTS including multicarrier BTS: BER  $\leq 10^{-4}$  for levels  $\geq -84$  dBm;

This performance shall be maintained for normal BTS, up to -40 dBm input level. The low level limit for other equipment shall be adjusted according to correction table 6.2-4 in subclause 6.2.

NOTE 1: Uncoded data bits refer to the encrypted bits of a burst, extracted by the receiver without any signal processing improvement from encoding/decoding of the signal.

Furthermore, a bit error rate of  $10^{-3}$  shall be maintained by BTS for input levels up to -26 dBm.

For pico-BTS, for static conditions, a bit error rate of  $10^{-3}$  shall be maintained with input levels up to -16 dBm for GSM 900; GSM 850 MXM 850 and GSM 700, and -17 dBm for DCS 1800, PCS 1900 and MXM 1900.

For micro-BTS, the maximum input level shall be adjusted according to the correction table 6.2-4 for reference sensitivity level in subclause 6.2. In addition, for GSM 850, MXM 850, GSM 700 and GSM 900 the limits shall be reduced by 5 dB.

For multicarrier BTS equipped with a multicarrier receiver, the input level for bit error rate of  $10^{-3}$  shall be adjusted by 0 dB, [+4] dB or [+9] dB for the Wide Area, Medium Range and Local Area classes, respectively.

In addition, when the frequency of the input QPSK or 8-PSK modulated signal is randomly offset, on a burst-by-burst basis, by the maximum frequency error specified in 3GPP TS 45.010 (for BTS the MS frequency error in subclause 6.1 applies), the performance shall fulfil the following limits for Static channel:

- for input levels specified below up to -40 dBm:
  - GSM 400, MXM 850, GSM 850, GSM 700 and GSM 900 normal BTS:  $BER \leq 10^{-4}$  for levels  $\geq -84$  dBm;
  - GSM 850 and GSM 900 multicarrier BTS:  $BER \leq 10^{-4}$  for levels  $\geq -84$  dBm;
  - DCS 1800, PCS 1900 and MXM 1900 normal BTS:  $BER \leq 10^{-4}$  for levels  $\geq -84$  dBm;
  - DCS 1800 and PCS 1900 multicarrier BTS:  $BER \leq 10^{-4}$  for levels  $\geq -84$  dBm;

For each burst, the sign of the frequency offset is chosen according to a 511-bit pseudo-random sequence, defined in ITU-T Recommendation O.153. This is also valid for consecutive timeslots in a multislot MS.

For other equipment and multicarrier BTS equipped with multicarrier receiver, the low signal level limit shall be adjusted according to correction table 6.2-4 in subclause 6.2.

### 6.1.3 16-QAM/32-QAM modulation

#### 6.1.3.1 Requirements for MS

For static propagation conditions, the chip error rate, equivalent to the bit error rate of the uncoded data bits shall have the following limits for input levels specified below:

Normal symbol rate

- MS:  $BER \leq 10^{-4}$  for levels  $\geq -80$  dBm.

Higher symbol rate

- MS:  $BER \leq 10^{-4}$  for levels  $\geq -77$  dBm.

This performance shall be maintained for MS, up to -40 dBm input level. The low level limit for other equipment shall be adjusted according to correction table 6.2-4 in subclause 6.2.

NOTE 1: Uncoded data bits refer to the encrypted bits of a burst, extracted by the receiver without any signal processing improvement from encoding/decoding of the signal.

This performance shall also be maintained by the MS under frequency hopping conditions, for input levels up to -40 dBm in timeslots on the C0 carrier, with equal input levels in timeslots on non C0 carriers up to 30 dB less than on the C0 carrier.

NOTE 2: This scenario may exist when BTS downlink power control and frequency hopping are used.

Furthermore, a bit error rate of  $10^{-3}$  shall be maintained by MS for input levels up to -29 dBm.

For static conditions, a bit error rate of  $10^{-3}$  shall also be maintained by the MS under frequency hopping conditions, for input levels on the C0 carrier of up to -29 dBm at 16-QAM or 32-QAM, with equal input levels on non C0 carriers, up to 30 dB less than on the C0 carrier.

For other equipment the low signal level limit shall be adjusted according to correction table 6.2-4 in subclause 6.2

### 6.1.3.2 Requirements for BTS

The RX performance requirements of BTS for modulation schemes using higher symbol rate apply to all specified, pulse shaping filter used for the input signal.

For static propagation conditions, the chip error rate, equivalent to the bit error rate of the uncoded data bits shall have the following limits for input levels specified below:

Normal symbol rate

- BTS including multicarrier BTS:  $BER \leq 10^{-4}$  for levels  $\geq -84$  dBm;

Higher symbol rate

- BTS including multicarrier BTS:  $BER \leq 10^{-4}$  for levels  $\geq -78$  dBm;

This performance shall be maintained up to -40 dBm input level. The low level limit for other equipment and multicarrier BTS equipped with multicarrier receiver shall be adjusted according to correction table 6.2-4 in subclause 6.2.

NOTE: Uncoded data bits refer to the encrypted bits of a burst, extracted by the receiver without any signal processing improvement from encoding/decoding of the signal.

Furthermore, a bit error rate of  $10^{-3}$  shall be maintained by BTS for input levels up to -29 dBm.

For pico-BTS, for static conditions, a bit error rate of  $10^{-3}$  shall be maintained with input levels up to -19 dBm for GSM 900; GSM 850 MXM 850 and GSM 700, and -20 dBm for DCS 1800, PCS 1900 and MXM 1900.

For micro-BTS, the maximum input level shall be adjusted according to the correction table 6.2-4 for reference sensitivity level in subclause 6.2. In addition, for GSM 850, MXM 850, GSM 700 and GSM 900 the limits shall be reduced by 5 dB.

For multicarrier BTS equipped with a multicarrier receiver, the input level for bit error rate of  $10^{-3}$  shall be adjusted by 0 dB, [+4] dB or [+9] dB for the Wide Area, Medium Range and Local Area classes, respectively.

## 6.2 Reference sensitivity level

### 6.2.1 Circuit-switched channels

i) The reference sensitivity performance in terms of frame erasure, bit error, or residual bit error rates (whichever appropriate) is specified in table 1, according to the type of channel and the propagation condition. . The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

NOTE: For conformance testing purposes using requirements at double speed is considered sufficient to verify MS behaviour at realistic speeds. This applies for packet channels and reference interference performance as well.

The actual sensitivity level is defined as the input level for which this performance is met. The actual sensitivity level shall be less than a specified limit, called the reference sensitivity level. The reference sensitivity level for GMSK modulated signals shall be:

**Table 6.2-1a Reference sensitivity level for MS**

|              |                                     |                   |
|--------------|-------------------------------------|-------------------|
| GSM 400 MS   | for GSM 400 small MS                | -102 dBm          |
|              | for other GSM 400 MS                | -104 dBm          |
| GSM 900 MS   | for GSM 900 small MS                | -102 dBm          |
|              | for other GSM 900 MS                | -104 dBm          |
| GSM 850 MS   | for GSM 850 small MS                | -102 dBm          |
|              | for other GSM 850 MS                | -104 dBm          |
| GSM 700 MS   | for GSM 700 small MS                | -102 dBm          |
|              | for other GSM 700 MS                | -104 dBm          |
| DCS 1 800 MS | for DCS 1 800 class 1 or class 2 MS | -100 / -102 dBm * |
|              | for DCS 1 800 class 3 MS            | -102 dBm          |
| PCS 1 900 MS | for PCS 1 900 class 1 or class 2 MS | -102 dBm          |
|              | for other PCS 1 900 MS              | -104 dBm          |

**Table 6.2-1b Reference sensitivity level for BTS**

|  |                                   |                         |
|--|-----------------------------------|-------------------------|
| GSM 400 BTS  | for normal BTS                    | -104 dBm                |
| GSM 900 BTS,<br>GSM 700 BTS,<br>GSM 850 BTS <sup>M)</sup><br>MXM 850   | for normal BTS                    | -104 dBm                |
|  | for micro BTS M1                  | -97 dBm                 |
|  | for micro BTS M2                  | -92 dBm                 |
|  | for micro BTS M3                  | -87 dBm                 |
|  | for pico BTS P1                   | -88 dBm                 |
| DCS 1 800 BTS  | for normal BTS                    | -104 dBm                |
|  | for micro BTS M1                  | -102 dBm                |
|  | for micro BTS M2                  | -97 dBm                 |
|  | for micro BTS M3                  | -92 dBm                 |
|  | for pico BTS P1                   | -95 dBm                 |
| PCS 1 900 BTS<br>MXM 1900  | for normal BTS                    | -104 dBm                |
|  | for micro BTS M1                  | -102 dBm                |
|  | for micro BTS M2                  | -97 dBm                 |
|  | for micro BTS M3                  | -92 dBm                 |
|  | for pico BTS P1                   | -95 dBm                 |
| GSM 400,<br>GSM 700,<br>T-GSM 810,<br>GSM 850,<br>GSM 900,<br>DCS 1 800,<br>PCS 1 900  | for Wide Area multicarrier BTS    | -104 dBm <sup>M)</sup>  |
|  | for Medium Range multicarrier BTS | [-98] dBm <sup>M)</sup> |
|  | for Local Area multicarrier BTS   | [-90] dBm <sup>M)</sup> |
| NOTE: The values marked by <sup>M)</sup> apply to BTS declared as Multistandard radio Base Station for respective frequency band |                                   |                         |

\* For DCS 1 800 class 1 and class 2 MS, the -102 dBm level shall apply for the reference sensitivity performance as specified in table 1 for the normal conditions defined in Annex D and -100 dBm level shall be used to determine all other MS performances.



ii) For GMSK modulated speech channels for wideband AMR, and for 8-PSK modulated speech channels for AMR, associated control channels and inband signalling, the minimum input signal level for which the reference performance shall be met is specified in table 1f and 1g respectively for normal BTS, according to the type of channel and the propagation condition. The reference performance shall be:

**Table 6.2-2 Reference performance for Wideband-AMR and 8-PSK modulated AMR channels**

|   |   |       |        |
|---|---|-------|--------|
| - | for speech channels (TCH/WFS <sub>y</sub> )   | FER : | ≤ 1%   |
| - | for speech channels (O-TCH/AHS <sub>y</sub> , O-TCH/WFS <sub>y</sub> , O-TCH/WHS <sub>y</sub> ) | FER : | ≤ 1%   |
| - | for fast associated control channels (O-FACCH/F, O-FACCH/H)                                     | FER : | ≤ 5%   |
| - | for inband signalling channels (TCH/WFS-INB, O-TCH/AHS-INB, O-TCH/WFS-INB, O-TCH/WHS-INB)       | FER : | ≤ 0,5% |
| - | for EVSIDUR and EVRFR   | FER : | ≤ 1%   |

where y denotes the codec rate. All other requirements in tables 1f and 1g shall be fulfilled at this input level for reference performance.

For other equipment than normal BTS, the levels shall be corrected by the values in table 6.2-4. Furthermore, for all classes of MS supporting 8-PSK speech channels, an additional +2 dB adjustment applies for 8-PSK modulated speech channels.

For Enhanced circuit-switched channels (ECSD), the minimum input signal level for which the reference performance shall be met is specified in table 1d and 1e, according to the modulation, type of channel and the propagation condition. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1d and 1e, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

The reference performance shall be:

**Table 6.2-3 Reference performance for Enhanced circuit-switched channels**

|   |   |   |            |
|---|---|---|------------|
| - | for data channels (E-TCH/F), transparent services (T)       | : | BER ≤ 0,1% |
| - | for data channels (E-TCH/F), non-transparent services (NT)) | : | BLER ≤ 10% |
| - | for fast associated control channel (E-FACCH)               | : | FER ≤ 5%   |

where BLER refers to radio block (data block of 20 ms length, corresponding to 1368 coded bits, to be interleaved over a number of burst according to 3GPP TS 45.003).

The levels are given for normal BTS and MS separately. For other equipment, the levels shall be corrected by the values in the table 6.2-4.

### 6.2.1a Reference performance in VAMOS mode

The reference performance in *VAMOS Mode*, shall be

- For full rate speech channels (TCH/FS, TCH/AFS<sub>x</sub>, TCH/EFS, TCH/WFS<sub>x</sub>) FER: ≤ 1 %
- For half rate speech channels (TCH/HS, TCH/AHS<sub>x</sub>) FER: ≤ 1 %
- For signalling channels (FACCH/F, FACCH/H, SACCH) FER: ≤ 5 %

For speech channels in *VAMOS Mode*, and their associated control channels, the minimum input signal level for which the reference performance shall be met is specified in table 1s, 1t, 1u and 1v according to the propagation condition and type of equipment. The levels are given for VAMOS I MS, VAMOS II MS and normal BTS separately. For other BTS

equipment, the levels in table 1v shall be corrected by the values in table 6.2-4. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1s for VAMOS I MS, 1t and 1u for VAMOS II MS and 1v for BTS, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

In addition for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 1s, 1t, 1u and 1v at the corresponding signal level in dBm.

The reference performance for the repeated associated control channel performance in *VAMOS mode* shall be according to subclause 6.2.4.

## 6.2.2 Packet-switched channels

i) For packet switched channels, the minimum input signal level for which the reference performance shall be met in case of normal symbol-rate, Basic Transmit-Time-Interval (BTTI) and no Piggy-backed ACK/NACK reporting (PAN) used, is specified in table 1a for GMSK modulated input signals, tables 1b and 1c for 8-PSK modulated input signals (convolutional coding), table 1l for input signals modulated by 8-PSK (turbo coding), tables 1k and 1l for input signals modulated by 16-QAM and 32-QAM respectively, according to the type of channel and the propagation condition. In case higher symbol rate, Basic Transmit-Time-Interval (BTTI) and no Piggy-backed ACK/NACK reporting (PAN) are used, the minimum input signal level for which the reference performance shall be met, is specified in table 1m and 1n for input signals modulated by QPSK or 16-QAM or 32-QAM respectively, according to the type of channel and the propagation condition. For Reduced Transmit-Time-Interval (RTTI) the minimum performance requirements are the same as for Basic Transmit-Time-Interval (BTTI) on a static channel. When Piggy-backed ACK/NACK reporting (PAN) is used, the minimum performance requirements of tables 1o and 1p apply. The minimum input signal level for which the reference performance shall be met for PAN is specified in table 1q and 1r. Tables 1p and 1q apply to BTS for input signals with wide pulse shaping filter in the case of higher symbol rate. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60. The levels are given for normal BTS for GMSK modulated signals. For QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals, the required levels are given for normal BTS and MS separately. The levels shall be corrected by the following values:

**Table 6.2-4 Correction factor of performance requirements for different equipments**

|  |  |            |
|--|--|------------|
| <b><u>MS, GMSK modulated signals</u></b>                           |  |            |
| -  | for DCS 1 800 class 1 or class 2 MS  | +2/+4 dB** |
| -  | for DCS 1 800 class 3 MS   | +2 dB      |
| -  | for GSM 400 small MS, GSM 900 small MS GSM 850 small MS and GSM 700 small MS | +2 dB      |
| -  | for other GSM 400, GSM 900 MS and GSM 850 MS and GSM 700 MS                  | 0 dB       |
| -  | for PCS 1900 class 1 or class 2 MS   | +2 dB      |
| -  | for other PCS 1900 MS  | 0 dB       |
| <b><u>MS, QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals</u></b> |  |            |
| -  | for GSM 400, GSM 900, GSM 850 and GSM 700 small MS                           | 0 dB       |
| -  | for other GSM 400, GSM 900, GSM 850 and GSM 700 MS                           | -2 dB      |
| -  | for DCS 1 800 and PCS 1900 class 1 or class 2 MS                             | 0 dB       |
| -  | for other DCS 1 800 and PCS 1900 MS  | -2 dB      |
| <b><u>BTS</u></b>  |  |            |
| -  | for normal BTS   | 0 dB       |
| -  | for GSM 900, GSM 850, MXM 850 and GSM 700 micro BTS M1                       | +7 dB      |
| -  | for GSM 900, GSM 850, MXM 850 and GSM 700 micro BTS M2                       | +12 dB     |
| -  | for GSM 900, GSM 850, MXM 850 and GSM 700 micro BTS M3                       | +17 dB     |
| -  | for GSM 900, GSM 850, MXM 850 and GSM 700 pico BTS P1                        | +16 dB     |
| -  | for DCS 1 800, PCS 1900 and MXM 1900 micro BTS M1                            | +2 dB      |
| -  | for DCS 1 800, PCS 1900 and MXM 1900 micro BTS M2                            | +7 dB      |
| -  | for DCS 1 800, PCS 1900 and MXM 1900 micro BTS M3                            | +12 dB     |
| -  | for DCS 1 800, PCS 1900 and MXM 1900 pico BTS P1                             | +9 dB      |
| -  | for Wide Area multicarrier BTS   | 0 dB       |
| -  | for Medium Range multicarrier BTS  | +{6} dB    |
| -  | for Local Area multicarrier BTS  | +{14} dB   |

\*\* For DCS 1 800 class 1 and class 2 MS, a correction offset of +2dB shall apply for the reference sensitivity performance as specified in table 1a for the normal conditions defined in Annex D and an offset of +4 dB shall be used to determine all other MS performances.

The reference performance shall be:

**Table 6.2-5 Reference performance for Packet channels**

|   |  |                                    |
|---|--|------------------------------------|
| - | for packet data channels (PDCH)            | BLER ≤ 10% unless otherwise stated |
| - | for uplink state flags (USF)               | BLER ≤ 1%                          |
| - | for packet random access channels (PRACH), | BLER ≤ 15%                         |
| - | for Piggy-backed ACK/NACK report (PAN)     | PAN error rate ≤ 5%                |

where BLER is the Block Error Rate, referring to all erroneously decoded data blocks including any headers, stealing flags, parity bits as well as any implicit information in the training sequence. For PDCH the BLER refers to RLC blocks, and hence there can be up to two block errors per 20ms radio block for EGPRS MCS7, MCS8, MCS9, UAS-7, UAS-8, UAS-9, UBS-7, UBS-8, DAS-8, DAS-9, DAS-10, DBS-7 and DBS-8, up to three block errors per radio block for UAS-10, UAS-11, UBS-9, UBS-10, DAS-11, DAS-12, DBS-9 and DBS-10, and up to four block errors per radio block for UBS-11, UBS-12, DBS-11 and DBS-12. The BLER refers to the initial transmission of RLC blocks, i.e. the channel decoding without incremental redundancy. For USF, the BLER only refers to the USF value.

ii) If BTTI USF mode is used when sending downlink data blocks in RTTI configuration and different modulations are used in the two data blocks sent in a 20 ms block period, the USF will be sent with mixed modulation. In this case, the performance of the mixed modulation USF shall meet the less stringent requirement of the two modulations for static propagation conditions according to:

**Table 6.2-6 USF performance in mixed modulation**

|                  |                  |            |
|------------------|------------------|------------|
| GMSK             | USF/MCS-1 to 4   | (table 1a) |
| 8PSK             | USF/MCS5 to 9    | (table 1c) |
| 16QAM (EGPRS2-A) | USF/DAS-8 to 9   | (table 1l) |
| 32QAM (EGPRS2-A) | USF/DAS-10 to 12 | (table 1l) |
| QPSK (EGPRS2-B)  | USF/DBS-5 to 6   | (table 1n) |
| 16QAM (EGPRS2-B) | USF/DBS-7 to 9   | (table 1n) |
| 32QAM (EGPRS2-B) | USF/DBS-10 to 12 | (table 1n) |

For PDCH channels, the performance requirements for some modulation and coding schemes and propagation conditions are specified at higher BLER. Where applicable, the BLER value noted in the respective performance requirement table applies.

### 6.2.3 Flexible Layer One

For Flexible Layer One (FLO), the minimum input signal level for which the reference performance shall be met is specified in table 1h, according to the type of reference measurement FLO configurations (or TFCs) and the propagation condition. The reference TFCs are specified in Annex K. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in tables 1h, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

The reference performance shall be:

**Table 6.2-7 Reference performance for FLO channels**

|   |                                |                 |
|---|--------------------------------|-----------------|
| - | for reference TFCs 2,3,4 and 5 | BLER $\leq$ 1%  |
| - | for reference TFC 1            | BLER $\leq$ 5%  |
| - | for reference TFCs 6 and 7     | BLER $\leq$ 10% |

where BLER is the Block Error Rate, referring to all erroneously decoded transport blocks (except those without CRC protection), In all the radio packets for which the TFCI, or any implicit information in the training sequence, is decoded incorrectly, all the transport blocks (with CRC protection) will be counted in error.

The reference performance levels for FLO shall be corrected according to the values in the table 6.2-4, but with an additional correction of +2 dB on 8-PSK channels for all MS.

### 6.2.4 Repeated associated control channel performance

For Repeated Downlink FACCH and Repeated SACCH (see 3GPP TS 44.006), the minimum input signal level for which the reference performance shall be met is specified in table 1i, 1s, 1t, 1u and 1v, according to the propagation condition and type of equipment. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1i, 1s, 1t, 1u and 1v, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

The reference performance for Repeated Downlink FACCH and Repeated SACCH shall be FER  $\leq$  5%. When calculating FER, a FACCH frame and its repetition or a SACCH frame and its repetition respectively, shall be counted as one frame and a frame erasure shall be counted when neither the FACCH frame nor its repetition or neither the SACCH frame nor its repetition respectively, could be successfully decoded.

The reference performance levels for Repeated Downlink FACCH and Repeated SACCH in table 1i and 1v shall be corrected according to the values in the table 6.2-4.

### 6.2.5 Enhanced MS receiver performance

i) For a MS indicating support for Downlink Advanced Receiver Performance – phase II Capability (see 3GPP TS 24.008), the minimum input signal level for which the reference performance shall be met is specified in table 1j, according to the propagation condition and type of equipment. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1j, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

The reference performance for Downlink Advanced Receiver Performance – phase II, shall be

- For speech channels (TCH/FS, TCH/AFS<sub>x</sub>, TCH/AHS<sub>x</sub>) FER: ≤ 1 %
- For packet switched channels (PDTCH) BLER: ≤ 10 %

In addition for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 1j at the corresponding signal level in dBm.

The reference sensitivity performance specified above for Downlink Advanced Receiver Performance – phase II need not be met by an MS when it is in a Downlink Dual Carrier configuration (see 3GPP TS 43.064).

ii) For a MS indicating support for TIGHTER Capability (see 3GPP TS 24.008), the minimum input signal levels for which the reference performance shall be met are specified in table 1w, according to the propagation condition. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 1w, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

The reference performance for Tightened Link Level Performance (TIGHTER) specified in table 1w, shall be

- For speech channels (TCH/FS, TCH/HS, TCH/EFS, TCH/AFS<sub>x</sub>, TCH/WFS<sub>x</sub>) FER: ≤ 1 % TCH/AHS<sub>x</sub>,
- For signalling channels (SCH, FACCH/F, FACCH/H, SDCCH) FER: ≤ 5 %
- For packet switched channels (PDTCH) BLER: ≤ 10 % unless otherwise stated

In addition for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 1w at the corresponding signal level in dBm. The reference sensitivity level in section 6.2.1 shall be applied for TIGHTER MS.

## 6.2.6 Additional performance conditions

i) The reference sensitivity performance specified above need not be met in the following cases:

- for BTS if the received level on either of the two adjacent timeslots to the wanted exceed the reference sensitivity level for circuit-switched, GMSK-modulated channels by more than 50 dB;
- for MS at the static channel, if the received level on either of the two adjacent timeslots to the wanted exceed the wanted timeslot reference sensitivity level or input level for reference performance, whichever applicable by more than 20 dB;
- for MS on a multislot configuration, if the received level on any of the timeslots belonging to the same multislot configuration as the wanted time slot, exceed the wanted time slot by more than 6 dB.

The interfering adjacent time slots shall be static with valid GSM GMSK signals in all cases. The adjacent timeslot levels, specified above apply to 8-PSK, AQPSK, QPSK, 16-QAM and 32-QAM modulated signals as well.

ii) The requirements for micro-BTS for 8-PSK, QPSK, 16-QAM and 32-QAM modulated input signals in the tables above, assume the same maximum output power in any modulation. For other maximum output power levels, the sensitivity is adjusted accordingly.

iii) The pico-BTS 900 MHz, 1800 MHz, 1900 MHz and 850 MHz and Local Area multicarrier BTS shall meet the reference sensitivity performance specified for the static channel. The only other channel that is specified is the TI5 propagation condition and this need only be tested for the no FH case. The performance requirement for GSM 900, GSM 850, GSM 700, DCS 1 800, PCS 1900, MXM 850 and MXM 1900 pico-BTS and Local Area multicarrier BTS with the TI5 propagation condition is the same as the TU50 performance requirement for GSM 900. The level of input signal at which this requirement shall be met is 3dB above the level specified above in this sub-clause (in combination with Table 1a, 1b, 1k, 1p and 1q for packet service), for GMSK modulated signals, and 3 dB for 8-PSK modulated signals. For 16-QAM, 32-QAM and QPSK the level of input signal at which the requirement shall be met is 3 dB above the level specified above in this sub-clause (in combination with Table 1k, 1m, 1p and 1q for packet service). For Local Area multicarrier BTS and speech channels in *VAMOS Mode* and their associated control channels, the level of input signal at which the requirement shall be met is [TBD] dB above the level specified in tables 6.2-1b and 6.2-4 (in combination with Table 1v). In case of higher symbol rate, tables 1p and 1q apply for input signals using wide and narrow pulse shaping filter.

## 6.3 Reference interference level

### 6.3.1 GMSK modulated speech channels and associated control channels

The reference interference performance (for cochannel,  $C/I_c$ , or adjacent channel,  $C/I_a$ ) in terms of frame erasure, bit error or residual bit error rates (whichever appropriate) is specified in table 2, according to the type of channel and the propagation condition. The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 2, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60. The actual interference ratio is defined as the interference ratio for which this performance is met. The actual interference ratio shall be less than a specified limit, called the reference interference ratio. The reference interference ratio shall be, for all types of BTS and all types of MS:

**Table 6.3-1 Reference interference ratio requirements – circuit-switched GMSK modulated channels except for Enhanced circuit-switched data, speech and control channels in VAMOS mode and Wideband AMR**

|   |                                     |            |   |        |
|---|-------------------------------------|------------|---|--------|
| - | for cochannel interference          | $C/I_c$    | = | 9 dB   |
| - | for adjacent (200 kHz) interference | $C/I_{a1}$ | = | -9 dB  |
| - | for adjacent (400 kHz) interference | $C/I_{a2}$ | = | -41 dB |
| - | for adjacent (600 kHz) interference | $C/I_{a3}$ | = | -49 dB |

### 6.3.2 Co-channel reference interference performance

#### 6.3.2.1 MS requirements

For GMSK modulated channels, packet switched and ECSD and speech channels (AMR-WB), and for 8-PSK modulated channels, packet switched and ECSD and speech channels (AMR and AMR-WB), and for 16-QAM, 32-QAM and QPSK modulated packet switched channels, the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2a, 2e and 2j (GMSK), 2c, 2e, 2k, and 2s (8-PSK), 2s, and 2u (16-QAM), 2s, and 2u (32-QAM), respectively, according to the type of channel and the propagation condition, when BTTI and no PAN are used.

For FLO, the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2m according to the type of reference TFC and the propagation condition.

For Repeated Downlink FACCH and Repeated SACCH (see 3GPP TS 44.006), the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2p according to the propagation condition.

The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 2a, 2c, 2e, 2j, 2k, 2m, 2o, 2p, 2q, 2s, 2u, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60. The reference performance is the same as defined in subclause 6.2.

For equipment supporting 8-PSK, and for MS indicating support for Downlink Advanced Receiver Performance – phase I (see 3GPP TS 24.008), the applicable requirements in table 2a, 2c, 2e, 2j, 2k, 2m, 2p, 2s, and 2u apply for both GMSK and 8-PSK modulated interfering signals.

For AQPSK modulated speech channels (TCH/HS, TCH/AFS<sub>x</sub>, TCH/AHS<sub>x</sub>, TCH/EFS, TCH/WFS<sub>x</sub> – in downlink), and their associated control channels, the applicable requirements are in tables 2aa for VAMOS I MS and 2ab for VAMOS II MS.

#### 6.3.2.2 BTS requirements

For GMSK modulated channels, packet switched and ECSD and speech channels (AMR-WB), and for 8-PSK modulated channels, packet switched and ECSD and speech channels (AMR and AMR-WB), and for 16-QAM, 32-QAM and QPSK modulated packet switched channels, the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2a, 2d and 2j (GMSK), 2b, 2d and 2k, (8-PSK), 2r and 2t (16-QAM), 2t (32-QAM), respectively, according to the type of channel and the propagation condition, when BTTI and no PAN are used.

For FLO, the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2m according to the type of reference TFC and the propagation condition.

For Repeated SACCH (see 3GPP TS 44.006), the minimum interference ratio for which the reference performance for cochannel interference ( $C/I_c$ ) shall be met is specified in table 2p according to the propagation condition.

The performance requirements for GSM 400 and GSM 700 systems are as for GSM 900 in table 2a, 2b, 2d, 2j, 2k, 2m, 2p, 2r, 2t, except that the GSM 400 MS speed is doubled from that of GSM 900, e.g. TU50 becomes TU100, and the GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60. The reference performance is the same as defined in subclause 6.2.

For equipment supporting 8-PSK, the applicable requirements in table 2a, 2b, 2d, 2j, 2k, 2m, 2p, 2r and 2t apply for both GMSK and 8-PSK modulated interfering signals.

For GMSK modulated speech channels in *VAMOS mode* (TCH/HS, TCH/AFS<sub>x</sub>, TCH/AHS<sub>x</sub>, TCH/EFS, TCH/WFS<sub>x</sub> – in uplink), and their associated control channels, the applicable requirements are in table 2ac.

### 6.3.3 Adjacent channel reference interference performance

The corresponding interference ratio for adjacent channel interference shall be:

#### 6.3.3.1 Normal symbol rate used

For equipment supporting 8-PSK, the requirements apply for both GMSK and 8-PSK modulated interfering signals.

##### 6.3.3.1.1 MS requirements

**Table 6.3-1a Reference interference ratio requirements in adjacent channels for Packet-switched (Normal symbol-rate), Enhanced circuit-switched data, Wideband AMR and 8-PSK modulated AMR channels, speech and associated control channels in *VAMOS mode*, *TIGHTER - MS***

|                                     |              | Modulation of wanted signal                   |  |  |  |                       |
|-------------------------------------|--------------|---|--|--|--|-----------------------|
|                                     |              | GMSK  | 8-PSK  | 16-QAM                                     | 32-QAM                                     | AQPSK                 |
| for adjacent (200 kHz) interference | $C/I_{a1} =$ | $C/I_c - 18$ dB, see table 2af for TIGHTER MS | See table 2l for speech, see tables 2g, 2i, 2n and 2w for other channels, see table 2af for TIGHTER MS | See table 2w, see table 2af for TIGHTER MS | See table 2w, see table 2af for TIGHTER MS | See table 2aa and 2ab |
| for adjacent (400 kHz) interference | $C/I_{a2} =$ | $C/I_c - 50$ dB                               | $C/I_c - 50$ dB  | $C/I_c - 48$ dB                            | $C/I_c - 48$ dB                            | Note 1                |
| for adjacent (600 kHz) interference | $C/I_{a3} =$ | $C/I_c - 58$ dB                               | $C/I_c - 58$ dB  |  |  |                       |

NOTE 1: The adjacent channel interference @ 400 kHz requirement ( $C/I_{a2}$ ) does not apply to channels in *VAMOS mode*.

NOTE: The  $C/I_{a3}$  figure is given for information purposes and will not require testing. It was calculated for the case of an equipment with an antenna connector, operating at output power levels of +33 dBm and below. Rejection of signals at 600 kHz is specified in subclause 5.1.

For packet switched channels, the requirements for adjacent channel performance in the tables above apply to channels with BTTI and no PAN used.

The values in tables 2g, 2i, 2l, 2n, 2w and 2af, are also valid for GSM 400 with the exception that MS speed is doubled, e.g. TU50 becomes TU100. For GSM 700 the values in tables 2g, 2i, 2l, 2n, 2v, 2w and 2af, are valid with the exception that GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

### 6.3.3.1.2 BTS requirements

**Table 6.3-1b Reference interference ratio requirements in adjacent channels for Packet-switched (Normal symbol-rate), Enhanced circuit-switched data, Wideband AMR and 8-PSK modulated AMR channels, speech and associated control channels in VAMOS mode - BTS**

| <u>Modulation of wanted signal</u>    |         | <u>GMSK</u>  | <u>8-PSK</u>   | <u>16-QAM</u> |
|---------------------------------------|---------|--|--|---------------|
| - for adjacent (200 kHz) interference | C/Ia1 = | C/Ic - 18 dB<br>See table 2ac<br>for channels in<br>VAMOS mode | See table 2l for<br>speech, see tables<br>2f, 2h, and 2n for<br>other channels | See tables 2v |
| - for adjacent (400 kHz) interference | C/Ia2 = | C/Ic - 50 dB   | C/Ic -50 dB  | C/Ic -48 dB   |
| - for adjacent (600 kHz) interference | C/Ia3 = | C/Ic - 58 dB   | C/Ic -58 dB  |               |

NOTE 1: The adjacent channel interference @ 400 kHz requirement (C/Ia2) does not apply to channels in VAMOS mode.

NOTE 2: The C/Ia3 figure is given for information purposes and will not require testing. It was calculated for the case of an equipment with an antenna connector, operating at output power levels of +33 dBm and below. Rejection of signals at 600 kHz is specified in subclause 5.1.

For packet switched channels, the requirements for adjacent channel performance in the tables above apply to channels with BTTI and no PAN used.

The values in tables 2f, 2h, 2l, 2n and 2v, are also valid for GSM 400 with the exception that MS speed is doubled, e.g. TU50 becomes TU100. For GSM 700 the values in tables 2f, 2h, 2l, 2n and 2v, are valid with the exception that GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

### 6.3.3.2 Higher symbol rate used:

The requirements for the adjacent (200 kHz) channel shall be met with an interferer at higher symbol rate, using the same modulation and pulse shaping filter as the wanted signal. For the adjacent (400 kHz) channel the requirements apply for both GMSK and 8-PSK modulated interfering signals.

#### 6.3.3.2.1 MS requirements

**Table 6.3-2a Reference interference ratio requirements in adjacent channels for Packet-switched channels (Higher symbol-rate), TIGHTER - MS**

| <u>Modulation of wanted signal</u>    |         | <u>QPSK</u>                                   | <u>16-QAM</u>                                       | <u>32-QAM</u>                                    | <u>Pulse shaping filter<br/>of wanted signal</u> |
|---------------------------------------|---------|---|---|--|--|
| - for adjacent (200 kHz) interference | C/Ia1 = | See table 2y, for<br>TIGHTER see<br>table 2af | See table 2y,<br>for TIGHTER<br>MS see table<br>2af | See table 2y, for<br>TIGHTER MS<br>see table 2af |  |
| - for adjacent (400 kHz) interference | C/Ia2 = | C/Ic -[50] dB                                 | C/Ic -[48] dB                                       | C/Ic -[48] dB                                    | Narrow downlink                                  |

The requirements for adjacent channel performance in the tables above apply to channels with BTTI and no PAN used.

The values in table 2y and 2af are also valid for GSM 400 with the exception that MS speed is doubled, e.g. TU50 becomes TU100. For GSM 700 the values in table 2y and 2af are valid with the exception that GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

#### 6.3.3.2.2 BTS requirements

In the uplink, different tables apply for the adjacent (200 kHz) channel requirements depending on what pulse shaping filter bandwidth is used.

Table 2x applies to the case of narrow pulse shaping filter.

Table 2z applies to the case of wide pulse shaping filter.



**Table 6.3-2b Reference interference ratio requirements in adjacent channels for Packet-switched channels (Higher symbol-rate), - BTS**

| <u>Modulation of wanted signal</u>    | <u>QPSK</u>                            | <u>16-QAM</u>          | <u>32-QAM</u>          | <u>Pulse shaping filter of wanted signal</u> |
|---------------------------------------|--|------------------------|------------------------|--|
| - for adjacent (200 kHz) interference | $C/I_{a1} =$<br>See tables<br>2x<br>2z | See tables<br>2x<br>2z | See tables<br>2x<br>2z | Narrow<br>Wide                               |
| - for adjacent (400 kHz) interference | $C/I_{a2} =$<br>C/lc -44.5 dB          | C/lc -43 dB            | C/lc -42.5 dB          | Wide uplink                                  |

The requirements for adjacent channel performance in the tables above apply to channels with BTTI and no PAN used.

The values in tables 2x and 2z, are also valid for GSM 400 with the exception that MS speed is doubled, e.g. TU50 becomes TU100. For GSM 700 the values in tables 2x and 2z, are valid with the exception that GSM 700 MS speed is increased by a factor of 1.2, e.g. TU50 becomes TU60.

### 6.3.4 Reference interference performance – signal levels

These specifications apply for a wanted signal input level of 20 dB above the reference sensitivity level listed in table 6.2-1a and table 6.2-1b.

For packet switched and AMR-WB speech, GMSK modulated channels the wanted input signal level shall be: -93 dBm + Ir + Corr, where:

Ir = the interference ratio according to table 2a and table 2j for the packet switched and AMR-WB speech channels respectively

Corr = the correction factor for reference performance according to table 6.2-4.

For 8-PSK modulated speech channels (AMR and AMR-WB), ECSD channels and 8-PSK modulated packet-switched channels, the wanted input signal level shall be: -93 dBm + Ir + Corr, where:

Ir = the interference ratio according to tables 2b, 2c and 2s for packet switched channels, tables 2d and 2e for ECSD and table 2k for speech (AMR and AMR-WB) and associated control channels.

Corr = the correction factor for reference performance according to table 6.2-4.

For QPSK, 16-QAM and 32-QAM modulated packet-switched channels, the wanted input signal level shall be: -93 dBm + Ir + Corr, where:

Ir = the interference ratio according to tables 2t and 2u for QPSK modulated packet switched channels, tables 2r, 2s, 2t and 2u for 16-QAM modulated packet switched and tables 2s, 2t and 2u for 32-QAM modulated packet switched channels.

Corr = the correction factor for reference performance according to table 6.2-4.

For AQPSK modulated speech channels and control channels in downlink, the wanted input signal level shall be: -93 dBm + Ir, where:

Ir = the interference ratio according to tables 2aa for VAMOS I MS and 2ab for VAMOS II MS for VDTS-1, VDTS-2 and VDTS-3 (see subclause Q.1) for speech and associated control channels in VAMOS mode in downlink.

For GMSK modulated speech channels and control channels in VAMOS mode in uplink, the input signal level of VAMOS subchannel 2 shall be: -93 dBm + Ir + Corr, where:

Ir = the interference ratio according to tables 2ac for VUTS-1, VUTS-3 and VUTS-4 (see subclause Q.2).

Corr = the correction factor for reference performance according to table 6.2-4.

For FLO, the wanted input signal level shall be: -93 dBm + Ir + Corr, where:

Ir = the interference ratio according to table 2m.

Corr = the correction factor for reference performance according to table 6.2-4.

For Repeated Downlink FACCH and Repeated SACCH (see 3GPP TS 44.006), the wanted input signal level shall be: -93 dBm + Ir + Corr, where:

$I_r$  = the interference ratio according to table 2p.

Corr = the correction factor for reference performance according to table 6.2-4.

For all channels specified in table 2ad for TIGHTER MS, the wanted signal level shall be:  $-93 \text{ dBm} + I_r + \text{Corr}$ , where:

$I_r$  = the interference ratio according to table 2ad

Corr = the correction factor for reference performance according to table 6.2-4.

For adjacent channel performance for packet-switched channels except for the adjacent channel (200 kHz) requirements of EGPRS2 specific channels, the wanted input signal level shall be set to the value calculated using the formulas above for cochannel performance.

For the adjacent channel (200 kHz) requirements of EGPRS2-A packet-switched channels, UAS-7 to 11 and DAS-5 to 12, and EGPRS2-B packet-switched channels, UBS-5 to 12 and DBS-5 to 12, the wanted input signal level shall be:  $-75 \text{ dBm} + I_{ar} + \text{Corr}$ , where:

$I_{ar}$  = the adjacent channel (200 kHz) interference ratio according to table 2v for UAS-7 to 11, table 2w for DAS-5 to 12, table 2y for DBS-5 to 12 and table 2x and 2z for UBS-5 to 12 respectively.

Corr = the correction factor for reference performance according to table 6.2-4.

For the adjacent channel (200 kHz) requirements of speech and control channels in VAMOS mode in downlink, the wanted input signal level of the AQPSK modulated signal shall be:  $-75 \text{ dBm} + I_{ar}$ , where:

$I_{ar}$  = the adjacent channel (200 kHz) interference ratio according to tables 2aa and 2ab for VAMOS I MS and VAMOS II MS respectively for VDTS-4 (see subclause Q.1).

For the adjacent channel (200 kHz) requirements of speech and control channels in VAMOS mode in uplink, the input signal level of the GMSK modulated VAMOS subchannel 2 signal shall be:  $-75 \text{ dBm} + I_{ar} + \text{Corr}$ , where:

$I_{ar}$  = the adjacent channel (200 kHz) interference ratio according to table 2ac for VUTS-2 (see subclause Q.2).

Corr = the correction factor for reference performance according to table 6.2-4.

For all adjacent channel (200 kHz) requirements specified in table 2af for TIGHTER MS, the wanted signal level shall be:  $-75 \text{ dBm} + I_{ar} + \text{Corr}$ , where:

$I_{ar}$  = the adjacent channel (200 kHz) interference ratio according to table 2af

Corr = the correction factor for reference performance according to table 6.2-4.

### 6.3.5 Additional reference interference performance requirements and conditions

If not stated differently, all reference interference specifications in section 6.3 apply only for a random, continuous, GMSK modulated interfering signal.

In case of frequency hopping, the interference and the wanted signals shall have the same frequency hopping sequence. In any case the wanted and interfering signals shall be subject to the same propagation profiles (see annex C), independent on the two channels.

For a GSM 400 MS, a GSM 900 MS, a GSM 850 MS, a GSM 700 MS, a DCS 1 800 MS and a PCS 1 900 MS the reference interference performance according to table 2 and 2j for co-channel interference ( $C/I_c$ ) shall be maintained for RA500/250/130 propagation conditions if the time of arrival of the wanted signal is periodically alternated by steps of  $8 \mu\text{s}$  in either direction. The period shall be 32 seconds (16 seconds with the early and 16 seconds with the late time of arrival alternately).

For pico-BTS and Local Area multicarrier BTS, propagation conditions other than static and T15 are not specified and only the no FH case need be tested. The performance requirement for GSM 900, GSM 850, GSM 700, DCS 1 800, PCS 1900, MXM 850 and MXM 1900 pico-BTS and Local Area multicarrier BTS with T15 propagation condition is the same as the TU50 no FH (900MHz) performance requirement. The interference ratio at which this requirement shall be met is, for GMSK modulated wanted signals, 4dB above the interference ratio specified above in this sub-clause (in combination with Table 2a for packet service). For 8-PSK modulated wanted signals, the interference ratio for this requirement is 4 dB above the interference ratio specified above in this sub-clause (in combination with Table 2b and 2d for packet service). For 16-QAM, 32-QAM and QPSK modulated wanted signals, the interference ratio for this requirement is 4 dB above the interference ratio specified above in this sub-clause (in combination with Table 2r and 2t

(16-QAM), and Table 2t (32-QAM), and Table 2t and 2u (QPSK) for packet service). For Local Area multicarrier BTS and speech channels in *VAMOS Mode* and their associated control channels, the interference ratio for this requirement is [TBD] dB above the interference ratio specified above in this sub-clause 6.3 (in combination with Table 2ac). For adjacent channel interference propagation conditions other than TU50 need not be tested. There is an exception in the case of the pico-BTS and Local Area multicarrier BTS in that the specified propagation condition is TI5 instead of TU50; the respective test for pico-BTS and Local Area multicarrier BTS is described in the paragraph following table 6.3-3 below.

If, in order to ease measurement, a TU50 (no FH) faded wanted signal, and a static adjacent channel interferer are used, the reference interference performance shall be:

**Table 6.3-3 Reference interference ratio measurements for GMSK-modulated speech channels - simplified**

|                  | GSM 850 & GSM 900 &<br>GSM 700 | DCS 1 800 & PCS 1 900 |
|------------------|--------------------------------|-----------------------|
| TCH/FS (FER):    | 10,2 $\alpha$ %                | 5,1 $\alpha$ %        |
| Class Ib (RBER): | 0,72/ $\alpha$ %               | 0,45/ $\alpha$ %      |
| Class II (RBER): | 8,8 %                          | 8,9 %                 |
| FACCH (FER):     | 17,1 %                         | 6,1 %                 |

For pico-BTS and Local Area multicarrier BTS, adjacent channel and cochannel interference propagation conditions other than TI5 need not be tested. If, in order to ease adjacent channel measurements, a TI5 (no FH) faded wanted signal, and a static adjacent channel interferer are used, the interference performance shall be the same as that specified above for a TU50 no FH channel (900MHz). The interference ratio at which this performance shall be met is 4dB above the reference interference ratio specified above in this sub-clause.

In addition, MS indicating support for Downlink Advanced Receiver Performance – phase I (see 3GPP TS 24.008) shall fulfil the requirements in table 2o for wanted signals on GMSK modulated channels under TU50 no FH propagation conditions and GMSK modulated interferers for the test scenarios defined in annex L, unless when the MS is assigned a Downlink Dual Carrier configuration (see 3GPP TS 44.060) comprising a total of more than 8 timeslots, in which case, the MS shall only fulfil the requirements at least on all the timeslots that are assigned on the carrier 1 (see 3GPP TS 44.060). The reference performance shall be:

**Table 6.3-4 Reference performance for DARP – phase I**

|  |       |        |
|--|-------|--------|
| For speech channels (TCH/FS, TCH/AFS <sub>x</sub> , TCH/AHS <sub>x</sub> ) | FER:  | ≤ 1 %  |
| For signalling channels (FACCH/F, SDCCH)                                   | FER:  | ≤ 5 %  |
| For packet switched channels (PDTCH)                                       | BLER: | ≤ 10 % |

The values in table 2o are given as the C/I1 ratio, where C is the power level of the wanted signal and I1 is the power level of the dominant co-channel interferer (Co-channel 1, see annex L).

In addition for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 2o at the corresponding C/I1.

A MS indicating support for Downlink Advanced Receiver Performance – phase II Capability (see 3GPP TS 24.008) shall fulfil the requirements in table 2q for the test scenarios defined in annex N. The reference performance shall be:

**Table 6.3-5 Reference performance for DARP – phase II**

|  |       |        |
|--|-------|--------|
| For speech channels (TCH/FS, TCH/AFS <sub>x</sub> , TCH/AHS <sub>x</sub> ) | FER:  | ≤ 1 %  |
| For packet switched channels (PDTCH)                                       | BLER: | ≤ 10 % |

The values in table 2q are given as the C/I1 ratio, where C is the power level of the wanted signal and I1 is the power level of the dominant co-channel interferer (Co-channel 1, see annex N).

In addition for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 2q at the corresponding C/I1.

The reference interference performance specified above for Downlink Advanced Receiver Performance – phase II need not be met by an MS when it is in a Downlink Dual Carrier configuration (see 3GPP TS 43.064).

A MS indicating support for TIGHTER Capability (see 3GPP TS 24.008) shall also indicate support for DARP – phase I (see 3GPP TS 24.008), and shall fulfil the requirements in table 2ad for cochannel interference (C/Ic), table 2af for adjacent channel (200 kHz) interference (C/Ia1), and the additional requirements in table 2ae for wanted signals on GMSK modulated channels for the test scenarios defined in annex L. The reference performance shall be:

**Table 6.3-6 Reference performance for TIGHTER**

|  |       |                                      |
|--|-------|--------------------------------------|
| For speech channels (TCH/FS, TCH/HS, TCH/EFS, TCH/AFSx, TCH/AHSx, TCH/WFSx ) | FER:  | $\leq 1 \%$                          |
| For signalling channels (FACCH/F, FACCH/H, SDCCH)                            | FER:  | $\leq 5 \%$                          |
| For packet switched channels (PDTCH)   | BLER: | $\leq 10 \%$ unless otherwise stated |

For equipment supporting 8-PSK, and for MS indicating support for Downlink Advanced Receiver Performance – phase I (see 3GPP TS 24.008), the applicable TIGHTER requirements in table 2ad for TCH/WFSx and PDTCH, and table 2af for TCH/WFSx, PDTCH/CSx, PDTCH/MCSx and PDTCH/DASx apply for both GMSK and 8-PSK modulated interfering signals.

The values in table 2ae are given as the C/I1 ratio, where C is the power level of the wanted signal and I1 is the power level of the dominant co-channel interferer (Co-channel 1, see annex L).

In addition to table 6.3-6, for speech channels the residual class Ib BER and residual class II BER performance shall not exceed the specified values in table 2ad, 2ae and 2af at the corresponding interference ratio C/Ic, C/I1, and C/Ia1, respectively.

## 6.4 Erroneous frame indication performance

- On a speech TCH (TCH/FS, TCH/EFS, TCH/HS, TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS) or a SDCCH with a random RF input, of the frames believed to be FACCH, O-FACCH, SACCH, or SDCCH frames, the overall reception performance shall be such that no more than 0,002 % of the frames are assessed to be error free.
- On a speech TCH (TCH/FS, TCH/EFS, TCH/HS, TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS) with a random RF input, the overall reception performance shall be such that, on average, less than one undetected bad speech frame (false bad frame indication BFI) shall be measured in one minute.
- On a speech TCH (TCH/FS, TCH/EFS, TCH/HS, TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS), when DTX is activated with frequency hopping through C0 where bursts comprising SID frames, SACCH frames and Dummy bursts are received at a level 20 dB above the reference sensitivity level and with no transmission at the other bursts of the TCH, the overall reception performance shall be such that, on average less than one undetected bad speech frame (false bad frame indication BFI) shall be measured in one minute for MS. This performance shall also be met in networks with one of the configurations described in 3GPP TS 45.002 - annex A, excepted combinations #1 and #6 of table A.2.5.1 for which there is no performance requirement.
- On a speech TCH (TCH/FS, TCH/EFS, TCH/HS, TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS), when DTX is activated with SID frames and SACCH frames received 20 dB above the reference sensitivity level and with no transmission at the other bursts of the TCH, the overall reception shall be such that, on average, less than one undetected bad speech frame (false bad frame indication BFI) shall be measured in one minute for BTS.
- For a BTS on a RACH or PRACH with a random RF input, the overall reception performance shall be such that less than 0,02 % of frames are assessed to be error free.
- For a BTS on a PRACH with a random RF input, the overall reception performance shall be such that less than 0,02 % of frames are assessed to be error free.
- For an MS assigned a USF on a PDCH with a random RF input or a valid PDCH signal with a random USF not equal to the assigned USF, the overall reception shall be such that the MS shall detect the assigned USF in less

than 1% of the radio blocks for GMSK modulated signals, and 1 % for 8-PSK modulated signals, and 1 % for QPSK, 16-QAM and 32-QAM modulated signals. This requirement shall be met for all input levels up to -40 dBm for GMSK, QPSK, 8PSK, 16QAM and 32QAM modulated signal.

- h) The FER on an SACCH associated to an adaptive speech traffic channel (TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS) received at 3 dB below the reference co-channel interference level shall be less than [40%] tested under TU 3 / TU 1.5 propagation conditions.
- i) On a speech TCH (TCH/AFS, TCH/AHS, TCH/WFS, O-TCH/AHS, O-TCH/WFS or O-TCH/WHS), a RATSCCH message, respectively a RATSCCH marker, shall be detected if more than 72% of the bits of the RATSCCH identification field (defined in 3GPP TS 45.003) are matched by the corresponding gross bits of the received frame.

## 6.5 Random access and paging performance at high input levels

### a) MS requirements

Under static propagation conditions with a received input level from 20 dB above the reference sensitivity level

- up to -15 dBm for GSM 400, GSM 700, GSM 850 and GSM900 and
- up to -23 dBm for DCS1800 and PCS 1 900,

the MS FER shall be less than 0,1% for PCH.

### b) BTS requirements

Under static propagation conditions with a received input level from 20 dB above the reference sensitivity level

- up to -15 dBm for GSM 400, GSM 700, GSM 850 and GSM900 normal BTS and multicarrier BTS excluding multicarrier BTS equipped with multicarrier receiver,
- up to -16 dBm for GSM400, GSM 850 and GSM900 multicarrier BTS equipped with multicarrier receiver and
- up to -23 dBm for DCS1800 and PCS 1 900, normal BTS and multicarrier BTS

and a single MS sending an access burst, the BTS FER shall be less than 0,5% for RACH.

For multicarrier BTS equipped with multicarrier receiver, input levels shall be adjusted by 0 dB, [+4] dB or [+9] dB for the Wide Area, Medium Range and Local Area classes, respectively.

## 6.6 Frequency hopping performance under interference conditions

Under the following conditions:

- a useful signal, cyclic frequency hopping over four carriers under static conditions, with equal input levels 20 dB above reference sensitivity level;
- a random, continuous, GMSK-modulated interfering signal on only one of the carriers at a level 10 dB higher than the useful signal.

The FER for TCH/FS shall be less than 5%.

## 6.7 Incremental Redundancy Performance for EGPRS and EGPRS2 MS

Support for Incremental Redundancy reception is mandatory for all EGPRS capable MSs. In Incremental Redundancy RLC mode soft information from multiple, differently punctured, versions of an RLC data block may be used when decoding the RLC data block. This significantly increases the link performance.

An EGPRS capable MS shall under the conditions stated in the below table 6.7-1 achieve a long-term throughput of 20 kbps per time slot (see note), measured between LLC and RLC/MAC layer.

An EGPRS2 capable MS shall under the conditions stated in the below table 6.7-14 achieve a long-term throughput of 33 kbps per time slot, measured between LLC and RLC/MAC layer

**Table 6.7-1 Incremental Redundancy performance**

|                                 | EGPRS supported                        | EGPRS2 supported                       |
|---------------------------------|--|--|
| Required throughput             | 20,0 kbps per timeslot                 | 33 kbps per timeslot                   |
| Propagation conditions          | Static, input level -97,0 dBm          | Static, input level -94 dBm            |
| Modulation and Coding Scheme    | MCS-9                                  | DAS-12                                 |
| Acknowledgements polling period | 32 RLC data blocks                     | 32 RLC data blocks                     |
| Roundtrip time                  | 120 ms                                 | 120 ms                                 |
| Number of timeslots             | Maximum capability of the MS           | Maximum capability of the MS           |
| Transmit window size            | Maximum for the MS timeslot capability | Maximum for the MS timeslot capability |

NOTE: The requirement for EGPRS corresponds to an equivalent block error rate of approximately 0.66 using the prescribed MCS-9.

Table 1: Reference sensitivity performance for GMSK modulated channels

| GSM 850 and GSM 900              |                         |                    |                         |                         |                         |  |
|----------------------------------|-------------------------|--------------------|-------------------------|-------------------------|-------------------------|--|
| Type of channel                  | Propagation conditions  |                    |                         |                         |                         |  |
|                                  | static                  | TU50<br>(no FH)    | TU50<br>(ideal FH)      | RA250<br>(no FH)        | HT100<br>(no FH)        |  |
| FACCH/H (FER)                    | 0,1 %                   | 6,9 %              | 6,9 %                   | 5,7 %                   | 10,0 %                  |  |
| FACCH/F (FER)                    | 0,1 %                   | 8,0 %              | 3,8 %                   | 3,4 %                   | 6,3 %                   |  |
| SDCCH (FER)                      | 0,1 %                   | 13 %               | 8 %                     | 8 %                     | 12 %                    |  |
| RACH (FER)                       | 0,5 %                   | 13 %               | 13 %                    | 12 %                    | 13 %                    |  |
| SCH (FER)                        | 1 %                     | 16 %               | 16 %                    | 15 %                    | 16 %                    |  |
| TCH/F14,4 (BER)                  | 10 <sup>-5</sup>        | 2,5 %              | 2 %                     | 2 %                     | 5 %                     |  |
| TCH/F9,6 & H4,8 (BER)            | 10 <sup>-5</sup>        | 0,5 %              | 0,4 %                   | 0,1 %                   | 0,7 %                   |  |
| TCH/F4,8 (BER)                   | -                       | 10 <sup>-4</sup>   | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |  |
| TCH/F2,4 (BER)                   | -                       | 2 10 <sup>-4</sup> | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        |  |
| TCH/H2,4 (BER)                   | -                       | 10 <sup>-4</sup>   | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |  |
| TCH/FS (FER)                     | 0,1 $\alpha$ %          | 6 $\alpha$ %       | 3 $\alpha$ %            | 2 $\alpha$ %            | 7 $\alpha$ %            |  |
| class Ib (RBER)                  | 0,4/ $\alpha$ %         | 0,4/ $\alpha$ %    | 0,3/ $\alpha$ %         | 0,2/ $\alpha$ %         | 0,5/ $\alpha$ %         |  |
| class II (RBER)                  | 2 %                     | 8 %                | 8 %                     | 7 %                     | 9 %                     |  |
| TCH/EFS (FER)                    | < 0,1 %                 | 8 %                | 3 %                     | 3 %                     | 7 %                     |  |
| (RBER Ib)                        | < 0,1 %                 | 0,21 %             | 0,11 %                  | 0,10 %                  | 0,20 %                  |  |
| (RBER II)                        | 2,0 %                   | 7 %                | 8 %                     | 7 %                     | 9 %                     |  |
| TCH/HS (FER)                     | 0,025 %                 | 4,1 %              | 4,1 %                   | 4,1 %                   | 4,5 %                   |  |
| class Ib (RBER, BFI=0)           | 0,001 %                 | 0,36 %             | 0,36 %                  | 0,28 %                  | 0,56 %                  |  |
| class II (RBER, BFI=0)           | 0,72 %                  | 6,9 %              | 6,9 %                   | 6,8 %                   | 7,6 %                   |  |
| (UFR)                            | 0,048 %                 | 5,6 %              | 5,6 %                   | 5,0 %                   | 7,5 %                   |  |
| class Ib (RBER, (BFI or UFI)=0)  | 0,001 %                 | 0,24 %             | 0,24 %                  | 0,21 %                  | 0,32 %                  |  |
| (EVSIDR)                         | 0,06 %                  | 6,8 %              | 6,8 %                   | 6,0 %                   | 9,2 %                   |  |
| (RBER, SID=2 and (BFI or UFI)=0) | 0,001 %                 | 0,01 %             | 0,01 %                  | 0,01 %                  | 0,02 %                  |  |
| (ESIDR)                          | 0,01 %                  | 3,0 %              | 3,0 %                   | 3,2 %                   | 3,4 %                   |  |
| (RBER, SID=1 or SID=2)           | 0,003 %                 | 0,3 %              | 0,3 %                   | 0,21 %                  | 0,42 %                  |  |
| TCH/AFS12.2 (FER)                | -                       | 4,9 %              | 2,4 %                   | 1,4 %                   | 4,5 %                   |  |
| Class Ib (RBER)                  | < 0,001 %               | 1,5 %              | 1,5 %                   | 1,2 %                   | 2,1 %                   |  |
| TCH/AFS10.2 (FER)                | -                       | 2,1 %              | 0,85 %                  | 0,45 %                  | 1,6 %                   |  |
| Class Ib (RBER)                  | < 0,001 %               | 0,23 %             | 0,15 %                  | 0,092 %                 | 0,26 %                  |  |
| TCH/AFS7.95 (FER)                | -                       | 0,36 %             | 0,045 %                 | 0,024 %                 | 0,096 %                 |  |
| Class Ib (RBER)                  | -                       | 0,11 %             | 0,032 %                 | 0,02 %                  | 0,06 %                  |  |
| TCH/AFS7.4 (FER)                 | -                       | 0,41 %             | 0,069 %                 | 0,028 %                 | 0,13 %                  |  |
| Class Ib (RBER)                  | -                       | 0,054 %            | 0,016 %                 | 0,009 %                 | 0,033 %                 |  |
| TCH/AFS6.7 (FER)                 | -                       | 0,16 %             | 0,017 %                 | < 0,01 % <sup>(*)</sup> | 0,026 %                 |  |
| Class Ib (RBER)                  | -                       | 0,082 %            | 0,022 %                 | 0,013 %                 | 0,044 %                 |  |
| TCH/AFS5.9 (FER)                 | -                       | 0,094 %            | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | 0,011 %                 |  |
| Class Ib (RBER)                  | -                       | 0,014 %            | 0,001 %                 | 0,001 %                 | 0,003 %                 |  |
| TCH/AFS5.15 (FER)                | -                       | 0,07 %             | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> |  |
| Class Ib (RBER)                  | -                       | 0,014 %            | < 0,001 %               | < 0,001 %               | 0,002 %                 |  |
| TCH/AFS4.75 (FER)                | -                       | 0,029 %            | < 0,01 % <sup>(*)</sup> | -                       | < 0,01 % <sup>(*)</sup> |  |
| Class Ib (RBER)                  | -                       | 0,005 %            | < 0,001 %               | < 0,001 %               | < 0,001 %               |  |
| TCH/AFS-INB (FER)                | -                       | 0,034 %            | 0,013 %                 | 0,006 %                 | 0,019 %                 |  |
| TCH/AFS (EVSIDUR)                | -                       | 0,82 %             | 0,17 %                  | 0,17 %                  | 0,17 %                  |  |
| TCH/AFS (EVRFR)                  | -                       | 0,095 %            | 0,007 %                 | 0,007 %                 | 0,011 %                 |  |
| TCH/AHS7.95 (FER)                | < 0,01 % <sup>(*)</sup> | 20 %               | 20 %                    | 17 %                    | 28 %                    |  |
| Class Ib (RBER)                  | 0,004 %                 | 2,3 %              | 2,3 %                   | 2 %                     | 2,9 %                   |  |
| Class II (RBER)                  | 0,66 %                  | 5 %                | 5 %                     | 4,7 %                   | 5,7 %                   |  |

Continued

Table 1 (continued): Reference sensitivity performance for GMSK modulated channels

| GSM 850 and GSM 900 |                 |                          |                 |                    |                  |                  |
|---------------------|-----------------|--------------------------|-----------------|--------------------|------------------|------------------|
| Type of Channel     |                 | Propagation conditions   |                 |                    |                  |                  |
|                     |                 | Static                   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) | HT100<br>(no FH) |
| TCH/AHS7.4          | (FER)           | < 0,01 % <sup>(*)</sup>  | 16 %            | 16 %               | 14 %             | 22 %             |
|                     | Class Ib (RBER) | < 0,001 % <sup>(*)</sup> | 1,4 %           | 1,4 %              | 1,1 %            | 1,8 %            |
|                     | Class II (RBER) | 0,66 %                   | 5,3 %           | 5,3 %              | 5 %              | 6 %              |
| TCH/AHS6.7          | (FER)           | < 0,01 % <sup>(*)</sup>  | 9,2 %           | 9,2 %              | 8 %              | 13 %             |
|                     | Class Ib (RBER) | < 0,001 %                | 1,1 %           | 1,1 %              | 0,93 %           | 1,5 %            |
|                     | Class II (RBER) | 0,66 %                   | 5,8 %           | 5,8 %              | 5,5 %            | 6,6 %            |
| TCH/AHS5.9          | (FER)           | -                        | 5,7 %           | 5,7 %              | 4,9 %            | 8,6 %            |
|                     | Class Ib (RBER) | -                        | 0,51 %          | 0,51 %             | 0,42 %           | 0,73 %           |
|                     | Class II (RBER) | 0,66 %                   | 6 %             | 6 %                | 5,7 %            | 6,8 %            |
| TCH/AHS5.15         | (FER)           | -                        | 2,5 %           | 2,5 %              | 2,2 %            | 4 %              |
|                     | Class Ib (RBER) | -                        | 0,51 %          | 0,51 %             | 0,43 %           | 0,78 %           |
|                     | Class II (RBER) | 0,66 %                   | 6,3 %           | 6,3 %              | 6 %              | 7,2 %            |
| TCH/AHS4.75         | (FER)           | -                        | 1,2 %           | 1,2 %              | 1,2 %            | 1,8 %            |
|                     | Class Ib (RBER) | -                        | 0,17 %          | 0,17 %             | 0,14 %           | 0,26 %           |
|                     | Class II (RBER) | 0,66 %                   | 6,4 %           | 6,4 %              | 6,2 %            | 7,4 %            |
| TCH/AHS-INB         | (FER)           | 0,013 %                  | 0,72 %          | 0,64 %             | 0,53 %           | 0,94 %           |
| TCH/AHS             | (EVSIDUR)       | -                        | 1,5 %           | 1,5 %              | 2,1 %            | 1,5 %            |
| TCH/AHS             | (EVRFR)         | -                        | 0,25 %          | 0,24 %             | 0,33 %           | 0,28 %           |



| DCS 1 800 & PCS 1 900 |                                  |                        |                         |                         |                         |                         |
|-----------------------|----------------------------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Type of channel       |                                  | Propagation conditions |                         |                         |                         |                         |
|                       |                                  | static                 | TU50<br>(no FH)         | TU50<br>(ideal FH)      | RA130<br>(no FH)        | HT100<br>(no FH)        |
| FACCH/H               | (FER)                            | 0,1 %                  | 7,2 %                   | 7,2 %                   | 5,7 %                   | 10,4 %                  |
| FACCH/F               | (FER)                            | 0,1 %                  | 3,9 %                   | 3,9 %                   | 3,4 %                   | 7,4 %                   |
| SDCCH                 | (FER)                            | 0,1 %                  | 9 %                     | 9 %                     | 8 %                     | 13 %                    |
| RACH                  | (FER)                            | 0,5 %                  | 13 %                    | 13 %                    | 12 %                    | 13 %                    |
| SCH                   | (FER)                            | 1 %                    | 19 %                    | 19 %                    | 15 %                    | 25 %                    |
| TCH/F14,4             | (BER)                            | 10 <sup>-5</sup>       | 2,1 %                   | 2 %                     | 2 %                     | 6,5 %                   |
| TCH/F9,6 & H4,8       | (BER)                            | 10 <sup>-5</sup>       | 0,4 %                   | 0,4 %                   | 0,1 %                   | 0,7 %                   |
| TCH/F4,8              | (BER)                            | -                      | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |
| TCH/F2,4              | (BER)                            | -                      | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        |
| TCH/H2,4              | (BER)                            | -                      | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |
| TCH/FS                | (FER)                            | 0,1 $\alpha$ %         | 3 $\alpha$ %            | 3 $\alpha$ %            | 2 $\alpha$ %            | 7 $\alpha$ %            |
|                       | class Ib (RBER)                  | 0,4/ $\alpha$ %        | 0,3/ $\alpha$ %         | 0,3/ $\alpha$ %         | 0,2/ $\alpha$ %         | 0,5/ $\alpha$ %         |
|                       | class II (RBER)                  | 2 %                    | 8 %                     | 8 %                     | 7 %                     | 9 %                     |
| TCH/EFS               | (FER)                            | < 0,1 %                | 4 %                     | 4 %                     | 3 %                     | 7 %                     |
|                       | (RBER Ib)                        | < 0,1 %                | 0,12 %                  | 0,12 %                  | 0,10 %                  | 0,24 %                  |
|                       | (RBER II)                        | 2,0 %                  | 8 %                     | 8 %                     | 7 %                     | 9 %                     |
| TCH/HS                | (FER)                            | 0,025 %                | 4,2 %                   | 4,2 %                   | 4,1 %                   | 5,0 %                   |
|                       | class Ib (RBER, BFI=0)           | 0,001 %                | 0,38 %                  | 0,38 %                  | 0,28 %                  | 0,63 %                  |
|                       | class II (RBER, BFI=0)           | 0,72 %                 | 6,9 %                   | 6,9 %                   | 6,8 %                   | 7,8 %                   |
|                       | (UFR)                            | 0,048 %                | 5,7 %                   | 5,7 %                   | 5,0 %                   | 8,1 %                   |
|                       | class Ib (RBER, (BFI or UFI)=0)  | 0,001 %                | 0,26 %                  | 0,26 %                  | 0,21 %                  | 0,35 %                  |
|                       | (EVSIDR)                         | 0,06 %                 | 7,0 %                   | 7,0 %                   | 6,0 %                   | 9,9 %                   |
|                       | (RBER, SID=2 and (BFI or UFI)=0) | 0,001 %                | 0,01 %                  | 0,01 %                  | 0,01 %                  | 0,02 %                  |
|                       | (ESIDR)                          | 0,01 %                 | 3,0 %                   | 3,0 %                   | 3,2 %                   | 3,9 %                   |
|                       | (RBER, SID=1 or SID=2)           | 0,003 %                | 0,33 %                  | 0,33 %                  | 0,21 %                  | 0,45 %                  |
| TCH/AFS12.2           | (FER)                            | -                      | 2 %                     | 2,0 %                   | 1,3 %                   | 4,6 %                   |
|                       | Class Ib (RBER)                  | < 0,001 %              | 1,4 %                   | 1,4 %                   | 1,2 %                   | 2,1 %                   |
| TCH/AFS10.2           | (FER)                            | -                      | 0,65 %                  | 0,65 %                  | 0,41 %                  | 1,6 %                   |
|                       | Class Ib (RBER)                  | < 0,001 %              | 0,12 %                  | 0,12 %                  | 0,084 %                 | 0,26 %                  |
| TCH/AFS7.95           | (FER)                            | -                      | 0,025 %                 | 0,025 %                 | 0,018 %                 | 0,089 %                 |
|                       | Class Ib (RBER)                  | -                      | 0,023 %                 | 0,023 %                 | 0,016 %                 | 0,061 %                 |
| TCH/AFS7.4            | (FER)                            | -                      | 0,036 %                 | 0,036 %                 | 0,023 %                 | 0,13 %                  |
|                       | Class Ib (RBER)                  | -                      | 0,013 %                 | 0,013 %                 | 0,007 %                 | 0,031 %                 |
| TCH/AFS6.7            | (FER)                            | -                      | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | 0,031 %                 |
|                       | Class Ib (RBER)                  | -                      | 0,017 %                 | 0,017 %                 | 0,01 %                  | 0,041 %                 |
| TCH/AFS5.9            | (FER)                            | -                      | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)                  | -                      | < 0,001 %               | < 0,001 %               | < 0,001 %               | 0,002 %                 |
| TCH/AFS5.15           | (FER)                            | -                      | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | -                       | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)                  | -                      | < 0,001 %               | < 0,001 %               | < 0,001 %               | 0,003 %                 |
| TCH/AFS4.75           | (FER)                            | -                      | < 0,01 % <sup>(*)</sup> | -                       | -                       | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)                  | -                      | < 0,001 %               | < 0,001 %               | < 0,001 %               | < 0,001 %               |
| TCH/AFS-INB           | (FER)                            | -                      | 0,011 %                 | 0,011 %                 | 0,006 %                 | 0,021 %                 |
| TCH/AFS               | (EVSIDUR)                        | -                      | 0,19 %                  | 0,19 %                  | 0,17 %                  | 0,25 %                  |
| TCH/AFS               | (EVFRF)                          | -                      | 0,007 %                 | 0,007 %                 | 0,002 %                 | 0,01 %                  |

Continued

Table 1 (concluded): Reference sensitivity performance for GMSK modulated channels

| DCS 1 800 & PCS 1 900 |                        |                         |                 |               |               |        |
|-----------------------|------------------------|-------------------------|-----------------|---------------|---------------|--------|
| Type of Channel       | Propagation conditions |                         |                 |               |               |        |
|                       | Static                 | TU50 (no FH)            | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |        |
| TCH/AHS7.95           | (FER)                  | < 0,01 % <sup>(*)</sup> | 20 %            | 20 %          | 17 %          | 27 %   |
|                       | Class Ib (RBER)        | 0,004 %                 | 2,3 %           | 2,3 %         | 2 %           | 2,9 %  |
|                       | Class II (RBER)        | 0,66 %                  | 5 %             | 5 %           | 4,8 %         | 5,7 %  |
| TCH/AHS7.4            | (FER)                  | < 0,01 % <sup>(*)</sup> | 16 %            | 16 %          | 13 %          | 22 %   |
|                       | Class Ib (RBER)        | <0,001 % <sup>(*)</sup> | 1,4 %           | 1,4 %         | 1,1 %         | 1,9 %  |
|                       | Class II (RBER)        | 0,66 %                  | 5,3 %           | 5,3 %         | 5,1 %         | 6 %    |
| TCH/AHS6.7            | (FER)                  | < 0,01 % <sup>(*)</sup> | 9,4 %           | 9,4 %         | 7,5 %         | 13 %   |
|                       | Class Ib (RBER)        | < 0,001 %               | 1,1 %           | 1,1 %         | 0,92 %        | 1,5 %  |
|                       | Class II (RBER)        | 0,66 %                  | 5,8 %           | 5,8 %         | 5,5 %         | 6,6 %  |
| TCH/AHS5.9            | (FER)                  | -                       | 5,9 %           | 5,9 %         | 4,6 %         | 8,5 %  |
|                       | Class Ib (RBER)        | -                       | 0,52 %          | 0,52 %        | 0,39 %        | 0,72 % |
|                       | Class II (RBER)        | 0,66 %                  | 6,1 %           | 6,1 %         | 5,8 %         | 6,8 %  |
| TCH/AHS5.15           | (FER)                  | -                       | 2,6 %           | 2,6 %         | 2 %           | 3,7 %  |
|                       | Class Ib (RBER)        | -                       | 0,53 %          | 0,53 %        | 0,4 %         | 0,76 % |
|                       | Class II (RBER)        | 0,66 %                  | 6,3 %           | 6,3 %         | 6,1 %         | 7,2 %  |
| TCH/AHS4.75           | (FER)                  | -                       | 1,2 %           | 1,2 %         | 1,1 %         | 1,7 %  |
|                       | Class Ib (RBER)        | -                       | 0,18 %          | 0,18 %        | 0,13 %        | 0,25 % |
|                       | Class II (RBER)        | 0,66 %                  | 6,5 %           | 6,5 %         | 6,2 %         | 7,3 %  |
| TCH/AHS-INB           | (FER)                  | 0,013 %                 | 0,64 %          | 0,64 %        | 0,53 %        | 0,94 % |
| TCH/AHS               | (EVSIDUR)              | -                       | 1,3 %           | 1,3 %         | 2,1 %         | 1,5 %  |
| TCH/AHS               | (EVRFR)                | -                       | 0,24 %          | 0,24 %        | 0,25 %        | 0,24 % |

NOTE 1: The specification for SDCCH applies also for BCCH, AGCH, PCH, SACCH. The actual performance of SACCH, should be better.

NOTE 2: Definitions:  
 FER: Frame erasure rate (frames marked with BFI=1)  
 UFR: Unreliable frame rate (frames marked with (BFI or UFI)=1)  
 EVSIDR: Erased Valid SID frame rate (frames marked with (SID=0) or (SID=1) or ((BFI or UFI)=1) if a valid SID frame was transmitted)  
 EVSIDUR: Erased Valid SID\_UPDATE frame rate associated to an adaptive speech traffic channel  
 ESIDR: Erased SID frame rate (frames marked with SID=0 if a valid SID frame was transmitted)  
 EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel. This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.  
 BER: Bit error rate  
 RBER, BFI=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "good" to the number of transmitted bits in the "good" frames).  
 RBER, (BFI or UFI)=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "reliable" to the number of transmitted bits in the "reliable" frames).  
 RBER, SID=2 and (BFI or UFI)=0: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).  
 RBER, SID=1 or SID=2: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" or as "invalid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).  
 TCH/AxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).

NOTE 3:  $1 \leq \alpha \leq 1.6$ . The value of  $\alpha$  can be different for each channel condition but must remain the same for FER and class Ib RBER measurements for the same channel condition.

NOTE 4: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.

NOTE 5: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 6: For AMR, the complete conformance should not be restricted to the channels identified with (\*).



Table 1a: Input signal level (for normal BTS) at reference performance for GMSK modulated signals

| GSM 900 and GSM 850             |     |                        |                 |                     |                     |                  |
|---------------------------------|-----|------------------------|-----------------|---------------------|---------------------|------------------|
| Type of channel                 |     | Propagation conditions |                 |                     |                     |                  |
|                                 |     | static                 | TU50<br>(no FH) | TU50<br>(ideal FH)  | RA250<br>(no FH)    | HT100<br>(no FH) |
| PDTCH/CS-1                      | dBm | -104 <sup>(x)</sup>    | -104            | -104 <sup>(x)</sup> | -104 <sup>(x)</sup> | -103             |
| PDTCH/CS-2                      | dBm | -104 <sup>(x)</sup>    | -100            | -101                | -101                | -99              |
| PDTCH/CS-3                      | dBm | -104 <sup>(x)</sup>    | -98             | -99                 | -98                 | -96              |
| PDTCH/CS-4                      | dBm | -101                   | -90             | -90                 | *                   | *                |
| USF/CS-1                        | dBm | -104 <sup>(x)</sup>    | -101            | -103                | -103                | -101             |
| USF/CS-2 to 4                   | dBm | -104 <sup>(x)</sup>    | -103            | -104 <sup>(x)</sup> | -104 <sup>(x)</sup> | -104             |
| PRACH/11 bits <sup>1)</sup>     | dBm | -104 <sup>(x)</sup>    | -104            | -104                | -103                | -103             |
| PRACH/8 bits <sup>1)</sup>      | dBm | -104 <sup>(x)</sup>    | -104            | -104                | -103                | -103             |
| GSM 900, GSM 850 and MXM 850    |     |                        |                 |                     |                     |                  |
| Type of Channel                 |     | Propagation conditions |                 |                     |                     |                  |
|                                 |     | static                 | TU50<br>(no FH) | TU50<br>(ideal FH)  | RA250<br>(no FH)    | HT100<br>(no FH) |
| PDTCH/MCS-0 <sup>6)</sup>       | dBm | -104                   | -103            | -103,5              | -103                | -102,5           |
| PDTCH/MCS-1                     | dBm | -104 <sup>(x)</sup>    | -102,5          | -103                | -103                | -102             |
| PDTCH/MCS-2                     | dBm | -104 <sup>(x)</sup>    | -100,5          | -101                | -100,5              | -100             |
| PDTCH/MCS-3                     | dBm | -104 <sup>(x)</sup>    | -96,5           | -96,5               | -92,5               | -95,5            |
| PDTCH/MCS-4                     | dBm | -101,5                 | -91             | -91                 | *                   | *                |
| USF/MCS-1 to 4                  | dBm | -104 <sup>(x)</sup>    | -102,5          | -104                | -104 <sup>(x)</sup> | -102,5           |
| PRACH/11 bits <sup>2), 3)</sup> | dBm | -104 <sup>(x)</sup>    | -104            | -104                | -103                | -103             |
| PRACH/8 bits <sup>1)</sup>      | dBm | -104 <sup>(x)</sup>    | -104            | -104                | -103                | -103             |
| DCS 1 800 & PCS 1 900           |     |                        |                 |                     |                     |                  |
| Type of channel                 |     | Propagation conditions |                 |                     |                     |                  |
|                                 |     | static                 | TU50<br>(no FH) | TU50<br>(ideal FH)  | RA130<br>(no FH)    | HT100<br>(no FH) |
| PDTCH/CS-1                      | dBm | -104 <sup>(x)</sup>    | -104            | -104                | -104 <sup>(x)</sup> | -103             |
| PDTCH/CS-2                      | dBm | -104 <sup>(x)</sup>    | -100            | -100                | -101                | -99              |
| PDTCH/CS-3                      | dBm | -104 <sup>(x)</sup>    | -98             | -98                 | -98                 | -94              |
| PDTCH/CS-4                      | dBm | -101                   | -88             | -88                 | *                   | *                |
| USF/CS-1                        | dBm | -104 <sup>(x)</sup>    | -103            | -103                | -103                | -101             |

| USF/CS-2 to 4  | dBm                    | -104 <sup>(x)</sup> | -104 <sup>(x)</sup> | -104 <sup>(x)</sup> | -104 <sup>(x)</sup> | -103   |
|--|------------------------|---------------------|---------------------|---------------------|---------------------|--------|
| PRACH/11 bits <sup>1)</sup>  | dBm                    | -104 <sup>(x)</sup> | -104                | -104                | -103                | -103   |
| PRACH/8 bits <sup>1)</sup>   | dBm                    | -104 <sup>(x)</sup> | -104                | -104                | -103                | -103   |
| <b>DCS 1800, PCS 1900 and MXM 1900</b>   |                        |                     |                     |                     |                     |        |
| Type of channel  | Propagation conditions |                     |                     |                     |                     |        |
|  | static                 | TU50 (no FH)        | TU50 (ideal FH)     | RA130 (no FH)       | HT100 (no FH)       |        |
| PDTCH/MCS-0 <sup>6)</sup>  | dBm                    | -104                | -103                | -103,5              | -103                | -102,5 |
| PDTCH/MCS-1  | dBm                    | -104 <sup>(x)</sup> | -102,5              | -103                | -103                | -101,5 |
| PDTCH/MCS-2  | dBm                    | -104 <sup>(x)</sup> | -100,5              | -101                | -100,5              | -99,5  |
| PDTCH/MCS-3  | dBm                    | -104 <sup>(x)</sup> | -96,5               | -96,5               | -92,5               | -94,5  |
| PDTCH/MCS-4  | dBm                    | -101,5              | -90,5               | -90,5               | *                   | *      |
| USF/MCS-1 to 4   | dBm                    | -104 <sup>(x)</sup> | -104                | -104                | -104 <sup>(x)</sup> | -102,5 |
| PRACH/11 bits  | dBm                    | -104 <sup>(x)</sup> | -104                | -104                | -103                | -103   |
| PRACH/8 bits   | dBm                    | -104 <sup>(x)</sup> | -104                | -104                | -103                | -103   |
| NOTE 1: The specification for PDTCH/CS-1 applies also for PACCH, PBCCH, PAGCH, PPCH, PTCCH/D.  |                        |                     |                     |                     |                     |        |
| NOTE 2: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.   |                        |                     |                     |                     |                     |        |
| NOTE 3: PDTCH/CS-4 and PDTCH/MCS-x can not meet the reference performance for some propagation conditions (*).   |                        |                     |                     |                     |                     |        |
| NOTE 4: The complete conformance should not be restricted to the logical channels and channel models identified with (x)   |                        |                     |                     |                     |                     |        |
| NOTE 5: Identification of the correct Training sequence is required. Cases identified by <sup>1)</sup> include one training sequence and cases identified by <sup>2)</sup> include 3 training sequences according to 3GPP TS 45.002. The specification marked by <sup>3)</sup> also applies to CPRACH. |                        |                     |                     |                     |                     |        |
| NOTE 6: The specification of MCS-0 only applies in DL RTTI configuration.  |                        |                     |                     |                     |                     |        |

**Table 1b: Input signal level (for normal BTS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| <b>GSM 900, GSM 850 and MXM 850</b>  |                        |              |                 |               |               |         |
|--|------------------------|--------------|-----------------|---------------|---------------|---------|
| Type of channel  | Propagation conditions |              |                 |               |               |         |
|  | static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |         |
| PDTCH/MCS-5  | dBm                    | -101         | -96,5           | -97           | -96           | -95     |
| PDTCH/MCS-6  | dBm                    | -99,5        | -94             | -94,5         | -91           | -91     |
| PDTCH/MCS-7  | dBm                    | -96          | -89             | -88,5         | -87**         | -86**   |
| PDTCH/MCS-8  | dBm                    | -93          | -84             | -84           | *             | -81,5** |
| PDTCH/MCS-9  | dBm                    | -91,5        | -80             | -80           | *             | *       |
| <b>DCS 1 800, PCS 1900 and MXM 1900</b>  |                        |              |                 |               |               |         |
| Type of channel  | Propagation conditions |              |                 |               |               |         |
|  | static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |         |
| PDTCH/MCS-5  | dBm                    | -101         | -95,5           | -97           | -96           | -93     |
| PDTCH/MCS-6  | dBm                    | -99,5        | -94             | -94           | -91           | -85,5   |
| PDTCH/MCS-7  | dBm                    | -96          | -87             | -86,5         | -87**         | *       |
| PDTCH/MCS-8  | dBm                    | -93          | -86,5**         | -86,5**       | *             | *       |
| PDTCH/MCS-9  | dBm                    | -91,5        | -83**           | -83**         | *             | *       |
| Performance is specified at 30% BLER for those cases identified with mark **.  |                        |              |                 |               |               |         |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. |                        |              |                 |               |               |         |
| NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (*).  |                        |              |                 |               |               |         |

**Table 1c: Input signal level (for MS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| GSM 900 and GSM 850    |     |                        |              |                 |               |               |
|------------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of channel        |     | Propagation conditions |              |                 |               |               |
|                        |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |
| PDTCH/MCS-5            | dBm | -98                    | -93          | -94             | -93           | -92           |
| PDTCH/MCS-6            | dBm | -96                    | -91          | -91,5           | -88           | -89           |
| PDTCH/MCS-7            | dBm | -93                    | -84          | -84             | *             | -83**         |
| PDTCH/MCS-8            | dBm | -90,5                  | -83**        | -83**           | *             | *             |
| PDTCH/MCS-9            | dBm | -86                    | -78,5**      | -78,5**         | *             | *             |
| USF/MCS-5 to 9         | dBm | -102 <sup>(x)</sup>    | -97,5        | -99             | -100          | -99           |
| DCS 1 800 and PCS 1900 |     |                        |              |                 |               |               |
| Type of channel        |     | Propagation conditions |              |                 |               |               |
|                        |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| PDTCH/MCS-5            | dBm | -98                    | -93,5        | -93,5           | -93           | -89,5         |
| PDTCH/MCS-6            | dBm | -96                    | -91          | -91             | -88           | -83,5         |
| PDTCH/MCS-7            | dBm | -93                    | -81,5        | -80,5           | *             | *             |
| PDTCH/MCS-8            | dBm | -90,5                  | -80**        | -80**           | *             | *             |
| PDTCH/MCS-9            | dBm | -86                    | *            | *               | *             | *             |
| USF/MCS-5 to 9         | dBm | -102 <sup>(x)</sup>    | -99          | -99             | -100          | -99           |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (\*).

NOTE 3: The complete conformance should not be restricted to the logical channels and channel models identified with (x).

**Table 1d: Input signal level (for normal BTS) at reference performance for ECSD (GMSK and 8-PSK modulated signals)**

| GSM 900 and GSM 850  |     |                        |              |                 |               |               |
|----------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of Channel      |     | Propagation conditions |              |                 |               |               |
|                      |     | Static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |
| E-FACCH/F            | dBm | -104 <sup>(x)</sup>    | -101         | -102            | -102          | -98           |
| E-TCH/F28.8 T        | dBm | -99,5                  | -93,5        | -95             | -93,5         | -94,5         |
| E-TCH/F 32 T         | dBm | -104                   | -97,5        | -100            | -100          | -96,5         |
| E-TCH/F28.8 NT       | dBm | -100                   | -95,5        | -96,5           | -96,5         | -96           |
| E-TCH/F43.2 NT       | dBm | -97                    | -91          | -92             | -89           | -89,5         |
| DCS 1 800 & PCS 1900 |     |                        |              |                 |               |               |
| Type of Channel      |     | Propagation conditions |              |                 |               |               |
|                      |     | Static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| E-FACCH/F            | dBm | -104 <sup>(x)</sup>    | -102         | -102            | -102          | -98           |
| E-TCH/F28.8 T        | dBm | -99,5                  | -94,5        | -95             | -92,5         | -93           |
| E-TCH/F 32 T         | dBm | -104                   | -98,5        | -100            | -100          | -97           |
| E-TCH/F28.8 NT       | dBm | -100                   | -96          | -96,5           | -96           | -95           |
| E-TCH/F43.2 NT       | dBm | -97                    | -91,5        | -91,5           | -88,5         | -86           |

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: The complete conformance should not be restricted to the logical channels and channel models identified with (x).

**Table 1e: Input signal level (for MS) at reference performance for ECSD (GMSK and 8-PSK modulated signals)**

| GSM 850 and GSM 900  |     |                        |              |                 |               |               |
|----------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of Channel      |     | Propagation conditions |              |                 |               |               |
|                      |     | Static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |
| E-FACCH/F            | dBm | -102 <sup>(x)</sup>    | -99          | -100            | -100          | -96           |
| E-TCH/F28.8 T        | dBm | -97.5                  | -91.5        | -93             | -91.5         | -90           |
| E-TCH/F 32 T         | dBm | -98.5                  | -93          | -94             | -94           | -91.5         |
| E-TCH/F28.8 NT       | dBm | -98                    | -93.5        | -94.5           | -94.5         | -92.5         |
| E-TCH/F43.2 NT       | dBm | -95                    | -89          | -90             | -87           | -84.5         |
| DCS 1 800 & PCS 1900 |     |                        |              |                 |               |               |
| Type of Channel      |     | Propagation conditions |              |                 |               |               |
|                      |     | Static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| E-FACCH/F            | dBm | -102 <sup>(x)</sup>    | -100         | -100            | -100          | -96           |
| E-TCH/F28.8 T        | dBm | -97.5                  | -92.5        | -93             | -90           | -87.5         |
| E-TCH/F 32 T         | dBm | -98.5                  | -94          | -94             | -94           | -87.5         |
| E-TCH/F28.8 NT       | dBm | -98                    | -94          | -94.5           | -93.5         | -90.5         |
| E-TCH/F43.2 NT       | dBm | -95                    | -89.5        | -89.5           | -86.5         | *             |

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: E-TCH/F for 43.2 NT can not meet the reference performance for some propagation conditions (\*).

NOTE 3: The complete conformance should not be restricted to the logical channels and channel models identified with (x).

**Table 1f: Reference sensitivity performance for GMSK modulated signals**

| GSM 850 and GSM 900 |                 |                        |              |               |               |
|---------------------|-----------------|------------------------|--------------|---------------|---------------|
| Type of Channel     |                 | Propagation conditions |              |               |               |
|                     |                 | Static                 | TU50 (no FH) | RA250 (no FH) | HT100 (no FH) |
| TCH/WFS12.65        | (dBm)           | -104                   | -99,5        | -101          | -99           |
|                     | Class 1b (RBER) | 0,50                   | 0,35         | 0,72          | 0,62          |
| TCH/ WFS8.85        | (dBm)           | -104                   | -102         | -104          | -102          |
|                     | Class 1b (RBER) | 0,50                   | 0,38         | 0,72          | 0,62          |
| TCH/ WFS6.60        | (dBm)           | -104                   | -103         | -104          | -103,5        |
|                     | Class 1b (RBER) | 0,24                   | 0,15         | 0,19          | 0,24          |

| DCS 1 800 & PCS 1 900 |                 |                        |               |
|-----------------------|-----------------|------------------------|---------------|
| Type of Channel       |                 | Propagation conditions |               |
|                       |                 | TU50 (no FH)           | HT100 (no FH) |
| TCH/WFS12.65          | (dBm)           | -100,5                 | -99           |
|                       | Class 1b (RBER) | 0,62                   | 0,66          |
| TCH/ WFS8.85          | (dBm)           | -103,5                 | -102          |
|                       | Class 1b (RBER) | 0,59                   | 0,58          |
| TCH/ WFS6.60          | (dBm)           | -104                   | -103,5        |
|                       | Class 1b (RBER) | 0,17                   | 0,25          |

|         |   |
|---------|---|
| NOTE 1: | <p>Definitions:</p> <p>FER: Frame erasure rate (frames marked with BFI=1)</p> <p>UFR: Unreliable frame rate (frames marked with (BFI or UFI)=1)</p> <p>EVSIDR: Erased Valid SID frame rate (frames marked with (SID=0) or (SID=1) or ((BFI or UFI)=1) if a valid SID frame was transmitted)</p> <p>EVSIDUR: Erased Valid SID_UPDATE frame rate associated to an adaptive speech traffic channel</p> <p>ESIDR: Erased SID frame rate (frames marked with SID=0 if a valid SID frame was transmitted)</p> <p>EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.</p> <p>BER: Bit error rate</p> <p>RBER, BFI=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "good" to the number of transmitted bits in the "good" frames).</p> <p>RBER, (BFI or UFI)=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "reliable" to the number of transmitted bits in the "reliable" frames).</p> <p>RBER, SID=2 and (BFI or UFI)=0: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).</p> <p>RBER, SID=1 or SID=2: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" or as "invalid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).</p> <p>TCH/WxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).</p> |
| NOTE 2: | <p>The requirements for the DCS 1800 &amp; PCS 1900 Static propagation condition are the same as for the GSM 850 &amp; GSM 900 Static propagation condition, the requirements for the GSM 850 &amp; GSM 900 TU50 (ideal FH) and DCS 1800 &amp; PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 &amp; PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 &amp; PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 RA250 (no FH) propagation condition.</p>  |
| NOTE 3: | <p>Ideal FH performance is already tested for the TCH/FS channel, therefore, these requirements are given for information purposes and need not be tested.</p>  |
| NOTE 4: | <p>As a minimum the test of performance shall include all propagation conditions for maximum implemented codec rate and the remaining implemented codec rates for one propagation condition only, e.g. TU50 (no FH).</p>  |
| NOTE 5: | <p>The performance requirements for inband signalling, SID_UPDATE and RATSCCH are the same as those given for TCH/AFS in Table 1. It is sufficient to test inband signalling, SID_UPDATE and RATSCCH requirements for only one of the channel types TCH/AFS and TCH/WFS.</p>  |



Table 1g: Reference sensitivity performance for 8-PSK modulated signals

| GSM 850 and GSM 900  |                        |                 |                    |                  |                  |  |
|----------------------|------------------------|-----------------|--------------------|------------------|------------------|--|
| Type of channel      | Propagation conditions |                 |                    |                  |                  |  |
|                      | static                 | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) | HT100<br>(no FH) |  |
| O-FACCH/F (dBm)      | -104                   | -100,5          | -101,5             | -101,5           | -100             |  |
| O-FACCH/H (dBm)      | -104                   | -100,5          | -100,5             | -101             | -99              |  |
| O-TCH/AHS12.2 (dBm)  | -100,5                 | -94,5           | -95                | -94              | -92,5            |  |
| Class 1b (RBER)      | 0,71                   | 0,30            | 0,35               | 0,29             | 0,40             |  |
| O-TCH/AHS10.2 (dBm)  | -101                   | -95,5           | -96                | -95              | -93,5            |  |
| Class 1b (RBER)      | 0,35                   | 0,15            | 0,15               | 0,13             | 0,19             |  |
| O-TCH/AHS7.95 (dBm)  | -102,5                 | -96,5           | -97                | -96,5            | -94,5            |  |
| Class 1b (RBER)      | 0,10                   | 0,08            | 0,08               | 0,05             | 0,10             |  |
| O-TCH/AHS7.4 (dBm)   | -102,5                 | -97,5           | -97,5              | -97              | -95              |  |
| Class 1b (RBER)      | 0,16                   | 0,15            | 0,15               | 0,12             | 0,17             |  |
| O-TCH/AHS6.7 (dBm)   | -103                   | -98             | -98,5              | -97,5            | -95,5            |  |
| Class 1b (RBER)      | 0,22                   | 0,14            | 0,15               | 0,12             | 0,16             |  |
| O-TCH/AHS5.9 (dBm)   | -103,5                 | -98             | -98,5              | -98,5            | -96,5            |  |
| Class 1b (RBER)      | 0,57                   | 0,20            | 0,19               | 0,15             | 0,25             |  |
| O-TCH/AHS5.15 (dBm)  | -104                   | -98,5           | -99                | -98,5            | -97              |  |
| Class 1b (RBER)      | 0,15                   | 0,10            | 0,08               | 0,07             | 0,11             |  |
| O-TCH/AHS4.75 (dBm)  | -104                   | -99,5           | -99,5              | -99,5            | -97,5            |  |
| Class 1b (RBER)      | 0,18                   | 0,15            | 0,11               | 0,11             | 0,10             |  |
| O-TCH/AHS-INB (FER)  | -103,5                 | -99             | -99,5              | -98,5            | -98              |  |
| O-TCH/AHS (EVSIDUR)  | -104                   | -100,5          | -101,5             | -101,5           | -99              |  |
| O-TCH/AHS (EVRFR)    | -104                   | -101            | -101,5             | -101,5           | -99              |  |
| O-TCH/WFS23.85 (dBm) | -100,5                 | -95             | -96,5              | -97              | -94,5            |  |
| Class 1b (RBER)      | 1,00                   | 0,16            | 0,28               | 0,24             | 0,28             |  |
| O-TCH/WFS15.85 (dBm) | -102,5                 | -97,5           | -99                | -100,5           | -97              |  |
| Class 1b (RBER)      | 0,50                   | 0,44            | 0,33               | 0,64             | 0,50             |  |
| O-TCH/WFS12.65 (dBm) | -104                   | -99             | -100               | -101             | -98,5            |  |
| Class 1b (RBER)      | 0,89                   | 0,37            | 0,21               | 0,51             | 0,59             |  |
| O-TCH/WFS8.85 (dBm)  | -104                   | -100,5          | -102               | -102,5           | -100,5           |  |
| Class 1b (RBER)      | 0,77                   | 0,31            | 0,22               | 0,42             | 0,48             |  |
| O-TCH/WFS6.60 (dBm)  | -104                   | -101,5          | -103               | -103,5           | -101,5           |  |
| Class 1b (RBER)      | 0,05                   | 0,18            | 0,12               | 0,23             | 0,27             |  |
| O-TCH/WFS-INB (dBm)  | -104                   | -103,5          | -103,5             | -104             | -103             |  |
| O-TCH/WFS (EVSIDUR)  | -104                   | -100            | -102               | -101             | -99,5            |  |
| O-TCH/WFS (EVRFR)    | -104                   | -101            | -103               | -103             | -101             |  |
| O-TCH/WHS12.65 (dBm) | -100,5                 | -94,5           | -95                | -93,5            | -92,5            |  |
| Class 1b (RBER)      | 0,57                   | 0,30            | 0,38               | 0,30             | 0,40             |  |
| O-TCH/ WHS8.85 (dBm) | -102,5                 | -96             | -96,5              | -96              | -94              |  |
| Class 1b (RBER)      | 0,19                   | 0,10            | 0,11               | 0,10             | 0,13             |  |
| O-TCH/ WHS6.60 (dBm) | -103                   | -98             | -98,5              | -97,5            | -96              |  |
| Class 1b (RBER)      | 0,23                   | 0,15            | 0,15               | 0,13             | 0,19             |  |

| DCS 1 800 & PCS 1 900 |                 |                        |                  |
|-----------------------|-----------------|------------------------|------------------|
| Type of channel       |                 | Propagation conditions |                  |
|                       |                 | TU50<br>(no FH)        | HT100<br>(no FH) |
| O-FACCH/F             | (dBm)           | -100,5                 | -100             |
| O-FACCH/H             | (dBm)           | -100                   | -99              |
| O-TCH/AHS12.2         | (dBm)           | -94,5                  | -92              |
|                       | Class 1b (RBER) | 0,30                   | 0,42             |
| O-TCH/AHS10.2         | (dBm)           | -95,5                  | -93              |
|                       | Class 1b (RBER) | 0,17                   | 0,20             |
| O-TCH/AHS7.95         | (dBm)           | -96,5                  | -94              |
|                       | Class 1b (RBER) | 0,08                   | 0,08             |
| O-TCH/AHS7.4          | (dBm)           | -97                    | -94,5            |
|                       | Class 1b (RBER) | 0,15                   | 0,17             |
| O-TCH/AHS6.7          | (dBm)           | -98                    | -95,5            |
|                       | Class 1b (RBER) | 0,16                   | 0,19             |
| O-TCH/AHS5.9          | (dBm)           | -98,5                  | -96              |
|                       | Class 1b (RBER) | 0,22                   | 0,24             |
| O-TCH/AHS5.15         | (dBm)           | -99                    | -97              |
|                       | Class 1b (RBER) | 0,11                   | 0,12             |
| O-TCH/AHS4.75         | (dBm)           | -99,5                  | -97,5            |
|                       | Class 1b (RBER) | 0,15                   | 0,17             |
| O-TCH/AHS-INB         | (FER)           | -99                    | -97,5            |
| O-TCH/AHS             | (EVSIDUR)       | -97,5                  | -99              |
| O-TCH/AHS             | (EVRFR)         | -101                   | -99              |
| O-TCH/WFS23.85        | (dBm)           | -96                    | -94              |
|                       | Class 1b (RBER) | 0,17                   | 0,26             |
| O-TCH/WFS15.85        | (dBm)           | -98,5                  | -97              |
|                       | Class 1b (RBER) | 0,50                   | 0,60             |
| O-TCH/WFS12.65        | (dBm)           | -100                   | -98,5            |
|                       | Class 1b (RBER) | 0,45                   | 0,63             |
| O-TCH/WFS8.85         | (dBm)           | -102                   | -100,5           |
|                       | Class 1b (RBER) | 0,38                   | 0,57             |
| O-TCH/WFS6.60         | (dBm)           | -102,5                 | -101,5           |
|                       | Class 1b (RBER) | 0,20                   | 0,30             |
| O-TCH/WFS-INB         | (dBm)           | -103                   | -102,5           |
| O-TCH/WFS             | (EVSIDUR)       | -101                   | -99              |
| O-TCH/WFS             | (EVRFR)         | -102,5                 | -101             |
| O-TCH/WHS12.65        | (dBm)           | -94,5                  | -92              |
|                       | Class 1b (RBER) | 0,34                   | 0,44             |
| O-TCH/ WHS8.85        | (dBm)           | -96                    | -94              |
|                       | Class 1b (RBER) | 0,12                   | 0,15             |
| O-TCH/ WHS6.60        | (dBm)           | -98                    | -95,5            |
|                       | Class 1b (RBER) | 0,16                   | 0,19             |

- NOTE 1: Definitions:  
FER: Frame erasure rate (frames marked with BFI=1)  
EVSIDUR: Erased Valid SID\_UPDATE frame rate associated to an adaptive speech traffic channel  
EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel. This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.  
BER: Bit error rate.  
RBER: Residual bit error rate.  
O-TCH/AxS-INB and O-TCH/WxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).
- NOTE 2: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.
- NOTE 3: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.
- NOTE 4: The requirements for DCS 1800 & PCS 1900 on TU50 (ideal FH) propagation conditions are the same as for TU50 (no FH).  
The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.
- NOTE 5: As a minimum the test of performance shall include all propagation conditions for maximum implemented codec rate and the remaining implemented codec rates for one propagation condition only, e.g. TU50 (no FH).
- NOTE 6: For O-TCH/WHS, the performance requirements for inband signalling, SID\_UPDATE and RATSCCH are the same as those of O-TCH/AHS. It is sufficient to test inband signalling, SID\_UPDATE and RATSCCH requirements for only one of the channel types O-TCH/AHS and O-TCH/WHS.

Table 1h: Input signal level at reference performance for FLO

| GSM 900 and GSM 850   |       |                        |                 |                    |                  |                  |
|---|-------|------------------------|-----------------|--------------------|------------------|------------------|
| FLO Configuration   |       | Propagation conditions |                 |                    |                  |                  |
|   |       | Static                 | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) | HT100<br>(no FH) |
| Reference TFC 1   | (dBm) | -104,0                 | -102,0          | <sup>(2)</sup>     | -103,0           | -101,5           |
| Reference TFC 2   | (dBm) | -104,0                 | -100,5          | <sup>(2)</sup>     | -100,5           | -99,5            |
| Reference TFC 3   | (dBm) | -104,0                 | -100,5          | <sup>(2)</sup>     | -102,0           | -101,0           |
| Reference TFC 4   | (dBm) | -102,0                 | -96,0           | -96,0              | -97,0            | -94,0            |
| Reference TFC 5   | (dBm) | -101,5                 | -96,0           | -97,5              | -98,0            | -95,5            |
| Reference TFC 6   | (dBm) | -100,0                 | -94,0           | -94,0              | -91,5            | -91,5            |
| Reference TFC 7   | (dBm) | -96,0                  | -88,5           | -88,5              | -                | -                |
| DCS 1 800 & PCS 1900  |       |                        |                 |                    |                  |                  |
| FLO Configuration   |       | Propagation conditions |                 |                    |                  |                  |
|   |       | Static                 | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) | HT100<br>(no FH) |
| Reference TFC 1   | (dBm) | <sup>(3)</sup>         | -101,5          | <sup>(3)</sup>     | <sup>(3)</sup>   | -101,5           |
| Reference TFC 2   | (dBm) | <sup>(3)</sup>         | -100,0          | <sup>(3)</sup>     | <sup>(3)</sup>   | -99,5            |
| Reference TFC 3   | (dBm) | <sup>(3)</sup>         | -101,5          | <sup>(3)</sup>     | <sup>(3)</sup>   | -101,0           |
| Reference TFC 4   | (dBm) | <sup>(3)</sup>         | -95,5           | <sup>(3)</sup>     | <sup>(3)</sup>   | -93,0            |
| Reference TFC 5   | (dBm) | <sup>(3)</sup>         | -97,0           | <sup>(3)</sup>     | <sup>(3)</sup>   | -95,0            |
| Reference TFC 6   | (dBm) | <sup>(3)</sup>         | -94,0           | <sup>(3)</sup>     | <sup>(3)</sup>   | -88,5            |
| Reference TFC 7   | (dBm) | <sup>(3)</sup>         | -88,0           | <sup>(3)</sup>     | <sup>(3)</sup>   | -                |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.  |       |                        |                 |                    |                  |                  |
| NOTE 2: The requirements for GSM 900 & GSM 850 on TU50 (ideal FH) propagation conditions are the same as for TU50 (no FH) for Reference TFCs 1, 2 and 3.  |       |                        |                 |                    |                  |                  |
| NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for the DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |       |                        |                 |                    |                  |                  |

**Table 1i: Input signal level at reference performance for Repeated Downlink FACCH and Repeated SACCH**

| <b>GSM 900 and GSM 850</b>  |       |                               |                         |                            |                          |                          |
|---|-------|-------------------------------|-------------------------|----------------------------|--------------------------|--------------------------|
|   |       | <b>Propagation conditions</b> |                         |                            |                          |                          |
|   |       | <b>Static</b>                 | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>(ideal FH)</b> | <b>RA250<br/>(no FH)</b> | <b>HT100<br/>(no FH)</b> |
| FACCH/F   | (dBm) | -104                          | -104                    | <sup>(2)</sup>             | -104                     | -104                     |
| FACCH/H   |       | [tbd]                         | [tbd]                   | <sup>(2)</sup>             | [tbd]                    | [tbd]                    |
| SACCH   |       | -104                          | -104                    | <sup>(2)</sup>             | -104                     | -104                     |
| <b>DCS 1 800 &amp; PCS 1900</b>   |       |                               |                         |                            |                          |                          |
|   |       | <b>Propagation conditions</b> |                         |                            |                          |                          |
|   |       | <b>Static</b>                 | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>(ideal FH)</b> | <b>RA130<br/>(no FH)</b> | <b>HT100<br/>(no FH)</b> |
| FACCH/F   | (dBm) | <sup>(3)</sup>                | -104                    | <sup>(3)</sup>             | <sup>(3)</sup>           | -104                     |
| FACCH/H   |       | <sup>(3)</sup>                | [tbd]                   | <sup>(3)</sup>             | <sup>(3)</sup>           | [tbd]                    |
| SACCH   |       | <sup>(3)</sup>                | -104                    | <sup>(3)</sup>             | <sup>(3)</sup>           | -104                     |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.  |       |                               |                         |                            |                          |                          |
| NOTE 2: The requirements for GSM 900 & GSM 850 on TU50 (ideal FH) propagation conditions are the same as for TU50 (no FH).  |       |                               |                         |                            |                          |                          |
| NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for the DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |       |                               |                         |                            |                          |                          |

**Table 1j: Input signal level at reference performance for Downlink Advanced Receiver Performance – phase II**

|              |                  | GSM 900 and GSM 850<br>Propagation conditions |                        |                       |                        |
|--------------|------------------|---|------------------------|-----------------------|------------------------|
|              |                  | TU50<br>(noFH)                                |                        | HT100<br>(noFH)       |                        |
|              |                  | Corr. = 0;<br>AGI = 0                         | Corr.=0,7;<br>AGI=-6dB | Corr. = 0;<br>AGI = 0 | Corr.=0,7;<br>AGI=-6dB |
| TCH/FS       | FER (dbm)        | -105,0  | -102,5                 | -105,0                | -102,5                 |
|              | Rber1b           | 0,07%   | 0,08%                  | 0,08%                 | 0,08%                  |
|              | Rber2            | 4,79%   | 4,79%                  | 6,10%                 | 6,09%                  |
| TCH/AFS12.2  | FER (dBm)        | -105,0  | -102,0                 | -105,0                | -102,0                 |
|              | Rber1b           | 0,66%   | 0,64%                  | 0,98%                 | 0,95%                  |
| TCH/AFS7.4   | FER (dBm)        | -105,0  | -104,5                 | -105,0                | -105,0                 |
|              | Rber1b           | 0,18%   | 0,18%                  | 0,22%                 | 0,18%                  |
| TCH/AFS5.9   | FER (dBm)        | -105,0  | -105,0                 | -105,0                | -105,0                 |
|              | Rber1b           | 0,15%   | 0,17%                  | 0,19%                 | 0,20%                  |
| TCH/AHS7.4   | FER (dBm)        | -104,0  | -100,5                 | -103,0                | -98,5                  |
|              | Rber1b           | 0,56%   | 0,54%                  | 0,57%                 | 0,56%                  |
|              | Rber2            | 2,50%   | 2,43%                  | 2,44%                 | 2,31%                  |
| TCH/AHS5.9   | FER (dBm)        | -105,0  | -102,0                 | -104,0                | -99,0                  |
|              | Rber1b           | 0,39%   | 0,69%                  | 0,72%                 | 0,75%                  |
|              | Rber2            | 4,22%   | 3,94%                  | 3,99%                 | 3,88%                  |
| PDTCH CS-1   | BLER (dBm)       | -105,0  | -103,5                 | -105,0                | -102,5                 |
| PDTCH CS-2   | BLER (dBm)       | -105,0  | -101,5                 | -104,0                | -100,0                 |
| PDTCH CS-3   | BLER (dBm)       | -103,5  | -100,0                 | -102,0                | -97,5                  |
| PDTCH CS-4   | BLER (dBm)       | -97,0   | -93,0                  | -92,0                 | -88,0                  |
| PDTCH MCS-1  | BLER (dBm)       | -105,0  | -103,0                 | -105,0                | -101,0                 |
| PDTCH MCS-2  | BLER (dBm)       | -105,0  | -102,0                 | -104,5                | -100,0                 |
| PDTCH MCS-3  | BLER (dBm)       | -102,5  | -99,0                  | -101,0                | -95,5                  |
| PDTCH MCS-4  | BLER (dBm)       | -98,5   | -95,0                  | -93,0                 | -89,0                  |
| PDTCH MCS-5  | BLER (dBm)       | -100,0  | -97,0                  | -98,5                 | -94,0                  |
| PDTCH MCS-6  | BLER (dBm)       | -98,0   | -94,5                  | -96,5                 | -91,5                  |
| PDTCH MCS-7  | BLER (dBm)       | -94,0   | -90,5                  | -90,0                 | -86,0                  |
| PDTCH MCS-8  | BLER (dBm) (30%) | -92,0**                                       | -88,5**                | -87,0**               | -82,5**                |
| PDTCH MCS-9  | BLER (dBm) (30%) | -89,0**                                       | - 85,5**               | -81,0**               | -                      |
| PDTCH DAS-5  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-6  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-7  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-8  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-9  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-10 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-11 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DAS-12 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-5  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-6  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-7  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-8  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-9  | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-10 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-11 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |
| PDTCH DBS-12 | BLER (dBm)       | [td]  | [td]                   | [td]                  | [td]                   |

NOTE: Performance is specified at 30% BLER for those cases identified with mark "\*\*"

NOTE: Performance is not specified for those cases identified with mark "-"

**Table 1j (Continued) :Input signal level at reference performance for Downlink Advanced Receiver Performance – phase II**

|              |                  | DCS 1800 & PCS 1900    |                        |                       |                        |
|--------------|------------------|------------------------|------------------------|-----------------------|------------------------|
|              |                  | Propagation conditions |                        |                       |                        |
|              |                  | TU50<br>(noFH)         |                        | HT100<br>(noFH)       |                        |
|              |                  | Corr. = 0;<br>AGI = 0  | Corr.=0,7;<br>AGI=-6dB | Corr. = 0;<br>AGI = 0 | Corr.=0,7;<br>AGI=-6dB |
| TCH/FS       | FER (dbm)        | -105,0                 | -103,0                 | -105,0                | -102,5                 |
|              | Rber1b           | 0,08%                  | 0,08%                  | 0,08%                 | 0,09%                  |
|              | Rber2            | 6,01%                  | 5,99%                  | 5,95%                 | 6,06%                  |
| TCH/AFS12.2  | FER (dBm)        | -105,0                 | -103,0                 | -105,0                | -102,0                 |
|              | Rber1b           | 0,92%                  | 0,95%                  | 0,93%                 | 1,07%                  |
| TCH/AFS7.4   | FER (dBm)        | -105,0                 | -105,0                 | -105,0                | -104,5                 |
|              | Rber1b           | 0,18%                  | 0,19%                  | 0,25%                 | 0,17%                  |
| TCH/AFS5.9   | FER (dBm)        | -105,0                 | -105,0                 | -105,0                | -105,0                 |
|              | Rber1b           | 0,21%                  | 0,20%                  | 0,20%                 | 0,22%                  |
| TCH/AHS7.4   | FER (dBm)        | -104,0                 | -100,0                 | -102,5                | -98,2                  |
|              | Rber1b           | 0,57%                  | 0,54%                  | 0,64%                 | 0,66%                  |
|              | Rber2            | 2,50%                  | 2,40%                  | 2,46%                 | 2,43%                  |
| TCH/AHS5.9   | FER (dBm)        | -105,0                 | -102,0                 | -104,5                | -100,5                 |
|              | Rber1b           | 0,41%                  | 0,70%                  | 0,77%                 | 0,76%                  |
|              | Rber2            | 4,22%                  | 4,01%                  | 3,93%                 | 3,91%                  |
| PDTCH CS-1   | BLER (dBm)       | -105,0                 | -104,0                 | -105,0                | -103,0                 |
| PDTCH CS-2   | BLER (dBm)       | -105,0                 | -101,5                 | -104,0                | -100,0                 |
| PDTCH CS-3   | BLER (dBm)       | -103,5                 | -100,0                 | -102,0                | -97,5                  |
| PDTCH CS-4   | BLER (dBm)       | -96,5                  | -92,5                  | -92,5                 | -85,5                  |
| PDTCH MCS-1  | BLER (dBm)       | -105,0                 | -103,5                 | -105,0                | -101,0                 |
| PDTCH MCS-2  | BLER (dBm)       | -105,0                 | -102,0                 | -104,0                | -100,0                 |
| PDTCH MCS-3  | BLER (dBm)       | -102,5                 | -99,0                  | -101,0                | -96,0                  |
| PDTCH MCS-4  | BLER (dBm)       | -98,5                  | -94,5                  | -93,5                 | -87,0                  |
| PDTCH MCS-5  | BLER (dBm)       | -100,5                 | -97,5                  | -98,0                 | -93,5                  |
| PDTCH MCS-6  | BLER (dBm)       | -98,5                  | -95,0                  | -96,5                 | -90,5                  |
| PDTCH MCS-7  | BLER (dBm)       | -94,0                  | -90,5                  | -84,0                 | -79,0                  |
| PDTCH MCS-8  | BLER (dBm) (30%) | -91,5**                | -88,0**                | -83,0**               | -78,0**                |
| PDTCH MCS-9  | BLER (dBm) (30%) | -88,0**                | -83,0**                | -                     | -                      |
| PDTCH DAS-5  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-6  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-7  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-8  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-9  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-10 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-11 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DAS-12 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-5  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-6  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-7  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-8  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-9  | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-10 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-11 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |
| PDTCH DBS-12 | BLER (dBm)       | [tbd]                  | [tbd]                  | [tbd]                 | [tbd]                  |

NOTE: Performance is specified at 30% BLER for those cases identified with mark "\*\*"

NOTE: Performance is not specified for those cases identified with mark "-"

**Table 1k: Input signal level (for normal BTS) at reference performance for 16-QAM modulated signals (Normal symbol rate and BTTI) (EGPRS2-A UL)**

| GSM 900 and GSM 850    |     |                        |              |                 |               |               |
|------------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of channel        |     | Propagation conditions |              |                 |               |               |
|                        |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |
| PDTCH/UAS-7            | dBm | -97,5                  | -92          | -93             | -93,5         | -91           |
| PDTCH/UAS-8            | dBm | -96,5                  | -91          | -91,5           | -90,5         | -89           |
| PDTCH/UAS-9            | dBm | -96                    | -89          | -89,5           | -85,5         | -86,5         |
| PDTCH/UAS-10           | dBm | -95                    | -87          | -87             | -84,5**       | -86,5**       |
| PDTCH/UAS-11           | dBm | -93                    | -82,5        | -82             | *             | -80,5**       |
| DCS 1 800 and PCS 1900 |     |                        |              |                 |               |               |
| Type of channel        |     | Propagation conditions |              |                 |               |               |
|                        |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| PDTCH/UAS-7            | dBm | (3)                    | -92,5        | (3)             | (3)           | -85           |
| PDTCH/UAS-8            | dBm | (3)                    | -91          | (3)             | (3)           | -87,5**       |
| PDTCH/UAS-9            | dBm | (3)                    | -89          | (3)             | (3)           | -81,5**       |
| PDTCH/UAS-10           | dBm | (3)                    | -85          | (3)             | (3)           | *             |
| PDTCH/UAS-11           | dBm | (3)                    | -86**        | (3)             | (3)           | *             |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for UAS-x can not meet the reference performance for some propagation conditions (\*).

NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

**Table 1l: Input signal level (for MS) at reference performance for 8-PSK, 16-QAM and 32-QAM modulated signals (Normal symbol rate, BTTI and turbo-coding) (EGPRS2-A DL)**

| GSM 900 and GSM 850 |     |                        |              |                 |               |               |
|---------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of channel     |     | Propagation conditions |              |                 |               |               |
|                     |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) | HT100 (no FH) |
| PDTCH/DAS-5         | dBm | -100                   | -94          | -94,5           | -95,5         | -92           |
| PDTCH/DAS-6         | dBm | -98,5                  | -93          | -94             | -94           | -90,5         |
| PDTCH/DAS-7         | dBm | -97,5                  | -92          | -92,5           | -91,5         | -88           |
| PDTCH/DAS-8         | dBm | -95                    | -89,5        | -90             | -88,5         | -82,5         |
| PDTCH/DAS-9         | dBm | -94                    | -87          | -87,5           | -82,5         | -84,5**       |
| PDTCH/DAS-10        | dBm | -90                    | -83,5        | -84             | -82**         | *             |
| PDTCH/DAS-11        | dBm | -88                    | -78,5        | -79             | *             | *             |
| PDTCH/DAS-12        | dBm | -84                    | -76**        | -76**           | *             | *             |
| USF/DAS-5 to 7      | dBm | (4)                    | (4)          | (4)             | (4)           | (4)           |
| USF/DAS-8 to 9      | dBm | -104,0                 | -98,5        | -101,0          | -102,5        | -100,0        |
| USF/DAS-10 to 12    | dBm | -104,0                 | -98,0        | -99,0           | -101,5        | -99,0         |

(To be continued)



**Table 11: Input signal level (for MS) at reference performance for 8-PSK, 16-QAM and 32-QAM modulated signals (Normal symbol rate, BTTI and turbo-coding) (EGPRS2-A DL) (continued)**

|                  |     | DCS 1800 and PCS 1900  |              |                 |               |               |
|------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of channel  |     | Propagation conditions |              |                 |               |               |
|                  |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| PDTCH/DAS-5      | dBm | (3)                    | -94          | (3)             | (3)           | -92           |
| PDTCH/DAS-6      | dBm | (3)                    | -93,5        | (3)             | (3)           | -90           |
| PDTCH/DAS-7      | dBm | (3)                    | -92          | (3)             | (3)           | -84           |
| PDTCH/DAS-8      | dBm | (3)                    | -89          | (3)             | (3)           | -88**         |
| PDTCH/DAS-9      | dBm | (3)                    | -86          | (3)             | (3)           | -80,5**       |
| PDTCH/DAS-10     | dBm | (3)                    | -82,5        | (3)             | (3)           | *             |
| PDTCH/DAS-11     | dBm | (3)                    | -78,5**      | (3)             | (3)           | *             |
| PDTCH/DAS-12     | dBm | (3)                    | *            | (3)             | (3)           | *             |
| USF/DAS-5 to 7   | dBm | (3)                    | (4)          | (3)             | (3)           | (4)           |
| USF/DAS-8 to 9   | dBm | (3)                    | -100,0       | (3)             | (3)           | -100,0        |
| USF/DAS-10 to 12 | dBm | (3)                    | -99,0        | (3)             | (3)           | -99,0         |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for DAS-x can not meet the reference performance for some propagation conditions (\*).

NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

NOTE 4: The requirements for USF/DAS-5 to 7 are the same as for USF/MCS-5 to 9.

**Table 1m: Input signal level (for normal BTS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate and BTTI) (EGPRS2-B UL)**

|                      |              | GSM 900 and GSM 850    |              |                 |                |                 |                 |
|----------------------|--------------|------------------------|--------------|-----------------|----------------|-----------------|-----------------|
| Type of channel      |              | Propagation conditions |              |                 |                |                 |                 |
|                      |              | static                 | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH)  | HT100 (no FH)   |                 |
| Wanted signal Wide   | PDTCH/UBS-5  | dBm                    | -104,0       | -104,0 / [tbd]  | -104,0 / [tbd] | -104,0 / [tbd]  | -104,0 / [tbd]  |
|                      | PDTCH/UBS-6  | dBm                    | -104,0       | -104,0 / [tbd]  | -104,0 / [tbd] | -104,0 / [tbd]  | -103,5 / [tbd]  |
|                      | PDTCH/UBS-7  | dBm                    | -101,0       | -99,5 / [tbd]   | -100,5 / [tbd] | -101,5 / [tbd]  | -98,5 / [tbd]   |
|                      | PDTCH/UBS-8  | dBm                    | -99,5        | -97,5 / [tbd]   | -98,5 / [tbd]  | -99,5 / [tbd]   | -95,5 / [tbd]   |
|                      | PDTCH/UBS-9  | dBm                    | -98,5        | -96,5 / [tbd]   | -97,0 / [tbd]  | -97,5 / [tbd]   | -93,0 / [tbd]   |
|                      | PDTCH/UBS-10 | dBm                    | -95,0        | -92,5 / [tbd]   | -93,0 / [tbd]  | -93,0 / [tbd]   | -93,5** / [tbd] |
|                      | PDTCH/UBS-11 | dBm                    | -93,0        | -90,0 / [tbd]   | -90,0 / [tbd]  | -92,5** / [tbd] | -89,5** / [tbd] |
|                      | PDTCH/UBS-12 | dBm                    | -91,5        | -88,5 / [tbd]   | -88,5 / [tbd]  | -90,0** / [tbd] | * / [tbd]       |
| Wanted signal Narrow | PDTCH/UBS-5  | dBm                    | -103,5       | -               | -103,5 / [tbd] | -               | -103,5 / [tbd]  |
|                      | PDTCH/UBS-6  | dBm                    | -101,5       | -               | -101,5 / [tbd] | -               | -101,0 / [tbd]  |
|                      | PDTCH/UBS-7  | dBm                    | -95,0        | -               | -95,0 / [tbd]  | -               | -92,5 / [tbd]   |
|                      | PDTCH/UBS-8  | dBm                    | -93,0        | -               | -92,5 / [tbd]  | -               | -88,0 / [tbd]   |
|                      | PDTCH/UBS-9  | dBm                    | -91,5        | -               | -91,5 / [tbd]  | -               | -85,0 / [tbd]   |
|                      | PDTCH/UBS-10 | dBm                    | -88,0        | -               | -87,0 / [tbd]  | -               | * / [tbd]       |
|                      | PDTCH/UBS-11 | dBm                    | -85,5        | -               | -82,0 / [tbd]  | -               | * / [tbd]       |
|                      | PDTCH/UBS-12 | dBm                    | -84,5        | -               | -80,0 / [tbd]  | -               | * / [tbd]       |

**(To be continued)**

**Table 1m: Input signal level (for normal BTS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate and BTTI) (EGPRS2-B UL) (continued)**

| DCS 1 800 and PCS 1900  |              |     |                        |                |                 |               |                 |
|---|--------------|-----|------------------------|----------------|-----------------|---------------|-----------------|
| Type of channel   |              |     | Propagation conditions |                |                 |               |                 |
|   |              |     | static                 | TU50 (no FH)   | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH)   |
| Wanted signal<br>Wide   | PDTCH/UBS-5  | dBm | (3)                    | -104,0 / [tbd] | (3)             | (3)           | -104,0 / [tbd]  |
|   | PDTCH/UBS-6  | dBm | (3)                    | -104,0 / [tbd] | (3)             | (3)           | -104,0 / [tbd]  |
|   | PDTCH/UBS-7  | dBm | (3)                    | -100,5 / [tbd] | (3)             | (3)           | -97,5 / [tbd]   |
|   | PDTCH/UBS-8  | dBm | (3)                    | -98,5 / [tbd]  | (3)             | (3)           | -97,0 / [tbd]   |
|   | PDTCH/UBS-9  | dBm | (3)                    | -97,0 / [tbd]  | (3)             | (3)           | -94,5 / [tbd]   |
|   | PDTCH/UBS-10 | dBm | (3)                    | -92,5 / [tbd]  | (3)             | (3)           | -91,5** / [tbd] |
|   | PDTCH/UBS-11 | dBm | (3)                    | -88,5 / [tbd]  | (3)             | (3)           | * / [tbd]       |
|   | PDTCH/UBS-12 | dBm | (3)                    | -86,5 / [tbd]  | (3)             | (3)           | * / [tbd]       |
| Wanted signal<br>Narrow   | PDTCH/UBS-5  | dBm | (3)                    | -              | (4)             | -             | -103,5 / [tbd]  |
|   | PDTCH/UBS-6  | dBm | (3)                    | -              | (4)             | -             | -101,0 / [tbd]  |
|   | PDTCH/UBS-7  | dBm | (3)                    | -              | (4)             | -             | -89,5 / [tbd]   |
|   | PDTCH/UBS-8  | dBm | (3)                    | -              | (4)             | -             | -92,0** / [tbd] |
|   | PDTCH/UBS-9  | dBm | (3)                    | -              | (4)             | -             | -88,5** / [tbd] |
|   | PDTCH/UBS-10 | dBm | (3)                    | -              | (4)             | -             | * / [tbd]       |
|   | PDTCH/UBS-11 | dBm | (3)                    | -              | (4)             | -             | * / [tbd]       |
|   | PDTCH/UBS-12 | dBm | (3)                    | -              | (4)             | -             | * / [tbd]       |
| Performance is specified at 30% BLER for those cases identified with mark **.   |              |     |                        |                |                 |               |                 |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.  |              |     |                        |                |                 |               |                 |
| NOTE 2: PDTCH for UBS-x can not meet the reference performance for some propagation conditions (*).   |              |     |                        |                |                 |               |                 |
| NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |              |     |                        |                |                 |               |                 |
| NOTE 4: The requirements for the DCS 1800 & PCS 1900 TU50 (ideal FH) propagation condition are the same as for the GSM 850 & GSM 900 TU50 (ideal FH) propagation condition.   |              |     |                        |                |                 |               |                 |
| NOTE 5: For non-static conditions RX diversity requirements are given by the left numbers. Requirements without RX diversity are given by the right numbers.  |              |     |                        |                |                 |               |                 |

**Table 1n: Input signal level (for MS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI and turbo coding) (EGPRS2-B DL)**

| <b>GSM 900 and GSM 850</b> |     |                               |                         |                            |                          |                          |
|----------------------------|-----|-------------------------------|-------------------------|----------------------------|--------------------------|--------------------------|
| <b>Type of channel</b>     |     | <b>Propagation conditions</b> |                         |                            |                          |                          |
|                            |     | <b>static</b>                 | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>(ideal FH)</b> | <b>RA250<br/>(no FH)</b> | <b>HT100<br/>(no FH)</b> |
| PDTCH/DBS-5                | dBm | -100,5                        | -94,5                   | -95,0                      | -98,0                    | -95,0                    |
| PDTCH/DBS-6                | dBm | -100,0                        | -92,5                   | -92,5                      | -94,5                    | -90,0                    |
| PDTCH/DBS-7                | dBm | -93,5                         | -88,0                   | -89,0                      | -90,0                    | *                        |
| PDTCH/DBS-8                | dBm | -92,0                         | -85,5                   | -86,0                      | -85,0                    | *                        |
| PDTCH/DBS-9                | dBm | -90,5                         | -83,0                   | -83,5                      | -80,0                    | *                        |
| PDTCH/DBS-10               | dBm | -86,5                         | -77,5                   | -78,0                      | *                        | *                        |
| PDTCH/DBS-11               | dBm | -84,5                         | -78,0**                 | -79,5**                    | *                        | *                        |
| PDTCH/DBS-12               | dBm | -80,5                         | -75,0**                 | -76,0**                    | *                        | *                        |
| USF/DBS-5 to 6             | dBm | [-104,0]                      | [-102,0]                | [-102,5]                   | [-103,5]                 | [-102,5]                 |
| USF/DBS-7 to 9             | dBm | [-104,0]                      | [-104,0]                | [-104,0]                   | [-104,0]                 | [-104,0]                 |
| USF/DBS-10 to 12           | dBm | [-104,0]                      | [-104,0]                | [-104,0]                   | [-104,0]                 | [-104,0]                 |

**(To be continued)**

**Table 1n: Input signal level (for MS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI and turbo coding) (EGPRS2-B DL) (continued)**

| DCS 1 800 and PCS 1900 |     |                        |              |                 |               |               |
|------------------------|-----|------------------------|--------------|-----------------|---------------|---------------|
| Type of channel        |     | Propagation conditions |              |                 |               |               |
|                        |     | static                 | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) | HT100 (no FH) |
| PDTCH/DBS-5            | dBm | (3)                    | -94,5        | (3)             | (3)           | -94,0         |
| PDTCH/DBS-6            | dBm | (3)                    | -92,0        | (3)             | (3)           | -87,5         |
| PDTCH/DBS-7            | dBm | (3)                    | -88,0        | (3)             | (3)           | *             |
| PDTCH/DBS-8            | dBm | (3)                    | -84,5        | (3)             | (3)           | *             |
| PDTCH/DBS-9            | dBm | (3)                    | -83,0        | (3)             | (3)           | *             |
| PDTCH/DBS-10           | dBm | (3)                    | -75,0        | (3)             | (3)           | *             |
| PDTCH/DBS-11           | dBm | (3)                    | -75,0        | (3)             | (3)           | *             |
| PDTCH/DBS-12           | dBm | (3)                    | *            | (3)             | (3)           | *             |
| USF/DBS-5 to 6         | dBm | (3)                    | [-103,0]     | (3)             | (3)           | [-103,0]      |
| USF/DBS-7 to 9         | dBm | (3)                    | [-104,0]     | (3)             | (3)           | [-104,0]      |
| USF/DBS-10 to 12       | dBm | (3)                    | [-104,0]     | (3)             | (3)           | [-104,0]      |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for DBS-x can not meet the reference performance for some propagation conditions (\*).

NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

**Table 1o: Input signal level (for MS) at reference performance for GMSK, QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals with PAN included; BTTI and RTTI (EGPRS2 DL and EGPRS DL)**

| All GSM bands   |     |                        |
|-----------------|-----|------------------------|
| Type of channel |     | Propagation conditions |
|                 |     | Static                 |
| PDTCH/MCS -1    | dBm | -104,0                 |
| PDTCH/MCS-2     | dBm | -104,0                 |
| PDTCH/MCS-3     | dBm | -101,5                 |
| PDTCH/MCS-5     | dBm | -99,0                  |
| PDTCH/MCS-6     | dBm | -97,0                  |
| PDTCH/MCS-7     | dBm | -94,0                  |
| PDTCH/MCS-8     | dBm | -90,5                  |
| PDTCH/DAS-5     | dBm | -100,0                 |
| PDTCH/DAS-6     | dBm | -99,0                  |
| PDTCH/DAS-7     | dBm | -97,5                  |
| PDTCH/DAS-8     | dBm | -95,5                  |
| PDTCH/DAS-9     | dBm | -94,0                  |
| PDTCH/DAS-10    | dBm | -91,0                  |
| PDTCH/DAS-11    | dBm | -89,0                  |
| PDTCH/DAS-12    | dBm | -84,5                  |
| PDTCH/DBS-5     | dBm | [-102,5]               |
| PDTCH/DBS-6     | dBm | [-100,5]               |
| PDTCH/DBS-7     | dBm | [-97,0]                |
| PDTCH/DBS-      | dBm | [-94,5]                |
| PDTCH/DBS-9     | dBm | [-92,5]                |
| PDTCH/DBS-10    | dBm | [-88,5]                |
| PDTCH/DBS-11    | dBm | [-84,0]                |
| PDTCH/DBS-12    | dBm | [-77,5]                |

**Table 1p: Input signal level (for normal BTS) at reference performance for GMSK, QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals with PAN included;  
BTI and RTTI  
(EGPRS2 UL and EGPRS UL)**

| All GSM bands   |     |                       |
|-----------------|-----|-----------------------|
| Type of channel |     | Propagation condition |
|                 |     | Static                |
| PDTCH/MCS-1     | dBm | -104                  |
| PDTCH/MCS-2     | dBm | -104                  |
| PDTCH/MCS-3     | dBm | -104                  |
| PDTCH/MCS-5     | dBm | -101                  |
| PDTCH/MCS-6     | dBm | -99,5                 |
| PDTCH/MCS-7     | dBm | -96                   |
| PDTCH/MCS-8     | dBm | -93                   |
| PDTCH/UAS-7     | dBm | -97                   |
| PDTCH/UAS-8     | dBm | -96,5                 |
| PDTCH/UAS-9     | dBm | -95,5                 |
| PDTCH/UAS-10    | dBm | -94,5                 |
| PDTCH/UAS-11    | dBm | -92,5                 |
| PDTCH/UBS-5     | dBm | -104                  |
| PDTCH/UBS-6     | dBm | -104                  |
| PDTCH/UBS-7     | dBm | -101                  |
| PDTCH/UBS-8     | dBm | -99,5                 |
| PDTCH/UBS-9     | dBm | -98,5                 |
| PDTCH/UBS-10    | dBm | -95                   |
| PDTCH/UBS-11    | dBm | -92                   |
| PDTCH/UBS-12    | dBm | -89,5                 |

**Table 1q: Input signal level (for normal BTS) at reference performance of PAN for GMSK, QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals (EGPRS2 UL and EGPRS UL); BTTI and RTTI**

| All GSM bands      |     |                        |
|--------------------|-----|------------------------|
| Type of channel    |     | Propagation conditions |
|                    |     | Static                 |
| PDTCH/MCS-1 to 3   | dBm | -104                   |
| PDTCH/MCS-5 to 6   | dBm | -104                   |
| PDTCH/MCS-7        | dBm | -104                   |
| PDTCH/MCS-8        | dBm | -104                   |
| PDTCH/UAS-7 to 9   | dBm | -104                   |
| PDTCH/UAS-10       | dBm | -104                   |
| PDTCH/UAS-11       | dBm | -104                   |
| PDTCH/UBS-5 to 6   | dBm | -104                   |
| PDTCH/UBS-7 to 8   | dBm | -104                   |
| PDTCH/UBS-9        | dBm | -104                   |
| PDTCH/UBS-10       | dBm | -104                   |
| PDTCH/UBS-11 to 12 | dBm | -104                   |

**Table 1r: Input signal level (for MS) at reference performance of PAN for GMSK, QPSK, 8-PSK, 16-QAM and 32-QAM modulated signals (EGPRS2 DL and EGPRS DL) ; BTTI and RTTI**

| All GSM bands      |     |                        |
|--------------------|-----|------------------------|
| Type of channel    |     | Propagation conditions |
|                    |     | Static                 |
| PDTCH/MCS-1 to 3   | dBm | -104,0                 |
| PDTCH/MCS-5 to 6   | dBm | -101,5                 |
| PDTCH/MCS-7        | dBm | -101,0                 |
| PDTCH/MCS-8        | dBm | -100,5                 |
| PDTCH/DAS-5 to 7   | dBm | (note 1)               |
| PDTCH/DAS-8 to 9   | dBm | -101,0                 |
| PDTCH/DAS-10       | dBm | -99,0                  |
| PDTCH/DAS-11       | dBm | -98,0                  |
| PDTCH/DAS-12       | dBm | -98,0                  |
| PDTCH/DBS-5 to 6   | dBm | [-104,0]               |
| PDTCH/DBS-7 to 8   | dBm | [-101,0]               |
| PDTCH/DBS-9        | dBm | [-101,0]               |
| PDTCH/DBS-10       | dBm | [-97,5]                |
| PDTCH/DBS-11 to 12 | dBm | [-95,0]                |

Note 1: The requirement for PDTCH/DAS-5 to 7 is the same as PDTCH/MCS-5 to 6.

**Table 1s: Input signal level for VAMOS I MS at reference performance for speech channels in VAMOS mode**

| Type of channel |           | Propagation conditions: TU50 no FH |        |        |                     |        |       |
|-----------------|-----------|------------------------------------|--------|--------|---------------------|--------|-------|
|                 |           | GSM 900 and GSM 850                |        |        | DCS 1800 & PCS 1900 |        |       |
| SCPIR_DL        |           | +4 dB                              | 0 dB   | -4 dB  | +4 dB               | 0 dB   | -4 dB |
| TCH/HS          | FER (dBm) | -99                                | -96,5  | -92,5  | -98,5               | -96    | -92,5 |
|                 | RBER1b    | 0,31 %                             | 0,2 %  | 0,2%   | 0,27 %              | 0,27 % | 0,2 % |
| TCH/EFS         | RBER2     | 5,7 %                              | 6,1 %  | 5,6 %  | 5,4 %               | 5,3 %  | 5,5 % |
|                 | FER (dBm) | -97,5                              | -95    | -92    | -98,5               | -96    | -92,5 |
|                 | RBER1b    | 0,04 %                             | 0,05 % | 0,05 % | 0,05 %              | 0,05 % | 0,1 % |

|                  |           |        |        |        |        |        |        |
|------------------|-----------|--------|--------|--------|--------|--------|--------|
| TCH/AFS12.2      | RBER2     | 3,6 %  | 4,2 %  | 4,01 % | 4,5 %  | 5,3 %  | 5 %    |
|                  | FER (dBm) | -97,5  | -94,5  | -91,5  | -98,5  | -96    | -92,5  |
| TCH/AFS4.75      | RBER1b    | 0,6 %  | 0,5 %  | 0,6 %  | 0,7 %  | 0,9 %  | 0,7 %  |
|                  | FER (dBm) | -103   | -101   | -98    | -104   | -101,5 | -98,5  |
| TCH/AHS7.4       | RBER1b    | 0,1 %  | 0,15 % | 0,17 % | 0,17 % | 0,15 % | 0,2 %  |
|                  | FER (dBm) | -95    | -92,5  | -89    | -95    | -92    | -88,5  |
| TCH/AHS4.75      | RBER1b    | 0,15 % | 0,2 %  | 0,17 % | 0,15 % | 0,2 %  | 0,2 %  |
|                  | RBER2     | 1,8 %  | 2,3 %  | 2 %    | 1,7 %  | 2,3 %  | 2 %    |
|                  | FER (dBm) | -99,5  | -97    | -94    | -100   | -96,5  | -93,5  |
| TCH/WFS12.65     | RBER1b    | 0,2 %  | 0,2 %  | 0,2 %  | 0,16 % | 0,15 % | 0,2 %  |
|                  | RBER2     | 5,88 % | 6,6 %  | 6,74 % | 5,9 %  | 5,9 %  | 6 %    |
|                  | FER (dBm) | -97,5  | -94,5  | -91,5  | -98,5  | -96    | -92,5  |
| TCH/WFS6.60      | RBER1b    | 0,4 %  | 0,4 %  | 0,3 %  | 0,6 %  | 0,7 %  | 0,5 %  |
|                  | FER (dBm) | -101   | -98,5  | -94    | -102   | -99,5  | -96,5  |
|                  | RBER1b    | 0,2 %  | 0,26 % | 0,23 % | 0,25 % | 0,36 % | 0,32 % |
| FACCH/F          | FER       | -100   | -97    | -93,5  | -100,5 | -98    | -94,5  |
| FACCH/H          | FER       | -100   | -97    | -94    | -100   | -97    | -94    |
| SACCH            | FER       | -100   | -97    | -93,5  | -100   | -97    | -93,5  |
| Repeated FACCH/F | FER       | -      | -98,5  | -      | -      | -99    | -      |
| Repeated SACCH   | FER       | -      | -100,5 | -      | -      | -100,5 | -      |

**Table 1t: Input signal level for VAMOS II MS at reference performance for speech channels in VAMOS mode**

| GSM 900 and GSM 850 |           |                        |        |        |        |        |
|---------------------|-----------|------------------------|--------|--------|--------|--------|
| Type of channel     |           | Propagation conditions |        |        |        |        |
|                     |           | TU50 no FH             |        |        |        |        |
| SCPIR_DL            |           | +4 dB                  | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS              | FER (dBm) | -100                   | -97,5  | -96,5  | -93,5  | -91,5  |
|                     | RBER1b    | 0,12 %                 | 0,12 % | 0,11 % | 0,15 % | 0,15 % |
| TCH/EFS             | RBER2     | 5,27 %                 | 4,94 % | 4,84 % | 5,65 % | 5,98 % |
|                     | FER (dBm) | -99                    | -97    | -96    | -92,5  | -90,5  |
| TCH/AFS12.2         | RBER1b    | 0,03 %                 | 0,03 % | 0,06 % | 0,04 % | 0,03 % |
|                     | RBER2     | 4,31 %                 | 3,93 % | 4,21 % | 4,52 % | 4,81 % |
| TCH/AFS4.75         | FER (dBm) | -99,5                  | -97    | -95,5  | -92,5  | -91    |
|                     | RBER1b    | 0,74 %                 | 0,62 % | 0,46 % | 0,51 % | 0,93 % |
| TCH/AHS7.4          | FER (dBm) | -104,5                 | -103   | -101,5 | -98,5  | -96,5  |
|                     | RBER1b    | 0,11 %                 | 0,17 % | 0,15 % | 0,15 % | 0,11 % |
| TCH/AHS4.75         | FER (dBm) | -97                    | -94,5  | -93    | -90,5  | -88    |
|                     | RBER1b    | 0,26 %                 | 0,22 % | 0,12 % | 0,23 % | 0,25 % |
|                     | RBER2     | 2,67 %                 | 2,41 % | 1,91 % | 2,77 % | 2,95 % |
| TCH/WFS12.65        | FER (dBm) | -101                   | -99    | -97,5  | -94,5  | -92,5  |
|                     | RBER1b    | 0,12 %                 | 0,19 % | 0,14 % | 0,16 % | 0,13 % |
| TCH/WFS6.60         | RBER2     | 6,1 %                  | 6,63 % | 6,01 % | 6,2 %  | 6,9 %  |
|                     | FER (dBm) | -99                    | -97    | -95,5  | -92,5  | -91    |
| TCH/WFS6.60         | RBER1b    | 0,35 %                 | 0,51 % | 0,36 % | 0,38 % | 0,66 % |
|                     | FER (dBm) | -102                   | -99,5  | -99    | -96,5  | -94,5  |
| FACCH/F             | RBER1b    | 0,25 %                 | 0,24 % | 0,17 % | 0,27 % | 0,17 % |
|                     | FER       | -100                   | -97,5  | -96    | -93,5  | -91,5  |
| FACCH/H             | FER       | -100                   | -98    | -96,5  | -93,5  | -91,5  |
| SACCH               | FER       | -100                   | -97,5  | -96    | -93    | -91    |
| Repeated FACCH/F    | FER       | -                      | -101   | -      | -      | -      |
| Repeated SACCH      | FER       | -                      | -102,5 | -      | -      | -      |



| DCS 1800 & PCS 1900 |           |                        |        |        |        |        |
|---------------------|-----------|------------------------|--------|--------|--------|--------|
| Type of channel     |           | Propagation conditions |        |        |        |        |
|                     |           | TU50 no FH             |        |        |        |        |
| SCPIR_DL            |           | +4 dB                  | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS              | FER (dBm) | -99                    | -97    | -95,5  | -91,5  | -90    |
|                     | RBER1b    | 0,23 %                 | 0,17 % | 0,2 %  | 0,21 % | 0,23 % |
|                     | RBER2     | 6,01 %                 | 5,57 % | 5,5 %  | 5,68 % | 5,98 % |
| TCH/EFS             | FER (dBm) | -99,5                  | -98    | -96    | -92,5  | -90,5  |
|                     | RBER1b    | 0,07 %                 | 0,06 % | 0,06 % | 0,06 % | 0,06 % |
|                     | RBER2     | 5,18 %                 | 5,13 % | 5,09 % | 5,66 % | 6,14 % |
| TCH/AFS12.2         | FER (dBm) | -99,5                  | -98    | -96    | -92,5  | -90,5  |
|                     | RBER1b    | 0,94 %                 | 1,06 % | 0,77 % | 0,92 % | 0,94 % |
| TCH/AFS4.75         | FER (dBm) | -105,5                 | -103,5 | -101,5 | -98    | -96,5  |
|                     | RBER1b    | 0,2 %                  | 0,17 % | 0,18 % | 0,16 % | 0,2 %  |
| TCH/AHS7.4          | FER (dBm) | -96                    | -94,5  | -92    | -88,5  | -86    |
|                     | RBER1b    | 0,17 %                 | 0,24 % | 0,16 % | 0,18 % | 0,22 % |
|                     | RBER2     | 1,9 %                  | 2,35 % | 1,79 % | 2,46 % | 2,85 % |
| TCH/AHS4.75         | FER (dBm) | -100,5                 | -98,5  | -96,5  | -93    | -91    |
|                     | RBER1b    | 0,17 %                 | 0,15 % | 0,12 % | 0,15 % | 0,15 % |
|                     | RBER2     | 6,12 %                 | 5,79 % | 5,76 % | 6,55 % | 6,6 %  |
| TCH/WFS12.65        | FER (dBm) | -99,5                  | -98    | -96    | -92,5  | -90,5  |
|                     | RBER1b    | 0,53 %                 | 0,82 % | 0,59 % | 0,64 % | 0,72 % |
| TCH/WFS6.60         | FER (dBm) | -103,5                 | -100   | -99,5  | -96,5  | -94,5  |
|                     | RBER1b    | 0,33 %                 | 0,31 % | 0,18 % | 0,24 % | 0,26 % |
| FACCH/F             | FER       | -100,5                 | -98,5  | -97    | -94    | -92    |
| FACCH/H             | FER       | -100                   | -98    | -96,5  | -93    | -91    |
| SACCH               | FER       | -100                   | -97,5  | -96    | -92,5  | -90,5  |
| Repeated FACCH/F    | FER       | -                      | -101,5 | -      | -      | -      |
| Repeated SACCH      | FER       | -                      | -102,5 | -      | -      | -      |

Table 1u: Performance requirement for VAMOS II MS for downlink DTX scenario according to subclause Q.6

| SCPIR_DL = -10 dB, TU 50 noFH |            |                     |                     |
|-------------------------------|------------|---------------------|---------------------|
| Type of channel               |            | GSM 900 and GSM 850 | DCS 1800 & PCS 1900 |
| TCH/AHS 7.4                   | FER (dBm)  | -88                 | -87                 |
|                               | RBER1b (%) | 0,25                | 0,28                |
|                               | RBER2 (%)  | 2,28                | 2,7                 |

Table 1v: Input signal level for normal BTS at reference performance for speech and associated control channels in VAMOS mode

| Type of channel |           | Propagation conditions: TU 50 no FH |        |                     |        |
|-----------------|-----------|-------------------------------------|--------|---------------------|--------|
|                 |           | GSM 900 and GSM 850                 |        | DCS 1800 & PCS 1900 |        |
| SCPIR_UL        |           | 0 dB                                | -10 dB | 0 dB                | -10 dB |
| TCH/HS          | FER (dBm) | -108                                | -108,5 | -107,5              | -108   |
|                 | Rber1b    | 0.21%                               | 0.16%  | 0.19%               | 0.15%  |
|                 | Rber2     | 5.48%                               | 5.00%  | 5.10%               | 5.00%  |
| TCH/EFS         | FER (dBm) | -106.5                              | -107   | -106.5              | -106.5 |
|                 | Rber1b    | 0.04%                               | 0.04%  | 0.04%               | 0.04%  |
|                 | Rber2     | 3.52%                               | 3.60%  | 3.95%               | 4.20%  |
| TCH/AFS 12.2    | FER (dBm) | -106.5                              | -107.5 | -106.5              | -107   |
|                 | Rber1b    | 0.45%                               | 0.52%  | 0.60%               | 0.67%  |

|                |           |        |        |        |        |
|----------------|-----------|--------|--------|--------|--------|
| TCH/AFS 4.75   | FER (dBm) | -112   | -      | -113   | -      |
|                | Rber1b    | 0.14%  | -      | 0.17%  | -      |
| TCH/AHS 7.4    | FER (dBm) | -104   | -105   | -103.5 | -103.5 |
|                | Rber1b    | 0.16%  | 0.18%  | 0.16%  | 0.29%  |
|                | Rber2     | 1.54%  | 2.10%  | 1.55%  | 2.12%  |
| TCH/AHS 4.75   | FER (dBm) | -108.5 | -      | -108.5 | -      |
|                | Rber1b    | 0.18%  | -      | 0.18%  | -      |
|                | Rber2     | 6.30%  | -      | 6.59%  | -      |
| TCH/WFS 12.65  | FER (dBm) | -106.5 | -107.5 | -106.5 | -107   |
|                | Rber1b    | 0.40%  | 0.40%  | 0.41%  | 0.48%  |
| TCH/WFS 6.60   | FER (dBm) | -110.5 | -      | -111   | -      |
|                | Rber1b    | 0.20%  | -      | 0.21%  | -      |
| FACCH/F        | FER       | -108.5 | -      | -109   | -      |
| FACCH/H        | FER       | -108.5 | -      | -108.5 | -      |
| SACCH          | FER       | -108.5 | -      | -108.5 | -      |
| Repeated SACCH | FER       | -113.5 | -      | -113   | -      |

Table 1w: Input signal level (for MS) at reference performance for TIGHTER

| Type of Channel |             | GSM 900 and GSM 850    |                 |                    |                  |                  |
|-----------------|-------------|------------------------|-----------------|--------------------|------------------|------------------|
|                 |             | Propagation conditions |                 |                    |                  |                  |
|                 |             | Static                 | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) | HT100<br>(no FH) |
| FACCH/H         | dBm         | -110                   | -106            | -106               | -106,5           | -105             |
| FACCH/F         | dBm         | -110                   | -105,5          | -106,5             | -106,5           | -105,5           |
| SDCCH           | dBm         | -110                   | -104,5          | -105,5             | -105,5           | -104,5           |
| SCH             | dBm         | -110                   | -101            | -101               | -98              | -100,5           |
| TCH/FS          | dBm         | -109,5                 | -103            | -105               | -105             | -103             |
|                 | RBBER1b (%) | 0,07                   | 0,06            | 0,07               | 0,07             | 0,06             |
|                 | RBBER2 (%)  | 6,58                   | 4,1             | 6,13               | 6,55             | 5,49             |
| TCH/EFS         | dBm         | -109                   | -103            | -105               | -105             | -103,5           |
|                 | RBBER1b (%) | 0,03                   | 0,03            | 0,09               | 0,06             | 0,04             |
|                 | RBBER2 (%)  | 6,22                   | 3,29            | 5,87               | 6,19             | 5,34             |
| TCH/HS          | dBm         | -109,5                 | -104            | -104               | -104             | -102,5           |
|                 | RBBER1b (%) | 0,2                    | 0,24            | 0,22               | 0,15             | 0,22             |
|                 | RBBER2 (%)  | 5,48                   | 5,09            | 5,76               | 5,83             | 5,12             |
| TCH/AFS12.2     | dBm         | -109,5                 | <sup>(4)</sup>  | -105               | -105,5           | -104             |
|                 | RBBER1b (%) | 2,12                   | <sup>(4)</sup>  | 0,88               | 1,38             | 1,12             |
| TCH/AFS10.2     | dBm         | -110                   | <sup>(4)</sup>  | -106               | -106,5           | -105             |
|                 | RBBER1b (%) | 0,5                    | <sup>(4)</sup>  | 0,15               | 0,31             | 0,18             |
| TCH/AFS7.95     | dBm         | -                      | <sup>(4)</sup>  | -108               | -108,5           | -107             |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,37               | 0,57             | 0,41             |
| TCH/AFS7.4      | dBm         | -                      | <sup>(4)</sup>  | -108               | -108,5           | -107             |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,17               | 0,18             | 0,17             |
| TCH/AFS6.7      | dBm         | -                      | <sup>(4)</sup>  | -108,5             | -109             | -108             |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,63               | 0,79             | 0,58             |
| TCH/AFS5.9      | dBm         | -                      | <sup>(4)</sup>  | -109               | -109,5           | -108,5           |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,156              | 0,19             | 0,19             |
| TCH/AFS5.15     | dBm         | -                      | <sup>(4)</sup>  | -109,5             | -110             | -109             |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,23               | 0,32             | 0,33             |
| TCH/AFS4.75     | dBm         | -                      | <sup>(4)</sup>  | -110               | -110             | -108,5           |
|                 | RBBER1b (%) | -                      | <sup>(4)</sup>  | 0,19               | 0,16             | 0,15             |
| TCH/AHS7.95     | dBm         | -107,5                 | <sup>(4)</sup>  | -101               | -98,5            | -99              |
|                 | RBBER1b (%) | 0,79                   | <sup>(4)</sup>  | 0,44               | 0,44             | 0,43             |
|                 | RBBER2 (%)  | 3,58                   | <sup>(4)</sup>  | 2,06               | 1,91             | 2                |
| TCH/AHS7.4      | dBm         | -108                   | <sup>(4)</sup>  | -101,5             | -99,5            | -100             |
|                 | RBBER1b (%) | 0,44                   | <sup>(4)</sup>  | 0,23               | 0,19             | 0,23             |
|                 | RBBER2 (%)  | 4,14                   | <sup>(4)</sup>  | 2,49               | 2,35             | 2,37             |
| TCH/AHS6.7      | dBm         | -109                   | <sup>(4)</sup>  | -102,5             | -101,5           | -101,5           |
|                 | RBBER1b (%) | 0,58                   | <sup>(4)</sup>  | 0,3                | 0,29             | 0,28             |
|                 | RBBER2 (%)  | 5,51                   | <sup>(4)</sup>  | 3,44               | 3,42             | 3,35             |
| TCH/AHS5.9      | dBm         | -109,5                 | <sup>(4)</sup>  | -103,5             | -103             | -102,5           |
|                 | RBBER1b (%) | 0,33                   | <sup>(4)</sup>  | 0,17               | 0,17             | 0,17             |
|                 | RBBER2 (%)  | 6,59                   | <sup>(4)</sup>  | 4,27               | 4,24             | 4,08             |
| TCH/AHS5.15     | dBm         | -110                   | <sup>(4)</sup>  | -104,5             | -104,5           | -104             |
|                 | RBBER1b (%) | 0,78                   | <sup>(4)</sup>  | 0,25               | 0,33             | 0,32             |
|                 | RBBER2 (%)  | 8,36                   | <sup>(4)</sup>  | 5,16               | 5,82             | 5,41             |
| TCH/AHS4.75     | dBm         | -111                   | <sup>(4)</sup>  | -105               | -104,5           | -103,5           |
|                 | RBBER1b (%) | 0,38                   | <sup>(4)</sup>  | 0,14               | 0,13             | 0,13             |
|                 | RBBER2 (%)  | 10,33                  | <sup>(4)</sup>  | 6,32               | 5,99             | 5,91             |
| TCH/WFS12.65    | dBm         | -109                   | -103,5          | <sup>(3)</sup>     | -105             | -102             |
|                 | RBBER1b (%) | 0,5                    | 0,35            | <sup>(3)</sup>     | 0,72             | 0,62             |
| TCH/ WFS8.85    | dBm         | -109                   | -102            | <sup>(3)</sup>     | -108             | -105             |
|                 | RBBER1b (%) | 0,5                    | 0,38            | <sup>(3)</sup>     | 0,72             | 0,62             |
| TCH/ WFS6.60    | dBm         | -109                   | -103            | <sup>(3)</sup>     | -108             | -106,5           |

|                    |             |          |         |                          |                      |           |
|--------------------|-------------|----------|---------|--------------------------|----------------------|-----------|
|                    | RB ER1b (%) | 0,24     | 0,15    | <sup>(3)</sup>           | 0,19                 | 0,24      |
| PDTCH/CS-1         | dBm         | -105     | -106    | -106                     | -105,5               | -104,5    |
| PDTCH/CS-2         | dBm         | -105     | -102    | -103                     | -102,5               | -100,5    |
| PDTCH/CS-3         | dBm         | -105     | -100    | -101                     | -99,5                | -97,5     |
| PDTCH/CS-4         | dBm         | [-102]   | [-92]   | [-92]                    | -                    | -         |
| PDTCH/MCS-1        | dBm         | -105,5   | -105    | -105,5                   | -105,5               | -103      |
| PDTCH/MCS-2        | dBm         | -105,5   | -103    | -103,5                   | -103                 | -101      |
| PDTCH/MCS-3        | dBm         | -105,5   | -99     | -99                      | -95                  | -96,5     |
| PDTCH/MCS-4        | dBm         | -103     | -93,5   | -93,5                    | -                    | -         |
| PDTCH/MCS-5        | dBm         | -101,5   | -97,5   | -98,5                    | -99                  | -97,5     |
| PDTCH/MCS-6        | dBm         | -99,5    | -95,5   | -96                      | -94                  | -94,5     |
| PDTCH/MCS-7        | dBm         | -96,5    | -88,5   | -88,5                    | -                    | -88,5**   |
| PDTCH/MCS-8        | dBm         | -94      | -87,5** | -87,5**                  | -                    | -         |
| PDTCH/MCS-9        | dBm         | -89,5    | -83**   | -83**                    | -                    | -         |
| PDTCH/DAS-5        | dBm         | [-103,5] | [-97,5] | [-98]                    | [-98,5]              | [-98]     |
| PDTCH/DAS-6        | dBm         | [-102]   | [-96,5] | [-97,5]                  | [-97]                | [-96,5]   |
| PDTCH/DAS-7        | dBm         | [-101]   | [-95,5] | [-96]                    | [-94,5]              | [-94]     |
| PDTCH/DAS-8        | dBm         | [-98]    | [-93]   | [-93,5]                  | [-91,5]              | [-88,5]   |
| PDTCH/DAS-9        | dBm         | [-97]    | [-90,5] | [-91]                    | [-85,5]              | [-90,5**] |
| PDTCH/DAS-10       | dBm         | [-93,5]  | [-87,5] | [-88]                    | [-87**]              | -         |
| PDTCH/DAS-11       | dBm         | [-91,5]  | [-82,5] | [-83]                    | -                    | -         |
| PDTCH/DAS-12       | dBm         | [-87,5]  | [-80**] | [-80**]                  | -                    | -         |
| PDTCH/DBS-5        | dBm         | [-103,5] | [-99]   | [-100]                   | [-98]                | [-98,5]   |
| PDTCH/DBS-6        | dBm         | [-103]   | [-97]   | [-97,5]                  | [-94,5]              | [-93,5]   |
| PDTCH/DBS-7        | dBm         | [-96]    | [-91,5] | [-92]                    | [-90] <sup>(5)</sup> | -         |
| PDTCH/DBS-8        | dBm         | [-94,5]  | [-89]   | [-89]                    | [-85] <sup>(5)</sup> | -         |
| PDTCH/DBS-9        | dBm         | [-93]    | [-86,5] | [-86,5]                  | [-80] <sup>(5)</sup> | -         |
| PDTCH/DBS-10       | dBm         | [-89]    | [-80,5] | [-78] <sup>(5)</sup>     | -                    | -         |
| PDTCH/DBS-11       | dBm         | [-87]    | [-81**] | [-79,5**] <sup>(5)</sup> | -                    | -         |
| PDTCH/DBS-12       | dBm         | [-83]    | [-78**] | [-76**] <sup>(5)</sup>   | -                    | -         |
| <b>(Continued)</b> |             |          |         |                          |                      |           |

Table 1w (continued): Input signal level (for MS) at reference performance for TIGHTER

| Type of channel |             | DCS 1 800 and PCS 1900 |                 |                    |                  |                  |
|-----------------|-------------|------------------------|-----------------|--------------------|------------------|------------------|
|                 |             | Propagation conditions |                 |                    |                  |                  |
|                 |             | Static                 | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) | HT100<br>(no FH) |
| FACCH/H         | dBm         | (3)                    | -106            | -106               | -106,5           | -105             |
| FACCH/F         | dBm         | (3)                    | -106            | -106,5             | -106,5           | -105,5           |
| SDCCH           | dBm         | (3)                    | -105            | -105,5             | -105,5           | -104,5           |
| SCH             | dBm         | (3)                    | -100,5          | -100,5             | -98              | -100             |
| TCH/FS          | dBm         | (3)                    | -104            | -104               | -104             | -102,5           |
|                 | RBBER1b (%) | (3)                    | 0,06            | 0,06               | 0,04             | 0,06             |
|                 | RBBER2 (%)  | (3)                    | 5,44            | 5,72               | 5,75             | 5,64             |
| TCH/EFS         | dBm         | (3)                    | -104            | -104,5             | -104,5           | -103             |
|                 | RBBER1b (%) | (3)                    | 0,04            | 0,11               | 0,06             | 0,18             |
|                 | RBBER2 (%)  | (3)                    | 4,92            | 6,17               | 6,07             | 6,85             |
| TCH/HS          | dBm         | (3)                    | -104            | -104               | -103,5           | -102,5           |
|                 | RBBER1b (%) | (3)                    | 0,21            | 0,22               | 0,15             | 0,22             |
|                 | RBBER2 (%)  | (3)                    | 5,95            | 5,87               | 4,87             | 5,26             |
| TCH/AFS12.2     | dBm         | (3)                    | (4)             | -105               | -105,5           | -103,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 1,23               | 1,38             | 0,9              |
| TCH/AFS10.2     | dBm         | (3)                    | (4)             | -106               | -106,5           | -105             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,17               | 0,3              | 0,27             |
| TCH/AFS7.95     | dBm         | (3)                    | (4)             | -108               | -108,5           | -107             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,36               | 0,57             | 0,42             |
| TCH/AFS7.4      | dBm         | (3)                    | (4)             | -108               | -108,5           | -107             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,17               | 0,27             | 0,15             |
| TCH/AFS6.7      | dBm         | (3)                    | (4)             | -108,5             | -109             | -108             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,62               | 0,79             | 0,62             |
| TCH/AFS5.9      | dBm         | (3)                    | (4)             | -109               | -109,5           | -108,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,15               | 0,19             | 0,23             |
| TCH/AFS5.15     | dBm         | (3)                    | (4)             | -109,5             | -110             | -109             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,23               | 0,32             | 0,33             |
| TCH/AFS4.75     | dBm         | (3)                    | (4)             | -110               | -110             | -108,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,2                | 0,2              | 0,19             |
| TCH/AHS7.95     | dBm         | (3)                    | (4)             | -100,5             | -98,5            | -98,5            |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,44               | 0,4              | 0,47             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 2,08               | 1,8              | 2,11             |
| TCH/AHS7.4      | dBm         | (3)                    | (4)             | -101,5             | -99,5            | -99,5            |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,22               | 0,14             | 0,23             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 2,51               | 2,08             | 2,58             |
| TCH/AHS6.7      | dBm         | (3)                    | (4)             | -102,5             | -101,5           | -101             |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,31               | 0,3              | 0,29             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 3,51               | 3,0              | 3,54             |
| TCH/AHS5.9      | dBm         | (3)                    | (4)             | -103,5             | -103             | -102,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,17               | 0,17             | 0,19             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 4,31               | 4,22             | 4,26             |
| TCH/AHS5.15     | dBm         | (3)                    | (4)             | -104,5             | -104,5           | -103,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,25               | 0,23             | 0,34             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 5,18               | 5,32             | 5,56             |
| TCH/AHS4.75     | dBm         | (3)                    | (4)             | -105               | -104,5           | -103,5           |
|                 | RBBER1b (%) | (3)                    | (4)             | 0,14               | 0,15             | 0,15             |
|                 | RBBER2 (%)  | (3)                    | (4)             | 6,35               | 5,95             | 5,98             |
| TCH/WFS12.65    | dBm         | (3)                    | -104,5          | (3)                | (3)              | -102             |
|                 | RBBER1b (%) | (3)                    | 0,62            | (3)                | (3)              | 0,66             |
| TCH/ WFS8.85    | dBm         | (3)                    | -107,5          | (3)                | (3)              | -105             |
|                 | RBBER1b (%) | (3)                    | 0,59            | (3)                | (3)              | 0,58             |
| TCH/ WFS6.60    | dBm         | (3)                    | -108            | (3)                | (3)              | -106,5           |

|              |             |     |         |        |        |           |
|--------------|-------------|-----|---------|--------|--------|-----------|
|              | RBBER1b (%) | (3) | 0,17    | (3)    | (3)    | 0,25      |
| PDTCH/CS-1   | dBm         | (3) | -106    | -106   | -105,5 | -104,5    |
| PDTCH/CS-2   | dBm         | (3) | -102    | -102   | -102,5 | -100,5    |
| PDTCH/CS-3   | dBm         | (3) | -100    | -100   | -99,5  | -95,5     |
| PDTCH/CS-4   | dBm         | (3) | -90     | -90    | -      | -         |
| PDTCH/MCS-1  | dBm         | (3) | -104,5  | -105,5 | -105,5 | -102,5    |
| PDTCH/MCS-2  | dBm         | (3) | -102,5  | -103,5 | -103   | -100,5    |
| PDTCH/MCS-3  | dBm         | (3) | -98,5   | -99    | -95    | -95,5     |
| PDTCH/MCS-4  | dBm         | (3) | -92,5   | -93    | -      | -         |
| PDTCH/MCS-5  | dBm         | (3) | -98,5   | -98,5  | -99    | -95       |
| PDTCH/MCS-6  | dBm         | (3) | -96     | -96    | -94    | -89       |
| PDTCH/MCS-7  | dBm         | (3) | -86,5   | -85,5  | -      | -         |
| PDTCH/MCS-8  | dBm         | (3) | -85**   | -85**  | -      | -         |
| PDTCH/MCS-9  | dBm         | (3) | -       | -      | -      | -         |
| PDTCH/DAS-5  | dBm         | (3) | [-97,5] | (3)    | (3)    | [-97,5]   |
| PDTCH/DAS-6  | dBm         | (3) | [-97]   | (3)    | (3)    | [-95,5]   |
| PDTCH/DAS-7  | dBm         | (3) | [-95,5] | (3)    | (3)    | [-89,5]   |
| PDTCH/DAS-8  | dBm         | (3) | [-93]   | (3)    | (3)    | [-92**]   |
| PDTCH/DAS-9  | dBm         | (3) | [-90]   | (3)    | (3)    | [-84,5**] |
| PDTCH/DAS-10 | dBm         | (3) | [-86]   | (3)    | (3)    | -         |
| PDTCH/DAS-11 | dBm         | (3) | [-82**] | (3)    | (3)    | -         |
| PDTCH/DAS-12 | dBm         | (3) | -       | (3)    | (3)    | -         |
| PDTCH/DBS-5  | dBm         | (3) | [-99,5] | (3)    | (3)    | [-98]     |
| PDTCH/DBS-6  | dBm         | (3) | [-97]   | (3)    | (3)    | [-91,5]   |
| PDTCH/DBS-7  | dBm         | (3) | [-91]   | (3)    | (3)    | -         |
| PDTCH/DBS-8  | dBm         | (3) | [-87,5] | (3)    | (3)    | -         |
| PDTCH/DBS-9  | dBm         | (3) | [-86]   | (3)    | (3)    | -         |
| PDTCH/DBS-10 | dBm         | (3) | [-78]   | (3)    | (3)    | -         |
| PDTCH/DBS-11 | dBm         | (3) | [-78**] | (3)    | (3)    | -         |
| PDTCH/DBS-12 | dBm         | (3) | -       | (3)    | (3)    | -         |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for MCS-x, DAS-x, and DBS-x can not meet the reference performance for some propagation conditions (-).

NOTE 3: The requirements for the DCS 1800 & PCS 1900 Static propagation condition are the same as for the GSM 850 & GSM 900 Static propagation condition, the requirements for the GSM 850 & GSM 900 TU50 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

NOTE 4: The TU50 no FH TIGHTER requirement for these TCH are specified as a fixed tightening of the reference sensitivity performance listed in Table 1, which shall be met at an input level less than -105 dBm for GSM 850 & 900 and -105 dBm for DCS 1800 and PCS 1900.

NOTE 5: The requirement is identical to the EGPRS2-B requirement in Table 1n.

Table 2: Reference interference performance for GMSK modulated signals

| Type of channel |                                  | GSM 850 and GSM 900    |                   |                    |                    |                         |
|-----------------|----------------------------------|------------------------|-------------------|--------------------|--------------------|-------------------------|
|                 |                                  | Propagation conditions |                   |                    |                    |                         |
|                 |                                  | TU3<br>(no FH)         | TU3<br>(ideal FH) | TU50<br>(no FH)    | TU50<br>(ideal FH) | RA250<br>(no FH)        |
| FACCH/H         | (FER)                            | 22 %                   | 6,7 %             | 6,7 %              | 6,7 %              | 5,7 %                   |
| FACCH/F         | (FER)                            | 22 %                   | 3,4 %             | 9,5 %              | 3,4 %              | 3,5 %                   |
| SDCCH           | (FER)                            | 22 %                   | 9 %               | 13 %               | 9 %                | 8 %                     |
| RACH            | (FER)                            | 15 %                   | 15 %              | 16 %               | 16 %               | 13 %                    |
| SCH             | (FER)                            | 17 %                   | 17 %              | 17 %               | 17 %               | 18 %                    |
| TCH/F14,4       | (BER)                            | 10 %                   | 3 %               | 4,5 %              | 3 %                | 3 %                     |
| TCH/F9,6 & H4,8 | (BER)                            | 8 %                    | 0,3 %             | 0,8 %              | 0,3 %              | 0,2 %                   |
| TCH/F4,8        | (BER)                            | 3 %                    | 10 <sup>-4</sup>  | 10 <sup>-4</sup>   | 10 <sup>-4</sup>   | 10 <sup>-4</sup>        |
| TCH/F2,4        | (BER)                            | 3 %                    | 10 <sup>-5</sup>  | 10 <sup>-4</sup>   | 10 <sup>-5</sup>   | 10 <sup>-5</sup>        |
| TCH/H2,4        | (BER)                            | 4 %                    | 10 <sup>-4</sup>  | 2 10 <sup>-4</sup> | 10 <sup>-4</sup>   | 10 <sup>-4</sup>        |
| TCH/FS          | (FER)                            | 21 $\alpha$ %          | 3 $\alpha$ %      | 6 $\alpha$ %       | 3 $\alpha$ %       | 3 $\alpha$ %            |
|                 | class Ib (RBER)                  | 2/ $\alpha$ %          | 0,2/ $\alpha$ %   | 0,4/ $\alpha$ %    | 0,2/ $\alpha$ %    | 0,2/ $\alpha$ %         |
|                 | class II (RBER)                  | 4 %                    | 8 %               | 8 %                | 8 %                | 8 %                     |
| TCH/EFS         | (FER)                            | 23 %                   | 3 %               | 9 %                | 3 %                | 4 %                     |
|                 | (RBER Ib)                        | 0,20 %                 | 0,10 %            | 0,20 %             | 0,10 %             | 0,13 %                  |
|                 | (RBER II)                        | 3 %                    | 8 %               | 7 %                | 8 %                | 8 %                     |
| TCH/HS          | (FER)                            | 19,1 %                 | 5,0 %             | 5,0 %              | 5,0 %              | 4,7 %                   |
|                 | class Ib (RBER, BFI=0)           | 0,52 %                 | 0,27 %            | 0,29 %             | 0,29 %             | 0,21 %                  |
|                 | class II (RBER, BFI=0)           | 2,8 %                  | 7,1 %             | 7,1 %              | 7,1 %              | 7,0 %                   |
|                 | (UFR)                            | 20,7 %                 | 6,2 %             | 6,1 %              | 6,1 %              | 5,6 %                   |
|                 | class Ib (RBER,(BFI or UFI)=0)   | 0,29 %                 | 0,20 %            | 0,21 %             | 0,21 %             | 0,17 %                  |
|                 | (EVSIDR)                         | 21,9 %                 | 7,1 %             | 7,0 %              | 7,0 %              | 6,3 %                   |
|                 | (RBER, SID=2 and (BFI or UFI)=0) | 0,02 %                 | 0,01 %            | 0,01 %             | 0,01 %             | 0,01 %                  |
|                 | (ESIDR)                          | 17,1 %                 | 3,6 %             | 3,6 %              | 3,6 %              | 3,4 %                   |
|                 | (RBER, SID=1 or SID=2)           | 0,5 %                  | 0,27 %            | 0,26 %             | 0,26 %             | 0,20 %                  |
| TCH/AFS12.2     | (FER)                            | 22 %                   | 3,5 %             | 6 %                | 3,5 %              | 2,5 %                   |
|                 | Class Ib (RBER)                  | 0,9 %                  | 1,7 %             | 1,7 %              | 1,7 %              | 1,5 %                   |
| TCH/AFS10.2     | (FER)                            | 18 %                   | 1,4 %             | 2,7 %              | 1,4 %              | 0,92 %                  |
|                 | Class Ib (RBER)                  | 0,53 %                 | 0,22 %            | 0,3 %              | 0,21 %             | 0,16 %                  |
| TCH/AFS7.95     | (FER)                            | 13 %                   | 0,13 %            | 0,51 %             | 0,12 %             | 0,073 %                 |
|                 | Class Ib (RBER)                  | 0,66 %                 | 0,071 %           | 0,15 %             | 0,065 %            | 0,044 %                 |
|                 | (FER@-3dB)                       | 26 %                   | 2,7 %             | 5,3 %              | 2,7 %              | 1,8 %                   |
|                 | Class Ib<br>(RBER@-3dB)          | 1,2 %                  | 0,79 %            | 1 %                | 0,78 %             | 0,6 %                   |
| TCH/AFS7.4      | (FER)                            | 14 %                   | 0,16 %            | 0,56 %             | 0,16 %             | 0,09 %                  |
|                 | Class Ib (RBER)                  | 0,43 %                 | 0,032 %           | 0,072 %            | 0,032 %            | 0,018 %                 |
|                 | (FER@-3dB)                       | 26 %                   | 3 %               | 5,4 %              | 3,1 %              | 2 %                     |
|                 | Class Ib<br>(RBER@-3dB)          | 0,79 %                 | 0,38 %            | 0,52 %             | 0,38 %             | 0,28 %                  |
| TCH/AFS6.7      | (FER)                            | 11 %                   | 0,045 %           | 0,21 %             | 0,041 %            | 0,021 %                 |
|                 | Class Ib (RBER)                  | 0,75 %                 | 0,044 %           | 0,11 %             | 0,042 %            | 0,028 %                 |
|                 | (FER@-3dB)                       | 23 %                   | 1,2 %             | 2,9 %              | 1,2 %              | 0,75 %                  |
|                 | Class Ib<br>(RBER@-3dB)          | 1,4 %                  | 0,6 %             | 0,86 %             | 0,6 %              | 0,44 %                  |
| TCH/AFS5.9      | (FER)                            | 10 %                   | 0,018 %           | 0,12 %             | 0,018 %            | < 0,01 % <sup>(*)</sup> |
|                 | Class Ib (RBER)                  | 0,38 %                 | 0,005 %           | 0,022 %            | 0,005 %            | 0,003 %                 |
|                 | (FER@-3dB)                       | 21 %                   | 0,71 %            | 2 %                | 0,7 %              | 0,4 %                   |
|                 | Class Ib<br>(RBER@-3dB)          | 0,74 %                 | 0,11 %            | 0,23 %             | 0,12 %             | 0,079 %                 |

(continued)

Table 2 (continued): Reference interference performance for GMSK modulated signals

| Type of Channel |                         | GSM 850 and GSM 900    |                         |                 |                         |                         |
|-----------------|-------------------------|------------------------|-------------------------|-----------------|-------------------------|-------------------------|
|                 |                         | Propagation conditions |                         |                 |                         |                         |
|                 |                         | TU3<br>(no FH)         | TU3<br>(ideal FH)       | TU50<br>(no FH) | TU50<br>(ideal FH)      | RA250<br>(no FH)        |
| TCH/AFS5.15     | (FER)                   | 9,2 %                  | 0,011 %                 | 0,081 %         | 0,011 %                 | < 0,01 % <sup>(*)</sup> |
|                 | Class Ib (RBER)         | 0,44 %                 | 0,004 %                 | 0,019 %         | 0,003 %                 | 0,002 %                 |
|                 | (FER@-3dB)              | 19 %                   | 0,45 %                  | 1,4 %           | 0,47 %                  | 0,25 %                  |
|                 | Class Ib<br>(RBER@-3dB) | 0,85 %                 | 0,1 %                   | 0,22 %          | 0,11 %                  | 0,069 %                 |
| TCH/AFS4.75     | (FER)                   | 7,9 %                  | < 0,01 % <sup>(*)</sup> | 0,036 %         | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> |
|                 | Class Ib (RBER)         | 0,32 %                 | 0,001 %                 | 0,006 %         | 0,001 %                 | < 0,001 %               |
|                 | (FER@-3dB)              | 17 %                   | 0,21 %                  | 0,82 %          | 0,23 %                  | 0,11 %                  |
|                 | Class Ib<br>(RBER@-3dB) | 0,62 %                 | 0,036 %                 | 0,11 %          | 0,033 %                 | 0,019 %                 |
| TCH/AFS-INB     | (FER)                   | 1,5 %                  | 0,019 %                 | 0,025 %         | 0,018 %                 | 0,009 %                 |
|                 | (FER@-3dB)              | 3,5 %                  | 0,15 %                  | 0,22 %          | 0,16 %                  | 0,1 %                   |
| TCH/AFS         | (EVSIDUR)               | 11 %                   | 0,37 %                  | 1,4 %           | 0,39 %                  | 0,46 %                  |
|                 | (EVSIDUR@-3dB)          | 21 %                   | 3,4 %                   | 6,3 %           | 3,4 %                   | 3,1 %                   |
| TCH/AFS         | (EVRFR)                 | 10 %                   | 0,026 %                 | 0,15 %          | 0,024 %                 | 0,01 %                  |
|                 | (EVRFR @ -3dB)          | 21 %                   | 0,77 %                  | 2,08 %          | 0,77 %                  | 0,48 %                  |
| TCH/AHS7.95     | (FER)                   | 27 %                   | 23 %                    | 22 %            | 22 %                    | 21 %                    |
|                 | Class Ib (RBER)         | 0,84 %                 | 2,2 %                   | 2,3 %           | 2,3 %                   | 2,1 %                   |
|                 | Class II (RBER)         | 1,7 %                  | 5,1 %                   | 5,3 %           | 5,3 %                   | 5 %                     |
|                 | (FER@+3dB)              | 14 %                   | 7 %                     | 6,7 %           | 6,7 %                   | 7 %                     |
|                 | Class Ib<br>(RBER@+3dB) | 0,48 %                 | 1 %                     | 1 %             | 1 %                     | 1 %                     |
|                 | Class II<br>(RBER@+3dB) | 1 %                    | 3,2 %                   | 3,2 %           | 3,2 %                   | 3,2 %                   |
| TCH/AHS7.4      | (FER)                   | 25 %                   | 19 %                    | 18 %            | 18 %                    | 17 %                    |
|                 | Class Ib (RBER)         | 0,68 %                 | 1,4 %                   | 1,4 %           | 1,4 %                   | 1,3 %                   |
|                 | Class II (RBER)         | 1,9 %                  | 5,4 %                   | 5,6 %           | 5,6 %                   | 5,4 %                   |
|                 | (FER@+3dB)              | 13 %                   | 5,2 %                   | 4,8 %           | 4,8 %                   | 5,3 %                   |
|                 | Class Ib<br>(RBER@+3dB) | 0,38 %                 | 0,52 %                  | 0,51 %          | 0,51 %                  | 0,5 %                   |
|                 | Class II<br>(RBER@+3dB) | 1,2 %                  | 3,3 %                   | 3,3 %           | 3,3 %                   | 3,4 %                   |
| TCH/AHS6.7      | (FER)                   | 23 %                   | 12 %                    | 11 %            | 11 %                    | 11 %                    |
|                 | Class Ib (RBER)         | 0,71 %                 | 1,2 %                   | 1,2 %           | 1,2 %                   | 1,1 %                   |
|                 | Class II (RBER)         | 2,3 %                  | 6 %                     | 6,2 %           | 6,2 %                   | 6 %                     |
|                 | (FER@+3dB)              | 11 %                   | 2,6 %                   | 2,3 %           | 2,3 %                   | 2,9 %                   |
|                 | Class Ib<br>(RBER@+3dB) | 0,39 %                 | 0,39 %                  | 0,39 %          | 0,39 %                  | 0,4 %                   |
|                 | Class II<br>(RBER@+3dB) | 1,4 %                  | 3,5 %                   | 3,6 %           | 3,6 %                   | 3,6 %                   |
| TCH/AHS5.9      | (FER)                   | 21 %                   | 7,9 %                   | 7,1 %           | 7,1 %                   | 7 %                     |
|                 | Class Ib (RBER)         | 0,55 %                 | 0,58 %                  | 0,57 %          | 0,57 %                  | 0,51 %                  |
|                 | Class II (RBER)         | 2,6 %                  | 6,4 %                   | 6,5 %           | 6,5 %                   | 6,3 %                   |
| TCH/AHS5.15     | (FER)                   | 17 %                   | 3,9 %                   | 3,3 %           | 3,3 %                   | 3,5 %                   |
|                 | Class Ib (RBER)         | 0,8 %                  | 0,65 %                  | 0,6 %           | 0,6 %                   | 0,57 %                  |
|                 | Class II (RBER)         | 3,1 %                  | 6,8 %                   | 6,9 %           | 6,9 %                   | 6,7 %                   |
| TCH/AHS4.75     | (FER)                   | 15 %                   | 2,2 %                   | 1,8 %           | 1,8 %                   | 2,1 %                   |
|                 | Class Ib (RBER)         | 0,6 %                  | 0,25 %                  | 0,22 %          | 0,22 %                  | 0,22 %                  |
|                 | Class II (RBER)         | 3,6 %                  | 6,9 %                   | 7 %             | 7 %                     | 6,9 %                   |
| TCH/AHS-INB     | (FER)                   | 2,7 %                  | 0,76 %                  | 0,7 %           | 0,7 %                   | 0,63 %                  |
|                 | (FER@-3dB)              | 6 %                    | 2,2 %                   | 2,2 %           | 2,2 %                   | 2 %                     |
| TCH/AHS         | (EVSIDUR)               | 15 %                   | 3,2 %                   | 2,5 %           | 2,5 %                   | 3,8 %                   |
|                 | (EVSIDUR@-3dB)          | 28 %                   | 15 %                    | 15 %            | 15 %                    | 15 %                    |

(continued)



Table 2 (continued): Reference interference performance for GMSK modulated signals

| DCS 1 800 & PCS 1 900 |                                  |                        |                     |                         |                         |                         |
|-----------------------|----------------------------------|------------------------|---------------------|-------------------------|-------------------------|-------------------------|
| Type of channel       |                                  | Propagation conditions |                     |                         |                         |                         |
|                       |                                  | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH)         | TU50<br>(ideal FH)      | RA130<br>(no FH)        |
| FACCH/H               | (FER)                            | 22 %                   | 6,7 %               | 6,9 %                   | 6,9 %                   | 5,7 %                   |
| FACCH/F               | (FER)                            | 22 %                   | 3,4 %               | 3,4 %                   | 3,4 %                   | 3,5 %                   |
| SDCCH                 | (FER)                            | 22 %                   | 9 %                 | 9 %                     | 9 %                     | 8 %                     |
| RACH                  | (FER)                            | 15 %                   | 15 %                | 16 %                    | 16 %                    | 13 %                    |
| SCH                   | (FER)                            | 17 %                   | 17 %                | 19 %                    | 19 %                    | 18 %                    |
| TCH/F14,4             | (BER)                            | 10 %                   | 3 %                 | 4 %                     | 3,1 %                   | 3 %                     |
| TCH/F9,6 & H4,8       | (BER)                            | 8 %                    | 0,3 %               | 0,8 %                   | 0,3 %                   | 0,2 %                   |
| TCH/F4,8              | (BER)                            | 3 %                    | 10 <sup>-4</sup>    | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |
| TCH/F2,4              | (BER)                            | 3 %                    | 10 <sup>-5</sup>    | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        | 10 <sup>-5</sup>        |
| TCH/H2,4              | (BER)                            | 4 %                    | 10 <sup>-4</sup>    | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        | 10 <sup>-4</sup>        |
| TCH/FS                | (FER)                            | 21 $\alpha$ %          | 3 $\alpha$ %        | 3 $\alpha$ %            | 3 $\alpha$ %            | 3 $\alpha$ %            |
|                       | class Ib (RBER)                  | 2/ $\alpha$ %          | 0,2/ $\alpha$ %     | 0,25/ $\alpha$ %        | 0,25/ $\alpha$ %        | 0,2/ $\alpha$ %         |
|                       | class II (RBER)                  | 4 %                    | 8 %                 | 8,1 %                   | 8,1 %                   | 8 %                     |
| TCH/EFS               | (FER)                            | 23 %                   | 3 %                 | 3 %                     | 3 %                     | 4 %                     |
|                       | (RBER Ib)                        | 0,20 %                 | 0,10 %              | 0,10 %                  | 0,10 %                  | 0,13 %                  |
|                       | (RBER II)                        | 3 %                    | 8 %                 | 8 %                     | 8 %                     | 8 %                     |
| TCH/HS                | (FER)                            | 19,1 %                 | 5,0 %               | 5,0 %                   | 5,0 %                   | 4,7 %                   |
|                       | class Ib (RBER, BFI=0)           | 0,52 %                 | 0,27 %              | 0,29 %                  | 0,29 %                  | 0,21 %                  |
|                       | class II (RBER, BFI=0)           | 2,8 %                  | 7,1 %               | 7,2 %                   | 7,2 %                   | 7,0 %                   |
|                       | (UFR)                            | 20,7 %                 | 6,2 %               | 6,1 %                   | 6,1 %                   | 5,6 %                   |
|                       | class Ib (RBER, (BFI or UFI)=0)  | 0,29 %                 | 0,20 %              | 0,21 %                  | 0,21 %                  | 0,17 %                  |
|                       | (EVSIDR)                         | 21,9 %                 | 7,1 %               | 7,0 %                   | 7,0 %                   | 6,3 %                   |
|                       | (RBER, SID=2 and (BFI or UFI)=0) | 0,02 %                 | 0,01 %              | 0,01 %                  | 0,01 %                  | 0,01 %                  |
|                       | (ESIDR)                          | 17,1 %                 | 3,6 %               | 3,6 %                   | 3,6 %                   | 3,4 %                   |
|                       | (RBER, SID=1 or SID=2)           | 0,5 %                  | 0,27 %              | 0,26 %                  | 0,26 %                  | 0,20 %                  |
| TCH/AFS12.2           | (FER)                            | 22 %                   | 3,5 %               | 2,7 %                   | 2,7 %                   | 1,8 %                   |
|                       | Class Ib (RBER)                  | 0,92 %                 | 1,7 %               | 1,6 %                   | 1,6 %                   | 1,4 %                   |
| TCH/AFS10.2           | (FER)                            | 18 %                   | 1,4 %               | 0,98 %                  | 0,98 %                  | 0,56 %                  |
|                       | Class Ib (RBER)                  | 0,54 %                 | 0,21 %              | 0,17 %                  | 0,17 %                  | 0,12 %                  |
| TCH/AFS7.95           | (FER)                            | 13 %                   | 0,13 %              | 0,07 %                  | 0,07 %                  | 0,029 %                 |
|                       | Class Ib (RBER)                  | 0,67 %                 | 0,068 %             | 0,042 %                 | 0,042 %                 | 0,03 %                  |
|                       | (FER@-3dB)                       | 25 %                   | 2,7 %               | 2 %                     | 2 %                     | 1,2 %                   |
|                       | Class Ib                         | 1,2 %                  | 0,8 %               | 0,68 %                  | 0,68 %                  | 0,48 %                  |
|                       | (RBER@-3dB)                      |                        |                     |                         |                         |                         |
| TCH/AFS7.4            | (FER)                            | 14 %                   | 0,17 %              | 0,083 %                 | 0,083 %                 | 0,047 %                 |
|                       | Class Ib (RBER)                  | 0,43 %                 | 0,032 %             | 0,02 %                  | 0,02 %                  | 0,012 %                 |
|                       | (FER@-3dB)                       | 26 %                   | 3 %                 | 2,3 %                   | 2,3 %                   | 1,4 %                   |
|                       | Class Ib                         | 0,8 %                  | 0,38 %              | 0,32 %                  | 0,32 %                  | 0,22 %                  |
|                       | (RBER@-3dB)                      |                        |                     |                         |                         |                         |
| TCH/AFS6.7            | (FER)                            | 11 %                   | 0,051 %             | 0,025 %                 | 0,025 %                 | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)                  | 0,76 %                 | 0,047 %             | 0,028 %                 | 0,028 %                 | 0,016 %                 |
|                       | (FER@-3dB)                       | 22 %                   | 1,2 %               | 0,82 %                  | 0,82 %                  | 0,41 %                  |
|                       | Class Ib                         | 1,4 %                  | 0,61 %              | 0,51 %                  | 0,51 %                  | 0,34 %                  |
|                       | (RBER@-3dB)                      |                        |                     |                         |                         |                         |
| TCH/AFS5.9            | (FER)                            | 10 %                   | 0,018 %             | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)                  | 0,38 %                 | 0,005 %             | 0,002 %                 | 0,002 %                 | 0,001 %                 |
|                       | (FER@-3dB)                       | 21 %                   | 0,68 %              | 0,41 %                  | 0,41 %                  | 0,2 %                   |
|                       | Class Ib                         | 0,72 %                 | 0,12 %              | 0,079 %                 | 0,079 %                 | 0,046 %                 |
|                       | (RBER@-3dB)                      |                        |                     |                         |                         |                         |

(continued)

Table 2 (continued): Reference interference performance for GMSK modulated signals

| DCS 1 800 & PCS 1 900 |                        |                     |                         |                         |                         |                         |
|-----------------------|------------------------|---------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Type of channel       | Propagation conditions |                     |                         |                         |                         |                         |
|                       | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH)         | TU50<br>(ideal FH)      | RA130<br>(no FH)        |                         |
| TCH/AFS5.15           | (FER)                  | 9,2 %               | 0,013 %                 | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> |
|                       | Class Ib (RBER)        | 0,45 %              | 0,004 %                 | 0,001 %                 | 0,001 %                 | < 0,001 %               |
|                       | (FER@-3dB)             | 19 %                | 0,45 %                  | 0,26 %                  | 0,26 %                  | 0,13 %                  |
| TCH/AFS4.75           | Class Ib               | 0,84 %              | 0,11 %                  | 0,072 %                 | 0,072 %                 | 0,038 %                 |
|                       | (RBER@-3dB)            |                     |                         |                         |                         |                         |
|                       | (FER)                  | 7,9 %               | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | < 0,01 % <sup>(*)</sup> | -                       |
| TCH/AFS-INB           | Class Ib (RBER)        | 0,31 %              | < 0,001 %               | < 0,001 %               | < 0,001 %               | < 0,001 %               |
|                       | (FER@-3dB)             | 17 %                | 0,2 %                   | 0,1 %                   | 0,1 %                   | 0,051 %                 |
|                       | Class Ib               | 0,61 %              | 0,033 %                 | 0,021 %                 | 0,021 %                 | 0,009 %                 |
| TCH/AFS               | (RBER@-3dB)            |                     |                         |                         |                         |                         |
|                       | (FER)                  | 1,5 %               | 0,016 %                 | 0,013 %                 | 0,013 %                 | 0,008 %                 |
| TCH/AFS               | (FER@-3dB)             | 3,5 %               | 0,16 %                  | 0,12 %                  | 0,12 %                  | 0,1 %                   |
|                       | (EVSIDUR)              | 11 %                | 0,41 %                  | 0,3 %                   | 0,3 %                   | 0,36 %                  |
| TCH/AFS               | (EVSIDUR@-3dB)         | 21 %                | 3,5 %                   | 2,8 %                   | 2,8 %                   | 2,8 %                   |
|                       | (EVRFR)                | 10 %                | 0,028 %                 | 0,022 %                 | 0,022 %                 | 0,005 %                 |
| TCH/AHS7.95           | (EVRFR @ -3dB)         | 21                  | 0,73 %                  | 0,78 %                  | 0,78 %                  | 0,28 %                  |
|                       | (FER)                  | 27 %                | 23 %                    | 23 %                    | 23 %                    | 20 %                    |
|                       | Class Ib (RBER)        | 0,85 %              | 2,2 %                   | 2,3 %                   | 2,3 %                   | 2,1 %                   |
| TCH/AHS7.4            | Class II (RBER)        | 1,7 %               | 5,1 %                   | 5,1 %                   | 5,1 %                   | 5,1 %                   |
|                       | (FER@+3dB)             | 14 %                | 7 %                     | 6,7 %                   | 6,7 %                   | 6,5 %                   |
|                       | Class Ib               | 0,49 %              | 1 %                     | 1 %                     | 1 %                     | 0,98 %                  |
| TCH/AHS6.7            | (RBER@+3dB)            |                     |                         |                         |                         |                         |
|                       | Class II               | 1 %                 | 3,1 %                   | 3,1 %                   | 3,1 %                   | 3,1 %                   |
|                       | (RBER@+3dB)            |                     |                         |                         |                         |                         |
| TCH/AHS5.9            | (FER)                  | 26 %                | 18 %                    | 18 %                    | 18 %                    | 16 %                    |
|                       | Class Ib (RBER)        | 0,69 %              | 1,4 %                   | 1,4 %                   | 1,4 %                   | 1,3 %                   |
|                       | Class II (RBER)        | 1,9 %               | 5,4 %                   | 5,5 %                   | 5,5 %                   | 5,4 %                   |
| TCH/AHS5.15           | (FER@+3dB)             | 13 %                | 5,2 %                   | 4,9 %                   | 4,9 %                   | 4,8 %                   |
|                       | Class Ib               | 0,39 %              | 0,51 %                  | 0,51 %                  | 0,51 %                  | 0,47 %                  |
|                       | (RBER@+3dB)            |                     |                         |                         |                         |                         |
| TCH/AHS4.75           | Class II               | 1,2 %               | 3,3 %                   | 3,3 %                   | 3,3 %                   | 3,3 %                   |
|                       | (RBER@+3dB)            |                     |                         |                         |                         |                         |
|                       | (FER)                  | 23 %                | 12 %                    | 12 %                    | 12 %                    | 9,9 %                   |
| TCH/AHS4.75           | Class Ib (RBER)        | 0,71 %              | 1,2 %                   | 1,2 %                   | 1,2 %                   | 1 %                     |
|                       | Class II (RBER)        | 2,3 %               | 6 %                     | 6 %                     | 6 %                     | 6 %                     |
|                       | (FER@+3dB)             | 11 %                | 2,7 %                   | 2,5 %                   | 2,5 %                   | 2,5 %                   |
| TCH/AHS5.9            | Class Ib               | 0,39 %              | 0,39 %                  | 0,38 %                  | 0,38 %                  | 0,37 %                  |
|                       | (RBER@+3dB)            |                     |                         |                         |                         |                         |
|                       | Class II               | 1,4 %               | 3,5 %                   | 3,5 %                   | 3,5 %                   | 3,5 %                   |
| TCH/AHS5.15           | (RBER@+3dB)            |                     |                         |                         |                         |                         |
|                       | (FER)                  | 21 %                | 7,8 %                   | 7,7 %                   | 7,7 %                   | 6,4 %                   |
|                       | Class Ib (RBER)        | 0,55 %              | 0,59 %                  | 0,6 %                   | 0,6 %                   | 0,48 %                  |
| TCH/AHS4.75           | Class II (RBER)        | 2,6 %               | 6,3 %                   | 6,4 %                   | 6,4 %                   | 6,3 %                   |
|                       | (FER)                  | 17 %                | 3,8 %                   | 3,8 %                   | 3,8 %                   | 3,1 %                   |
|                       | Class Ib (RBER)        | 0,8 %               | 0,65 %                  | 0,66 %                  | 0,66 %                  | 0,53 %                  |
| TCH/AHS-INB           | Class II (RBER)        | 3,1 %               | 6,7 %                   | 6,8 %                   | 6,8 %                   | 6,6 %                   |
|                       | (FER)                  | 15 %                | 2,2 %                   | 2,1 %                   | 2,1 %                   | 1,8 %                   |
|                       | Class Ib (RBER)        | 0,6 %               | 0,25 %                  | 0,25 %                  | 0,25 %                  | 0,19 %                  |
| TCH/AHS               | Class II (RBER)        | 3,6 %               | 6,9 %                   | 7 %                     | 7 %                     | 6,8 %                   |
|                       | (FER)                  | 2,8 %               | 0,76 %                  | 0,71 %                  | 0,71 %                  | 0,6 %                   |
|                       | (FER@-3dB)             | 5,9 %               | 2,2 %                   | 2,2 %                   | 2,2 %                   | 1,8 %                   |
| TCH/AHS               | (EVSIDUR)              | 15 %                | 3,1 %                   | 3,1 %                   | 3,1 %                   | 3,5 %                   |
|                       | (EVSIDUR@-3dB)         | 28 %                | 15 %                    | 15 %                    | 15 %                    | 14 %                    |
| TCH/AHS               | (EVRFR)                | 11 %                | 0,55 %                  | 0,53 %                  | 0,53 %                  | 0,52 %                  |
|                       | (EVRFR @ -3dB)         | 22 %                | 4,3 %                   | 4,5 %                   | 4,5 %                   | 3,8 %                   |

- NOTE 1: The specification for SDCCH applies also for BCCH, AGCH, PCH, SACCH. The actual performance of SACCH, particularly for the C/I TU3 (no FH) and TU 1.5 (no FH) cases should be better.
- NOTE 2: Definitions:  
 FER: Frame erasure rate (frames marked with BFI=1)  
 FER@-3dB: Frame erasure rate for an interference ratio 3 dB below the reference interference ratio  
 FER@+3dB: Frame erasure rate for an interference ratio 3 dB above the reference interference ratio  
 UFR: Unreliable frame rate (frames marked with (BFI or UFI)=1)  
 EVSIDR: Erased Valid SID frame rate (frames marked with (SID=0) or (SID=1) or ((BFI or UFI)=1) if a valid SID frame was transmitted)  
 EVSIDUR: Erased Valid SID\_UPDATE frame rate associated to an adaptive speech traffic channel  
 EVSIDUR@-3dB: Erased Valid SID\_UPDATE frame rate associated to an adaptive speech traffic channel for an interference ratio 3 dB below the reference interference ratio  
 ESIDR: Erased SID frame rate (frames marked with SID=0 if a valid SID frame was transmitted)  
 EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel. This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.  
 EVRFR@-3dB: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel for an interference ratio 3 dB below the reference interference ratio.  
 BER: Bit error rate  
 RBER, BFI=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "good" to the number of transmitted bits in the "good" frames).  
 RBER@-3dB: Residual bit error rate for an interference ratio 3 dB below the reference interference ratio  
 RBER@+3dB: Residual bit error rate for an interference ratio 3 dB above the reference interference ratio  
 RBER, (BFI or UFI)=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "reliable" to the number of transmitted bits in the "reliable" frames).  
 RBER, SID=2 and (BFI or UFI)=0: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).  
 RBER, SID=1 or SID=2: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" or as "invalid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).  
 TCH/AxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).
- NOTE 3:  $1 \leq \alpha \leq 1.6$ . The value of  $\alpha$  can be different for each channel condition but must remain the same for FER and class Ib RBER measurements for the same channel condition.
- NOTE 4: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.
- NOTE 5: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.
- NOTE 6: For AMR, the complete conformance should not be restricted to the channels identified with (\*).

Table 2a: Interference ratio at reference performance for GMSK modulated signals

| GSM 900 and GSM 850              |    |                        |                     |                 |                    |                  |
|----------------------------------|----|------------------------|---------------------|-----------------|--------------------|------------------|
| Type of channel                  |    | Propagation conditions |                     |                 |                    |                  |
|                                  |    | TU3<br>(no FH)         | TU3<br>(ideal FH)   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| PDTCH/CS-1                       | dB | 13                     | 9                   | 10              | 9                  | 9                |
| PDTCH/CS-2                       | dB | 15                     | 13                  | 14              | 13                 | 13               |
| PDTCH/CS-3                       | dB | 16                     | 15                  | 16              | 15                 | 16               |
| PDTCH/CS-4                       | dB | 21                     | 23                  | 24              | 24                 | *                |
| USF/CS-1                         | dB | 19                     | 10                  | 12              | 10                 | 10               |
| USF/CS-2 to 4                    | dB | 18                     | 9                   | 10              | 9                  | 8                |
| PRACH/11 bits <sup>1)</sup>      | dB | 8                      | 8                   | 8               | 8                  | 10               |
| PRACH/8 bits <sup>1)</sup>       | dB | 8                      | 8                   | 8               | 8                  | 9                |
| GSM 850, MXM 850 and GSM 900     |    |                        |                     |                 |                    |                  |
| Type of channel                  |    | Propagation conditions |                     |                 |                    |                  |
|                                  |    | TU3<br>(no FH)         | TU3<br>(ideal FH)   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| PDTCH/MCS-0 <sup>5)</sup>        | dB | 10                     | 8.5                 | 9               | 8.5                | 9                |
| PDTCH/MCS-1                      | dB | 13                     | 9.5                 | 10.5            | 9.5                | 10               |
| PDTCH/MCS-2                      | dB | 15                     | 12                  | 12.5            | 12                 | 12               |
| PDTCH/MCS-3                      | dB | 16.5                   | 16.5                | 17              | 17                 | 19               |
| PDTCH/MCS-4                      | dB | 19                     | 21.5                | 22              | 22                 | *                |
| USF/MCS-1 to 4                   | dB | 18                     | 10                  | 11              | 9.5                | 9.5              |
| PRACH/11 bits <sup>2), 3)</sup>  | dB | 8                      | 8                   | 8               | 8                  | 10               |
| PRACH/8 bits <sup>1)</sup>       | dB | 8                      | 8                   | 8               | 8                  | 9                |
| DCS 1 800 & PCS 1 900            |    |                        |                     |                 |                    |                  |
| Type of channel                  |    | Propagation conditions |                     |                 |                    |                  |
|                                  |    | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) |
| PDTCH/CS-1                       | dB | 13                     | 9                   | 9               | 9                  | 9                |
| PDTCH/CS-2                       | dB | 15                     | 13                  | 13              | 13                 | 13               |
| PDTCH/CS-3                       | dB | 16                     | 15                  | 16              | 16                 | 16               |
| PDTCH/CS-4                       | dB | 21                     | 23                  | 27              | 27                 | *                |
| USF/CS-1                         | dB | 19                     | 10                  | 10              | 10                 | 10               |
| USF/CS-2 to 4                    | dB | 18                     | 9                   | 9               | 9                  | 7                |
| PRACH/11 bits <sup>1)</sup>      | dB | 9                      | 9                   | 9               | 9                  | 10               |
| PRACH/8 bits <sup>1)</sup>       | dB | 8                      | 8                   | 8               | 8                  | 9                |
| DCS 1800, PCS 1 900 and MXM 1900 |    |                        |                     |                 |                    |                  |
| Type of channel                  |    | Propagation conditions |                     |                 |                    |                  |
|                                  |    | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) |
| PDTCH/MCS-0 <sup>5)</sup>        | dB | 10                     | 8.5                 | 9               | 8.5                | 9                |
| PDTCH/MCS-1                      | dB | 13                     | 9.5                 | 10              | 9.5                | 10               |
| PDTCH/MCS-2                      | dB | 15                     | 12                  | 12              | 12                 | 12               |
| PDTCH/MCS-3                      | dB | 16.5                   | 16.5                | 17              | 18                 | 19               |
| PDTCH/MCS-4                      | dB | 19                     | 21.5                | 23              | 23                 | *                |
| USF/MCS-1 to 4                   | dB | 18                     | 10                  | 9.5             | 9.5                | 9.5              |
| PRACH/11 bits <sup>2), 3)</sup>  | dB | 9                      | 9                   | 9               | 9                  | 10               |
| PRACH/8 bits <sup>1)</sup>       | dB | 8                      | 8                   | 8               | 8                  | 9                |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: The specification for PDTCH/CS-1 applies also for PACCH, PBCCH, PAGCH, PPCH, PTCCH/D.

NOTE 2: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.

NOTE 3: PDTCH/CS-4 and PDTCH/MCS-x cannot meet the reference performance for some propagation conditions (\*).

NOTE 4: Identification of the correct Training sequence is required. Cases identified by <sup>1)</sup> include one training sequence and cases identified by <sup>2)</sup> include 3 training sequences according to 3GPP TS 45.002. The specification

identified by <sup>3)</sup> also applies to CPRACH.  
 NOTE 5: The specification of MCS-0 only applies in DL RTTI configuration.

**Table 2b: Cochannel interference ratio (for normal BTS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| GSM 900, GSM 850 and MXM 850     |    |                        |                  |              |                 |               |
|----------------------------------|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel                  |    | Propagation conditions |                  |              |                 |               |
|                                  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/MCS-5                      | dB | 18                     | 14.5             | 15.5         | 14.5            | 16            |
| PDTCH/MCS-6                      | dB | 20                     | 17               | 18           | 17.5            | 21            |
| PDTCH/MCS-7                      | dB | 23.5                   | 23.5             | 24           | 24.5            | 26.5**        |
| PDTCH/MCS-8                      | dB | 28.5                   | 29               | 30           | 30              | *             |
| PDTCH/MCS-9                      | dB | 30                     | 32               | 33           | 35              | *             |
| DCS 1 800. PCS 1900 and MXM 1900 |    |                        |                  |              |                 |               |
| Type of channel                  |    | Propagation conditions |                  |              |                 |               |
|                                  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/MCS-5                      | dB | 18                     | 14.5             | 15           | 15              | 16            |
| PDTCH/MCS-6                      | dB | 20                     | 17               | 17.5         | 18              | 21            |
| PDTCH/MCS-7                      | dB | 23.5                   | 23.5             | 26           | 26.5            | 27**          |
| PDTCH/MCS-8                      | dB | 28.5                   | 29               | 25**         | 24.5**          | *             |
| PDTCH/MCS-9                      | dB | 30                     | 32               | 29**         | 29**            | *             |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.

NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (\*).

**Table 2c: Cochannel interference ratio (for MS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| GSM 850 and GSM 900    |    |                        |                  |              |                 |               |
|------------------------|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel        |    | Propagation conditions |                  |              |                 |               |
|                        |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/MCS-5            | dB | 19,5                   | 14,5             | 15,5         | 14,5            | 16,5          |
| PDTCH/MCS-6            | dB | 21,5                   | 17               | 18           | 17,5            | 21            |
| PDTCH/MCS-7            | dB | 26,5                   | 23,5             | 25           | 24,5            | *             |
| PDTCH/MCS-8            | dB | 30,5                   | 23,5**           | 25,5**       | 25,5**          | *             |
| PDTCH/MCS-9            | dB | 25,5**                 | 28**             | 30,5**       | 30,5**          | *             |
| USF/MCS-5 to 9         | dB | 17                     | 10,5             | 11,5         | 9               | 9             |
| DCS 1 800 and PCS 1900 |    |                        |                  |              |                 |               |
| Type of channel        |    | Propagation conditions |                  |              |                 |               |
|                        |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/MCS-5            | dB | 19,5                   | 14,5             | 15           | 15,5            | 16,5          |
| PDTCH/MCS-6            | dB | 21,5                   | 17               | 18           | 18,5            | 21            |
| PDTCH/MCS-7            | dB | 26,5                   | 23,5             | 27,5         | 28              | *             |
| PDTCH/MCS-8            | dB | 30,5                   | 23,5**           | 29,5**       | 29**            | *             |
| PDTCH/MCS-9            | dB | 25,5**                 | 28**             | *            | *               | *             |
| USF/MCS-5 to 9         | dB | 17                     | 10,5             | 10           | 9               | 9             |

Performance is specified at 30% BLER for those cases identified with mark \*\*.

NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (\*).

**Table 2d: Cochannel interference ratio (for normal BTS) at reference performance for ECSD (GMSK and 8-PSK modulated signals)**

| <b>GSM 900 and GSM 850</b>      |   |                               |                         |                     |                        |                      |
|---------------------------------|---|-------------------------------|-------------------------|---------------------|------------------------|----------------------|
| <b>Type of Channel</b>          |   | <b>Propagation conditions</b> |                         |                     |                        |                      |
|                                 |   | <b>TU3 (no FH)</b>            | <b>TU3 (ideal FH)</b>   | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA250 (no FH)</b> |
| E-FACCH/F                       | dB  | 17.5                          | 11.5                    | 12.5                | 11.5                   | 11.5                 |
| E-TCH/F28.8 T                   | dB  | 27                            | 15                      | 17.5                | 15.5                   | 16                   |
| E-TCH/F 32 T                    | dB  | 25.5                          | 15.5                    | 17                  | 15.5                   | 15.5                 |
| E-TCH/F28.8 NT                  | dB  | 20                            | 13.5                    | 14.5                | 13.5                   | 13.5                 |
| E-TCH/F43.2 NT                  | dB  | 24                            | 18.5                    | 19.5                | 19                     | 21.5                 |
| <b>DCS 1 800 &amp; PCS 1900</b> |   |                               |                         |                     |                        |                      |
| <b>Type of Channel</b>          |   | <b>Propagation conditions</b> |                         |                     |                        |                      |
|                                 |   | <b>TU1,5 (no FH)</b>          | <b>TU1,5 (ideal FH)</b> | <b>TU50 (no FH)</b> | <b>TU50 ideal FH)</b>  | <b>RA130 (no FH)</b> |
| E-FACCH/F                       | dB  | 17.5                          | 11.5                    | 11.5                | 11.5                   | 11.5                 |
| E-TCH/F28.8 T                   | dB  | 27                            | 15.5                    | 16                  | 16                     | 17                   |
| E-TCH/F 32 T                    | dB  | 25.5                          | 15.5                    | 16                  | 15.5                   | 15.5                 |
| E-TCH/F28.8 NT                  | dB  | 20                            | 13.5                    | 14                  | 14                     | 14.5                 |
| E-TCH/F43.2 NT                  | dB  | 24                            | 18.5                    | 19.5                | 19.5                   | 22                   |
| NOTE:                           | Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested. |                               |                         |                     |                        |                      |

**Table 2e: Cochannel interference ratio (for MS) at reference performance for ECSD (GMSK and 8-PSK modulated signals)**

| <b>GSM 850 and GSM 900</b>      |   |                               |                         |                     |                        |                      |
|---------------------------------|---|-------------------------------|-------------------------|---------------------|------------------------|----------------------|
| <b>Type of Channel</b>          |   | <b>Propagation conditions</b> |                         |                     |                        |                      |
|                                 |   | <b>TU3 (no FH)</b>            | <b>TU3 (ideal FH)</b>   | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA250 (no FH)</b> |
| E-FACCH/F                       | dB  | 17.5                          | 11.5                    | 12.5                | 11.5                   | 11.5                 |
| E-TCH/F28.8 T                   | dB  | 28                            | 15.5                    | 18                  | 16                     | 16                   |
| E-TCH/F 32 T                    | dB  | 27.5                          | 16                      | 18                  | 16                     | 17.5                 |
| E-TCH/F28.8 NT                  | dB  | 20.5                          | 14                      | 15                  | 14                     | 14                   |
| E-TCH/F43.2 NT                  | dB  | 25                            | 19                      | 20                  | 19.5                   | 22                   |
| <b>DCS 1 800 &amp; PCS 1900</b> |   |                               |                         |                     |                        |                      |
| <b>Type of Channel</b>          |   | <b>Propagation conditions</b> |                         |                     |                        |                      |
|                                 |   | <b>TU1,5 (no FH)</b>          | <b>TU1,5 (ideal FH)</b> | <b>TU50 (no FH)</b> | <b>TU50 ideal FH)</b>  | <b>RA130 (no FH)</b> |
| E-FACCH/F                       | dB  | 17.5                          | 11.5                    | 11.5                | 11.5                   | 11.5                 |
| E-TCH/F28.8 T                   | dB  | 28                            | 15.5                    | 16                  | 16                     | 17                   |
| E-TCH/F 32 T                    | dB  | 27.5                          | 16                      | 16.5                | 16.5                   | 17.5                 |
| E-TCH/F28.8 NT                  | dB  | 20                            | 13.5                    | 14                  | 14                     | 14.5                 |
| E-TCH/F43.2 NT                  | dB  | 25                            | 18.5                    | 19.5                | 19.5                   | 22                   |
| NOTE:                           | Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested. |                               |                         |                     |                        |                      |

**Table 2f: Adjacent channel interference ratio (for normal BTS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| GSM 900, GSM 850 and MXM 850  |    |                        |                  |              |                 |               |
|---|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/MCS-5   | dB | 2.5                    | -2               | -2           | -2              | 1             |
| PDTCH/MCS-6   | dB | 4.5                    | 0.5              | 1            | 1               | 6.5           |
| PDTCH/MCS-7   | dB | 8                      | 8                | 8.5          | 8.5             | 13.5**        |
| PDTCH/MCS-8   | dB | 10.5                   | 12               | 9**          | 9.5**           | *             |
| PDTCH/MCS-9   | dB | 12                     | 14               | 13.5**       | 13.5**          | *             |
| DCS 1 800, PCS 1900 and MXM 1900  |    |                        |                  |              |                 |               |
| Type of channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/MCS-5   | dB | 2.5                    | -2               | -2           | -1.5            | 1             |
| PDTCH/MCS-6   | dB | 4.5                    | 0.5              | 1.5          | 1.5             | 6.5           |
| PDTCH/MCS-7   | dB | 8                      | 8                | 10.5         | 11              | 13.5**        |
| PDTCH/MCS-8   | dB | 10.5                   | 12               | 10**         | 9.5**           | *             |
| PDTCH/MCS-9   | dB | 12                     | 14               | 16**         | 16**            | *             |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested. |    |                        |                  |              |                 |               |
| NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (*).   |    |                        |                  |              |                 |               |

**Table 2g: Adjacent channel interference ratio (for MS) at reference performance for 8-PSK modulated signals (convolutional coding)**

| GSM 850 and GSM 900  |    |                        |                  |              |                 |               |
|--|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/MCS-5  | dB | 2.5                    | -2               | -1           | -2              | 1             |
| PDTCH/MCS-6  | dB | 5.5                    | 0.5              | 2            | 1               | 6.5           |
| PDTCH/MCS-7  | dB | 10.5                   | 8                | 10           | 9               | *             |
| PDTCH/MCS-8  | dB | 15.5                   | 9**              | 11**         | 10.5**          | *             |
| PDTCH/MCS-9  | dB | 10**                   | 12.5**           | 17**         | 15.5**          | *             |
| USF/MCS-5 to 9   | dB | -1                     | -8.5             | -8           | -9.5            | -9            |
| DCS 1 800 and PCS 1900   |    |                        |                  |              |                 |               |
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/MCS-5  | dB | 2.5                    | -2               | -2           | -1.5            | 1             |
| PDTCH/MCS-6  | dB | 5.5                    | 0.5              | 1.5          | 1.5             | 6.5           |
| PDTCH/MCS-7  | dB | 10.5                   | 8                | 12.5         | 12              | *             |
| PDTCH/MCS-8  | dB | 15.5                   | 9**              | 16**         | 15.5**          | *             |
| PDTCH/MCS-9  | dB | 10**                   | 12.5**           | *            | *               | *             |
| USF/MCS-5 to 9   | dB | -1                     | -8.5             | -9           | -9.5            | -9            |
| Performance is specified at 30% BLER for those cases identified with mark **.  |    |                        |                  |              |                 |               |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. |    |                        |                  |              |                 |               |
| NOTE 2: PDTCH for MCS-x can not meet the reference performance for some propagation conditions (*).  |    |                        |                  |              |                 |               |

**Table 2h: Adjacent channel interference (for normal BTS) ratio at reference performance for ECSD (8-PSK modulated signals)**

| GSM 900 and GSM 850   |    |                        |                  |              |                 |               |
|---|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of Channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| E-TCH/F28.8 T   | dB | 10                     | -1               | 0.5          | -1              | 2.5           |
| E-TCH/F 32 T  | dB | 7.5                    | -4               | -2.5         | -4              | -4            |
| E-TCH/F28.8 NT  | dB | 3.5                    | -2.5             | -1.5         | -2.5            | -0.5          |
| E-TCH/F43.2 NT  | dB | 8                      | 2.5              | 3.5          | 2.5             | 12            |
| DCS 1 800 & PCS 1900  |    |                        |                  |              |                 |               |
| Type of Channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 ideal FH)  | RA130 (no FH) |
| E-TCH/F28.8 T   | dB | 10                     | -1               | -0.5         | -0.5            | 5             |
| E-TCH/F 32 T  | dB | 7                      | -4               | -3.5         | -3.5            | -4            |
| E-TCH/F28.8 NT  | dB | 3.5                    | -2.5             | -2           | -2              | 0.5           |
| E-TCH/F43.2 NT  | dB | 8                      | 2.5              | 4            | 3.5             | 14            |
| NOTE: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested. |    |                        |                  |              |                 |               |

**Table 2i: Adjacent channel interference (for MS) ratio at reference performance for ECSD (8-PSK modulated signals)**

| GSM 850 and GSM 900   |    |                        |                  |              |                 |               |
|---|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of Channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| E-TCH/F28.8 T   | dB | 12.5                   | -0.5             | 1.5          | 0               | 4             |
| E-TCH/F 32 T  | dB | 10                     | -1.5             | 0            | -1.5            | -1.5          |
| E-TCH/F28.8 NT  | dB | 4.5                    | -2               | -1           | -2              | 1             |
| E-TCH/F43.2 NT  | dB | 9.5                    | 3.5              | 4.5          | 4               | 12.5          |
| DCS 1 800 & PCS 1900  |    |                        |                  |              |                 |               |
| Type of Channel   |    | Propagation conditions |                  |              |                 |               |
|   |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 ideal FH)  | RA130 (no FH) |
| E-TCH/F28.8 T   | dB | 12.5                   | -0.5             | 0.5          | 0.5             | 6.5           |
| E-TCH/F 32 T  | dB | 10                     | -1.5             | -1           | -1              | -1.5          |
| E-TCH/F28.8 NT  | dB | 4.5                    | -2               | -1.5         | -1.5            | 2             |
| E-TCH/F43.2 NT  | dB | 9.5                    | 3.5              | 5            | 5               | 14            |
| NOTE: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested. |    |                        |                  |              |                 |               |



Table 2j: Reference interference performance for GMSK modulated channels

| <b>GSM 850 and GSM 900</b> |                 |                               |                         |                          |
|----------------------------|-----------------|-------------------------------|-------------------------|--------------------------|
| <b>Type of Channel</b>     |                 | <b>Propagation conditions</b> |                         |                          |
|                            |                 | <b>TU3<br/>(no FH)</b>        | <b>TU50<br/>(no FH)</b> | <b>RA250<br/>(no FH)</b> |
| TCH/ WFS12.65              | (dB)            | 21,5                          | 14,5                    | 12,5                     |
|                            | Class Ib (RBER) | 0,08                          | 0,40                    | 0,63                     |
| TCH/ WFS8.85               | (dB)            | 20                            | 11,5                    | 9                        |
|                            | Class Ib (RBER) | 0,11                          | 0,42                    | 0,73                     |
| TCH/ WFS6.60               | (dB)            | 19                            | 10,5                    | 8                        |
|                            | Class Ib (RBER) | 0,09                          | 0,16                    | 0,24                     |

| <b>DCS 1 800 &amp; PCS 1 900</b> |                 |                              |
|----------------------------------|-----------------|------------------------------|
| <b>Type of channel</b>           |                 | <b>Propagation condition</b> |
|                                  |                 | <b>TU50<br/>(no FH)</b>      |
| TCH/ WFS12.65                    | (dB)            | 13                           |
|                                  | Class Ib (RBER) | 0,63                         |
| TCH/ WFS8.85                     | (dB)            | 10                           |
|                                  | Class Ib (RBER) | 0,64                         |
| TCH/ WFS6.60                     | (dB)            | 9                            |
|                                  | Class Ib (RBER) | 0,27                         |

|         |   |
|---------|---|
| NOTE 1: | <p>Definitions:</p> <p>FER: Frame erasure rate (frames marked with BFI=1)</p> <p>UFR: Unreliable frame rate (frames marked with (BFI or UFI)=1)</p> <p>EVSIDR: Erased Valid SID frame rate (frames marked with (SID=0) or (SID=1) or ((BFI or UFI)=1) if a valid SID frame was transmitted)</p> <p>EVSIDUR: Erased Valid SID_UPDATE frame rate associated to an adaptive speech traffic channel</p> <p>ESIDR: Erased SID frame rate (frames marked with SID=0 if a valid SID frame was transmitted)</p> <p>EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.</p> <p>BER: Bit error rate</p> <p>RBER, BFI=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "good" to the number of transmitted bits in the "good" frames).</p> <p>RBER, (BFI or UFI)=0: Residual bit error rate (defined as the ratio of the number of errors detected over the frames defined as "reliable" to the number of transmitted bits in the "reliable" frames).</p> <p>RBER, SID=2 and (BFI or UFI)=0: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).</p> <p>RBER, SID=1 or SID=2: Residual bit error rate of those bits in class I which do not belong to the SID codeword (defined as the ratio of the number of errors detected over the frames that are defined as "valid SID frames" or as "invalid SID frames" to the number of transmitted bits in these frames, under the condition that a valid SID frame was sent).</p> <p>TCH/WxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).</p> |
| NOTE 2: | <p>The requirements for the DCS 1800 &amp; PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 &amp; GSM 900 TU3 (ideal FH), DCS 1800 &amp; PCS 1900 TU1.5 (ideal FH), GSM 850 &amp; GSM 900 TU50 (ideal FH) and DCS 1800 &amp; PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 &amp; PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 &amp; PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 RA250 (no FH) propagation condition.</p>  |
| NOTE 3: | <p>Ideal FH performance is already tested for the TCH/FS channel, therefore these requirements are given for information purposes and need not be tested.</p>   |
| NOTE 4: | <p>As a minimum the test of performance shall include all propagation conditions for maximum implemented codec rate and the remaining implemented codec rates for one propagation condition only, e.g. TU50 (no FH).</p>  |
| NOTE 5: | <p>The performance requirements for inband signalling, SID_UPDATE and RATSCCH are the same as those given for TCH/AFS in Table 2. It is sufficient to test inband signalling, SID_UPDATE and RATSCCH requirements for only one of the channel types TCH/AFS and TCH/WFS.</p>  |

Table 2k: Reference co-channel interference performance for 8-PSK modulated signals

| GSM 850 and GSM 900  |                        |                   |                 |                    |                  |  |
|----------------------|------------------------|-------------------|-----------------|--------------------|------------------|--|
| Type of channel      | Propagation conditions |                   |                 |                    |                  |  |
|                      | TU3<br>(no FH)         | TU3<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |  |
| O-FACCH/F (dB)       | 15,5                   | 8                 | 10              | 8                  | 9                |  |
| O-FACCH/H (dB)       | 15,5                   | 9                 | 10              | 9                  | 9,5              |  |
| O-TCH/AHS12.2 (dB)   | 22,5                   | 15,5              | 16,5            | 15,5               | 17               |  |
| Class 1b (RBER)      | 0,17                   | 0,33              | 0,30            | 0,32               | 0,26             |  |
| O-TCH/AHS10.2 (dB)   | 21,5                   | 15                | 15,5            | 14,5               | 15,5             |  |
| Class 1b (RBER)      | 0,09                   | 0,15              | 0,15            | 0,16               | 0,20             |  |
| O-TCH/AHS7.95 (dB)   | 20,5                   | 14                | 14,5            | 13,5               | 14,5             |  |
| Class 1b (RBER)      | 0,06                   | 0,07              | 0,06            | 0,07               | 0,10             |  |
| O-TCH/AHS7.4 (dB)    | 20                     | 13                | 14              | 12,5               | 13,5             |  |
| Class 1b (RBER)      | 0,08                   | 0,13              | 0,12            | 0,13               | 0,16             |  |
| O-TCH/AHS6.7 (dB)    | 19,5                   | 12,5              | 13,5            | 12                 | 13               |  |
| Class 1b (RBER)      | 0,09                   | 0,13              | 0,12            | 0,14               | 0,20             |  |
| O-TCH/AHS5.9 (dB)    | 19                     | 12                | 13              | 12                 | 12,5             |  |
| Class 1b (RBER)      | 0,11                   | 0,18              | 0,16            | 0,18               | 0,17             |  |
| O-TCH/AHS5.15 (dB)   | 18,5                   | 11,5              | 12,5            | 11                 | 12               |  |
| Class 1b (RBER)      | 0,06                   | 0,08              | 0,08            | 0,09               | 0,09             |  |
| O-TCH/AHS4.75 (dB)   | 18                     | 11                | 12              | 10,5               | 11,5             |  |
| Class 1b (RBER)      | 0,08                   | 0,10              | 0,09            | 0,10               | 0,13             |  |
| O-TCH/AHS-INB (FER)  | 16,5                   | 10,5              | 10,5            | 10,5               | 12,5             |  |
| O-TCH/AHS (EVSIUR)   | 16                     | 10                | 10,5            | 9,5                | 10,5             |  |
| O-TCH/AHS (EVRFR)    | 16                     | 10                | 10,5            | 9,5                | 11               |  |
| O-TCH/WFS23.85 (dBm) | 22,5                   | 13,5              | 16              | 13,5               | 13,5             |  |
| Class 1b (RBER)      | 0,10                   | 0,24              | 0,15            | 0,23               | 0,28             |  |
| O-TCH/WFS15.85 (dBm) | 20                     | 11                | 13,5            | 11                 | 10,5             |  |
| Class 1b (RBER)      | 0,26                   | 0,55              | 0,35            | 0,60               | 0,60             |  |
| O-TCH/WFS12.65 (dBm) | 18,5                   | 9,5               | 11,5            | 9,5                | 9,5              |  |
| Class 1b (RBER)      | 0,18                   | 0,40              | 0,31            | 0,45               | 0,40             |  |
| O-TCH/WFS8.85 (dBm)  | 17                     | 8                 | 10,5            | 7,5                | 7,5              |  |
| Class 1b (RBER)      | 0,16                   | 0,33              | 0,22            | 0,40               | 0,42             |  |
| O-TCH/WFS6.60 (dBm)  | 16                     | 7                 | 9,5             | 7                  | 6,5              |  |
| Class 1b (RBER)      | 0,10                   | 0,15              | 0,14            | 0,18               | 0,23             |  |
| O-TCH/WFS-INB (dBm)  | 14,5                   | 6                 | 7               | 6                  | 6                |  |
| O-TCH/WFS (EVSIUR)   | 17,5                   | 9,5               | 11,5            | 9,5                | 9,5              |  |
| O-TCH/WFS (EVRFR)    | 16,5                   | 7,5               | 10              | 7,5                | 7,5              |  |
| O-TCH/WHS12.65 (dBm) | 22,5                   | 15,5              | 17              | 15,5               | 17               |  |
| Class 1b (RBER)      | 0,16                   | 0,37              | 0,27            | 0,36               | 0,32             |  |
| O-TCH/ WHS8.85 (dBm) | 21                     | 14                | 15              | 14                 | 15               |  |
| Class 1b (RBER)      | 0,07                   | 0,11              | 0,11            | 0,11               | 0,11             |  |
| O-TCH/ WHS6.60 (dBm) | 19,5                   | 12                | 13,5            | 12                 | 13               |  |
| Class 1b (RBER)      | 0,09                   | 0,13              | 0,12            | 0,13               | 0,14             |  |

| DCS 1 800 & PCS 1 900 |                        |      |
|-----------------------|------------------------|------|
| Type of channel       | Propagation conditions |      |
|                       | TU50 (no FH)           |      |
| O-FACCH/F (dB)        |                        | 9    |
| O-FACCH/H (dB)        |                        | 9,5  |
| O-TCH/AHS12.2 (dB)    |                        | 16,5 |
| Class Ib (RBER)       |                        | 0,30 |
| O-TCH/AHS10.2 (dB)    |                        | 15,5 |
| Class Ib (RBER)       |                        | 0,13 |
| O-TCH/AHS7.95 (dB)    |                        | 14,5 |
| Class Ib (RBER)       |                        | 0,07 |
| O-TCH/AHS7.4 (dB)     |                        | 14   |
| Class Ib (RBER)       |                        | 0,12 |
| O-TCH/AHS6.7 (dB)     |                        | 13   |
| Class Ib (RBER)       |                        | 0,12 |
| O-TCH/AHS5.9 (dB)     |                        | 12,5 |
| Class Ib (RBER)       |                        | 0,15 |
| O-TCH/AHS5.15 (dB)    |                        | 12   |
| Class Ib (RBER)       |                        | 0,08 |
| O-TCH/AHS4.75 (dB)    |                        | 11,5 |
| Class Ib (RBER)       |                        | 0,10 |
| O-TCH/AHS-INB (FER)   |                        | 11   |
| O-TCH/AHS (EVSIDUR)   |                        | 10,5 |
| O-TCH/AHS (EVRFR)     |                        | 10,5 |
| O-TCH/WFS23.85 (dBm)  |                        | 14,5 |
| Class Ib (RBER)       |                        | 0,20 |
| O-TCH/WFS15.85 (dBm)  |                        | 12   |
| Class Ib (RBER)       |                        | 0,44 |
| O-TCH/WFS12.65 (dBm)  |                        | 10,5 |
| Class Ib (RBER)       |                        | 0,32 |
| O-TCH/WFS8.85 (dBm)   |                        | 9    |
| Class Ib (RBER)       |                        | 0,28 |
| O-TCH/WFS6.60 (dBm)   |                        | 8    |
| Class Ib (RBER)       |                        | 0,16 |
| O-TCH/WFS-INB (dBm)   |                        | 6,5  |
| O-TCH/WFS (EVSIDUR)   |                        | 11   |
| O-TCH/WFS (EVRFR)     |                        | 9    |
| O-TCH/WHS12.65 (dBm)  |                        | 16,5 |
| Class Ib (RBER)       |                        | 0,30 |
| O-TCH/ WHS8.85 (dBm)  |                        | 14,5 |
| Class Ib (RBER)       |                        | 0,11 |
| O-TCH/ WHS6.60 (dBm)  |                        | 13   |
| Class Ib (RBER)       |                        | 0,12 |

- NOTE 1: Definitions:  
FER: Frame erasure rate (frames marked with BFI=1)  
EVSIDUR: Erased Valid SID\_UPDATE frame rate associated to an adaptive speech traffic channel  
EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel. This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.  
BER: Bit error rate.  
RBER: Residual bit error rate.  
O-TCH/AxS-INB and O-TCH/WxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).
- NOTE 2: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.
- NOTE 3: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.
- NOTE 4: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.
- NOTE 5: As a minimum the test of performance shall include all propagation conditions for maximum implemented codec rate and the remaining implemented codec rates for one propagation condition only, e.g. TU50 (no FH).
- NOTE 6: For O-TCH/WHS, the performance requirements for inband signalling, SID\_UPDATE and RATSCCH are the same as those of O-TCH/AHS. It is sufficient to test inband signalling, SID\_UPDATE and RATSCCH requirements for only one of the channel types O-TCH/AHS and O-TCH/WHS.

Table 2I: Reference adjacent channel interference performance for 8-PSK modulated signals

| GSM 850 and GSM 900  |                        |                   |                 |                    |                  |  |
|----------------------|------------------------|-------------------|-----------------|--------------------|------------------|--|
| Type of channel      | Propagation conditions |                   |                 |                    |                  |  |
|                      | TU3<br>(no FH)         | TU3<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |  |
| O-FACCH/F (dB)       | 0                      | -7,5              | -7,5            | -8                 | -8,5             |  |
| O-FACCH/H (dB)       | 0,5                    | -6,5              | -5,5            | -6,5               | -6               |  |
| O-TCH/AHS12.2 (dB)   | 5                      | -1,5              | -1              | -2                 | -0,5             |  |
| Class lb (RBER)      | 0,15                   | 0,30              | 0,26            | 0,28               | 0,33             |  |
| O-TCH/AHS10.2 (dB)   | 4,5                    | -2,5              | -2              | -3                 | -2               |  |
| Class lb (RBER)      | 0,11                   | 0,15              | 0,14            | 0,14               | 0,17             |  |
| O-TCH/AHS7.95 (dB)   | 3                      | -3,5              | -3              | -4                 | -3,5             |  |
| Class lb (RBER)      | 0,07                   | 0,08              | 0,08            | 0,07               | 0,07             |  |
| O-TCH/AHS7.4 (dB)    | 2,5                    | -4,5              | -4              | -5                 | -4,5             |  |
| Class lb (RBER)      | 0,11                   | 0,15              | 0,15            | 0,15               | 0,17             |  |
| O-TCH/AHS6.7 (dB)    | 2                      | -5,5              | -4,5            | -6                 | -5,5             |  |
| Class lb (RBER)      | 0,08                   | 0,16              | 0,15            | 0,16               | 0,13             |  |
| O-TCH/AHS5.9 (dB)    | 1,5                    | -6                | -5,5            | -6,5               | -6,5             |  |
| Class lb (RBER)      | 0,08                   | 0,22              | 0,19            | 0,22               | 0,17             |  |
| O-TCH/AHS5.15 (dB)   | 1                      | -7                | -6              | -7                 | -7               |  |
| Class lb (RBER)      | 0,05                   | 0,11              | 0,10            | 0,08               | 0,10             |  |
| O-TCH/AHS4.75 (dB)   | 0,5                    | -7,5              | -7              | -7,5               | -7,5             |  |
| Class lb (RBER)      | 0,06                   | 0,13              | 0,13            | 0,11               | 0,12             |  |
| O-TCH/AHS-INB (FER)  | -1                     | -7                | -7              | -7                 | -6,5             |  |
| O-TCH/AHS (EVSIDUR)  | -1,5                   | -8                | -8              | -8                 | -7,5             |  |
| O-TCH/AHS (EVRFR)    | -1                     | -8,5              | -8              | -8,5               | -7,5             |  |
| O-TCH/WFS23.85 (dBm) | 5                      | -4                | -2              | -4                 | -4               |  |
| Class lb (RBER)      | 0,09                   | 0,23              | 0,17            | 0,21               | 0,26             |  |
| O-TCH/WFS15.85 (dBm) | 2                      | -7                | -5              | -7                 | -7               |  |
| Class lb (RBER)      | 0,30                   | 0,54              | 0,45            | 0,50               | 0,60             |  |
| O-TCH/WFS12.65 (dBm) | 0,5                    | -9                | -7              | -9                 | -9               |  |
| Class lb (RBER)      | 0,11                   | 0,50              | 0,35            | 0,46               | 0,46             |  |
| O-TCH/WFS8.85 (dBm)  | -0,5                   | -10,5             | -9              | -11                | -10,5            |  |
| Class lb (RBER)      | 0,13                   | 0,50              | 0,35            | 0,31               | 0,29             |  |
| O-TCH/WFS6.60 (dBm)  | -1,5                   | -12,              | -10             | -12                | -11,5            |  |
| Class lb (RBER)      | 0,09                   | 0,17              | 0,15            | 0,17               | 0,16             |  |
| O-TCH/WFS-INB (dBm)  | -4                     | -13               | -11,5           | -13                | -13              |  |
| O-TCH/WFS (EVSIDUR)  | -0,5                   | -8,5              | -7              | -8,5               | -8               |  |
| O-TCH/WFS (EVRFR)    | -1                     | -11               | -9,5            | -11                | -10,5            |  |
| O-TCH/WHS12.65 (dBm) | 5                      | -2                | -1              | -2                 | 0                |  |
| Class lb (RBER)      | 0,17                   | 0,36              | 0,30            | 0,33               | 0,36             |  |
| O-TCH/ WHS8.85 (dBm) | 3                      | -4                | -3              | -3,5               | -3               |  |
| Class lb (RBER)      | 0,09                   | 0,12              | 0,11            | 0,12               | 0,14             |  |
| O-TCH/ WHS6.60 (dBm) | 2                      | -6                | -5              | -6                 | -5,5             |  |
| Class lb (RBER)      | 0,07                   | 0,16              | 0,15            | 0,17               | 0,13             |  |

(continued)

**Table 2I (concluded): Reference adjacent channel interference performance for 8-PSK modulated signals**

| <b>DCS 1 800 &amp; PCS 1 900</b> |                 |                               |
|----------------------------------|-----------------|-------------------------------|
| <b>Type of channel</b>           |                 | <b>Propagation conditions</b> |
|                                  |                 | <b>TU50 (no FH)</b>           |
| O-FACCH/F                        | (dB)            | -6,5                          |
| O-FACCH/H                        | (dB)            | -5,5                          |
| O-TCH/AHS12.2                    | (dB)            | -1                            |
|                                  | Class Ib (RBER) | 0,30                          |
| O-TCH/AHS10.2                    | (dB)            | -2                            |
|                                  | Class Ib (RBER) | 0,14                          |
| O-TCH/AHS7.95                    | (dB)            | -3                            |
|                                  | Class Ib (RBER) | 0,08                          |
| O-TCH/AHS7.4                     | (dB)            | -4                            |
|                                  | Class Ib (RBER) | 0,17                          |
| O-TCH/AHS6.7                     | (dB)            | -5                            |
|                                  | Class Ib (RBER) | 0,15                          |
| O-TCH/AHS5.9                     | (dB)            | -5,5                          |
|                                  | Class Ib (RBER) | 0,20                          |
| O-TCH/AHS5.15                    | (dB)            | -6,5                          |
|                                  | Class Ib (RBER) | 0,11                          |
| O-TCH/AHS4.75                    | (dB)            | -7                            |
|                                  | Class Ib (RBER) | 0,14                          |
| O-TCH/AHS-INB                    | (FER)           | -6,5                          |
| O-TCH/AHS                        | (EVSIDUR)       | -7,5                          |
| O-TCH/AHS                        | (EVRFR)         | -8                            |
| O-TCH/WFS23.85                   | (dBm)           | -2,5                          |
|                                  | Class Ib (RBER) | 0,18                          |
| O-TCH/WFS15.85                   | (dBm)           | -5,5                          |
|                                  | Class Ib (RBER) | 0,50                          |
| O-TCH/WFS12.65                   | (dBm)           | -7,5                          |
|                                  | Class Ib (RBER) | 0,36                          |
| O-TCH/WFS8.85                    | (dBm)           | -10                           |
|                                  | Class Ib (RBER) | 0,42                          |
| O-TCH/WFS6.60                    | (dBm)           | -11,5                         |
|                                  | Class Ib (RBER) | 0,20                          |
| O-TCH/WFS-INB                    | (dBm)           | -11                           |
| O-TCH/WFS                        | (EVSIDUR)       | -8                            |
| O-TCH/WFS                        | (EVRFR)         | -10,5                         |
| O-TCH/WHS12.65                   | (dBm)           | -1                            |
|                                  | Class Ib (RBER) | 0,32                          |
| O-TCH/ WHS8.85                   | (dBm)           | -3                            |
|                                  | Class Ib (RBER) | 0,12                          |
| O-TCH/ WHS6.60                   | (dBm)           | -5                            |
|                                  | Class Ib (RBER) | 0,16                          |

|   |
|---|
| <p>NOTE 1: Definitions:<br/>FER: Frame erasure rate (frames marked with BFI=1)<br/>EVSIDUR: Erased Valid SID_UPDATE frame rate associated to an adaptive speech traffic channel<br/>EVRFR: Erased Valid RATSCCH frame rate associated to an adaptive speech traffic channel. This relates to the erasure of the RATSCCH message due to the failure to detect the RATSCCH identifier or due to a CRC failure.<br/>BER: Bit error rate.<br/>RBER: Residual bit error rate.<br/>O-TCH/AxS-INB and O-TCH/WxS-INB FER: The frame error rate for the in-band channel. Valid for both Mode Indication and Mode Command/Mode Request. When testing all four code words shall be used an equal amount of time and the mode of both in-band channels (Mode Indication and Mode Command/Mode Request) shall be changed to a neighbouring mode not more often than every 22 speech frames (440 ms).</p> <p>NOTE 2: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.</p> <p>NOTE 3: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.</p> <p>NOTE 4: The requirements for DCS 1800, PCS 1900 and MXM 1900 on TU50 (ideal FH) propagation conditions are the same as for TU50 (no FH).<br/>The requirements for the DCS 1800 &amp; PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 TU3 (no FH) propagation condition, the requirements for the DCS 1800 &amp; PCS 1900 TU1.5 (ideal FH) propagation conditions are the same as for the GSM 850 &amp; GSM 900 TU3 (ideal FH), and the requirements for the DCS 1800 &amp; PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 RA250 (no FH) propagation condition.</p> <p>NOTE 5: As a minimum the test of performance shall include all propagation conditions for maximum implemented codec rate and the remaining implemented codec rates for one propagation condition only, e.g. TU50 (no FH).</p> <p>NOTE 6: For O-TCH/WHS, the performance requirements for inband signalling, SID_UPDATE and RATSCCH are the same as those of O-TCH/AHS. It is sufficient to test inband signalling, SID_UPDATE and RATSCCH requirements for only one of the channel types O-TCH/AHS and O-TCH/WHS.</p> |
|---|



Table 2m: Co-channel interference ratio at reference performance for FLO

| GSM 900 and GSM 850   |      |                        |                     |                 |                    |                  |
|---|------|------------------------|---------------------|-----------------|--------------------|------------------|
| FLO Configuration   |      | Propagation conditions |                     |                 |                    |                  |
|   |      | TU3<br>(no FH)         | TU3<br>(ideal FH)   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| Reference TFC 1   | (dB) | 15,0                   | 9,0                 | 10,0            | 9,0                | 8,5              |
| Reference TFC 2   | (dB) | 18,0                   | 11,5                | 12,0            | 11,5               | 11,5             |
| Reference TFC 3   | (dB) | 18,5                   | 9,5                 | 11,0            | 9,5                | 9,5              |
| Reference TFC 4   | (dB) | 22,0                   | 14,5                | 14,5            | 14,5               | 14,0             |
| Reference TFC 5   | (dB) | 22,0                   | 12,5                | 14,5            | 14,0               | 11,5             |
| Reference TFC 6   | (dB) | 19,5                   | 15,5                | 16,5            | 15,5               | 15,0             |
| Reference TFC 7   | (dB) | 24,5                   | 23,0                | 23,5            | 23,0               | -                |
| DCS 1 800 & PCS 1900  |      |                        |                     |                 |                    |                  |
| FLO Configuration   |      | Propagation conditions |                     |                 |                    |                  |
|   |      | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>ideal FH)  | RA130<br>(no FH) |
| Reference TFC 1   | (dB) | (2)                    | (2)                 | 9,0             | (2)                | (2)              |
| Reference TFC 2   | (dB) | (2)                    | (2)                 | 12,0            | (2)                | (2)              |
| Reference TFC 3   | (dB) | (2)                    | (2)                 | 9,5             | (2)                | (2)              |
| Reference TFC 4   | (dB) | (2)                    | (2)                 | 14,5            | (2)                | (2)              |
| Reference TFC 5   | (dB) | (2)                    | (2)                 | 13,0            | (2)                | (2)              |
| Reference TFC 6   | (dB) | (2)                    | (2)                 | 15,5            | (2)                | (2)              |
| Reference TFC 7   | (dB) | (2)                    | (2)                 | 25,0            | (2)                | (2)              |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.   |      |                        |                     |                 |                    |                  |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the DCS 1800 & PCS 1900 TU1.5 (ideal FH), and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |      |                        |                     |                 |                    |                  |

Table 2n: Adjacent channel interference ratio at reference performance for FLO

| GSM 900 and GSM 850   |      |                        |                     |                 |                    |                  |
|---|------|------------------------|---------------------|-----------------|--------------------|------------------|
| FLO Configuration   |      | Propagation conditions |                     |                 |                    |                  |
|   |      | TU3<br>(no FH)         | TU3<br>(ideal FH)   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| Reference TFC 1   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 2   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 3   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 4   | (dB) | 5,0                    | -2,5                | -2,5            | -2,5               | -3,0             |
| Reference TFC 5   | (dB) | 5,5                    | -4,5                | -3,0            | -4,5               | -5,0             |
| Reference TFC 6   | (dB) | 3,0                    | -1,5                | -0,5            | -1,5               | 1,0              |
| Reference TFC 7   | (dB) | 7,0                    | 6,0                 | 6,5             | 6,5                | -                |
| DCS 1 800 & PCS 1900  |      |                        |                     |                 |                    |                  |
| FLO Configuration   |      | Propagation conditions |                     |                 |                    |                  |
|   |      | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>ideal FH)  | RA130<br>(no FH) |
| Reference TFC 1   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 2   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 3   | (dB) | (3)                    | (3)                 | (3)             | (3)                | (3)              |
| Reference TFC 4   | (dB) | (2)                    | (2)                 | -2,0            | (2)                | (2)              |
| Reference TFC 5   | (dB) | (2)                    | (2)                 | -4,0            | (2)                | (2)              |
| Reference TFC 6   | (dB) | (2)                    | (2)                 | -1,0            | (2)                | (2)              |
| Reference TFC 7   | (dB) | (2)                    | (2)                 | 8,0             | (2)                | (2)              |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.   |      |                        |                     |                 |                    |                  |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the DCS 1800 & PCS 1900 TU1.5 (ideal FH), and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |      |                        |                     |                 |                    |                  |
| NOTE 3: The adjacent channel interference ratio for Reference TFCs 1,2 and 3 shall be 18 dB less than the cochannel interference ratio (see Table 2m).  |      |                        |                     |                 |                    |                  |

Table 2o: C/I1 ratio at reference performance for DARP

| GSM 900 and GSM 850   |          |                           |       |       |       |       |
|-----------------------|----------|---------------------------|-------|-------|-------|-------|
| Propagation condition |          | TU50 no FH                |       |       |       |       |
| Type of channel       |          | DARP Test Scenario        |       |       |       |       |
|                       |          | DTS-1 <sup>(note 1)</sup> | DTS-2 | DTS-3 | DTS-4 | DTS-5 |
| FACCH/F               | (dB)     | 3                         | [8    | 9     | -     | -     |
| SDCCH                 | (dB)     | 4                         | 9,5   | 10    | -     | -     |
| TCH/FS                | (dB)     | 4,5                       | 9,5   | 10    | 6,5   | 9,5   |
|                       | Class Ib | 0,10                      | 0,10  | 0,10  | 0,10  | 0,10  |
|                       | Class II | 4,60                      | 4,40  | 4,30  | 5,02  | 4,60  |
| TCH/AFS12.2           | (dB)     | 5                         | 10    | 10    | 6,5   | 10    |
|                       | Class Ib | 0,60                      | 0,60  | 0,50  | 0,80  | 0,70  |
| TCH/AFS10.2           | (dB)     | 3,5                       | 8,5   | 9     | -     | -     |
|                       | Class Ib | 0,20                      | 0,15  | 0,15  | -     | -     |
| TCH/AFS7.95           | (dB)     | 1,5                       | 6,5   | 7,5   | -     | -     |
|                       | Class Ib | 0,35                      | 0,28  | 0,28  | -     | -     |
| TCH/AFS7.4            | (dB)     | 1,5                       | 6,5   | 7,5   | -     | -     |
|                       | Class Ib | 0,20                      | 0,15  | 0,15  | -     | -     |
| TCH/AFS6.7            | (dB)     | 0                         | 5,5   | 7     | -     | -     |
|                       | Class Ib | 0,50                      | 0,39  | 0,37  | -     | -     |
| TCH/AFS5.9            | (dB)     | 0                         | 5,5   | 6,5   | 1     | 5,5   |
|                       | Class Ib | 0,20                      | 0,20  | 0,15  | 0,16  | 0,20  |
| TCH/AFS5.15           | (dB)     | -1                        | 5     | 5,5   | -     | -     |
|                       | Class Ib | 0,21                      | 0,20  | 0,25  | -     | -     |
| TCH/AFS4.75           | (dB)     | -1,5                      | 4,5   | 5     | -     | -     |
|                       | Class Ib | 0,15                      | 0,15  | 0,15  | -     | -     |
| TCH/AHS7.95           | (dB)     | 9                         | 14    | 14,5  | -     | -     |
|                       | Class Ib | 0,35                      | 0,30  | 0,35  | -     | -     |
|                       | Class II | 1,80                      | 1,60  | 1,43  | -     | -     |
| TCH/AHS7.4            | (dB)     | 8,5                       | 12,5  | 13,5  | -     | -     |
|                       | Class Ib | 0,25                      | 0,20  | 0,20  | -     | -     |
|                       | Class II | 2,20                      | 1,90  | 1,80  | -     | -     |
| TCH/AHS6.7            | (dB)     | 7                         | 11,5  | 12    | -     | -     |
|                       | Class Ib | 0,25                      | 0,30  | 0,25  | -     | -     |
|                       | Class II | 2,90                      | 2,80  | 2,50  | -     | -     |
| TCH/AHS5.9            | (dB)     | 6                         | 10,5  | 11,5  | -     | -     |
|                       | Class Ib | 0,15                      | 0,15  | 0,15  | -     | -     |
|                       | Class II | 3,70                      | 3,50  | 3,50  | -     | -     |
| TCH/AHS5.15           | (dB)     | 4,5                       | 9     | 10    | -     | -     |
|                       | Class Ib | 0,25                      | 0,30  | 0,30  | -     | -     |
|                       | Class II | 4,90                      | 4,50  | 4,80  | -     | -     |
| TCH/AHS4.75           | (dB)     | 3                         | 7,5   | 8,5   | -     | -     |
|                       | Class Ib | 0,20                      | 0,25  | 0,20  | -     | -     |
|                       | Class II | 6,50                      | 5,80  | 5,50  | -     | -     |
| PDTCH CS-1            | (dB)     | 3                         | 8     | 8,5   | -     | -     |
| PDTCH CS-2            | (dB)     | 6                         | 10,5  | 11    | -     | -     |
| PDTCH CS-3            | (dB)     | 8,5                       | 13    | 13,5  | -     | -     |
| PDTCH CS-4            | (dB)     | 19,5                      | 22    | 22,5  | -     | -     |
| PDTCH MCS-1           | (dB)     | 3,5                       | 9,5   | 10,5  | -     | -     |
| PDTCH MCS-2           | (dB)     | 5,5                       | 11    | 12    | -     | -     |
| PDTCH MCS-3           | (dB)     | 11                        | 15    | 15,5  | -     | -     |
| PDTCH MCS-4           | (dB)     | 18                        | 20    | 21    | -     | -     |

(Continued)

Table 2o (continued): C/I1 ratio at reference performance for DARP

| DCS 1 800 & PCS 1900  |          |                           |       |       |       |       |
|-----------------------|----------|---------------------------|-------|-------|-------|-------|
| Propagation condition |          | TU50 no FH                |       |       |       |       |
| Type of channel       |          | DARP Test Scenario        |       |       |       |       |
|                       |          | DTS-1 <sup>(note 1)</sup> | DTS-2 | DTS-3 | DTS-4 | DTS-5 |
| FACCH/F               | (dB)     | 3                         | 7,5   | 8     | -     | -     |
| SDCCH                 | (dB)     | 4                         | 8,5   | 9,5   | -     | -     |
| TCH/FS                | (dB)     | 3,5                       | 9     | 9     | 6     | [9    |
|                       | Class Ib | 0,10                      | 0,10  | 0,10  | 0,10  | 0,10  |
|                       | Class II | 5,30                      | 5,70  | 5,40  | 6,09  | 5,80  |
| TCH/AFS12.2           | (dB)     | 4                         | 9     | 10    | 6     | 9     |
|                       | Class Ib | 0,87                      | 0,89  | 0,80  | 0,95  | 1,10  |
| TCH/AFS10.2           | (dB)     | 3                         | 7,5   | 8,5   | -     | -     |
|                       | Class Ib | 0,20                      | 0,20  | 0,20  | -     | -     |
| TCH/AFS7.95           | (dB)     | 0,5                       | 5,5   | 6,5   | -     | -     |
|                       | Class Ib | 0,36                      | 0,43  | 0,40  | -     | -     |
| TCH/AFS7.4            | (dB)     | 0,5                       | 5,5   | 6,5   | -     | -     |
|                       | Class Ib | 0,20                      | 0,20  | 0,20  | -     | -     |
| TCH/AFS6.7            | (dB)     | -0,5                      | 4,5   | 5,5   | -     | -     |
|                       | Class Ib | 0,70                      | 0,60  | 0,56  | -     | -     |
| TCH/AFS5.9            | (dB)     | -1                        | 4,5   | 5     | 0     | 4     |
|                       | Class Ib | 0,20                      | 0,30  | 0,16  | 0,21  | 0,22  |
| TCH/AFS5.15           | (dB)     | -1,5                      | 3,5   | 4,5   | -     | -     |
|                       | Class Ib | 0,25                      | 0,30  | 0,25  | -     | -     |
| TCH/AFS4.75           | (dB)     | -2                        | 3     | 4     | -     | -     |
|                       | Class Ib | 0,15                      | 0,20  | 0,20  | -     | -     |
| TCH/AHS7.95           | (dB)     | 10                        | 14    | 15    | -     | -     |
|                       | Class Ib | 0,35                      | 0,40  | 0,30  | -     | -     |
|                       | Class II | 1,70                      | 1,80  | 1,50  | -     | -     |
| TCH/AHS7.4            | (dB)     | 9                         | 13    | 14    | -     | -     |
|                       | Class Ib | 0,20                      | 0,20  | 0,20  | -     | -     |
|                       | Class II | 2,10                      | 1,90  | 1,90  | -     | -     |
| TCH/AHS6.7            | (dB)     | 7,5                       | 11,5  | 12,5  | -     | -     |
|                       | Class Ib | 0,25                      | 0,25  | 0,25  | -     | -     |
|                       | Class II | 3,20                      | 2,80  | 2,50  | -     | -     |
| TCH/AHS5.9            | (dB)     | 6                         | 10,5  | 11,5  | -     | -     |
|                       | Class Ib | 0,15                      | 0,20  | 0,20  | -     | -     |
|                       | Class II | 3,80                      | 3,40  | 3,30  | -     | -     |
| TCH/AHS5.15           | (dB)     | 5                         | 9     | 10    | -     | -     |
|                       | Class Ib | 0,31                      | 0,30  | 0,30  | -     | -     |
|                       | Class II | 5,00                      | 4,70  | 4,40  | -     | -     |
| TCH/AHS4.75           | (dB)     | 3,5                       | 8     | 9     | -     | -     |
|                       | Class Ib | 0,20                      | 0,25  | 0,20  | -     | -     |
|                       | Class II | 6,70                      | 5,90  | 5,46  | -     | -     |
| PDTCH CS-1            | (dB)     | 2,5                       | 7     | 8     | -     | -     |
| PDTCH CS-2            | (dB)     | 6                         | 10,5  | 11    | -     | -     |
| PDTCH CS-3            | (dB)     | 9                         | 12,5  | 13    | -     | -     |
| PDTCH CS-4            | (dB)     | 22                        | 23,5  | 24    | -     | -     |
| PDTCH MCS-1           | (dB)     | 3,5                       | 9     | 10    | -     | -     |
| PDTCH MCS-2           | (dB)     | 6,5                       | 11    | 11,5  | -     | -     |
| PDTCH MCS-3           | (dB)     | 11,5                      | 15    | 15,5  | -     | -     |
| PDTCH MCS-4           | (dB)     | 19,5                      | 22    | 22,5  | -     | -     |

NOTE 1: DARP Test Scenario 1 (DTS-1) is similar to testing of co-channel interference for non-DARP receivers with essentially at least as stringent requirements under TU50noFH propagation conditions. Thus the non-DARP test under this propagation condition need not be tested for MS indicating support for Downlink Advanced Receiver Performance – phase I (see 3GPP TS 24.008).

**Table 2p: Co-channel interference ratio at reference performance for Repeated Downlink FACCH and Repeated SACCH**

| <b>GSM 900 and GSM 850</b>  |      |                               |                             |                         |                            |                          |
|---|------|-------------------------------|-----------------------------|-------------------------|----------------------------|--------------------------|
|   | (dB) | <b>Propagation conditions</b> |                             |                         |                            | <b>RA250<br/>(no FH)</b> |
|   |      | <b>TU3<br/>(no FH)</b>        | <b>TU3<br/>(ideal FH)</b>   | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>(ideal FH)</b> |                          |
| FACCH/F   |      | 11,5                          | 4,5                         | 5,5                     | 4,5                        | 4,5                      |
| FACCH/H   |      | [tbd]                         | [tbd]                       | [tbd]                   | [tbd]                      | [tbd]                    |
| SACCH   |      | 5,0                           | 4,5                         | 4,5                     | 4,5                        | 4,5                      |
| <b>DCS 1 800 &amp; PCS 1900</b>   |      |                               |                             |                         |                            |                          |
|   | (dB) | <b>Propagation conditions</b> |                             |                         |                            | <b>RA130<br/>(no FH)</b> |
|   |      | <b>TU1,5<br/>(no FH)</b>      | <b>TU1,5<br/>(ideal FH)</b> | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>ideal FH)</b>  |                          |
| FACCH/F   |      | (2)                           | (2)                         | 4,5                     | (2)                        | (2)                      |
| FACCH/H   |      | (2)                           | (2)                         | [tbd]                   | (2)                        | (2)                      |
| SACCH   |      | (2)                           | (2)                         | 4,5                     | (2)                        | (2)                      |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.   |      |                               |                             |                         |                            |                          |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the DCS 1800 & PCS 1900 TU1.5 (ideal FH), and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |      |                               |                             |                         |                            |                          |

**Table 2q : C/I1 ratio at reference performance for Downlink Advanced Receiver Performance – phase II**

| GSM 900 and GSM 850     |           |                               |       |       |
|-------------------------|-----------|-------------------------------|-------|-------|
| Propagation conditions  |           |                               |       |       |
| TU50 (noFH)             |           |                               |       |       |
| Correlation=0; AGI=0 dB |           |                               |       |       |
|                         |           | DTS-1/DTS-1b <sup>Note1</sup> | DTS-2 | DTS-5 |
| TCH/FS                  | FER (dB)  | -12,0                         | 1,0   | 1,0   |
|                         | Rber1b    | 0,06%                         | 0,10% | 0,07% |
|                         | Rber2     | 5,37%                         | 4,90% | 5,01% |
| TCH/AFS12.2             | FER (dB)  | -11,0                         | 2,5   | 2,5   |
|                         | Rber1b    | 0,69%                         | 0,64% | 0,67% |
| TCH/AFS7.4              | FER (dB)  | -13,5                         | 0,0   | 0,0   |
|                         | Rber1b    | 0,21%                         | 0,15% | 0,15% |
| TCH/AFS5.9              | FER (dB)  | -15,0                         | -1,5  | -2,0  |
|                         | Rber1b    | 0,17%                         | 0,16% | 0,23% |
| TCH/AHS7.4              | FER (dB)  | -7,5                          | 4,5   | 4,5   |
|                         | Rber1b    | 0,40%                         | 0,50% | 0,53% |
|                         | Rber2     | 1,88%                         | 2,25% | 2,49% |
| TCH/AHS5.9              | FER (dB)  | -9,5                          | 3,0   | 3,0   |
|                         | Rber1b    | 0,51%                         | 0,64% | 0,59% |
|                         | Rber2     | 3,27%                         | 3,85% | 4,05% |
| PDTCH CS-1              | BLER (dB) | -12,5                         | 0,5   | 0,5   |
| PDTCH CS-2              | BLER (dB) | -9,5                          | 3,0   | 3,5   |
| PDTCH CS-3              | BLER (dB) | -8,0                          | 5,0   | 5,5   |
| PDTCH CS-4              | BLER (dB) | 0,0                           | 12,0  | 13,0  |
| PDTCH MCS-1             | BLER (dB) | -11,5                         | 1,0   | 1,5   |
| PDTCH MCS-2             | BLER (dB) | -10,0                         | 2,5   | 2,5   |
| PDTCH MCS-3             | BLER (dB) | -6,5                          | 6,0   | 6,0   |
| PDTCH MCS-4             | BLER (dB) | -1,0                          | 11,0  | 12,5  |
| PDTCH MCS-5             | BLER (dB) | -6,5                          | 7,0   | 8,0   |
| PDTCH MCS-6             | BLER (dB) | -4,0                          | 9,0   | 10,5  |
| PDTCH MCS-7             | BLER (dB) | 1,5                           | 13,5  | 15,0  |
| PDTCH MCS-8             | BLER (dB) | 1,5**                         | 20,0  | 20,5  |
| PDTCH MCS-9             | BLER (dB) | 6,0**                         | 23,5  | 26,5  |
| PDTCH DAS-5             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-6             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-7             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-8             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-9             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-10            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-11            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-12            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-5             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-6             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-7             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-8             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-9             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-10            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-11            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-12            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |

NOTE: Performance is specified at 30% BLER for those cases identified with mark "\*\*\*\*"

NOTE: Performance is not specified for those cases identified with mark "-"

NOTE 1: DARP Test Scenario 1 (DTS-1) is similar to testing of co-channel interference for non-DARP receivers with essentially at least as stringent requirements under TU50noFH propagation conditions. DTS-1b utilizes an 8-PSK

modulated interferer and is to be applied for MCS5-MCS9.

**Table 2q continued: C/I1 ratio at reference performance for Downlink Advanced Receiver Performance – phase II**

| DCS 1800 and PCS 1900   |           |                               |       |       |
|-------------------------|-----------|-------------------------------|-------|-------|
| Propagation conditions  |           |                               |       |       |
| TU50 (noFH)             |           |                               |       |       |
| Correlation=0; AGI=0 dB |           |                               |       |       |
|                         |           | DTS-1/DTS-1b <sup>Note1</sup> | DTS-2 | DTS-5 |
| TCH/FS                  | FER (dB)  | -11,5                         | 0,5   | 0,5   |
|                         | Rber1b    | 0,08%                         | 0,08% | 0,09% |
|                         | Rber2     | 5,86%                         | 5,91% | 6,01% |
| TCH/AFS12.2             | FER (dB)  | -10,5                         | 1,5   | 1,5   |
|                         | Rber1b    | 0,84%                         | 0,94% | 0,94% |
| TCH/AFS7.4              | FER (dB)  | -13,5                         | -1,0  | -1,0  |
|                         | Rber1b    | 0,18%                         | 0,18% | 0,19% |
| TCH/AFS5.9              | FER (dB)  | -14,5                         | -2,0  | -2,0  |
|                         | Rber1b    | 0,20%                         | 0,18% | 0,21% |
| TCH/AHS7.4              | FER (dB)  | -7,0                          | 4,5   | 5,0   |
|                         | Rber1b    | 0,57%                         | 0,52% | 0,56% |
|                         | Rber2     | 2,11%                         | 2,27% | 2,34% |
| TCH/AHS5.9              | FER (dB)  | -9,0                          | 3,0   | 3,0   |
|                         | Rber1b    | 0,62%                         | 0,70% | 0,64% |
|                         | Rber2     | 3,56%                         | 3,75% | 3,91% |
| PDTCH CS-1              | BLER (dB) | -12,0                         | 0,0   | 0,0   |
| PDTCH CS-2              | BLER (dB) | -9,0                          | 3,0   | 3,0   |
| PDTCH CS-3              | BLER (dB) | -7,0                          | 4,5   | 5,0   |
| PDTCH CS-4              | BLER (dB) | 4,5                           | 12,5  | 13,5  |
| PDTCH MCS-1             | BLER (dB) | -10,5                         | 1,0   | 1,0   |
| PDTCH MCS-2             | BLER (dB) | -8,5                          | 2,5   | 2,5   |
| PDTCH MCS-3             | BLER (dB) | -4,5                          | 6,0   | 6,0   |
| PDTCH MCS-4             | BLER (dB) | 2,0                           | 11,5  | 13,0  |
| PDTCH MCS-5             | BLER (dB) | -6,0                          | 6,5   | 7,5   |
| PDTCH MCS-6             | BLER (dB) | -3,5                          | 8,5   | 9,5   |
| PDTCH MCS-7             | BLER (dB) | 3,0                           | 14,0  | 15,0  |
| PDTCH MCS-8             | BLER (dB) | 5,0**                         | 20,5  | 22,0  |
| PDTCH MCS-9             | BLER (dB) | 12,0**                        | 25,0  | 25,5  |
| PDTCH DAS-5             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-6             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-7             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-8             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-9             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-10            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-11            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DAS-12            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-5             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-6             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-7             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-8             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-9             | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-10            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-11            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |
| PDTCH DBS-12            | BLER (dB) | [tbd]                         | [tbd] | [tbd] |

NOTE: Performance is specified at 30% BLER for those cases identified with mark "\*\*\*"  
 NOTE: Performance is not specified for those cases identified with mark "-"

NOTE 1: DARP Test Scenario 1 (DTS-1) is similar to testing of co-channel interference for non-DARP receivers with essentially at least as stringent requirements under TU50noFH propagation conditions. DTS-1b utilizes an 8-PSK modulated interferer and is to be applied for MCS5-MCS9.

**Table 2r: Cochannel interference ratio (for normal BTS) at reference performance for 16-QAM modulated signals (Normal symbol rate and BTTI) (EGPRS2-A UL)**

| GSM 900, GSM 850 and MXM 850   |    |                        |                     |                 |                    |                  |
|--|----|------------------------|---------------------|-----------------|--------------------|------------------|
| Type of channel  |    | Propagation conditions |                     |                 |                    |                  |
|  |    | TU3<br>(no FH)         | TU3<br>(ideal FH)   | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| PDTCH/UAS-7  | dB | 27                     | (2)                 | 23,5            | 22,5               | 22               |
| PDTCH/UAS-8  | dB | 28                     | (2)                 | 25              | 24,5               | 25,5             |
| PDTCH/UAS-9  | dB | 28,5                   | (2)                 | 27              | 26,5               | 33               |
| PDTCH/UAS-10   | dB | 29,5                   | (2)                 | 29,5            | 29,5               | 34,5**           |
| PDTCH/UAS-11   | dB | 30,5                   | (2)                 | 33,0            | 33,0               | -                |
| DCS 1 800. PCS 1900 and MXM 1900   |    |                        |                     |                 |                    |                  |
| Type of channel  |    | Propagation conditions |                     |                 |                    |                  |
|  |    | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) |
| PDTCH/UAS-7  | dB | (2)                    | (2)                 | 23              | (2)                | (2)              |
| PDTCH/UAS-8  | dB | (2)                    | (2)                 | 25              | (2)                | (2)              |
| PDTCH/UAS-9  | dB | (2)                    | (2)                 | 26              | (2)                | (2)              |
| PDTCH/UAS-10   | dB | (2)                    | (2)                 | 26,5**          | (2)                | (2)              |
| PDTCH/UAS-11   | dB | (2)                    | (2)                 | 29,5**          | (2)                | (2)              |
| Performance is specified at 30% BLER for those cases identified with mark "**"   |    |                        |                     |                 |                    |                  |
| Performance is not specified for those cases identified with mark "-"  |    |                        |                     |                 |                    |                  |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.  |    |                        |                     |                 |                    |                  |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                        |                     |                 |                    |                  |



**Table 2s: Cochannel interference ratio (for MS) at reference performance for 8-PSK, 16-QAM and 32-QAM modulated signals (Normal symbol rate, BTTI and turbo-coding) (EGPRS2-A DL)**

| GSM 850 and GSM 900  |    |                        |                  |              |                 |               |
|--|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/DAS-5  | dB | 16,5                   | (2)              | 15           | 15              | 12,5          |
| PDTCH/DAS-6  | dB | 18                     | (2)              | 16           | 15,5            | 14,5          |
| PDTCH/DAS-7  | dB | 19,5                   | (2)              | 17           | 17              | 16,5          |
| PDTCH/DAS-8  | dB | 22,5                   | (2)              | 20           | 19,5            | 19,5          |
| PDTCH/DAS-9  | dB | 24,5                   | (2)              | 23           | 23              | 24,5          |
| PDTCH/DAS-10   | dB | 28                     | (2)              | 26           | 25,5            | 24,5**        |
| PDTCH/DAS-11   | dB | 30,5                   | (2)              | 31,5         | 31              | -             |
| PDTCH/DAS-12   | dB | 34,5                   | (2)              | 33**         | 32,5**          | -             |
| USF/DAS-5 to 7   | dB | (3)                    | (3)              | (3)          | (3)             | (3)           |
| USF/DAS-8 to 9   | dB | 10,0                   | (2)              | 6,0          | 4,5             | 4,0           |
| USF/DAS-10 to 12   | dB | 10,0                   | (2)              | 7,0          | 4,5             | 4,0           |
| DCS 1 800 and PCS 1900   |    |                        |                  |              |                 |               |
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/DAS-5  | dB | (2)                    | (2)              | 15           | (2)             | (2)           |
| PDTCH/DAS-6  | dB | (2)                    | (2)              | 16           | (2)             | (2)           |
| PDTCH/DAS-7  | dB | (2)                    | (2)              | 17,5         | (2)             | (2)           |
| PDTCH/DAS-8  | dB | (2)                    | (2)              | 20           | (2)             | (2)           |
| PDTCH/DAS-9  | dB | (2)                    | (2)              | 24           | (2)             | (2)           |
| PDTCH/DAS-10   | dB | (2)                    | (2)              | 27           | (2)             | (2)           |
| PDTCH/DAS-11   | dB | (2)                    | (2)              | 32**         | (2)             | (2)           |
| PDTCH/DAS-12   | dB | (2)                    | (2)              | -            | (2)             | (2)           |
| USF/DAS-5 to 7   | dB | (3)                    | (3)              | (3)          | (3)             | (3)           |
| USF/DAS-8 to 9   | dB | (2)                    | (2)              | 4,5          | (2)             | (2)           |
| USF/DAS-10 to 12   | dB | (2)                    | (2)              | 5,5          | (2)             | (2)           |
| Performance is specified at 30% BLER for those cases identified with mark "**"   |    |                        |                  |              |                 |               |
| Performance is not specified for those cases identified with mark "-"  |    |                        |                  |              |                 |               |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.   |    |                        |                  |              |                 |               |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                        |                  |              |                 |               |
| NOTE 3: The requirements for USF/DAS-5 to 7 are the same as for USF/MCS-5 to 9.  |    |                        |                  |              |                 |               |

**Table 2t: Cochannel interference ratio (for normal BTS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate and BTTI) (EGPRS2-B UL)**

| <b>GSM 900, GSM 850 and MXM 850</b>  |    |                               |                         |                     |                        |                      |
|--|----|-------------------------------|-------------------------|---------------------|------------------------|----------------------|
| <b>Type of channel</b>   |    | <b>Propagation conditions</b> |                         |                     |                        |                      |
|  |    | <b>TU3 (no FH)</b>            | <b>TU3 (ideal FH)</b>   | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA250 (no FH)</b> |
| PDTCH/UBS-5  | dB | -4,5 / [tbd]                  | (2)                     | -4,5 / [tbd]        | -6,0 / [tbd]           | -1,5 / [tbd]         |
| PDTCH/UBS-6  | dB | -2,0 / [tbd]                  | (2)                     | -3,0 / [tbd]        | -3,5 / [tbd]           | 1,5 / [tbd]          |
| PDTCH/UBS-7  | dB | 2,5 / [tbd]                   | (2)                     | 1,5 / [tbd]         | 1,0 / [tbd]            | 5,5 / [tbd]          |
| PDTCH/UBS-8  | dB | 4,5 / [tbd]                   | (2)                     | 4,0 / [tbd]         | 3,5 / [tbd]            | 9,5 / [tbd]          |
| PDTCH/UBS-9  | dB | 5,5 / [tbd]                   | (2)                     | 5,5 / [tbd]         | 5,0 / [tbd]            | 13,0 / [tbd]         |
| PDTCH/UBS-10   | dB | 11,0 / [tbd]                  | (2)                     | 12,5 / [tbd]        | 12,0 / [tbd]           | 26,0 / [tbd]         |
| PDTCH/UBS-11   | dB | 13,5 / [tbd]                  | (2)                     | 16,5 / [tbd]        | 17,0 / [tbd]           | 35,0 / [tbd]         |
| PDTCH/UBS-12   | dB | 15,0 / [tbd]                  | (2)                     | 19,5 / [tbd]        | 19,5 / [tbd]           | 28,0** / [tbd]       |
| <b>DCS 1 800. PCS 1900 and MXM 1900</b>  |    |                               |                         |                     |                        |                      |
| <b>Type of channel</b>   |    | <b>Propagation conditions</b> |                         |                     |                        |                      |
|  |    | <b>TU1,5 (no FH)</b>          | <b>TU1,5 (ideal FH)</b> | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA130 (no FH)</b> |
| PDTCH/UBS-5  | dB | (2)                           | (2)                     | -4,5 / [tbd]        | (2)                    | (2)                  |
| PDTCH/UBS-6  | dB | (2)                           | (2)                     | -2,5 / [tbd]        | (2)                    | (2)                  |
| PDTCH/UBS-7  | dB | (2)                           | (2)                     | 2,5 / [tbd]         | (2)                    | (2)                  |
| PDTCH/UBS-8  | dB | (2)                           | (2)                     | 5,0 / [tbd]         | (2)                    | (2)                  |
| PDTCH/UBS-9  | dB | (2)                           | (2)                     | 6,5 / [tbd]         | (2)                    | (2)                  |
| PDTCH/UBS-10   | dB | (2)                           | (2)                     | 14,5 / [tbd]        | (2)                    | (2)                  |
| PDTCH/UBS-11   | dB | (2)                           | (2)                     | 22,5 / [tbd]        | (2)                    | (2)                  |
| PDTCH/UBS-12   | dB | (2)                           | (2)                     | 28,5 / [tbd]        | (2)                    | (2)                  |
| <p>NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.</p> <p>NOTE 2: The requirements for the DCS 1800 &amp; PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 &amp; GSM 900 TU3 (ideal FH), DCS 1800 &amp; PCS 1900 TU1.5 (ideal FH) and DCS 1800 &amp; PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 &amp; PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 &amp; PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 &amp; GSM 900 RA250 (no FH) propagation condition.</p> <p>NOTE 3: RX diversity requirements are given by the left numbers. Requirements without RX diversity are given by the right numbers.</p> |    |                               |                         |                     |                        |                      |

**Table 2u: Cochannel interference ratio (for MS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI and turbo coding) (EGPRS2-B DL)**

| GSM 850 and GSM 900  |    |                        |                  |              |                 |               |
|--|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/DBS-5  | dB | 17,0                   | (2)              | 15,0         | 12,0            | 12,0          |
| PDTCH/DBS-6  | dB | 19,0                   | (2)              | 17,5         | 17,5            | 15,0          |
| PDTCH/DBS-7  | dB | 22,5                   | (2)              | 20,0         | 19,5            | 19,0          |
| PDTCH/DBS-8  | dB | 25,5                   | (2)              | 23,0         | 23,0            | 24,0          |
| PDTCH/DBS-9  | dB | 27,0                   | (2)              | 26,0         | 25,5            | 27,0          |
| PDTCH/DBS-10   | dB | 31,0                   | (2)              | 32,0         | 31,5            | -             |
| PDTCH/DBS-11   | dB | 34,0                   | (2)              | 31,0**       | 28,0**          | -             |
| PDTCH/DBS-12   | dB | 27,0**                 | (2)              | 34,5**       | 32,0**          | -             |
| USF/DBS-5 to 6   | dB | [14,5]                 | (2)              | [9,0]        | [8,5]           | [8,5]         |
| USF/DBS-7 to 9   | dB | [11,0]                 | (2)              | [6,0]        | [5,5]           | [5,0]         |
| USF/DBS-10 to 12   | dB | [12,5]                 | (2)              | [7,0]        | [6,0]           | [6,0]         |
| DCS 1 800 and PCS 1900   |    |                        |                  |              |                 |               |
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/DBS-5  | dB | (2)                    | (2)              | 12,0         | (2)             | (2)           |
| PDTCH/DBS-6  | dB | (2)                    | (2)              | 15,5         | (2)             | (2)           |
| PDTCH/DBS-7  | dB | (2)                    | (2)              | 19,0         | (2)             | (2)           |
| PDTCH/DBS-8  | dB | (2)                    | (2)              | 23,0         | (2)             | (2)           |
| PDTCH/DBS-9  | dB | (2)                    | (2)              | 22,0**       | (2)             | (2)           |
| PDTCH/DBS-10   | dB | (2)                    | (2)              | 30,0**       | (2)             | (2)           |
| PDTCH/DBS-11   | dB | (2)                    | (2)              | -            | (2)             | (2)           |
| PDTCH/DBS-12   | dB | (2)                    | (2)              | -            | (2)             | (2)           |
| USF/DBS-5 to 6   | dB | (2)                    | (2)              | [8,5]        | (2)             | (2)           |
| USF/DBS-7 to 9   | dB | (2)                    | (2)              | [5,5]        | (2)             | (2)           |
| USF/DBS-10 to 12   | dB | (2)                    | (2)              | [6,5]        | (2)             | (2)           |
| Performance is specified at 30% BLER for those cases identified with mark "**"   |    |                        |                  |              |                 |               |
| Performance is not specified for those cases identified with mark "-"  |    |                        |                  |              |                 |               |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.   |    |                        |                  |              |                 |               |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                        |                  |              |                 |               |

**Table 2v: Adjacent channel interference ratio (for normal BTS) at reference performance for 16-QAM modulated signals (Normal symbol rate and BTTI) (EGPRS2-A UL)**

| <b>GSM 900, GSM 850 and MXM 850</b>  |    |                               |                         |                     |                        |                      |
|--|----|-------------------------------|-------------------------|---------------------|------------------------|----------------------|
| <b>Type of channel</b>   |    | <b>Propagation conditions</b> |                         |                     |                        |                      |
|  |    | <b>TU3 (no FH)</b>            | <b>TU3 (ideal FH)</b>   | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA250 (no FH)</b> |
| PDTCH/UAS-7  | dB | 13,0                          | (2)                     | 9,5                 | 8,0                    | 10,5                 |
| PDTCH/UAS-8  | dB | 14,5                          | (2)                     | 11,0                | 10,0                   | 15,0                 |
| PDTCH/UAS-9  | dB | 15,5                          | (2)                     | 13,5                | 12,5                   | 22,5                 |
| PDTCH/UAS-10   | dB | 17,5                          | (2)                     | 17,0                | 17,0                   | 25,0**               |
| PDTCH/UAS-11   | dB | 19,0                          | (2)                     | 23,5                | 24,0                   | -                    |
| <b>DCS 1 800, PCS 1900 and MXM 1900</b>  |    |                               |                         |                     |                        |                      |
| <b>Type of channel</b>   |    | <b>Propagation conditions</b> |                         |                     |                        |                      |
|  |    | <b>TU1,5 (no FH)</b>          | <b>TU1,5 (ideal FH)</b> | <b>TU50 (no FH)</b> | <b>TU50 (ideal FH)</b> | <b>RA130 (no FH)</b> |
| PDTCH/UAS-7  | dB | (2)                           | (2)                     | 9,5                 | (2)                    | (2)                  |
| PDTCH/UAS-8  | dB | (2)                           | (2)                     | 12,0                | (2)                    | (2)                  |
| PDTCH/UAS-9  | dB | (2)                           | (2)                     | 15,5                | (2)                    | (2)                  |
| PDTCH/UAS-10   | dB | (2)                           | (2)                     | 24,5                | (2)                    | (2)                  |
| PDTCH/UAS-11   | dB | (2)                           | (2)                     | 20,5**              | (2)                    | (2)                  |
| Performance is specified at 30% BLER for those cases identified with mark "**"   |    |                               |                         |                     |                        |                      |
| Performance is not specified for those cases identified with mark "-"  |    |                               |                         |                     |                        |                      |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.  |    |                               |                         |                     |                        |                      |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                               |                         |                     |                        |                      |

**Table 2w: Adjacent channel interference ratio (for MS) at reference performance for 8-PSK, 16-QAM and 32-QAM modulated signals (Normal symbol rate and Turbo coding) (EGPRS2-A DL)**

| GSM 850 and GSM 900  |    |                        |                  |              |                 |               |
|--|----|------------------------|------------------|--------------|-----------------|---------------|
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| PDTCH/DAS-5  | dB | 3                      | (2)              | -2,0         | -3,0            | -3            |
| PDTCH/DAS-6  | dB | 3,5                    | (2)              | -0,5         | -1,5            | -1            |
| PDTCH/DAS-7  | dB | 4,5                    | (2)              | 1,5          | 0,5             | 2             |
| PDTCH/DAS-8  | dB | 7,5                    | (2)              | 4,5          | 4               | 5,5           |
| PDTCH/DAS-9  | dB | 9,0                    | (2)              | 7,5          | 7               | 14,5          |
| PDTCH/DAS-10   | dB | 12,5                   | (2)              | 12           | 12              | 14,0**        |
| PDTCH/DAS-11   | dB | 15,5                   | (2)              | 19           | 19,5            | -             |
| PDTCH/DAS-12   | dB | 17,5                   | (2)              | 19,5**       | 17,5**          | -             |
| USF/DAS-5 to 7   | dB | (3)                    | (3)              | (3)          | (3)             | (3)           |
| USF/DAS-8 to 9   | dB | -6,0                   | (2)              | -14,0        | -15,5           | -16,0         |
| USF/DAS-10 to 12   | dB | -5,5                   | (2)              | -13,0        | -14,5           | -14,0         |
| DCS 1 800 and PCS 1900   |    |                        |                  |              |                 |               |
| Type of channel  |    | Propagation conditions |                  |              |                 |               |
|  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |
| PDTCH/DAS-5  | dB | (2)                    | (2)              | -2,5         | (2)             | (2)           |
| PDTCH/DAS-6  | dB | (2)                    | (2)              | -0,5         | (2)             | (2)           |
| PDTCH/DAS-7  | dB | (2)                    | (2)              | 1,5          | (2)             | (2)           |
| PDTCH/DAS-8  | dB | (2)                    | (2)              | 5,0          | (2)             | (2)           |
| PDTCH/DAS-9  | dB | (2)                    | (2)              | 9,0          | (2)             | (2)           |
| PDTCH/DAS-10   | dB | (2)                    | (2)              | 16,0         | (2)             | (2)           |
| PDTCH/DAS-11   | dB | (2)                    | (2)              | 22,0**       | (2)             | (2)           |
| PDTCH/DAS-12   | dB | (2)                    | (2)              | -            | (2)             | (2)           |
| USF/DAS-5 to 7   | dB | (3)                    | (3)              | (3)          | (3)             | (3)           |
| USF/DAS-8 to 9   | dB | (2)                    | (2)              | -14,0        | (2)             | (2)           |
| USF/DAS-10 to 12   | dB | (2)                    | (2)              | -13,5        | (2)             | (2)           |
| Performance is specified at 30% BLER for those cases identified with mark "**"   |    |                        |                  |              |                 |               |
| Performance is not specified for those cases identified with mark "-"  |    |                        |                  |              |                 |               |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.   |    |                        |                  |              |                 |               |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                        |                  |              |                 |               |
| NOTE 3: The requirements for USF/DAS-5 to 7 are the same as for USF/MCS-5 to 9.  |    |                        |                  |              |                 |               |

**Table 2x: Adjacent channel interference ratio (for normal BTS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI and no PAN) using narrow pulse shaping filter (EGPRS2-B UL)**

| GSM 900, GSM 850 and MXM 850   |                        |                  |              |                 |               |                |
|--|------------------------|------------------|--------------|-----------------|---------------|----------------|
| Type of channel  | Propagation conditions |                  |              |                 |               |                |
|  | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |                |
| PDTCH/UBS-5  | dB                     | -14,5 / [tbd]    | (2)          | -14,0 / [tbd]   | -14,0 / [tbd] | -2,5 / [tbd]   |
| PDTCH/UBS-6  | dB                     | -12,0 / [tbd]    | (2)          | -11,0 / [tbd]   | -11,5 / [tbd] | 1,5 / [tbd]    |
| PDTCH/UBS-7  | dB                     | -1,5 / [tbd]     | (2)          | -2,5 / [tbd]    | -3,0 / [tbd]  | 7,0 / [tbd]    |
| PDTCH/UBS-8  | dB                     | 1,0 / [tbd]      | (2)          | 0,5 / [tbd]     | 0,5 / [tbd]   | 11,0 / [tbd]   |
| PDTCH/UBS-9  | dB                     | 2,5 / [tbd]      | (2)          | 2,0 / [tbd]     | 2,0 / [tbd]   | 12,5 / [tbd]   |
| PDTCH/UBS-10   | dB                     | 7,0 / [tbd]      | (2)          | 9,0 / [tbd]     | 9,0 / [tbd]   | 18,0 / [tbd]   |
| PDTCH/UBS-11   | dB                     | 8,5 / [tbd]      | (2)          | 13,0 / [tbd]    | 13,5 / [tbd]  | 18,5** / [tbd] |
| PDTCH/UBS-12   | dB                     | 9,0 / [tbd]      | (2)          | 14,5 / [tbd]    | 15,0 / [tbd]  | 22,5** / [tbd] |
| DCS 1 800, PCS 1900 and MXM 1900   |                        |                  |              |                 |               |                |
| Type of channel  | Propagation conditions |                  |              |                 |               |                |
|  | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA130 (no FH) |                |
| PDTCH/UBS-5  | dB                     | (2)              | (2)          | -10,0 / [tbd]   | (2)           | (2)            |
| PDTCH/UBS-6  | dB                     | (2)              | (2)          | -6,5 / [tbd]    | (2)           | (2)            |
| PDTCH/UBS-7  | dB                     | (2)              | (2)          | 2,0 / [tbd]     | (2)           | (2)            |
| PDTCH/UBS-8  | dB                     | (2)              | (2)          | 5,0 / [tbd]     | (2)           | (2)            |
| PDTCH/UBS-9  | dB                     | (2)              | (2)          | 7,0 / [tbd]     | (2)           | (2)            |
| PDTCH/UBS-10   | dB                     | (2)              | (2)          | 14,0 / [tbd]    | (2)           | (2)            |
| PDTCH/UBS-11   | dB                     | (2)              | (2)          | 12,5** / [tbd]  | (2)           | (2)            |
| PDTCH/UBS-12   | dB                     | (2)              | (2)          | 14,0** / [tbd]  | (2)           | (2)            |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.  |                        |                  |              |                 |               |                |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |                        |                  |              |                 |               |                |
| NOTE 3: RX diversity requirements are given by the left numbers. Requirements without RX diversity are given by the right numbers.   |                        |                  |              |                 |               |                |

**Table 2y: Adjacent channel interference ratio (for MS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI, turbo coding and no PAN) using narrow pulse shaping filter (EGPRS2-B DL)**

| GSM 850 and GSM 900 |                        |                |              |                 |               |         |
|---------------------|------------------------|----------------|--------------|-----------------|---------------|---------|
| Type of channel     | Propagation conditions |                |              |                 |               |         |
|                     | TU3 (no FH)            | TU3 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |         |
| PDTCH/DBS-5         | dB                     | [-4,0]         | (2)          | [-7,0]          | [-7,5]        | [-8,0]  |
| PDTCH/DBS-6         | dB                     | [-2,0]         | (2)          | [-4,0]          | [-4,5]        | [-4,0]  |
| PDTCH/DBS-7         | dB                     | [5,0]          | (2)          | [1,5]           | [0,5]         | [2,0]   |
| PDTCH/DBS-8         | dB                     | [8,0]          | (2)          | [5,5]           | [5,0]         | [10,0]  |
| PDTCH/DBS-9         | dB                     | [10,0]         | (2)          | [8,5]           | [8,0]         | [20,5]  |
| PDTCH/DBS-10        | dB                     | [18,5]         | (2)          | [17,0]          | [17,5]        | [-]     |
| PDTCH/DBS-11        | dB                     | [22,5]         | (2)          | [29,5]          | [30,0]        | [-]     |
| PDTCH/DBS-12        | dB                     | [27,5]         | (2)          | [23**]          | [24**]        | [-]     |
| USF/DBS-5 to 6      | dB                     | [-3,0]         | (2)          | [-8,0]          | [-9,0]        | [-9,5]  |
| USF/DBS-7 to 9      | dB                     | [-5,0]         | (2)          | [-11,5]         | [-12,5]       | [-13,0] |

|  |                               |                          |                             |                         |                            |                          |
|--|-------------------------------|--------------------------|-----------------------------|-------------------------|----------------------------|--------------------------|
| USF/DBS-10 to 12   | dB                            | [-4,5]                   | (2)                         | [-10,5]                 | [-11,0]                    | [-11,5]                  |
| <b>DCS 1 800 and PCS 1900</b>  |                               |                          |                             |                         |                            |                          |
| <b>Type of channel</b>   | <b>Propagation conditions</b> |                          |                             |                         |                            |                          |
|  |                               | <b>TU1,5<br/>(no FH)</b> | <b>TU1,5<br/>(ideal FH)</b> | <b>TU50<br/>(no FH)</b> | <b>TU50<br/>(ideal FH)</b> | <b>RA130<br/>(no FH)</b> |
| PDTCH/DBS-5  | dB                            | (2)                      | (2)                         | [-7,5]                  | (2)                        | (2)                      |
| PDTCH/DBS-6  | dB                            | (2)                      | (2)                         | [-4,0]                  | (2)                        | (2)                      |
| PDTCH/DBS-7  | dB                            | (2)                      | (2)                         | [1,5]                   | (2)                        | (2)                      |
| PDTCH/DBS-8  | dB                            | (2)                      | (2)                         | [6,0]                   | (2)                        | (2)                      |
| PDTCH/DBS-9  | dB                            | (2)                      | (2)                         | [9,5]                   | (2)                        | (2)                      |
| PDTCH/DBS-10   | dB                            | (2)                      | (2)                         | [22,0]                  | (2)                        | (2)                      |
| PDTCH/DBS-11   | dB                            | (2)                      | (2)                         | [24,5**]                | (2)                        | (2)                      |
| PDTCH/DBS-12   | dB                            | (2)                      | (2)                         | [-]                     | (2)                        | (2)                      |
| USF/DBS-5 to 6   | dB                            | (2)                      | (2)                         | [-8,5]                  | (2)                        | (2)                      |
| USF/DBS-7 to 9   | dB                            | (2)                      | (2)                         | [-12,0]                 | (2)                        | (2)                      |
| USF/DBS-10 to 12   | dB                            | (2)                      | (2)                         | [-11,5]                 | (2)                        | (2)                      |
| Performance is specified at 30% BLER for those cases identified with mark **.  |                               |                          |                             |                         |                            |                          |
| Performance is not specified for those cases identified with mark "-"  |                               |                          |                             |                         |                            |                          |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.   |                               |                          |                             |                         |                            |                          |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |                               |                          |                             |                         |                            |                          |

**Table 2z: Adjacent channel interference ratio (for normal BTS) at reference performance for QPSK, 16-QAM and 32-QAM modulated signals (Higher symbol rate, BTTI and no PAN) using wide pulse shaping filter (EGPRS2-B UL)**

| GSM 900, GSM 850 and MXM 850   |    |                        |                  |               |                 |                |
|--|----|------------------------|------------------|---------------|-----------------|----------------|
| Type of channel  |    | Propagation conditions |                  |               |                 |                |
|  |    | TU3 (no FH)            | TU3 (ideal FH)   | TU50 (no FH)  | TU50 (ideal FH) | RA250 (no FH)  |
| PDTCH/UBS-5  | dB | -17,5 / [tbd]          | (2)              | -16,5 / [tbd] | -17,0 / [tbd]   | -9,0 / [tbd]   |
| PDTCH/UBS-6  | dB | -15,0 / [tbd]          | (2)              | -14,0 / [tbd] | -14,5 / [tbd]   | -5,5 / [tbd]   |
| PDTCH/UBS-7  | dB | -11,5 / [tbd]          | (2)              | -9,5 / [tbd]  | -9,5 / [tbd]    | -2,5 / [tbd]   |
| PDTCH/UBS-8  | dB | -8,0 / [tbd]           | (2)              | -6,0 / [tbd]  | -6,0 / [tbd]    | 1,5 / [tbd]    |
| PDTCH/UBS-9  | dB | -6,0 / [tbd]           | (2)              | -3,5 / [tbd]  | -4,0 / [tbd]    | 4,0 / [tbd]    |
| PDTCH/UBS-10   | dB | 0,0 / [tbd]            | (2)              | 1,0 / [tbd]   | 1,0 / [tbd]     | 12,5 / [tbd]   |
| PDTCH/UBS-11   | dB | 5,5 / [tbd]            | (2)              | 9,0 / [tbd]   | 9,0 / [tbd]     | 25,0 / [tbd]   |
| PDTCH/UBS-12   | dB | 8,0 / [tbd]            | (2)              | 13,5 / [tbd]  | 12,5 / [tbd]    | 16,5** / [tbd] |
| DCS 1 800, PCS 1900 and MXM 1900   |    |                        |                  |               |                 |                |
| Type of channel  |    | Propagation conditions |                  |               |                 |                |
|  |    | TU1,5 (no FH)          | TU1,5 (ideal FH) | TU50 (no FH)  | TU50 (ideal FH) | RA130 (no FH)  |
| PDTCH/UBS-5  | dB | (2)                    | (2)              | -13,0 / [tbd] | (2)             | (2)            |
| PDTCH/UBS-6  | dB | (2)                    | (2)              | -10,0 / [tbd] | (2)             | (2)            |
| PDTCH/UBS-7  | dB | (2)                    | (2)              | -5,5 / [tbd]  | (2)             | (2)            |
| PDTCH/UBS-8  | dB | (2)                    | (2)              | -2,0 / [tbd]  | (2)             | (2)            |
| PDTCH/UBS-9  | dB | (2)                    | (2)              | 1,5 / [tbd]   | (2)             | (2)            |
| PDTCH/UBS-10   | dB | (2)                    | (2)              | 5,0 / [tbd]   | (2)             | (2)            |
| PDTCH/UBS-11   | dB | (2)                    | (2)              | 14,5 / [tbd]  | (2)             | (2)            |
| PDTCH/UBS-12   | dB | (2)                    | (2)              | 20,0 / [tbd]  | (2)             | (2)            |
| NOTE 1: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz. The TU3 (ideal FH) and TU1.5 (ideal FH), sufficient decorrelation cannot easily be achieved. These performance requirements are given for information purposes and need not be tested.  |    |                        |                  |               |                 |                |
| NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition. |    |                        |                  |               |                 |                |
| NOTE 3: RX diversity requirements are given by the left numbers. Requirements without RX diversity are given by the right numbers.   |    |                        |                  |               |                 |                |



Table 2aa: C/I1 ratio at reference performance for VAMOS IMS for voice channels in VAMOS mode

| Propagation conditions           |          | TU50 no FH          |        |        |                     |        |        |
|----------------------------------|----------|---------------------|--------|--------|---------------------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-1              |        |        |                     |        |        |
|                                  |          | GSM 900 and GSM 850 |        |        | DCS 1800 & PCS 1900 |        |        |
| SCPIR_DL                         |          | +4 dB               | 0 dB   | -4 dB  | +4 dB               | 0 dB   | -4 dB  |
| TCH/HS                           | FER (dB) | 11,5                | 12,5   | 15,5   | 11,5                | 12,5   | 15,5   |
|                                  | RBER1b   | 0,1 %               | 0,24 % | 0,08 % | 0,1 %               | 0,23 % | 0,21 % |
|                                  | RBER2    | 3,9 %               | 4,7 %  | 4,12 % | 4 %                 | 4,65 % | 4,62 % |
| TCH/EFS                          | FER (dB) | 12                  | 13,5   | 16,5   | 11                  | 13     | 15,5   |
|                                  | RBER1b   | 0,04 %              | 0,06 % | 0,03 % | 0,06 %              | 0,06 % | 0,07 % |
|                                  | RBER2    | 3,62 %              | 3,77 % | 3,55 % | 4,61 %              | 4,62 % | 4,77 % |
| TCH/AFS12.2                      | FER (dB) | 12                  | 13,5   | 16,5   | 11,5                | 13     | 15,5   |
|                                  | RBER1b   | 0,49 %              | 0,51 % | 0,53 % | 0,69 %              | 0,65 % | 0,7 %  |
| TCH/AFS4.75                      | FER (dB) | 6,5                 | 8      | 10,5   | 5                   | 6,5    | 9      |
|                                  | RBER1b   | 0,12 %              | 0,1 %  | 0,1 %  | 0,14 %              | 0,17 % | 0,13 % |
| TCH/AHS7.4                       | FER (dB) | 15                  | 17     | 19,5   | 15,5                | 17,5   | 20,5   |
|                                  | RBER1b   | 0,15 %              | 0,15 % | 0,16 % | 0,15 %              | 0,14 % | 0,15 % |
|                                  | RBER2    | 1,6 %               | 1,61 % | 1,75 % | 1,64 %              | 1,6 %  | 1,58 % |
| TCH/AHS4.75                      | FER (dB) | 10,5                | 12     | 14,5   | 10,5                | 12     | 15     |
|                                  | RBER1b   | 0,14 %              | 0,1 %  | 0,12 % | 0,13 %              | 0,12 % | 0,11 % |
|                                  | RBER2    | 5,22 %              | 4,5 %  | 5,18 % | 5,44 %              | 5,17 % | 5,17 % |
| TCH/WFS12.65                     | FER (dB) | 12                  | 13,5   | 16,5   | 11,5                | 13     | 15,5   |
|                                  | RBER1b   | 0,44 %              | 0,45 % | 0,39 % | 0,48 %              | 0,54 % | 0,47 % |
| TCH/WFS6.60                      | FER (dB) | 8,5                 | 10     | 12,5   | 7                   | 8,5    | 11     |
|                                  | RBER1b   | 0,11 %              | 0,14 % | 0,22 % | 0,21 %              | 0,21 % | 0,31 % |
| FACCH/F                          | FER      | 9,5                 | 11,5   | 14,5   | 8,5                 | 10,5   | 13,5   |
| FACCH/H                          | FER      | 9                   | 11     | 14     | 9                   | 11     | 13,5   |
| SACCH                            | FER      | 9,5                 | 11,5   | 15     | 9,5                 | 11,5   | 15     |
| Repeated FACCH/F                 | FER      | -                   | 7      | -      | -                   | 6,5    | -      |
| Repeated SACCH                   | FER      | -                   | 5      | -      | -                   | 5      | -      |

| Propagation conditions           |          | TU50 no FH          |        |        |                     |        |        |
|----------------------------------|----------|---------------------|--------|--------|---------------------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-2              |        |        |                     |        |        |
|                                  |          | GSM 900 and GSM 850 |        |        | DCS 1800 & PCS 1900 |        |        |
| SCPIR_DL                         |          | +4 dB               | 0 dB   | -4 dB  | +4 dB               | 0 dB   | -4 dB  |
| TCH/HS                           | FER (dB) | 12,5                | 14,5   | 17,5   | 12,5                | 15     | 18     |
|                                  | RBER1b   | 0,22 %              | 0,25 % | 0,22 % | 0,29 %              | 0,1 %  | 0,22 % |
|                                  | RBER2    | 4,86 %              | 4,9 %  | 4,74 % | 5,4 %               | 3,6 %  | 4,73 % |
| TCH/EFS                          | FER (dB) | 14                  | 15,5   | 19     | 13                  | 14,5   | 17,5   |
|                                  | RBER1b   | 0,03 %              | 0,03 % | 0,04 % | 0,07 %              | 0,06 % | 0,08 % |
|                                  | RBER2    | 3,47 %              | 3,59 % | 3,35 % | 4,74 %              | 5,02 % | 5,12 % |
| TCH/AFS4.75                      | FER (dB) | 8,5                 | 10     | 13     | 7,5                 | 9      | 11,5   |
|                                  | RBER1b   | 0,12 %              | 0,12 % | 0,12 % | 0,14 %              | 0,14 % | 0,14 % |
| TCH/AHS7.4                       | FER (dB) | 17                  | 19     | 21,5   | 17,5                | 19,5   | 22,5   |
|                                  | RBER1b   | 0,13 %              | 0,13 % | 0,16 % | 0,14 %              | 0,14 % | 0,16 % |
|                                  | RBER2    | 1,58 %              | 1,6 %  | 1,82 % | 1,65 %              | 1,66 % | 1,69 % |
| TCH/WFS12.65                     | FER (dB) | 14,5                | 16,5   | 19     | 13,5                | 15,5   | 18     |
|                                  | RBER1b   | 0,34 %              | 0,31 % | 0,31 % | 0,44 %              | 0,45 % | 0,59 % |

| Propagation conditions           |          | TU50 no FH          |        |        |                     |        |        |
|----------------------------------|----------|---------------------|--------|--------|---------------------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-3              |        |        |                     |        |        |
|                                  |          | GSM 900 and GSM 850 |        |        | DCS 1800 & PCS 1900 |        |        |
| SCPIR_DL                         |          | +4 dB               | 0 dB   | -4 dB  | +4 dB               | 0 dB   | -4 dB  |
| TCH/HS                           | FER (dB) | 9,5                 | 11,5   | 16     | 10                  | 12     | 16     |
|                                  | RBER1b   | 0,24 %              | 0,24 % | 0,07 % | 0,24 %              | 0,28 % | 0,08 % |
|                                  | RBER2    | 5,15 %              | 5,01 % | 3,99 % | 5 %                 | 4,99 % | 4,07 % |
| TCH/EFS                          | FER (dB) | 11,5                | 13     | 16     | 10                  | 12     | 15     |
|                                  | RBER1b   | 0,03 %              | 0,03 % | 0,03 % | 0,04 %              | 0,03 % | 0,03 % |
|                                  | RBER2    | 3,95 %              | 3,62 % | 3,67 % | 4,89 %              | 4,92 % | 4,95 % |
| TCH/AFS4.75                      | FER (dB) | 5                   | 6,5    | 9      | 3                   | 5      | 7,5    |
|                                  | RBER1b   | 0,1 %               | 0,11 % | 0,15 % | 0,15 %              | 0,15 % | 0,2 %  |
| TCH/AHS7.4                       | FER (dB) | 13,5                | 16     | 19,5   | 14                  | 16,5   | 20     |
|                                  | RBER1b   | 0,13 %              | 0,14 % | 0,14 % | 0,15 %              | 0,16 % | 0,16 % |
|                                  | RBER2    | 1,74 %              | 1,75 % | 1,78 % | 1,74 %              | 1,81 % | 1,84 % |
| TCH/WFS12.65                     | FER (dB) | 11                  | 13,5   | 16,5   | 10                  | 12,5   | 15,5   |
|                                  | RBER1b   | 0,42 %              | 0,4 %  | 0,38 % | 0,62 %              | 0,59 % | 0,3 %  |

| Propagation conditions           |          | TU50 no FH          |        |        |                     |        |        |
|----------------------------------|----------|---------------------|--------|--------|---------------------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-4              |        |        |                     |        |        |
|                                  |          | GSM 900 and GSM 850 |        |        | DCS 1800 & PCS 1900 |        |        |
| SCPIR_DL                         |          | +4 dB               | 0 dB   | -4 dB  | +4 dB               | 0 dB   | -4 dB  |
| TCH/HS                           | FER (dB) | -11                 | -6,5   | -0,5   | -10,5               | -6     | 1      |
|                                  | RBER1b   | 0,26 %              | 0,25 % | 0,25 % | 0,24 %              | 0,25 % | 0,23 % |
|                                  | RBER2    | 4,55 %              | 4,74 % | 4,79 % | 4,64 %              | 4,86 % | 4,72 % |
| TCH/EFS                          | FER (dB) | -8,5                | -4,5   | 2      | -9,5                | -5,5   | 1      |
|                                  | RBER1b   | 0,05 %              | 0,03 % | 0,03 % | 0,05 %              | 0,03 % | 0,04 % |
|                                  | RBER2    | 3,58 %              | 3,89 % | 3,8 %  | 4,29 %              | 4,8 %  | 4,82 % |
| TCH/AFS 4.75                     | FER (dB) | -16,5               | -13,5  | -8     | -18                 | -15    | -9     |
|                                  | RBER1b   | 0,1 %               | 0,13 % | 0,13 % | 0,15 %              | 0,15 % | 0,17 % |
| TCH/AHS 7.4                      | FER (dB) | -2,5                | 2,5    | 7      | -2                  | 3,5    | 9      |
|                                  | RBER1b   | 0,13 %              | 0,13 % | 0,14 % | 0,19 %              | 0,16 % | 0,2 %  |
|                                  | RBER2    | 1,66 %              | 1,59 % | 1,59 % | 1,75 %              | 1,68 % | 2 %    |
| TCH/WFS 12.65                    | FER (dB) | -8                  | -3,5   | 2      | -9                  | -5     | 1,5    |
|                                  | RBER1b   | 0,37 %              | 0,32 % | 0,47 % | 0,55 %              | 0,48 % | 0,63 % |

Table 2ab: C/I1 ratio at reference performance for VAMOS II MS for voice channels in VAMOS mode

| GSM 900 and GSM 850              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-1    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 10        | 11,5   | 13,5   | 17,5   | 19     |
|                                  | Rber1b   | 0,09 %    | 0,2 %  | 0,21 % | 0,2 %  | 0,22 % |
|                                  | Rber2    | 4,24 %    | 5,29 % | 5,59 % | 5,42 % | 5,7 %  |
| TCH/EFS                          | FER (dB) | 11,5      | 13     | 15,5   | 19     | 21     |
|                                  | Rber1b   | 0,05 %    | 0,04 % | 0,06 % | 0,04 % | 0,06 % |
|                                  | Rber2    | 3,73 %    | 3,6 %  | 3,77 % | 3,66 % | 4,06 % |
| TCH/AFS12.2                      | FER (dB) | 11,5      | 13     | 15,5   | 19     | 21     |
|                                  | Rber1b   | 0,45 %    | 0,45 % | 0,47 % | 0,4 %  | 0,47 % |
| TCH/AFS4.75                      | FER (dB) | 5,5       | 7      | 9      | 13     | 15     |
|                                  | Rber1b   | 0,14 %    | 0,13 % | 0,14 % | 0,11 % | 0,12 % |
| TCH/AHS7.4                       | FER (dB) | 14        | 16     | 18,5   | 22     | 24     |
|                                  | Rber1b   | 0,16 %    | 0,12 % | 0,13 % | 0,17 % | 0,17 % |
|                                  | Rber2    | 1,67 %    | 1,56 % | 1,61 % | 1,92 % | 2,01 % |
| TCH/AHS4.75                      | FER (dB) | 9,5       | 11     | 13,5   | 17     | 18,5   |
|                                  | Rber1b   | 0,15 %    | 0,13 % | 0,15 % | 0,15 % | 0,19 % |
|                                  | Rber2    | 5,42 %    | 5,52 % | 5,87 % | 5,85 % | 6,34 % |
| TCH/WFS12.65                     | FER (dB) | 11,5      | 13     | 15,5   | 19     | 21     |
|                                  | Rber1b   | 0,34 %    | 0,36 % | 0,38 % | 0,36 % | 0,36 % |
| TCH/WFS6.60                      | FER (dB) | 7,5       | 9      | 11,5   | 15,5   | 17     |
|                                  | Rber1b   | 0,2 %     | 0,2 %  | 0,13 % | 0,13 % | 0,15 % |
| FACCH/F                          | FER      | 9,5       | 11,5   | 13,5   | 17     | 18,5   |
| FACCH/H                          | FER      | 9         | 11     | 13,5   | 16,5   | 18,5   |
| SACCH                            | FER      | 9,5       | 11,5   | 14     | 17     | 19     |
| Repeated FACCH/F                 | FER      | -         | 7      | -      | -      | -      |
| Repeated SACCH                   | FER      | -         | 5      | -      | -      | -      |

| GSM 900 and GSM 850              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-2    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 11,5      | 13     | 15,5   | 19     | 21     |
|                                  | Rber1b   | 0,18 %    | 0,18 % | 0,2 %  | 0,21 % | 0,12 % |
|                                  | Rber2    | 5,03 %    | 4,97 % | 5,2 %  | 5,21 % | 5 %    |
| TCH/EFS                          | FER (dB) | 13        | 15     | 17     | 20     | 22     |
|                                  | Rber1b   | 0,03 %    | 0,03 % | 0,04 % | 0,05 % | 0,04 % |
|                                  | Rber2    | 3,58 %    | 3,45 % | 3,8 %  | 4,25 % | 4,17 % |
| TCH/AFS4.75                      | FER (dB) | 7         | 8,5    | 11     | 14,5   | 16     |
|                                  | Rber1b   | 0,11 %    | 0,16 % | 0,14 % | 0,11 % | 0,09 % |
| TCH/AHS7.4                       | FER (dB) | 15,5      | 17,5   | 19     | 23,5   | 25     |
|                                  | Rber1b   | 0,15 %    | 0,15 % | 0,1 %  | 0,12 % | 0,12 % |
|                                  | Rber2    | 1,84 %    | 1,82 % | 1,89 % | 2,03 % | 2,15 % |
| TCH/WFS12.65                     | FER (dB) | 13        | 15     | 17     | 20     | 22     |
|                                  | Rber1b   | 0,39 %    | 0,34 % | 0,36 % | 0,4 %  | 0,4 %  |

| GSM 900 and GSM 850              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-3    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 9,5       | 11     | 13,5   | 17,5   | 19     |
|                                  | Rber1b   | 0,05 %    | 0,21 % | 0,23 % | 0,26 % | 0,24 % |
|                                  | Rber2    | 4,81 %    | 4,96 % | 5 %    | 5,5 %  | 5,5 %  |
| TCH/EFS                          | FER (dB) | 10        | 12     | 15     | 18,5   | 20,5   |
|                                  | Rber1b   | 0,05 %    | 0,05 % | 0,07 % | 0,07 % | 0,06 % |
|                                  | Rber2    | 4,23 %    | 3,85 % | 3,75 % | 3,69 % | 3,76 % |
| TCH/AFS4.75                      | FER (dB) | 4,5       | 6      | 8,5    | 11,5   | 13,5   |
|                                  | Rber1b   | 0,18 %    | 0,21 % | 0,18 % | 0,18 % | 0,21 % |
| TCH/AHS7.4                       | FER (dB) | 13        | 15     | 18     | 21,5   | 23,5   |
|                                  | Rber1b   | 0,2 %     | 0,21 % | 0,23 % | 0,26 % | 0,24 % |
|                                  | Rber2    | 2,11 %    | 2 %    | 2 %    | 2,2 %  | 2,5 %  |
| TCH/WFS12.65                     | FER (dB) | 10        | 13     | 15     | 19     | 21     |
|                                  | Rber1b   | 0,4 %     | 0,38 % | 0,43 % | 0,42 % | 0,42 % |

| GSM 900 and GSM 850              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-4    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dBb | -10 dB |
| TCH/HS                           | FER (dB) | -11,5     | -8     | -3,5   | -3,5   | -0,5   |
|                                  | Rber1b   | 0,24 %    | 0,24 % | 0,22 % | 0,14 % | 0,17 % |
|                                  | Rber2    | 5,09 %    | 5,12 % | 5,05 % | 5,9 %  | 6,51 % |
| TCH/EFS                          | FER (dB) | -8,5      | -5     | -0,5   | -2,5   | 1      |
|                                  | Rber1b   | 0,05 %    | 0,06 % | 0,05 % | 0,04 % | 0,03 % |
|                                  | Rber2    | 3,58 %    | 3,75 % | 3,74 % | 4,99 % | 3,19 % |
| TCH/AFS4.75                      | FER (dB) | -18,5     | -15    | -12    | -10,5  | -8,5   |
|                                  | Rber1b   | 0,22 %    | 0,14 % | 0,13 % | 0,18 % | 0,17 % |
| TCH/AHS7.4                       | FER (dB) | -9,5      | -2     | 0      | 2,5    | 7      |
|                                  | Rber1b   | 0,2 %     | 0,16 % | 0,11 % | 0,27 % | 0,12 % |
|                                  | Rber2    | 2,16 %    | 1,67 % | 1,18 % | 2,97 % | 1,74 % |
| TCH/WFS12.65                     | FER (dB) | -8        | -3,5   | 0      | -3     | 0,5    |
|                                  | Rber1b   | 0,37 %    | 0,32 % | 0,39 % | 0,73 % | 0,46 % |

| DCS 1800 & PCS 1900              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-1    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 10        | 11,5   | 14     | 18     | 19,5   |
|                                  | Rber1b   | 0,17 %    | 0,19 % | 0,2 %  | 0,2 %  | 0,21 % |
|                                  | Rber2    | 5,24 %    | 5,46 % | 5,8 %  | 5,71 % | 5,96 % |
| TCH/EFS                          | FER (dB) | 10        | 11,5   | 14,5   | 18     | 20     |
|                                  | Rber1b   | 0,05 %    | 0,04 % | 0,06 % | 0,04 % | 0,04 % |
|                                  | Rber2    | 5,02 %    | 5,35 % | 5,32 % | 5,33 % | 5,58 % |
| TCH/AFS12.2                      | FER (dB) | 10,5      | 12     | 14,5   | 18     | 20     |
|                                  | Rber1b   | 0,76 %    | 0,74 % | 0,74 % | 0,8 %  | 0,85 % |
| TCH/AFS4.75                      | FER (dB) | 3,5       | 5,5    | 7,5    | 11,5   | 13,5   |
|                                  | Rber1b   | 0,11 %    | 0,12 % | 0,17 % | 0,12 % | 0,13 % |
| TCH/AHS7.4                       | FER (dB) | 14,5      | 16     | 18,5   | 23     | 24,5   |
|                                  | Rber1b   | 0,16 %    | 0,14 % | 0,12 % | 0,15 % | 0,16 % |
|                                  | Rber2    | 1,69 %    | 1,77 % | 1,79 % | 1,92 % | 2,28 % |
| TCH/AHS4.75                      | FER (dB) | 9,5       | 11     | 13,5   | 17,5   | 19,5   |
|                                  | Rber1b   | 0,12 %    | 0,13 % | 0,11 % | 0,13 % | 0,12 % |
|                                  | Rber2    | 5,78 %    | 5,85 % | 6 %    | 6,09 % | 6,41 % |
| TCH/WFS12.65                     | FER (dB) | 10,5      | 12     | 15     | 18,5   | 20     |
|                                  | Rber1b   | 0,49 %    | 0,53 % | 0,52 % | 0,64 % | 0,6 %  |
| TCH/WFS6.60                      | FER (dB) | 6         | 7,5    | 10     | 14     | 16     |
|                                  | Rber1b   | 0,27 %    | 0,28 % | 0,21 % | 0,15 % | 0,17 % |
| FACCH/F                          | FER      | 8,5       | 10,5   | 13     | 16     | 18     |
| FACCH/H                          | FER      | 9         | 11     | 13,5   | 17     | 19     |
| SACCH                            | FER      | 9,5       | 11,5   | 14     | 17,5   | 19,5   |
| Repeated FACCH/F                 | FER      | -         | 6,5    | -      | -      | -      |
| Repeated SACCH                   | FER      | -         | 5      | -      | -      | -      |

| DCS 1800 & PCS 1900              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-2    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 11,5      | 13     | 15,5   | 19     | 21     |
|                                  | Rber1b   | 0,19 %    | 0,2 %  | 0,2 %  | 0,25 % | 0,26 % |
|                                  | Rber2    | 5,52 %    | 5,61 % | 5,73 % | 5,92 % | 6,31 % |
| TCH/EFS                          | FER (dB) | 12        | 13,5   | 16     | 19,5   | 21,5   |
|                                  | Rber1b   | 0,03 %    | 0,07 % | 0,06 % | 0,05 % | 0,05 % |
|                                  | Rber2    | 4,57 %    | 4,89 % | 5,16 % | 5,38 % | 5,62 % |
| TCH/AFS4.75                      | FER (dB) | 6         | 7,5    | 9,5    | 13     | 15     |
|                                  | Rber1b   | 0,15 %    | 0,15 % | 0,15 % | 0,19 % | 0,13 % |
| TCH/AHS7.4                       | FER (dB) | 16        | 17,5   | 20     | 24     | 26,5   |
|                                  | Rber1b   | 0,12 %    | 0,13 % | 0,14 % | 0,16 % | 0,15 % |
|                                  | Rber2    | 1,85 %    | 1,96 % | 2,01 % | 2,25 % | 2,36 % |
| TCH/WFS12.65                     | FER (dB) | 12        | 13,5   | 16     | 20     | 22     |
|                                  | Rber1b   | 0,46 %    | 0,57 % | 0,54 % | 0,43 % | 0,52 % |

| DCS 1800 & PCS 1900              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-3    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | 9,5       | 11,5   | 14     | 18     | 20     |
|                                  | Rber1b   | 0,2 %     | 0,21 % | 0,21 % | 0,19 % | 0,2 %  |
|                                  | Rber2    | 4,88 %    | 4,55 % | 5 %    | 5,5 %  | 5,5 %  |
| TCH/EFS                          | FER (dB) | 9         | 10,5   | 14     | 18     | 19,5   |
|                                  | Rber1b   | 0,04 %    | 0,06 % | 0,05 % | 0,07 % | 0,05 % |
|                                  | Rber2    | 5,27 %    | 5,4 %  | 4,33 % | 4,77 % | 4,85 % |
| TCH/AFS4.75                      | FER (dB) | 2,5       | 4,5    | 7      | 10,5   | 12,5   |
|                                  | Rber1b   | 0,18 %    | 0,11 % | 0,15 % | 0,16 % | 0,16 % |
| TCH/AHS7.4                       | FER (dB) | 13,5      | 16     | 18,5   | 22,5   | 24,5   |
|                                  | Rber1b   | 0,23 %    | 0,22 % | 0,23 % | 0,22 % | 0,21 % |
|                                  | Rber2    | 2 %       | 2 %    | 2 %    | 2,2 %  | 2,5 %  |
| TCH/WFS12.65                     | FER (dB) | 9         | 11,5   | 14     | 18     | 20     |
|                                  | Rber1b   | 0,63 %    | 0,51 % | 0,5 %  | 0,44 % | 0,48 % |

| DCS 1800 & PCS 1900              |          |           |        |        |        |        |
|----------------------------------|----------|-----------|--------|--------|--------|--------|
| VAMOS Test Scenario (see AnnexQ) |          | VDTS-4    |        |        |        |        |
| Propagation condition            |          | TU50 noFH |        |        |        |        |
| SCPIR_DL                         |          | +4 dB     | 0 dB   | -4 dB  | -8 dB  | -10 dB |
| TCH/HS                           | FER (dB) | -11       | -7,5   | -2,5   | -1     | 1,5    |
|                                  | Rber1b   | 0,23 %    | 0,24 % | 0,22 % | 0,14 % | 0,15 % |
|                                  | Rber2    | 5,11 %    | 5,2 %  | 5,2 %  | 4,19 % | 5,11 % |
| TCH/EFS                          | FER (dB) | -9,5      | -6     | -1     | -2     | 2      |
|                                  | Rber1b   | 0,05 %    | 0,06 % | 0,06 % | 0,03 % | 0,04 % |
|                                  | Rber2    | 4,29 %    | 4,55 % | 4,61 % | 3,98 % | 4,09 % |
| TCH/AFS4.75                      | FER (dB) | -19,5     | -16,5  | -13,5  | -11,5  | -9,5   |
|                                  | Rber1b   | 0,21 %    | 0,16 % | 0,21 % | 0,22 % | 0,22 % |
| TCH/AHS7.4                       | FER (dB) | -9,5      | -1     | 0      | 4,5    | 9,5    |
|                                  | Rber1b   | 0,2 %     | 0,18 % | 0,23 % | 0,17 % | 0,25 % |
|                                  | Rber2    | 2,18 %    | 1,76 % | 2,5 %  | 1,9 %  | 2,95 % |
| TCH/WFS12.65                     | FER (dB) | -9        | -5     | -0,5   | -2,5   | 1      |
|                                  | Rber1b   | 0,55 %    | 0,48 % | 0,57 % | 0,52 % | 0,54 % |

Table 2ac: C/I1 ratio at reference performance (for BTS) for voice channels in VAMOS mode

| GSM 900 and GSM 850               |          |           |        |           |        |           |        |           |        |
|-----------------------------------|----------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| VAMOS Test Scenario (see Annex Q) |          | VUTS-1    |        | VUTS-2    |        | VUTS-3    |        | VUTS-4    |        |
| Propagation condition             |          | TU50 noFH |        | TU50 noFH |        | TU50 noFH |        | TU50 noFH |        |
| SCPIR_UL                          |          | 0 dB      | -10 dB | 0 dB      | -10 dB | 0 dB      | -10 dB | 0 dB      | -10 dB |
| TCH/HS                            | FER (dB) | 11        | 11.5   | -6.5      | -8     | 11.5      | 11     | 7         | 6      |
|                                   | Rber1b   | 0.20%     | 0.10%  | 0.16%     | 0.13%  | 0.24%     | 0.19%  | 0.23%     | 0.15%  |
|                                   | Rber2    | 4.52%     | 4.50%  | 3.54%     | 3.90%  | 4.51%     | 4.95%  | 3.74%     | 5.00%  |
| TCH/EFS                           | FER (dB) | 13.5      | 12.5   | -3.5      | -7     | 14        | 13     | 10        | 7      |
|                                   | Rber1b   | 0.04%     | 0.04%  | 0.04%     | 0.04%  | 0.04%     | 0.04%  | 0.04%     | 0.05%  |
|                                   | Rber2    | 2.75%     | 3.30%  | 3.10%     | 3.40%  | 3.30%     | 3.50%  | 2.70%     | 3.70%  |
| TCH/AFS 12.2                      | FER (dB) | 13        | 12     | -4.5      | -7.5   | 13.5      | 12.5   | 9.5       | 6.5    |
|                                   | Rber1b   | 0.46%     | 0.53%  | 0.45%     | 0.63%  | 0.53%     | 0.58%  | 0.31%     | 0.42%  |
| TCH/AFS 4.75                      | FER (dB) | 7         | -      | -12.5     | -      | 6         | -      | 3.5       | -      |
|                                   | Rber1b   | 0.12%     | -      | 0.10%     | -      | 0.21%     | -      | 0.13%     | -      |
| TCH/AHS 7.4                       | FER (dB) | 15        | 14.5   | -1        | -3     | 16.5      | 15     | 12        | 10.5   |
|                                   | Rber1b   | 0.17%     | 0.18%  | 0.14%     | 0.22%  | 0.18%     | 0.22%  | 0.13%     | 0.15%  |
|                                   | Rber2    | 1.40%     | 2.01%  | 1.20%     | 1.60%  | 1.79%     | 2.16%  | 1.05%     | 1.84%  |
| TCH/AHS 4.75                      | FER (dB) | 10.5      | -      | -7.5      | -      | 10.5      | -      | 7.5       | -      |
|                                   | Rber1b   | 0.15%     | -      | 0.18%     | -      | 0.36%     | -      | 0.15%     | -      |
|                                   | Rber2    | 6.00%     | -      | 4.50%     | -      | 5.10%     | -      | 5.20%     | -      |
| TCH/WFS 12.65                     | FER (dB) | 13        | 12     | -4        | -6.5   | 14        | 12.5   | 9.5       | 7      |
|                                   | Rber1b   | 0.32%     | 0.42%  | 0.30%     | 0.35%  | 0.33%     | 0.37%  | 0.27%     | 0.32%  |
| TCH/WFS 6.60                      | FER (dB) | 9         | -      | -11       | -      | 8.5       | -      | 4.5       | -      |
|                                   | Rber1b   | 0.15%     | -      | 0.15%     | -      | 0.22%     | -      | 0.15%     | -      |
| FACCH/F                           | FER      | 10        | -      | -8.5      | -      | 11        | -      | 6.5       | -      |
| FACCH/H                           | FER      | 10.5      | -      | -8.5      | -      | 10.5      | -      | 6         | -      |
| SACCH                             | FER      | 10        | -      | -7.5      | -      | 11        | -      | 6.5       | -      |
| Repeated SACCH                    | FER      | 6         | -      | -14.5     | -      | 5         | -      | 2.5       | -      |

| DCS 1800 & PCS 1900               |          |           |        |           |        |           |        |           |        |
|-----------------------------------|----------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| VAMOS Test Scenario (see Annex Q) |          | VUTS-1    |        | VUTS-2    |        | VUTS-3    |        | VUTS-4    |        |
| Propagation condition             |          | TU50 noFH |        | TU50 noFH |        | TU50 noFH |        | TU50 noFH |        |
| SCPIR_UL                          |          | 0 dB      | -10 dB | 0 dB      | -10 dB | 0 dB      | -10 dB | 0 dB      | -10 dB |
| TCH/HS                            | FER (dB) | 11        | 12     | -5.5      | -6.5   | 11.5      | 12     | 7.5       | 7      |
|                                   | Rber1b   | 0.21%     | 0.17%  | 0.18%     | 0.15%  | 0.23%     | 0.18%  | 0.23%     | 0.17%  |
|                                   | Rber2    | 4.64%     | 4.46%  | 3.50%     | 4.01%  | 4.60%     | 4.90%  | 3.86%     | 4.24%  |
| TCH/EFS                           | FER (dB) | 13.5      | 13.5   | -3.5      | -5     | 14.5      | 14     | 10.5      | 9      |
|                                   | Rber1b   | 0.04%     | 0.04%  | 0.04%     | 0.04%  | 0.04%     | 0.04%  | 0.04%     | 0.04%  |
|                                   | Rber2    | 2.90%     | 3.87%  | 3.85%     | 3.41%  | 3.10%     | 3.45%  | 2.30%     | 3.27%  |
| TCH/AFS 12.2                      | FER (dB) | 13        | 13.5   | -4.5      | -6     | 14        | 14     | 10        | 8      |
|                                   | Rber1b   | 0.40%     | 0.70%  | 0.52%     | 0.67%  | 0.50%     | 0.70%  | 0.39%     | 0.66%  |
| TCH/AFS 4.75                      | FER (dB) | 6         | -      | -14       | -      | 5.5       | -      | 1         | -      |
|                                   | Rber1b   | 0.14%     | -      | 0.13%     | -      | 0.26%     | -      | 0.15%     | -      |
| TCH/AHS 7.4                       | FER (dB) | 15.5      | 17     | -1        | 0.5    | 17        | 17.5   | 12.5      | 14     |
|                                   | Rber1b   | 0.18%     | 0.29%  | 0.18%     | 0.23%  | 0.18%     | 0.27%  | 0.16%     | 0.18%  |
|                                   | Rber2    | 1.30%     | 2.00%  | 1.54%     | 1.75%  | 1.35%     | 2.02%  | 1.15%     | 2.00%  |
| TCH/AHS 4.75                      | FER (dB) | 11.5      | -      | -7.5      | -      | 10        | -      | 8.5       | -      |
|                                   | Rber1b   | 0.25%     | -      | 0.21%     | -      | 0.37%     | -      | 0.25%     | -      |
|                                   | Rber2    | 6.39%     | -      | 4.40%     | -      | 5.40%     | -      | 6.01%     | -      |

|                   |          |       |       |       |       |       |       |       |       |
|-------------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| TCH/WFS 12.65     | FER (dB) | 13.5  | 13.5  | -4    | -5    | 14    | 14    | 10.5  | 9     |
|                   | Rber1b   | 0.39% | 0.52% | 0.32% | 0.50% | 0.40% | 0.54% | 0.42% | 0.39% |
| TCH/WFS 6.60      | FER (dB) | 8.5   | -     | -11   | -     | 8.5   | -     | 4     | -     |
|                   | Rber1b   | 0.20% | -     | 0.15% | -     | 0.27% | -     | 0.15% | -     |
| FACCH/F           | FER      | 10    | -     | -8.5  | -     | 10.5  | -     | 6.5   | -     |
| FACCH/H           | FER      | 10.5  | -     | -8    | -     | 10.5  | -     | 6.5   | -     |
| SACCH             | FER      | 12    | -     | -7    | -     | 10.5  | -     | 8.5   | -     |
| Repeated<br>SACCH | FER      | 6     | -     | -15   | -     | 5     | -     | 2.5   | -     |



Table 2ad: Cochannel interference ratio (for MS) at reference performance for TIGHTER

| GSM 850 and GSM 900 |            |                        |                   |                 |                    |                  |
|---------------------|------------|------------------------|-------------------|-----------------|--------------------|------------------|
| Type of Channel     |            | Propagation conditions |                   |                 |                    |                  |
|                     |            | TU3<br>(no FH)         | TU3<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA250<br>(no FH) |
| FACCH/H             | dB         | 1,5                    | -2,5              | -2,5            | -2,5               | 1                |
| FACCH/F             | dB         | 2                      | -3                | -2,5            | -3                 | -0,5             |
| SDCCH               | dB         | 2                      | -2                | -1              | -2                 | 1,5              |
| TCH/FS              | dB         | 7                      | 0                 | 0               | -1                 | 3                |
|                     | RBER1b (%) | 0,05                   | 0,07              | 0,06            | 0,08               | 0,07             |
|                     | RBER2 (%)  | 0,6                    | 4,66              | 4,56            | 5,67               | 6,5              |
| TCH/EFS             | dB         | 7                      | 0                 | 1               | -0,5               | 3,5              |
|                     | RBER1b (%) | 0,19                   | 0,09              | 0,18            | 0,09               | 0,03             |
|                     | RBER2 (%)  | 0,62                   | 4,86              | 5,07            | 4,92               | 6,01             |
| TCH/HS              | dB         | 7                      | 0,5               | 1               | 0                  | 4,5              |
|                     | RBER1b (%) | 0,17                   | 0,23              | 0,24            | 0,23               | 0,17             |
|                     | RBER2 (%)  | 0,95                   | 4,45              | 4,16            | 4,6                | 5,19             |
| TCH/AFS12.2         | dB         | 5                      | -1,5              | -2,5            | -1,5               | 2,5              |
|                     | RBER1b (%) | 0,14                   | 0,92              | <sup>(6)</sup>  | 0,87               | 1,28             |
| TCH/AFS10.2         | dB         | 4                      | -3                | <sup>(6)</sup>  | -3                 | 1                |
|                     | RBER1b (%) | 0,07                   | 0,18              | <sup>(6)</sup>  | 0,15               | 0,24             |
| TCH/AFS7.95         | dB         | 2,5                    | -5                | <sup>(6)</sup>  | -4,5               | -2               |
|                     | RBER1b (%) | 0,11                   | 0,35              | <sup>(6)</sup>  | 0,34               | 0,46             |
| TCH/AFS7.4          | dB         | 2,5                    | -5                | <sup>(6)</sup>  | -4,5               | -2,5             |
|                     | RBER1b (%) | 0,08                   | 0,16              | <sup>(6)</sup>  | 0,13               | 0,26             |
| TCH/AFS6.7          | dB         | 2                      | -5,5              | <sup>(6)</sup>  | -5,5               | -3,5             |
|                     | RBER1b (%) | 0,16                   | 0,48              | <sup>(6)</sup>  | 0,49               | 0,74             |
| TCH/AFS5.9          | dB         | 2                      | -6                | <sup>(6)</sup>  | -6                 | -4               |
|                     | RBER1b (%) | 0,05                   | 0,15              | <sup>(6)</sup>  | 0,14               | 0,21             |
| TCH/AFS5.15         | dB         | 1,5                    | -6,5              | <sup>(6)</sup>  | -6,5               | -5               |
|                     | RBER1b (%) | 0,11                   | 0,2               | <sup>(6)</sup>  | 0,21               | 0,29             |
| TCH/AFS4.75         | dB         | 1                      | -7                | <sup>(6)</sup>  | -7                 | -5,5             |
|                     | RBER1b (%) | 0,06                   | 0,12              | <sup>(6)</sup>  | 0,13               | 0,15             |
| TCH/AHS7.95         | dB         | 7                      | 2,5               | <sup>(6)</sup>  | 3                  | 16               |
|                     | RBER1b (%) | 0,12                   | 0,38              | <sup>(6)</sup>  | 0,28               | 0,44             |
|                     | RBER2 (%)  | 0,39                   | 1,85              | <sup>(6)</sup>  | 1,8                | 1,77             |
| TCH/AHS7.4          | dB         | 6,5                    | 2                 | <sup>(6)</sup>  | 2                  | 13,5             |
|                     | RBER1b (%) | 0,08                   | 0,21              | <sup>(6)</sup>  | 0,21               | 0,17             |
|                     | RBER2 (%)  | 0,45                   | 2,26              | <sup>(6)</sup>  | 2,31               | 2,35             |
| TCH/AHS6.7          | dB         | 5,5                    | 1                 | <sup>(6)</sup>  | 1                  | 9,5              |
|                     | RBER1b (%) | 0,09                   | 0,19              | <sup>(6)</sup>  | 0,19               | 0,24             |
|                     | RBER2 (%)  | 0,7                    | 2,8               | <sup>(6)</sup>  | 2,7                | 3,5              |
| TCH/AHS5.9          | dB         | 5                      | 0                 | <sup>(6)</sup>  | 0                  | 7                |
|                     | RBER1b (%) | 0,07                   | 0,11              | <sup>(6)</sup>  | 0,15               | 0,16             |
|                     | RBER2 (%)  | 0,73                   | 3,6               | <sup>(6)</sup>  | 3,4                | 3,93             |
| TCH/AHS5.15         | dB         | 4,5                    | -1                | <sup>(6)</sup>  | -1,5               | 4                |
|                     | RBER1b (%) | 0,06                   | 0,18              | <sup>(6)</sup>  | 0,26               | 0,28             |
|                     | RBER2 (%)  | 0,9                    | 4,4               | <sup>(6)</sup>  | 5,23               | 5,54             |
| TCH/AHS4.75         | dB         | 3,5                    | -2                | <sup>(6)</sup>  | -2                 | 3                |
|                     | RBER1b (%) | 0,08                   | 0,1               | <sup>(6)</sup>  | 0,15               | 0,13             |
|                     | RBER2 (%)  | 1,21                   | 5,4               | <sup>(6)</sup>  | 5,6                | 6,38             |
| TCH/WFS12.65        | dB         | 14,5                   | <sup>(2)</sup>    | 8,5             | <sup>(2)</sup>     | 12,5             |
|                     | RBER1b (%) | 0,08                   | <sup>(2)</sup>    | 0,40            | <sup>(2)</sup>     | 0,63             |
| TCH/ WFS8.85        | dB         | 13                     | <sup>(2)</sup>    | 5,5             | <sup>(2)</sup>     | 9                |
|                     | RBER1b (%) | 0,11                   | <sup>(2)</sup>    | 0,42            | <sup>(2)</sup>     | 0,73             |
| TCH/ WFS6.60        | dB         | 12                     | <sup>(2)</sup>    | 4,5             | <sup>(2)</sup>     | 8                |
|                     | RBER1b (%) | 0,09                   | <sup>(2)</sup>    | 0,16            | <sup>(2)</sup>     | 0,24             |

|                    |    |                       |                |          |        |                       |
|--------------------|----|-----------------------|----------------|----------|--------|-----------------------|
| PDTCH/CS-1         | dB | 9                     | 5,5            | 6,5      | 5,5    | 6,5                   |
| PDTCH/CS-2         | dB | 11                    | 9,5            | 10,5     | 9,5    | 10,5                  |
| PDTCH/CS-3         | dB | 12                    | 11,5           | 12,5     | 11,5   | 13,5                  |
| PDTCH/CS-4         | dB | 17                    | 19,5           | 20,5     | 20,5   | -                     |
| PDTCH/MCS-1        | dB | 9                     | 5,5            | 6,5      | 5,5    | 8                     |
| PDTCH/MCS-2        | dB | 11                    | 8              | 8,5      | 8      | 10                    |
| PDTCH/MCS-3        | dB | 12,5                  | 12,5           | 13       | 13     | 17                    |
| PDTCH/MCS-4        | dB | 15                    | 17,5           | 18       | 18     | -                     |
| PDTCH/MCS-5        | dB | 15,5                  | 10,5           | 12       | 11     | 13,5                  |
| PDTCH/MCS-6        | dB | 17,5                  | 13             | 14,5     | 14     | 18                    |
| PDTCH/MCS-7        | dB | 22,5                  | 19,5           | 21,5     | 21     | -                     |
| PDTCH/MCS-8        | dB | 26,5                  | 19,5**         | 22**     | 22**   | -                     |
| PDTCH/MCS-9        | dB | 21,5**                | 24**           | 27**     | 27**   | -                     |
| PDTCH/DAS-5        | dB | [14,5]                | <sup>(2)</sup> | [12]     | [11,5] | [12,5] <sup>(7)</sup> |
| PDTCH/DAS-6        | dB | [16]                  | <sup>(2)</sup> | [13]     | [12]   | [14,5] <sup>(7)</sup> |
| PDTCH/DAS-7        | dB | [17,5]                | <sup>(2)</sup> | [14]     | [13,5] | [16,5] <sup>(7)</sup> |
| PDTCH/DAS-8        | dB | [19,5]                | <sup>(2)</sup> | [16]     | [15,5] | [17,5]                |
| PDTCH/DAS-9        | dB | [21,5]                | <sup>(2)</sup> | [19]     | [19]   | [22,5]                |
| PDTCH/DAS-10       | dB | [25]                  | <sup>(2)</sup> | [22]     | [22]   | [22,5**]              |
| PDTCH/DAS-11       | dB | [27,5]                | <sup>(2)</sup> | [27,5]   | [27,5] | -                     |
| PDTCH/DAS-12       | dB | [31,5]                | <sup>(2)</sup> | [29**]   | [29**] | -                     |
| PDTCH/DBS-5        | dB | [14]                  | <sup>(2)</sup> | [11,5]   | [10]   | [12] <sup>(7)</sup>   |
| PDTCH/DBS-6        | dB | [16]                  | <sup>(2)</sup> | [14]     | [15,5] | [15] <sup>(7)</sup>   |
| PDTCH/DBS-7        | dB | [19]                  | <sup>(2)</sup> | [15]     | [15]   | [16]                  |
| PDTCH/DBS-8        | dB | [22]                  | <sup>(2)</sup> | [18]     | [18,5] | [21]                  |
| PDTCH/DBS-9        | dB | [23,5]                | <sup>(2)</sup> | [21]     | [21]   | [24]                  |
| PDTCH/DBS-10       | dB | [31] <sup>(7)</sup>   | <sup>(2)</sup> | [26]     | [28,5] | -                     |
| PDTCH/DBS-11       | dB | [34] <sup>(7)</sup>   | <sup>(2)</sup> | [25**]   | [25**] | -                     |
| PDTCH/DBS-12       | dB | [27**] <sup>(7)</sup> | <sup>(2)</sup> | [28,5**] | [29**] | -                     |
| <b>(continued)</b> |    |                       |                |          |        |                       |

Table 2ad (continued): Cochannel interference ratio (for MS) at reference performance for TIGHTER

| Type of Channel |            | DCS 1 800 and PCS 1900 |                     |                 |                    |                  |
|-----------------|------------|------------------------|---------------------|-----------------|--------------------|------------------|
|                 |            | Propagation conditions |                     |                 |                    |                  |
|                 |            | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) |
| FACCH/H         | dB         | 1,5                    | -2,5                | -2              | -2                 | 1                |
| FACCH/F         | dB         | 2                      | -3                  | -2,5            | -2,5               | -0,5             |
| SDCCH           | dB         | 2                      | -2                  | -1,5            | -1,5               | 1,5              |
| TCH/FS          | dB         | 7                      | 0                   | 0               | 0                  | 3                |
|                 | RBER1b (%) | 0,05                   | 0,07                | 0,06            | 0,07               | 0,06             |
|                 | RBER2 (%)  | 0,6                    | 4,66                | 3,8             | 4,34               | 6,49             |
| TCH/EFS         | dB         | 7                      | 0                   | 0               | 0,5                | 3                |
|                 | RBER1b (%) | 0,19                   | 0,09                | 0,08            | 0,09               | 0,03             |
|                 | RBER2 (%)  | 0,62                   | 4,86                | 4,02            | 4,54               | 6,21             |
| TCH/HS          | dB         | 7                      | 0,5                 | 1               | 1                  | 5                |
|                 | RBER1b (%) | 0,17                   | 0,23                | 0,24            | 0,24               | 0,16             |
|                 | RBER2 (%)  | 0,95                   | 4,45                | 4,08            | 4,35               | 5,13             |
| TCH/AFS12.2     | dB         | 5                      | -1,5                | <sup>(6)</sup>  | -1,5               | 2,5              |
|                 | RBER1b (%) | 0,14                   | 0,92                | <sup>(6)</sup>  | 0,88               | 1,28             |
| TCH/AFS10.2     | dB         | 4                      | -3                  | <sup>(6)</sup>  | -3                 | 1                |
|                 | RBER1b (%) | 0,07                   | 0,15                | <sup>(6)</sup>  | 0,26               | 0,26             |
| TCH/AFS7.95     | dB         | 3                      | -5                  | <sup>(6)</sup>  | -4,5               | -2               |
|                 | RBER1b (%) | 0,1                    | 0,35                | <sup>(6)</sup>  | 0,34               | 0,46             |
| TCH/AFS7.4      | dB         | 2,5                    | -5                  | <sup>(6)</sup>  | -4,5               | -2,5             |
|                 | RBER1b (%) | 0,07                   | 0,16                | <sup>(6)</sup>  | 0,14               | 0,24             |
| TCH/AFS6.7      | dB         | 2                      | -5,5                | <sup>(6)</sup>  | -5,5               | -3,5             |
|                 | RBER1b (%) | 0,15                   | 0,48                | <sup>(6)</sup>  | 0,51               | 0,75             |
| TCH/AFS5.9      | dB         | 2                      | -6                  | <sup>(6)</sup>  | -6                 | -4               |
|                 | RBER1b (%) | 0,07                   | 0,15                | <sup>(6)</sup>  | 0,14               | 0,2              |
| TCH/AFS5.15     | dB         | 1,5                    | -6,5                | <sup>(6)</sup>  | -6,5               | -5               |
|                 | RBER1b (%) | 0,1                    | 0,2                 | <sup>(6)</sup>  | 0,2                | 0,28             |
| TCH/AFS4.75     | dB         | 1                      | -7                  | <sup>(6)</sup>  | -7                 | -5,5             |
|                 | RBER1b (%) | 0,06                   | 0,12                | <sup>(6)</sup>  | 0,14               | 0,15             |
| TCH/AHS7.95     | dB         | 7                      | 2,5                 | <sup>(6)</sup>  | 3                  | 16,5             |
|                 | RBER1b (%) | 0,12                   | 0,38                | <sup>(6)</sup>  | 0,41               | 0,42             |
|                 | RBER2 (%)  | 0,39                   | 1,85                | <sup>(6)</sup>  | 1,96               | 1,74             |
| TCH/AHS7.4      | dB         | 6,5                    | 2                   | <sup>(6)</sup>  | 2,5                | 14,5             |
|                 | RBER1b (%) | 0,08                   | 0,2                 | <sup>(6)</sup>  | 0,2                | 0,16             |
|                 | RBER2 (%)  | 0,5                    | 2,26                | <sup>(6)</sup>  | 2,34               | 2,27             |
| TCH/AHS6.7      | dB         | 5,5                    | 1                   | <sup>(6)</sup>  | 1                  | 9,5              |
|                 | RBER1b (%) | 0,1                    | 0,19                | <sup>(6)</sup>  | 0,29               | 0,23             |
|                 | RBER2 (%)  | 0,8                    | 2,58                | <sup>(6)</sup>  | 3,4                | 3,53             |
| TCH/AHS5.9      | dB         | 5                      | 0                   | <sup>(6)</sup>  | 0                  | 7                |
|                 | RBER1b (%) | 0,07                   | 0,11                | <sup>(6)</sup>  | 0,14               | 0,15             |
|                 | RBER2 (%)  | 0,8                    | 3,25                | <sup>(6)</sup>  | 3,92               | 3,9              |
| TCH/AHS5.15     | dB         | 4,5                    | -1                  | <sup>(6)</sup>  | -1                 | 4                |
|                 | RBER1b (%) | 0,06                   | 0,18                | <sup>(6)</sup>  | 0,26               | 0,27             |
|                 | RBER2 (%)  | 1,0                    | 4,29                | <sup>(6)</sup>  | 5,28               | 5,61             |
| TCH/AHS4.75     | dB         | 3,5                    | -2                  | <sup>(6)</sup>  | -2                 | 3                |
|                 | RBER1b (%) | 0,08                   | 0,1                 | <sup>(6)</sup>  | 0,16               | 0,13             |
|                 | RBER2 (%)  | 1,3                    | 5,5                 | <sup>(6)</sup>  | 6,31               | 6,4              |
| TCH/WFS12.65    | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | 7               | <sup>(2)</sup>     | <sup>(2)</sup>   |
|                 | RBER1b (%) | <sup>(2)</sup>         | <sup>(2)</sup>      | 0,63            | <sup>(2)</sup>     | <sup>(2)</sup>   |
| TCH/ WFS8.85    | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | 4               | <sup>(2)</sup>     | <sup>(2)</sup>   |
|                 | RBER1b (%) | <sup>(2)</sup>         | <sup>(2)</sup>      | 0,64            | <sup>(2)</sup>     | <sup>(2)</sup>   |
| TCH/ WFS6.60    | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | 3               | <sup>(2)</sup>     | <sup>(2)</sup>   |
|                 | RBER1b (%) | <sup>(2)</sup>         | <sup>(2)</sup>      | 0,27            | <sup>(2)</sup>     | <sup>(2)</sup>   |

|              |    |      |        |                       |      |      |
|--------------|----|------|--------|-----------------------|------|------|
| PDTCH/CS-1   | dB | 9    | 5,5    | 5,5                   | 5,5  | 6,5  |
| PDTCH/CS-2   | dB | 11   | 9,5    | 9,5                   | 9,5  | 10,5 |
| PDTCH/CS-3   | dB | 12   | 11,5   | 12,5                  | 12,5 | 13,5 |
| PDTCH/CS-4   | dB | 17   | 19,5   | 23,5                  | 23,5 | -    |
| PDTCH/MCS-1  | dB | 10   | 6,5    | 7,5                   | 6    | 8    |
| PDTCH/MCS-2  | dB | 12   | 9      | 9,5                   | 8,5  | 10   |
| PDTCH/MCS-3  | dB | 13,5 | 13,5   | 14                    | 13,5 | 17   |
| PDTCH/MCS-4  | dB | 16   | 18,5   | 19                    | 18,5 | -    |
| PDTCH/MCS-5  | dB | 16   | 11     | 11,5                  | 11,5 | 13,5 |
| PDTCH/MCS-6  | dB | 18   | 13,5   | 14,5                  | 14,5 | 18   |
| PDTCH/MCS-7  | dB | 23   | 20     | 24                    | 24   | -    |
| PDTCH/MCS-8  | dB | 27   | 20**   | 26**                  | 25** | -    |
| PDTCH/MCS-9  | dB | 22** | 24,5** | -                     | -    | -    |
| PDTCH/DAS-5  | dB | (2)  | (2)    | [11,5]                | (2)  | (2)  |
| PDTCH/DAS-6  | dB | (2)  | (2)    | [12,5]                | (2)  | (2)  |
| PDTCH/DAS-7  | dB | (2)  | (2)    | [14]                  | (2)  | (2)  |
| PDTCH/DAS-8  | dB | (2)  | (2)    | [16]                  | (2)  | (2)  |
| PDTCH/DAS-9  | dB | (2)  | (2)    | [20]                  | (2)  | (2)  |
| PDTCH/DAS-10 | dB | (2)  | (2)    | [22,5]                | (2)  | (2)  |
| PDTCH/DAS-11 | dB | (2)  | (2)    | [27,5**]              | (2)  | (2)  |
| PDTCH/DAS-12 | dB | (2)  | (2)    | -                     | (2)  | (2)  |
| PDTCH/DBS-5  | dB | (2)  | (2)    | [12] <sup>(7)</sup>   | (2)  | (2)  |
| PDTCH/DBS-6  | dB | (2)  | (2)    | [15,5] <sup>(7)</sup> | (2)  | (2)  |
| PDTCH/DBS-7  | dB | (2)  | (2)    | [15,5]                | (2)  | (2)  |
| PDTCH/DBS-8  | dB | (2)  | (2)    | [19,5]                | (2)  | (2)  |
| PDTCH/DBS-9  | dB | (2)  | (2)    | [18,5**]              | (2)  | (2)  |
| PDTCH/DBS-10 | dB | (2)  | (2)    | [23**]                | (2)  | (2)  |
| PDTCH/DBS-11 | dB | (2)  | (2)    | -                     | (2)  | (2)  |
| PDTCH/DBS-12 | dB | (2)  | (2)    | -                     | (2)  | (2)  |

Performance is specified at 30% BLER for those cases identified with mark "\*\*"

NOTE 1: The specification for SDCCH applies also for BCCH, AGCH, PCH, SACCH. The actual performance of SACCH, particularly for the C/I TU3 (no FH) and TU 1.5 (no FH) cases should be better.

NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

NOTE 3: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 4: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.

NOTE 5: PDTCH/CS-4, PDTCH/MCS-x, PDTCH/DAS-x and PDTCH/DBS-x cannot meet the reference performance for some propagation conditions (-).

NOTE 6: The TU50 no FH TIGHTER requirement for these TCH are specified as a fixed tightening of the reference interference performance listed in Table 2 by 10 dB for GSM 850 & 900 and by 9,5 dB for DCS 1800 and PCS 1900.

NOTE 7: The requirement is identical to the EGPRS2-A or EGPRS2-B requirement in Table 2s or Table 2u, respectively.

Table 2ae: C/I1 ratio at reference performance for TIGHTER

|                       |            | GSM 900 and GSM 850 |       |       |       |       |
|-----------------------|------------|---------------------|-------|-------|-------|-------|
| Propagation condition |            | TU50 no FH          |       |       |       |       |
| Type of channel       |            | DARP Test Scenario  |       |       |       |       |
|                       |            | DTS-1               | DTS-2 | DTS-3 | DTS-4 | DTS-5 |
| FACCH/F               | dB         | -5,5                | 5,5   | 7     | -     | -     |
| SDCCH                 | dB         | -4,5                | 7     | 8     | -     | -     |
| TCH/FS                | dB         | -4                  | 7,5   | 8     | -2    | 7     |
|                       | RBER1b (%) | 0,1                 | 0,1   | 0,1   | 0,1   | 0,1   |
|                       | RBER2 (%)  | 4,6                 | 4,4   | 4,3   | 5,02  | 4,6   |
| TCH/AFS12.2           | dB         | -2,5                | 8     | 8     | -2,5  | 7,5   |
|                       | RBER1b (%) | 0,6                 | 0,6   | 0,5   | 0,8   | 0,7   |
| TCH/AFS10.2           | dB         | -4                  | 6,5   | 7     | -     | -     |
|                       | RBER1b (%) | 0,2                 | 0,15  | 0,15  | -     | -     |
| TCH/AFS7.95           | dB         | -6                  | 4,5   | 5,5   | -     | -     |
|                       | RBER1b (%) | 0,35                | 0,28  | 0,28  | -     | -     |
| TCH/AFS7.4            | dB         | -6                  | 4,5   | 5,5   | -     | -     |
|                       | RBER1b (%) | 0,2                 | 0,15  | 0,15  | -     | -     |
| TCH/AFS6.7            | dB         | -7,5                | 3,5   | 5     | -     | -     |
|                       | RBER1b (%) | 0,5                 | 0,39  | 0,37  | -     | -     |
| TCH/AFS5.9            | dB         | -7,5                | 3,5   | 4,5   | -8    | 3     |
|                       | RBER1b (%) | 0,2                 | 0,2   | 0,15  | 0,16  | 0,2   |
| TCH/AFS5.15           | dB         | -8,5                | 3     | 3,5   | -     | -     |
|                       | RBER1b (%) | 0,21                | 0,2   | 0,25  | -     | -     |
| TCH/AFS4.75           | dB         | -9                  | 2,5   | 3     | -     | -     |
|                       | RBER1b (%) | 0,15                | 0,15  | 0,15  | -     | -     |
| TCH/AHS7.95           | dB         | 1,5                 | 12    | 12,5  | -     | -     |
|                       | RBER1b (%) | 0,35                | 0,3   | 0,35  | -     | -     |
|                       | RBER2 (%)  | 1,8                 | 1,6   | 1,43  | -     | -     |
| TCH/AHS7.4            | dB         | 1                   | 10,5  | 11,5  | -     | -     |
|                       | RBER1b (%) | 0,25                | 0,2   | 0,2   | -     | -     |
|                       | RBER2 (%)  | 2,2                 | 1,9   | 1,8   | -     | -     |
| TCH/AHS6.7            | dB         | -0,5                | 9,5   | 10    | -     | -     |
|                       | RBER1b (%) | 0,25                | 0,3   | 0,25  | -     | -     |
|                       | RBER2 (%)  | 2,9                 | 2,8   | 2,5   | -     | -     |
| TCH/AHS5.9            | dB         | -1,5                | 8,5   | 9,5   | -     | -     |
|                       | RBER1b (%) | 0,15                | 0,15  | 0,15  | -     | -     |
|                       | RBER2 (%)  | 3,7                 | 3,5   | 3,5   | -     | -     |
| TCH/AHS5.15           | dB         | -3                  | 7     | 8     | -     | -     |
|                       | RBER1b (%) | 0,25                | 0,3   | 0,3   | -     | -     |
|                       | RBER2 (%)  | 4,9                 | 4,5   | 4,8   | -     | -     |
| TCH/AHS4.75           | dB         | -4,5                | 5,5   | 6,5   | -     | -     |
|                       | RBER1b (%) | 0,2                 | 0,25  | 0,2   | -     | -     |
|                       | RBER2 (%)  | 6,5                 | 5,8   | 5,5   | -     | -     |
| PDTCH CS-1            | dB         | -7                  | 6     | 6,5   | -     | -     |
| PDTCH CS-2            | dB         | -4                  | 8,5   | 9     | -     | -     |
| PDTCH CS-3            | dB         | -1,5                | 11    | 11,5  | -     | -     |
| PDTCH CS-4            | dB         | 9,5                 | 20    | 20,5  | -     | -     |
| PDTCH MCS-1           | dB         | -6                  | 7,5   | 8,5   | -     | -     |
| PDTCH MCS-2           | dB         | -4                  | 9     | 10    | -     | -     |
| PDTCH MCS-3           | dB         | 1,5                 | 13    | 13,5  | -     | -     |
| PDTCH MCS-4           | dB         | 8,5                 | 18    | 19    | -     | -     |

(Continued)

Table 2ae (continued): C/I1 ratio at reference performance for TIGHTER

|                       |             | DCS 1 800 & PCS 1900 |       |       |       |       |
|-----------------------|-------------|----------------------|-------|-------|-------|-------|
| Propagation condition |             | TU50 no FH           |       |       |       |       |
| Type of channel       |             | DARP Test Scenario   |       |       |       |       |
|                       |             | DTS-1                | DTS-2 | DTS-3 | DTS-4 | DTS-5 |
| FACCH/F               | dB          | -5,5                 | 5     | 6     | -     | -     |
| SDCCH                 | dB          | -4,5                 | 6     | 7,5   | -     | -     |
| TCH/FS                | dB          | -4                   | 7     | 7     | -2,5  | 7     |
|                       | RBBER1b (%) | 0,1                  | 0,1   | 0,1   | 0,1   | 0,1   |
|                       | RBBER2 (%)  | 5,3                  | 5,7   | 5,4   | 6,09  | 5,8   |
| TCH/AFS12.2           | dB          | -3,5                 | 7     | 8     | -2,5  | 7     |
|                       | RBBER1b (%) | 0,87                 | 0,89  | 0,8   | 0,95  | 1,1   |
| TCH/AFS10.2           | dB          | -4,5                 | 5,5   | 6,5   | -     | -     |
|                       | RBBER1b (%) | 0,2                  | 0,2   | 0,2   | -     | -     |
| TCH/AFS7.95           | dB          | -7                   | 3,5   | 4,5   | -     | -     |
|                       | RBBER1b (%) | 0,36                 | 0,43  | 0,4   | -     | -     |
| TCH/AFS7.4            | dB          | -7                   | 3,5   | 4,5   | -     | -     |
|                       | RBBER1b (%) | 0,2                  | 0,2   | 0,2   | -     | -     |
| TCH/AFS6.7            | dB          | -8                   | 2,5   | 3,5   | -     | -     |
|                       | RBBER1b (%) | 0,7                  | 0,6   | 0,56  | -     | -     |
| TCH/AFS5.9            | dB          | -8,5                 | 2,5   | 3     | -8,5  | 2     |
|                       | RBBER1b (%) | 0,2                  | 0,3   | 0,16  | 0,21  | 0,22  |
| TCH/AFS5.15           | dB          | -9                   | 1,5   | 2,5   | -     | -     |
|                       | RBBER1b (%) | 0,25                 | 0,3   | 0,25  | -     | -     |
| TCH/AFS4.75           | dB          | -9,5                 | 1     | 2     | -     | -     |
|                       | RBBER1b (%) | 0,15                 | 0,2   | 0,2   | -     | -     |
| TCH/AHS7.95           | dB          | 2,5                  | 12    | 13    | -     | -     |
|                       | RBBER1b (%) | 0,35                 | 0,4   | 0,3   | -     | -     |
|                       | RBBER2 (%)  | 1,7                  | 1,8   | 1,5   | -     | -     |
| TCH/AHS7.4            | dB          | 1,5                  | 11    | 12    | -     | -     |
|                       | RBBER1b (%) | 0,2                  | 0,2   | 0,2   | -     | -     |
|                       | RBBER2 (%)  | 2,1                  | 1,9   | 1,9   | -     | -     |
| TCH/AHS6.7            | dB          | 0                    | 9,5   | 10,5  | -     | -     |
|                       | RBBER1b (%) | 0,25                 | 0,25  | 0,25  | -     | -     |
|                       | RBBER2 (%)  | 3,2                  | 2,8   | 2,5   | -     | -     |
| TCH/AHS5.9            | dB          | -1,5                 | 8,5   | 9,5   | -     | -     |
|                       | RBBER1b (%) | 0,15                 | 0,2   | 0,2   | -     | -     |
|                       | RBBER2 (%)  | 3,8                  | 3,4   | 3,3   | -     | -     |
| TCH/AHS5.15           | dB          | -2,5                 | 7     | 8     | -     | -     |
|                       | RBBER1b (%) | 0,31                 | 0,3   | 0,3   | -     | -     |
|                       | RBBER2 (%)  | 5                    | 4,7   | 4,4   | -     | -     |
| TCH/AHS4.75           | dB          | -4                   | 6     | 7     | -     | -     |
|                       | RBBER1b (%) | 0,2                  | 0,25  | 0,2   | -     | -     |
|                       | RBBER2 (%)  | 6,7                  | 5,9   | 5,46  | -     | -     |
| PDTCH CS-1            | dB          | -6,5                 | 5     | 6     | -     | -     |
| PDTCH CS-2            | dB          | -3                   | 8,5   | 9     | -     | -     |
| PDTCH CS-3            | dB          | 0                    | 10,5  | 11    | -     | -     |
| PDTCH CS-4            | dB          | 13                   | 21,5  | 22    | -     | -     |
| PDTCH MCS-1           | dB          | -5,5                 | 7     | 8     | -     | -     |
| PDTCH MCS-2           | dB          | -3,5                 | 9     | 9,5   | -     | -     |
| PDTCH MCS-3           | dB          | 2                    | 13    | 13,5  | -     | -     |
| PDTCH MCS-4           | dB          | 9                    | 20    | 20,5  | -     | -     |

**Table 2af: Adjacent channel interference ratio (for MS) at reference performance for TIGHTER**

| GSM 850 and GSM 900 |            |                        |                |              |                 |               |
|---------------------|------------|------------------------|----------------|--------------|-----------------|---------------|
| Type of Channel     |            | Propagation conditions |                |              |                 |               |
|                     |            | TU3 (no FH)            | TU3 (ideal FH) | TU50 (no FH) | TU50 (ideal FH) | RA250 (no FH) |
| FACCH/H             | dB         | -16                    | -21            | -21          | -21             | -21           |
| FACCH/F             | dB         | -15,5                  | -21,5          | -20,5        | -21,5           | -21,5         |
| SDCCH               | dB         | -15,5                  | -20            | -19,5        | -20             | -20           |
| TCH/FS              | dB         | -11,5                  | -19,5          | -18,5        | -19,5           | -19,5         |
|                     | RBER1b (%) | 0,06                   | 0,08           | 0,07         | 0,08            | 0,07          |
|                     | RBER2 (%)  | 0,6                    | 5,55           | 4,12         | 5,55            | 6,34          |
| TCH/EFS             | dB         | -11                    | -19,5          | -18          | -19             | -19           |
|                     | RBER1b (%) | 0,02                   | 0,04           | 0,03         | 0,03            | 0,04          |
|                     | RBER2 (%)  | 0,5                    | 5,2            | 3,88         | 4,77            | 5,73          |
| TCH/HS              | dB         | -12,5                  | -19            | -19          | -19             | -18,5         |
|                     | RBER1b (%) | 0,14                   | 0,18           | 0,19         | 0,16            | 0,19          |
|                     | RBER2 (%)  | 1,01                   | 5,19           | 5,04         | 5,08            | 5,48          |
| TCH/AFS12.2         | dB         | -11,5                  | -19,5          | (6)          | -19,5           | -19,5         |
|                     | RBER1b (%) | 0,12                   | 1,02           | (6)          | 1,01            | 1,15          |
| TCH/AFS10.2         | dB         | -12,5                  | -21            | (6)          | -21             | -21           |
|                     | RBER1b (%) | 0,07                   | 0,25           | (6)          | 0,25            | 0,26          |
| TCH/AFS7.95         | dB         | -14                    | -23            | (6)          | -23             | -23           |
|                     | RBER1b (%) | 0,11                   | 0,44           | (6)          | 0,44            | 0,43          |
| TCH/AFS7.4          | dB         | -14                    | -23            | (6)          | -23             | -23           |
|                     | RBER1b (%) | 0,07                   | 0,23           | (6)          | 0,23            | 0,24          |
| TCH/AFS6.7          | dB         | -15                    | -24            | (6)          | -24             | -24           |
|                     | RBER1b (%) | 0,14                   | 0,63           | (6)          | 0,64            | 0,68          |
| TCH/AFS5.9          | dB         | -15                    | -24,5          | (6)          | -24,5           | -24,5         |
|                     | RBER1b (%) | 0,07                   | 0,2            | (6)          | 0,2             | 0,21          |
| TCH/AFS5.15         | dB         | -15,5                  | -25            | (6)          | -25             | -25           |
|                     | RBER1b (%) | 0,09                   | 0,29           | (6)          | 0,28            | 0,3           |
| TCH/AFS4.75         | dB         | -16                    | -25,5          | (6)          | -25,5           | -25,5         |
|                     | RBER1b (%) | 0,07                   | 0,17           | (6)          | 0,16            | 0,17          |
| TCH/AHS7.95         | dB         | -9,5                   | -15            | (6)          | -14,5           | -10           |
|                     | RBER1b (%) | 0,11                   | 0,42           | (6)          | 0,41            | 0,43          |
|                     | RBER2 (%)  | 0,36                   | 1,97           | (6)          | 1,92            | 1,99          |
| TCH/AHS7.4          | dB         | -10                    | -15,5          | (6)          | -15,5           | -12           |
|                     | RBER1b (%) | 0,08                   | 0,22           | (6)          | 0,21            | 0,2           |
|                     | RBER2 (%)  | 0,43                   | 2,29           | (6)          | 2,28            | 2,54          |
| TCH/AHS6.7          | dB         | -11                    | -17            | (6)          | -17             | -15,5         |
|                     | RBER1b (%) | 0,09                   | 0,28           | (6)          | 0,29            | 0,29          |
|                     | RBER2 (%)  | 0,57                   | 3,26           | (6)          | 3,3             | 3,71          |
| TCH/AHS5.9          | dB         | -11,5                  | -18            | (6)          | -18             | -16,5         |
|                     | RBER1b (%) | 0,07                   | 0,17           | (6)          | 0,16            | 0,17          |
|                     | RBER2 (%)  | 0,66                   | 4,02           | (6)          | 4,02            | 4,21          |
| TCH/AHS5.15         | dB         | -12,5                  | -19            | (6)          | -19             | -18,5         |
|                     | RBER1b (%) | 0,12                   | 0,31           | (6)          | 0,3             | 0,32          |
|                     | RBER2 (%)  | 0,91                   | 5,3            | (6)          | 5,34            | 5,77          |
| TCH/AHS4.75         | dB         | -13                    | -20            | (6)          | -20             | -19,5         |
|                     | RBER1b (%) | 0,09                   | 0,16           | (6)          | 0,16            | 0,16          |
|                     | RBER2 (%)  | 1,11                   | 6,26           | (6)          | 6,32            | 6,69          |
| TCH/WFS12.65        | dB         | -10,5                  | (2)            | -17,5        | (2)             | -19           |
|                     | RBER1b (%) | 0,08                   | (2)            | 0,40         | (2)             | 0,63          |
| TCH/ WFS8.85        | dB         | -12                    | (2)            | -20,5        | (2)             | -22,5         |
|                     | RBER1b (%) | 0,11                   | (2)            | 0,42         | (2)             | 0,73          |
| TCH/ WFS6.60        | dB         | -13                    | (2)            | -21,5        | (2)             | -23,5         |

|                    |            |                       |       |                       |                       |                       |
|--------------------|------------|-----------------------|-------|-----------------------|-----------------------|-----------------------|
|                    | RBER1b (%) | 0,09                  | (2)   | 0,16                  | (2)                   | 0,24                  |
| PDTCH/CS-1         | dB         | -15                   | -19   | -18                   | -19                   | -18                   |
| PDTCH/CS-2         | dB         | -13                   | -15   | -14                   | -15                   | -14                   |
| PDTCH/CS-3         | dB         | -12                   | -13   | -12                   | -13                   | -11                   |
| PDTCH/CS-4         | dB         | -7                    | -5    | -4                    | -4                    | -                     |
| PDTCH/MCS-1        | dB         | [-14                  | -17,5 | -16,5                 | -18                   | -17                   |
| PDTCH/MCS-2        | dB         | -12                   | -14,5 | -14,5                 | -15,5                 | -15                   |
| PDTCH/MCS-3        | dB         | -10,5                 | -1,5  | -10                   | -10,5                 | -8                    |
| PDTCH/MCS-4        | dB         | -8                    | 3,5   | -5                    | -5,5                  | -                     |
| PDTCH/MCS-5        | dB         | -9                    | -13,5 | -12,5                 | -13,5                 | -13,5                 |
| PDTCH/MCS-6        | dB         | -7                    | -11   | -10,5                 | -11,5                 | -10                   |
| PDTCH/MCS-7        | dB         | -2,5                  | -5    | -4                    | -4                    | -                     |
| PDTCH/MCS-8        | dB         | 5                     | -3**  | -2,5**                | -2,5**                | -                     |
| PDTCH/MCS-9        | dB         | 0,5**                 | -1**  | 3**                   | 3**                   | -                     |
| PDTCH/DAS-5        | dB         | [-8,5]                | (2)   | [-12]                 | [-13]                 | [-12]                 |
| PDTCH/DAS-6        | dB         | [-8]                  | (2)   | [-10,5]               | [-11,5]               | [-10]                 |
| PDTCH/DAS-7        | dB         | [-7]                  | (2)   | [-8,5]                | [-9,5]                | [-7]                  |
| PDTCH/DAS-8        | dB         | [-2]                  | (2)   | [-5,5]                | [-5,5]                | [-2]                  |
| PDTCH/DAS-9        | dB         | [-0,5]                | (2)   | [-2,5]                | [-2,5]                | [7]                   |
| PDTCH/DAS-10       | dB         | [10,5]                | (2)   | [7]                   | [9]                   | [8,5**]               |
| PDTCH/DAS-11       | dB         | [13,5]                | (2)   | [14]                  | [16,5]                | -                     |
| PDTCH/DAS-12       | dB         | [15,5]                | (2)   | [14,5**]              | [14,5**]              | -                     |
| PDTCH/DBS-5        | dB         | [-4] <sup>(7)</sup>   | (2)   | [-7] <sup>(7)</sup>   | [-7,5] <sup>(7)</sup> | [-8] <sup>(7)</sup>   |
| PDTCH/DBS-6        | dB         | [-2] <sup>(7)</sup>   | (2)   | [-4] <sup>(7)</sup>   | [-4,5] <sup>(7)</sup> | [-4] <sup>(7)</sup>   |
| PDTCH/DBS-7        | dB         | [5] <sup>(7)</sup>    | (2)   | [1,5] <sup>(7)</sup>  | [0,5] <sup>(7)</sup>  | [2] <sup>(7)</sup>    |
| PDTCH/DBS-8        | dB         | [8] <sup>(7)</sup>    | (2)   | [5,5] <sup>(7)</sup>  | [5] <sup>(7)</sup>    | [10] <sup>(7)</sup>   |
| PDTCH/DBS-9        | dB         | [10] <sup>(7)</sup>   | (2)   | [8,5] <sup>(7)</sup>  | [8] <sup>(7)</sup>    | [20,5] <sup>(7)</sup> |
| PDTCH/DBS-10       | dB         | [18,5] <sup>(7)</sup> | (2)   | [17] <sup>(7)</sup>   | [17,5] <sup>(7)</sup> | -                     |
| PDTCH/DBS-11       | dB         | [22,5] <sup>(7)</sup> | (2)   | [29,5] <sup>(7)</sup> | [30] <sup>(7)</sup>   | -                     |
| PDTCH/DBS-12       | dB         | [27,5] <sup>(7)</sup> | (2)   | [23**] <sup>(7)</sup> | [24**] <sup>(7)</sup> | -                     |
| <b>(continued)</b> |            |                       |       |                       |                       |                       |



Table 2af (continued): Adjacent channel interference ratio (for MS) at reference performance for TIGHTER

| DCS 1 800 and PCS 1900 |            |                        |                     |                 |                    |                  |
|------------------------|------------|------------------------|---------------------|-----------------|--------------------|------------------|
| Type of channel        |            | Propagation conditions |                     |                 |                    |                  |
|                        |            | TU1,5<br>(no FH)       | TU1,5<br>(ideal FH) | TU50<br>(no FH) | TU50<br>(ideal FH) | RA130<br>(no FH) |
| FACCH/H                | dB         | -15,5                  | -21                 | -20,5           | -20,5              | -20,5            |
| FACCH/F                | dB         | -15,5                  | -21,5               | -21             | -21,5              | -21,5            |
| SDCCH                  | dB         | -15,5                  | -20                 | -20             | -20                | -20              |
| TCH/FS                 | dB         | -11,5                  | -19,5               | -19,5           | -19,5              | -19,5            |
|                        | RBER1b (%) | 0,06                   | 0,08                | 0,07            | 0,09               | 0,08             |
|                        | RBER2 (%)  | 0,59                   | 5,59                | 5,87            | 5,54               | 6,34             |
| TCH/EFS                | dB         | -11                    | -19,5               | -19             | -19,5              | -19              |
|                        | RBER1b (%) | 0,02                   | 0,04                | 0,03            | 0,04               | 0,04             |
|                        | RBER2 (%)  | 0,5                    | 5,19                | 4,93            | 5,22               | 5,76             |
| TCH/HS                 | dB         | -12,5                  | -19                 | -18,5           | -19                | -18,5            |
|                        | RBER1b (%) | 0,13                   | 0,19                | 0,18            | 0,18               | 0,17             |
|                        | RBER2 (%)  | 0,97                   | 5,17                | 5,11            | 5,18               | 5,62             |
| TCH/AFS12.2            | dB         | -11,5                  | -19,5               | <sup>(6)</sup>  | -19,5              | -19,5            |
|                        | RBER1b (%) | 0,12                   | 1,01                | <sup>(6)</sup>  | 1,02               | 1,14             |
| TCH/AFS10.2            | dB         | -12,5                  | -21                 | <sup>(6)</sup>  | -21                | -20,5            |
|                        | RBER1b (%) | 0,07                   | 0,24                | <sup>(6)</sup>  | 0,25               | 0,26             |
| TCH/AFS7.95            | dB         | -14                    | -23                 | <sup>(6)</sup>  | -23                | -23              |
|                        | RBER1b (%) | 0,11                   | 0,43                | <sup>(6)</sup>  | 0,43               | 0,44             |
| TCH/AFS7.4             | dB         | -14                    | -23                 | <sup>(6)</sup>  | -23                | -23              |
|                        | RBER1b (%) | 0,07                   | 0,23                | <sup>(6)</sup>  | 0,23               | 0,25             |
| TCH/AFS6.7             | dB         | -15                    | -24                 | <sup>(6)</sup>  | -24                | -24              |
|                        | RBER1b (%) | 0,14                   | 0,62                | <sup>(6)</sup>  | 0,66               | 0,69             |
| TCH/AFS5.9             | dB         | -15                    | -24,5               | <sup>(6)</sup>  | -24,5              | -24,5            |
|                        | RBER1b (%) | 0,08                   | 0,2                 | <sup>(6)</sup>  | 0,2                | 0,21             |
| TCH/AFS5.15            | dB         | -15,5                  | -25                 | <sup>(6)</sup>  | -25                | -25              |
|                        | RBER1b (%) | 0,09                   | 0,29                | <sup>(6)</sup>  | 0,3                | 0,3              |
| TCH/AFS4.75            | dB         | -16                    | -25,5               | <sup>(6)</sup>  | -25,5              | -25,5            |
|                        | RBER1b (%) | 0,07                   | 0,17                | <sup>(6)</sup>  | 0,17               | 0,17             |
| TCH/AHS7.95            | dB         | -9,5                   | -15                 | <sup>(6)</sup>  | -14,5              | -10,5            |
|                        | RBER1b (%) | 0,1                    | 0,43                | <sup>(6)</sup>  | 0,42               | 0,47             |
|                        | RBER2 (%)  | 0,35                   | 1,99                | <sup>(6)</sup>  | 1,98               | 2,06             |
| TCH/AHS7.4             | dB         | -10                    | -15,5               | <sup>(6)</sup>  | -15,5              | -12,5            |
|                        | RBER1b (%) | 0,08                   | 0,21                | <sup>(6)</sup>  | 0,21               | 0,21             |
|                        | RBER2 (%)  | 0,4                    | 2,29                | <sup>(6)</sup>  | 2,32               | 2,58             |
| TCH/AHS6.7             | dB         | -11                    | -17                 | <sup>(6)</sup>  | -17                | -15              |
|                        | RBER1b (%) | 0,09                   | 0,28                | <sup>(6)</sup>  | 0,3                | 0,28             |
|                        | RBER2 (%)  | 0,57                   | 3,29                | <sup>(6)</sup>  | 3,36               | 3,73             |
| TCH/AHS5.9             | dB         | -11,5                  | -18                 | <sup>(6)</sup>  | -18                | -17              |
|                        | RBER1b (%) | 0,07                   | 0,17                | <sup>(6)</sup>  | 0,16               | 0,17             |
|                        | RBER2 (%)  | 0,66                   | 4,01                | <sup>(6)</sup>  | 3,98               | 4,24             |
| TCH/AHS5.15            | dB         | -12,5                  | -19,5               | <sup>(6)</sup>  | -19                | -18,5            |
|                        | RBER1b (%) | 0,12                   | 0,32                | <sup>(6)</sup>  | 0,32               | 0,32             |
|                        | RBER2 (%)  | 0,92                   | 5,35                | <sup>(6)</sup>  | 5,36               | 5,82             |
| TCH/AHS4.75            | dB         | -13                    | -20                 | <sup>(6)</sup>  | -20                | -19,5            |
|                        | RBER1b (%) | 0,09                   | 0,16                | <sup>(6)</sup>  | 0,16               | 0,17             |
|                        | RBER2 (%)  | 1,1                    | 6,29                | <sup>(6)</sup>  | 6,38               | 6,78             |
| TCH/WFS12.65           | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | -19             | <sup>(2)</sup>     | <sup>(2)</sup>   |
|                        | RBER1b (%) | <sup>(2)</sup>         | <sup>(2)</sup>      | 0,63            | <sup>(2)</sup>     | <sup>(2)</sup>   |
| TCH/ WFS8.85           | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | -22             | <sup>(2)</sup>     | <sup>(2)</sup>   |
|                        | RBER1b (%) | <sup>(2)</sup>         | <sup>(2)</sup>      | 0,64            | <sup>(2)</sup>     | <sup>(2)</sup>   |
| TCH/ WFS6.60           | dB         | <sup>(2)</sup>         | <sup>(2)</sup>      | -23             | <sup>(2)</sup>     | <sup>(2)</sup>   |

|              | RBER1b (%) | (2)   | (2)   | 0,27                    | (2)   | (2)   |
|--------------|------------|-------|-------|-------------------------|-------|-------|
| PDTCH/CS-1   | dB         | -15   | -19   | -19                     | -19   | -18   |
| PDTCH/CS-2   | dB         | -13   | -15   | -15                     | -15   | -14   |
| PDTCH/CS-3   | dB         | -12   | -13   | -12                     | -12   | -11   |
| PDTCH/CS-4   | dB         | -7    | -5    | -1                      | -1    | -     |
| PDTCH/MCS-1  | dB         | -14   | -17,5 | -17                     | -18   | -16   |
| PDTCH/MCS-2  | dB         | -12   | -15   | -15                     | -15,5 | -14   |
| PDTCH/MCS-3  | dB         | -10,5 | -10,5 | -10                     | -9,5  | -7    |
| PDTCH/MCS-4  | dB         | -8    | -5,5  | -4                      | -4,5  | -     |
| PDTCH/MCS-5  | dB         | -9    | -13,5 | -13                     | -13   | -13,5 |
| PDTCH/MCS-6  | dB         | -7    | -11   | -11                     | -11   | -10   |
| PDTCH/MCS-7  | dB         | -2,5  | -5    | -2,5                    | -2,5  | -     |
| PDTCH/MCS-8  | dB         | 5     | -3**  | 0**                     | 0**   | -     |
| PDTCH/MCS-9  | dB         | 0**   | 1,5** | -                       | -     | -     |
| PDTCH/DAS-5  | dB         | (2)   | (2)   | [-12,5]                 | (2)   | (2)   |
| PDTCH/DAS-6  | dB         | (2)   | (2)   | [-10,5]                 | (2)   | (2)   |
| PDTCH/DAS-7  | dB         | (2)   | (2)   | [-8,5]                  | (2)   | (2)   |
| PDTCH/DAS-8  | dB         | (2)   | (2)   | [-4]                    | (2)   | (2)   |
| PDTCH/DAS-9  | dB         | (2)   | (2)   | [0]                     | (2)   | (2)   |
| PDTCH/DAS-10 | dB         | (2)   | (2)   | [8]                     | (2)   | (2)   |
| PDTCH/DAS-11 | dB         | (2)   | (2)   | [14**]                  | (2)   | (2)   |
| PDTCH/DAS-12 | dB         | (2)   | (2)   | -                       | (2)   | (2)   |
| PDTCH/DBS-5  | dB         | (2)   | (2)   | [-7,5] <sup>(7)</sup>   | (2)   | (2)   |
| PDTCH/DBS-6  | dB         | (2)   | (2)   | [-4] <sup>(7)</sup>     | (2)   | (2)   |
| PDTCH/DBS-7  | dB         | (2)   | (2)   | [1,5] <sup>(7)</sup>    | (2)   | (2)   |
| PDTCH/DBS-8  | dB         | (2)   | (2)   | [6] <sup>(7)</sup>      | (2)   | (2)   |
| PDTCH/DBS-9  | dB         | (2)   | (2)   | [9,5] <sup>(7)</sup>    | (2)   | (2)   |
| PDTCH/DBS-10 | dB         | (2)   | (2)   | [22] <sup>(7)</sup>     | (2)   | (2)   |
| PDTCH/DBS-11 | dB         | (2)   | (2)   | [24,5**] <sup>(7)</sup> | (2)   | (2)   |
| PDTCH/DBS-12 | dB         | (2)   | (2)   | -                       | (2)   | (2)   |

Performance is specified at 30% BLER for those cases identified with mark "\*\*"

NOTE 1: The specification for SDCCH applies also for BCCH, AGCH, PCH, SACCH. The actual performance of SACCH, particularly for the C/I TU3 (no FH) and TU 1.5 (no FH) cases should be better.

NOTE 2: The requirements for the DCS 1800 & PCS 1900 TU1.5 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 TU3 (no FH) propagation condition, the requirements for the GSM 850 & GSM 900 TU3 (ideal FH), DCS 1800 & PCS 1900 TU1.5 (ideal FH) and DCS 1800 & PCS 1900 TU50 (ideal FH) propagation conditions are the same as for the DCS 1800 & PCS 1900 TU50 (no FH) propagation condition, and the requirements for the DCS 1800 & PCS 1900 RA130 (no FH) propagation condition are the same as for the GSM 850 & GSM 900 RA250 (no FH) propagation condition.

NOTE 3: Ideal FH case assumes perfect decorrelation between bursts. This case may only be tested if such a decorrelation is ensured in the test. For TU50 (ideal FH), sufficient decorrelation may be achieved with 4 frequencies spaced over 5 MHz.

NOTE 4: FER for CCHs takes into account frames which are signalled as being erroneous (by the FIRE code, parity bits, or other means) or where the stealing flags are wrongly interpreted.

NOTE 5: PDTCH/CS-4, PDTCH/MCS-x, PDTCH/DAS-x and PDTCH/DBS-x cannot meet the reference performance for some propagation conditions (-).

NOTE 6: The TU50 no FH TIGHTER requirement for these TCH are specified as a fixed tightening of the reference interference performance listed in Table 2 by 10 dB for GSM 850 & 900 and by 9,5 dB for DCS 1800 and PCS 1900 (see section 6.3.1).

NOTE 7: The requirement is identical to the EGPRS2-B requirement in Table 2y.

# Annex A (informative): Spectrum characteristics (spectrum due to the modulation)


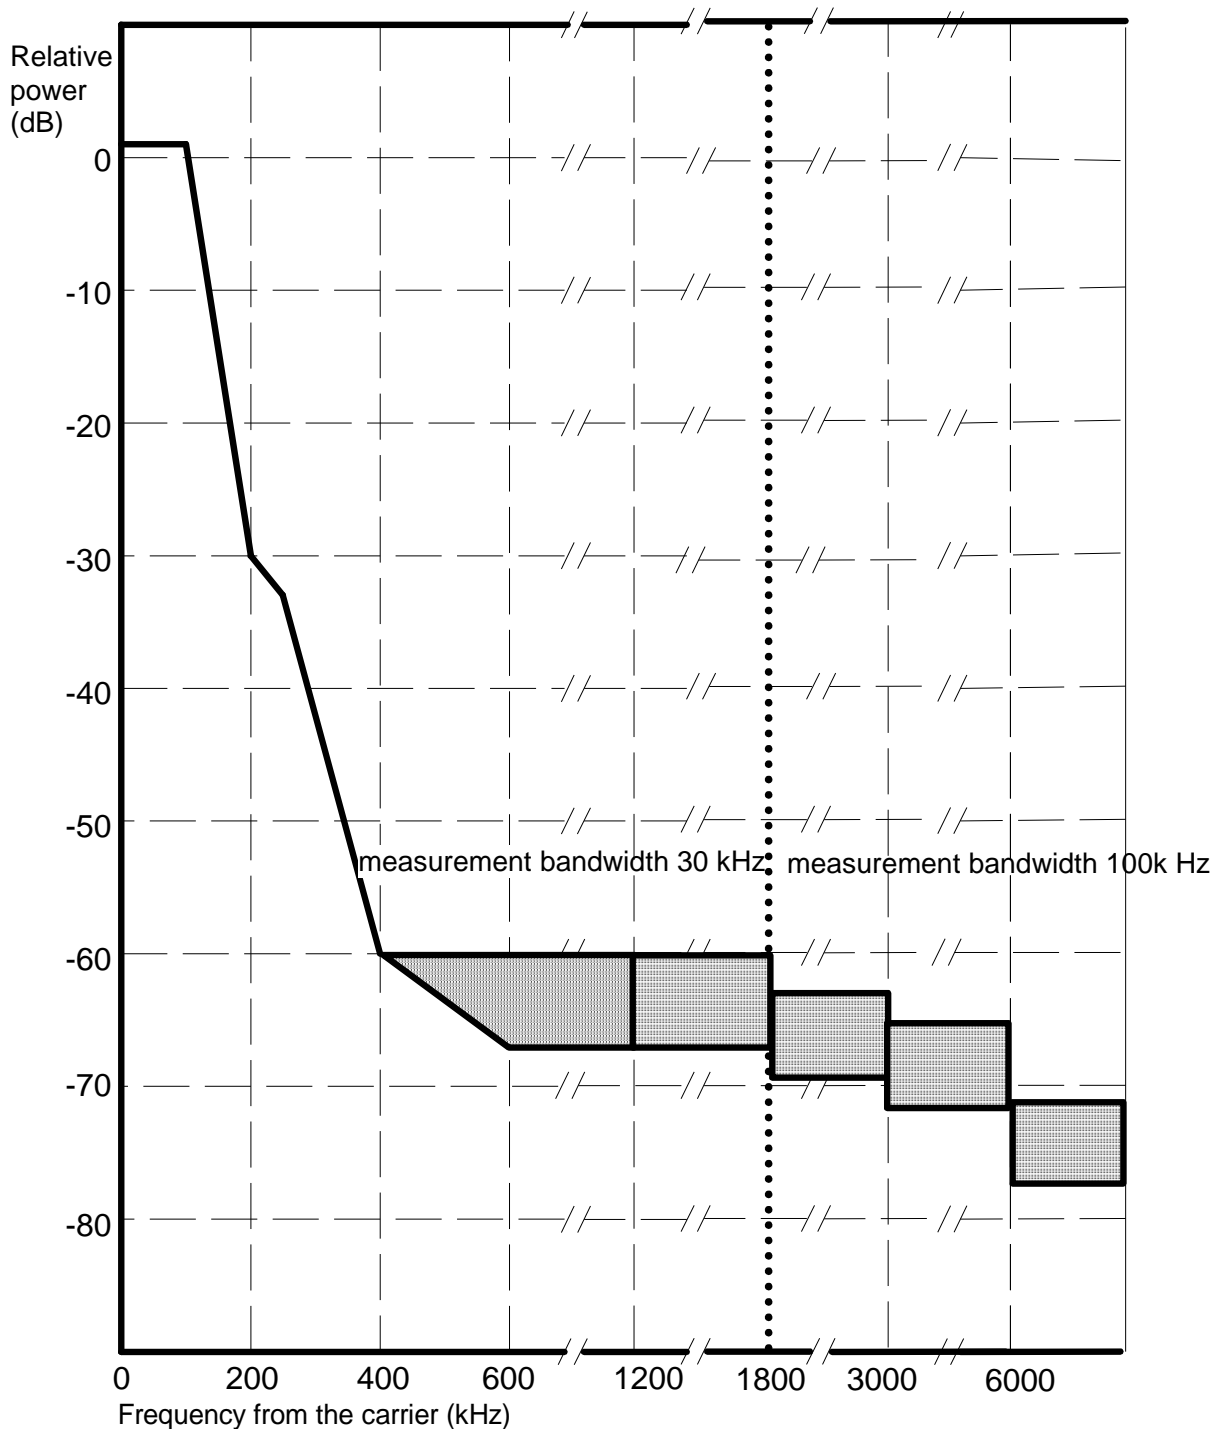


Figure A.1a: GSM 400, GSM 900, GSM 850 and GSM 700 MS spectrum due to GMSK modulation

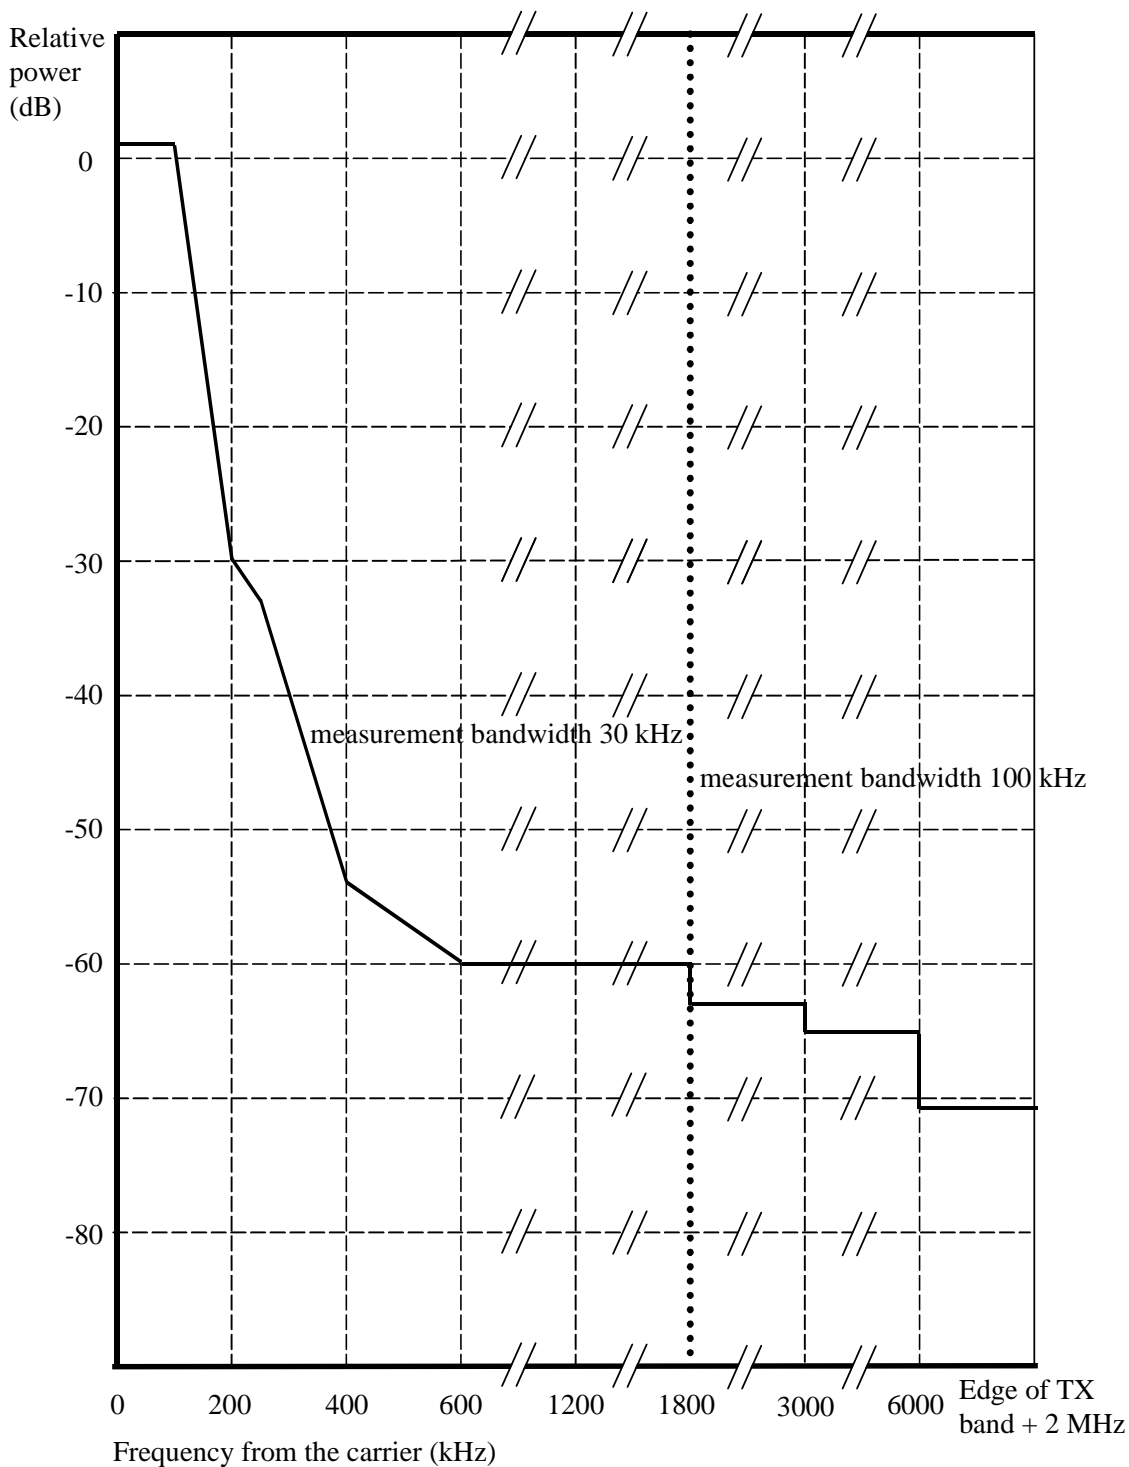

**Figure A.1b: GSM 400, GSM 900, GSM 850 and GSM 700 MS spectrum due to 8-PSK and 16-QAM modulation with normal symbol rate and QPSK, 16-QAM and 32-QAM modulation with higher symbol rate using narrow BW pulse shaping filter**

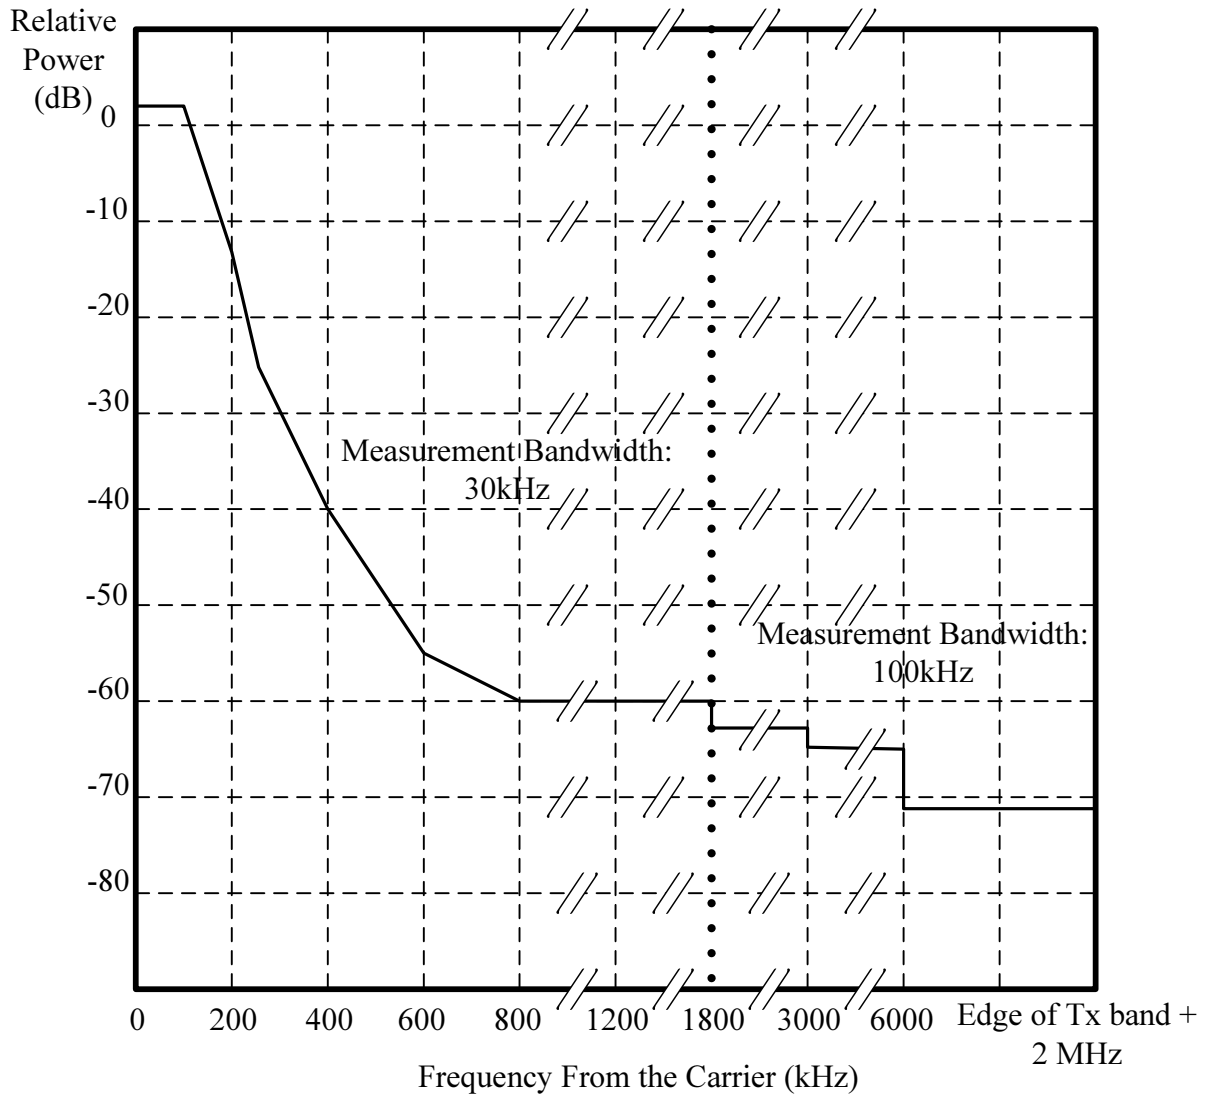


Figure A.1c: GSM 400, GSM 900, GSM 850 and GSM 700 MS spectrum due to QPSK, 16- QAM and 32- QAM modulation with higher symbol rate using wide pulse shaping filter


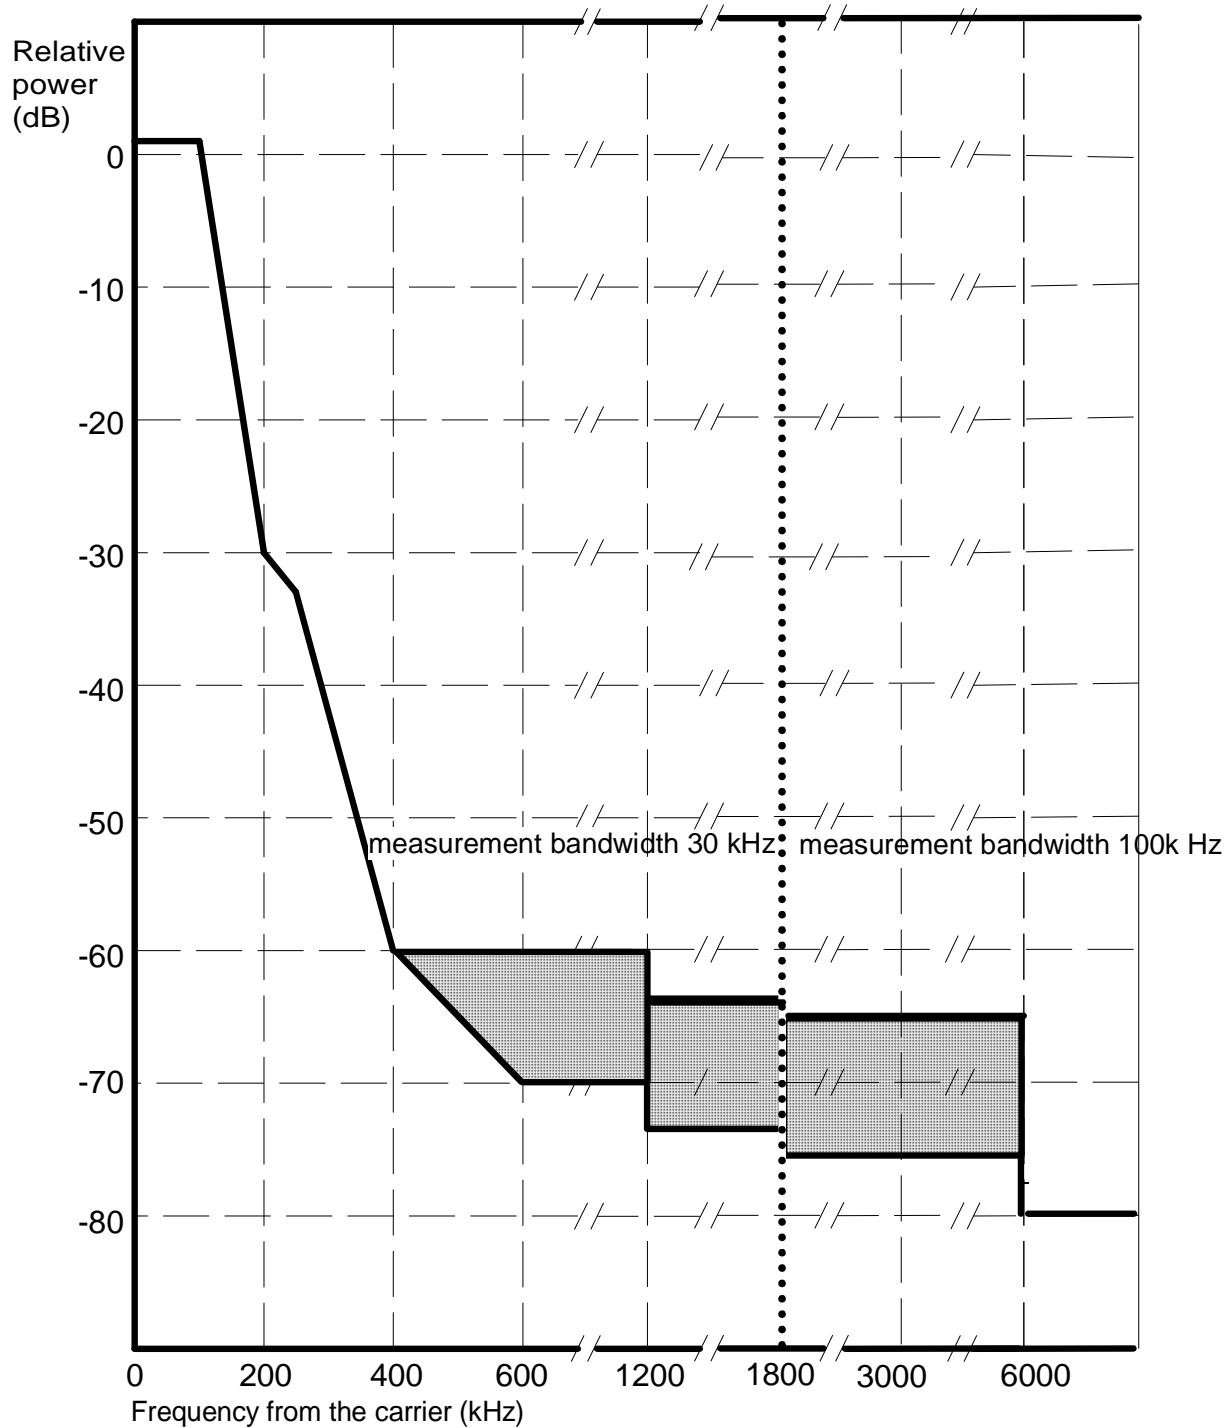


Figure A.2a: GSM 400, GSM 900, GSM 850, MXM 850, GSM 700, DCS 1800, PCS 1900 and MXM 1900 BTS spectrum due to GMSK modulation

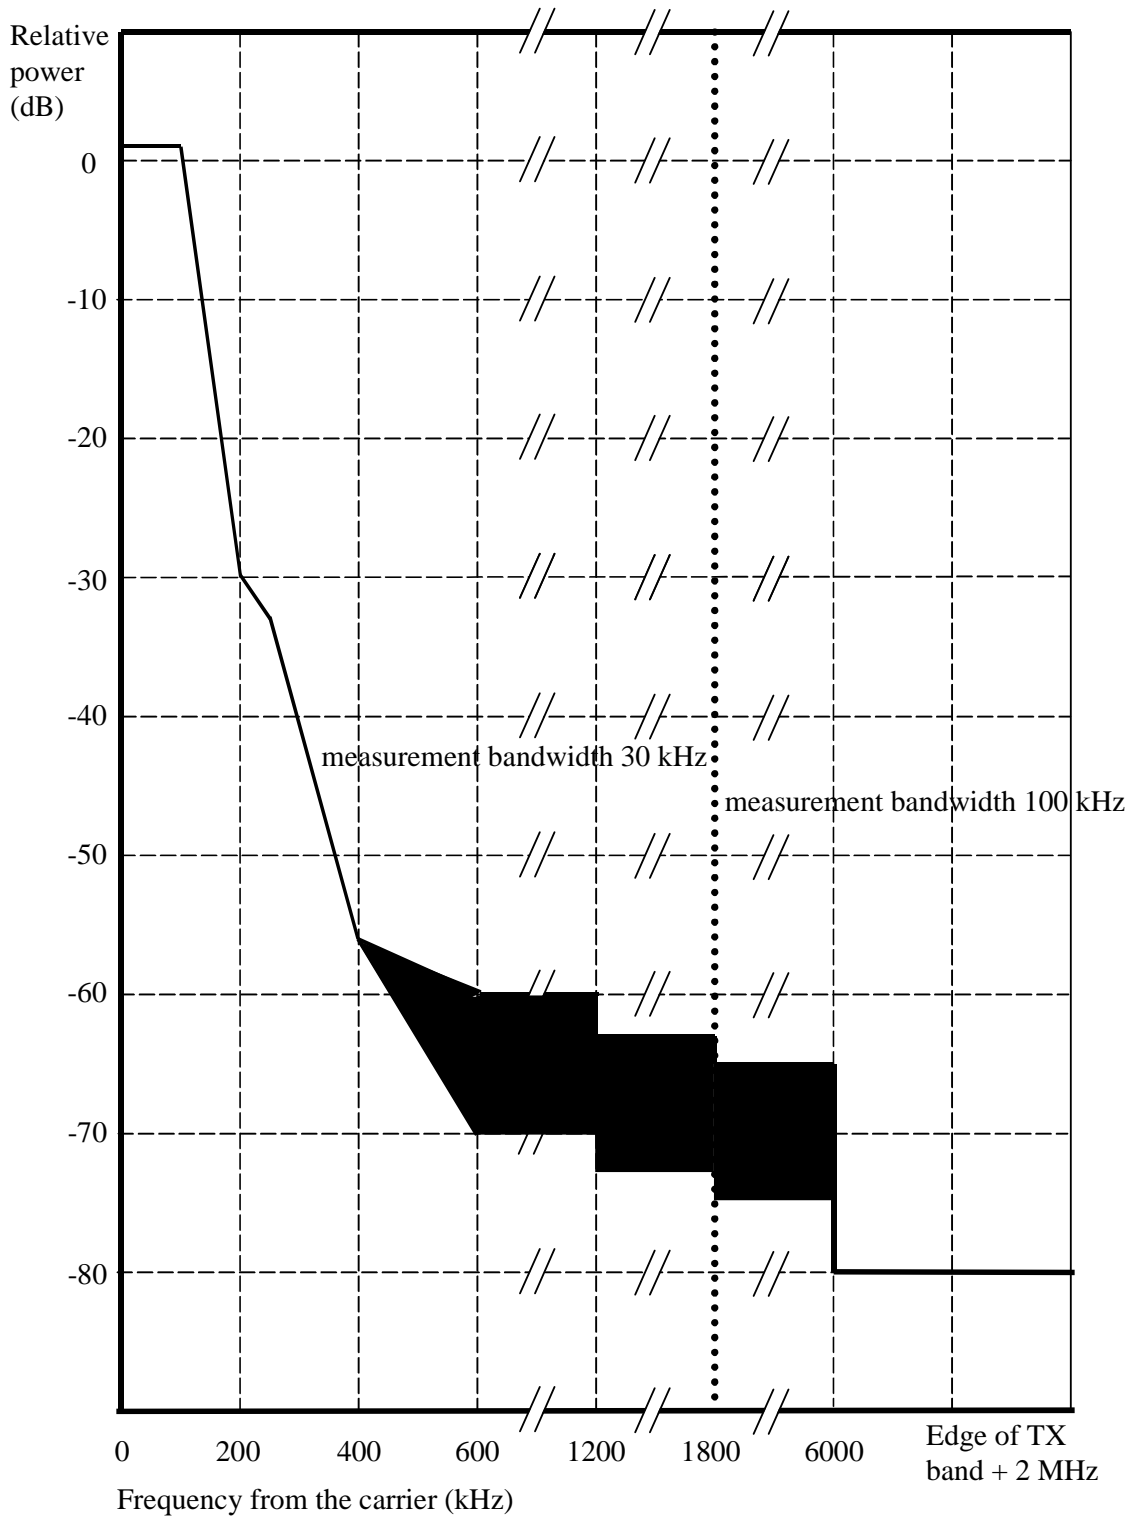

**Figure A.2b: GSM 400, GSM 900, GSM 850, MXM 850, GSM 700, DCS 1800, PCS 1900 and MXM 1900 BTS spectrum due to 8-PSK, AQPSK, 16-QAM and 32-QAM modulation with normal symbol rate and QPSK, 16-QAM and 32-QAM modulation with higher symbol rate using narrow BW pulse shaping filter**

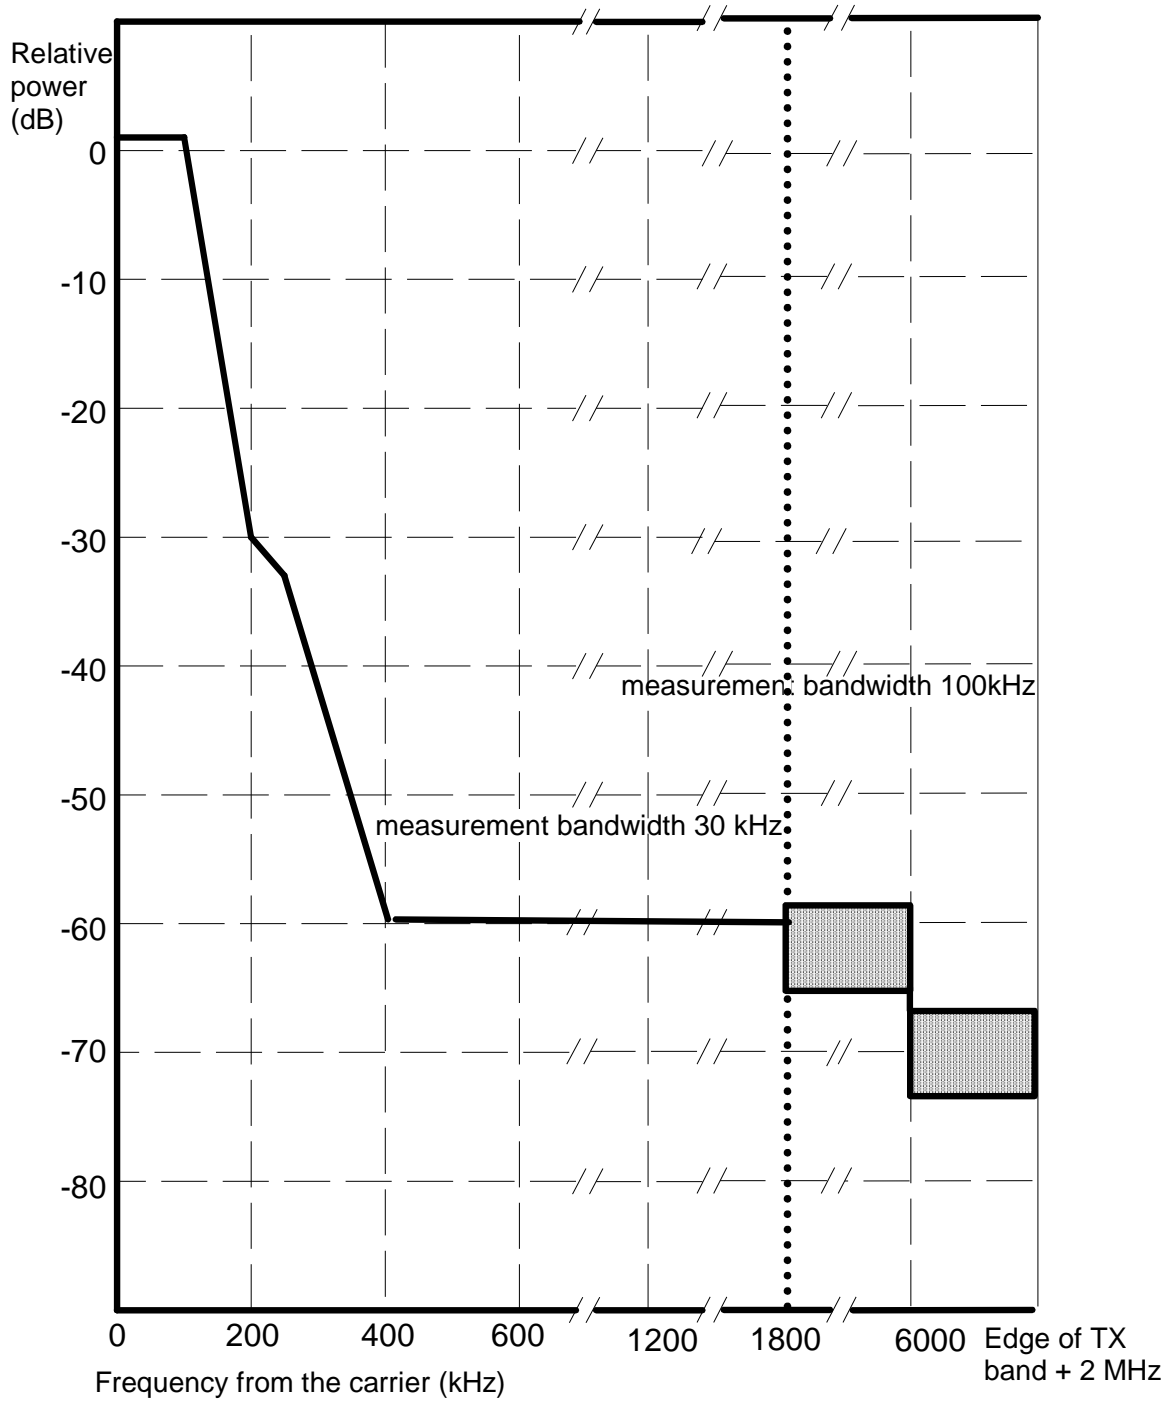


Figure A.3a: DCS 1 800 and PCS 1900 MS spectrum due to GMSK modulation



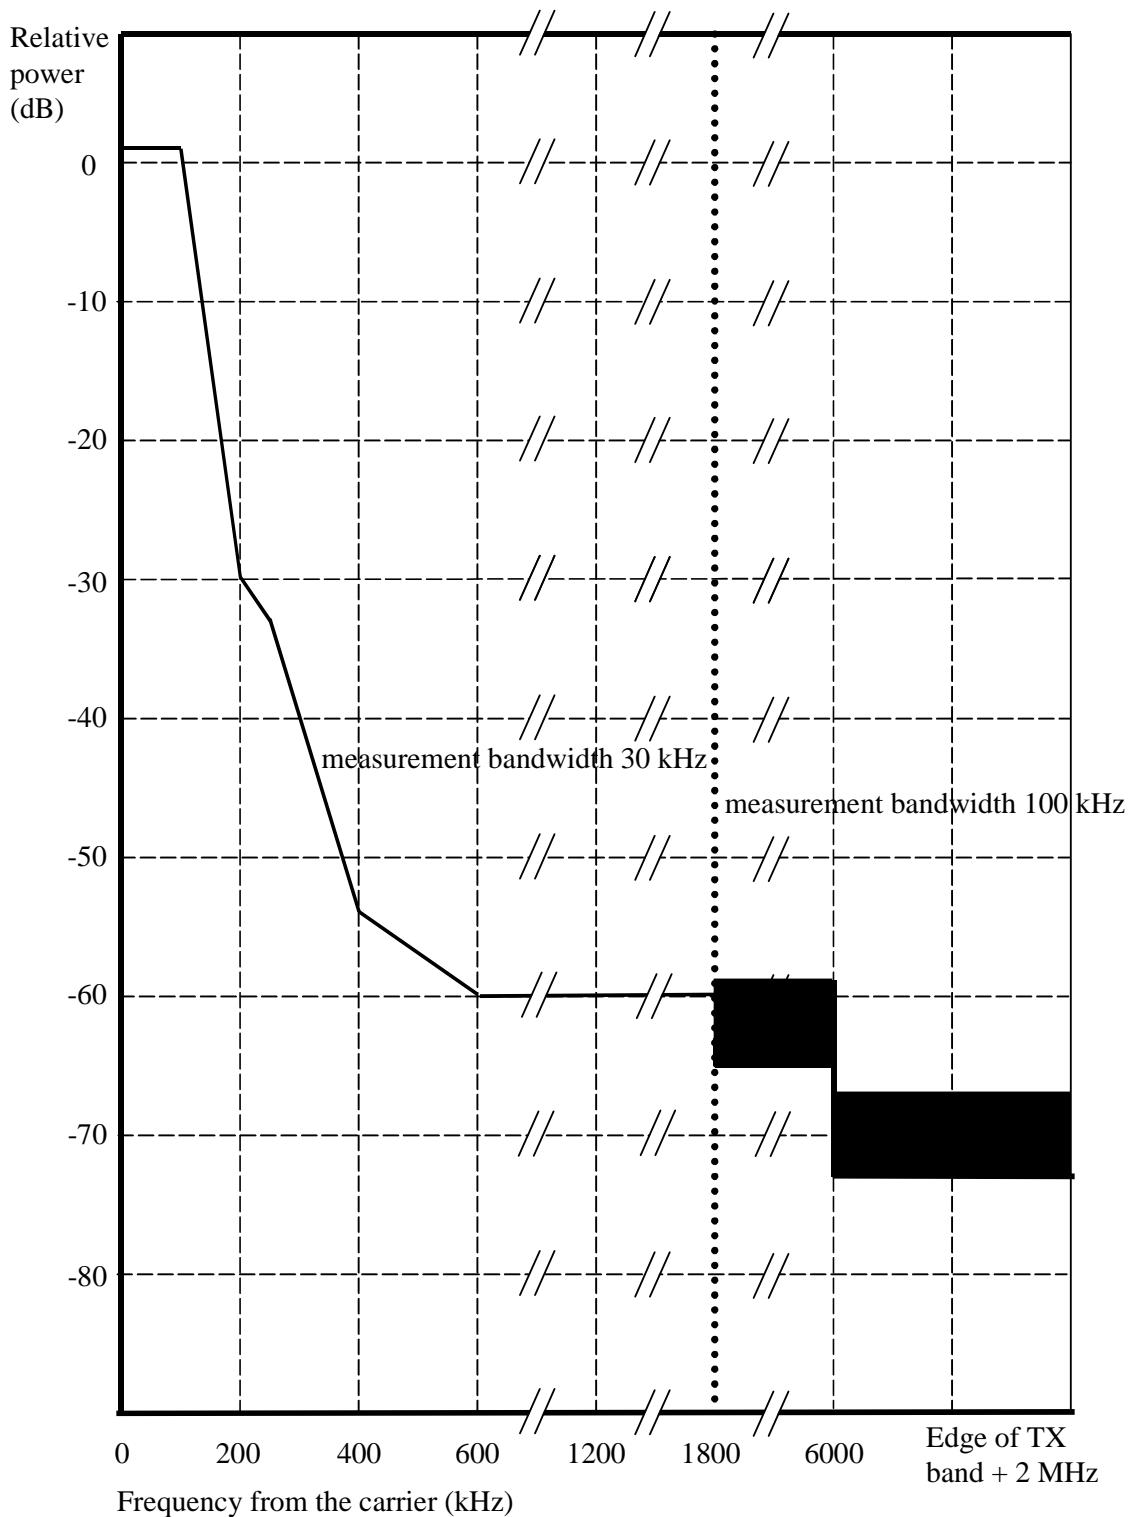


Figure A.3b: DCS 1 800 and PCS 1900 MS spectrum due to 8-PSK and 16-QAM modulation with normal symbol rate and QPSK, 16-QAM and 32-QAM with higher symbol rate modulation using narrow BW pulse shaping filter

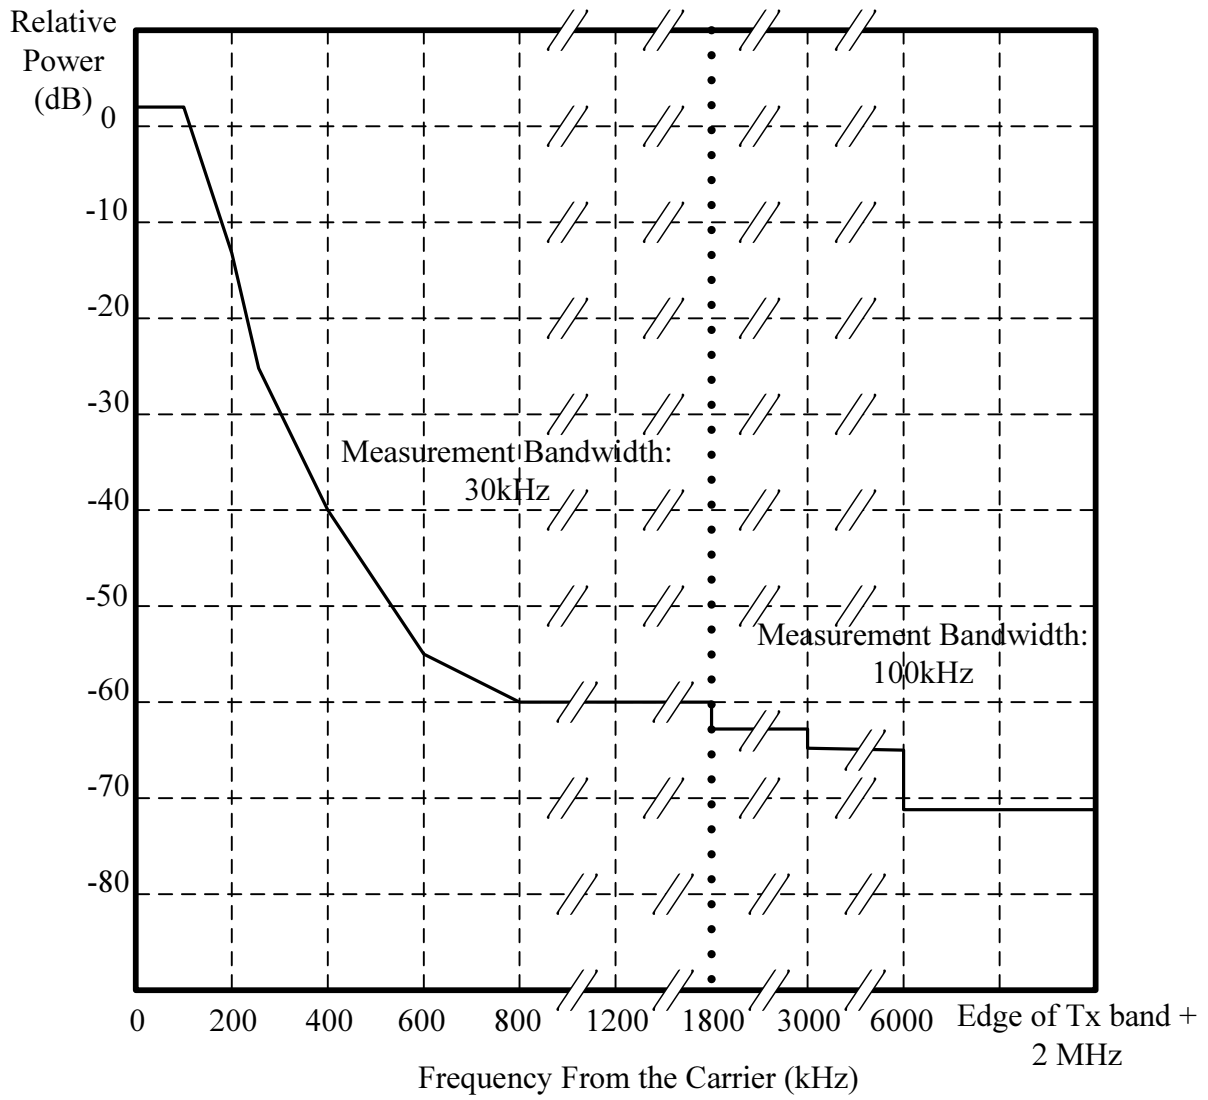


Figure A.3c: DCS 1 800 and PCS 1900 MS spectrum due to QPSK, 16-QAM and 32-QAM modulation with higher symbol rate using using wide pulse shaping filter

# Annex B (normative): Transmitted power level versus time

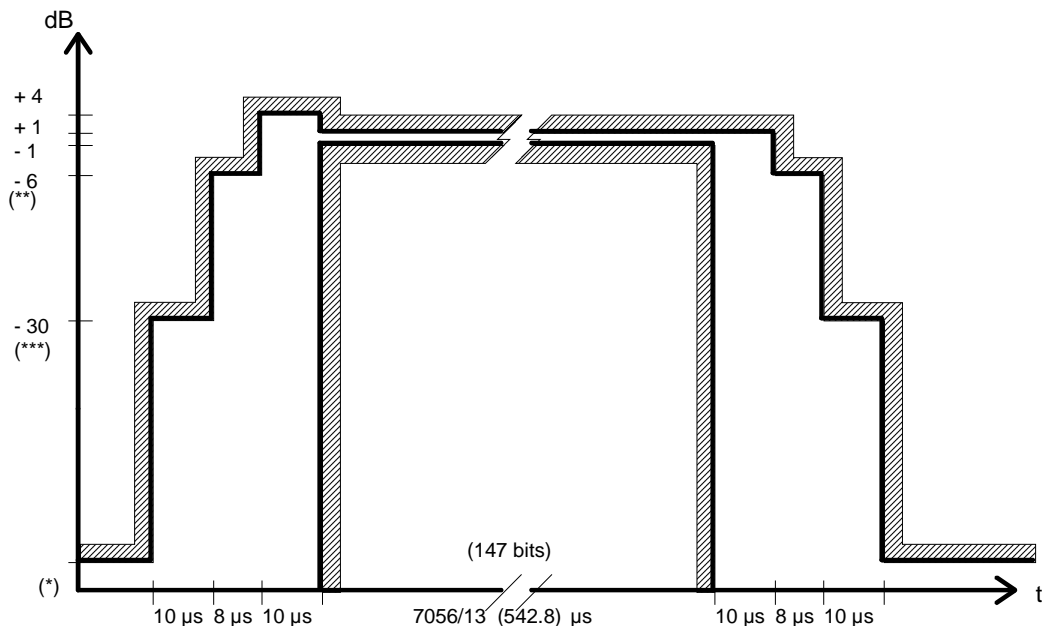


Figure B.1: Time mask for normal duration bursts (NB, FB, dB and SB) at GMSK modulation

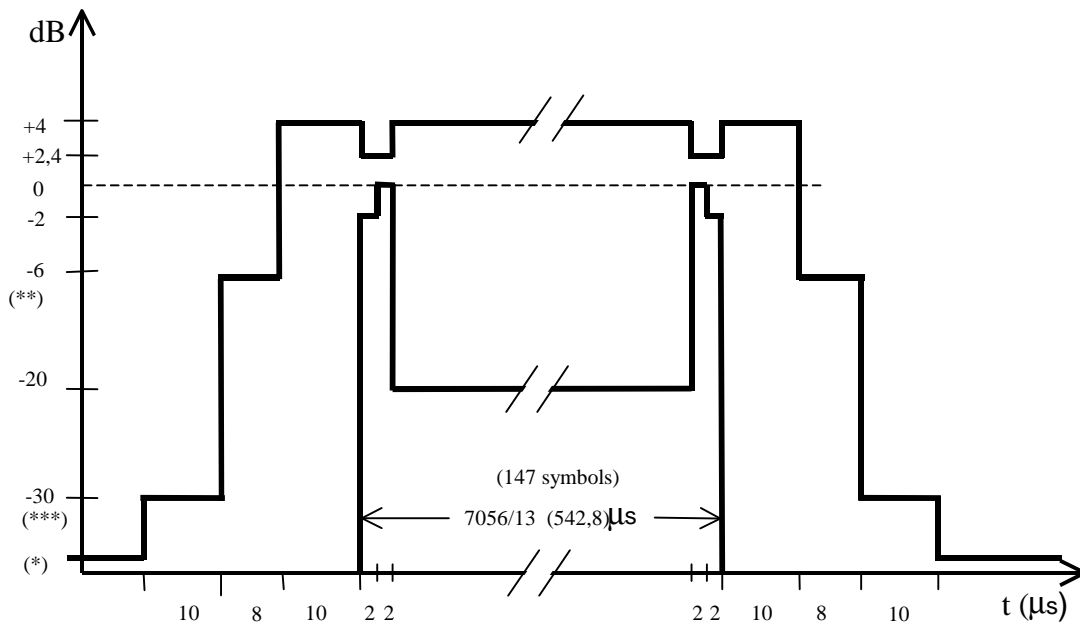


Figure B.2: Time mask for normal duration bursts (NB) at 8-PSK modulation


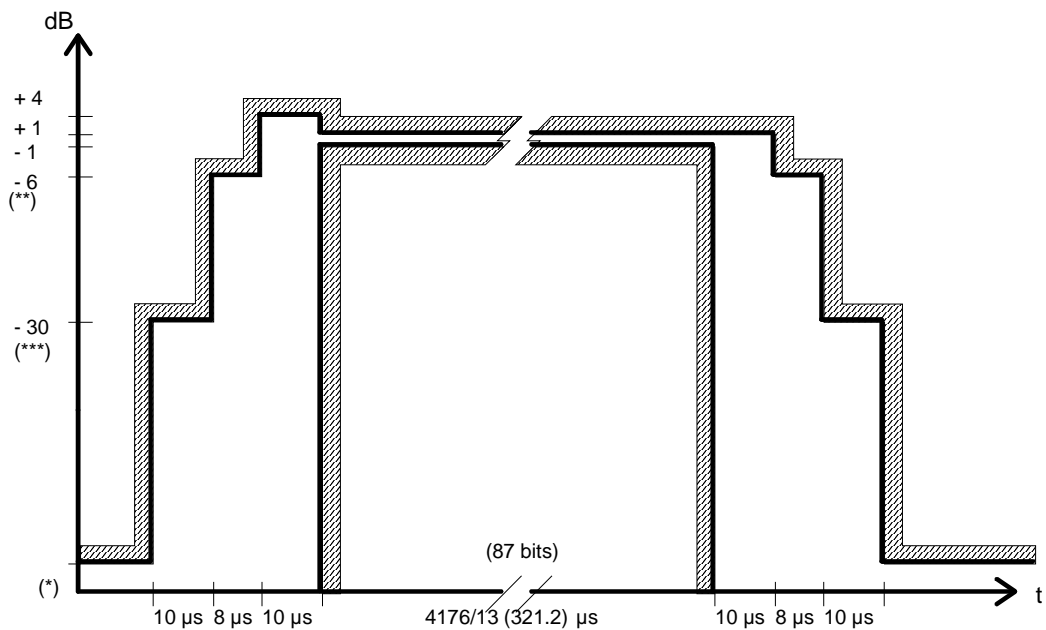


Figure B.3: Time mask for access bursts (AB)

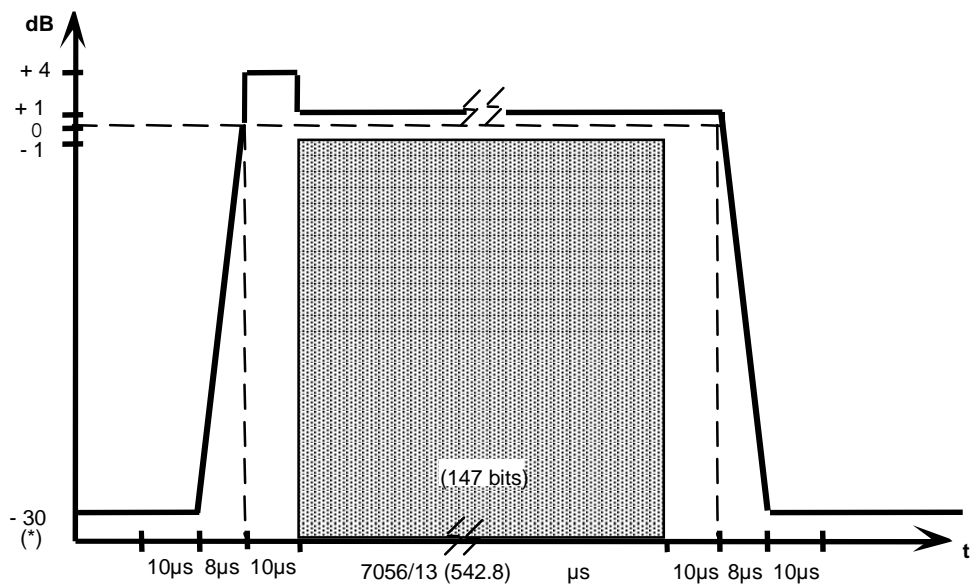

Dashed Lines indicate reference points only

Figure B.4: PCS 1900 and MXM 1900 BTS Transmitter Time Mask at GSM modulation

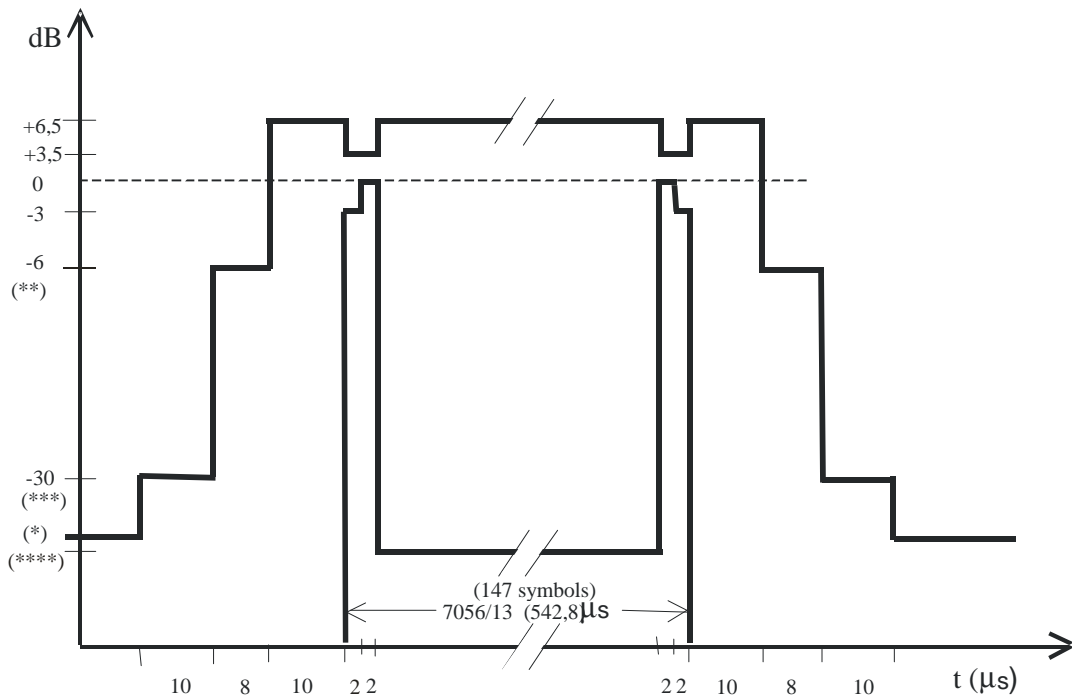


Figure B.5: Time mask for normal duration bursts (NB) at 16-QAM and 32-QAM modulation at normal symbol rate



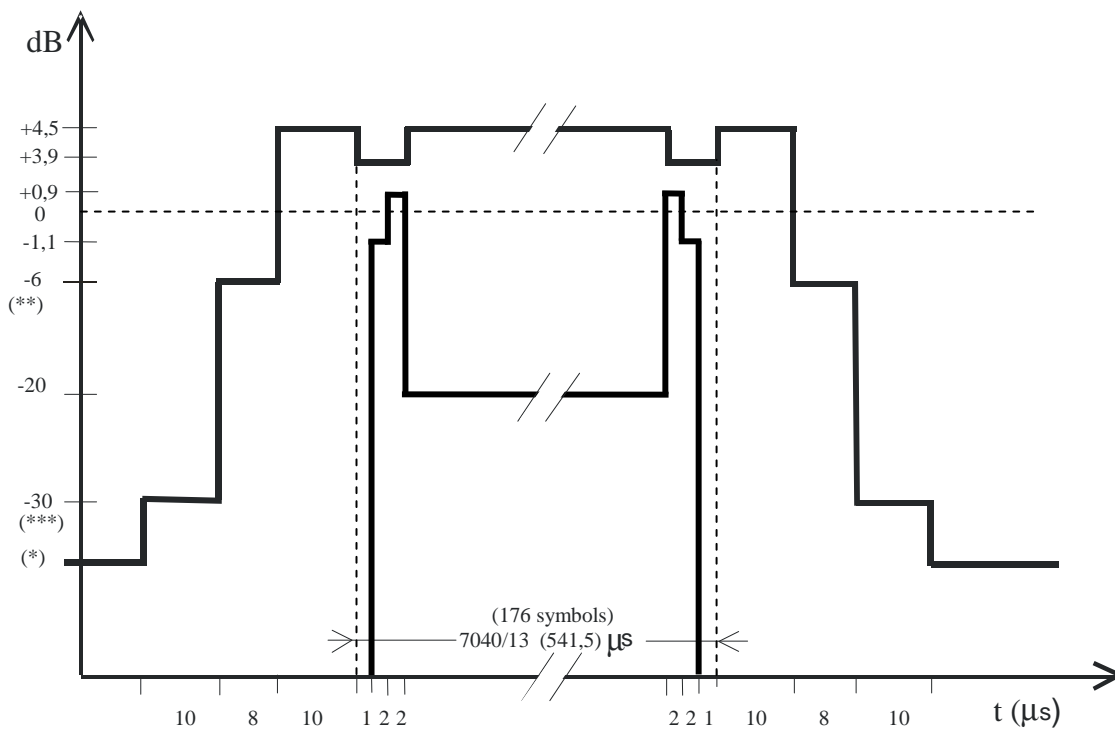


Figure B.6: Time mask for higher symbol rate bursts (HB) at QPSK modulation with narrow pulse shaping filter

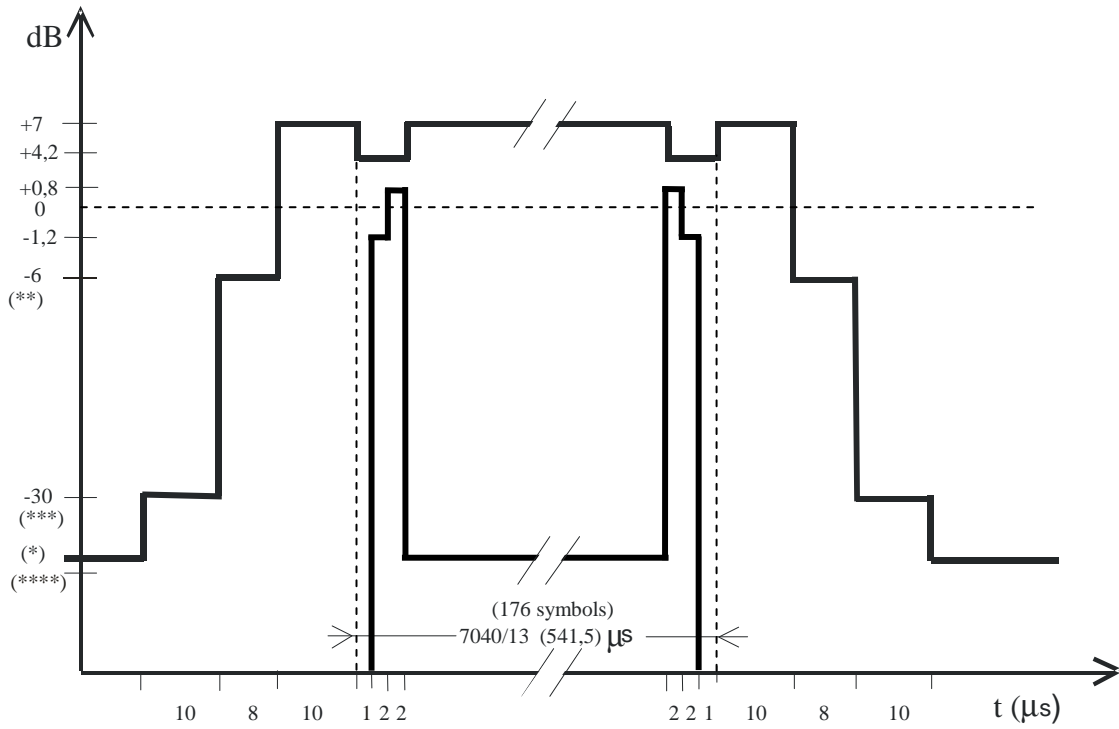

**B.7: Time mask for higher symbol rate bursts (HB) at 16-QAM and 32-QAM modulation with narrow pulse shaping filter**

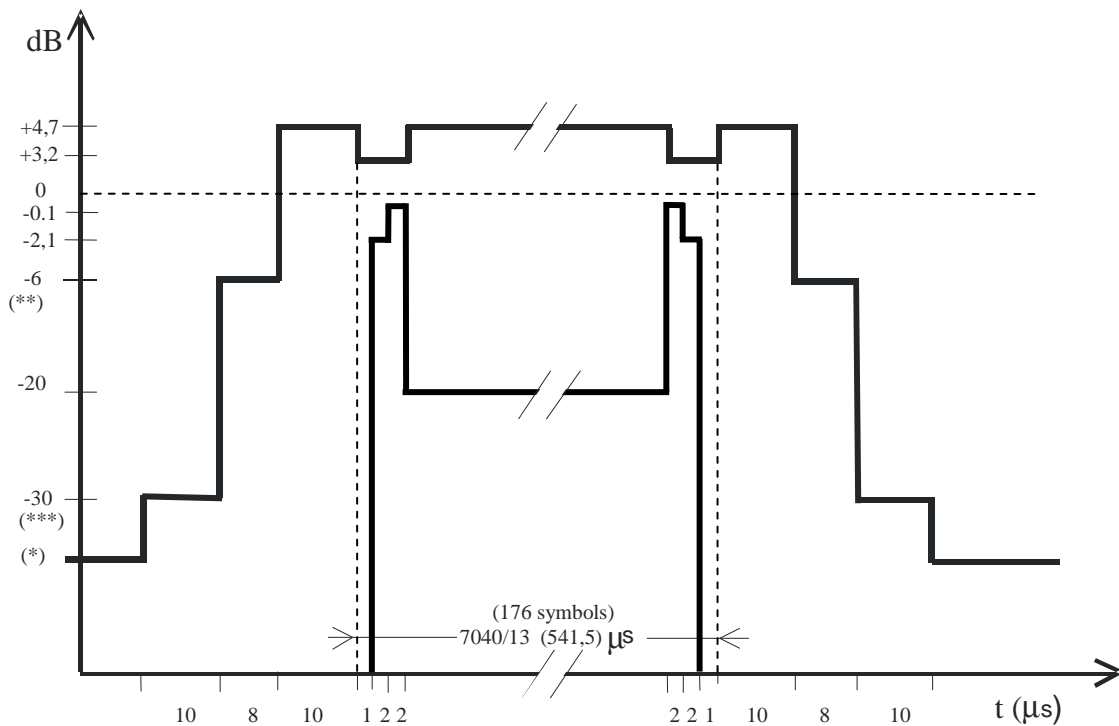

**Figure B.8: Time mask for higher symbol rate bursts (HB) at QPSK modulation with wide pulse shaping filter**

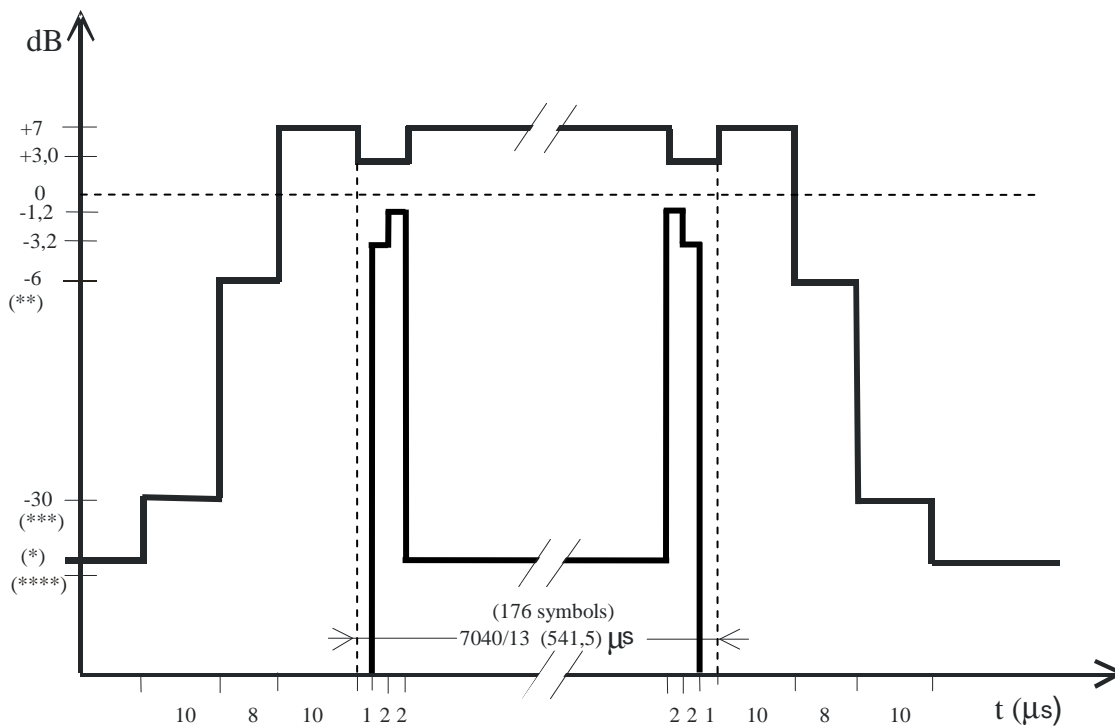


Figure B.9: Time mask for higher symbol rate bursts (HB) at 16-QAM and 32-QAM modulation with wide pulse shaping filter

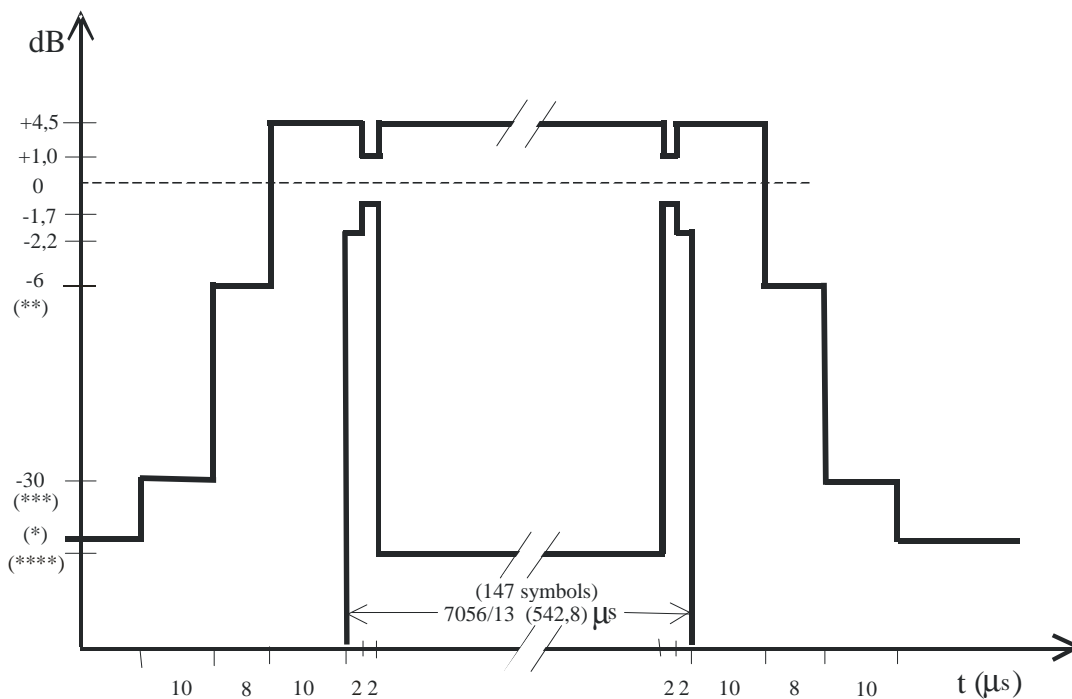


Figure B.10: Time mask for AQPSK modulation (Note: the above time mask is applicable to all values of  $\alpha$  (see 3GPP TS 45.004) supported by the BTS)

- (\*) For GSM 400, GSM 850, GSM 700 and GSM 900 MS : see 4.5.2.  
 For DCS 1 800 and PCS 1900 MS : -48 dBc or -48 dBm, whichever is the higher.  
 For all BTS : no requirement below -30 dBc (see 4.5.1).
- (\*\*) For GSM 400, GSM 900, GSM 700 and GSM 850 MS : -4 dBc for power control level 16;  
 -2 dBc for power control level 17;  
 -1 dBc for power control levels 18 and 19-31.  
 For DCS 1 800 MS : -4 dBc for power control level 11,  
 -2 dBc for power control level 12,  
 -1 dBc for power control levels 13, 14 and 15-28.  
 For PCS 1900 MS : -4 dBc for power control level 11,  
 -2 dBc for power control level 12,  
 -1 dBc for power control levels 13, 14 and 15.
- (\*\*\*) For GSM 400, GSM 900, GSM 700 and GSM 850 MS : -30 dBc or -17 dBm, whichever is the higher.
- For DCS 1 800 and PCS 1900 MS : -30 dBc or -20 dBm, whichever is the higher.
- (\*\*\*\*) For all BTS and all MS : Lower limit within the useful part of burst is seen as undefined for 16-QAM and 32-QAM.



---

## Annex C (normative): Propagation conditions

### C.1 Simple wideband propagation model

Radio propagation in the mobile radio environment is described by highly dispersive multipath caused by reflection and scattering. The paths between base station and MS may be considered to consist of large reflectors and/or scatterers some distance to the MS, giving rise to a number of waves that arrive in the vicinity of the MS with random amplitudes and delays.

Close to the MS these paths are further randomized by local reflections or diffractions. Since the MS will be moving, the angle of arrival must also be taken into account, since it affects the doppler shift associated with a wave arriving from a particular direction. Echos of identical delays arise from reflectors located on an ellipse.

The multipath phenomenon may be described in the following way in terms of the time delays and the doppler shifts associated with each delay:

$$z(t) = \iint_{R^2} y(t - T)S(T, f)\exp(2i\pi fT)dfdT$$

where the terms on the right-hand side represent the delayed signals, their amplitudes and doppler spectra.

It has been shown that the criterion for wide sense stationarity is satisfied for distances of about 10 metres. Based on the wide sense stationary uncorrelated scattering (WSSUS) model, the average delay profiles and the doppler spectra are necessary to simulate the radio channel.

In order to allow practical simulation, the different propagation models will be presented here in the following terms:

- 1) a discrete number of taps, each determined by their time delay and their average power;
- 2) the Rayleigh distributed amplitude of each tap, varying according to a doppler spectrum  $S(f)$ .

---

### C.2 Doppler spectrum types

In this clause, we define the two types of doppler spectra which will be used for the modelling of the channel. Throughout this clause the following abbreviations will be used:

- $f_d = v/\lambda$ , represents the maximum doppler shift, with  $v$  (in  $\text{ms}^{-1}$ ) representing the vehicle speed, and  $\lambda$  (in m) the wavelength.

The following types are defined:

- a) CLASS is the classical doppler power spectrum and will be used in all but one case;

$$\text{(CLASS)} \quad S(f) = 1/(\pi f_d (1-(f/f_d)^2)^{0.5}) \quad \text{for } f \in ]-f_d, f_d[;$$

- b) RICE is the sum of a classical doppler spectrum and one direct path, such that the total multipath contribution is equal to that of the direct path. This power spectrum is used for the shortest path of the RA model;

$$\text{(RICE)} \quad S(f) = A_0/(\pi f_d (1-(f/f_d)^2)^{0.5}) + A_1 \delta(f - 0,7 f_d) \quad \text{for } f \in ]-f_d, f_d[.$$

$A_0 = 0,17$  and  $A_1 = 0,83$  for the six tap RA model,  $A_0 = 0,13$  and  $A_1 = 0,87$  for the four tap RA model.

## C.3 Propagation models

In this clause the propagation models that are mentioned in the main body of 3GPP TS 45.005 are defined. As a general principle those models are referred to as NAME<sub>x</sub>, where NAME is the name of the particular model, which is defined thereunder, and x is the vehicle speed (in km/h) which impacts on the definition of  $f_d$  (see clause C.2) and hence on the doppler spectra.

Those models are usually defined by 12 tap settings; however, according to the simulators available it may not be possible to simulate the complete model. Therefore a reduced configuration of 6 taps is also defined in those cases. This reduced configuration may be used in particular for the multipath simulation on an interfering signal. Whenever possible the full configuration should be used. For each model two equivalent alternative tap settings, indicated respectively by (1) and (2) in the appropriate columns, are given.

### C.3.1 Typical case for rural area (RA<sub>x</sub>): (6 tap setting)

| Tap number | Relative time ( $\mu$ s) |     | Average relative power (dB) |       | doppler spectrum |
|------------|--------------------------|-----|-----------------------------|-------|------------------|
|            | (1)                      | (2) | (1)                         | (2)   |                  |
| 1          | 0,0                      | 0,0 | 0,0                         | 0,0   | RICE             |
| 2          | 0,1                      | 0,2 | -4,0                        | -2,0  | CLASS            |
| 3          | 0,2                      | 0,4 | -8,0                        | -10,0 | CLASS            |
| 4          | 0,3                      | 0,6 | -12,0                       | -20,0 | CLASS            |
| 5          | 0,4                      | -   | -16,0                       | -     | CLASS            |
| 6          | 0,5                      | -   | -20,0                       | -     | CLASS            |

### C.3.2 Typical case for hilly terrain (HT<sub>x</sub>): (12 tap setting)

| Tap number | Relative time ( $\mu$ s) |      | Average relative power (dB) |       | doppler spectrum |
|------------|--------------------------|------|-----------------------------|-------|------------------|
|            | (1)                      | (2)  | (1)                         | (2)   |                  |
| 1          | 0,0                      | 0,0  | -10,0                       | -10,0 | CLASS            |
| 2          | 0,1                      | 0,2  | -8,0                        | -8,0  | CLASS            |
| 3          | 0,3                      | 0,4  | -6,0                        | -6,0  | CLASS            |
| 4          | 0,5                      | 0,6  | -4,0                        | -4,0  | CLASS            |
| 5          | 0,7                      | 0,8  | 0,0                         | 0,0   | CLASS            |
| 6          | 1,0                      | 2,0  | 0,0                         | 0,0   | CLASS            |
| 7          | 1,3                      | 2,4  | -4,0                        | -4,0  | CLASS            |
| 8          | 15,0                     | 15,0 | -8,0                        | -8,0  | CLASS            |
| 9          | 15,2                     | 15,2 | -9,0                        | -9,0  | CLASS            |
| 10         | 15,7                     | 15,8 | -10,0                       | -10,0 | CLASS            |
| 11         | 17,2                     | 17,2 | -12,0                       | -12,0 | CLASS            |
| 12         | 20,0                     | 20,0 | -14,0                       | -14,0 | CLASS            |

The reduced setting (6 taps) is defined thereunder.

| Tap number | Relative time ( $\mu$ s) |      | Average relative power (dB) |       | doppler spectrum |
|------------|--------------------------|------|-----------------------------|-------|------------------|
|            | (1)                      | (2)  | (1)                         | (2)   |                  |
| 1          | 0,0                      | 0,0  | 0,0                         | 0,0   | CLASS            |
| 2          | 0,1                      | 0,2  | -1,5                        | -2,0  | CLASS            |
| 3          | 0,3                      | 0,4  | -4,5                        | -4,0  | CLASS            |
| 4          | 0,5                      | 0,6  | -7,5                        | -7,0  | CLASS            |
| 5          | 15,0                     | 15,0 | -8,0                        | -6,0  | CLASS            |
| 6          | 17,2                     | 17,2 | -17,7                       | -12,0 | CLASS            |

### C.3.3 Typical case for urban area (TUx): (12 tap setting)

| Tap number | Relative time ( $\mu\text{s}$ ) |     | Average relative power (dB) |       | doppler spectrum |
|------------|---------------------------------|-----|-----------------------------|-------|------------------|
|            | (1)                             | (2) | (1)                         | (2)   |                  |
| 1          | 0,0                             | 0,0 | -4,0                        | -4,0  | CLASS            |
| 2          | 0,1                             | 0,2 | -3,0                        | -3,0  | CLASS            |
| 3          | 0,3                             | 0,4 | 0,0                         | 0,0   | CLASS            |
| 4          | 0,5                             | 0,6 | -2,6                        | -2,0  | CLASS            |
| 5          | 0,8                             | 0,8 | -3,0                        | -3,0  | CLASS            |
| 6          | 1,1                             | 1,2 | -5,0                        | -5,0  | CLASS            |
| 7          | 1,3                             | 1,4 | -7,0                        | -7,0  | CLASS            |
| 8          | 1,7                             | 1,8 | -5,0                        | -5,0  | CLASS            |
| 9          | 2,3                             | 2,4 | -6,5                        | -6,0  | CLASS            |
| 10         | 3,1                             | 3,0 | -8,6                        | -9,0  | CLASS            |
| 11         | 3,2                             | 3,2 | -11,0                       | -11,0 | CLASS            |
| 12         | 5,0                             | 5,0 | -10,0                       | -10,0 | CLASS            |

The reduced TUx setting (6 taps) is defined thereunder.

| Tap number | Relative time ( $\mu\text{s}$ ) |     | Average relative power (dB) |       | doppler spectrum |
|------------|---------------------------------|-----|-----------------------------|-------|------------------|
|            | (1)                             | (2) | (1)                         | (2)   |                  |
| 1          | 0,0                             | 0,0 | -3,0                        | -3,0  | CLASS            |
| 2          | 0,2                             | 0,2 | 0,0                         | 0,0   | CLASS            |
| 3          | 0,5                             | 0,6 | -2,0                        | -2,0  | CLASS            |
| 4          | 1,6                             | 1,6 | -6,0                        | -6,0  | CLASS            |
| 5          | 2,3                             | 2,4 | -8,0                        | -8,0  | CLASS            |
| 6          | 5,0                             | 5,0 | -10,0                       | -10,0 | CLASS            |

### C.3.4 Profile for equalization test (EQx): (6 tap setting)

| Tap number | Relative time ( $\mu\text{s}$ ) | Average relative power (dB) | doppler spectrum |
|------------|---------------------------------|-----------------------------|------------------|
| 1          | 0,0                             | 0,0                         | CLASS            |
| 2          | 3,2                             | 0,0                         | CLASS            |
| 3          | 6,4                             | 0,0                         | CLASS            |
| 4          | 9,6                             | 0,0                         | CLASS            |
| 5          | 12,8                            | 0,0                         | CLASS            |
| 6          | 16,0                            | 0,0                         | CLASS            |

### C.3.5 Typical case for very small cells (Tlx): (2 tap setting)

| Tap number | Relative time ( $\mu\text{s}$ ) | Average relative power (dB) | Doppler spectrum |
|------------|---------------------------------|-----------------------------|------------------|
| 1          | 0.0                             | 0.0                         | CLASS            |
| 2          | 0.4                             | 0.0                         | CLASS            |

---

## Annex D (normative): Environmental conditions

### D.1 General

This normative annex specifies the environmental requirements for MS and BSS equipment, Within these limits the requirements of the GSM specifications shall be fulfilled.

---

### D.2 Environmental requirements for the MSs

The requirements in this clause apply to all types of MSs.

#### D.2.1 Temperature (GSM 400, GSM 900 and DCS 1 800)

The MS shall fulfil all the requirements in the full temperature range of:

+15°C - +35°C for normal conditions (with relative humidity of 25 % to 75 %);

-10°C - +55°C for DCS 1 800 MS and small MS units extreme conditions  
(see IEC publications 68-2-1 and 68-2-2);

-20°C - +55°C for other units extreme conditions (see IEC publications 68-2-1 and 68-2-2).

Outside this temperature range the MS, if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the MS exceed the transmitted levels as defined in 3GPP TS 45.005 for extreme operation.

##### D.2.1.1 Environmental Conditions (PCS 1 900, GSM 850 and GSM 700)

Normal environmental conditions are defined as any combination of the following:

|                   |                   |
|-------------------|-------------------|
| Temperature Range | +15°C to +35°C    |
| Relative Humidity | 35% to 75%        |
| Air Pressure      | 86 kPa to 106 kPa |

Extreme operating temperature ranges depend on the specific manufacturer and application, but typical ranges are as follows:

MS Temperature Range: -10°C to +55°C

#### D.2.2 Voltage

The MS shall fulfil all the requirements in the full voltage range, i.e. the voltage range between the extreme voltages.

The manufacturer shall declare the lower and higher extreme voltages and the approximate shut-down voltage. For the equipment that can be operated from one or more of the power sources listed below, the lower extreme voltage shall not be higher, and the higher extreme voltage shall not be lower than that specified below.

| Power source                | Lower extreme voltage | Higher extreme voltage | Normal cond. voltage |
|-----------------------------|-----------------------|------------------------|----------------------|
| AC mains                    | 0,9 * nominal         | 1,1 * nominal          | nominal              |
| Regulated lead acid battery | 0,9 * nominal         | 1,3 * nominal          | 1,1 * nominal        |
| Non regulated batteries:    |                       |                        |                      |
| Leclanché                   | 0,85 * nominal        | nominal                | nominal              |
| lithium                     | 0,95 * nominal        | 1,1 * nominal          | 1,1 * nominal        |
| mercury/nickel cadmium      | 0,9 * nominal         | nominal                | nominal              |

Outside this voltage range the MS, if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the MS exceed the transmitted levels as defined in 3GPP TS 45.005 for extreme operation. In particular, the MS shall inhibit all RF transmissions when the power supply voltage is below the manufacturer declared shut-down voltage.

## D.2.3 Vibration (GSM 400, GSM 900 and DCS 1 800)

The MS shall fulfil all the requirements when vibrated at the following frequency/amplitudes:

### Frequency ASD (Acceleration Spectral Density) random vibration

5 Hz to 20 Hz 0,96 m<sup>2</sup>/s<sup>3</sup>

20 Hz to 500 Hz 0,96 m<sup>2</sup>/s<sup>3</sup> at 20 Hz, thereafter -3 dB/Octave

(see IEC publication 68-2-36)

Outside the specified frequency range the MS, if powered on, shall not make ineffective use of the radio frequency spectrum. In no case shall the MS exceed the transmitted levels as defined in 3GPP TS 45.005 for extreme operation.

### D.2.3.1 Vibration (PCS 1 900, GSM 850 and GSM 700)

10 – 100 Hz: 3 m<sup>2</sup>/s<sup>3</sup> (0.0132 g<sup>2</sup>/Hz)

100 – 500 Hz: -3dB/Octave

---

## D.3 Environmental requirements for the BSS equipment

This clause applies to both GSM 400, GSM 900 and DCS 1 800 BSS equipment.

The BSS equipment shall fulfil all the requirements in the full range of environmental conditions for the relevant environmental class from the relevant ETSs listed below:

ETS 300 019-1-3: Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment, Part 1-3: Classification of environmental conditions, Stationary use at weather protected locations.

ETS 300 019-1-4: Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment, Part 1-4: Classification of environmental conditions, Stationary use at non-weather protected locations.

The operator can specify the range of environmental conditions according to his needs.

Outside the specified range for any of the environmental conditions, the BTS shall not make ineffective use of the radio frequency spectrum. In no case shall the BTS exceed the transmitted levels as defined in 3GPP TS 45.005 for extreme operation.

### D.3.1 Environmental requirements for the BSS equipment

The following clause applies to the GSM 700, GSM 850, PCS 1 900, MXM 850, MXM 1900 BSS.

Normal environmental conditions are defined as any combination of the following:

|                   |                   |
|-------------------|-------------------|
| Temperature Range | +15°C to +35°C    |
| Relative Humidity | 35% to 75%        |
| Air Pressure      | 86 kPa to 106 kPa |

Extreme operating temperature ranges depend on the specific manufacturer and application, but typical ranges are as follows:

|                                |                |
|--------------------------------|----------------|
| BSS Indoor Temperature Range:  | -5°C to +50°C  |
| BSS Outdoor Temperature Range: | -40°C to +50°C |

---

# Annex E (normative): Repeater characteristics

## E.1 Introduction

A repeater receives amplifies and transmits simultaneously both the radiated RF carrier in the downlink direction (from the base station to the mobile area) and in the uplink direction (from the mobile to the base station).

This annex details the minimum radio frequency performance of repeaters operating in frequency bands defined in clause 2 of this document. The environmental conditions for repeaters are specified in annex D.3, of 3GPP TS 45.005. The precise measurement methods for repeaters are specified in 3GPP TS 51.026 [35]. Further application dependant requirements on repeaters need to be considered by operators before they are deployed. These network planning aspects of repeaters are covered in 3GPP TR 43.030.

The following requirements apply to the uplink and downlink directions.

In clauses 2 and 3 the maximum output power per carrier is the value declared by the manufacturer.

BTS and MS transmit bands are as defined in clause 2 of 3GPP TS 45.005.

---

## E.2 Spurious emissions

At maximum repeater gain, with or without a continuous static sine wave input signal in the operating band of the repeater, at a level which produces the manufacturers maximum rated power output, the following requirements shall be met.

The average power of any single spurious measured in a 3 kHz bandwidth shall be no greater than:

- 250 nW (-36 dBm) in the relevant MS and BTS transmit frequency bands for a repeater operating in transmit frequency bands below 1 GHz at offsets of > 100 kHz from the carrier.
- 1  $\mu$ W (-30 dBm) in the relevant MS and BTS transmit frequency bands for a repeater operating in transmit frequency bands above 1 GHz at offsets of > 100 kHz from the carrier.

Outside of the relevant transmit bands the power measured in the bandwidths according to table E.2-1, shall be no greater than:

- 250 nW (-36 dBm) in the frequency band 9 kHz to 1 GHz;
- 1  $\mu$ W (-30 dBm) in the frequency band 1 GHz to 12,75 GHz.

**Table E.2-1 Measurement bandwidth for spurious emissions**

| Band  | Frequency offset                                  | Measurement bandwidth |
|---|---|-----------------------|
| 100 kHz - 50 MHz  | -   | 10 kHz                |
| 50 MHz - 500 MHz outside the relevant BTS transmit band or MS transmit band | (offset from edge of the relevant transmit band)- |                       |
|   | > 0 MHz   | 10 kHz                |
|   | ≥ 2 MHz   | 30 kHz                |
|   | ≥ 5 MHz   | 100 kHz               |
| above 500 MHz outside the relevant BTS Transmit band or MS transmit band    | (offset from edge of the relevant above band)     |                       |
|   | > 0 MHz   | 10 kHz                |
|   | ≥ 2 MHz   | 30 kHz                |
|   | ≥ 5 MHz   | 100 kHz               |
|   | ≥ 10 MHz  | 300 kHz               |
|   | ≥ 20 MHz  | 1 MHz                 |
|   | ≥ 30 MHz  | 3 MHz                 |

The requirement applies to all ports of the repeater.

NOTE: For radiated spurious emissions, the specifications currently only apply to the frequency band 30 MHz to 4 GHz. The specification and method of measurement outside this band are under consideration.

---

## E.3 Intermodulation products

At maximum repeater gain, with two continuous static sine wave input signals in the operating band of the repeater, at equal levels which produce the maximum rated power output per carrier, the average power of any intermodulation products measured in a 3 kHz bandwidth shall be no greater than:

- 250 nW (-36 dBm) in the frequency band 9 kHz to 1 GHz;
- 1 μW (-30 dBm) in the frequency band 1 GHz to 12,75 GHz.

When the two input signals are simultaneously increased by 10 dB each, the requirements shall still be met.

The requirement applies to all ports of the repeater.

---

## E.4 Out of band gain

The following requirements apply at all frequencies from 9 kHz to 12.75 GHz excluding the relevant transmit bands.

The net out of band gain in both directions through the repeater shall be less than +50 dB at 400 kHz, +40 dB at 600 kHz, +35 dB at 1 MHz and +25 dB at 5 MHz offset and greater from the edges of the BTS and MS transmit bands.

In special circumstances additional filtering may be required out of band and reference should be made to 3GPP TR 43.030.

---

## E.5 Frequency error and modulation accuracy

### E.5.1 Frequency error

This clause applies only to repeater systems using frequency shift.



The average frequency deviation of the output signal with respect to the input signal of the repeater system shall not be more than 0,1 ppm. The specified value applies to a complete repeater system signal path. Consequently a single repeater unit is limited to an average frequency deviation of not more than 0.05 ppm with respect to its wanted output frequency.

## E.5.2 Modulation accuracy at GMSK modulation

This clause applies only to repeater systems using frequency shift.

For a complete repeater system operating at the nominal output power as specified by the manufacturer shall the increase in phase error of a GSM input signal, which meets the phase error requirements of subclause 4.6, not exceed the values in subclause 4.6 by 2 degrees RMS and by 8 degrees peak. For a single repeater unit operating at the nominal output power as specified by the manufacturer shall the increase in phase error of a GSM input signal, which meets the phase error requirements of subclause 4.6, not exceed the values in subclause 4.6 by 1.1 degrees RMS and by 4.5 degrees peak.

## E.5.3 Modulation accuracy at 8-PSK, 16-QAM, 32-QAM, QPSK and AQPSK modulation

This clause applies only to repeater systems supporting 8-PSK, 16-QAM, 32-QAM, QPSK and/or AQPSK.

For a repeater as defined in the first column of the table E.5-1 below and operating at the nominal output power as specified by the manufacturer, the RMS EVM of the output RF signal for an ideal GSM 8-PSK, 16-QAM, 32-QAM, QPSK and AQPSK input signal (if supported) according to subclause 4.6, shall not exceed the requirement as defined in the table below.

**Table E.5-1 EVM requirements for higher order modulations**

|   |                          | Normal symbol rate   |       |        |        | Higher symbol rate |        |        |
|---|--------------------------|----------------------|-------|--------|--------|--------------------|--------|--------|
|   |                          | AQPSK <sup>(1)</sup> | 8-PSK | 16-QAM | 32-QAM | QPSK               | 16-QAM | 32-QAM |
| For a single repeater with no shift in frequency from input to output | under normal conditions  | 4,0%                 | 3,0 % | 4,0 %  | 4,0 %  | 8,0 %              | 5,0 %  | 4,0 %  |
| For a single repeater with no shift in frequency from input to output | under extreme conditions | 5,0%                 | 3,0 % | 5,0 %  | 5,0 %  | 8,0 %              | 5,0 %  | 5,0 %  |
| For a complete repeater system using frequency shift                  | under normal conditions  | 6,0%                 | 11 %  | 5,0 %  | 5,0 %  | 11 %               | 5,0 %  | 6,0 %  |
| For a complete repeater system using frequency shift                  | under extreme conditions | 7,0%                 | 11 %  | 7,0 %  | 7,0 %  | 11 %               | 5,0 %  | 7,0 %  |

E 1: Only for downlink, regardless of SCPIR\_DL value falling in the range defined in 3GPP TS 45.004 Clause 6.2.

NOTE: Repeaters with higher RMS EVM value may be used in systems utilizing 8-PSK, 16-QAM, 32-QAM, QPSK and AQPSK, if all other repeater requirements in this Annex are fulfilled. However, the system performance will be degraded.

In addition the origin offset suppression according to Annex G shall not exceed  $-35$  dBc.

# Annex F (normative): Antenna Feeder Loss Compensator Characteristics (GSM 400, GSM 900 and DCS 1800)

## F.1 Introduction

An Antenna Feeder Loss Compensator (AFLC) is physically connected between the MS and the antenna in a vehicle mounted installation. It amplifies the signal received in the downlink direction and the signal transmitted in the uplink direction, with a gain nominally equal to the loss of the feeder cable. Unless otherwise stated, the requirements defined in this specification apply to the full range of environmental conditions specified for the AFLC (see annex D2 of 3GPP TS 45.005).

This specification details the minimum radio frequency performance of GSM AFLC devices. The environmental conditions for the AFLC are specified in annex D.2 of 3GPP TS 45.005. It also includes informative guidelines on the use and design of the AFLC.

The following requirements apply to AFLC devices intended for use in the GSM 400, GSM 900 and DCS 1 800 frequency bands. For GSM 900, the requirements apply to an AFLC intended for use with a GSM 400 and GSM 900 class 4 MS. For DCS 1 800, the requirements apply to an AFLC intended for use with a DCS 1 800 class 1 MS. For compatibility reasons, a GSM 900 AFLC is required to support the Extended GSM band.

The requirements apply to the AFLC, including all associated feeder and connecting cables. A 50 ohm measurement impedance is assumed.

When referred to in this specification:

- the maximum rated output power for a GSM 400 and GSM 900 AFLC is +33 dBm and for a DCS 1 800 AFLC is +30 dBm;
- a GSM input signal, is a GMSK signal modulated with random data, which meets the performance requirements of 3GPP TS 45.005, for an MS of equivalent output power. The power level specified for the GSM input signal, is the power averaged over the useful part of the burst.

## F.2 Transmitting path

Unless otherwise stated, the requirements in this clause apply at all frequencies in the transmit band 450,4 MHz to 457,6 MHz for a GSM 450 AFLC, at all frequencies in the transmit band 478,8 MHz to 486 MHz for a GSM 480 AFLC, at all frequencies in the transmit band 880 MHz to 915 MHz for a GSM 900 AFLC, and at all frequencies in the transmit band 1 710 MHz to 1 785 MHz, for a DCS 1 800 AFLC. For a multi band AFLC, which supports more than one, the requirements apply in any transmit bands implemented.

### F.2.1 Maximum output power

With a GSM input signal at a level of X dBm, the maximum output power shall be less than a level of Y dBm. The values of X and Y for GSM 400, GSM 900 and DCS 1 800 are given in table F.2-1.

**Table F.2-1: Input and output levels for testing maximum output power**

|   | <b>GSM 400 and GSM 900</b> | <b>DCS 1 800</b> |
|---|----------------------------|------------------|
| X | +39 dBm                    | +36 dBm          |
| Y | +35 dBm                    | +32 dBm          |

## F.2.2 Gain

With a GSM input signal, at a level which produces the maximum rated output power, the AFLC gain shall be 0 dB with a tolerance of  $\pm 1$  dB, over the relevant transmit band.

For a GSM 400 and GSM 900 AFLC, with the input level reduced in 14 steps of 2 dB, the net path gain over the relevant transmit band shall be 0 dB, with a tolerance of  $\pm 1$  dB, for the first 10 reduced input levels and  $\pm 2$  dB for the 4 lowest input levels.

For a DCS 1 800 AFLC, with the input level reduced in 15 steps of 2 dB, the net path gain over the relevant transmit band shall be 0 dB, with a tolerance of  $\pm 1$  dB, for the first 13 reduced input levels and  $\pm 2$  dB for the 2 lowest input levels.

In frequency bands which are not supported, the gain shall be no greater than the maximum value in the relevant transmit band.

## F.2.3 Burst transmission characteristics

With a GSM input signal, the shape of the GSM AFLC output signal related to this input signal shall meet the tolerances of tables F.2-2a and F.2-3. With a DCS input signal, the shape of the DCS AFLC shall meet the tolerances of tables F.2-2b and F.2-3.

NOTE: The tolerances on the output signal correspond to the time mask of 3GPP TS 45.005, with the input signal in the middle of the tolerance field.

**Table F.2-2a: Timing tolerances between input and output signals for a GSM AFLC**

| Input signal level                        | Input signal time | Output signal level | Tolerances - output signal time |
|---|-------------------|---------------------|---------------------------------|
| -59 dBc (or -54 dBm whichever is greater) | t59               | -59 dBc             | t59 $\pm$ 14 $\mu$ s            |
| -30 dBc                                   | t30               | -30 dBc             | t30 $\pm$ 9 $\mu$ s             |
| -6 dBc                                    | t6                | -6 dBc              | t6 $\pm$ 5 $\mu$ s              |

**Table F.2-2b: Timing tolerances between input and output signals for a DCS AFLC**

| Input signal level                        | Input signal time | Output signal level | Tolerances - output signal time |
|---|-------------------|---------------------|---------------------------------|
| -48 dBc (or -48 dBm whichever is greater) | t48               | -48 dBc             | t48 $\pm$ 14 $\mu$ s            |
| -30 dBc                                   | t30               | -30 dBc             | t30 $\pm$ 9 $\mu$ s             |
| -6 dBc                                    | t6                | -6 dBc              | t6 $\pm$ 5 $\mu$ s              |

The input signal time is the time at which the input level crosses the corresponding signal level. The above requirements apply to both the rising and falling edge of the burst.

**Table F.2-3: Signal level tolerances for both GSM and DCS AFLC**

| Range                                    | Tolerances - output signal level |
|--|----------------------------------|
| t6.....t6 $\pm$ 5 $\mu$ s (rising edge)  | -6.....+4 dB                     |
| t6.....t6 $\pm$ 5 $\mu$ s (falling edge) | -6.....+1 dB                     |
| 147 useful bits                          | $\pm$ 1 dB                       |

All input signal levels are relative to the average power level over the 147 useful bits of the input signal. All output signal levels are relative to the average power level over the 147 useful bits of the output signal.

## F.2.4 Phase error

The increase in phase error of a GSM input signal, which meets the phase error requirements of 3GPP TS 45.005, shall be no greater than 2 degrees RMS and 8 degrees peak.

## F.2.5 Frequency error

The increase in frequency error of a GSM input signal, which meets the frequency accuracy requirements of 3GPP TS 45.010, shall be no greater than 0,05 ppm.

## F.2.6 Group delay

The absolute value of the group delay (signal propagation delay) shall not exceed 500 ns.

## F.2.7 Spurious emissions

With a GSM input signal corresponding to an MS transmitting at +39 dBm for a GSM 900 AFLC, and at +36 dBm for a DCS 1 800 AFLC, the peak power of any single spurious emission measured in a bandwidth according to table F.2-4, shall be no greater than -36 dBm in the relevant transmit band.

**Table F.2-4: Transmit band spurious emissions measurement conditions**

| Band   | Frequency                     | Measurement bandwidth |
|--|-------------------------------|-----------------------|
| relevant transmit band<br>and < 2 MHz offset from<br>band edge | offset from test signal freq. |                       |
|  | ≥ 1,8 MHz<br>≥ 6,0 MHz        | 30 kHz<br>100 kHz     |

Outside of this transmit band, the power measured in the bandwidths according to table F.2-5 below, shall be no greater than:

- 250 nW (-36 dBm) in the frequency band 9 kHz - 1 GHz;
- 1 μW (-30 dBm) in the frequency band 1 - 12,75 GHz

**Table F.2-5: Out of band spurious emissions measurement conditions**

| Band   | Frequency offset                           | Measurement Bandwidth |
|--|--|-----------------------|
| 100 kHz - 50 MHz                                 | -  | 10 kHz                |
| 50 MHz -500 MHz                                  | -  | 100 kHz               |
| above 500 MHz but excluding the<br>transmit band | (offset from edge of the transmit<br>band) |                       |
|  | ≥ 2 MHz                                    | 30 kHz                |
|  | ≥ 5 MHz                                    | 100 kHz               |
|  | ≥ 10 MHz                                   | 300 kHz               |
|  | ≥ 20 MHz                                   | 1 MHz                 |
|  | ≥ 30 MHz                                   | 3 MHz                 |

In the band 935 - 960 MHz, the power measured in any 100 kHz band shall be no more than -79 dBm, in the band 925 - 935, 460.4 – 467.6 MHz and 488.8 – 496 MHz, shall be no more than -67 dBm and in the band 1 805 - 1 880 MHz, shall be no more than -71 dBm.

With no input signal and the MS input port terminated and unterminated, the peak power of any single spurious emission measured in a 100 kHz bandwidth shall be no greater than:

- 2 nW (-57 dBm) in the frequency bands 9 kHz - 880 MHz, 915 - 1 000 MHz;
- 1,25 nW (-59 dBm) in the frequency band 880 - 915 MHz;
- 5 nW (-53 dBm) in the frequency band 1 710 - 1 785 MHz;
- 20 nW (-47 dBm) in the frequency bands 1 000 - 1 710 MHz, 1 785 - 12 750 MHz.

## F.2.8 VSWR

The VSWR shall be less than 1.7:1 at the RF port of the device which is intended to be connected to the MS. The VSWR shall be less than 2:1 at the RF port of the device which is intended to be connected to the antenna.

## F.2.9 Stability

The AFLC shall be unconditionally stable.

---

## F.3 Receiving path

Unless otherwise stated, the requirements in this clause apply at all frequencies in the receive band 460.4 – 467.6 MHz for a GSM 450 AFLC, at all frequencies in the receive band 488.8 - 496 MHz for a GSM 480 AFLC, at all frequencies in the receive band 925 - 960 MHz for a GSM 900 AFLC, and at all frequencies in the receive band 1 805 - 1 880 MHz, for a DCS 1 800 AFLC. For a multi band AFLC, which supports more than one of the GSM and DCS bands, the requirements apply in all of the receive bands supported.

### F.3.1 Gain

With a GSM input signal at any level in the range -102 dBm to -20 dBm for a GSM 400 and GSM 900 AFLC and -100 dBm to -20 dBm for a DCS 1 800 AFLC, the gain shall be 0 dB with a tolerance of  $\pm 1$  dB.

For test purposes, it is sufficient to use a CW signal to test this requirement.

### F.3.2 Noise figure

The noise figure shall be less than 7 dB for a GSM 400 and GSM 900 AFLC and less than 7 dB for a DCS 1 800 AFLC.

### F.3.3 Group delay

The absolute value of the group delay (signal propagation delay) shall not exceed 500 ns.

### F.3.4 Intermodulation performance

The output third order intercept point shall be greater than -10 dBm.

### F.3.5 VSWR

The VSWR shall be less than 1.7:1 at the RF port of the device which is intended to be connected to the MS. The VSWR shall be less than 2:1 at the RF port of the device which is intended to be connected to the antenna.

### F.3.6 Stability

The AFLC shall be unconditionally stable.

---

## F.4 Guidelines (informative)

The specifications of the AFLC, have been developed to ensure that a generic AFLC causes minimal degradation of the parametric performance of the MS, to which it is connected.

The following should be clearly marked on the AFLC:

- The intended band(s) of operation.
- The power class of the MS, to which it designed to be connected.

When installed correctly the AFLC can provide enhancement of the MS to BTS link in vehicular installations. However, it is not guaranteed that an AFLC, which meets the requirements of this specification, will provide a performance improvement for all of the different GSM MS implementations and installations.

Some MS implementations significantly exceed the performance requirements of 3GPP TS 45.005, e.g. with respect to reference sensitivity performance. A purely passive feeder of low loss cable, may provide the best performance for some implementations. The benefits of installing an AFLC in a vehicular application, can only be assessed on a case by case basis.

When used, the AFLC should only be installed in the type approved configuration, with the minimum amount of additional cabling.

When designing an AFLC to be used with a GSM MS, the best downlink performance will be obtained if the low noise amplifier is situated as closely as possible to the output of the antenna.

## Annex G (normative): Calculation of Error Vector Magnitude

The Error Vector Magnitude (EVM) is computed at the symbol times in the useful part of the burst (excluding tail symbols).

Let  $Y(t)$  be the complex signal produced by observing the real transmitter at instant  $t$ .  $R(t)$  is defined to be an ideal transmitted signal. The symbol timing phase of  $Y(t)$  is aligned with the ideal signal. The transmitter is modelled as:

$$Y(t) = C1\{R(t) + D(t) + C0\}W^t$$

where

$W = e^{\alpha + j\omega}$  accounts for both a frequency offset of " $\omega$ " radians per second phase rotation and an amplitude change of " $\alpha$ " nepers per second,

$C0$  is a constant origin offset representing carrier feedthrough,

$C1$  is a complex constant representing the arbitrary phase and output power of the transmitter and

$D(t)$  is the residual complex error on signal  $R(t)$ .

$Y(t)$  is compensated in amplitude, frequency and phase by multiplying by the complex factor

$$W^{-t}/C1$$

After compensation,  $Y(t)$  is passed through the specified measurement filter to produce the signal

$$Z(k) = S(k) + E(k) + C0$$

where

$S(k)$  is the ideal transmitter signal observed through the measurement filter.

$k = \text{floor}(t/T_s)$ , where  $T_s$  corresponds to the symbol time.

( $T_s = 48/13 \mu\text{sec}$  or  $1/270.833\text{kHz}$  for normal symbol rate, and  $T_s = 40/13 \mu\text{sec}$  for higher symbol rate)

The error vector  $\mathbf{E}(k)$

$$\mathbf{E}(k) = Z(k) - C0 - S(k)$$

is measured and calculated for each instant  $k$ .

The sum square vector error for each component is calculated over one burst. The relative RMS vector error is defined as:

$$\text{RMS EVM} = \sqrt{\frac{\sum_{k \in K} |\mathbf{E}(k)|^2}{\sum_{k \in K} |S(k)|^2}} \quad \text{and shall not exceed the specified value.}$$

The symbol vector error magnitude (EVM) at symbol  $k$  is defined as

$$\text{EVM}(k) = \frac{\sqrt{|\mathbf{E}(k)|^2}}{\sqrt{\frac{\sum_{k \in K} |S(k)|^2}{N}}},$$

where  $N$  is the number of elements in the set  $K$ .  $\text{EVM}(k)$  is the vector error length relative the root average energy of the useful part of the burst.



$C_0$ ,  $C_1$  and  $W$  shall be chosen to minimise RMS EVM per burst and are then used to compute the individual vector errors  $E(k)$  on each symbol. The symbol timing phase of the samples used to compute the vector error should also be chosen to give the lowest value for the RMS EVM.

Origin offset suppression (in dB) is defined as

$$\text{OOS (dB)} = -10 \log_{10} \left( \frac{|C_0|^2}{\frac{1}{N} \sum_{k \in K} |S(k)|^2} \right)$$

The minimum value of origin offset suppression is specified separately.

In the above equation, the errors shall be measured after a measurement receive filter at baseband. The specification is based on using the specified, windowed, raised-cosine, filter with roll-off 0.25 and single side-band bandwidth of 90 kHz for normal symbol rate and for higher symbol-rate using narrow pulse-shaping filter, and the specified, windowed, raised-cosine, filter with roll-off 0.25 and single side-band bandwidth of 108 kHz for higher symbol rate using wide pulse-shaping filter as the measurement receive filter (see 4.6.2). Sufficient over-sampling is assumed (at least 4 times).

---

## Annex H (normative): Requirements on Location Measurement Unit

Location Services utilizes Location Measurement Units (LMU) to support its positioning mechanisms. An LMU is additional measurement hardware in the GSM network. Time Of Arrival (TOA) positioning mechanism requires LMUs to make accurate measurement of the TOA of the access bursts emitted by the MS. Enhanced Observed Time Difference positioning mechanism requires LMUs in unsynchronized networks to measure the time difference of BTS signals received.

Section H.1 and its subsections specify LMU requirements to support the Time Of Arrival positioning mechanism.

Section H.2 and its subsections specify LMU requirements to support the Enhanced Observed Time Difference positioning mechanism.

An LMU may contain a control mobile station to communicate with the network. In that case, the requirements for a normal mobile station shall apply to this control mobile station.

---

### H.1 TOA LMU Requirements

A TOA Location Measurement Unit (LMU) is a unit for making accurate Time-of-Arrival (TOA) measurements. Specifically, the LMU shall be capable of measuring the Time-of-Arrival of access bursts that are transmitted from a mobile station on request. The measurement results are used by the system for determining the location of the mobile station as described in 3GPP TS 43.059. This section defines the requirements for the receiver of an LMU deployed in the GSM system. Requirements are defined for the Time-of-Arrival measurement accuracy of the LMU.

In addition, an LMU shall be capable of performing Radio Interface Timing (RIT) measurements, comprising Absolute Time Differences (ATD), as described in 3GPP TS 43.059.

#### H.1.1 Void

#### H.1.2 LMU characteristics

In this clause, the requirements are given in terms of power levels at the antenna connector of an LMU. Equipment with an integral antenna may be taken into account in a similar manner as described in Chapter 5 of 3GPP TS 45.005.

##### H.1.2.1 Blocking characteristics

This subclause defines receiver blocking requirements. The reference sensitivity performance as specified in Table H.1-2 shall be met when the following signals are simultaneously input to the LMU.

- A carrier signal as described in H.1.3.1 at frequency  $f_0$ , 9 dB above the reference sensitivity level as specified in Table H.1-1.
- A continuous static sine wave signal as described in Section 5.1 of 3GPP TS 45.005. The requirements for normal "BTS" shall be used, however the signal strength shall be 6 dB higher than the requirements for "normal BTS".

The exceptions listed in Section 5.1 of 3GPP TS 45.005 apply also for the LMU requirements.

##### H.1.2.2 AM suppression characteristics

This subclause defines AM suppression requirements. The reference sensitivity performance as specified in Table H.1-2 shall be met when the following signals are simultaneously input to the LMU.

- A carrier signal as described in H.1.3.1 at frequency  $f_0$ , 9 dB above the reference sensitivity level as specified in Table H.1-1.

- A single frequency signal as described in Section 5.2 of 3GPP TS 45.005. The requirements for "normal BTS" shall be used, however the signal strength shall be 6 dB higher than the requirements for "normal BTS".

### H.1.2.3 Intermodulation characteristics

This subclause defines intermodulation requirements. The reference sensitivity performance as specified in Table H.1-2 shall be met when the following signals are simultaneously input to the LMU.

- A carrier signal as described in H.1.3.1 at frequency  $f_0$ , 9 dB above the reference sensitivity level as specified in Table H.1-1.
- A continuous static sine wave signal and any 148-bit subsequence of the 511-bits pseudo-random sequence in CCITT O.153. The signal strength shall be 6 dB higher than as described in Section 5.3 of 3GPP TS 45.005.

### H.1.2.4 Spurious emissions

The requirements for a BTS receiver as specified in section 5.4 of 3GPP TS 45.005 shall apply also to the receiver of an LMU.

## H.1.3 Time-of-Arrival Measurement Performance

This clause specifies the required Time-of-Arrival (TOA) measurement accuracy of the LMU with and without interference and different channel conditions. The requirements are given in terms of Time-of-Arrival measurement error (in microseconds) as a function of the carrier and interference input power levels at the antenna connector of the receiver. Equipment with an integral antenna may be taken into account in a similar manner as described in Chapter 5 of 3GPP TS 45.005.

The power level, under multipath fading conditions, is the mean power of the sum of the individual paths.

### H.1.3.1 Sensitivity Performance

With the following configuration and propagation conditions, the LMU shall meet the requirements for 90% RMS TOA error ( $\text{RMS}_{90}$ ) defined in Table H.1-2.

- A carrier signal of GMSK modulated random access bursts is fed into the LMU. The duration of the carrier signal is 320 ms. The access bursts occur once every TDMA frame in a 26-frame multiframe, except in frame number 12 and 25.

NOTE: Since it is an implementation option in the MS whether or not a MS transmits access bursts during SACCH frames (i.e. frame number 12 or 25 in a 26-frame multiframe), this test carrier signal specifies the worst case under which the requirements shall be met.

- The access bursts consist of a fixed training sequence according to 3GPP TS 45.002 and a data part. The data part of the access burst is random but constant over one 320 ms measurement trial. The data part of the access burst is made known to the LMU before a measurement starts.
- The power up and power down ramping for the bursts is in accordance with Annex B of 3GPP TS 45.005.
- The measurement accuracy of the LMU is defined as the root-mean-square (RMS) value of the most accurate 90% of TOA measurements. As an example, if  $\{x_1..x_N\}$  is a set of the absolute square Time-of-Arrival measurement errors for N trials, sorted in ascending order, the RMS of 90% is defined as

$$\text{RMS}_{90} = \sqrt{\text{sum}(x_1..x_M)/M} \text{ where } M \text{ is the largest integer such that } M < 0.9 N.$$

For the test,  $N > 500$  trials is recommended.

- Measurements shall be performed at two signal strength levels for each of two different propagation conditions. The signal strength level requirement in Table H.1-2 is expressed relative to the reference sensitivity level defined in Table H.1-1.

- For each signal strength, the two channel conditions are:
  - 1) Static
  - 2) Rayleigh (the signal fades with a Rayleigh amplitude distribution and perfect decorrelation between the bursts).

Note: Perfect decorrelation between bursts may be attained using a 100 km/hr mobile velocity for the Rayleigh faded channel.

- The LMU is informed of the true Time-of-Arrival value - with an uncertainty of 20 bit periods (approx. 70µs) - prior to the measurement. This defines a search window of +/-10 bit periods during which the true Time-of-Arrival will occur (per 3GPP TS 44.071 Annex B, paragraph 3.5). The true Time-of-Arrival value shall be uniformly distributed within the search window for each measurement trial. The TOA measurement error is then defined as the difference between this true Time-of-Arrival value minus the measured TOA value at the LMU.

**Table H.1-1: Reference Sensitivity Level**

| Signal strength at antenna connector                   |          |
|--|----------|
| GSM 400, GSM 700, GSM 850, GSM 900, DCS 1800, PCS 1900 | -123 dBm |

**Table H.1-2: Sensitivity performance  
(RMS<sub>90</sub> of Time-of-Arrival error in microseconds)**

| Carrier signal strength relative to reference sensitivity level | Static | Rayleigh |
|---|--------|----------|
| 0 dB  | 0.37   | 0.37     |
| 20 dB   | 0.18   | 0.18     |

### H.1.3.2 Interference Performance

In this subclause, requirements are given in terms of the TOA measurement accuracy (in microseconds) for a specified carrier to interference ratio (*C/I*) at the antenna connector of the receiver. The input carrier signal shall be as defined in subclause H.1.3.1 and shall be set to a level 40 dB above the reference sensitivity level defined in Table H.1-1. The *C/I* requirements shall be met for an interference signal which is co-channel, adjacent channel (200 kHz offset), and alternate channel (400 kHz offset) to the desired signal as specified in table H.1-3.

The interference signal properties and propagation conditions are defined below.

- One interfering signal is present which consists of a sequence of GMSK modulated normal bursts. The training sequence is chosen randomly from the 8 possible normal burst TSC"s defined in 3GPP TS 45.002, but kept fixed during one 320 ms measurement trial.
- The time offset between the carrier and the interferer signal is uniformly distributed random between 0 and 156.25 bit periods, but fixed during one 320 ms measurement trial. The length of the carrier burst (access burst) is 88 bit periods, the length of one burst period is 156.25 bit periods, and the length of the interferer training sequence is 26 bit periods. The probability that the interference training sequence overlaps with some part of the carrier burst is therefore  $(88+26)/156.25 = 73\%$ .
- Each interference condition shall meet the *C/I* requirements in Table H.1-3 for the following channel conditions:
  - 1) Static
  - 2) Rayleigh (the signal and interference fade independently with a Rayleigh amplitude distribution that has perfect decorrelation between bursts).

NOTE 1: Perfect decorrelation between bursts may be attained using a 100 km/hr mobile velocity for the Rayleigh faded channel.

- A search window of 20 bit periods shall be used as defined in section H.1.3.1.

NOTE 2: In the case of frequency hopping, the interference and carrier signal shall have the same frequency hopping sequence.

**Table H.1-3: Interference performance  
(RMS<sub>90</sub> of Time-of-Arrival error in microseconds)**

| Interference type             | 90% RMS TOA Error |          | Carrier to Interference Level (dB) |
|-------------------------------|-------------------|----------|------------------------------------|
|                               | Static            | Rayleigh |                                    |
| Co-channel                    | 0,37              | 0,37     | -9 dB                              |
|                               | 0,18              | 0,18     | 5 dB                               |
| Adjacent channel<br>(200 kHz) | 0,37              | 0,37     | -20 dB                             |
|                               | 0,18              | 0,18     | -10 dB                             |
| Adjacent channel<br>(400 kHz) | 0,37              | 0,37     | -50 dB                             |
|                               | 0,18              | 0,18     | -40 dB                             |

### H.1.3.3 Multipath Performance

This subclause defines TOA estimation accuracy under multipath conditions. The test setup is per H.1.3.1 (sensitivity performance) with the following changes:

- Each burst propagates through the TU multipath channel specified in Annex C of 3GPP TS 45.005. The true Time-of-Arrival value is the time of the first tap (tap number 1).
- Ideal FH is assumed, i.e. perfect decorrelation between bursts.

NOTE: Perfect decorrelation between bursts may be approximated by using frequency hopping or a 100 km/hr mobile velocity with the TU channel model.

The performance requirements are specified in table H.1-4.

**Table H.1-4: Multipath performance  
(RMS<sub>90</sub> of Time-of-Arrival error in microseconds)**

| Carrier signal strength relative to reference (Table H.1-1) | TU3/100<br>(12 tap setting) |
|---|-----------------------------|
| 0 dB  | 0,5                         |
| 20 dB   | 0,4                         |

## H.1.4 Radio Interface Timing Measurement Performance

A Location Measurement Unit shall be capable of performing Radio Interface Timing (RIT) measurements as described in 3GPP TS 43.059 to support one or more positioning methods. RIT measurements comprise measurements of the synchronization difference between two base transceiver stations. An LMU shall therefore be capable of monitoring multiple base transceiver stations. The measurements of BTS synchronization differences can either be performed relative to a reference BTS (i.e. RTD measurement) or relative to some absolute time scale (i.e. ATD measurement).

The RIT measurement shall be made with an accuracy of  $\pm 2$  bit periods.

---

## H.2 E-OTD LMU Requirements

An E-OTD Location Measurement Unit (LMU) is a unit that makes accurate observed time difference measurements of signals from BTSs. Specifically, the LMU shall be capable of measuring the Time-of-Arrival of bursts transmitted from a BTS on a periodic and predictable basis. The measurement results are used by the system for determining location of a MS. This clause defines the requirements to be put on the receiver of an LMU deployed in the GSM System. Requirements are defined for the E-OTD measurement accuracy of the LMU.

### H.2.1 LMU Characteristics

In this clause, the requirements are given in terms of power levels at the antenna connector of the E-OTD LMU. Equipment with an integral antenna may be taken into account in a similar manner as described in Chapter 5 of 3GPP TS 45.005.

### H.2.1.1 Blocking characteristics

This subclause defines E-OTD LMU receiver blocking requirements. The reference sensitivity performance as specified in table H.2-2 shall be met when the following signals are simultaneously input to the LMU.

- A neighbour BCCH carrier as described in H.2.2.1 at frequency  $f_o$ , 11 dB above the reference sensitivity level as specified in Table H.2-1.
- A continuous static sine wave signal as described in Section 5.1 of 3GPP TS 45.005. For GSM 400 and GSM 900, the requirements for "other MS" shall be used. For GSM 700, GSM 850, DCS 1800 and PCS 1900, the requirements for "MS" shall be used.

The exceptions listed in Section 5.1 of 3GPP TS 45.005 apply also for the E-OTD LMU requirements.

### H.2.1.2 AM suppression characteristics

This subclause defines AM suppression requirements. The reference sensitivity performance as specified in Table H.2-2 shall be met when the following signals are simultaneously input to the LMU.

- A neighbour BCCH carrier as described in subclause H.2.2.1 at frequency  $f_o$ , 11 dB above the reference sensitivity level as specified in table H.2-1.
- A single frequency signal as described in subclause 5.2 of 3GPP TS 45.005. The requirements for "MS" shall be used.

### H.2.1.3 Intermodulation characteristics

This subclause defines intermodulation requirements. The reference sensitivity performance as specified in Table H.2-2 shall be met when the following signals are simultaneously input to the LMU.

- A neighbour BCCH carrier as described in subclause H.2.2.1 at frequency  $f_o$ , 11 dB above the reference sensitivity level as specified in table H.2-1.
- A continuous static sine wave signal and any 148-bit subsequence of the 511-bits pseudo-random sequence in CCITT Recommendation O.153, as described in subclause 5.3 of 3GPP TS 45.005.

## H.2.2 Sensitivity and Interference Performance

This clause specifies the required E-OTD measurement accuracy of the LMU with and without interference. The requirements are given in terms of E-OTD measurement error (in microseconds), as function of the carrier and interference input power levels, at the antenna connector of the receiver. Equipment with an integral antenna may be taken into account in a similar manner as described in clause 5 of 3GPP TS 45.005.

The power level, under multipath fading condition, is the mean power of the sum of the individual paths.

### H.2.2.1 Sensitivity Performance

With the following configuration and propagation conditions, the LMU shall meet the requirements of 90% RMS E-OTD error defined in table H.2-2.

- The E-OTD LMU receives a reference BCCH carrier with a power level of 28 dB above the reference sensitivity level defined in table H.2-1.
- The E-OTD measurements (relative to the reference BCCH carrier) are done on a neighbour BCCH carrier at power levels relative to the reference sensitivity level defined in Table H.2-1. The measurement power levels are given in Table H.2-2.
- The network requests an E-OTD measurement by commanding the LMU to report the E-OTD measurement with shortest possible reporting period (see 3GPP TS 44.071 Annex A).

- The measurement performance shall also be achieved with the reference BCCH and the neighbour BCCH carriers having 8-PSK, QPSK, 16-QAM or 32-QAM modulated bursts. 8-PSK, QPSK, 16-QAM and 32-QAM modulation and the 8-PSK, QPSK, 16-QAM and 32-QAM normal bursts are defined in 3GPP TS 45.004 clause 3 and 3GPP TS 45.002 subclause 5.2.3, respectively.
- The measurement accuracy of the LMU is defined as the root-mean-square (RMS) value of 90% of the measurements that result in the least E-OTD error. As an example, if  $\{x_1..x_N\}$  is a set of the absolute square E-OTD measurement errors for N trials, sorted in ascending order, the RMS of 90% is defined as:

$$\text{RMS}_{90} = \text{sqrt}(\text{sum}(x_1..x_M)/M)$$

where M is the largest integer such that  $M < 0,9 N$ . For the test,  $N > 250$  trials is recommended. The channels shall be static, i.e. at a constant signal level throughout the measurements.

**Table H.2-1: Reference Sensitivity Level**

| Signal strength at antenna connector            |          |
|---|----------|
| GSM 400, GSM850, GSM 900,<br>DCS 1800, PCS 1900 | -110 dBm |

**Table H.2-2: Sensitivity performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| Minimum neighbour carrier signal strength relatively to E-OTD LMU reference sensitivity level (Table H.2-1) | Static channel |
|---|----------------|
| 0 dB  | 0.3 μs         |
| 20 dB   | 0.1 μs         |

## H.2.2.2 Interference Performance

This clause defines E-OTD measurement accuracy (in microseconds) for specified carrier-to-interference ratios of the neighbor BCCH carrier. The reference BCCH carrier is as defined in subclause H.2.2.1. The neighbour BCCH carrier shall be as defined in H.2.2.1 and shall be set to a level 28 dB above the reference sensitivity level defined in table H.2-1. The C/I requirements shall be met for an interference signal which is co-channel, adjacent channel (200 kHz offset), and alternate channel (400 kHz offset) to the desired neighbour BCCH carrier as shown in table H.2-3.

- The interference signal consists of a random, continuous GMSK modulated signal.

**Table H.2-3: Interference performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| Interference type             | Static channel | Minimum carrier to Interference Level (dB) |
|-------------------------------|----------------|--|
| Co-channel                    | 0.3 μs         | 0 dB                                       |
|                               | 0.1 μs         | 10 dB                                      |
| Adjacent channel<br>(200 kHz) | 0.5 μs         | -18 dB                                     |
|                               | 0.2 μs         | -8 dB                                      |
| Adjacent channel<br>(400 kHz) | 0.1 μs         | -41 dB                                     |
|                               |                |  |

## H.2.2.3 Multipath Performance

This clause defines E-OTD measurement accuracy under multipath conditions. The test setup is as under subclause H.2.2.1 (sensitivity performance) with the following changes:

- Each burst of the neighbour BCCH carrier propagates through the TU multipath channel specified in annex C of 3GPP TS 45.005. The reference carrier remains static.

The performance requirements are specified in table H.2-4.

**Table H.2-4: Multipath performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| <b>Minimum neighbour carrier signal strength relative to reference sensitivity (Table H.2-1)</b> | <b>TU3<br/>(12 tap setting)</b> |
|--|---------------------------------|
| 0 dB   | 1,5 $\mu$ s                     |
|  |                                 |



---

# Annex I (normative): E-OTD Mobile Station Requirements

## I.1 Introduction

To measure Enhanced Observed Timing Difference (E-OTD) location the MS must make accurate Observed-Time-Difference measurements (OTD - the time interval that is observed by a MS between the reception of signals (bursts) from two BTSs). Specifically, the E-OTD MS shall be capable of measuring the reception of bursts transmitted from a BTS on a periodic and predictable basis. The measurement results are used by the system or the E-OTD capable MS for determining location of the MS. This clause defines E-OTD measurement accuracy requirements of an E-OTD capable MS deployed in the GSM System. Requirements for dedicated mode E-OTD measurements are specified below. An E-OTD MS, supporting the MS based E-OTD method, shall be capable of doing idle mode E-OTD measurements with the same accuracy as in dedicated mode, but this needs not to be tested.

---

## I.2 Sensitivity and Interference Performance

This clause specifies the required E-OTD measurement accuracy for an E-OTD capable MS with and without interference. The requirements are given in terms of E-OTD measurement error (in microseconds), as function of the carrier and interference input power levels, at the antenna connector of the receiver. Equipment with an integral antenna may be taken into account in a similar manner as described in Chapter 5 of 3GPP TS 45.005.

The power level, under multipath fading condition, is the mean power of the sum of the individual paths.

### I.2.1 Sensitivity Performance

With the following configuration and propagation conditions, the E-OTD capable MS shall meet the requirements of 90% RMS E-OTD error defined in Table I.2-1.

- The E-OTD capable MS is in dedicated mode receiving a carrier signal at a power level of at least 20 dB above the reference sensitivity level defined in subclause 6.2.
- The E-OTD measurements are done on a neighbour BCCH carrier at power levels relative to the reference sensitivity level defined in subclause 6.2. The measurement power levels are given in Table I.2-1. The E-OTD measurements are referenced to a reference BCCH carrier at a power level at least 20 dB above the reference sensitivity level defined in subclause 6.2. The reference BCCH carrier and the neighbour BCCH carrier shall be in the same frequency band. The BA list contains the reference BCCH carrier and the neighbour BCCH carrier.
- The network requests an E-OTD measurement by commanding the E-OTD capable MS to report the E-OTD measurement with a response time equal to 2 seconds. The E-OTD capable MS does not need to perform E-OTD measurements prior to receiving the command.
- The measurement performance shall also be achieved with the reference BCCH and the neighbour BCCH carriers having 8-PSK modulated bursts. 8-PSK modulation and the 8-PSK normal bursts are defined in 3GPP TS 45.004 clause 3 and 3GPP TS 45.002 subclause 5.2.3, respectively.
- The measurement accuracy of the E-OTD capable MS is defined as the root-mean-square (RMS) value of 90% of the measurements that result in the least E-OTD error. As an example, if  $\{x_1..x_N\}$  is a set of the absolute square E-OTD measurement errors for N trials, sorted in ascending order, the RMS of 90% is defined as

$$\text{RMS}_{90} = \text{sqrt}(\text{sum}(x_1..x_M)/M)$$

where M is the largest integer such that  $M < 0.9 N$ . For the test,  $N > 250$  trials is recommended.

The channels shall be static, i.e. at a constant signal level throughout the measurements.

**Table I.2-1: Sensitivity performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| Minimum neighbour carrier signal strength relative to reference sensitivity level | Static channel |
|---|----------------|
| -8 dB   | 0.3 $\mu$ s    |
| 12 dB   | 0.1 $\mu$ s    |

## 1.2.2 Interference Performance

In this clause, requirements are given in terms of the E-OTD measurement accuracy (in microseconds) for specified carrier-to-interference ratios of the neighbour BCCH carrier. The carrier the MS uses for communication and the reference BCCH carrier shall be as defined in section I.2.1. The input neighbour BCCH carrier signal shall be as defined in I.2.1 and shall be set to a level at least 20 dB above the reference sensitivity signal level defined in subclause 6.2. The C/I requirements shall be met for an interference signal which is co-channel, adjacent channel (200 kHz offset), and alternate channel (400 kHz offset) to the desired neighbour BCCH carrier as shown in Table I.2-2 below.

- The interference signal consists of a random, continuous GMSK modulated signal.

**Table I.2-2: Interference performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| Interference type          | Static Channel | Minimum carrier to Interference Level (dB) |
|----------------------------|----------------|--|
| Co-channel                 | 0.3 $\mu$ s    | 0 dB                                       |
|                            | 0.1 $\mu$ s    | 10 dB                                      |
| Adjacent channel (200 kHz) | 0.5 $\mu$ s    | -18 dB                                     |
|                            | 0.2 $\mu$ s    | -8 dB                                      |
| Adjacent channel (400 kHz) | 0.1 $\mu$ s    | -41 dB                                     |

## 1.2.3 Multipath Performance

This clause defines E-OTD measurement accuracy under multipath conditions. The test setup is as under I.2.1 (sensitivity performance) with the following changes:

- Each burst of the neighbour BCCH carrier propagates through the TU multipath channel specified in Annex C of 3GPP TS 45.005. The reference carrier remains static.

The performance requirements are specified in Table I.2-3.

**Table I.2-3: Multipath performance  
(RMS<sub>90</sub> of E-OTD error in microseconds)**

| Minimum neighbour carrier signal strength relative to reference sensitivity | TU3 (12 tap setting) |
|---|----------------------|
| -8 dB   | 1.5 $\mu$ s          |

---

# Annex J (informative): Guidance on the Usage of Dynamic ARFCN Mapping

## J.1 Introduction

Dynamic mapping of ARFCN numbers may be used in order to extend the capability to support more frequencies than with a fixed allocation scheme which is limited to 1024 frequencies. Typically dynamic mapping would be used for ARFCN numbers that have no fixed allocation as described in section 2 but dynamic allocation of other ARFCN numbers is also possible.

Mapping of ARFCN numbers to frequencies may be indicated in System Information type 14, type 15 or Packet System Information Type 8. This mapping may be limited to the actual frequency allocation used by the serving PLMN or additionally to frequencies of other PLMNs in case of co-operation between different PLMNs allowing e.g. handover between those PLMNs.

---

## J.2 Dynamic allocation of GSM 400, GSM 800, GSM 900, DCS 1800 and PCS 1900 ARFCNs

If a PLMN is not using some of frequencies of GSM 400, GSM 800, GSM 900, DCS 1800 or PCS 1900 bands, the corresponding ARFCN numbers may be used for dynamic ARFCN mapping. However, in this case mobiles of previous releases, not supporting dynamic ARFCN mapping but supporting the frequency band concerned, monitor different frequencies than actually intended. In this case the operator must take care that NCC\_PERMITTED (See 3GPP TS 44.018) is set in a way that those mobiles ignore unintentional measurements, based on NCC not permitted. Note that in this case a mobile station not supporting dynamic mapping, performs the same number of RXLEV measurements per measurement report per carrier on the BA as the mobile station that supports dynamic mapping. However, some loss of performance may occur when the mobile station is searching synchronisation for carriers on the list of strongest cells.

---

## J.3 Controlling changes in dynamic mapping

Dynamic mapping may need to be changed in a live network e.g. when the operator is taking new frequency allocations into use or if the existing frequency allocation is changed. Since the mobile stations decode the information about dynamic mapping periodically only in idle mode, valid mapping must be broadcast well before the new mapping is taken into use.

An example case of a change in dynamic mapping is described by the following steps:

- Assume that the network is initially broadcasting dynamic mapping for 4 different frequency blocks, referred as DM1, DM2, DM3 and DM4.
- Assume that DM1 is covering the frequency range from  $x$  to  $x + 5$  MHz and the frequency band allocated for the operator is changed to the range from  $x - 5$  MHz to  $x + 2$  MHz (extension and change of frequency allocation at the same time).
- The operator should then start to broadcast a new dynamic mapping DM1, DM2, DM3, DM4 and DM5 where the old frequency allocation is mapped by DM1 and the new allocation is mapped by DM5. *The requirement is that the ARFCN numbers used for DM1 and DM5 are non-overlapping.*
- Once the operator has used this new system information sufficiently long, the change in the frequency allocation can be carried out. Note that this change needs to be done like any similar change with fixed mapping scheme, the change should occur simultaneously for all active resources in a given cell, including likely changes in neighbour cell SI messages.
- At any time after the actual change in the frequency allocation, the operator may start broadcasting dynamic mapping excluding DM1, i.e. including only DM5, DM2, DM3 and DM4.

Transmission of duplicated mapping information (DM1 & DM5 in the above example) should last as long as the longest supported continuous call at the time the change in mapping takes place. This allows all mobiles decode the new mapping information in idle mode. Alternatively the network may provide the new mapping information in dedicated mode through SACCH with System Information type 14 message. This option allows infinite calls and reduces the time required for broadcasting of duplicated mapping information.

## Annex K (normative): Reference TFCs for FLO

In all reference TFCs, the TFCI shall be random.

For each reference TFC, the size of the uncoded in-band signalling bits shall be set equal to the size of the uncoded TFCI for that TFC.

### Reference TFC 1: "Signalling (9.2 kbit/s) on GMSK FR channel"

|              | TrCH 1 |
|--------------|--------|
| TB size      | 184    |
| CRC          | 18     |
| RMA          | 256    |
| Channel mode | FR     |
| Modulation   | GMSK   |
| Interleaving | 40 ms  |
| TFCI         | 5 bits |

### Reference TFC 2: "Low bit-rate codec (5 kbit/s) on GMSK HR channel"

|              | TrCH 1 | TrCH 2 |
|--------------|--------|--------|
| TB size      | 50     | 50     |
| CRC          | 6      | 0      |
| RMA          | 256    | 226    |
| Channel mode | HR     |        |
| Modulation   | GMSK   |        |
| Interleaving | 40 ms  |        |
| TFCI         | 2 bits |        |

### Reference TFC 3: "Medium bit-rate codec (10 kbit/s) on GMSK FR channel"

|              | TrCH 1 | TrCH 2 |
|--------------|--------|--------|
| TB size      | 100    | 100    |
| CRC          | 6      | 0      |
| RMA          | 256    | 226    |
| Channel mode | FR     |        |
| Modulation   | GMSK   |        |
| Interleaving | 40 ms  |        |
| TFCI         | 3 bits |        |

### Reference TFC 4: "Medium bit-rate codec (10 kbit/s) on 8PSK HR channel"

|              | TrCH 1 | TrCH 2 |
|--------------|--------|--------|
| TB size      | 100    | 100    |
| CRC          | 6      | 0      |
| RMA          | 256    | 226    |
| Channel mode | HR     |        |
| Modulation   | 8PSK   |        |
| Interleaving | 40 ms  |        |
| TFCI         | 4 bits |        |

**Reference TFC 5: "High bit-rate codec (20 kbit/s) on 8PSK FR channel"**

|              | TrCH 1 | TrCH 2 |
|--------------|--------|--------|
| TB size      | 200    | 200    |
| CRC          | 6      | 0      |
| RMA          | 256    | 226    |
| Channel mode | FR     |        |
| Modulation   | 8PSK   |        |
| Interleaving | 40 ms  |        |
| TFCI         | 5 bits |        |

**Reference TFC 6: "Multiple transport blocks (30 kbit/s) on 8PSK FR channel"**

|              | TrCH 1 | TrCH 2 | TrCH 3 | TrCH 4 |
|--------------|--------|--------|--------|--------|
| TB size      | 150    | 150    | 150    | 150    |
| CRC          | 12     | 12     | 12     | 12     |
| RMA          | 256    | 256    | 256    | 256    |
| Channel mode | FR     |        |        |        |
| Modulation   | 8PSK   |        |        |        |
| Interleaving | 20 ms  |        |        |        |
| TFCI         | 5 bits |        |        |        |

**Reference TFC 7: "High bit-rate data (50 kbit/s) on 8PSK FR channel"**

|              | TrCH 1 |
|--------------|--------|
| TB size      | 1000   |
| CRC          | 18     |
| RMA          | 256    |
| Channel mode | FR     |
| Modulation   | 8PSK   |
| Interleaving | 20 ms  |
| TFCI         | 1 bit  |

## Annex L (normative): Reference Test Scenarios for DARP

In all reference DARP Test Scenarios (DTS), the wanted signal shall always use Training Sequence (TSC) 0.

In each reference Test Scenario, the co-channel and adjacent channel interferers are GMSK modulated. The power of these interferers is measured before any receiver filtering and during the active part of the desired burst (see 3GPP TS 45.004). The use of Training sequence for the interferers varies between the Test Scenarios as defined below. When no TSC is indicated the midamble is filled with random data bits. Random TSC means that TSC is randomly selected on a burst-by-burst basis from {TSC1,...,TSC7}.

In some test scenarios an AWGN source is added to the interferers. The AWGN power is measured over a bandwidth of 270,833 kHz.

All power levels are relative to the signal level of the strongest co-channel interferer.

Power ramping according to the requirements in 3GPP TS 45.005 shall be applied to all delayed interferers. The other interferers shall be random, continuous GMSK-modulated signals.

NOTE: The non-delayed interferer is the same signal for which reference interference performance requirements normally apply (see clause 6.3).

In adjacent timeslots of the delayed interferers no power shall be applied.

The level of the strongest co-channel interferer (Co-channel 1) shall be -80 dBm.

The delay is measured from the same bit position in the wanted signal burst and the interferer burst, where the position in the wanted signal is the reference position.

### Reference Test Scenario for synchronous single co-channel interferer

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay range |
|-------------------------|--------------------|---------------------------------|------|------------------------|
| DTS-1                   | Co-channel 1       | 0 dB                            | none | no delay               |

### Reference Test Scenarios for synchronous multiple interferers

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC    | Interferer Delay range         |
|-------------------------|--------------------|---------------------------------|--------|--------------------------------|
| DTS-2                   | Co-channel 1       | 0 dB                            | none   | no delay                       |
|                         | Co-channel 2       | -10 dB                          | none   | no delay                       |
|                         | Adjacent 1         | 3 dB                            | none   | no delay                       |
|                         | AWGN               | -17 dB                          | -      | -                              |
| DTS-3                   | Co-channel 1       | 0 dB                            | random | -1 to +4 symbols <sup>*)</sup> |
|                         | Co-channel 2       | -10 dB                          | none   | no delay                       |
|                         | Adjacent 1         | 3 dB                            | none   | no delay                       |
|                         | AWGN               | -17 dB                          | -      | -                              |

<sup>\*)</sup> The delay shall be an integer number of symbols, arbitrarily chosen within the given interval and fixed throughout each test case.

### Reference Test Scenario for asynchronous single co-channel interferer

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay |
|-------------------------|--------------------|---------------------------------|------|------------------|
| DTS-4                   | Co-channel 1       | 0 dB <sup>*)</sup>              | none | 74 symbols       |

<sup>\*)</sup> The power of the delayed interferer burst, averaged over the active part of the wanted signal burst. The power of the delayed interferer burst, averaged over the active part of the delayed interferer burst is 3 dB higher.

**Reference Test Scenario for asynchronous multiple interferers**

| <b>Reference Test Scenario</b> | <b>Interfering Signal</b> | <b>Interferer relative power level</b> | <b>TSC</b> | <b>Interferer Delay</b> |
|--------------------------------|---------------------------|--|------------|-------------------------|
| DTS-5                          | Co-channel 1              | 0 dB <sup>*)</sup>                     | none       | 74 symbols              |
|                                | Co-channel 2              | -10 dB                                 | none       | no delay                |
|                                | Adjacent 1                | 3 dB                                   | none       | no delay                |
|                                | AWGN                      | -17 dB                                 | -          | -                       |

<sup>\*)</sup> The power of the delayed interferer burst, averaged over the active part of the wanted signal burst. The power of the delayed interferer burst, averaged over the active part of the delayed interferer burst is 3 dB higher.



---

## Annex M (normative): Minimum Performance Requirements for Assisted Global Positioning System (A-GPS)

This Annex defines the minimum performance requirements for A-GPS for MSs that support A-GPS. It includes the minimum performance requirements for both MS based and MS assisted A-GPS terminals.

---

### M.1 General

#### M.1.1 Abbreviations

|       |                                      |
|-------|--------------------------------------|
| A-GPS | Assisted - Global Positioning System |
| C/A   | Coarse/Acquisition                   |
| ECEF  | Earth Centred, Earth Fixed           |
| GPS   | Global Positioning System            |
| HDOP  | Horizontal Dilution Of Precision     |
| LOS   | Line Of Sight                        |
| TOW   | Time Of Week                         |
| TTFP  | Time To First Fix                    |
| WLS   | Weighted Least Squares               |

#### M.1.2 Measurement parameters

##### M.1.2.1 MS based A-GPS measurement parameters

In case of MS-based A-GPS, the measurement parameters are contained in the RRLP LOCATION INFORMATION IE. The measurement parameter in case of MS-based A-GPS is the horizontal position estimate reported by the MS and expressed in latitude/longitude.

##### M.1.2.2 MS assisted A-GPS measurement parameters

In case of MS-assisted A-GPS, the measurement parameters are contained in the RRLP GPS MEASUREMENT INFORMATION IE. The measurement parameters in case of MS-assisted A-GPS are the MS GPS Code Phase measurements. The MS GPS Code Phase measurements are converted into a horizontal position estimate using the procedure detailed in clause M.7.

#### M.1.3 Response time

Max Response Time is defined as the time starting from the moment that the MS has received the final RRLP MEASURE POSITION REQUEST sent before the MS sends the MEASURE POSITION RESPONSE containing the Location Information or the GPS Measurement Information, and ending when the MS starts sending the MEASURE POSITION RESPONSE containing the Location Information or the GPS Measurement Information on the Air interface. The response times specified for all test cases are Time-to-First-Fix (TTFP), i.e. the MS shall not re-use any information on GPS time, location or other aiding data that was previously acquired or calculated and stored internally in the MS. A dedicated test message 'RESET MS POSITIONING STORED INFORMATION' has been defined in TS 44.014 for the purpose of deleting this information and is detailed in subclause M.3.1.10.

#### M.1.4 Time assistance

Time assistance is the provision of GPS time to the MS from the network via RRLP messages. Currently two different GPS time assistance methods can be provided by the network.

- a) Coarse time assistance is always provided by the network and provides current GPS time to the MS. The time provided is within  $\pm 2$  seconds of GPS system time. This allows the GPS time to be known within one GPS navigation data sub-frame. It is signalled to the MS by means of the GPS Week and GPS TOW fields in the Reference Time assistance data IE.
- b) Fine time assistance is optionally provided by the network and adds the provision to the MS of the relationship between the GPS system time and the current GSM time. The accuracy of this relationship is  $\pm 10 \mu\text{s}$  of the actual relationship. This addresses the case when the network can provide an improved GPS time accuracy. It is signalled to the MS by means of the FNm, TN and BN fields in the Reference Time assistance data IE.

The time of applicability of time assistance is the beginning of the Frame of the message containing the GPS Reference time.

### M.1.4.1 Use of fine time assistance

The use of fine time assistance to improve the GPS performance of the MS is optional for the MS, even when fine time assistance is signalled by the network. Thus, there are a set minimum performance requirements defined for all MSs and additional minimum performance requirements that are valid for fine time assistance capable MSs only. These requirements are specified in subclause M.2.1.2.

### M.1.4.2 2D position error

The 2D position error is defined by the horizontal difference in meters between the ellipsoid point reported or calculated from the MS MEASURE POSITION RESPONSE and the actual position of the MS in the test case considered.

---

## M.2 A-GPS minimum performance requirements

The A-GPS minimum performance requirements are defined by assuming that all relevant and valid assistance data is received by the MS in order to perform GPS measurements and/or position calculation. This clause does not include nor consider delays occurring in the various signalling interfaces of the network.

In the following subclauses the minimum performance requirements are based on availability of the assistance data information and messages defined in clauses M.5 and M.6.

### M.2.1 Sensitivity

A sensitivity requirement is essential for verifying the performance of A-GPS receiver in weak satellite signal conditions. In order to test the most stringent signal levels for the satellites the sensitivity test case is performed in AWGN channel. This test case verifies the performance of the first position estimate, when the MS is provided with only coarse time assistance and when it is additionally supplied with fine time assistance.

#### M.2.1.1 Coarse time assistance

In this test case 8 satellites are generated for the terminal. AWGN channel model is used.

**Table M.2-1: Test parameters**

| Parameters                             | Unit    | Value      |
|--|---------|------------|
| Number of generated satellites         | -       | 8          |
| HDOP Range                             | -       | 1.1 to 1.6 |
| Propagation conditions                 | -       | AWGN       |
| GPS Coarse time assistance error range | seconds | $\pm 2$    |
| GPS Signal for one satellites          | dBm     | -142       |
| GPS Signal for remaining satellites    | dBm     | -147       |

### M.2.1.1.1 Minimum Requirements (Coarse time assistance)

The position estimates shall meet the accuracy and response time specified in table M.2-2.

**Table M.2-2: Minimum requirements (coarse time assistance)**

| Success rate | 2-D position error | Max response time |
|--------------|--------------------|-------------------|
| 95 %         | 100 m              | 20 s              |

### M.2.1.2 Fine time assistance

This requirement is only valid for fine time assistance capable MSs. In this requirement 8 satellites are generated for the terminal. AWGN channel model is used.

**Table M.2-3: Test parameters for fine time assistance capable terminals**

| Parameters                             | Unit          | Value      |
|--|---------------|------------|
| Number of generated satellites         | -             | 8          |
| HDOP Range                             | -             | 1.1 to 1.6 |
| Propagation conditions                 | -             | AWGN       |
| GPS Coarse time assistance error range | seconds       | $\pm 2$    |
| GPS Fine time assistance error range   | $\mu\text{s}$ | $\pm 10$   |
| GPS Signal for all satellites          | dBm           | -147       |

### M.2.1.2.1 Minimum Requirements (Fine time assistance)

The position estimates shall meet the accuracy and response time requirements in table M.2-4.

**Table M.2-4: Minimum requirements for fine time assistance capable terminals**

| Success rate | 2-D position error | Max response time |
|--------------|--------------------|-------------------|
| 95 %         | 100 m              | 20 s              |

## M.2.2 Nominal Accuracy

Nominal accuracy requirement verifies the accuracy of A-GPS position estimate in ideal conditions. The primary aim of the test is to ensure good accuracy for a position estimate when satellite signal conditions allow it. This test case verifies the performance of the first position estimate.

In this requirement 8 satellites are generated for the terminal. AWGN channel model is used.

**Table M.2-5: Test parameters**

| Parameters                             | Unit    | Value      |
|--|---------|------------|
| Number of generated satellites         | -       | 8          |
| HDOP Range                             | -       | 1.1 to 1.6 |
| Propagation conditions                 | -       | AWGN       |
| GPS Coarse time assistance error range | seconds | $\pm 2$    |
| GPS Signal for all satellites          | dBm     | -130       |

### M.2.2.1 Minimum requirements (nominal accuracy)

The position estimates shall meet the accuracy and response time requirements in table M.2-6.

**Table M.2-6: Minimum requirements**

| Success rate | 2-D position error | Max response time |
|--------------|--------------------|-------------------|
| 95 %         | 30 m               | 20 s              |

### M.2.3 Dynamic Range

The aim of a dynamic range requirement is to ensure that a GPS receiver performs well when visible satellites have rather different signal levels. Strong satellites are likely to degrade the acquisition of weaker satellites due to their cross-correlation products. Hence, it is important in this test case to keep use AWGN in order to avoid loosening the requirements due to additional margin because of fading channels. This test case verifies the performance of the first position estimate.

In this requirement 6 satellites are generated for the terminal. AWGN channel model is used.

**Table M.2-7: Test parameters**

| Parameters                               | Unit    | Value      |
|--|---------|------------|
| Number of generated satellites           | -       | 6          |
| HDOP Range                               | -       | 1.4 to 2.1 |
| GPS Coarse time assistance error range   | seconds | $\pm 2$    |
| Propagation conditions                   | -       | AWGN       |
| GPS Signal for 1 <sup>st</sup> satellite | dBm     | -129       |
| GPS Signal for 2 <sup>nd</sup> satellite | dBm     | -135       |
| GPS Signal for 3 <sup>rd</sup> satellite | dBm     | -141       |
| GPS Signal for 4 <sup>th</sup> satellite | dBm     | -147       |
| GPS Signal for 5 <sup>th</sup> satellite | dBm     | -147       |
| GPS Signal for 6 <sup>th</sup> satellite | dBm     | -147       |

#### M.2.3.1 Minimum requirements (dynamic range)

The position estimates shall meet the accuracy and response time requirements in table M.2-8.

**Table M.2-8: Minimum requirements**

| Success rate | 2-D position error | Max response time |
|--------------|--------------------|-------------------|
| 95 %         | 100 m              | 20 s              |

### M.2.4 Multi-Path scenario

The purpose of the test case is to verify the receiver's tolerance to multipath while keeping the test setup simple. This test case verifies the performance of the first position estimate.

In this requirement 5 satellites are generated for the terminal. Two of the satellites have one tap channel representing Line-Of-Sight (LOS) signal. The three other satellites have two-tap channel, where the first tap represents LOS signal and the second reflected and attenuated signal as specified in Case G1 in subclause M.4.2.

**Table M.2-9: Test parameters**

| Parameters   | Unit    | Value   |
|--|---------|---|
| Number of generated satellites (Satellites 1, 2 unaffected by multi-path)<br>(Satellites 3, 4, 5 affected by multi-path) | -       | 5   |
| GPS Coarse time assistance error range   | seconds | $\pm 2$   |
| HDOP Range   | -       | 1.8 to 2.5  |
| Satellite 1, 2 signal  | dBm     | -130  |
| Satellite 3, 4, 5 signal   | dBm     | LOS signal of -130 dBm, multi-path signal of -136 dBm |

### M.2.4.1 Minimum Requirements (multi-path scenario)

The position estimates shall meet the accuracy and response time requirements in table M.2-10.

**Table M.2-10: Minimum requirements**

| Success rate | 2-D position error | Max response time |
|--------------|--------------------|-------------------|
| 95 %         | 100 m              | 20 s              |

## M.2.5 Moving scenario and periodic location

This test case only applies to MSs supporting Rel-7 or later Supplementary Services.

The purpose of the test case is to verify the receiver's capability to produce GPS measurements or location fixes on a regular basis, and to follow when it is located in a vehicle that slows down, turns or accelerates. A good tracking performance is essential for a certain location services. A moving scenario with periodic location is well suited for verifying the tracking capabilities of an A-GPS receiver in changing MS speed and direction. In the requirement the MS moves on a rectangular trajectory, which imitates urban streets. AWGN channel model is used. This test is not performed as a Time to First Fix (TTFF) test.

In this requirement 5 satellites are generated for the terminal. The MS is requested to use periodic location reporting with a reporting interval of 2 seconds.

The MS moves on a rectangular trajectory of 940 m by 1 440 m with rounded corner defined in figure M.2-1. The initial reference is first defined followed by acceleration to final speed of 100 km/h in 250 m. The MS then maintains the speed for 400 m. This is followed by deceleration to final speed of 25 km/h in 250 m. The MS then turn 90 degrees with turning radius of 20 m at 25 km/h. This is followed by acceleration to final speed of 100 km/h in 250 m. The sequence is repeated to complete the rectangle.

**Table M.2-11: Trajectory Parameters**

| Parameter                        | Distance (m) | Speed (km/h)            |
|----------------------------------|--------------|-------------------------|
| $l_{11}, l_{15}, l_{21}, l_{25}$ | 20           | 25                      |
| $l_{12}, l_{14}, l_{22}, l_{24}$ | 250          | 25 to 100 and 100 to 25 |
| $l_{13}$                         | 400          | 100                     |
| $l_{23}$                         | 900          | 100                     |

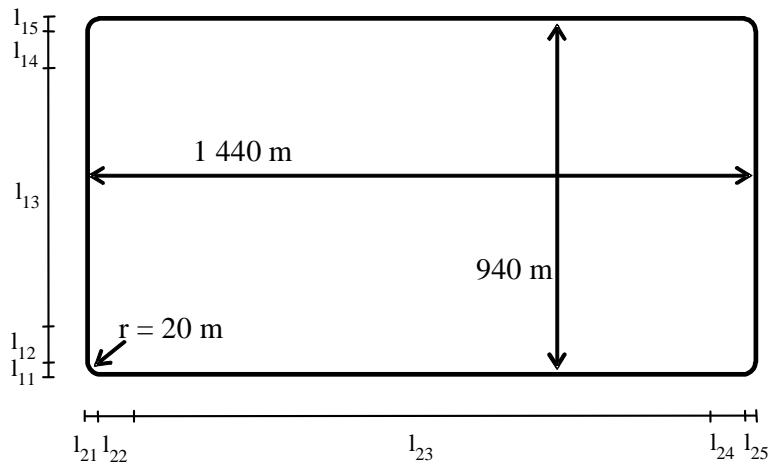


Figure M.2-1: Rectangular trajectory of the moving scenario and periodic location test case

Table M.2-12: Test Parameters

| Parameters                     | Unit | Value      |
|--------------------------------|------|------------|
| Number of generated satellites | -    | 5          |
| HDOP Range                     | -    | 1.8 to 2.5 |
| Propagation condition          | -    | AWGN       |
| GPS signal for all satellites  | dBm  | -130       |

### M.2.5.1 Minimum Requirements (moving scenario and periodic location)

The position estimates shall meet the accuracy requirement of table M.2-13 with the periodic location reporting interval defined in table M.2-13 after the first reported position estimates.

NOTE: In the actual testing the MS may report error messages until it has been able to acquire GPS measured results or a position estimate. The test equipment shall only consider the first measurement report different from an error message as the first position estimate in the requirement in table M.2-13.

Table M.2-13: Minimum requirements

| Success Rate | 2-D position error | Periodic location reporting interval |
|--------------|--------------------|--------------------------------------|
| 95 %         | 100 m              | 2 s                                  |

## M.3 Test conditions

### M.3.1 General

This clause specifies the additional parameters that are needed for the test cases specified in clause M.2 and applies to all tests unless otherwise stated.

#### M.3.1.1 Parameter values

Additionally, amongst all the listed parameters (see clause M.6), the following values for some important parameters are to be used in the MEASURE POSITION REQUEST message.

**Table M.3-1: Parameter values**

| Information element    | Value (except nominal accuracy test) | Value (nominal accuracy test) |
|------------------------|--------------------------------------|-------------------------------|
| Required Response Time | 20s                                  | 20s                           |
| Accuracy               | 51.2 m                               | 16 m                          |

For the Moving scenario and periodic location test the following values for some important parameters are to be used in the REGISTER message.

**Table M.3-2: Parameter values for Moving scenario and periodic location test**

| Information element | Value                           |
|---------------------|---------------------------------|
| Reporting Amount    | To cover the required test time |
| Reporting Interval  | 2s                              |

### M.3.1.2 Time assistance

For every Test Instance in each test case, the IE GPS TOW shall have a random offset, relative to GPS system time, within the error range of Coarse Time Assistance defined in the test case. This offset value shall have a uniform random distribution.

In addition, for every Fine Time Assistance Test Instance the IE BN shall have a random offset, relative to the true value of the relationship between the two time references, within the error range of Fine Time Assistance defined in the test case. This offset value shall have a uniform random distribution.

### M.3.1.3 GPS Reference Time

For every Test Instance in each test case, the GPS reference time shall be advanced so that, at the time the fix is made, it is at least 2 minutes later than the previous fix.

### M.3.1.4 Reference and MS locations

There is no limitation on the selection of the reference location, consistent with achieving the required HDOP for the Test Case. For each test instance the reference location shall change sufficiently such that the MS shall have to use the new assistance data. The uncertainty of the semi-major axis is 3 km. The uncertainty of the semi-minor axis is 3 km. The orientation of major axis is 0 degrees. The uncertainty of the altitude information is 500 m. The confidence factor is 68 %.

For every Test Instance in each test case, the MS location shall be randomly selected to be within 3 km of the Reference Location. The Altitude of the MS shall be randomly selected between 0 m to 500 m above WGS-84 reference ellipsoid. These values shall have uniform random distributions.

### M.3.1.5 Satellite constellation and assistance data

The satellite constellation shall consist of 24 satellites. Almanac assistance data shall be available for all these 24 satellites. At least 9 of the satellites shall be visible to the MS (that is above 5 degrees elevation with respect to the MS). Other assistance data shall be available for 9 of these visible satellites. In each test, signals are generated for only a sub-set of these satellites for which other assistance data is available. The number of satellites in this sub-set is specified in the test. The satellites in this sub-set shall all be above 15 degrees elevation with respect to the MS. The HDOP for the test shall be calculated using this sub-set of satellites. The selection of satellites for this sub-set shall be random and consistent with achieving the required HDOP for the test.

### M.3.1.6 Atmospheric delays

Typical Ionospheric and Tropospheric delays shall be simulated and the corresponding values inserted into the Ionospheric Model IEs.

### M.3.1.7 GSM Frequency and frequency error

In all test cases the GSM frequency used shall be the mid range for the GSM operating band. The GSM frequency with respect to the GPS carrier frequency shall be offset by +0.025 PPM.

### M.3.1.8 Information elements

The information elements that are available to the MS in all the test cases are listed in clause M.6.

### M.3.1.9 GPS signals

The GPS signal is defined at the A-GPS antenna connector of the MS. For MS with integral antenna only, a reference antenna with a gain of 0 dBi is assumed.

### M.3.1.10 RESET MS POSITIONING STORED INFORMATION Message

In order to ensure each Test Instance in each test is performed under Time to First Fix (TTFF) conditions, a dedicated test signal (*RESET MS POSITIONING STORED INFORMATION*) defined in TS 44.014 shall be used.

When the MS receives the '*RESET MS POSITIONING STORED INFORMATION*' signal, with the IE *MS POSITIONING TECHNOLOGY* set to *AGPS* it shall:

- discard any internally stored GPS reference time, reference location, and any other aiding data obtained or derived during the previous test instance (e.g. expected ranges and Doppler);
- accept or request a new set of reference time or reference location or other required information, as in a TTFF condition;
- calculate the position or perform GPS measurements using the 'new' reference time or reference location or other information.

---

## M.4 Propagation Conditions

### M.4.1 Static propagation conditions

The propagation for the static performance measurement is an Additive White Gaussian Noise (AWGN) environment. No fading and multi-paths exist for this propagation model.

### M.4.2 Multi-path Case G1

Doppler frequency difference between direct and reflected signal paths is applied to the carrier and code frequencies. The Carrier and Code Doppler frequencies of LOS and multi-path for GPS L1 signal are defined in table M.4-1.

**Table M.4-1: Case G1**

| Initial relative Delay<br>[GPS chip] | Carrier Doppler<br>frequency of tap [Hz] | Code Doppler<br>frequency of tap [Hz] | Relative mean Power<br>[dB] |
|--------------------------------------|--|---------------------------------------|-----------------------------|
| 0                                    | $F_d$                                    | $F_d / N$                             | 0                           |
| 0.5                                  | $F_d - 0.1$                              | $(F_d - 0.1) / N$                     | -6                          |

NOTE: Discrete Doppler frequency is used for each tap.

$N = f_{\text{GPSL1}} / f_{\text{chip}}$ , where  $f_{\text{GPSL1}}$  is the nominal carrier frequency of the GPS L1 signal (1575.42 MHz) and  $f_{\text{chip}}$  is the GPS L1 C/A code chip rate (1.023 Mchips/s).

The initial carrier phase difference between taps shall be randomly selected between  $[0, 2\pi]$ . The initial value shall have uniform random distribution.



## M.5 Measurement sequence chart

### M.5.1 General

The measurement Sequence Charts that are required in all the proposed test cases, are defined in this clause.

### M.5.2 MS Based A-GPS Measurement Sequence Chart

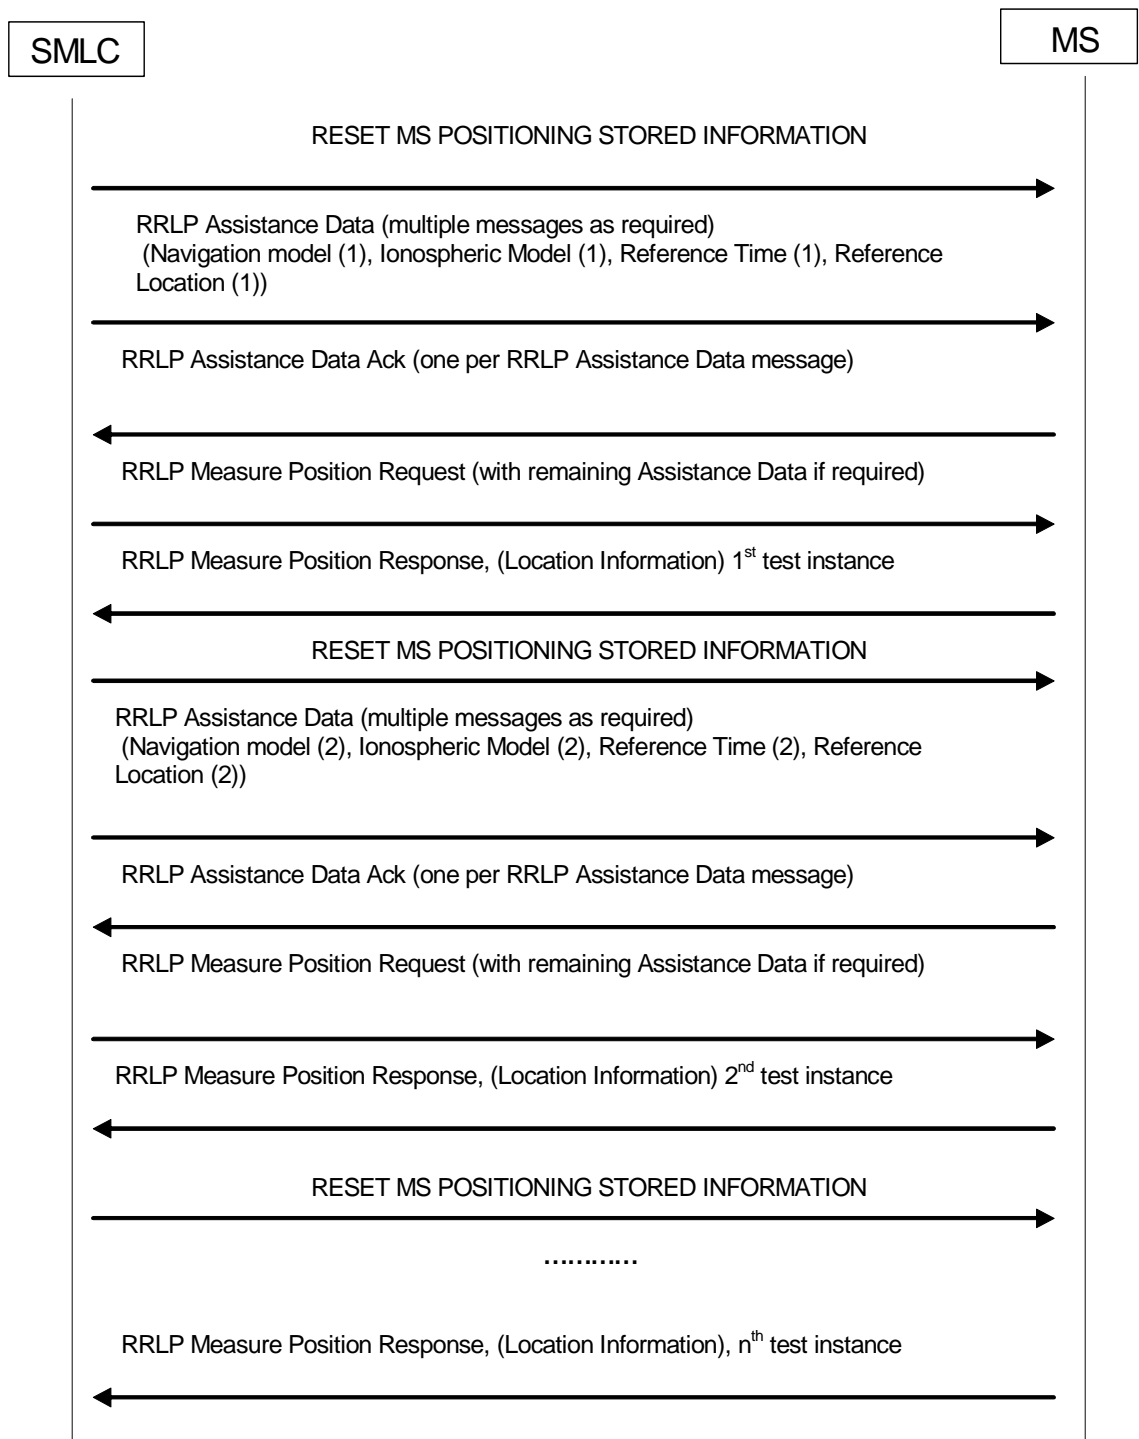


Figure M.5-1: MS-Based A-GPS Message Sequence

### M.5.3 MS Assisted A-GPS Measurement Sequence Chart

The assistance data requested by the MS and provided by the SMLC in this sequence of messages shall be selected from among those information elements described as available in clause M.6.

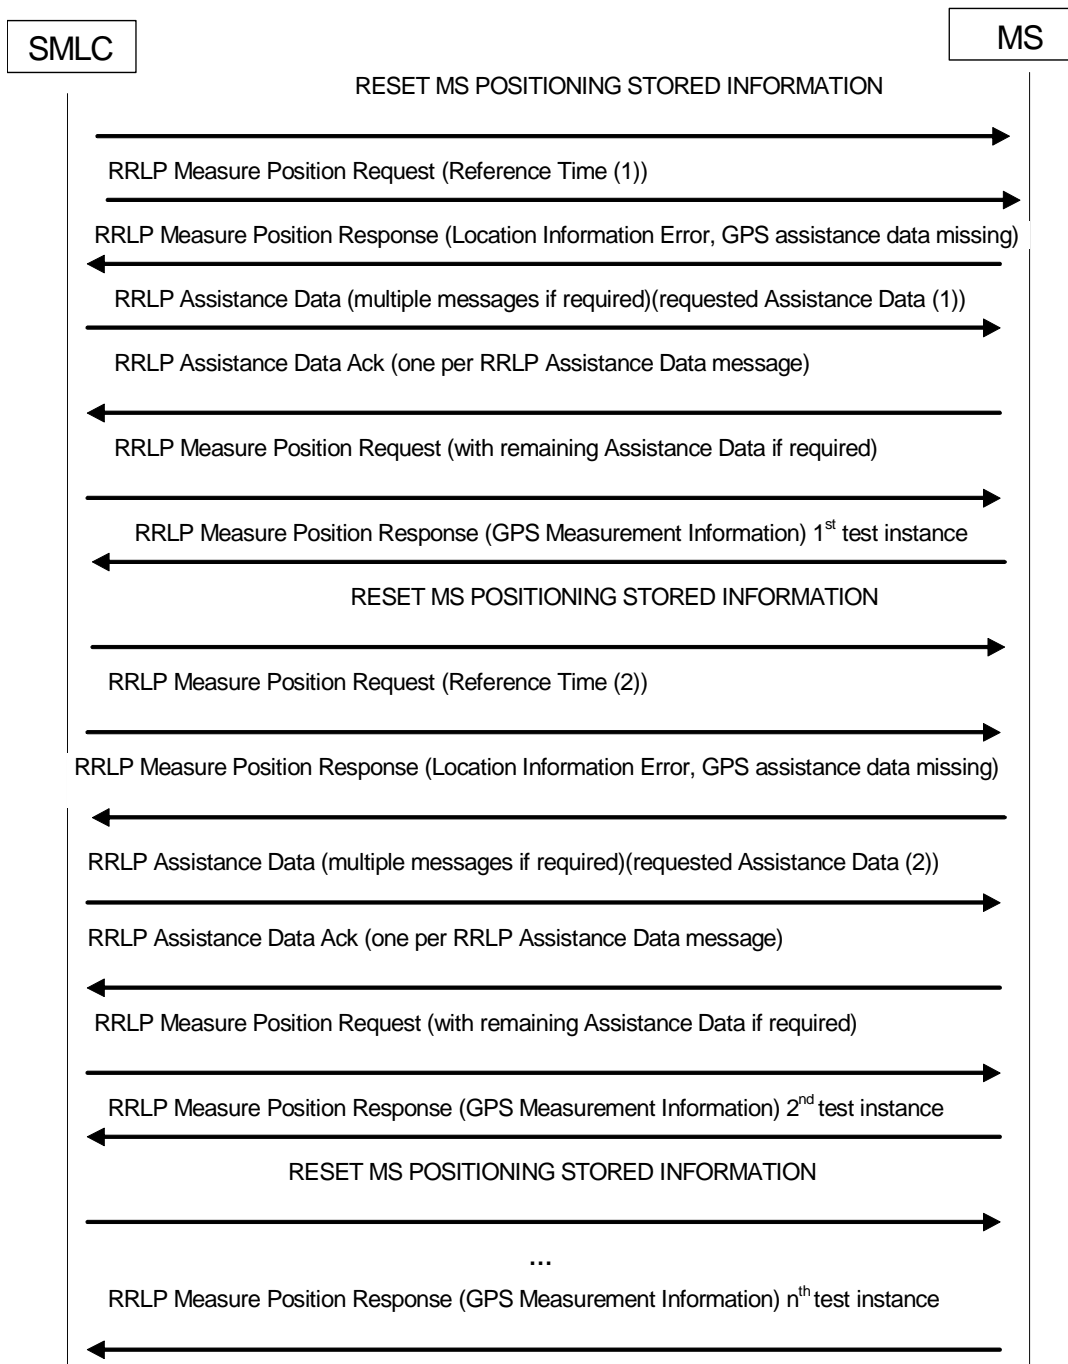


Figure M.5-2: MS-Assisted A-GPS Message Sequence

## M.6 Assistance data required for testing

### M.6.1 Introduction

This clause defines the assistance data IEs available in all test cases. The assistance data shall be given for satellites as defined in subclause M.3.1.5.

The information elements are given with reference to 3GPP TS 44.031, where the details are defined.

Subclause M.6.2 lists the assistance data IEs required for testing of MS-based mode, and subclause M.6.3 lists the assistance data available for testing of MS-assisted mode.

### M.6.2 Information elements required for MS-based

The following GPS assistance data IEs shall be present for each test:

- a) **Reference Time IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

**Table M.6-1: Reference Time IE**

| Name of the IE | Fields of the IE | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|----------------|------------------|---|---------------------------------------|
| Reference Time |                  |   |                                       |
|                | GPS Week         | Yes   | Yes                                   |
|                | GPS TOW          | Yes   | Yes                                   |
|                | BCCH Carrier     |   | Yes                                   |
|                | BSIC             |   | Yes                                   |
|                | FNm              |   | Yes                                   |
|                | TN               |   | Yes                                   |
|                | BN               |   | Yes                                   |
|                | GPS TOW Assist   | Yes   | Yes                                   |
|                | SatID            | Yes   | Yes                                   |
|                | TLM Message      | Yes   | Yes                                   |
|                | Anti-Spoof       | Yes   | Yes                                   |
|                | Alert            | Yes   | Yes                                   |
|                | TLM Reserved     | Yes   | Yes                                   |

- b) **Reference Location IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

**Table M.6-2: Reference Location IE**

| Name of the IE     | Fields of the IE  | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|--------------------|---|---|---------------------------------------|
| Reference Location | Ellipsoid point with Altitude and uncertainty ellipsoid | Yes   | Yes                                   |

- c) **Navigation Model IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031. The Navigation model will be chosen for the reference time and reference position.

**Table M.6-3: Navigation Model IE**

| Name of the IE   | Fields of the IE | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|------------------|------------------|---|---------------------------------------|
| Navigation Model |                  | Yes   | Yes                                   |

- d) **Ionospheric Model IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

**Table M.6-4: Ionospheric Model IE**

| Name of the IE    | Fields of the IE | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|-------------------|------------------|---|---------------------------------------|
| Ionospheric Model |                  | Yes   | Yes                                   |

### M.6.3 Information elements available for MS-assisted

The following GPS assistance data IEs shall be available for each test:

- a) **Reference Time IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

**Table M.6-5: Reference Time IE**

| Name of the IE | Fields of the IE | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|----------------|------------------|---|---------------------------------------|
| Reference Time |                  |   |                                       |
|                | GPS Week         | Yes   | Yes                                   |
|                | GPS TOW          | Yes   | Yes                                   |
|                | BCCH Carrier     |   | Yes                                   |
|                | BSIC             |   | Yes                                   |
|                | FNm              |   | Yes                                   |
|                | TN               |   | Yes                                   |
|                | BN               |   | Yes                                   |
|                | GPS TOW Assist   | Yes   | Yes                                   |
|                | SatID            | Yes   | Yes                                   |
|                | TLM Message      | Yes   | Yes                                   |
|                | Anti-Spoof       | Yes   | Yes                                   |
|                | Alert            | Yes   | Yes                                   |
|                | TLM Reserved     | Yes   | Yes                                   |

- b) **Reference Location IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

**Table M.6-6: Reference Location IE**

| Name of the IE     | Fields of the IE  | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|--------------------|---|---|---------------------------------------|
| Reference Location | Ellipsoid point with Altitude and uncertainty ellipsoid | Yes   | Yes                                   |

- c) **Almanac IE** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031. The Almanac shall be chosen for the reference time.

**Table M.6-7: Almanac IE**

| Name of the IE | Fields of the IE       | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|----------------|------------------------|---|---------------------------------------|
| Almanac        |                        |   |                                       |
|                | Almanac Reference Week | Yes   | Yes                                   |
|                | Satellite information  | Yes   | Yes                                   |

- d) **Navigation Model IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031. The Navigation model will be chosen for the reference time and reference position.

**Table M.6-8: Navigation Model IE**

| Name of the IE   | Fields of the IE | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|------------------|------------------|---|---------------------------------------|
| Navigation Model |                  | Yes   | Yes                                   |

- e) **Acquisition Assistance IE.** This information element is defined in subclause A.4.2.4 of 3GPP TS 44.031.

Table M.6-9: Acquisition Assistance IE

| Name of the IE         | Fields of the IE                     | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|------------------------|--------------------------------------|---|---------------------------------------|
| Acquisition Assistance |                                      |   |                                       |
|                        | GPS TOW                              | Yes   | Yes                                   |
|                        | BCCH Carrier                         |   | Yes                                   |
|                        | BSIC                                 |   | Yes                                   |
|                        | Frame #                              |   | Yes                                   |
|                        | Timeslots #                          |   | Yes                                   |
|                        | Bit #                                |   | Yes                                   |
|                        | Satellite information                | Yes   | Yes                                   |
|                        | SVID/PRNID                           | Yes   | Yes                                   |
|                        | Doppler (0 <sup>th</sup> order term) | Yes   | Yes                                   |
|                        | Doppler (1 <sup>st</sup> order term) | Yes   | Yes                                   |
|                        | Doppler Uncertainty                  | Yes   | Yes                                   |
|                        | Code Phase                           | Yes   | Yes                                   |
|                        | Integer Code Phase                   | Yes   | Yes                                   |
|                        | GPS Bit number                       | Yes   | Yes                                   |
|                        | Code Phase Search Window             | Yes   | Yes                                   |
|                        | Azimuth                              | Yes   | Yes                                   |
|                        | Elevation                            | Yes   | Yes                                   |

## M.7 Converting MS-assisted measurement reports into position estimates

### M.7.1 Introduction

To convert the MS measurement reports in case of MS-assisted mode of A-GPS into position errors, a transformation between the "measurement domain" (code-phases, etc.) into the "state" domain (position estimate) is necessary. Such a transformation procedure is outlined in the following clauses. The details can be found in [ICD-GPS 200], [P. Axelrad, R.G. Brown] and [S.K. Gupta].

### M.7.2 MS measurement reports

In case of MS-assisted A-GPS, the measurement parameters are contained in the RRLP GPS MEASUREMENT INFORMATION ELEMENT (subclause A.3.2.5 in 3GPP TS 44.031). The measurement parameters required for calculating the MS position are:

- 1) Reference Time: The MS has two choices for the Reference Time:
  - a) "Reference Frame";
  - b) "GPS TOW".
- 2) Measurement Parameters: 1 to <maxSat>:
  - a) "Satellite ID (SV PRN)";
  - b) "Whole GPS chips";
  - c) "Fractional GPS Chips";
  - d) "Pseudorange RMS Error".

Additional information required at the system simulator:

- 1) "Reference Location" (subclause A.4.2.4 in 3GPP TS 44.031):  
Used for initial approximate receiver coordinates.
- 2) "Navigation Model" (subclause A.4.2.4 in 3GPP TS 44.031):  
Contains the GPS ephemeris and clock correction parameters as specified in [ICD-GPS 200]; used for calculating the satellite positions and clock corrections.
- 3) "Ionospheric Model" (subclause A.4.2.4 in 3GPP TS 44.031):  
Contains the ionospheric parameters which allow the single frequency user to utilize the ionospheric model as specified in [ICD-GPS 200] for computation of the ionospheric delay.

### M.7.3 Weighted Least Squares (WLS) position solution

The WLS position solution problem is concerned with the task of solving for four unknowns;  $x_u$ ,  $y_u$ ,  $z_u$  the receiver coordinates in a suitable frame of reference (usually ECEF) and  $b_u$  the receiver clock bias. It typically requires the following steps:

#### Step 1: Formation of pseudo-ranges

The observation of code phase reported by the MS for each satellite  $SV_i$  is related to the pseudo-range/c modulo 1 ms (the length of the C/A code period). For the formation of pseudo-ranges, the integer number of milliseconds to be added to each code-phase measurement has to be determined first. Since 1 ms corresponds to a travelled distance of 300 km, the number of integer ms can be found with the help of reference location and satellite ephemeris. The distance between the reference location and each satellite  $SV_i$  is calculated and the integer number of milli-seconds to be added to the MS code phase measurements is obtained.

#### Step 2: Formation of weighting matrix

The MS reported "Pseudorange RMS Error" values are used to calculate the weighting matrix for the WLS algorithm described in [P. Axelrad, R.G. Brown]. According to 3GPP TS 44.031, the encoding for this field is a 6 bit value that consists of a 3 bit mantissa,  $X_i$  and a 3 bit exponent,  $Y_i$  for each  $SV_i$ :

$$w_i = RMSError = 0.5 \times \left( 1 + \frac{X_i}{8} \right) \times 2^{Y_i}$$

The weighting Matrix  $\mathbf{W}$  is defined as a diagonal matrix containing the estimated variances calculated from the "Pseudorange RMS Error" values:

$$\mathbf{W} = \text{diag}\left\{1/w_1^2, 1/w_2^2, \dots, 1/w_n^2\right\}$$

#### Step 3: WLS position solution

The WLS position solution is described in [P. Axelrad, R.G. Brown] and usually requires the following steps:

- 1) Computation of satellite locations at time of transmission using the ephemeris parameters and user algorithms defined in [ICD-GPS 200] section 20.3.3.4.3.
- 2) Computation of clock correction parameters using the parameters and algorithms as defined in [ICD-GPS 200] section 20.3.3.3.1.
- 3) Computation of atmospheric delay corrections using the parameters and algorithms defined in [ICD-GPS 200] section 20.3.3.5.2.5 for the ionospheric delay, and using the Gupta model defined in [S.K. Gupta] p. 121 equation (2) for the tropospheric delay.
- 4) The WLS position solution starts with an initial estimate of the user state (position and clock offset). The Reference Location is used as initial position estimate. The following steps are required:
  - a) Calculate geometric range (corrected for Earth rotation) between initial location estimate and each satellite included in the MS measurement report.

- b) Predict pseudo-ranges for each measurement including clock and atmospheric biases as calculated in 1) to 3) above and defined in [ICD-GPS 200] and [P. Axelrad, R.G. Brown].
- c) Calculate difference between predicted and measured pseudo-ranges  $\Delta\rho$
- d) Calculate the "Geometry Matrix"  $\mathbf{G}$  as defined in [P. Axelrad, R.G. Brown]:

$$\mathbf{G} \equiv \begin{bmatrix} -\hat{\mathbf{1}}_1^T & 1 \\ -\hat{\mathbf{1}}_2^T & 1 \\ \vdots & \vdots \\ -\hat{\mathbf{1}}_n^T & 1 \end{bmatrix} \text{ with } \hat{\mathbf{1}}_i \equiv \frac{\mathbf{r}_{si} - \hat{\mathbf{r}}_u}{|\mathbf{r}_{si} - \hat{\mathbf{r}}_u|} \text{ where } \mathbf{r}_{si} \text{ is the Satellite position vector for } SV_i \text{ (calculated in 1)}$$

above), and  $\hat{\mathbf{r}}_u$  is the estimate of the user location.

- e) Calculate the WLS solution according to [P. Axelrad, R.G. Brown]:

$$\Delta\hat{\mathbf{x}} = (\mathbf{G}^T \mathbf{W} \mathbf{G})^{-1} \mathbf{G}^T \mathbf{W} \Delta\rho$$

- f) Adding the  $\Delta\hat{\mathbf{x}}$  to the initial state estimate gives an improved estimate of the state vector:

$$\hat{\mathbf{x}} \rightarrow \hat{\mathbf{x}} + \Delta\hat{\mathbf{x}}.$$

- 5) This new state vector  $\hat{\mathbf{x}}$  can be used as new initial estimate and the procedure is repeated until the change in  $\hat{\mathbf{x}}$  is sufficiently small.

#### Step 4: Transformation from Cartesian coordinate system to Geodetic coordinate system

The state vector  $\hat{\mathbf{x}}$  calculated in Step 3 contains the MS position in ECEF Cartesian coordinates together with the MS receiver clock bias. Only the user position is of further interest. It is usually desirable to convert from ECEF coordinates  $x_w, y_w, z_w$  to geodetic latitude  $\varphi$ , longitude  $\lambda$  and altitude  $h$  on the WGS84 reference ellipsoid.

#### Step 5: Calculation of "2-D Position Errors"

The latitude  $\varphi$  / longitude  $\lambda$  obtained after Step 4 is used to calculate the 2-D position error.



# Annex N (normative): Reference Test Scenarios for DARP Phase II (MSRD)

## N.1 Interferer configurations

In all reference DARP Test Scenarios (DTS), the wanted signal shall always use Training Sequence (TSC) 0.

In each reference Test Scenario, the co-channel and adjacent channel interferers are GMSK modulated, except for DTS-1b where the cochannel interferer is 8-PSK modulated. The power of the interferers is measured before any receiver filtering and during the active part of the desired burst (see 3GPP TS 45.004). No Training Sequence Code (TSC) is used, and thus the midamble is filled with random data bits.

In some test scenarios an AWGN source is added to the interferers. The AWGN power is measured over a bandwidth of 270,833 kHz.

All power levels are relative to the signal level of the strongest co-channel interferer.

Power ramping according to the requirements in 3GPP TS 45.005 shall be applied to all delayed interferers. The other interferers shall be random, continuous GMSK-modulated signals.

NOTE: The non-delayed interferer is the same signal for which reference interference performance requirements normally apply (see clause 6.3).

In adjacent timeslots of the delayed interferers no power shall be applied.

The level of the strongest co-channel interferer (Co-channel 1) shall be -70 dBm.

The delay is measured from the same bit position in the wanted signal burst and the interferer burst, where the position in the wanted signal is the reference position.

**Table N.1-1 Reference Test Scenario for synchronous single co-channel interferer**

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay range |
|-------------------------|--------------------|---------------------------------|------|------------------------|
| DTS-1                   | Co-channel 1       | 0 dB                            | none | no delay               |
| DTS-1b                  | Co-channel 1 8PSK  | 0 dB                            | none | no delay               |

**Table N.1-2 Reference Test Scenarios for synchronous multiple interferers**

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay range |
|-------------------------|--------------------|---------------------------------|------|------------------------|
| DTS-2                   | Co-channel 1       | 0 dB                            | none | no delay               |
|                         | Co-channel 2       | -10 dB                          | none | no delay               |
|                         | Adjacent 1         | 3 dB                            | none | no delay               |
|                         | AWGN               | -17 dB                          | -    | -                      |

**Table N.1-3 Reference Test Scenario for asynchronous multiple interferers**

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay |
|-------------------------|--------------------|---------------------------------|------|------------------|
| DTS-5                   | Co-channel 1       | 0 dB *)                         | none | 74 symbols       |
|                         | Co-channel 2       | -10 dB                          | none | no delay         |
|                         | Adjacent 1         | 3 dB                            | none | no delay         |
|                         | AWGN               | -17 dB                          | -    | -                |

\*) The power of the delayed interferer burst, averaged over the active part of the wanted signal burst. The power of the delayed interferer burst, averaged over the active part of the delayed interferer burst is 3 dB higher.


## N.2 Correlation and antenna gain imbalance

Since a DARP phase II MS utilizes receiver diversity by means of two antennas, a set of diversity specific parameters have been defined. The sets consist of different values of antenna correlation and antenna gain imbalance.

**Table N.2-1 DARP phase II diversity parameters**

| Parameter set | Antenna correlation, $\rho$ | Antenna gain imbalance, $G$ |
|---------------|-----------------------------|-----------------------------|
| Set 1         | 0                           | 0 dB                        |
| Set 2         | 0.7                         | -6 dB                       |

The correlation is defined as the magnitude of the complex correlation of the signals received at the two antenna connectors of the MS. A correlation value of 0 means the signals are uncorrelated. The antenna gain imbalance parameter reflects the difference in received signal level at the two antenna connectors. Thus, a value of -6 dB means that the signal on one antenna is attenuated by 6 dB compared to the signal on the other connector. The channel model setup when applying these parameters is illustrated below, where the parameter,  $G$ , models the antenna gain imbalance and  $\rho$  is the antenna correlation.

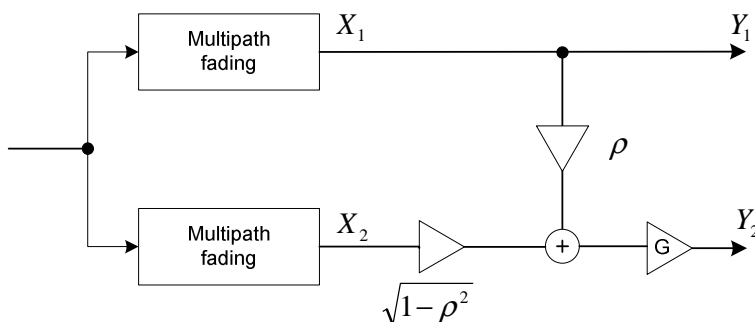

**Figure N.2.1: Single input - dual output channel model for MS Receiver Diversity – DARP ph II**

The model consists of a single input signal, which is passed through two fading channels. The multipath fading is independent Rayleigh fading processes but the channel profile, e.g. TU50 is the same for each branch. The correlation between the two branches is generated using the weighting factor,  $\rho$ , which as mentioned is the magnitude of the complex correlation. Antenna gain imbalance is applied by attenuating  $Y_1$  or  $Y_2$  by 6 dB as indicated by the  $G$  block on figure N.2.1.

The multi interferer scenarios (DTS-2 and DTS-5) are generated by expanding the single input-dual output model as shown below. The model uses instances of the single input dual output channel model to instantiate the interfering signals. For sensitivity tests the single input – dual output channel model of figure N.2.1 is sufficient.

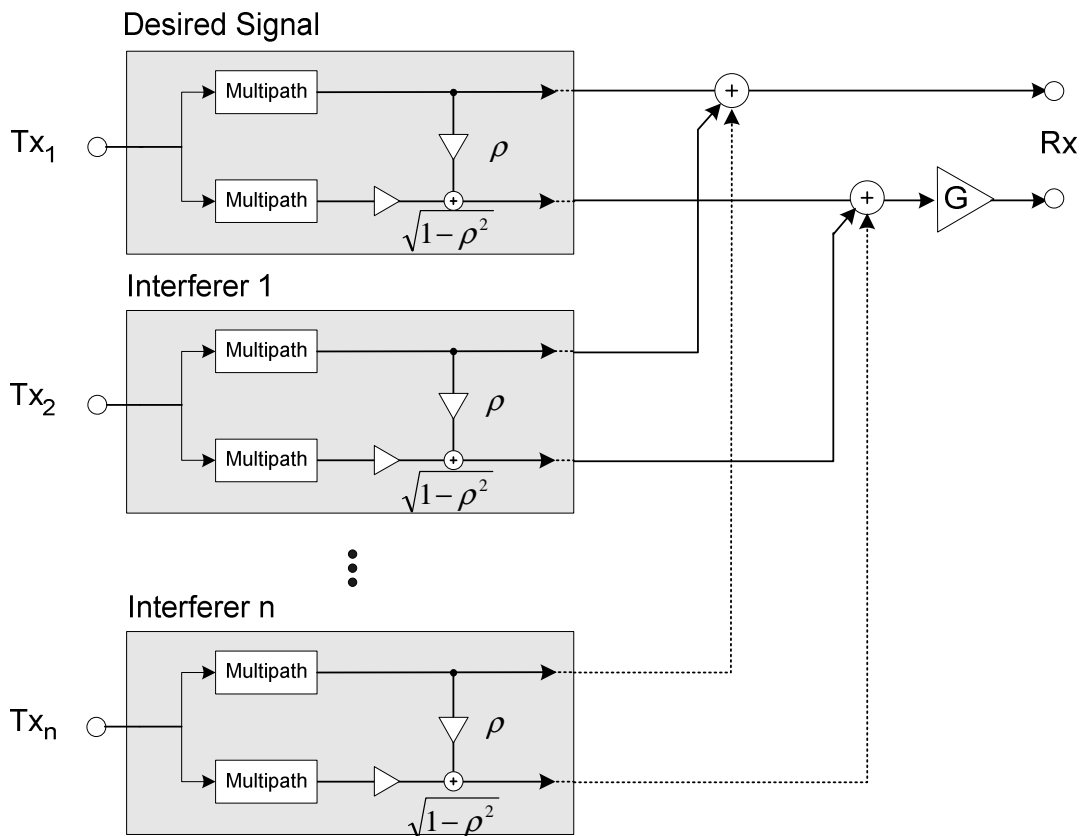


Figure N.2.2: Multi interferer model for MS Receiver Diversity – DARP ph II. The amplifier *G* represents the antenna gain imbalance parameter.

### N.3 Testing MSRD terminal conformance to legacy requirements

When testing the conformance of a dual antenna terminal against the single antenna requirements the following procedures shall be applied.

- For an MS that always applies MSRD, conformance to legacy requirements shall be tested by applying uncorrelated signals to the antenna connectors. This corresponds to setting  $\rho = 0$  and  $G = 0$  in the model shown in figure N.2.1 and thus reduces the model to the one shown in figure N.3.1.
- For an MS capable of switching between single and dual antenna reception conformance shall be tested by terminating one of the antenna connectors, as shown in figure N.3.2.


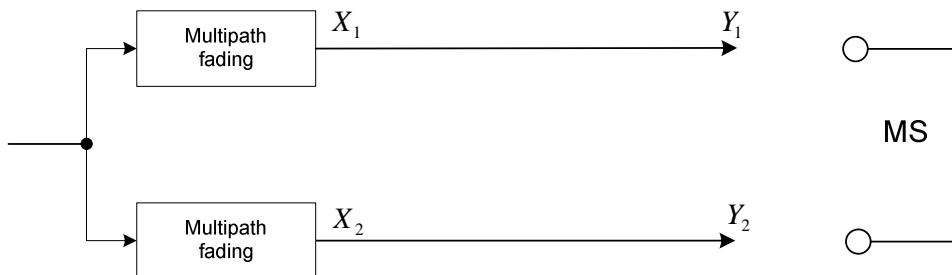


Figure N.3.1: Test setup when testing conformance to legacy requirements for MS having MSRD always enabled.

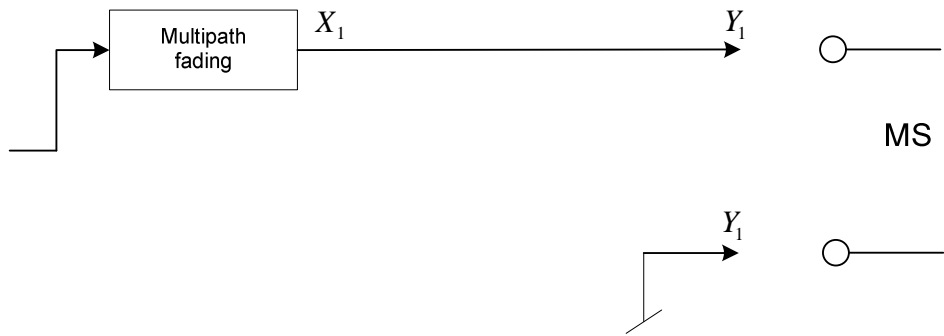

**Figure N.3.2: Test setup when testing conformance to legacy requirements for MS capable of switching between single and dual antenna reception.**

---

## Annex O (normative): Minimum Performance Requirements for Assisted Galileo and Additional Navigation Satellite Systems (A-GANSS)

This Annex defines the minimum performance requirements for A-GANSS for MSs that support A-GANSS. It includes the minimum performance requirements for both MS based and MS assisted A-GANSS terminals. The minimum performance requirements also include combinations of A-GPS and A-GANSS.

---

### O.1 General

#### O.1.1 Abbreviations

|         |  |
|---------|--|
| A-GANSS | Assisted - Galileo and Additional Navigation Satellite Systems |
| A-GNSS  | Assisted - Global Navigation Satellite Systems                 |
| A-GPS   | Assisted - Global Positioning System                           |
| AWGN    | Additive White Gaussian Noise                                  |
| C/A     | Coarse/Acquisition   |
| ECEF    | Earth Centred, Earth Fixed                                     |
| GPS     | Global Positioning System                                      |
| HDOP    | Horizontal Dilution Of Precision                               |
| LOS     | Line Of Sight  |
| TOD     | Time Of Day  |
| TOW     | Time Of Week   |
| TTFF    | Time To First Fix  |
| WLS     | Weighted Least Squares   |

#### O.1.2 Measurement parameters

##### O.1.2.1 MS based A-GANSS measurement parameters

In case of MS-based A-GANSS, the measurement parameters are contained in the RRLP GANSS LOCATION INFORMATION IE. The measurement parameter in case of MS-based A-GANSS is the horizontal position estimate reported by the MS and expressed in latitude/longitude.

##### O.1.2.2 MS assisted A-GANSS measurement parameters

In case of MS-assisted A-GANSS, the measurement parameters are contained in the RRLP GANSS MEASUREMENT INFORMATION IE. The measurement parameters in case of MS-assisted A-GANSS are the Code Phase Measurements. The MS GANSS Measurement parameters (reported in the GANSS MEASUREMENT INFORMATION IE) that may be combined with MS GPS Code Phase measurements are converted into a horizontal position estimate using the procedure detailed in clause O.7.

#### O.1.3 Response time

Max Response Time is defined as the time starting from the moment that the MS has received the final RRLP MEASURE POSITION REQUEST sent before the MS sends the MEASURE POSITION RESPONSE containing the Location Information or the GPS and GANSS Measurement Information, and ending when the MS starts sending the MEASURE POSITION RESPONSE containing the Location Information or the GPS and GANSS Measurement Information on the Air interface. The response times specified for all test cases are Time-to-First-Fix (TTFF) unless otherwise specified, i.e. the MS shall not re-use any information on GANSS time, location or other aiding data that was previously acquired or calculated and stored internally in the MS. A dedicated test message 'RESET MS POSITIONING STORED INFORMATION' has been defined in TS 44.014 for the purpose of deleting this information and is detailed in subclause O.3.1.10.

## O.1.4 Time assistance

Time assistance is the provision of GANSS reference time to the MS from the network via RRLP messages. Currently two different GANSS time assistance methods can be provided by the network.

- a) Coarse time assistance is always provided by the network and provides current GANSS time to the MS. The time provided is within  $\pm 2$  seconds of GANSS system time. It is signalled to the MS by means of the GANSS Day and GANSS TOD fields in the GANSS Reference Time assistance data IE.
- b) Fine time assistance is optionally provided by the network and adds the provision to the MS of the relationship between the selected GANSS system time and the current GSM time. The accuracy of this relationship is  $\pm 10 \mu\text{s}$  of the actual relationship. This addresses the case when the network can provide an improved GANSS time accuracy. It is signalled to the MS by means of the FNm, TN and BN fields in the GANSS Reference Time assistance data IE.

The specific GANSS system time is identified through the GANSS Time Id field of the GANSS Reference Time IE. In case where several GANSS are used in the tests, only one GANSS Time Id is used to determine the Time of Day. For all the constellations, the GANSS Time Model assistance and UTC Model assistance shall be available at the system simulator, as specified in subclause O.6.

The time of applicability of time assistance is the beginning of the Frame of the message containing the GANSS reference time.

### O.1.4.1 Use of fine time assistance

The use of fine time assistance to improve the GANSS performance of the MS is optional for the MS, even when fine time assistance is signalled by the network. Thus, there are a set minimum performance requirements defined for all MSs and additional minimum performance requirements that are valid for fine time assistance capable MSs only. These requirements are specified in subclause O.2.1.2.

## O.1.5 Error definitions

The 2D position error is defined by the horizontal difference in meters between the ellipsoid point reported or calculated from the MS MEASURE POSITION RESPONSE and the actual position of the MS in the test case considered.

## O.1.6 Mobile stations supporting multiple constellations

Minimum performance requirements are defined for each global GANSS constellation (Galileo, Modernized GPS, and GLONASS). Mobile stations supporting multiple global constellations shall meet the minimum performance requirements for a combined scenario where each MS supported constellation is simulated.

NOTE: For test cases where signals from 'GPS' and 'Modernized GPS' are included, 'GPS' and 'Modernized GPS' are considered as a single constellation, unless otherwise specified.

## O.1.7 Mobile stations supporting multiple signals

For mobile stations supporting multiple signals, different minimum performance requirements may be associated with different signals. The satellite simulator shall generate all signals supported by the MS. Signals not supported by the MS do not need to be simulated. The relative power levels of each signal type for each GNSS are defined in Table O.1-1. The individual test scenarios in clause O.2 define the reference signal power level for each satellite. The power level of each simulated satellite signal type shall be set to the reference signal power level defined in each test scenario in clause O.2 plus the relative power level defined in Table O.1-1.

**Table O.1-1: Relative signal power levels for each signal type for each GNSS**

|  | Galileo |       | GPS/Modernized GPS |         | GLONASS |       | QZSS   |         | SBAS   |       |
|--|---------|-------|--------------------|---------|---------|-------|--------|---------|--------|-------|
|  | Signal  | Power | Signal             | Power   | Signal  | Power | Signal | Power   | Signal | Power |
| Signal power levels relative to reference power levels | E1      | 0 dB  | L1 C/A             | 0 dB    | G1      | 0 dB  | L1 C/A | 0 dB    | L1     | 0 dB  |
|  | E6      | +2 dB | L1C                | +1.5 dB | G2      | -6 dB | L1C    | +1.5 dB |        |       |
|  | E5      | +2 dB | L2C                | -1.5 dB |         |       | L2C    | -1.5 dB |        |       |
|  |         |       | L5                 | +3.6 dB |         |       | L5     | +3.6 dB |        |       |

NOTE 1: For test cases which involve 'Modernized GPS', the satellite simulator shall also generate the GPS L1 C/A signal if the MS supports 'GPS' in addition to 'Modernized GPS'.

NOTE 2 : The signal power levels in the Test Parameter Tables represent the total signal power of the satellite per channel not e.g. pilot and data channels separately.

## O.2 A-GANSS minimum performance requirements

The A-GANSS minimum performance requirements are defined by assuming that all relevant and valid assistance data is received by the MS in order to perform GPS and GANSS measurements and/or position calculation. This clause does not include nor consider delays occurring in the various signalling interfaces of the network.

In the following subclauses the minimum performance requirements are based on availability of the assistance data information and messages defined in clauses O.5 and O.6.

### O.2.1 Sensitivity

A sensitivity requirement is essential for verifying the performance of A-GANSS receiver in weak satellite signal conditions. In order to test the most stringent signal levels for the satellites the sensitivity test case is performed in AWGN channel. This test case verifies the performance of the first position estimate, when the MS is provided with only coarse time assistance and when it is additionally supplied with fine time assistance.

#### O.2.1.1 Coarse time assistance

In this requirement 6 satellites are generated for the terminal. AWGN channel model is used.

**Table O.2-1: Test parameters**

| System  | Parameters                                | Unit    | Value           |
|---|---|---------|-----------------|
|   | Number of generated satellites per system | -       | See Table O.2-2 |
|   | Total number of generated satellites      | -       | 6               |
|   | HDOP range                                |         | 1.4 to 2.1      |
|   | Propagation conditions                    | -       | AWGN            |
|   | GANSS coarse time assistance error range  | seconds | ±2              |
| Galileo   | Reference high signal power level         | dBm     | -142            |
|   | Reference low signal power level          | dBm     | -147            |
| GPS <sup>(1)</sup>  | Reference high signal power level         | dBm     | -142            |
|   | Reference low signal power level          | dBm     | -147            |
| GLONASS   | Reference high signal power level         | dBm     | -142            |
|   | Reference low signal power level          | dBm     | -147            |
| NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities. |   |         |                 |

**Table O.2-2: Power level and satellite allocation**

|   |                   | Satellite allocation for each constellation |        |        |
|---|-------------------|---|--------|--------|
|   |                   | GNSS-1 <sup>(1)</sup>                       | GNSS-2 | GNSS-3 |
| Single constellation  | High signal level | 1   | -      | -      |
|   | Low signal level  | 5   | -      | -      |
| Dual constellation  | High signal level | 1   | -      | -      |
|   | Low signal level  | 2   | 3      | -      |
| Triple constellation  | High signal level | 1   | -      | -      |
|   | Low signal level  | 1   | 2      | 2      |
| Note 1: For GPS capable receivers, GNSS-1, i.e. the system having the satellite with high signal level, shall be GPS. |                   |   |        |        |

### O.2.1.1.1 Minimum Requirements (Coarse time assistance)

The position estimates shall meet the accuracy and response time specified in table O.2-3.

**Table O.2-3: Minimum requirements (coarse time assistance)**

| System | Success rate | 2-D position error | Max response time |
|--------|--------------|--------------------|-------------------|
| All    | 95 %         | 100 m              | 20 s              |

### O.2.1.2 Fine time assistance

This requirement is only valid for fine time assistance capable MSs. In this requirement 6 satellites are generated for the terminal. AWGN channel model is used.

**Table O.2-4: Test parameters**

| System  | Parameters                                | Unit    | Value           |
|---|---|---------|-----------------|
|   | Number of generated satellites per system | -       | See Table O.2-5 |
|   | Total number of generated satellites      | -       | 6               |
|   | HDOP range                                |         | 1.4 to 2.1      |
|   | Propagation conditions                    | -       | AWGN            |
|   | GANSS coarse time assistance error range  | seconds | ±2              |
|   | GANSS fine time assistance error range    | µs      | ±10             |
| Galileo   | Reference signal power level              | dBm     | -147            |
| GPS <sup>(1)</sup>  | Reference signal power level              | dBm     | -147            |
| GLONASS   | Reference signal power level              | dBm     | -147            |
| NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities. |   |         |                 |

**Table O.2-5: Satellite allocation**

|                      | Satellite allocation for each constellation |        |        |
|----------------------|---|--------|--------|
|                      | GNSS-1                                      | GNSS-2 | GNSS-3 |
| Single constellation | 6   | -      | -      |
| Dual constellation   | 3   | 3      | -      |
| Triple constellation | 2   | 2      | 2      |

### O.2.1.2.1 Minimum Requirements (Fine time assistance)

The position estimates shall meet the accuracy and response time specified in table O.2-6.



**Table O.2-6: Minimum requirements for fine time assistance capable terminals**

| System | Success rate | 2-D position error | Max response time |
|--------|--------------|--------------------|-------------------|
| All    | 95 %         | 100 m              | 20 s              |

## O.2.2 Nominal Accuracy

Nominal accuracy requirement verifies the accuracy of A-GANSS position estimate in ideal conditions. The primary aim of the test is to ensure good accuracy for a position estimate when satellite signal conditions allow it. This test case verifies the performance of the first position estimate.

In this requirement 6 satellites are generated for the terminal. If SBAS is to be tested one additional satellite shall be generated. AWGN channel model is used. The number of simulated satellites for each constellation is as defined in Table O.2-8.

**Table O.2-7: Test parameters**

| System  | Parameters                                      | Unit    | Value                 |
|---|---|---------|-----------------------|
|   | Number of generated satellites per system       | -       | See Table O.2-8       |
|   | Total number of generated satellites            | -       | 6 or 7 <sup>(2)</sup> |
|   | HDOP Range                                      | -       | 1.4 to 2.1            |
|   | Propagation conditions                          | -       | AWGN                  |
|   | GANSS coarse time assistance error range        | seconds | ±2                    |
| GPS <sup>(1)</sup>  | Reference signal power level for all satellites | dBm     | -128.5                |
| Galileo   | Reference signal power level for all satellites | dBm     | -127                  |
| GLONASS   | Reference signal power level for all satellites | dBm     | -131                  |
| QZSS  | Reference signal power level for all satellites | dBm     | -128.5                |
| SBAS  | Reference signal power level for all satellites | dBm     | -131                  |
| NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities. |   |         |                       |
| NOTE 2: 7 satellites apply only for SBAS case.  |   |         |                       |

If QZSS is supported, one of the GPS satellites will be replaced by a QZSS satellite with respective signal support.

If SBAS is supported, the SBAS satellite with the highest elevation will be added to the scenario.

**Table O.2-8: Satellite allocation**

|  | Satellite allocation for each constellation |                       |                       |      |
|--|---|-----------------------|-----------------------|------|
|  | GNSS 1 <sup>(1)</sup>                       | GNSS 2 <sup>(1)</sup> | GNSS 3 <sup>(1)</sup> | SBAS |
| Single constellation   | 6   | --                    | --                    | 1    |
| Dual constellation   | 3   | 3                     | --                    | 1    |
| Triple constellation   | 2   | 2                     | 2                     | 1    |
| NOTE1: GNSS refers to global systems i.e., GPS, Galileo, GLONASS |   |                       |                       |      |

### O.2.2.1 Minimum requirements (nominal accuracy)

The position estimates shall meet the 2-D accuracy and response time requirements in table O.2-9.

**Table O.2-9: Minimum requirements**

| System | Success rate | 2-D position error | Max response time |
|--------|--------------|--------------------|-------------------|
| All    | 95 %         | 15 m               | 20 s              |

## O.2.3 Dynamic Range

The aim of a dynamic range requirement is to ensure that a GNSS receiver performs well when visible satellites have rather different signal levels. Strong satellites are likely to degrade the acquisition of weaker satellites due to their cross-correlation products. Hence, it is important in this test case to use AWGN in order to avoid loosening the requirements due to additional margin because of fading channels. This test case verifies the performance of the first position estimate.

In this requirement 6 satellites are generated for the terminal. Two different reference power levels, denoted as 'high' and 'low' are used for each GNSS. The allocation of high and low power level satellites depends on the number of supported GNSSs and it is defined in Table O.2-11. AWGN channel model is used.

**Table O.2-10: Test parameters**

| System  | Parameters                                | Unit    | Value            |
|---|---|---------|------------------|
|   | Number of generated satellites per system | -       | See Table O.2-11 |
|   | Total number of generated satellites      | -       | 6                |
|   | HDOP Range                                | -       | 1.4 to 2.1       |
|   | Propagation conditions                    | -       | AWGN             |
|   | GNSS coarse time assistance error range   | seconds | ±2               |
| Galileo   | Reference high signal power level         | dBm     | -127,5           |
|   | Reference low signal power level          | dBm     | -147             |
| GPS <sup>(1)</sup>  | Reference high signal power level         | dBm     | -129             |
|   | Reference low signal power level          | dBm     | -147             |
| GLONASS   | Reference high signal power level         | dBm     | -131.5           |
|   | Reference low signal power level          | dBm     | -147             |
| NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities. |   |         |                  |

**Table O.2-11: Power level and satellite allocation**

|  |                   | Satellite allocation for each constellation |                       |                       |
|--|-------------------|---|-----------------------|-----------------------|
|  |                   | GNSS 1 <sup>(1)</sup>                       | GNSS 2 <sup>(1)</sup> | GNSS 3 <sup>(1)</sup> |
| Single constellation   | High signal level | 2   | --                    | --                    |
|  | Low signal level  | 4   | --                    | --                    |
| Dual constellation   | High signal level | 1   | 1                     | --                    |
|  | Low signal level  | 2   | 2                     | --                    |
| Triple constellation   | High signal level | 1   | 1                     | 1                     |
|  | Low signal level  | 1   | 1                     | 1                     |
| NOTE1: GNSS refers to global systems i.e., GPS, Galileo, GLONASS |                   |   |                       |                       |

### O.2.3.1 Minimum requirements (dynamic range)

The position estimates shall meet the accuracy and response time requirements in table O.2-12.

**Table O.2-12: Minimum requirements**

| System | Success rate | 2-D position error | Max response time |
|--------|--------------|--------------------|-------------------|
| All    | 95 %         | 100 m              | 20 s              |

## O.2.4 Multi-Path scenario

The purpose of the test is to verify the receiver's tolerance to multipath while keeping the test setup simple. This test verifies the performance of the first position estimate.

In this test 6 satellites are generated for the terminal. Some of the satellites have a one tap channel representing the Line-Of-Sight (LOS) signal. The other satellites have a two-tap channel, where the first tap represents the LOS signal and the second represents a reflected and attenuated signal as specified in subclause O.4.2. The number of satellites generated for each GNSS as well as the channel model used depends on the number of systems supported by the MS

and is defined in Table O.2-14. The channel model as specified in subclause O.4.2 further depends on the generated signal.

**Table O.2-13: Test parameters**

| System  | Parameters                                | Unit    | Value            |
|---|---|---------|------------------|
|   | Number of generated satellites per system | -       | See Table O.2-14 |
|   | Total number of generated satellites      | -       | 6                |
|   | HDOP range                                |         | 1.4 to 2.1       |
|   | Propagation conditions                    | -       | AWGN             |
|   | GANSS coarse time assistance error range  | seconds | ±2               |
| Galileo   | Reference signal power level              | dBm     | -127             |
| GPS <sup>(1)</sup>  | Reference signal power level              | dBm     | -128.5           |
| GLONASS   | Reference signal power level              | dBm     | -131             |
| NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities. |   |         |                  |

**Table O.2-14: Channel model allocation**

|                      |                 | Channel model allocation for each constellation |        |        |
|----------------------|-----------------|---|--------|--------|
|                      |                 | GNSS-1  | GNSS-2 | GNSS-3 |
| Single constellation | One-tap channel | 2   | --     | --     |
|                      | Two-tap channel | 4   | --     | --     |
| Dual constellation   | One-tap channel | 1   | 1      | --     |
|                      | Two-tap channel | 2   | 2      | --     |
| Triple constellation | One-tap channel | 1   | 1      | 1      |
|                      | Two-tap channel | 1   | 1      | 1      |

### O.2.4.1 Minimum Requirements (multi-path scenario)

The position estimates shall meet the accuracy and response time requirements in table O.2-15.

**Table O.2-15: Minimum requirements**

| System | Success rate | 2-D position error | Max response time |
|--------|--------------|--------------------|-------------------|
| All    | 95 %         | 100 m              | 20 s              |

## O.2.5 Moving scenario and periodic location

This test case only applies to MSs supporting Supplementary Services for periodic reporting.


The purpose of the test case is to verify the receiver's capability to produce GANSS measurements or location fixes on a regular basis, and to follow when it is located in a vehicle that slows down, turns or accelerates. A good tracking performance is essential for a certain location services. A moving scenario with periodic location is well suited for verifying the tracking capabilities of an A-GANSS receiver in changing MS speed and direction. In the requirement the MS moves on a rectangular trajectory, which imitates urban streets. AWGN channel model is used. This test is not performed as a Time to First Fix (TTFF) test.

In this test 6 satellites are generated for the terminal. The MS is requested to use periodic location reporting with a reporting interval of 2 seconds.

The MS moves on a rectangular trajectory of 940 m by 1 440 m with rounded corner defined in figure O.2-1. The initial reference is first defined followed by acceleration to final speed of 100 km/h in 250 m. The MS then maintains the speed for 400 m. This is followed by deceleration to final speed of 25 km/h in 250 m. The MS then turn 90 degrees with turning radius of 20 m at 25 km/h. This is followed by acceleration to final speed of 100 km/h in 250 m. The sequence is repeated to complete the rectangle.

**Table O.2-16: Trajectory Parameters**

| Parameter                        | Distance (m) | Speed (km/h)            |
|----------------------------------|--------------|-------------------------|
| $l_{11}, l_{15}, l_{21}, l_{25}$ | 20           | 25                      |
| $l_{12}, l_{14}, l_{22}, l_{24}$ | 250          | 25 to 100 and 100 to 25 |
| $l_{13}$                         | 400          | 100                     |
| $l_{23}$                         | 900          | 100                     |

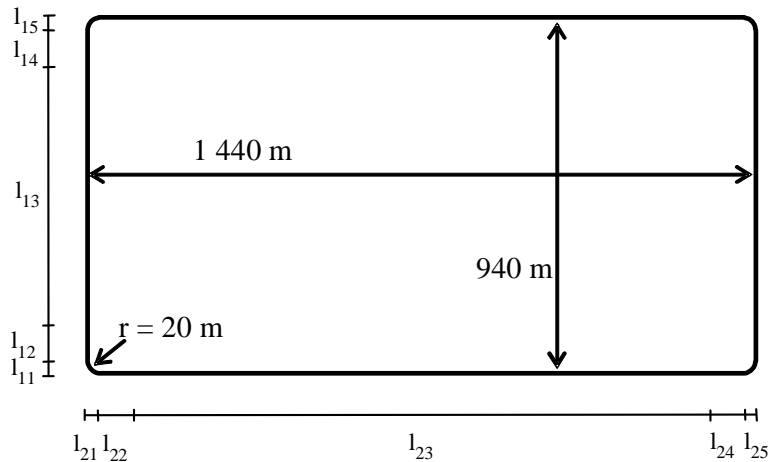

**Figure O.2-1: Rectangular trajectory of the moving scenario and periodic location test case**

**Table O.2-17: Test Parameters**

| System             | Parameters                                      | Unit    | Value            |
|--------------------|---|---------|------------------|
|                    | Number of generated satellites per system       | -       | See Table O.2-18 |
|                    | Total number of generated satellites            | -       | 6                |
|                    | HDOP Range per system                           | -       | 1.4 to 2.1       |
|                    | Propagation conditions                          | -       | AWGN             |
|                    | GANSS coarse time assistance error range        | seconds | $\pm 2$          |
| Galileo            | Reference signal power level for all satellites | dBm     | -127             |
| GPS <sup>(1)</sup> | Reference signal power level for all satellites | dBm     | -128.5           |
| GLONASS            | Reference signal power level for all satellites | dBm     | -131             |

NOTE 1: 'GPS' here means GPS L1 C/A, Modernized GPS, or both, dependent on MS capabilities.

**Table O.2-18: Satellite allocation**

|                      | Satellite allocation for each constellation |                       |                       |
|----------------------|---|-----------------------|-----------------------|
|                      | GNSS 1 <sup>(1)</sup>                       | GNSS 2 <sup>(1)</sup> | GNSS 3 <sup>(1)</sup> |
| Single constellation | 6   | --                    | --                    |
| Dual constellation   | 3   | 3                     | --                    |
| Triple constellation | 2   | 2                     | 2                     |

NOTE1: GNSS refers to global systems i.e., GPS, Galileo, GLONASS

### O.2.5.1 Minimum Requirements (moving scenario and periodic location)

The position estimates shall meet the accuracy requirement of table O.2-19 with the periodic location reporting interval defined in table O.2-19 after the first reported position estimates.

NOTE: In the actual testing the MS may report error messages until it has been able to acquire GANSS measured results or a position estimate. The test equipment shall only consider the first measurement report different from an error message as the first position estimate in the requirement in table O.2-19.

**Table O.2-19: Minimum requirements**

| System | Success rate | 2-D position error | Periodical reporting interval |
|--------|--------------|--------------------|-------------------------------|
| All    | 95 %         | 50 m               | 2 s                           |

## O.3 Test conditions

### O.3.1 General

This clause specifies the additional parameters that are needed for the test cases specified in clause O.2 and applies to all tests unless otherwise stated.

#### O.3.1.1 Parameter values

Additionally, amongst all the listed parameters (see clause O.6), the following values for some important parameters are to be used in the MEASURE POSITION REQUEST message.

**Table O.3-1: Parameter values**

| Information element    | Value (except nominal accuracy test) | Value (nominal accuracy test) |
|------------------------|--------------------------------------|-------------------------------|
| Required Response Time | 20s                                  | 20s                           |
| Accuracy               | 51.2 m                               | 7.7 m                         |

For the Moving scenario and periodic location test the following values for some important parameters are to be used in the REGISTER message.

**Table O.3-2: Parameter values for Moving scenario and periodic location test**

| Information element | Value                           |
|---------------------|---------------------------------|
| Reporting Amount    | To cover the required test time |
| Reporting Interval  | 2s                              |

#### O.3.1.2 Time assistance

For every Test Instance in each test case, the GANSS Reference Time shall have a random offset, relative to GANSS System Time, within the error range of Coarse Time Assistance defined in the test case. This offset value shall have a uniform random distribution.

In addition, for every Fine Time Assistance Test Instance the IE BN shall have a random offset, relative to the true value of the relationship between the two time references, within the error range of Fine Time Assistance defined in the test case. This offset value shall have a uniform random distribution.

#### O.3.1.3 GANSS Reference Time

For every Test Instance in each test case, the GANSS Reference Time shall be advanced so that, at the time the fix is made, it is at least 2 minutes later than the previous fix.

#### O.3.1.4 Reference and MS locations

There is no limitation on the selection of the reference location, consistent with achieving the required HDOP for the Test Case. For each test instance the reference location shall change sufficiently such that the MS shall have to use the new assistance data. The uncertainty of the semi-major axis is 3 km. The uncertainty of the semi-minor axis is 3 km.

The orientation of major axis is 0 degrees. The uncertainty of the altitude information is 500 m. The confidence factor is 68 %.

For every Test Instance in each test case, the MS location shall be randomly selected to be within 3 km of the Reference Location. The Altitude of the MS shall be randomly selected between 0 m to 500 m above WGS-84 reference ellipsoid. These values shall have uniform random distributions.

For test cases which include satellites from regional systems, such as QZSS and SBAS, the reference location shall be selected within the defined coverage area of the systems.

### O.3.1.5 Satellite constellation and assistance data

The satellite constellation shall consist of 24 satellites for GLONASS; 27 satellites for GPS, Modernized GPS and Galileo; 3 satellites for QZSS; and 2 satellites for SBAS. Almanac assistance data shall be available for all these satellites. At least 7 of the satellites per GPS, Modernized GPS, Galileo or GLONASS constellation shall be visible to the MS (that is, above 15 degrees elevation with respect to the MS). At least 1 of the satellites for QZSS shall be within 15 degrees of zenith; and at least 1 of the satellites for SBAS shall be visible to the MS. All other satellite specific assistance data shall be available for all visible satellites. In each test, signals are generated for only 6 satellites (or 7 if SBAS is included). The HDOP for the test shall be calculated using these satellites. The simulated satellites for GPS, Modernized GPS, Galileo and GLONASS shall be selected from the visible satellites for each constellation, consistent with achieving the required HDOP for the test.

### O.3.1.6 Atmospheric delays

Typical Ionospheric and Tropospheric delays shall be simulated and the corresponding values inserted into the Ionospheric Model IEs.

### O.3.1.7 Sensors

The minimum performances shall be met without the use of any data coming from sensors that can aid the positioning.

### O.3.1.8 Information elements

The information elements that are available to the MS in all the test cases are listed in clause O.6.

### O.3.1.9 GNSS signals

The GNSS signal is defined at the A-GNSS antenna connector of the MS. For MS with integral antenna only, a reference antenna with a gain of 0 dBi is assumed.

### O.3.1.10 RESET MS POSITIONING STORED INFORMATION Message

In order to ensure each test instance in each test is performed under Time to First Fix (TTFF) conditions, a dedicated test signal (*RESET MS POSITIONING STORED INFORMATION*) defined in TS 44.014 shall be used.

When the MS receives the '*RESET MS POSITIONING STORED INFORMATION*' signal, with the IE *MS POSITIONING TECHNOLOGY* set to *AGNSS* it shall:

- discard any internally stored GPS and GANSS reference time, reference location, and any other aiding data obtained or derived during the previous test instance (e.g. expected ranges and Doppler);
- accept or request a new set of reference time or reference location or other required information, as in a TTFF condition;
- calculate the position or perform GNSS measurements using the 'new' reference time or reference location or other information.

## O.3.2 GNSS System Time Offsets

If more than one GNSS is used in a test, the accuracy of the GNSS-GNSS Time Offsets used at the system simulator shall be better than 3 ns.

## O.4 Propagation Conditions

### O.4.1 Static propagation conditions

The propagation for the static performance measurement is an Additive White Gaussian Noise (AWGN) environment. No fading and multi-paths exist for this propagation model.

### O.4.2 Multi-path case

Doppler frequency difference between direct and reflected signal paths is applied to the carrier and code frequencies. The Carrier and Code Doppler frequencies of LOS and multi-path for GNSS signals are defined in table O.4-1.

**Table O.4-1: Multipath Case**

| Initial Relative Delay [m] | Carrier Doppler frequency of tap [Hz] | Code Doppler frequency of tap [Hz] | Relative mean Power [dB] |
|----------------------------|---------------------------------------|------------------------------------|--------------------------|
| 0                          | Fd                                    | Fd / N                             | 0                        |
| X                          | Fd-0.1                                | (Fd-0.1) / N                       | Y                        |

NOTE: Discrete Doppler frequency is used for each tap.

Where the X and Y depends on the GNSS signal type and is shown in Table O.4-2, and N is the ratio between the transmitted carrier frequency of the signals and the transmitted chip rate as shown in Table O.4-3 (where k in Table O.4-3 is the GLONASS frequency channel number).

**Table O.4-2**

| System             | Signals | X [m] | Y [dB] |
|--------------------|---------|-------|--------|
| Galileo            | E1      | 125   | -4.5   |
|                    | E5a     | 15    | -6     |
|                    | E5b     | 15    | -6     |
| GPS/Modernized GPS | L1 C/A  | 150   | -6     |
|                    | L1C     | 125   | -4.5   |
|                    | L2C     | 150   | -6     |
| GLONASS            | L5      | 15    | -6     |
|                    | G1      | 275   | -12.5  |
|                    | G2      | 275   | -12.5  |

**Table O.4-3**

| System             | Signals | N                        |
|--------------------|---------|--------------------------|
| Galileo            | E1      | 1540                     |
|                    | E5a     | 115                      |
|                    | E5b     | 118                      |
| GPS/Modernized GPS | L1 C/A  | 1540                     |
|                    | L1C     | 1540                     |
|                    | L2C     | 1200                     |
|                    | L5      | 115                      |
| GLONASS            | G1      | $3135.03 + k \cdot 1.10$ |
|                    | G2      | $2438.36 + k \cdot 0.86$ |

The initial carrier phase difference between taps shall be randomly selected between 0 and  $2\pi$ . The initial value shall have uniform random distribution.


## O.5 Measurement sequence chart

### O.5.1 General

The measurement sequence charts that are required in all the test cases are defined in this clause.

### O.5.2 TTFF Measurement Sequence Chart

The measurement sequence chart for the TTFF test cases, for both MS-assisted and MS-based GANSS, is defined in this subclause.

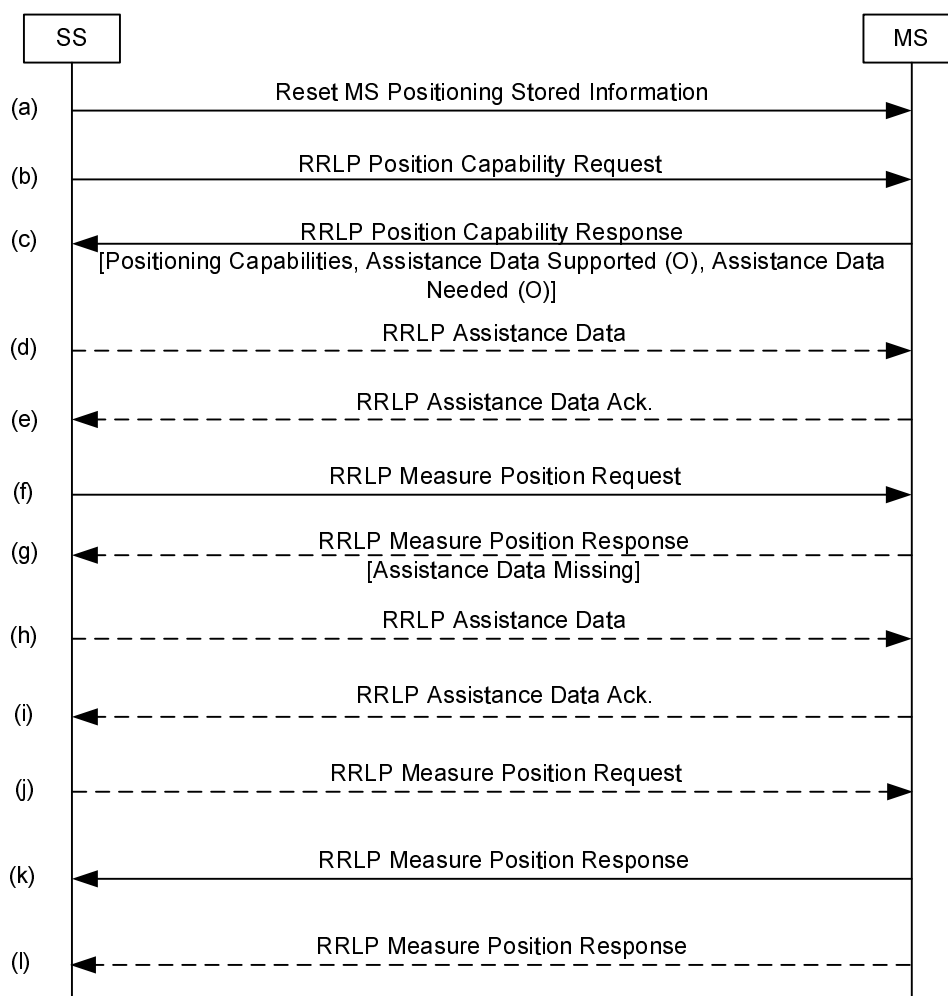

- (a) The system simulator sends a RESET MS POSITIONING STORED INFORMATION message with the IE *MS POSITIONING TECHNOLOGY* set to *AGNSS*.
- (b) The system simulator sends a RRLP POSITION CAPABILITY REQUEST message.
- (c) The MS responds with a RRLP POSITION CAPABILITY RESPONSE message, which includes the MS supported positioning methods, and may include a list of MS supported and MS needed assistance data.
- (d) If the MS at step (c) indicated needed assistance data, the system simulator provides the requested assistance data that are available as defined in subclause O.6 in one or more RRLP ASSISTANCE DATA messages.



- (e) Each RRLP ASSISTANCE DATA message is acknowledged by the MS.
- (f) The system simulator sends a RRLP MEASURE POSITION REQUEST message including the following information elements:

|                                 |  |
|---------------------------------|--|
| <i>METHOD TYPE</i>              | set to either "MS assisted" or "MS based", dependent on the test case; |
| <i>POSITIONING METHODS</i>      | set to "GPS";  |
| <i>RESPONSE TIME</i>            | set to 16 seconds;   |
| <i>ACCURACY</i>                 | as defined in subclause O.3.1.1;                                       |
| <i>MULTIPLE SETS</i>            | set to "1";  |
| <i>GANSS POSITIONING METHOD</i> | set according to the MS capabilities and test case;                    |
| <i>REQUIRED RESPONSE TIME</i>   | as defined in subclause O.3.1.1.                                       |

- (g) The MS may respond with a RRLP MEASURE POSITION RESPONSE message including the *LOCATION INFORMATION ERROR* IE with "Error Reason" set to "GANSS assistance data missing", and including a request for additional GPS and/or GANSS assistance data.
- (h) If the MS requested additional assistance data at step (g), the system simulator provides the requested assistance data that are available as defined in subclause O.6 in one or more RRLP ASSISTANCE DATA messages.
- (i) Each RRLP ASSISTANCE DATA message is acknowledged by the MS.
- (j) If the MS requested additional assistance data at step (g), the system simulator sends a RRLP MEASURE POSITION REQUEST message with information elements included as specified in step (f).
- (k) The MS sends a RRLP MEASURE POSITION RESPONSE message including the *GANSS LOCATION INFORMATION* IE in case of MS-based GANSS, or including the *GPS MEASUREMENT INFORMATION* and/or *GANSS MEASUREMENT INFORMATION* IE in case of MS-assisted GANSS.
- (l) The MS may send one additional RRLP MEASURE POSITION RESPONSE message if the amount of measurement information it needs to send is too large to fit into one single message.

Steps (a) to (l) are repeated for each test instance.

---

## O.6 Assistance data required for testing

This clause defines the assistance data IEs available in all test cases. The assistance data shall be given for satellites as defined in subclause O.3.1.5.

The information elements are given with reference to 3GPP TS 44.031, where the details are defined.

### O.6.1 GPS assistance data

As defined in Annex M.6.

### O.6.2 GANSS assistance data

- e) **GANSS Reference Time IE.** This information element is defined in subclause A.4.2.6.1 of 3GPP TS 44.031.

**Table O.6-1: GANSS Reference Time IE**

| Name of the IE       | Fields of the IE      | All tests except Sensitivity Fine Time Assistance | Sensitivity Fine Time Assistance test |
|----------------------|-----------------------|---|---------------------------------------|
| GANSS Reference Time |                       |   |                                       |
|                      | GANSS Day             | Yes   | Yes                                   |
|                      | GANSS TOD             | Yes   | Yes                                   |
|                      | GANSS TOD Uncertainty | Yes   | Yes                                   |
|                      | GANSS Time ID         | Yes   | Yes                                   |
|                      | BCCH Carrier          |   | Yes                                   |
|                      | BSIC                  |   | Yes                                   |
|                      | FNm                   |   | Yes                                   |
|                      | TN                    |   | Yes                                   |
|                      | BN                    |   | Yes                                   |
|                      | FN <sub>1</sub>       |   | Yes                                   |

- f) **GANSS Reference Location IE.** This information element is defined in subclause A.4.2.6.1 of 3GPP TS 44.031.

**Table O.6-2: GANSS Reference Location IE**

| Name of the IE           | Fields of the IE  |
|--------------------------|---|
| GANSS Reference Location | Ellipsoid point with Altitude and uncertainty ellipsoid |

- g) **GANSS Ionospheric Model IE.** This information element is defined in subclause A.4.2.6.1 of 3GPP TS 44.031.

**Table O.6-3: GANSS Ionospheric Model IE**

| Name of the IE          | Fields of the IE |
|-------------------------|------------------|
| GANSS Ionospheric Model |                  |

- h) **GANSS Additional Ionospheric Model IE.** This information element is defined in subclause A.4.2.6.1 of 3GPP TS 44.031.

**Table O.6-4: GANSS Additional Ionospheric Model IE**

| Name of the IE                     | Fields of the IE |
|------------------------------------|------------------|
| GANSS Additional Ionospheric Model |                  |

- i) **GANSS Time Model IE.** This information element is only required for multi system tests, and is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-5: GANSS Time Model IE**

| Name of the IE   | Fields of the IE                                   |
|------------------|--|
| GANSS Time Model |  |
|                  | GNSS_TOD_ID<br>For each GNSS included in the test. |

- j) **GANSS Navigation Model IE.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-6: GANSS Navigation Model IE**

| Name of the IE         | Fields of the IE |
|------------------------|------------------|
| GANSS Navigation Model |                  |

**Table O.6-6a: GANSS Clock and Orbit Model Choices**

| GANSS               | Clock and Orbit Model Choice |
|---------------------|------------------------------|
| Galileo             | Model-1                      |
| Modernized GPS      | Model-3                      |
| GLONASS             | Model-4                      |
| QZSS QZS-L1         | Model-2                      |
| QZSS QZS-L1C/L2C/L5 | Model-3                      |
| SBAS                | Model-5                      |

- k) **GANSS Reference Measurement Information IE.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-7: GANSS Reference Measurement Information IE**

| Name of the IE                          | Fields of the IE                     |
|---|--------------------------------------|
| GANSS Reference Measurement Information |                                      |
|   | SV_ID                                |
|   | Doppler (0 <sup>th</sup> order term) |
|   | Doppler (1 <sup>st</sup> order term) |
|   | Doppler Uncertainty                  |
|   | Code Phase                           |
|   | Integer Code Phase                   |
|   | Code Phase Search Window             |
|   | Azimuth                              |
|   | Elevation                            |

- l) **GANSS Almanac Model.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-8: GANSS Almanac Model IE**

| Name of the IE      | Fields of the IE |
|---------------------|------------------|
| GANSS Almanac Model |                  |

**Table O.6-8a: GANSS Almanac Choices**

| GANSS               | Almanac Model Choice |
|---------------------|----------------------|
| Galileo             | Model-1              |
| Modernized GPS      | Model-3,4            |
| GLONASS             | Model-5              |
| QZSS QZS-L1         | Model-2              |
| QZSS QZS-L1C/L2C/L5 | Model-3,4            |
| SBAS                | Model-6              |

- m) **GANSS UTC Model IE.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-9: GANSS UTC Model IE**

| Name of the IE  | Fields of the IE |
|-----------------|------------------|
| GANSS UTC Model |                  |

- n) **GANSS Additional UTC Model IE.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-10: GANSS Additional UTC Model IE**

| Name of the IE             | Fields of the IE |
|----------------------------|------------------|
| GANSS Additional UTC Model |                  |

**Table O.6-10a: GANSS UTC Model Choices**

| GANSS               | UTC Model Choice |
|---------------------|------------------|
| Galileo             | Model-1          |
| Modernized GPS      | Model-2          |
| GLONASS             | Model-3          |
| QZSS QZS-L1         | Model-1          |
| QZSS QZS-L1C/L2C/L5 | Model-2          |
| SBAS                | Model-4          |

- o) **GANSS Auxiliary Information IE.** This information element is defined in subclause A.4.2.6.2 of 3GPP TS 44.031.

**Table O.6-11: GANSS Auxiliary Information IE**

| Name of the IE              | Fields of the IE |
|-----------------------------|------------------|
| GANSS Auxiliary Information |                  |

## O.7 Converting MS-assisted measurement reports into position estimates

### O.7.1 Introduction

To convert the MS measurement reports in case of MS-assisted mode of A-GANSS into position errors, a transformation between the "measurement domain" (code-phases, etc.) into the "state" domain (position estimate) is necessary. Such a transformation procedure is outlined in the following clauses. The details can be found in [IS-GPS-200], [IS-GPS-705], [IS-GPS-800], [SBAS], [IS-QZSS], [GLONASS-ICD],[Galileo-ICD],[P. Axelrad, R.G. Brown] and [S.K. Gupta].

### O.7.2 MS measurement reports

In case of MS-assisted A-GANSS, the measurement parameters are contained in the RRLP GANSS MEASUREMENT INFORMATION ELEMENT (subclause A.3.2.10 in 3GPP TS 44.031). In case the MS provides also measurements on the GPS L1 C/A signal, the measurement parameters are contained in the RRLP GPS MEASUREMENT INFORMATION ELEMENT (subclause A.3.2.5 in 3GPP TS 44.031). The measurement parameters required for calculating the MS position are:

- 1) Reference Time: The MS has two choices for the Reference Time:
  - a) "Reference Frame";
  - b) "GANSS TOD" and/or "GPS TOW" if GPS L1 C/A signal measurements are also provided.

Note: It is not expected that an MS will ever report both a GANSS TOD and a GPS TOW. However if two time stamps are provided and they derive from different user times, be aware that no compensation is made for this difference and this could affect the location accuracy.

- 2) Measurement Parameters for each GANSS and GANSS Signal: 1 to <maxSat>:
  - a) "SV ID"; mapping according to Table A.10.14 in 3GPP TS 44.031;
  - b) "Code Phase";
  - c) "Integer Code Phase";
  - d) "Code Phase RMS Error";
- 3) Additional Measurement Parameters in case of GPS L1 C/A signal measurements are also provided: 1 to <maxSat>:
  - a) "Satellite ID (SV PRN)";
  - b) "Whole GPS chips";
  - c) "Fractional GPS Chips";
  - d) "Pseudorange RMS Error".

Additional information required at the system simulator:

- 1) "Reference Location" (subclause A.4.2.4 or A.4.2.6.1 in 3GPP TS 44.031):  
Used for initial approximate receiver coordinates.
- 2) "GANSS Navigation Model" (subclause A.4.2.6.2 in 3GPP TS 44.031):  
Contains the ephemeris and clock correction parameters as specified in the relevant ICD of each supported GANSS; used for calculating the satellite positions and clock corrections.
- 3) "GANSS Ionospheric Model" (subclause A.4.2.6.1 in 3GPP TS 44.031):  
Contains the ionospheric parameters which allow the single frequency user to utilize the ionospheric model as specified in [Galileo-ICD] for computation of the ionospheric delay.
- 4) "GANSS Additional Ionospheric Model" (subclause A.4.2.6.1 in 3GPP TS 44.031):  
Contains the ionospheric parameters which allow the single frequency user to utilize the ionospheric model as specified in [QZSS-ICD] for computation of the ionospheric delay.
- 5) "GANSS Time Model" (subclause A.4.2.6.2 in 3GPP TS 44.031):  
Contains the GNSS-GNSS Time Offset for each supported GANSS. Note, that "GANSS Time Model" IE contains only the sub-ms part of the offset. Any potential integer seconds offset may be obtained from "UTC Model" (subclause A.4.2.4 in 3GPP TS 44.031), "GANSS UTC Model" (subclause A.4.2.6.2 in 3GPP TS 44.031), or "GANSS Additional UTC Model" (subclause A.4.2.6.2 in 3GPP TS 44.031).
- 6) "Navigation Model" (subclause A.4.2.4 in 3GPP TS 44.031):  
Contains the GPS ephemeris and clock correction parameters as specified in [IS-GPS-200]; used for calculating the GPS satellite positions and clock corrections in case of GPS L1 C/A signal measurements are the only GPS measurements provided in addition to GANSS measurements.
- 7) "Ionospheric Model" (subclause A.4.2.4 in 3GPP TS 44.031):  
Contains the ionospheric parameters which allow the single frequency user to utilize the ionospheric model as specified in [IS-GPS 200] for computation of the ionospheric delay.

## O.7.3 Weighted Least Squares (WLS) position solution

The WLS position solution problem is concerned with the task of solving for four unknowns;  $x_u$ ,  $y_u$ ,  $z_u$  the receiver coordinates in a suitable frame of reference (usually ECEF) and  $b_u$  the receiver clock bias relative to the selected GNSS specific system time. It typically requires the following steps:

### Step 1: Formation of pseudo-ranges

The observation of code phase reported by the MS for each satellite  $SV_i$  is related to the pseudo-range/c modulo the "GNSS Code Phase Ambiguity", or modulo 1 ms (the length of the C/A code period) in case of GPS L1 C/A signal measurements. For the formation of pseudo-ranges, the integer number of milliseconds to be added to each code-phase measurement has to be determined first. Since 1 ms corresponds to a travelled distance of 300 km, the number of integer ms can be found with the help of reference location and satellite ephemeris. The distance between the reference location and each satellite  $SV_i$  at the time of measurement is calculated, and the integer number of milliseconds to be added to the MS code phase measurements is obtained.

### Step 2: Correction of pseudo-ranges for the GNSS-GNSS time offsets

In case the MS reports measurements for more than a single GNSS, the pseudo-ranges are corrected for the time offsets between the GNSSs relative to the selected reference time using the GNSS-GNSS time offsets available at the system simulator:

$$\rho_{GNSS_m,i} \equiv \rho_{GNSS_m,i} - c \cdot (t_{GNSS_k} - t_{GNSS_m}),$$

where  $\rho_{GNSS_m,i}$  is the measured pseudo-range of satellite  $i$  of  $GNSS_m$ . The system time  $t_{GNSS_k}$  of  $GNSS_k$  is the reference time frame, and  $(t_{GNSS_k} - t_{GNSS_m})$  is the available GNSS-GNSS time offset, and  $c$  is the speed of light.

### Step 3: Formation of weighting matrix

The MS reported "Code Phase RMS Error" and/or "Pseudorange RMS Error" values are used to calculate the weighting matrix for the WLS algorithm described in [P. Axelrad, R.G. Brown]. According to 3GPP TS 44.031, the encoding for these fields is a 6 bit value that consists of a 3 bit mantissa,  $X_i$  and a 3 bit exponent,  $Y_i$  for each  $SV_i$  of  $GNSS_j$ :

$$w_{GNSS_j,i} = RMSError = 0.5 \times \left( 1 + \frac{X_i}{8} \right) \times 2^{Y_i}$$

The weighting Matrix  $\mathbf{W}$  is defined as a diagonal matrix containing the estimated variances calculated from the "Code Phase RMS Error" and/or "Pseudorange RMS Error" values:

$$\mathbf{W} = \text{diag} \left\{ 1/w_{GNSS_1,1}^2, 1/w_{GNSS_1,2}^2, \dots, 1/w_{GNSS_1,n}^2, \dots, 1/w_{GNSS_m,1}^2, 1/w_{GNSS_m,2}^2, \dots, 1/w_{GNSS_m,l}^2 \right\}$$

### Step 4: WLS position solution

The WLS position solution is described in e.g., [P. Axelrad, R.G. Brown] and usually requires the following steps:

- 1) Computation of satellite locations at time of transmission using the ephemeris parameters and user algorithms defined in the relevant ICD of the particular GNSS. The satellite locations are transformed into WGS-84 reference frame, if needed.
- 2) Computation of clock correction parameters using the parameters and algorithms as defined in the relevant ICD of the particular GNSS.
- 3) Computation of atmospheric delay corrections using the parameters and algorithms defined in the relevant ICD of the particular GNSS for the ionospheric delay, and using the Gupta model defined in [S.K. Gupta] p. 121 equation (2) for the tropospheric delay. For GNSSs which do not natively provide ionospheric correction models (e.g., GLONASS), the ionospheric delay is determined using the available ionospheric model (see subclause O.7.2) adapted to the particular GNSS frequency.
- 4) The WLS position solution starts with an initial estimate of the user state (position and clock offset). The Reference Location is used as initial position estimate. The following steps are required:

- a) Calculate geometric range (corrected for Earth rotation) between initial location estimate and each satellite included in the MS measurement report.
- b) Predict pseudo-ranges for each measurement including clock and atmospheric biases as calculated in 1) to 3) above and defined in the relevant ICD of the particular GNSS and [P. Axelrad, R.G. Brown].
- c) Calculate difference between predicted and measured pseudo-ranges  $\Delta\rho$ .
- d) Calculate the "Geometry Matrix"  $\mathbf{G}$  as defined in [P. Axelrad, R.G. Brown]:

$$\mathbf{G} \equiv \begin{bmatrix} -\hat{\mathbf{1}}_{GNSS_{1,1}}^T & 1 \\ -\hat{\mathbf{1}}_{GNSS_{1,2}}^T & 1 \\ \vdots & \vdots \\ -\hat{\mathbf{1}}_{GNSS_{1,n}}^T & 1 \\ \vdots & \vdots \\ -\hat{\mathbf{1}}_{GNSS_{m,1}}^T & 1 \\ -\hat{\mathbf{1}}_{GNSS_{m,2}}^T & 1 \\ \vdots & \vdots \\ -\hat{\mathbf{1}}_{GNSS_{m,l}}^T & 1 \end{bmatrix} \quad \text{with } \hat{\mathbf{1}}_{GNSS_{m,i}} \equiv \frac{\mathbf{r}_{s_{GNSS_{m,i}}} - \hat{\mathbf{r}}_u}{\left| \mathbf{r}_{s_{GNSS_{m,i}}} - \hat{\mathbf{r}}_u \right|} \quad \text{where } \mathbf{r}_{s_{GNSS_{m,i}}} \text{ is the satellite position vector for } SV_i$$

of  $GNSS_m$  (calculated in 1) above), and  $\hat{\mathbf{r}}_u$  is the estimate of the user location.

- e) Calculate the WLS solution according to [P. Axelrad, R.G. Brown]:

$$\Delta\hat{\mathbf{x}} = (\mathbf{G}^T \mathbf{W} \mathbf{G})^{-1} \mathbf{G}^T \mathbf{W} \Delta\rho$$

- f) Adding the  $\Delta\hat{\mathbf{x}}$  to the initial state estimate gives an improved estimate of the state vector:

$$\hat{\mathbf{x}} \rightarrow \hat{\mathbf{x}} + \Delta\hat{\mathbf{x}}.$$

- 5) This new state vector  $\hat{\mathbf{x}}$  can be used as new initial estimate and the procedure is repeated until the change in  $\hat{\mathbf{x}}$  is sufficiently small.

### Step 5: Transformation from Cartesian coordinate system to Geodetic coordinate system

The state vector  $\hat{\mathbf{x}}$  calculated in Step 4 contains the MS position in ECEF Cartesian coordinates together with the MS receiver clock bias relative to the selected GNSS system time. Only the user position is of further interest. It is usually desirable to convert from ECEF coordinates  $x_u, y_u, z_u$  to geodetic latitude  $\varphi$ , longitude  $\lambda$  and altitude  $h$  on the WGS84 reference ellipsoid.

### Step 6: Calculation of "2-D Position Errors"

The latitude  $\varphi$  / longitude  $\lambda$  obtained after Step 5 is used to calculate the 2-D position error.

---

## Annex P (normative): Minimum receiver performance requirements for MSR BS

This annex defines the minimum receiver performance requirements that shall be fulfilled for GSM carrier in MSR BS when referenced from the 3GPP TS 37.104 [33].

---

### P.1 Reference Sensitivity and interference performance

The minimum requirements for reference sensitivity and reference interference performance specified in the applicable parts of clauses 6.2, 6.3, 6.4, 6.5 and 6.6 apply.

---

### P.2 Other receiver characteristics

#### P.2.1 Blocking characteristics

- a) Wanted signal GMSK, and wanted signal 8-PSK modulated
- b) Static propagation conditions
- c) Reference receiver performance for the following channels:
  - GMSK modulated speech channels according to requirements in table 1: TCH/FS,
  - If supported, 8-PSK modulated circuit-switched data channels according to table 1d: E-TCH/F (T) for highest supported coding scheme
  - If supported, 8-PSK modulated packet-switched channels (EGPRS) according to table 1b: lowest supported coding scheme (MCS) using BTTI and no PAN

For the Additional Narrowband blocking minimum requirement for GSM/EDGE, the following also applies:

- d) Narrow band blocking for interferer at frequency offsets  $\geq 600$  kHz to the end of the relevant receive band (apply only for Additional Narrowband blocking minimum requirements for GSM/EDGE)
- e) Blocking characteristics shall be fulfilled according to the criteria, definitions and requirements in subclause 5.1 for the channels and conditions above

#### P.2.2 Intermodulation characteristics

- a) Static propagation conditions
- b) Reference receiver performance for the following channels:
  - GMSK modulated speech channels according to requirements in table 1: TCH/FS ,
  - If supported, 8-PSK modulated circuit-switched data channels according to table 1d: E-TCH/F (T) for highest supported coding scheme
  - If supported, 8-PSK modulated packet-switched channels (EGPRS) according to table 1b: lowest supported coding scheme (MCS) using BTTI and no PAN

For the Additional narrowband intermodulation minimum requirement for GSM/EDGE, the following also applies:



- c) Intermodulation characteristics shall be fulfilled according to the criteria, definitions and requirements in subclause 5.2 for the channels and conditions above

## P.2.3 AM suppression

AM suppression characteristics shall be fulfilled according to the criteria, definitions and requirements in subclause 5.3 for the following channels and conditions :

- a) Static propagation conditions
- b) Reference receiver performance for the following channels:
  - GMSK modulated speech channels according to requirements in table 1: TCH/FS ,
  - If supported, 8-PSK modulated circuit-switched data channels according to table 1d: E-TCH/F (T) for highest supported coding scheme
  - If supported, 8-PSK modulated packet-switched channels (EGPRS) according to table 1b: lowest supported coding scheme (MCS) using BTTI and no PAN

## Annex Q(normative): Reference Test Scenarios for Voice services over Adaptive Multi-user channels on One Slot (VAMOS)

### Q.1 Interferer configurations in downlink

Four different interference scenarios are defined for VAMOS downlink as follows:

**Table Q.1-1 Reference Test Scenario for synchronous single co-channel interferer**

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay range |
|-------------------------|--------------------|---------------------------------|------|------------------------|
| VDTS-1                  | Co-channel 1       | -                               | none | no delay               |

**Table Q.1-2 Reference Test Scenarios for synchronous multiple interferers**

| Reference Test Scenario | Interfering Signal | Interferer power level relative to Co-channel 1 | TSC  | Interferer Delay range |
|-------------------------|--------------------|---|------|------------------------|
| VDTS-2                  | Co-channel 1       | -   | none | no delay               |
|                         | Co-channel 2       | -10 dB  | none | no delay               |
|                         | Adjacent 1         | 3 dB  | none | no delay               |
|                         | AWGN               | -17 dB  | -    | -                      |

**Table Q.1-3 Reference Test Scenario for asynchronous single co-channel interferer**

| Reference Test Scenario   | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay |
|---|--------------------|---------------------------------|------|------------------|
| VDTS-3  | Co-channel 1       | -                               | none | 74 symbols       |
| Note: In calculating I1, the power of the delayed interferer burst is averaged over the active part of the wanted signal burst. |                    |                                 |      |                  |

**Table Q.1-4 Reference Test Scenario for synchronous single adjacent channel interferer**

| Reference Test Scenario | Interfering Signal | Interferer relative power level | TSC  | Interferer Delay |
|-------------------------|--------------------|---------------------------------|------|------------------|
| VDTS-4                  | Adjacent 1         | -                               | none | no delay         |

In all reference test scenarios in tables Q.1-1 to Q.1-4, the co channel and adjacent channel interferers are AQPSK modulated with SCPIR\_DL = 0 dB. The power of the interferer is measured before any receiver filtering and during the active part of the desired burst (see 3GPP TS 45.004). No Training Sequence Code (TSC) is used for the interferers, and thus the midamble is filled with random data bits.

In some test scenarios an AWGN signal is added to the interferers. The AWGN signal power is measured over a bandwidth of 270,833 kHz.

Power ramping according to the requirements in Annex B shall be applied to all delayed interferers. The other interferers shall be random and continuous modulated signals.

**NOTE:** The non-delayed interferer is the same signal for which reference interference performance requirements normally apply (see clause 6.3).

In adjacent timeslots of the delayed interferers no power shall be applied. The delay is measured from the same bit position in the wanted signal burst and the interferer burst, where the position in the wanted signal is the reference position.

The C/I1 values in tables 2aa and 2ab are ratios of received powers expressed in dB; where C is the received power of the downlink signal using Normal burst for AQPSK (see 3GPP TS 45.002) and I1 is the received power of the dominant

external interferer (Co-channel 1 in tables Q.1-1 to Q.1-3) for VDTS-1 to VDTS-3 or the received power of the adjacent channel interferer for VDTS-4 (Adjacent 1 in table Q.1-4).

## Q.2 Interferer configurations in uplink

Four different interference scenarios are defined for VAMOS uplink as follows:

**Table Q.2-1 Reference Test Scenario 1**

| Reference Test Scenario | Interfering Signal | Interferer power level relative to Co-channel 1 | TSC  | Interferer Delay range |
|-------------------------|--------------------|---|------|------------------------|
| VUTS-1                  | Co-channel 1       | -   | none | no delay               |
|                         | Co-channel 2       | 0 dB  | none | no delay               |

**Table Q.2-2 Reference Test Scenario 2**

| Reference Test Scenario | Interfering Signal | Interferer power level relative to Adjacent 1 | TSC  | Interferer Delay range |
|-------------------------|--------------------|---|------|------------------------|
| VUTS-2                  | Adjacent 1         | -   | none | no delay               |
|                         | Adjacent 2         | 0 dB  | none | no delay               |

Note: Both the Adjacent channel interferers are at the same adjacent channel frequency.

**Table Q.2-3 Reference Test Scenario 3**

| Reference Test Scenario | Interfering Signal         | Interferer power level relative to Co-channel 1 | TSC  | Interferer Delay |
|-------------------------|----------------------------|---|------|------------------|
| VUTS-3                  | Co-channel 1 <sup>1)</sup> | -   | none | 74 symbols       |
|                         | Co-channel 2 <sup>1)</sup> | 0 dB  | none | 74 symbols       |

<sup>1)</sup>In calculating I1 (see table 2ac), the power of the delayed interferer shall be measured over the active part of the burst of VAMOS sub-channel 2.

**Table Q.2-4 Reference Test Scenario 4**

| Reference Test Scenario | Interfering Signal | Interferer power level relative to Co-channel 1 | TSC  | Interferer Delay |
|-------------------------|--------------------|---|------|------------------|
| VUTS-4                  | Co-channel 1       | -   | none | no delay         |
|                         | Adjacent 1         | 3 dB  | none | no delay         |

In all the reference scenarios in uplink, VUTS-1 to VUTS-4, the interferers are GMSK modulated. The power of the interferer is measured before any receiver filtering and during the active part of the desired burst (see 3GPP TS 45.004). No Training Sequence Code (TSC) is used for the interferers, and thus the midamble is filled with random data bits.

Power ramping according to the requirements in Annex B shall be applied to all delayed interferers.

NOTE: The non-delayed interferer is the same signal for which reference interference performance requirements normally apply (see clause 6.3).

In adjacent timeslots of the delayed interferers no power shall be applied. The delay is measured from the same bit position in the burst of VAMOS *subchannel 2* signal and the interferer burst, where the position in VAMOS *subchannel 2* signal is the reference position.

The C/I1 values in table 2ac are ratios of received powers expressed in dB, where C is the received power of VAMOS subchannel 2 using Normal burst for GMSK (see 3GPP TS 45.002) and I1 is the received power of Co-channel 1 (VUTS-1, VUTS-3 and VUTS-4) or Adjacent channel 1 (VUTS-2). VAMOS subchannel 1 shall be at an input level relative to VAMOS sub-channel 2 according to the Subchannel power imbalance ratio on uplink (SCPIR\_UL) which is specified in table 2ac.

The wanted signals VAMOS subchannel 2 and VAMOS subchannel 1 and the interfering signals of the test scenarios in tables Q.2-1 to Q.2-4 are added to both RX antennas.

## Q.3 Sensitivity test configuration in downlink

For reference sensitivity measurements, the measured level of the input signal (in dBm) of the received AQPSK signal for which the reference performance is to be satisfied are specified in tables 1s, 1t and 1u.

## Q.4 Sensitivity test configuration in uplink

The received signal level in table 1v refers to the signal level of VAMOS subchannel 2. In addition to the GMSK signal from VAMOS subchannel 2 at signal level according to table 1v, the signal from VAMOS subchannel 1 is also added at both the RX antennas. The ratio of the received power of VAMOS subchannel 2 relative to the received power of VAMOS subchannel 1 shall be equal to the Subchannel power imbalance ratio on uplink (SCPIR\_UL) as specified in table 1v.

## Q.5 Time and frequency offset in uplink

For uplink in VAMOS mode, i.e. both interference and sensitivity limited cases *VAMOS subchannel 1* is offset in time and frequency with respect to *VAMOS subchannel 2*. In all these cases, the GMSK burst from *VAMOS subchannel 1* is:

- offset in time compared to *VAMOS subchannel 2* according to the probability distribution:

$$p(\text{Time offset}) = \begin{cases} 0.25, & \text{for Time offset} = -1 \text{ Normal Symbol Periods} \\ 0.5, & \text{for Time offset} = 0 \text{ Normal Symbol Periods} \\ 0.25, & \text{for Time offset} = 1 \text{ Normal Symbol Periods} \\ 0, & \text{else} \end{cases}$$

- offset in frequency compared to *VAMOS subchannel 2* according to the probability distribution:

$$p(\text{Frequency offset}) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{(\text{Frequency offset} - \mu)^2}{2\sigma^2}} \text{ where } \sigma \text{ and } \mu \text{ are given in the table Q.5-1}$$

**Table Q.5-1 Frequency Offset Parameters for Paired Subchannel**

| Frequency Band | 850/900 | 1800  | 1900  |
|----------------|---------|-------|-------|
| $\mu$          | 45 Hz   | 90 Hz | 95 Hz |
| $\sigma$       | 10 Hz   | 17 Hz | 17 Hz |

The time and frequency offset of *VAMOS subchannel 1* with respect to *VAMOS subchannel 2* shall be constant within a burst and may be selected in an implementation dependent way such that the above probabilities are satisfied.

## Q.6 VAMOS DTX scenario in downlink

The purpose of this test case is to verify the VAMOS II mobile receiver performance when the paired *VAMOS subchannel* user goes into and comes out of DTX.

The modulation of the downlink VAMOS signal shall be switched between AQPSK (with -10 dB SCPIR) and GMSK according to the following:

$$p(\text{Downlink Modulation}) = \begin{cases} 0.4, & \text{for Downlink Modulation being GMSK} \\ 0.6, & \text{for Downlink Modulation being AQPSK} \end{cases}$$

The power of the GMSK burst in the downlink in this test case shall be 10.5 dB lower than the power of the AQPSK burst. The average input signal level over all the bursts at the reference performance for the VAMOS II MS shall be as per the table 1u. The reference performance according to section 6.2.1a shall be applicable for this test case.

## Annex R (informative): Change history

| SPEC  | SMG# | CR   | REV | PHASE | VERS  | NEW_VERS | SUBJECT   |
|-------|------|------|-----|-------|-------|----------|---|
| 05.05 | s24  | A063 |     | R97   | 5.6.0 | 6.0.0    | Reference performance for GPRS  |
| 05.05 | s25  | A067 |     | R97   | 6.0.0 | 6.1.0    | 14.4kbps Data Service   |
| 05.05 | s26  | A065 |     | R97   | 6.1.0 | 6.2.0    | Repeater Systems using Frequency Shift  |
| 05.05 | s26  | A071 |     | R97   | 6.1.0 | 6.2.0    | Adjacent time slot rejection performance                                      |
| 05.05 | s26  | A073 |     | R97   | 6.1.0 | 6.2.0    | Frequency hopping performance under interference conditions                   |
| 05.05 | s26  | A074 |     | R97   | 6.1.0 | 6.2.0    | Possibility for operators and manufacturers to define BTS output power        |
| 05.05 | s26  | A075 |     | R97   | 6.1.0 | 6.2.0    | Introducing performance requirement for the 11 bit PRACH                      |
| 05.05 | s26  | A045 |     | R98   | 6.4.0 | 7.0.0    | Pico BTS  |
| 05.05 | s27  | A076 |     | R97   | 6.2.0 | 6.3.0    | False USF detection   |
| 05.05 | s27  | A077 |     | R97   | 6.2.0 | 6.3.0    | Power control levels 29-31 for DCS 1800                                       |
| 05.05 | s27  | A078 |     | R97   | 6.2.0 | 6.3.0    | DCS 1800 MS sensitivity for GPRS  |
| 05.05 | s27  | A080 |     | R97   | 6.2.0 | 6.3.0    | Correction of reference for MS test loop                                      |
| 05.05 | s28  | A083 |     | R97   | 6.3.0 | 6.4.0    | Signal level for reference interference measurements in GPRS                  |
| 05.05 | s28  | A081 |     | R98   | 6.4.0 | 7.0.0    | BTS performance requirements for Picocells                                    |
| 05.05 | s28  | A082 |     | R98   | 6.4.0 | 7.0.0    | Harmonization between GSM and PCS 1 900 standard                              |
| 05.05 | s28  | A084 |     | R98   | 6.4.0 | 7.0.0    | Introduction of CTS in GSM 05.05  |
| 05.05 | s28  | A091 |     | R98   | 6.4.0 | 7.0.0    | Transmitter / receiver performance in CTS                                     |
| 05.05 | s29  | A098 |     | R98   | 7.0.0 | 7.1.0    | Micro BTS: Deletion of Max output power per carrier values expressed in Watts |
| 05.05 | s29  | A099 |     | R98   | 7.0.0 | 7.1.0    | Correction to pico-BTS interference performance                               |
| 05.05 | s29  | A143 |     | R98   | 7.0.0 | 7.1.0    | AMR reference sensitivity and interference                                    |
| 05.05 | s29  | A100 |     | R99   | 7.1.0 | 8.0.0    | Output level dynamic operation for EDGE                                       |
| 05.05 | s29  | A102 |     | R99   | 7.1.0 | 8.0.0    | Blocking requirements for EDGE MS and BTS receivers                           |
| 05.05 | s29  | A103 |     | R99   | 7.1.0 | 8.0.0    | Power classes for EDGE mobile stations  |
| 05.05 | s29  | A104 |     | R99   | 7.1.0 | 8.0.0    | Modulation Accuracy for EDGE MS and BTS                                       |
| 05.05 | s29  | A105 |     | R99   | 7.1.0 | 8.0.0    | Spectrum Mask for EDGE MS and BTS   |
| 05.05 | s29  | A106 |     | R99   | 7.1.0 | 8.0.0    | High input level requirements for EDGE receivers                              |
| 05.05 | s29  | A107 |     | R99   | 7.1.0 | 8.0.0    | Introduction of LCS – Requirements on Location Measurement Unit               |
| 05.05 | s29  | A108 |     | R99   | 7.1.0 | 8.0.0    | Output power for EDGE BTS   |
| 05.05 | s29  | A111 |     | R99   | 7.1.0 | 8.0.0    | GSM 400 systems introduced in GSM 05.05                                       |
| 05.05 | s30  | A114 |     | R99   | 8.0.0 | 8.1.0    | Output level Dynamic operation in EDGE  |
| 05.05 | s30  | A115 |     | R99   | 8.0.0 | 8.1.0    | EDGE blocking requirement for micro and pico-BTS                              |
| 05.05 | s30  | A116 |     | R99   | 8.0.0 | 8.1.0    | 850 MHz frequency band and channel arrangement                                |
| 05.05 | s30  | A117 |     | R99   | 8.0.0 | 8.1.0    | EDGE 850 MHz and 1900 MHz mixed mode  |
| 05.05 | s30  | A118 |     | R99   | 8.0.0 | 8.1.0    | Frequency compensation requirements for EDGE receivers                        |
| 05.05 | s30  | A119 |     | R99   | 8.0.0 | 8.1.0    | Modulation accuracy for EDGE MS and BTS                                       |
| 05.05 | s30  | A120 |     | R99   | 8.0.0 | 8.1.0    | AMR reference sensitivity and interference                                    |
| 05.05 | s30  | A124 |     | R99   | 8.0.0 | 8.1.0    | Introduction of RATSCCH for AMR   |
| 05.05 | s30  | A126 |     | R99   | 8.0.0 | 8.1.0    | 8-PSK requirements for GSM 400  |
| 05.05 | s30  | A127 |     | R99   | 8.0.0 | 8.1.0    | PCS 1900 MHz intermodulation requirements                                     |
| 05.05 | s30  | A129 |     | R99   | 8.0.0 | 8.1.0    | Allowed power level between two consecutive active time slots                 |
| 05.05 | s30  | A159 |     | R99   | 8.0.0 | 8.1.0    | GSM in the 400 MHz bands: editorial modification                              |
| 05.05 | s30b | A132 |     | R99   | 8.1.0 | 8.2.0    | EDGE blocking requirement for micro and pico-BTS                              |
| 05.05 | s30b | A133 |     | R99   | 8.1.0 | 8.2.0    | Spurious emission in RX- and TX-band in other frequency bands                 |
| 05.05 | S31  | A101 |     | R99   | 8.2.0 | 8.3.0    | Transmitter/receiver performance for EDGE                                     |
| 05.05 | S31  | A134 |     | R99   | 8.2.0 | 8.3.0    | Measurement Filter for EDGE EVM   |
| 05.05 | S31  | A135 |     | R99   | 8.2.0 | 8.3.0    | Alignment of Measurement Filter reference                                     |

| SPEC  | SMG# | CR   | REV | PHASE | VERS  | NEW_VERS | SUBJECT  |
|-------|------|------|-----|-------|-------|----------|--|
| 05.05 | S31  | A136 |     | R99   | 8.2.0 | 8.3.0    | Clarification of Intra BTS Intermodulation Attenuation requirements for MXM 850 and MXM 1900 BTS |
| 05.05 | S31  | A137 |     | R99   | 8.2.0 | 8.3.0    | Clarification of Intra BTS Intermodulation Attenuation requirements for PCS 1900 BTS             |
| 05.05 | S31  | A138 |     | R99   | 8.2.0 | 8.3.0    | Definition of MS for Mixed-mode network  |
| 05.05 | S31  | A139 |     | R99   | 8.2.0 | 8.3.0    | Correction to Output level dynamic operation   |
| 05.05 | S31  | A141 |     | R99   | 8.2.0 | 8.3.0    | Nominal Error Rate performance for EDGE  |
| 05.05 | S31  | A142 |     | R99   | 8.2.0 | 8.3.0    | Corrections to receiver Characteristics for EDGE   |
| 05.05 | S31  | A143 |     | R99   | 8.2.0 | 8.3.0    | Spurious emission measurement bandwidths updated to include GSM 400 systems                      |
| 05.05 | S31  | A144 |     | R99   | 8.2.0 | 8.3.0    | Harmonization of Transmitter/receiver performance requirements for PCS 1900                      |
| 05.05 | S31  | A147 |     | R99   | 8.2.0 | 8.3.0    | Relaxation of C/I performance requirement for CS4  |
| 05.05 | S31  | A149 |     | R99   | 8.2.0 | 8.3.0    | EVM requirements for EDGE BTS transmitter with combining equipment                               |
| 05.05 | S31  | A150 |     | R99   | 8.2.0 | 8.3.0    | Introduction of Incremental Redundancy Receiver Performance for MS                               |
| 05.05 | S31  | A151 |     | R99   | 8.2.0 | 8.3.0    | Switching Transients for 8-PSK Modulation  |
| 05.05 | S31  | A237 |     | R99   | 8.2.0 | 8.3.0    | RF Requirements for TOA LMU  |
| 05.05 | S31  | A239 |     | R99   | 8.2.0 | 8.3.0    | Requirements on E-OTD LMU and E-OTD MS   |
| 05.05 | S31b | A247 |     | R99   | 8.3.0 | 8.4.0    | Conforming requirements for LMUs containing a control mobile station                             |
| 05.05 | S31b | A154 |     | R99   | 8.3.0 | 8.4.0    | Completion of 3GPP TS 45.005 for EDGE and clean-up   |

| SPEC   | SMG# | CR   | REV | PHASE     | VERS  | NEW_VERS | SUBJECT   |
|--------|------|------|-----|-----------|-------|----------|---|
| 05.05  | S32  | A157 |     | R99       | 8.4.0 | 8.5.0    | Removal of duplicated figures   |
| 05.05  | S32  | A160 |     | R99       | 8.4.0 | 8.5.0    | Alignment of spurious emissions GSM-3G (UTRA): BTS  |
| 05.05  | S32  | A161 |     | R99       | 8.4.0 | 8.5.0    | Alignment of spurious emissions GSM-3G (UTRA): MS<br>September 2000 - TSG-GERAN#1   |
| 05.05  | G01  | A162 |     | R99       | 8.5.0 | 8.6.0    | Pico BTS Reference interference level clarification   |
| 05.05  | G01  | A163 |     | R99       | 8.5.0 | 8.6.0    | Alignment of spurious emissions GSM-3G(UTRA): BTS   |
| 05.05  | G01  | A164 |     | R99       | 8.5.0 | 8.6.0    | Alignment of spurious emissions GSM-3G(UTRA): MS  |
| 05.05  | G01  | A168 | 1   | R99       | 8.5.0 | 8.6.0    | Definition of "small MS"  |
| 05.05  | G01  | A172 |     | R99       | 8.5.0 | 8.6.0    | CR 05.05-A172 Correction on CS-4 performance requirements   |
| 05.05  | G01  | A173 | 1   | R99       | 8.5.0 | 8.6.0    | Clarification of BTS output power capability with 8-PSK<br>September 2000 - TSG-GERAN#1 Release 4   |
| 05.05  | G01  | A165 | 1   | Release 4 | 8.6.0 | 4.0.0    | Introduction of GSM 700 in 05.05 GSM on 700 MHz<br>Frequency Band<br>Oct 2000: Correction to references.<br>November 2000 - TSG-GERAN#2 Release 4 |
|        |      |      |     |           | 4.0.0 | 4.0.1    |   |
| 45.005 | G02  | 001  | 2   | Release 4 | 4.0.1 | 4.1.0    | NER requirements for EGPRS  |
| 45.005 | G02  | 002  | 1   | Release 4 | 4.0.1 | 4.1.0    | Tolerance of BTS output power levels  |
| 45.005 | G02  | 003  |     | Release 4 | 4.0.1 | 4.1.0    | Alignment of AM suppression requirements for PCS 1900<br>MS   |
| 45.005 | G02  | 004  | 1   | Release 4 | 4.0.1 | 4.1.0    | Testing of Blocking requirements for MXM 1900 BSS   |
| 45.005 | G02  | 005  |     | Release 4 | 4.0.1 | 4.1.0    | Testing of Intra BSS intermodulation attenuation<br>requirements for MXM 1900 BSS   |
|        |      |      |     |           | 4.1.0 | 4.1.1    | Front page layout correction<br>January 2001 - TSG-GERAN#3 Release 4  |
| 45.005 | G03  | 010  |     | Release 4 | 4.1.1 | 4.2.0    | Correction of Power vs Time mask for 8-PSK  |
| 45.005 | G03  | 011  | 1   | Release 4 | 4.1.1 | 4.2.0    | Definition of MXM systems missing   |
| 45.005 | G03  | 012  |     | Release 4 | 4.1.1 | 4.2.0    | Testing of Intra BSS intermodulation attenuation<br>requirements for MXM 850 BSS  |
| 45.005 | G03  | 013  |     | Release 4 | 4.1.1 | 4.2.0    | Alignment of AM suppression requirements for MXM 1900<br>BTS with PCS 1900 BTS and MXM 850 BTS with GSM 850<br>BTS                                |
| 45.005 | G03  | 014  |     | Release 4 | 4.1.1 | 4.2.0    | Mixed-Mode Systems Intermodulation Attenuation  |
| 45.005 | G03  | 015  | 1   | Release 4 | 4.1.1 | 4.2.0    | Interpretation of common DCS 1800 / PCS 1900 ARFCN<br>numbers when transmitted on other bands<br>April 2001 - TSG-GERAN#4 Release 4               |
| 45.005 | G04  | 016  | 1   | Release 4 | 4.2.0 | 4.3.0    | Clarification of Origin Offset Suppression requirements   |
| 45.005 | G04  | 017  | 3   | Release 4 | 4.2.0 | 4.3.0    | Dynamic ARFCN mapping   |
| 45.005 | G04  | 018  | 1   | Release 4 | 4.2.0 | 4.3.0    | Corrections to facilitate the interpretation  |
| 45.005 | G04  | 019  |     | Release 4 | 4.2.0 | 4.3.0    | Removal of requirements valid before December 1999  |
| 45.005 | G04  | 020  |     | Release 4 | 4.2.0 | 4.3.0    | Removal of requirements for Intermodulation between MS<br>June 2001 - TSG-GERAN#4 Release 4   |
| 45.005 | G05  | 021  |     | Release 4 | 4.3.0 | 4.4.0    | Corrections for clarification regarding output power and<br>blocking requirements<br>June 2001 - TSG-GERAN#4 Release 5                            |



| Change history |       |           |     |     |   |       |       |
|----------------|-------|-----------|-----|-----|---|-------|-------|
| Date           | TSG # | TSG Doc.  | CR  | Rev | Subject/Comment   | Old   | New   |
| 2001-06        | 05    | GP-011259 | 022 |     | Introduction of requirements for Wideband AMR FR GMSK modulated speech channels                                   | 4.4.0 | 5.0.0 |
| 2001-08        | 06    | GP-011910 | 024 | 1   | Correction to 45.005 – Incorrect references in section H.2.2.2  | 5.0.0 | 5.1.0 |
| 2001-08        | 06    | GP-011537 | 026 |     | Corrections for clarification regarding GSM 700 MS, GSM 850 MS and PCS 1900 MS requirements on spurious emissions | 5.0.0 | 5.1.0 |
| 2001-08        | 06    | GP-011944 | 031 |     | Alignment to 44.018 for the definition of the BAND_INDICATOR field  | 5.0.0 | 5.1.0 |
| 2001-11        | 07    | GP-012747 | 007 | 3   | Introduction of requirements for adaptive half rate speech channels with 8-PSK modulation                         | 5.1.0 | 5.2.0 |
| 2001-11        | 07    | GP-012773 | 036 | 1   | Correction of references to relevant 3GPP TSs   | 5.1.0 | 5.2.0 |
| 2001-11        | 07    | GP-012777 | 037 |     | Correction to wideband AMR receiver performance tables  | 5.1.0 | 5.2.0 |
| 2002-04        | 09    | GP-021155 | 041 | 1   | Correction of AMR FR inband performance requirement   | 5.2.0 | 5.3.0 |
| 2002-04        | 09    | GP-021170 | 042 | 1   | Alignment of number of codecs for WB-AMR to proposed set  | 5.2.0 | 5.3.0 |
| 2002-06        | 10    | GP-021401 | 043 |     | Introduction of AMR-WB 8PSK   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-021958 | 044 | 1   | Introduction of TCH/WFS receiver performance requirements   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-021403 | 045 |     | Introduction of O-TCH/AHS receiver performance requirements   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-021404 | 046 |     | Introduction of O-TCH/WFS receiver performance requirements   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-021405 | 047 |     | Introduction of O-TCH/WHS receiver performance requirements   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-022023 | 048 | 1   | Introduction of O-FACCH receiver performance requirements   | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-021412 | 049 |     | Editorial clean up of references  | 5.3.0 | 5.4.0 |
| 2002-06        | 10    | GP-022031 | 054 |     | AMR AHS7.4 static channel performance correction  | 5.3.0 | 5.4.0 |
| 2002-08        | 11    | GP-022468 | 056 |     | Correction to TCH/WFS receiver performance requirements   | 5.4.0 | 5.5.0 |
| 2002-08        | 11    | GP-022530 | 057 |     | Correction to O-TCH/WHS receiver performance requirements   | 5.4.0 | 5.5.0 |
| 2002-11        | 12    | GP-023075 | 061 |     | Correction of performance requirements for O-TCH/WFS  | 5.5.0 | 5.6.0 |
| 2002-11        | 12    | GP-023076 | 062 |     | Correction of performance requirements for O-TCH/WHS  | 5.5.0 | 5.6.0 |
| 2002-11        | 12    | GP-023077 | 063 |     | Correction of performance requirements for O-TCH/AHS  | 5.5.0 | 5.6.0 |
| 2002-11        | 12    | GP-023078 | 064 |     | Correction of performance requirements for TCH/WFS  | 5.5.0 | 5.6.0 |
| 2002-11        | 12    | GP-023079 | 065 |     | Correction of performance requirements for O-FACCH channels   | 5.5.0 | 5.6.0 |
| 2002-11        | 12    | GP-023080 | 066 |     | Correction to reference performance for AMR Rel5  | 5.5.0 | 5.6.0 |
|                |       |           |     |     | Release 6   |       |       |
| 2002-11        | 12    | GP-023319 | 052 | 2   | Implementation of new frequency ranges  | 5.6.0 | 6.0.0 |
| 2002-11        | 12    | GP-023422 | 060 | 1   | Correction of antenna Feeder loss compensator requirements  | 5.6.0 | 6.0.0 |
| 2003-02        | 13    | GP-030150 | 059 | 2   | Rice doppler spectrum definition  | 6.0.0 | 6.1.0 |
| 2003-02        | 13    | GP-030283 | 069 |     | Correction to abbr. in reference interference performance requirements  | 6.0.0 | 6.1.0 |
| 2003-04        | 14    | GP-030720 | 071 |     | Correction of static AMR sensitivity requirements for TCH/AHS   | 6.1.0 | 6.2.0 |
| 2003-04        | 14    | GP-030867 | 074 |     | Correction of transmitted power level versus time   | 6.1.0 | 6.2.0 |
| 2003-08        | 16    | GP-032232 | 078 | 1   | Introduction of mobile station multislot power classes  | 6.2.0 | 6.3.0 |
| 2004-02        | 18    | GP-040487 | 080 | 1   | Flexible Layer One  | 6.3.0 | 6.4.0 |
| 2004-04        | 19    | GP-040875 | 084 |     | Correction to transmitted power level vs. time mask   | 6.4.0 | 6.5.0 |
| 2004-04        | 19    | GP-041055 | 085 |     | Input signal level for interference performance for FLO   | 6.4.0 | 6.5.0 |
| 2004-06        | 20    | GP-041698 | 087 |     | Inband signalling bits for reference TFCs   | 6.5.0 | 6.6.0 |
| 2004-11        | 22    | GP-042829 | 092 | 2   | Introduction of DARP performance requirements   | 6.6.0 | 6.7.0 |
| 2004-11        | 22    | GP-042753 | 093 | 1   | Maximum output power when the MS transmits on   | 6.6.0 | 6.7.0 |

|         |    |           |      |   |  |        |        |
|---------|----|-----------|------|---|--|--------|--------|
|         |    |           |      |   | more slots than assigned for the uplink  |        |        |
| 2004-11 | 22 | GP-042592 | 094  |   | FLO performance requirements   | 6.6.0  | 6.7.0  |
| 2004-11 | 22 | GP-042857 | 097  |   | Removal of PTM-M   | 6.6.0  | 6.7.0  |
| 2005-01 | 23 | GP-050041 | 098  |   | Table 1i non-existent  | 6.7.0  | 6.8.0  |
| 2005-01 | 23 | GP-050145 | 100  |   | Removal of a restriction to support full power on two slots on 1800/1900 frequency bands, for certain multiband terminal designs | 6.7.0  | 6.8.0  |
| 2005-01 | 23 | GP-050192 | 101  |   | DARP - removal of brackets plus one clarification  | 6.7.0  | 6.8.0  |
| 2005-04 | 24 | GP-050906 | 102  | 3 | Performance requirements for Repeated FACCH  | 6.8.0  | 6.9.0  |
| 2005-04 | 24 | GP-051060 | 105  | 1 | GSM 750 corrections  | 6.8.0  | 6.9.0  |
| 2005-04 | 24 | GP-051053 | 107  | 1 | Performance requirements for E-TCH/F32.0   | 6.8.0  | 6.9.0  |
| 2005-04 | 24 | GP-050974 | 108  |   | Clarification on the wanted signal level for adjacent channel performance  | 6.8.0  | 6.9.0  |
| 2005-04 | 24 | GP-051061 | 106  | 1 | Introduction of GSM 710  | 6.9.0  | 7.0.0  |
| 2005-06 | 25 | GP-051283 | 114  |   | Addition of new frequency band (e.g. T-GSM810) to the repeater annex E   | 7.0.0  | 7.1.0  |
| 2005-06 | 25 | GP-051766 | 115  | 2 | Introduction of T-GSM 810 frequency band   | 7.0.0  | 7.1.0  |
| 2005-06 | 25 | GP-051472 | 116  |   | Reduced interslot MS output power dynamic range on a multislot configuration   | 7.0.0  | 7.1.0  |
| 2005-06 | 25 | GP-051717 | 122  | 1 | Performance requirements for Repeated Downlink FACCH   | 7.0.0  | 7.1.0  |
| 2005-09 | 26 | GP-051981 | 0123 |   | Correction and alignment for PCS 1900 MS power mask  | 7.1.0  | 7.2.0  |
| 2005-09 | 26 | GP-052024 | 0127 |   | Removal of RATSCCH Identification Requirement  | 7.1.0  | 7.2.0  |
| 2005-09 | 26 | GP-052050 | 0129 |   | Corrections and clarifications for Repeated Downlink FACCH   | 7.1.0  | 7.2.0  |
| 2005-11 | 27 | GP-052671 | 0120 | 2 | Performance requirements for E-TCH/F32.0   | 7.2.0  | 7.3.0  |
| 2005-11 | 27 | GP-052673 | 0131 | 1 | Performance requirements for FLO   | 7.2.0  | 7.3.0  |
| 2005-11 | 27 | GP-052606 | 0133 |   | Repeated SACCH performance requirements  | 7.2.0  | 7.3.0  |
| 2006-01 | 28 | GP-060325 | 0135 | 1 | Repeated SACCH performance requirements  | 7.3.0  | 7.4.0  |
| 2006-01 | 28 | GP-060327 | 0137 | 1 | Repeated Downlink FACCH/H  | 7.3.0  | 7.4.0  |
| 2006-04 | 29 | GP-060713 | 0139 |   | Repeated SACCH performance - removal of brackets   | 7.4.0  | 7.5.0  |
| 2006-04 | 29 | GP-060923 | 0140 | 1 | Editorial correction of frequency range  | 7.4.0  | 7.5.0  |
| 2006-06 | 30 | GP-061111 | 0141 |   | Correction of terminology: "allocation" vs. "assignment"   | 7.5.0  | 7.6.0  |
| 2006-06 | 30 | GP-061475 | 0142 | 2 | A-GPS Minimum Performance specification baseline   | 7.5.0  | 7.6.0  |
| 2006-09 | 31 | GP-061653 | 0144 |   | Correction of undefined or wrong references  | 7.6.0  | 7.7.0  |
| 2006-11 | 32 | GP-062452 | 0147 | 1 | Introduction of performance requirements for DARP phase II (MSRD)  | 7.7.0  | 7.8.0  |
| 2007-02 | 33 | GP-070110 | 0149 |   | Max Response Time defined for A-GPS Minimum Performance requirements   | 7.8.0  | 7.9.0  |
| 2007-02 | 33 | GP-070111 | 0150 |   | Clarifications to A-GPS Minimum Performance requirements   | 7.8.0  | 7.9.0  |
| 2007-02 | 33 | GP-070159 | 0151 |   | Performance requirements for DARP phase II (MSRD) – Removal of brackets  | 7.8.0  | 7.9.0  |
| 2007-02 | 33 | GP-070367 | 0152 | 1 | Guard period handling option in an exceptional GPRS case   | 7.8.0  | 7.9.0  |
| 2007-05 | 34 | GP-071008 | 0155 | 1 | MSRD (DARP Phase II) requirements in Downlink Dual Carrier Configurations  | 7.9.0  | 7.10.0 |
| 2007-08 | 35 | GP-071204 | 0154 | 2 | Correction to extreme condition voltages for Lithium batteries in table D.2.2  | 7.10.0 | 7.11.0 |
| 2007-08 | 35 | GP-071205 | 0156 |   | Correction for multislot power versus time mask  | 7.10.0 | 7.11.0 |
| 2007-08 | 35 | GP-071545 | 0157 | 2 | Introduction of requirements for REDHOT, HUGE and LATRED   | 7.10.0 | 7.11.0 |
| 2007-11 | 36 | GP-071957 | 0158 | 1 | Time masks for EGPRS2  | 7.11.0 | 7.12.0 |
| 2007-11 | 36 | GP-071959 | 0159 | 1 | Clarifications and minor corrections for EGPRS2  | 7.11.0 | 7.12.0 |
| 2007-11 | 36 | GP-071892 | 0160 | 2 | MS Antenna Performance Requirements  | 7.11.0 | 7.12.0 |
| 2007-11 | 36 | GP-071969 | 0162 |   | Performance requirements for DARP phase I & II – Support of GSM 400 and 700 bands  | 7.11.0 | 7.12.0 |
| 2008-02 | 37 | GP-080363 | 0163 | 1 | Correction of requirement tables for EGPRS2 and RTTI   | 7.12.0 | 7.13.0 |
| 2008-02 | 37 | GP-080120 | 0166 |   | Correction of IBSS requirements for GSM 700, GSM 850 and PCS 1900  | 7.12.0 | 7.13.0 |
| 2008-02 | 37 | GP-080292 | 0167 |   | EVM measurement filter for higher symbol rate  | 7.12.0 | 7.13.0 |
| 2008-02 | 37 | GP-080394 | 0161 | 4 | Introduction of a new multicarrier BTS class   | 7.13.0 | 8.0.0  |
| 2008-05 | 38 | GP-080500 | 0170 |   | Miscellaneous corrections  | 8.0.0  | 8.1.0  |
| 2008-05 | 38 | GP-080503 | 0172 |   | Output power definition  | 8.0.0  | 8.1.0  |

|         |    |           |      |   |  |       |       |
|---------|----|-----------|------|---|--|-------|-------|
| 2008-05 | 38 | GP-080779 | 0174 | 1 | Spectrum due to modulation of the wide bandwidth pulse shape   | 8.0.0 | 8.1.0 |
| 2008-05 | 38 | GP-080621 | 0178 |   | Removal of correction tables for performance requirement for LATRED  | 8.0.0 | 8.1.0 |
| 2008-05 | 38 | GP-080625 | 0180 |   | Power vs Time Masks for EGPRS2-B   | 8.0.0 | 8.1.0 |
| 2008-05 | 38 | GP-080929 | 0183 | 2 | Corrections and clarifications to multicarrier BTS class   | 8.0.0 | 8.1.0 |
| 2008-08 | 39 | GP-081318 | 0176 | 2 | EVM for EGPRS2 DL  | 8.1.0 | 8.2.0 |
| 2008-08 | 39 | GP-081320 | 0182 | 3 | Proposal for some receiver performance values  | 8.1.0 | 8.2.0 |
| 2008-08 | 39 | GP-081268 | 0190 | 1 | Correction of reference interference performance for DARP phase II MS on a Downlink Dual Carrier configuration                                     | 8.1.0 | 8.2.0 |
| 2008-08 | 39 | GP-081380 | 0191 | 1 | Addition of requirements new frequency bands for co-existence and co-siting  | 8.1.0 | 8.2.0 |
| 2008-08 | 39 | GP-081416 | 0193 | 2 | Aligning GSM 700 frequencies usage with other 3GPP technologies  | 8.1.0 | 8.2.0 |
| 2008-08 | 39 | GP-081426 | 0194 | 3 | Clarifications of requirements for multicarrier BTS class 1 and 2  | 8.1.0 | 8.2.0 |
| 2008-11 | 40 | GP-081588 | 0188 | 2 | Mixed modulation USF   | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081796 | 0196 | 1 | EVM for EGPRS2 DL  | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081591 | 0198 |   | Clarification for Interference ratio for adjacent channel requirements   | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081595 | 0200 |   | Reference performance for EGPRS2   | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081903 | 0202 | 2 | Reference Performance for LATRED   | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081883 | 0203 | 2 | Corrections to MCBTS requirements  | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081881 | 0204 | 2 | Wideband noise lower limit in MC-BTS   | 8.2.0 | 8.3.0 |
| 2008-11 | 40 | GP-081886 | 0207 |   | Correction of MS requirements for spurious emission in 700 MHz band  | 8.2.0 | 8.3.0 |
| 2009-02 | 41 | GP-090306 | 0210 | 1 | Enhancement of readability of multicarrier spectral requirements   | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090438 | 0211 | 1 | Introduction of multicarrier BTS class for GSM 700, GSM 850 and PCS 1900   | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090418 | 0212 | 1 | Correction of requirements for Nominal Error Rate at higher order modulations  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090208 | 0214 |   | Correction of frequency range for GSM 700 regarding blocking requirements  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090441 | 0215 | 1 | Correction of absolute limit for IM products from multicarrier BTS   | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090417 | 0217 | 1 | Reference Performance for EGPRS2, Sensitivity  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090220 | 0219 |   | Reference Performance for EGPRS2, Co-Channel interference  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090430 | 0221 | 1 | Reference Performance for EGPRS2, Adjacent-Channel interference  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090230 | 0223 |   | EVM for EGPRS2-B DL  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090433 | 0224 | 1 | Clarification of exceptions for MCBTS regarding Spectrum due to modulation and wideband noise  | 8.3.0 | 8.4.0 |
| 2009-02 | 41 | GP-090537 | 0226 | 3 | Alignment of Power Level in Nominal Error Rate Measurement with GMSK Modulation to the Relaxed Blocking Values of GSM 400, T-GSM 810 and E-GSM 900 | 8.3.0 | 8.4.0 |
| 2009-05 | 42 | GP-090968 | 0229 | 1 | Introduction of EVM requirement for EGPRS2 for Repeater  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090667 | 0232 |   | Addition of EGPRS2 DL Performance Requirements for MSRD Capable Mobiles  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090693 | 0235 |   | EVM for EGPRS2-A, UL   | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090977 | 0239 | 2 | Introduction of MCS-0  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-091041 | 0242 | 3 | Reference performance EGPRS2-A, DL, Adjacent channel interference  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090827 | 0246 | 1 | Reference performance EGPRS2-A, UL, Co-channel and Adjacent channel interference   | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-091045 | 0249 | 2 | Clarifications of requirements for Spectrum due to modulation for MCBTS at frequency offset below 1.8 MHz  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090722 | 0251 |   | Clarifications of requirements for Spectrum due to switching transients for MCBTS  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090995 | 0252 | 1 | Alignment of requirements for Nominal Error Rate (NER) and RACH performance with blocking  | 8.4.0 | 8.5.0 |

|         |    |           |      |   |   |       |       |
|---------|----|-----------|------|---|---|-------|-------|
|         |    |           |      |   | requirements for MCBTS in lower frequency bands   |       |       |
| 2009-05 | 42 | GP-090997 | 0253 | 1 | Correction of absolute limit for IM products and related clarifications for multicarrier BTS  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090897 | 0255 | 1 | Reference performance EGPRS2-B, DL, Sensitivity and Co-channel performance  | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090881 | 0257 |   | Reference performance EGPRS2, UL, Sensitivity   | 8.4.0 | 8.5.0 |
| 2009-05 | 42 | GP-090985 | 0259 |   | Improvement of alignment between spurious emissions of MCBTS Classes 1 and 2  | 8.4.0 | 8.5.0 |
| 2009-09 | 43 | GP-091253 | 0237 | 3 | Spectrum due to modulation and wide band noise, narrow pulse EGPRS2-B   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091257 | 0244 | 1 | Reference performance EGPRS2-A, 400 kHz Adjacent channel interference   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091132 | 0262 |   | Introduction of EVM requirement for EGPRS2 for Repeater   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091269 | 0269 |   | Relaxation of reference performance EGPRS2-A, DL, Co-channel and Adj-channel  | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091275 | 0273 |   | Reference performance EGPRS2-B, Sensitivity and Reduced Latency   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091281 | 0277 |   | Reference performance EGPRS2-B, UL, Co-channel  | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091674 | 0281 | 2 | Reference performance EGPRS2-B, UL, Adj-channel   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091296 | 0286 |   | Removal of brackets, RMS EVM, EGPRS2, Base station  | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091302 | 0288 |   | Removal of brackets: NER, Adj-ch signal levels and Pico-BTS requirements for EGPRS2   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091567 | 0289 | 1 | Correction of lower frequency offset limit for exceptions in requirements for Spectrum due to modulation and wide band noise for MCBTS                    | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091322 | 0294 |   | Removal T-GSM 900   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091323 | 0295 |   | Introduction of requirements for protection of services in the new frequency bands 1880-1920 MHz and 2300-2400 MHz available for 3GPP access technologies | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091740 | 0297 | 2 | Reference performance EGPRS2-B, DL, Sensitivity (updates and additions)   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091331 | 0299 |   | Reference performance EGPRS2-B, DL, Co-channel (updates and additions)  | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091736 | 0301 | 2 | Introduction of MCBTS capability for operating split frequency allocation   | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091664 | 0305 |   | Removal of blocking, IM characteristics and AM suppression receiver requirements for QPSK, 16QAM and 32QAM modulations introduced in EGPRS2               | 8.5.0 | 8.6.0 |
| 2009-09 | 43 | GP-091585 | 0290 | 1 | Introduction of Minimum receiver performance for multicarrier BTS declared as Multi-standard capable base station (MSR BS)                                | 8.6.0 | 9.0.0 |
| 2009-09 | 43 | GP-091771 | 0303 | 3 | Restructuring TS 45.005 to facilitate referencing to relevant Single RAT requirements from MSR BS TS  | 8.6.0 | 9.0.0 |
| 2009-09 | 43 | GP-091682 | 0306 |   | Additional GANSS Minimum Performance requirements   | 8.6.0 | 9.0.0 |
| 2009-11 | 44 | GP-092127 | 284  | 2 | Single Antenna Requirements for EGPRS2-B, UL  | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-091965 | 0307 | 3 | Removal of Brackets, EGPRS2-A UL  | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092190 | 0310 | 4 | Removal of Brackets, EGPRS2-B UL  | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-091991 | 0314 | 2 | Reference performance EGPRS2-B, UL, 400 kHz Adjacent channel interference, without brackets   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092130 | 0317 |   | Correction of remaining errors for EGPRS2 after the split between BTS and MS requirements   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092149 | 0319 | 1 | Correction of remaining errors for MCBTS after the split between BTS and MS requirements  | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092318 | 0320 | 3 | Addition of requirement to test intra BSS IM attenuation at maximum carrier frequency spacing   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092467 | 0322 | 2 | Correction of application of spurious emission requirements for MCBTS   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092151 | 0323 | 1 | Corrections of references   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092335 | 0324 | 4 | Corrections to minimum receiver requirements for Multi Standard BS in Annex P   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092133 | 0327 |   | Reference performance, LATRED, EGPRS and EGPRS2-A, DL   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-092136 | 0330 | 1 | Removal of brackets, EGPRS2 MS requirements   | 9.0.0 | 9.1.0 |
| 2009-11 | 44 | GP-091939 | 0339 |   | Correction to GANSS Dynamic Range Requirements  | 9.0.0 | 9.1.0 |

|         |    |           |      |   |   |        |        |
|---------|----|-----------|------|---|---|--------|--------|
| 2009-11 | 44 | GP-092326 | 0340 | 1 | GANSS minimum performance requirements – closing some open items in sensitivity scenarios                         | 9.0.0  | 9.1.0  |
| 2009-11 | 44 | GP-091997 | 0342 |   | Correction of Nominal Error Rate (NER) requirements for GSM700  | 9.0.0  | 9.1.0  |
| 2009-11 | 44 | GP-092412 | 0346 | 2 | Correction to EGPRS2-A, 400 kHz ACI   | 9.0.0  | 9.1.0  |
| 2009-11 | 44 | GP-092312 | 0348 | 1 | EGPRS2-B uplink spectrum mask   | 9.0.0  | 9.1.0  |
| 2010-03 | 45 | GP-100027 | 0352 |   | Clarification to Satellite constellation and assistance data  | 9.1.0  | 9.2.0  |
| 2010-03 | 45 | GP-100090 | 0355 |   | EGPRS2 EVM requirements for repeater  | 9.1.0  | 9.2.0  |
| 2010-03 | 45 | GP-100223 | 0358 |   | Removal of brackets, LATRED, EGPRS2-A and miscellaneous corrections   | 9.1.0  | 9.2.0  |
| 2010-03 | 45 | GP-100502 | 0368 | 1 | Reference performance, EGPRS2-A USF, DL, Sensitivity, Co-channel and Adj-channel                                  | 9.1.0  | 9.2.0  |
| 2010-03 | 45 | GP-100563 | 0370 | 1 | Corrections and clarifications of the MCBTS requirements  | 9.1.0  | 9.2.0  |
| 2010-05 | 46 | GP-100982 | 0350 | 3 | Correction of exceptions of Spectrum due to modulation and wideband noise for MCBTS                               | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-101035 | 0363 | 4 | Alignment of blocking requirements in multi-RAT operation and in GSM single-RAT operation for MSR equipment       | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-101041 | 0372 | 3 | A-GANSS Sensitivity & Dynamic range   | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100695 | 0375 | 1 | Introduction of DL performance requirements for EGPRS2-B, Adjacent channel and RTTI/PAN                           | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100795 | 0377 |   | Alignment of definition and requirements for spurious emissions with CEPT/ERC/REC 74-01                           | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100825 | 0379 |   | Alignment of requirements for out-of-band spurious emissions with CEPT/ERC/REC 74-01                              | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100696 | 0383 | 1 | Clarification of adjacent timeslot levels   | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100699 | 0386 | 1 | Numerous corrections  | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-100993 | 0393 |   | Alignment of inband frequency range for GSM 850 with other 3GPP access technologies                               | 9.2.0  | 9.3.0  |
| 2010-05 | 46 | GP-101038 | 0394 | 1 | Introduction of requirements for spurious emission in frequency band 20   | 9.2.0  | 9.3.0  |
| 2010-09 | 47 | GP-101625 | 0398 | 4 | Introduction of VAMOS performance requirements  | 9.3.0  | 9.4.0  |
| 2010-09 | 47 | GP-101539 | 0400 | 1 | Clarification of multicarrier BTS receiver requirements   | 9.3.0  | 9.4.0  |
| 2010-11 | 48 | GP-101831 | 0360 | 2 | Reduction of the number of multicarrier BTS classes   | 9.4.0  | 9.5.0  |
| 2010-11 | 48 | GP-101763 | 0408 |   | DL reference performance requirements for EGPRS2-B, USF   | 9.4.0  | 9.5.0  |
| 2010-11 | 48 | GP-101766 | 0411 |   | DL reference performance requirements for EGPRS2-B – 2nd adjacent channel   | 9.4.0  | 9.5.0  |
| 2010-11 | 48 | GP-101996 | 0414 | 1 | Enhanced numbering of figures and tables  | 9.4.0  | 9.5.0  |
| 2010-11 | 48 | GP-102047 | 0416 | 1 | Clarification of the measurement of the spectrum exceptions in MCBTS  | 9.4.0  | 9.5.0  |
| 2011-03 | 49 | GP-110423 | 0417 | 1 | Corrections to A-GNSS values in Annex O   | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110141 | 0418 |   | Correction of equipment types in receiver interference performance  | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110453 | 0421 | 1 | Reference performance for MCS-0, Sensitivity and Co-channel   | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110424 | 0424 | 1 | VAMOS uplink performance requirements   | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110229 | 0427 |   | Corrections of the MCBTS IM requirements  | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110490 | 0428 | 1 | VAMOS requirements for downlink performance definition  | 9.5.0  | 9.6.0  |
| 2011-03 | 49 | GP-110487 | 0422 | 2 | TIGHTER Performance requirements  | 9.6.0  | 10.0.0 |
| 2011-05 | 50 | GP-110963 | 0431 | 3 | Implicit relaxation of DARP-I requirements in DLDC configurations   | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110981 | 0435 | 1 | Clarification of AM suppression receiver characteristics for multicarrier BTS equipped with multicarrier receiver | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110947 | 0436 | 1 | Clarification of receiver characteristics for multicarrier BTS equipped with multicarrier receiver                | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110983 | 0437 | 1 | Clarification of blocking receiver characteristics for multicarrier BTS equipped with multicarrier receiver       | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110682 | 0439 |   | Miscellaneous corrections for MCBTS   | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110688 | 0442 |   | Clarification of the out-of-band emission principles for MCBTS  | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110926 | 0444 | 2 | Correction for equipment types in VAMOS performance requirements  | 10.0.0 | 10.1.0 |

|         |    |           |      |   |  |        |        |
|---------|----|-----------|------|---|--|--------|--------|
| 2011-05 | 50 | GP-110892 | 0448 | 1 | Reference performance for MCS-0, Sensitivity and Co-channel [removal of brackets]                                | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110874 | 0450 | 1 | Power versus time mask for AQPSK   | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110878 | 0453 | 1 | Downlink performance requirements for VAMOS MS   | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110884 | 0456 |   | Clarification of test cases for dual antenna terminals using legacy requirements                                 | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110958 | 0458 | 3 | Uplink receiver performance requirements for VAMOS   | 10.0.0 | 10.1.0 |
| 2011-05 | 50 | GP-110986 | 0463 |   | Removal of VDTS-4  | 10.0.0 | 10.1.0 |
| 2011-09 | 51 | GP-111299 | 0452 | 3 | Clarification of the notation used for frequency offsets   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111099 | 0466 |   | Correction to reference interference performance for VAMOS I MS  | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111373 | 0468 | 1 | EVM for AQPSK for Repeater   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111300 | 0470 | 1 | Correction of some VAMOS-II AHS7.4 RBERII values and a TCH/HS Rber1b typing error for GSM900 VDTS-3 SCPIR = +4dB | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111380 | 0471 | 1 | Interferer signal levels for TIGHTER   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111158 | 0472 |   | Clarification of references to TS 24.008   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111295 | 0473 | 1 | TIGHTER Performance requirements   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111368 | 0475 | 1 | Introduction of VDTS-4   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111192 | 0477 |   | Introduction of EVM requirements for AQPSK   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111446 | 0479 | 1 | Uplink receiver performance requirements for VAMOS   | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111462 | 0481 | 2 | Clarification of applicability of requirements for spurious response frequencies for multicarrier receiver       | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111450 | 0483 | 1 | Reference control channel performance for VAMOS-II MS  | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111444 | 0485 |   | VAMOS II performance requirements  | 10.1.0 | 10.2.0 |
| 2011-09 | 51 | GP-111458 | 0487 |   | Reference DTX performance requirements for VAMOS-II MS   | 10.1.0 | 10.2.0 |
| 2011-11 | 52 | GP-111773 | 0489 | 1 | On EVM requirements and SCPIR_DL in the case of AQPSK Modulation for Repeater                                    | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111742 | 0490 | 1 | Correction of TIGHTER requirement errors   | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111743 | 0491 | 1 | Update of TIGHTER EGPRS2-A requirements  | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111790 | 0492 | 1 | Introducing SCH sensitivity TIGHTER requirements   | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111590 | 0494 |   | Correction of VAMOS-II DL DTX requirements   | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111856 | 0496 | 2 | Correction of VAMOS-II performance requirements  | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111613 | 0498 |   | Correction of VDTS-4 signal levels   | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111620 | 0501 |   | Correction to uplink receiver performance requirements for VAMOS and removal of brackets                         | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111638 | 0504 |   | Clarification on Normal BTS co-location blocking requirements  | 10.2.0 | 10.3.0 |
| 2011-11 | 52 | GP-111745 | 0506 |   | Removal of brackets for VAMOS BTS requirements   | 10.2.0 | 10.3.0 |
| 2012-03 | 53 | GP-120075 | 0508 |   | VAMOS-I DL performance requirements  | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120077 | 0510 |   | Removal of VAMOS-II square brackets and reference correction   | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120079 | 0512 |   | Correction of VAMOS-II DL control channel performance requirements   | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120101 | 0513 |   | TIGHTER PDTCH BLER level clarification   | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120102 | 0514 |   | TIGHTER – Removal of Square brackets for TCH and Control Channel requirements                                    | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120118 | 0516 |   | Update of Reference clause with 3GPP TS 51.026, repeater RF conformance test specification                       | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120171 | 0519 |   | Removal of brackets for general receiver performance   | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120289 | 0523 |   | Removal of VAMOS-I DL square brackets  | 10.3.0 | 10.4.0 |
| 2012-03 | 53 | GP-120410 | 0525 |   | Correction to VAMOS-II VDTS-4 performance requirements for TCH/AHS7.4 codec                                      | 10.3.0 | 10.4.0 |
| 2012-05 | 54 | GP-120759 | 0526 | 1 | TIGHTER - Removal of Square brackets for GPRS and EGPRS requirements   | 10.4.0 | 10.5.0 |
| 2012-05 | 54 | GP-120603 | 0529 |   | Removal of VAMOS-I DL square brackets  | 10.4.0 | 10.5.0 |
| 2012-05 | 54 | GP-120656 | 0532 |   | Correction of co-location blocking table   | 10.4.0 | 10.5.0 |
| 2012-05 | 54 | GP-120751 | 0533 | 1 | TIGHTER - FER / RBER unbalance corrections   | 10.4.0 | 10.5.0 |
| 2012-05 | 54 | GP-120761 | 0527 | 2 | Introduction of medium range and local area multicarrier BTS classes   | 10.5.0 | 11.0.0 |
| 2012-08 | 55 | GP-120923 | 0534 |   | Spurious emission limit in receive band for Medium Range multicarrier BTS  | 11.0.0 | 11.1.0 |
| 2012-08 | 55 | GP-121127 | 0535 | 1 | Correction factor to reference sensitivity and   | 11.0.0 | 11.1.0 |

|         |    |           |      |   |  |        |        |
|---------|----|-----------|------|---|--|--------|--------|
|         |    |           |      |   | interference requirements for Local Area multicarrier BTS                                  |        |        |
| 2012-08 | 55 | GP-121128 | 0541 | 2 | Corrections on medium range and local area multicarrier BTS requirements                   | 11.0.0 | 11.1.0 |
| 2012-08 | 55 | GP-120952 | 0544 |   | Removal of signal level brackets for VAMOS reference interference performance              | 11.0.0 | 11.1.0 |
| 2012-08 | 55 | GP-121136 | 0545 | 1 | Clarification of output power declaration for Medium Range and Local Area multicarrier BTS | 11.0.0 | 11.1.0 |
| 2012-08 | 55 | GP-121156 | 0547 |   | Clarification of the relation between TIGHTER and DARP phase I MS capability               | 11.0.0 | 11.1.0 |

---

## History

| <b>Document history</b> |              |             |
|-------------------------|--------------|-------------|
| V11.1.0                 | October 2012 | Publication |
|                         |              |             |
|                         |              |             |
|                         |              |             |
|                         |              |             |