## ETSI TS 132 641 V9.0.0 (2010-02)

Technical Specification

Universal Mobile Telecommunications System (UMTS);


LTE;

**Telecommunication management;** 

Configuration Management (CM);

UTRAN network resources Integration Reference Point (IRP); Requirements

(3GPP TS 32.641 version 9.0.0 Release 9)

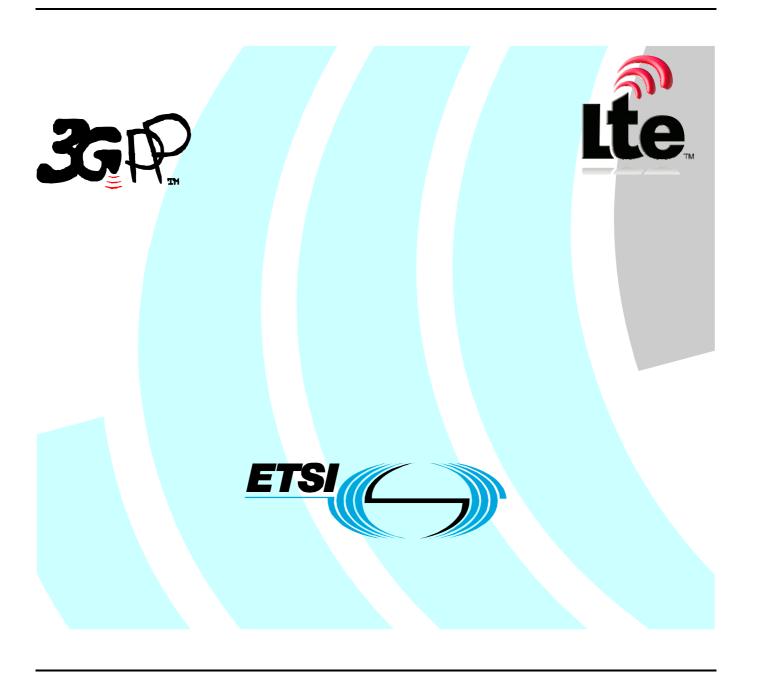

Reference RTS/TSGS-0532641v900 Keywords LTE. UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2010. All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP**<sup>™</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

## Contents

Intel	lectual Property Rights	2
	word	
	word	
	duction	
	Scope	
	References	
3		
3.1 3.2	Definitions and abbreviations.  Definitions	5
4	Requirements	
Ann	ex A (informative): Change history	7
Hista		

## **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

## Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

32.641:	Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP): Requirements
32.642:	Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP): Network Resource Model (NRM)
32.643:	Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP): Common Object Request Broker Architecture (CORBA) Solution Set (SS)
32.645:	Configuration Management (CM); UTRAN network resources Integration Reference Point (IRP): Bulk CM eXtensible Markup Language (XML) file format definition

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

## 1 Scope

The present document defines, in addition to the requirements defined in [1], [2] and [3], the requirements for the present IRP: UTRAN Network Resources IRP.

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".

## 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

**IRP:** See 3GPP TS 32.101 [1].

Managed Object (MO): an abstract entity, which may be accessed through an open interface between two or more systems, and representing a Network Resource (NR) for the purpose of management. The Managed Object (MO) is an instance of a Managed Object Class (MOC) as defined in a Management Information Model (MIM). The MIM does not define how the MO or NR is implemented; only what can be seen in the interface.

Managed Object Class (MOC): a description of all the common characteristics for a number of MOs, such as their attributes, operations, notifications and behaviour.

**Management Information Model (MIM)**: also referred to as NRM – see the definition below. There is a slight difference between the meaning of MIM and NRM – the term MIM is generic and can be used to denote any type of management model, while NRM denotes the model of the actual managed telecommunications Network Resources (NRs).

**Network Element (NE):** is a discrete telecommunications entity, which can be, managed over a specific interface e.g. the RNC.

**Network Resource (NR):** is a component of a NE, which can be identified as a discrete separate entity and is in an object oriented environment for the purpose of management represented by an abstract entity called Managed Object (MO).

**Network Resource Model (NRM)**: a model representing the actual managed telecommunications Network Resources (NRs) that a System is providing through the subject IRP. An NRM describes Managed Object Classes (MOC), their

associations, attributes and operations. The NRM is also referred to as "MIM" (see above) which originates from the ITU-T TMN.

**Operations System (OS):** indicates a generic management system, independent of its location level within the management hierarchy.

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CM Configuration Management **FDD** Frequency Division Duplex **GSM** Global System for Mobile communication **IRP Integration Reference Point** Information Service (see [1]) IS International Telecommunication Union, Telecommunication Standardisation Sector ITU-T MIM Management Information Model MO Managed Object Managed Object Class MOC Network Element NE NR Network Resource NRM Network Resource Model **Operations System** OS Quality of Service QoS Radio Network Controller **RNC** Time Division Duplex **TDD** 

UMTS Universal Mobile Telecommunications System
UTRAN Universal Terrestrial Radio Access Network

## 4 Requirements

The following general and high-level requirements apply for the present IRP:

- A. IRP-related requirements in 3GPP TS 32.101 [1].
- B. IRP-related requirements in 3GPP TS 32.102 [2].
- C. IRP-related requirements in 3GPP TS 32.600 [3].

In addition to the above, the following more specific requirements apply:

- 1. The NRM defined by this IRP shall contain UTRAN specific MOCs and related definitions, supporting UTRAN network entities, which shall include FDD and TDD mode aspects.
- 2. The NRM defined by this IRP shall support management of UMTS-GSM inter-system handover.

# Annex A (informative): Change history

Change history									
Date	TSG#	TSG Doc.	CR	Rev	Subject/Comment	Old	New		
Jun 2001	SA_12	SP-010283			Approved at TSG SA#12 and placed under Change Control	2.0.0	4.0.0		
Sep 2001	SA_17	SP-020491	001		Upgrade to Rel-5	4.0.0	5.0.0		
Mar 2004	SA_23	SP-040129	002		Add enhancement for support of both FDD and TDD modes	5.0.0	6.0.0		
Mar 2005	-				Added in Introduction 32.645 to the TS family overview	6.0.0	6.0.1		
Jun 2007	SA_36				Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted reference to	6.0.1	7.0.0		
					CMIP SS, discontinued from R7 onwards.				
Dec 2008	SA_42				Upgrade to Release 8	7.0.0	8.0.0		
Dec 2009	-	-	-	-	Update to Rel-9 version	8.0.0	9.0.0		

## History

Document history							
V9.0.0	February 2010	Publication					